


EUT Information

EUT Name:	ColorFluxLightBulb
Model:	L4
Test Mode:	WIFI 2.4G_11b_Ch1
Test Voltage::	DC 5V from USB
Remark:	Temp 24 Humi:47%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

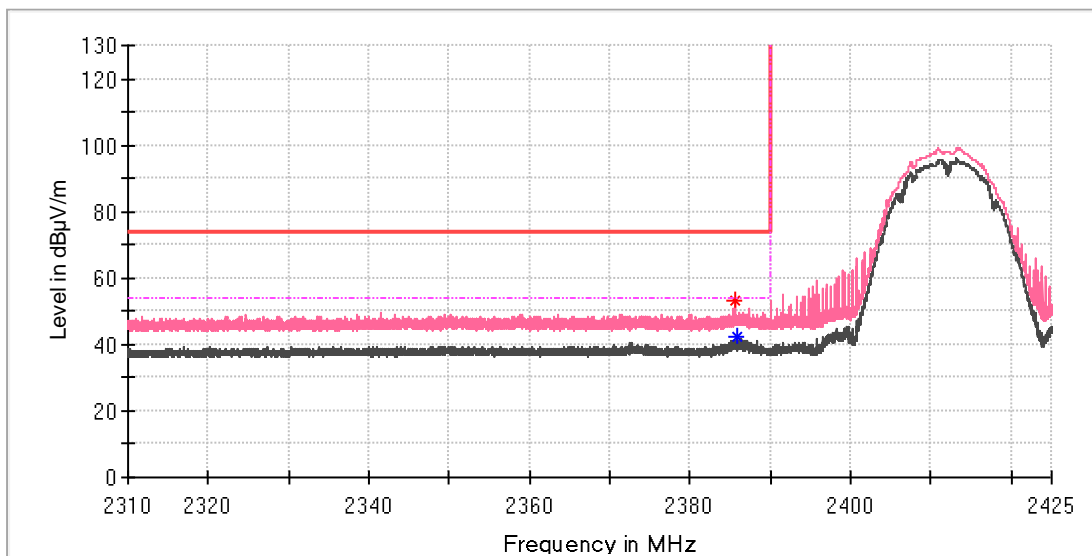

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2385.710250	53.06	---	74.00	20.94	100.0	V	0.0	7.0
2385.813750	---	42.12	54.00	11.88	100.0	V	7.0	7.0

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	ColorFluxLightBulb
Model:	L4
Test Mode:	WIFI 2.4G_11b_Ch6
Test Voltage::	DC 5V from USB
Remark:	Temp 23 Humi:47%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

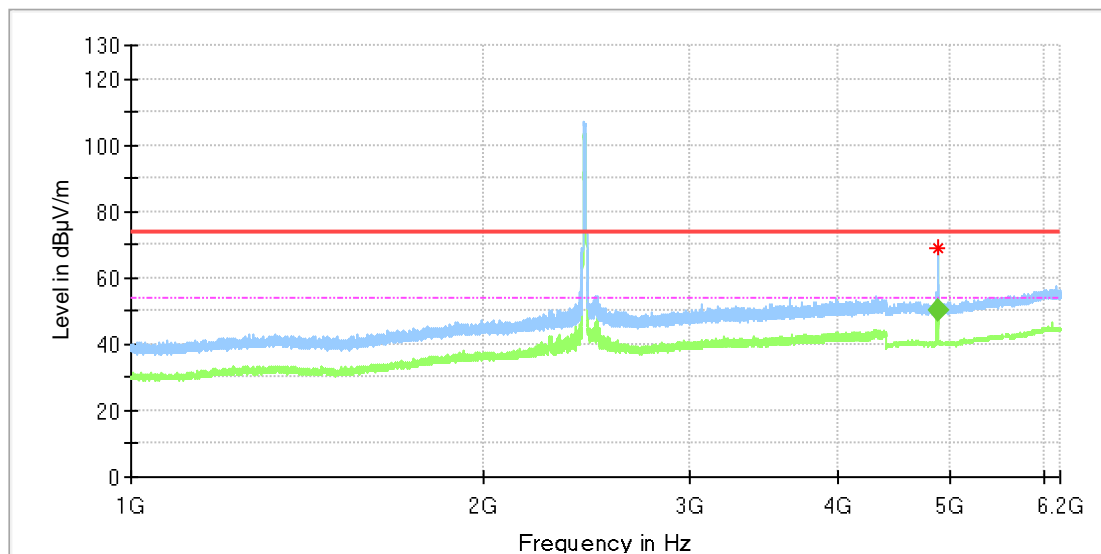

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4874.000000	68.75	---	74.00	5.25	100.0	H	150.0	11.8

Final_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4874.166667	50.23	54.00	3.77	105.0	H	148.0	11.8

EUT Information

EUT Name:	ColorFluxLightBulb
Model:	L4
Test Mode:	WIFI 2.4G_11b_Ch6
Test Voltage::	DC 5V from USB
Remark:	Temp 23 Humi:47%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

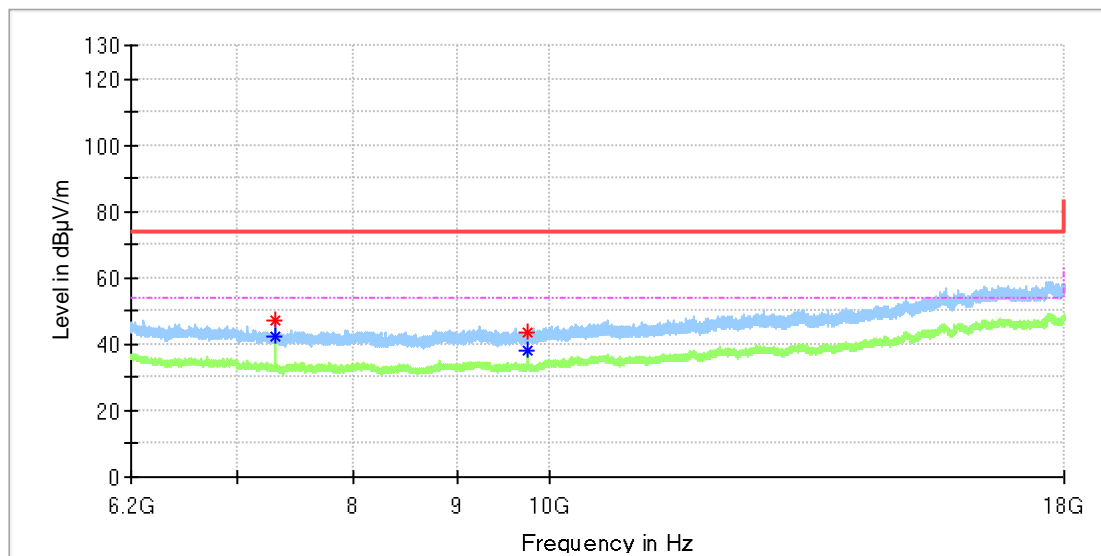

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7310.183333	---	42.37	54.00	11.63	100.0	H	104.0	8.2
7310.183333	47.32	---	74.00	26.68	100.0	H	104.0	8.2
9747.866667	43.63	---	74.00	30.37	100.0	H	233.0	10.4
9747.866667	---	37.93	54.00	16.07	100.0	H	233.0	10.4

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	ColorFluxLightBulb
Model:	L4
Test Mode:	WIFI 2.4G_11b_Ch6
Test Voltage::	DC 5V from USB
Remark:	Temp 23 Humi:47%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

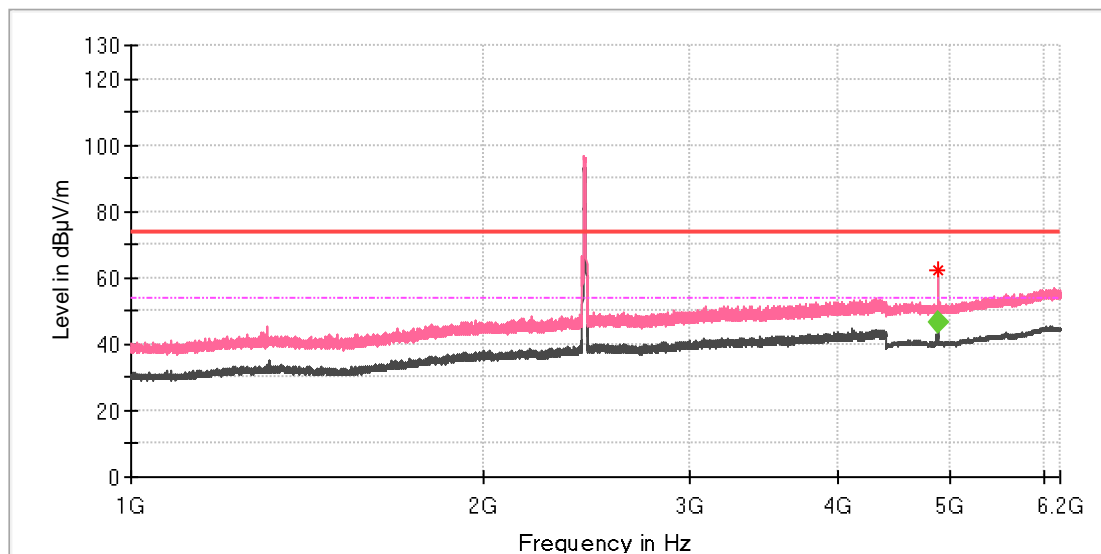

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4874.000000	62.48	---	74.00	11.52	100.0	V	143.0	11.8

Final_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4874.363889	46.78	54.00	7.22	105.0	V	138.0	11.8

EUT Information

EUT Name:	ColorFluxLightBulb
Model:	L4
Test Mode:	WIFI 2.4G_11b_Ch6
Test Voltage::	DC 5V from USB
Remark:	Temp 23 Humi:47%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

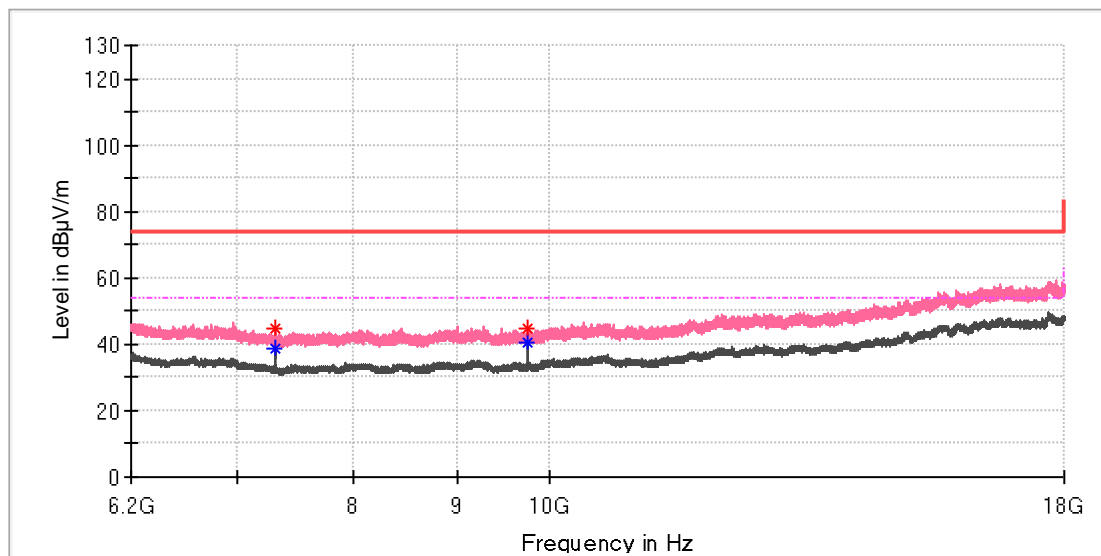

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7310.183333	---	38.60	54.00	15.40	100.0	V	282.0	8.2
7310.675000	44.91	---	74.00	29.09	100.0	V	282.0	8.2
9747.866667	44.95	---	74.00	29.05	100.0	V	0.0	10.4
9747.866667	---	40.32	54.00	13.68	100.0	V	0.0	10.4

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	ColorFluxLightBulb
Model:	L4
Test Mode:	WIFI 2.4G_11b_Ch11
Test Voltage::	DC 5V from USB
Remark:	Temp 23 Humi:47%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

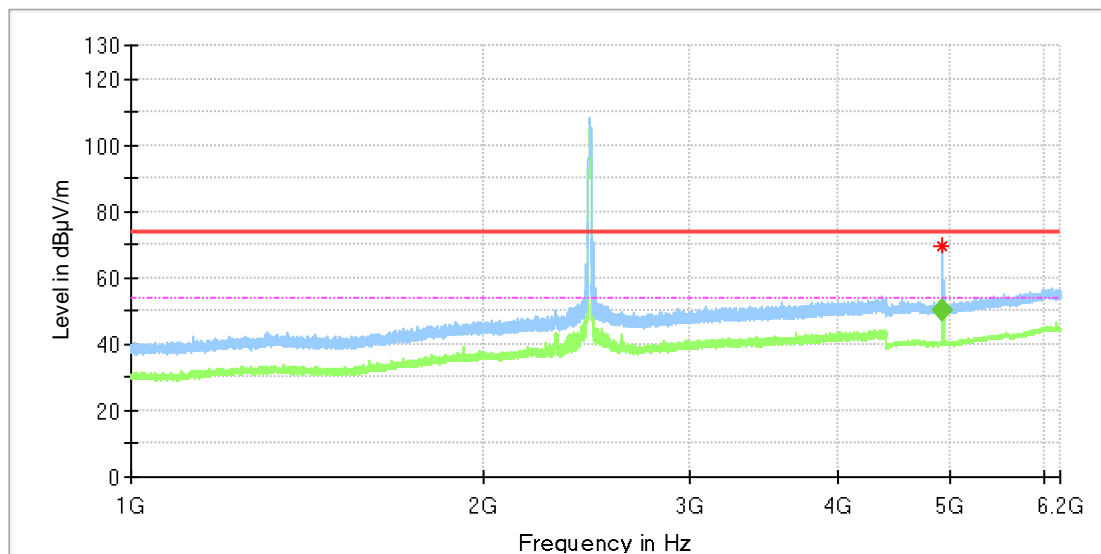

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4924.000000	69.56	---	74.00	4.44	100.0	H	184.0	11.8

Final_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4923.894444	50.37	54.00	3.63	100.0	H	179.0	11.8

EUT Information

EUT Name:	ColorFluxLightBulb
Model:	L4
Test Mode:	WIFI 2.4G_11b_Ch11
Test Voltage::	DC 5V from USB
Remark:	Temp 23 Humi:47%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

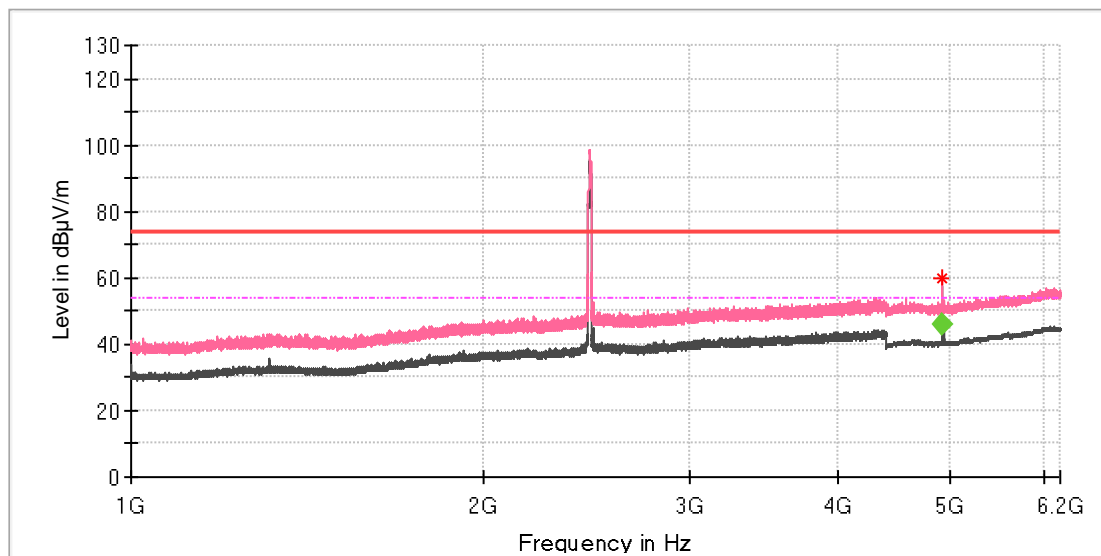

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4924.000000	60.09	---	74.00	13.91	100.0	V	163.0	11.8

Final_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4923.952778	46.12	54.00	7.88	105.0	V	158.0	11.8

EUT Information

EUT Name:	ColorFluxLightBulb
Model:	L4
Test Mode:	WIFI 2.4G_11b_Ch11
Test Voltage::	DC 5V from USB
Remark:	Temp 23 Humi:47%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

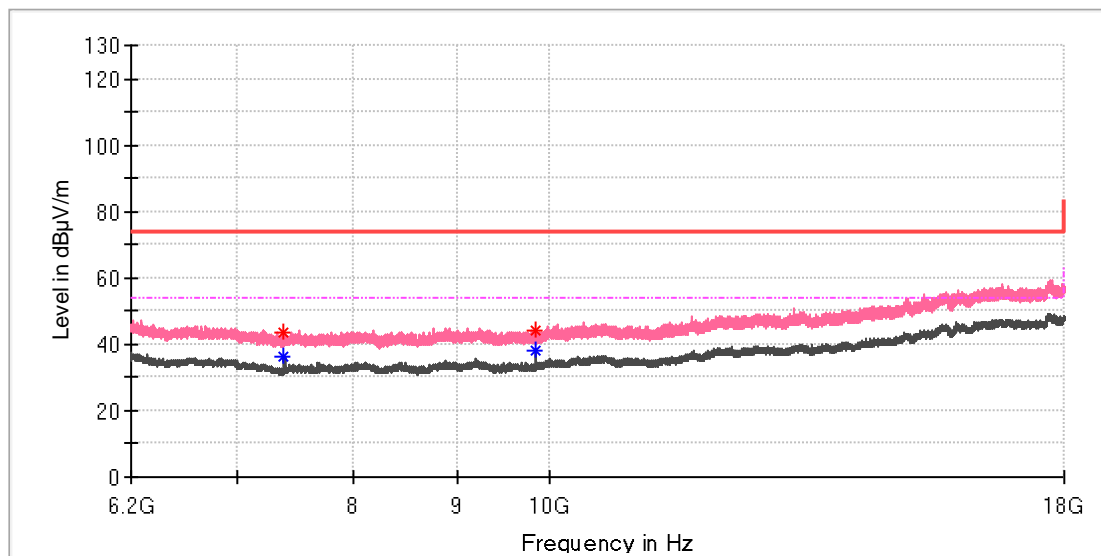

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7379.016667	43.73	---	74.00	30.27	100.0	V	150.0	8.2
7383.933333	---	36.28	54.00	17.72	100.0	V	308.0	8.2
9847.675000	---	38.14	54.00	15.86	100.0	V	122.0	10.6
9848.166667	44.10	---	74.00	29.90	100.0	V	0.0	10.6

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	ColorFluxLightBulb
Model:	L4
Test Mode:	WIFI 2.4G_11b_Ch11
Test Voltage::	DC 5V from USB
Remark:	Temp 23 Humi:47%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

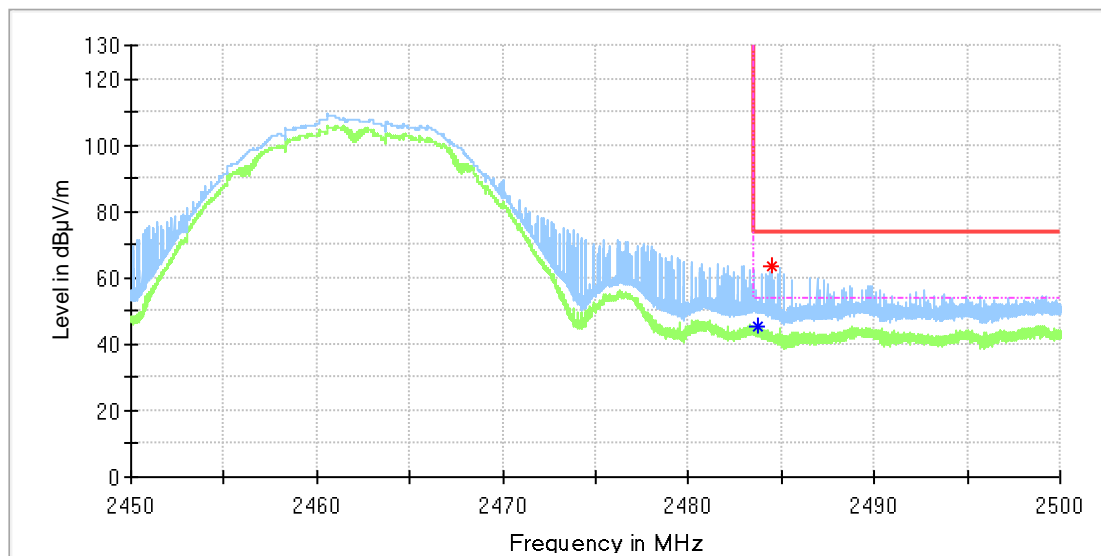

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.702500	---	45.16	54.00	8.84	100.0	H	187.0	7.4
2484.515000	63.70	---	74.00	10.30	100.0	H	187.0	7.4

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	ColorFluxLightBulb
Model:	L4
Test Mode:	WIFI 2.4G_11b_Ch11
Test Voltage::	DC 5V from USB
Remark:	Temp 23 Humi:47%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

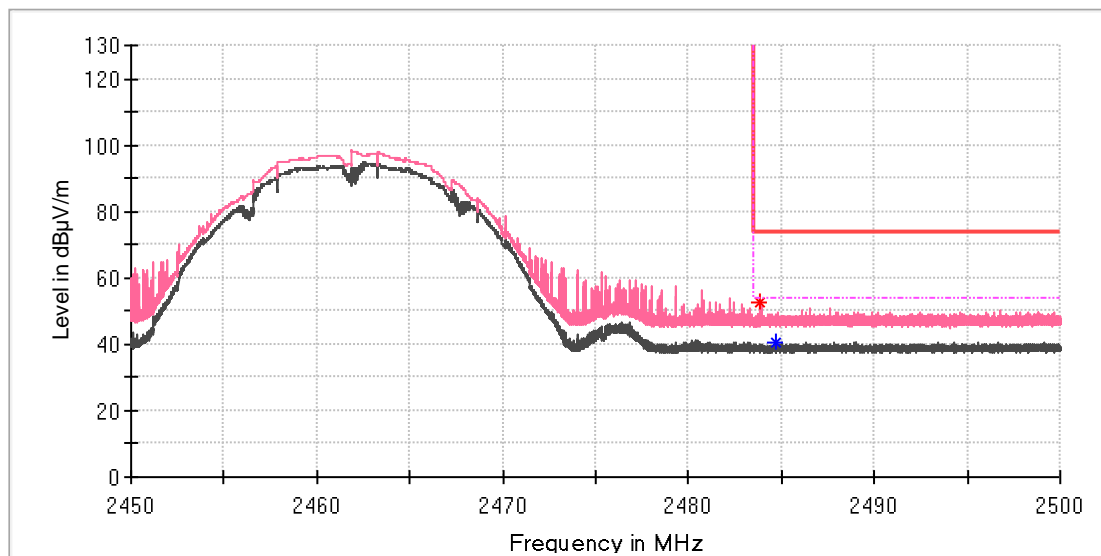

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.882500	52.44	---	74.00	21.56	100.0	V	152.0	7.4
2484.717500	---	40.55	54.00	13.45	100.0	V	142.0	7.4

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	ColorFluxLightBulb
Model:	L4
Test Mode:	WIFI 2.4G_11g_Ch1
Test Voltage::	DC 5V from USB
Remark:	Temp 23 Humi:47%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

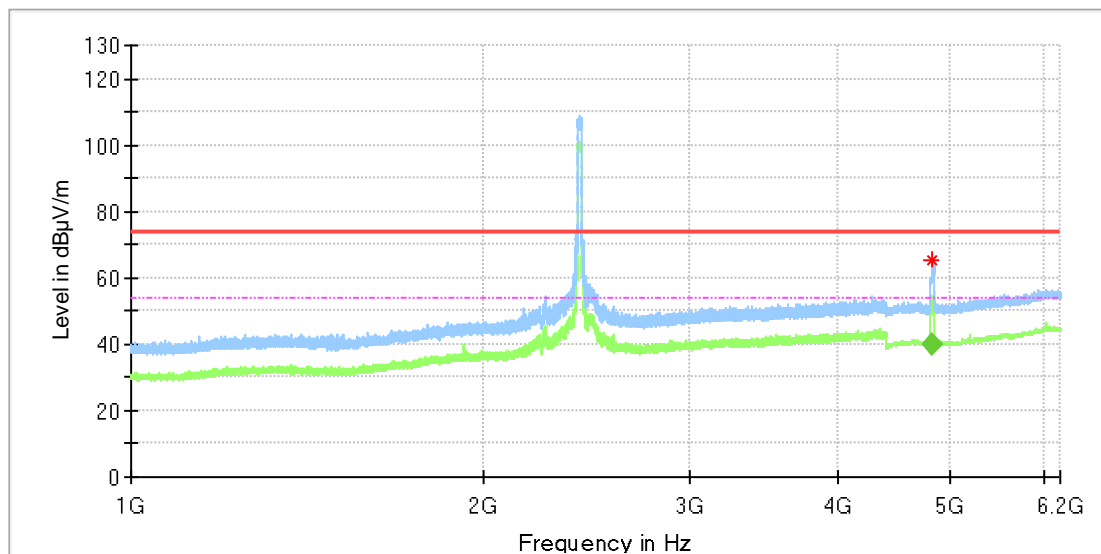

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4824.000000	65.03	---	74.00	8.97	100.0	H	179.0	11.8

Final_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4819.816667	40.05	54.00	13.95	105.0	H	180.0	11.8

EUT Information

EUT Name:	ColorFluxLightBulb
Model:	L4
Test Mode:	WIFI 2.4G_11g_Ch1
Test Voltage::	DC 5V from USB
Remark:	Temp 23 Humi:47%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

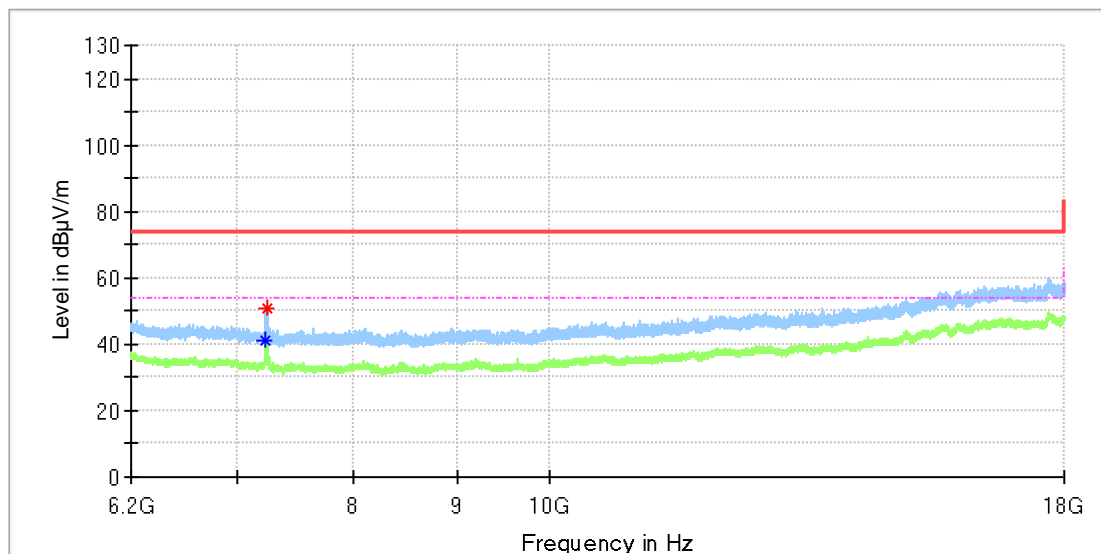

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7231.516667	--	40.82	54.00	13.18	100.0	H	119.0	8.6
7237.416667	51.03	--	74.00	22.97	100.0	H	119.0	8.6

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
--	--	--	--	--		--	--

EUT Information

EUT Name:	ColorFluxLightBulb
Model:	L4
Test Mode:	WIFI 2.4G_11g_Ch6
Test Voltage::	DC 5V from USB
Remark:	Temp 23 Humi:47%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

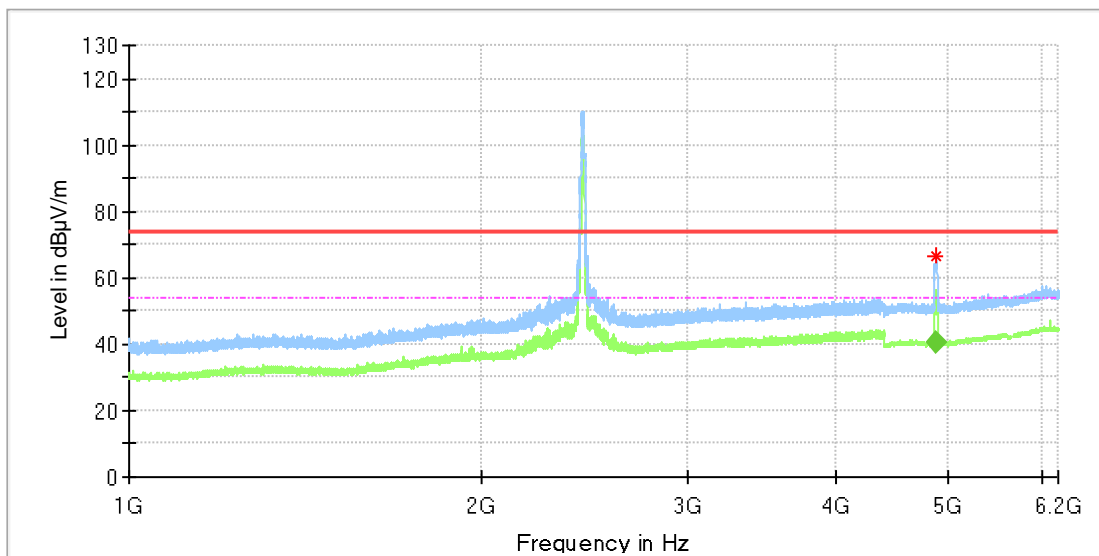

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4876.000000	66.31	---	74.00	7.69	100.0	H	180.0	11.8

Final_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4874.622222	40.58	54.00	13.42	100.0	H	247.0	11.8

EUT Information

EUT Name:	ColorFluxLightBulb
Model:	L4
Test Mode:	WIFI 2.4G_11g_Ch6
Test Voltage::	DC 5V from USB
Remark:	Temp 23 Humi:47%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

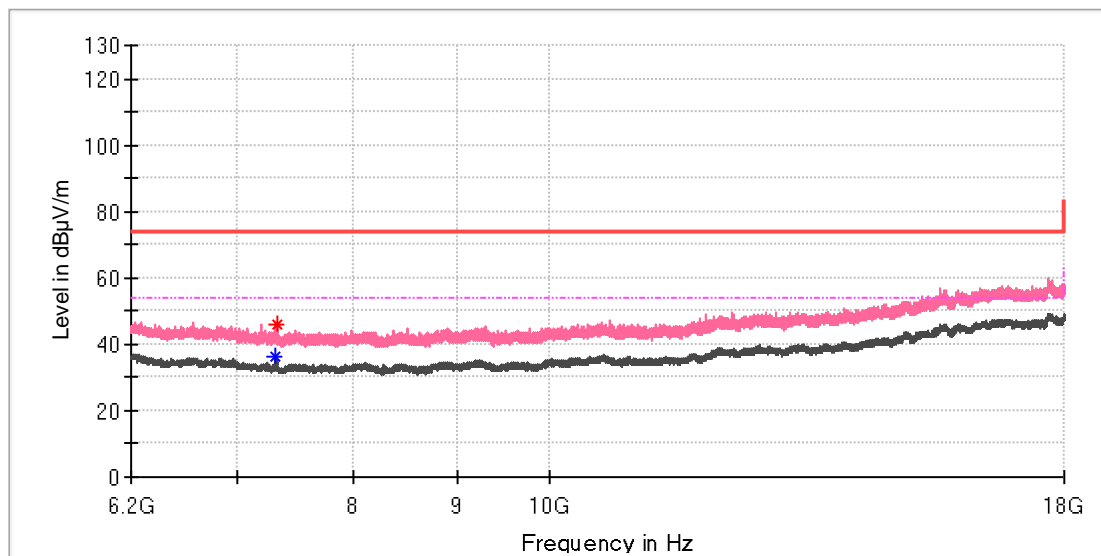

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7309.200000	---	36.34	54.00	17.66	100.0	V	149.0	8.2
7324.441667	46.15	---	74.00	27.85	100.0	V	149.0	8.2

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	ColorFluxLightBulb
Model:	L4
Test Mode:	WIFI 2.4G_11g_Ch11
Test Voltage::	DC 5V from USB
Remark:	Temp 23 Humi:47%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

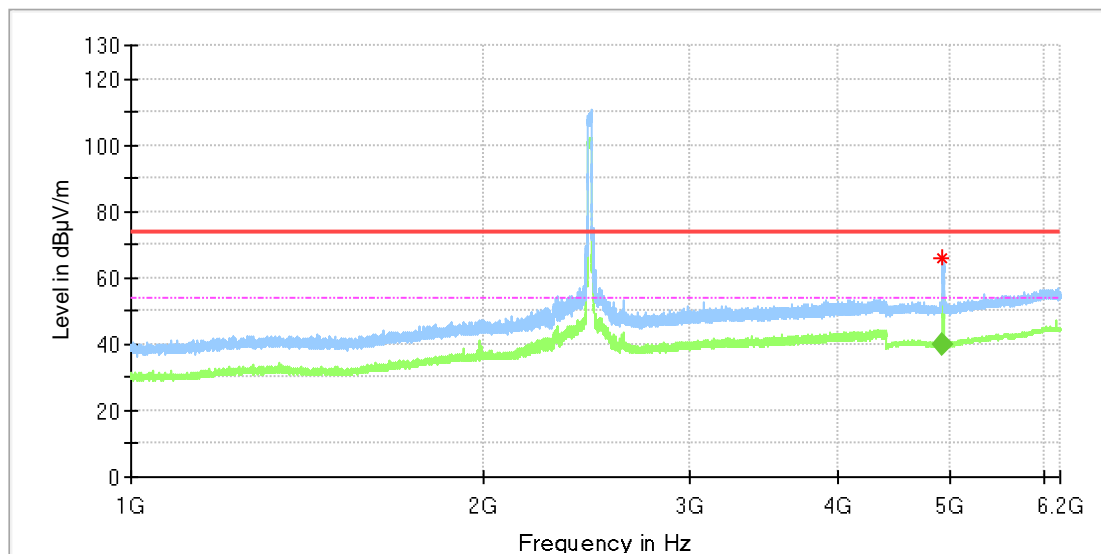

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4925.000000	65.70	---	74.00	8.30	100.0	H	144.0	11.8

Final_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4921.938889	39.98	54.00	14.02	100.0	H	266.0	11.8

EUT Information

EUT Name:	ColorFluxLightBulb
Model:	L4
Test Mode:	WIFI 2.4G_11g_Ch11
Test Voltage::	DC 5V from USB
Remark:	Temp 23 Humi:47%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

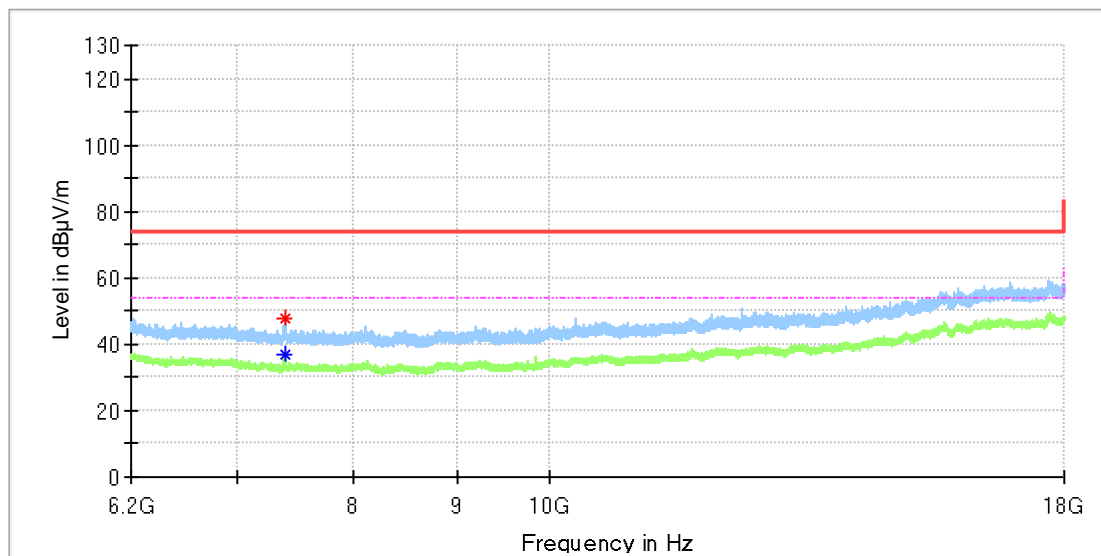

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7392.783333	---	36.92	54.00	17.08	100.0	H	12.0	8.3
7392.783333	47.48	---	74.00	26.52	100.0	H	12.0	8.3

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	ColorFluxLightBulb
Model:	L4
Test Mode:	WIFI 2.4G_11n_Ch1
Test Voltage::	DC 5V from USB
Remark:	Temp 23 Humi:47%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

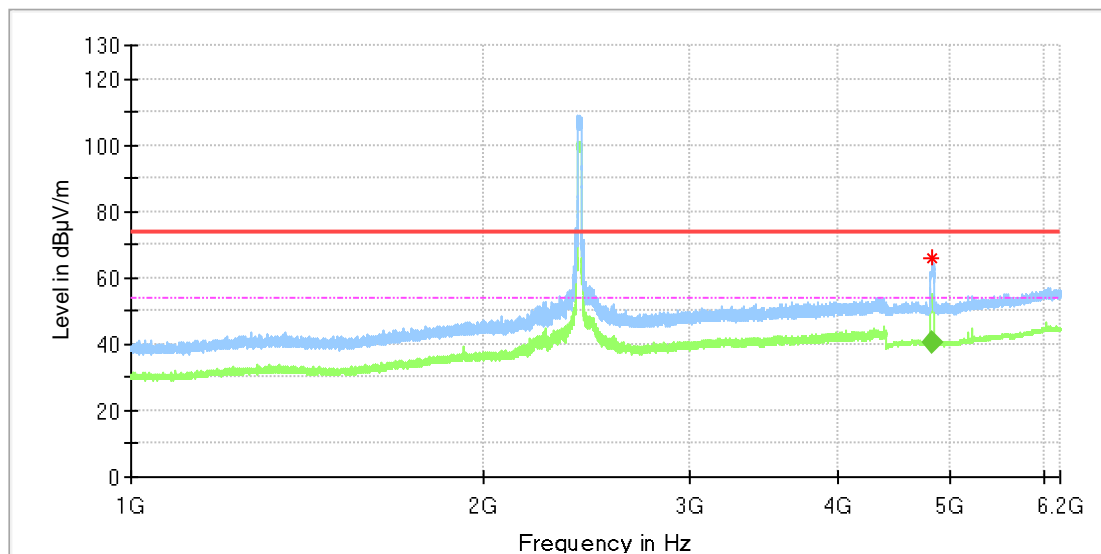

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4822.500000	65.81	---	74.00	8.19	100.0	H	0.0	11.8

Final_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4822.788889	40.57	54.00	13.43	100.0	H	260.0	11.8

EUT Information

EUT Name:	ColorFluxLightBulb
Model:	L4
Test Mode:	WIFI 2.4G_11n_Ch1
Test Voltage::	DC 5V from USB
Remark:	Temp 23 Humi:47%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

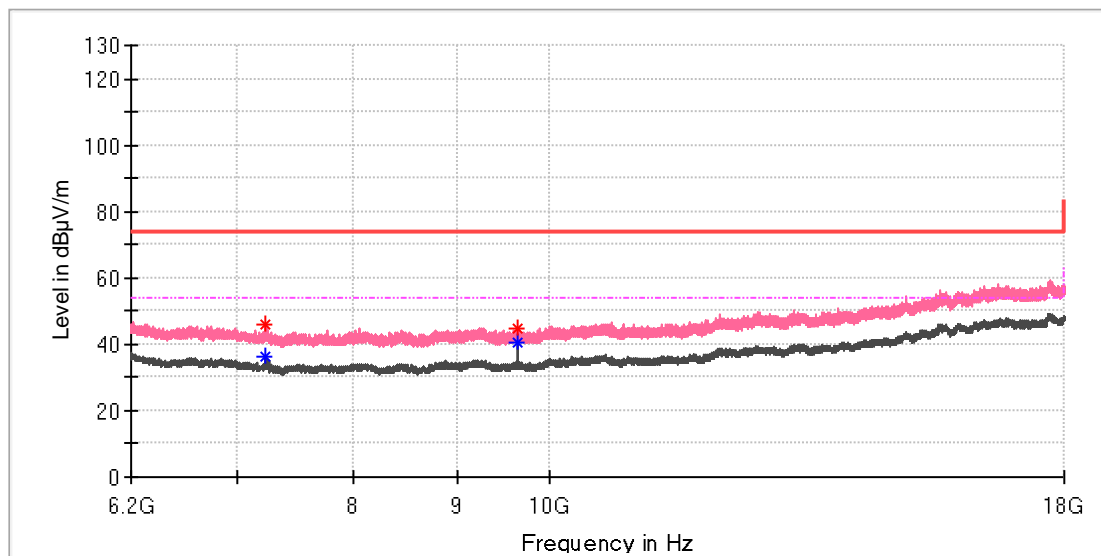

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7226.108333	45.67	---	74.00	28.33	100.0	V	254.0	8.7
7230.533333	---	36.09	54.00	17.91	100.0	V	268.0	8.6
9648.058333	---	40.37	54.00	13.63	100.0	V	6.0	10.4
9651.008333	44.50	---	74.00	29.50	100.0	V	323.0	10.4

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	ColorFluxLightBulb
Model:	L4
Test Mode:	WIFI 2.4G_11n_Ch1
Test Voltage::	DC 5V from USB
Remark:	Temp 23 Humi:47%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

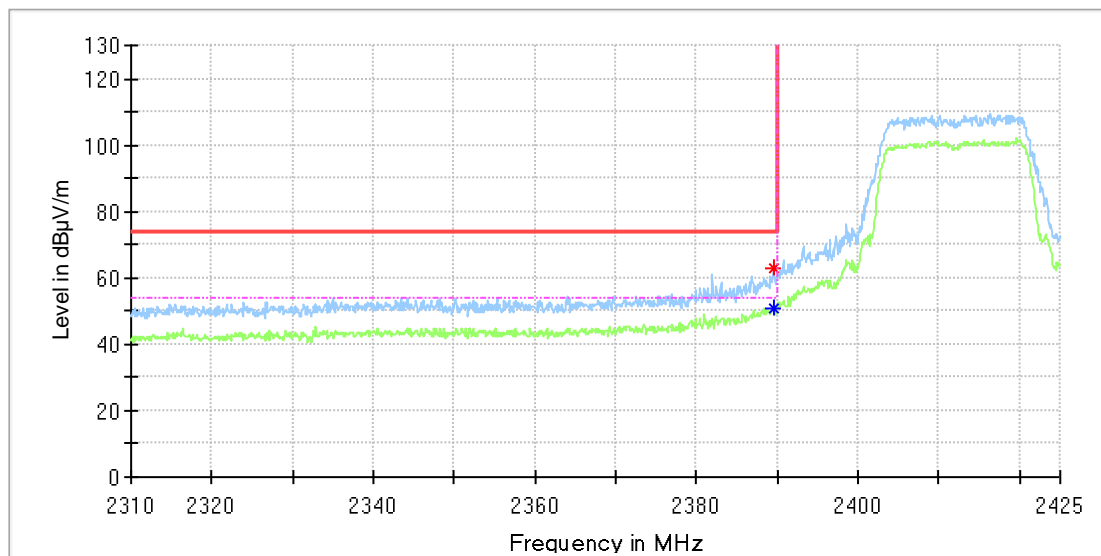

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2389.500000	62.92	---	74.00	11.08	100.0	H	192.0	7.0
2389.500000	--	50.76	54.00	3.24	100.0	H	192.0	7.0

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
--	--	--	--	--		--	--

EUT Information

EUT Name:	ColorFluxLightBulb
Model:	L4
Test Mode:	WIFI 2.4G_11n_Ch6
Test Voltage::	DC 5V from USB
Remark:	Temp 23 Humi:47%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

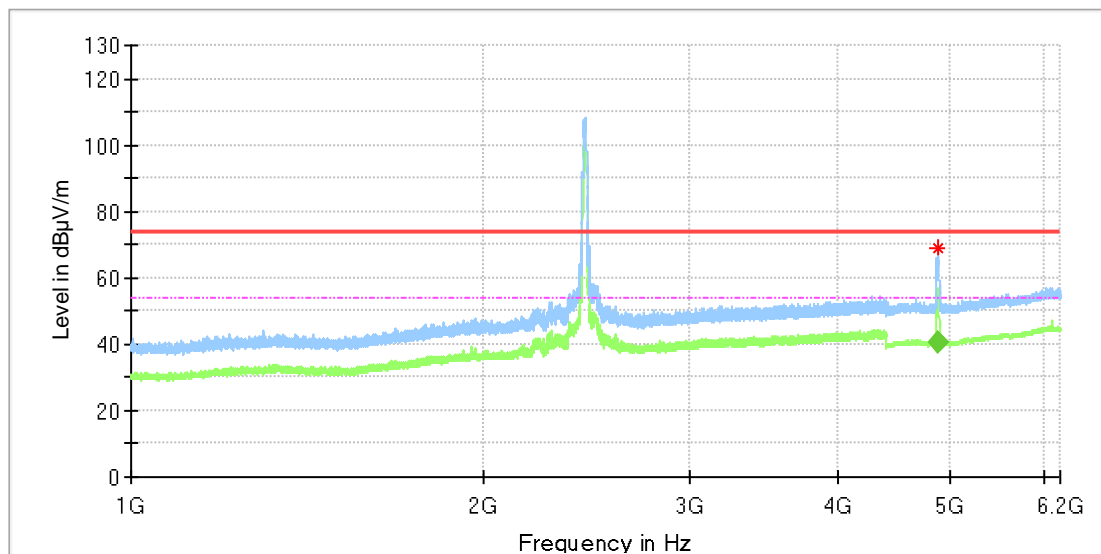

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4873.500000	69.19	---	74.00	4.81	100.0	H	247.0	11.8

Final_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4873.833333	40.60	54.00	13.40	105.0	H	245.0	11.8

EUT Information

EUT Name:	ColorFluxLightBulb
Model:	L4
Test Mode:	WIFI 2.4G_11n_Ch6
Test Voltage::	DC 5V from USB
Remark:	Temp 23 Humi:47%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

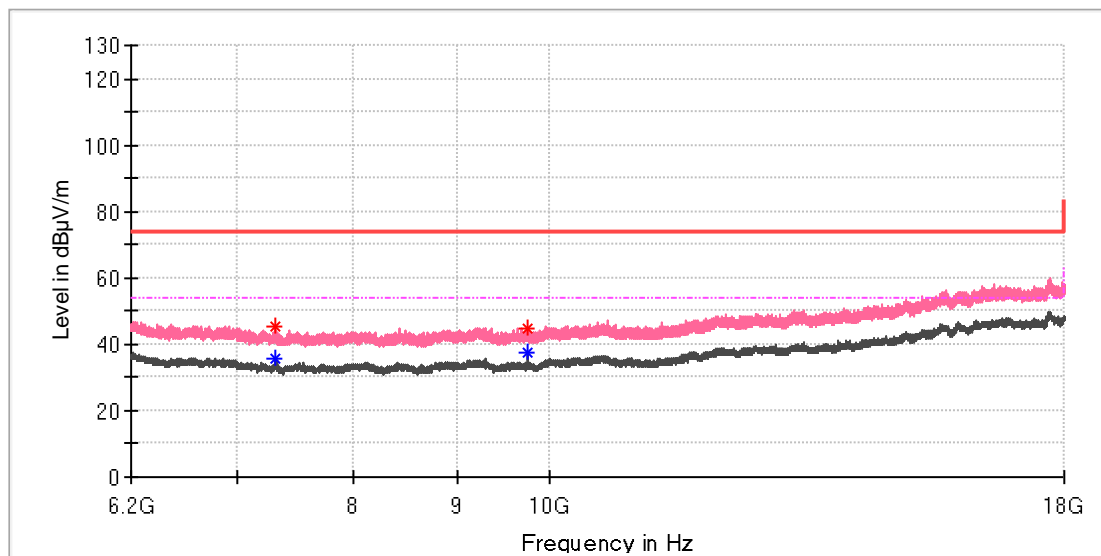

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7310.183333	--	35.48	54.00	18.52	100.0	V	252.0	8.2
7311.658333	45.35	--	74.00	28.65	100.0	V	252.0	8.2
9745.900000	44.45	--	74.00	29.55	100.0	V	356.0	10.4
9747.866667	--	37.53	54.00	16.47	100.0	V	356.0	10.4

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
--	--	--	--	--		--	--

EUT Information

EUT Name:	ColorFluxLightBulb
Model:	L4
Test Mode:	WIFI 2.4G_11n_Ch11
Test Voltage::	DC 5V from USB
Remark:	Temp 23 Humi:47%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

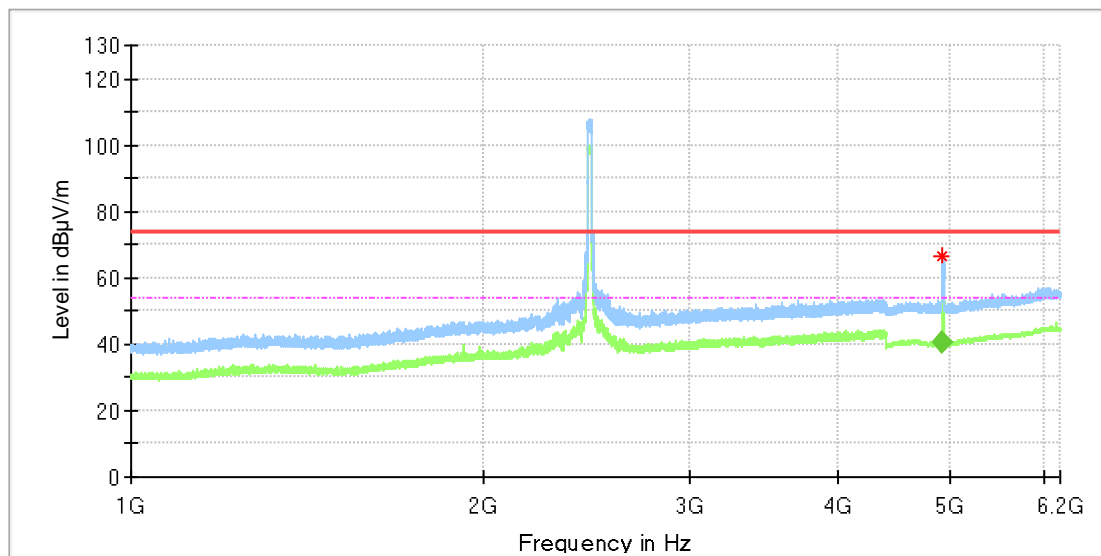

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4924.000000	66.65	---	74.00	7.35	100.0	H	238.0	11.8

Final_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4921.816667	40.54	54.00	13.46	100.0	H	247.0	11.8

5.1.8 Conducted Emission on AC Mains

RESULT:**Pass****Test Specification**


Test standard	:	FCC Part 15.207(a) RSS-Gen Clause 8.8
Basic standard	:	ANSI C63.10: 2013
Frequency range	:	0.15 – 30MHz
Limits	:	FCC Part 15.207(a) RSS-Gen Table 4
Kind of test site	:	Shielded Room

Test Setup

Date of testing	:	2021-05-18
Input voltage	:	AC 120V, 60Hz
Operation mode	:	B
Earthing	:	Not connected
Ambient temperature	:	24.5 °C
Relative humidity	:	57 %
Atmospheric pressure	:	101 kPa

EUT Information

EUT Name:	ColorFluxLight Bulb
Order No.:	168316290, item60
Model:	L4
Test Mode:	Lighting with WiFi Link
Test Voltage:	AC 120V/60Hz
Test By:	Ouyang Wang
Review By:	Gary Chen
Remark:	SR1

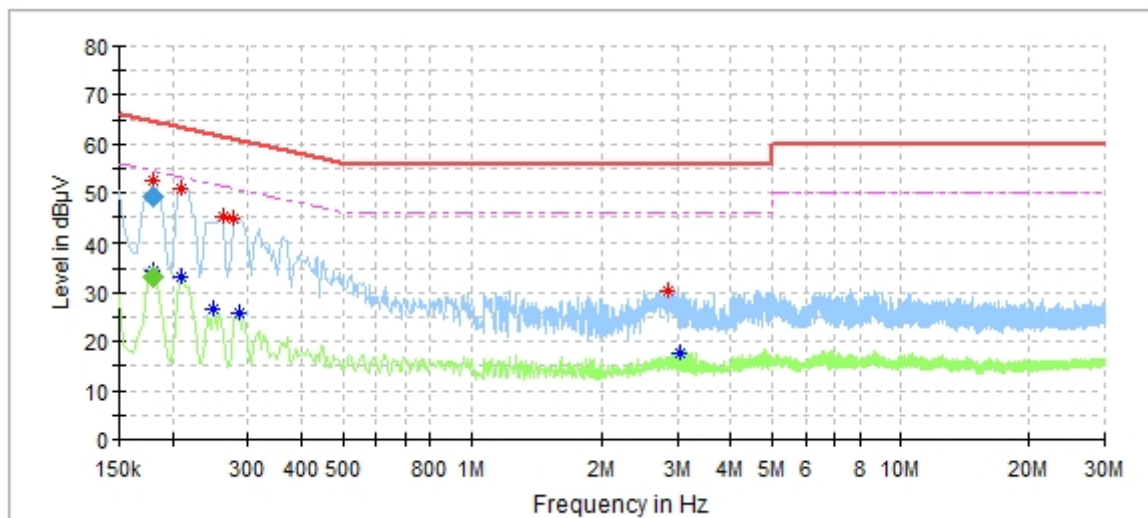

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.180500	52.45	—	64.39	11.94	L1	9.6
0.180500	—	34.61	54.39	19.78	L1	9.6
0.210000	—	33.31	53.21	19.89	L1	9.6
0.210000	50.75	—	63.21	12.46	L1	9.6
0.250000	—	26.67	51.76	25.08	L1	9.6
0.262000	45.19	—	61.37	16.18	L1	9.6
0.278000	44.89	—	60.88	15.99	L1	9.6
0.286000	—	25.77	50.64	24.87	L1	9.6
2.864000	30.33	—	56.00	25.67	L1	9.8
3.032000	—	17.75	46.00	28.25	L1	9.8

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.180500	—	33.36	54.46	21.10	200.0	9.000	L1	9.6
0.180500	49.38	—	64.46	15.08	200.0	9.000	L1	9.6

EUT Information

EUT Name:	ColorFluxLight Bulb
Order No.:	168316290, item60
Model:	L4
Test Mode:	Lighting with WiFi Link
Test Voltage:	AC 120V/60Hz
Test By:	Ouyang Wang
Review By:	Gary Chen
Remark:	SR1

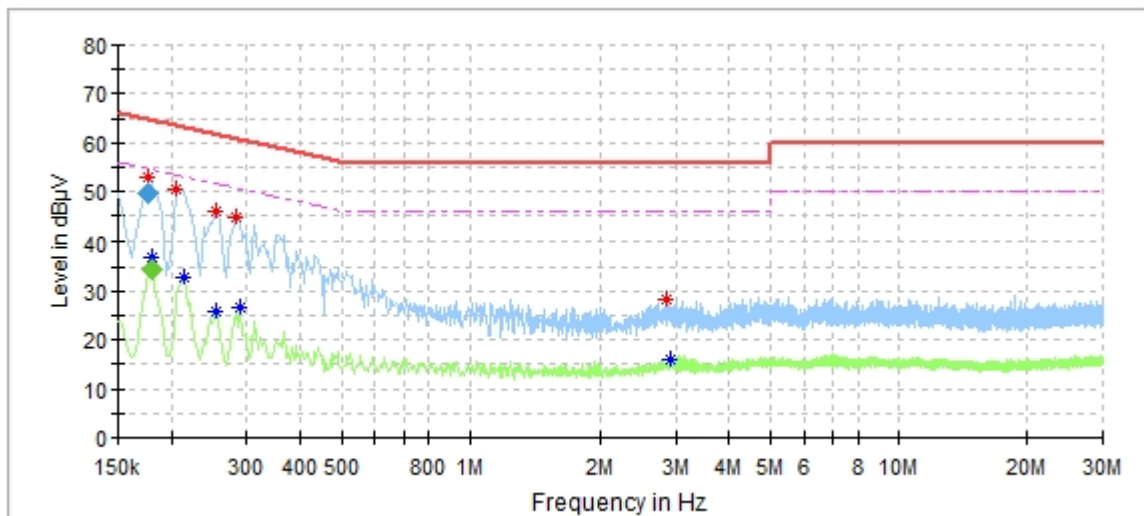

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.176500	52.86	—	64.58	11.72	N	9.6
0.180500	—	37.03	54.58	17.55	N	9.6
0.206000	50.48	—	63.37	12.89	N	9.6
0.214000	—	32.68	53.05	20.37	N	9.6
0.254000	—	25.65	51.63	25.98	N	9.6
0.254000	46.11	—	61.63	15.52	N	9.6
0.282000	44.83	—	60.76	15.92	N	9.6
0.290000	—	26.74	50.52	23.78	N	9.6
2.856000	28.16	—	56.00	27.84	N	9.8
2.928000	—	15.85	46.00	30.15	N	9.8

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.176500	49.79	—	64.65	14.86	200.0	9.000	N	9.6
0.180500	—	34.42	54.46	20.04	200.0	9.000	N	9.6

---END---