


adhesive method illustration

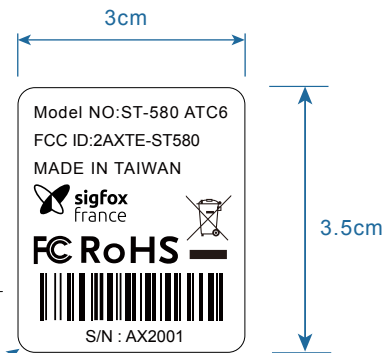

S/N :will be replaced with the device serial number created by the production line.

100%

CERTIFICATION DRAWING. – NOT TO BE CHANGED WITHOUT REFERENCE TO CERTIFICATION BODY.

This part should not contain any substances which are Specified in RoHS&WEEE's Directive. Unit / mm Scale / 1:1

- 1.The printing ink should be able to pass the alcohol abrasion test and adhesion test. (The tested sample must be provided.)
- 2.The tolerance of the printing position is $\pm 0.15\text{mm}$, and the tolerance of the label dimension is $\pm 0.1\text{mm}$.
- 3.The characters must be aligned horizontally and vertically after printing screen is fixed. No malposition or aslant will be accepted.
- 4.No printing color difference will be acceptable in the same batch.
- 5.The characters or logos must be clear and recognizable.
- 6.No embrittlement, or damage will be accepted.

SPECIFICATION



Model Number	ST-580 ATC6	Dimensions	3x 3.5cm R=0.2cm $\pm 0.1\text{mm}$	Designer	Michelle Huang
Drawing NO.	GS-MO-ST580ATC6-43	Printing	Black+Mat P.P. Coating	Version	T1
Description	Barcode Stickers	Material	White Polyester	Date	2020.10.14
ERP Number	N3STST580A6001	Factory		Approved	Michelle Huang

Version	ECN	Design Description	Date	Designer
△5				
△4				
△3				
△2				
1			2020.10.14	Michelle Huang