

FCC Radio Test Report

FCC ID: 2AXTO-MIV2

The report concerns: Original Grant

Report Reference No.....: 21EFSS11114 04651

Date Sample(s) Received.....: 2022-05-22

Date of Tested.....: From 2022-06-01 to 2022-06-08

Date of issue.....: 2022-06-09

Testing Laboratory: DongGuan ShuoXin Electronic Technology Co., Ltd.
Zone A, 1F, No. 6, XinGang Road YuanGang Street,
Address: XinAn District, ChangAn Town, DongGuan City,
GuangDong, China

Applicant's name: Dongguan Midiplus Electronic Technology Co., LTD
Address: Room 801, Building 2, No. 8 Shuilang Industrial
Road, DaLingshan Town, Dongguan City,
Guangdong Province - CHINA

Manufacturer.....: Dongguan Midiplus Electronic Technology Co., LTD

Equipment.....: Monitor Speakers

Trade Mark: **MIDIPLUS**

Model: MI5 II, MI3 II

Ratings: Input: 100-240V~ 50/60Hz, 70W for MI5 II;
100-240V~ 50/60Hz, 50W for MI3 II.

Output: --

Test Engineer:




Blue Qiu

Responsible Engineer :



Smile Wang

Authorized Signatory:



King Wang

Table of Contents	Page
1 TEST REPORT DECLARE	4
2 SUMMARY OF TEST RESULTS	5
2.1 MEASUREMENT UNCERTAINTY	6
3 GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 DESCRIPTION OF TEST MODES	9
3.3 PARAMETERS OF TEST SOFTWARE	10
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.5 SUPPORT UNITS	10
3.6 TEST ENVIRONMENT CONDITIONS	11
4 AC POWER LINE CONDUCTED EMISSIONS TEST	12
4.1 LIMIT	12
4.2 TEST PROCEDURE	12
4.3 MEASUREMENT INSTRUMENTS LIST	12
4.4 TESTSETUP	13
4.5 EUT OPERATING CONDITIONS	13
4.6 TEST RESULTS	14
5 RADIATED EMISSION TEST	16
5.1 LIMIT	16
5.2 TEST PROCEDURE AND SETTING	17
5.3 MEASUREMENT INSTRUMENTS LIST	18
5.4 TESTSETUP	18
5.5 EUT OPERATING CONDITIONS	19
5.6 TEST RESULTS - 9 KHZ TO 30MHZ	20
5.7 TEST RESULTS- 30 MHZ TO 1000MHZ	21
5.8 TEST RESULTS - ABOVE 1000MHZ (BAND EDGE)	23
5.9 TEST RESULTS - ABOVE 1000MHZ(HARMONIC)	35
6 NUMBER OF HOPPING FREQUENCY	53
6.1 LIMIT	53
6.2 TEST PROCEDURE AND SETTING	53
6.3 MEASUREMENT INSTRUMENTS LIST	53
6.4 TEST SETUP	53
6.5 EUT OPERATION CONDITIONS	53
6.6 TEST RESULTS	54
7 AVERAGE TIME OF OCCUPANCY	56
7.1 LIMIT	56
7.2 TEST PROCEDURE AND SETTING	56
7.3 MEASUREMENT INSTRUMENTS LIST	56
7.4 TEST SETUP	56
7.5 EUT OPERATION CONDITIONS	56

Table of Contents	Page
7.6 TEST RESULTS	57
8 HOPPING CHANNEL SEPARATION MEASUREMENT	59
8.1 LIMIT	59
8.2 TEST PROCEDURE AND SETTING	59
8.3 MEASUREMENT INSTRUMENTS LIST	59
8.4 TEST SETUP	59
8.5 EUT OPERATION CONDITIONS	59
8.6 TEST RESULTS	60
9 BANDWIDTH TEST	62
9.1 LIMIT	62
9.2 TEST PROCEDURE AND SETTING	62
9.3 MEASUREMENT INSTRUMENTS LIST	62
9.4 TEST SETUP	62
9.5 EUT OPERATION CONDITIONS	62
9.6 TEST RESULTS	63
10 MAXIMUM OUTPUT POWER	65
10.1 LIMIT	65
10.2 TEST PROCEDURE AND SETTING	65
10.3 MEASUREMENT INSTRUMENTS LIST	65
10.4 TEST SETUP	65
10.5 EUT OPERATION CONDITIONS	65
10.6 TEST RESULTS	66
11 CONDUCTED SPURIOUS EMISSION	69
11.1 LIMIT	69
11.2 TEST PROCEDURE AND SETTING	69
11.3 MEASUREMENT INSTRUMENTS LIST	69
11.4 TEST SETUP	69
11.5 EUT OPERATION CONDITIONS	69
11.6 TEST RESULTS	70

1TEST REPORT DECLARE

Applicant	Dongguan Midiplus Electronic Technology Co., LTD
Address	Room 801, Building 2, No. 8 Shuilang Industrial Road, DaLingshan Town, Dongguan City, Guangdong Province - CHINA
Manufacturer	Dongguan Midiplus Electronic Technology Co., LTD
Address	Room 801, Building 2, No. 8 Shuilang Industrial Road, DaLingshan Town, Dongguan City, Guangdong Province - CHINA
Factory	Longjoin Industrial Co.,Ltd.
Address	No.1, Workshop, No.828, Jiuzhou River Avenue Economic Development Zone, Lianjiang City, Guangdong Province - CHINA
Equipment	Monitor Speakers
Model No.	MI5 II, MI3 II
Trade Mark	
Standard	FCC Part15, Subpart C (15.247) ANSI C63.10-2013

We Declare:

The equipment described above is tested by DongGuan ShuoXin Electronic Technology Co., Ltd(ATT). and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and DongGuan ShuoXin Electronic Technology Co., Ltd.(ATT) is assumed of full responsibility for the accuracy and completeness of these tests.

ATT is not responsible for the sampling stage, so the results only apply to the sample as received.

ATT's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. ATT shall have no liability for any declarations, inferences or generalizations drawn by the client or others from ATT issued reports.

2SUMMARY OF TEST RESULTS

The EUT have been tested according to the applicable standards as referenced below:

Standard(s) Section	Test Item	Judgment	Remark
FCC			
15.207	AC Power Line Conducted Emissions	PASS	-----
15.247(d) 15.205(a) 15.209(a)	Radiated Emission	PASS	-----
15.247(a)(1)(iii)	Number of Hopping Frequency	PASS	-----
15.247(a)(1)(iii)	Average Time Of Occupancy	PASS	-----
15.247(a)(1)	Hopping Channel Separation	PASS	-----
15.247(a)(1)	Bandwidth	PASS	-----
15.247(a)(1)	Maximum Output Power	PASS	-----
15.247(d)	Conducted Spurious Emission	PASS	-----
15.203	Antenna Requirement	PASS	Note(2)

Note:

- (1) "N/A" denotes test is not applicable in this test report
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

2.1 MEASUREMENT UNCERTAINTY

Test Item	Uncertainty
Uncertainty for Conduction emission test (9kHz-150kHz)	3.7 dB
Uncertainty for Conduction emission test (150kHz-30MHz)	3.3 dB
Uncertainty for Radiation Emission test (30MHz-200MHz)	4.60 dB (Polarize: V)
	4.60 dB (Polarize: H)
Uncertainty for Radiation Emission test (200MHz-1GHz)	6.10 dB (Polarize: V)
	5.08 dB (Polarize: H)
Uncertainty for Radiation Emission test (1GHz-6GHz)	5.01 dB (Polarize: V)
	5.01 dB (Polarize: H)
Uncertainty for Radiation Emission test (6GHz-18GHz)	5.26 dB (Polarize: V)
	5.26 dB (Polarize: H)
Uncertainty for Radiation Emission test (18GHz-40GHz)	5.06 dB (Polarize: V)
	5.06 dB (Polarize: H)
Uncertainty for radio frequency	$\pm 0.048\text{kHz}$
Uncertainty for conducted RF Power	$\pm 0.32\text{dB}$

Note:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Test Facility:

The Test site used by DongGuan ShuoXin Electronic Technology Co., Ltd. to collect test data is located on the Zone A, 1F, No. 6, XinGang Road YuanGang Street, XinAn District, ChangAn Town, DongGuan City, GuangDong, China

The test facility is recognized, certified, or accredited by the following organizations:

Item	Registration No.	Expiration Date
CNAS	L3098	2024-08-27
A2LA	4893.01	2022-06-30
Innovation, Science and Economic Development Canada (ISED)	11033A CAB identifier:CN0083	2022-06-30
Federal Communications Commission (FCC)	171688 Designation No.:CN1235	2022-06-30

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Monitor Speakers	
Brand Name	MIDIPLUS	
Test Model	MI5 II	
Series Model	MI5 II, MI3 II	
Model Difference(s)	The differences between models are the same except for the differences in model name, size and specification parameters of secondary components (non-safety and EMC key components), and the differences do not affect safety and EMC performance.	
Hardware Version	V1.0	
Software Version	V1.0	
Power Source	Supplied from AC power.	
Power Rating	100-240V~ 50/60Hz	
Operation Frequency	2400 MHz ~ 2483.5 MHz	
Modulation Technology	GFSK, $\pi/4$ -DQPSK, 8-DPSK	
Bit Rate of Transmitter	1Mbps /2Mbps /3Mbps	
Antenna Information	Antenna Type: PCBA Antenna	Maximum Peak Gain:2.0dBi
Max. Output Power	1Mbps: 0.982dBm (0.001254W) 2Mbps: 3.481dBm (0.002229W) 3Mbps: 3.987dBm (0.002504W)	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

3.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX Mode NOTE (1)
Mode 2	TX Mode Channel 78 _3Mbps

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 2	TX Mode Channel 78 _3Mbps AC120V/60Hz

Radiated emissions test - Below 1GHz	
Final Test Mode	Description
Mode 2	TX Mode Channel 78 _3Mbps

Radiated emissions test - Above 1GHz	
Final Test Mode	Description
Mode 1	TX Mode NOTE (1)

Conducted test	
Final Test Mode	Description
Mode 1	TX Mode NOTE (1)

Note:


(1) The measurements are performed at the high, middle, low available channels.

3.3PARAMETERS OF TEST SOFTWARE

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS

Test Software	N/A		
Frequency (MHz)	2402	2441	2480
Parameters(1Mbps)	Default	Default	Default
Parameters(3Mbps)	Default	Default	Default

3.4BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

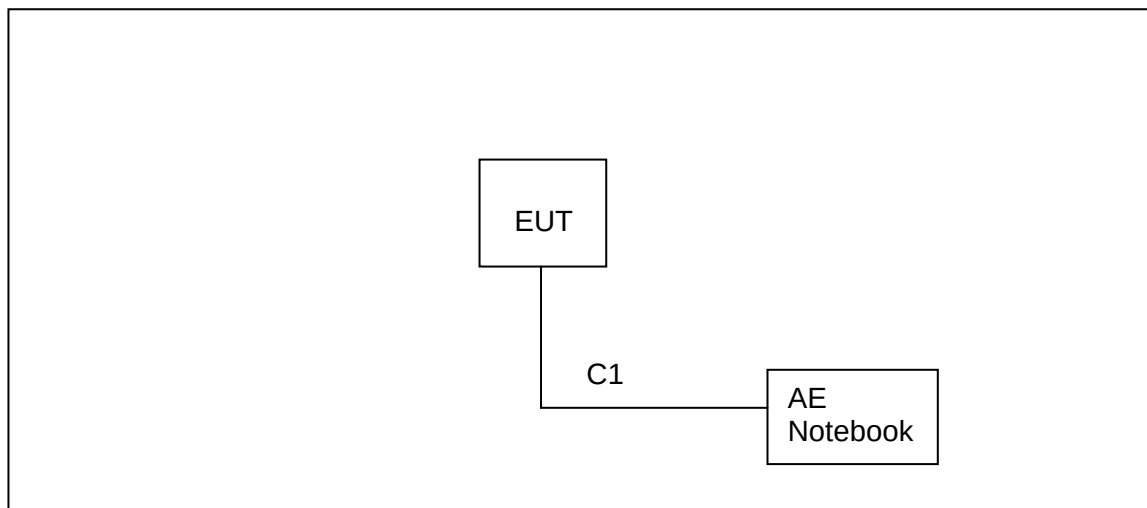

3.5SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
AE	Notebook	Lenovo	/	/

Item	Cable Type	Shielded Type	Ferrite Core	Length
C1	DC Cable	NO	NO	0.8m

3.6 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage
AC Power Line Conducted Emissions	25°C	53%	AC 120V/60Hz
Radiated Emissions-9K-30MHz	25°C	60%	AC 120V/60Hz
Radiated Emissions-30 MHz to 1GHz	24°C	68%	AC 120V/60Hz
Radiated Emissions-Above 1000 MHz	24°C	68%	AC 120V/60Hz
Number of Hopping Frequency	23.6°C	62%	AC 120V/60Hz
Average Time Of Occupancy	23.6°C	62%	AC 120V/60Hz
Hopping Channel Separation	23.6°C	62%	AC 120V/60Hz
Bandwidth	23.6°C	62%	AC 120V/60Hz
Maximum Output Power	23.6°C	62%	AC 120V/60Hz
Conducted Spurious Emission	23.6°C	62%	AC 120V/60Hz

4AC POWER LINE CONDUCTED EMISSIONS TEST

4.1LIMIT

Frequency of Emission (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56*	56 to 46*
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


4.2TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.

4.3MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Pulse Limiter	MTS-systemtechnik	MTS-IMP-136	261115-010-0024	12/19/2022
2	EMI Test Receiver	R&S	ESCI	101308	12/17/2022
3	LISN	AFJ	LS16	16011103219	05/26/2023
4	LISN	Schwarzbeck	NSLK 8127	8127-432	12/17/2022
5	Measurement Software	Farad	EZ-EMC (Ver.ATT-03A)	N/A	N/A

4.4 TEST SETUP

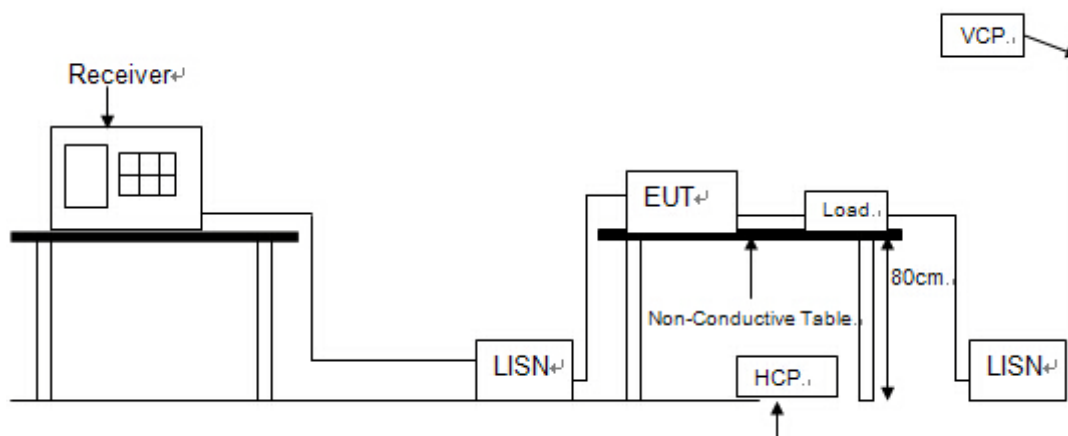


4.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical function (as a customer would normally use it), EUT was programmed to be in continuously transmitting data or hopping on mode.

4.6 TEST RESULTS

Test Mode: TX Mode Channel 78 _3Mbps

Line

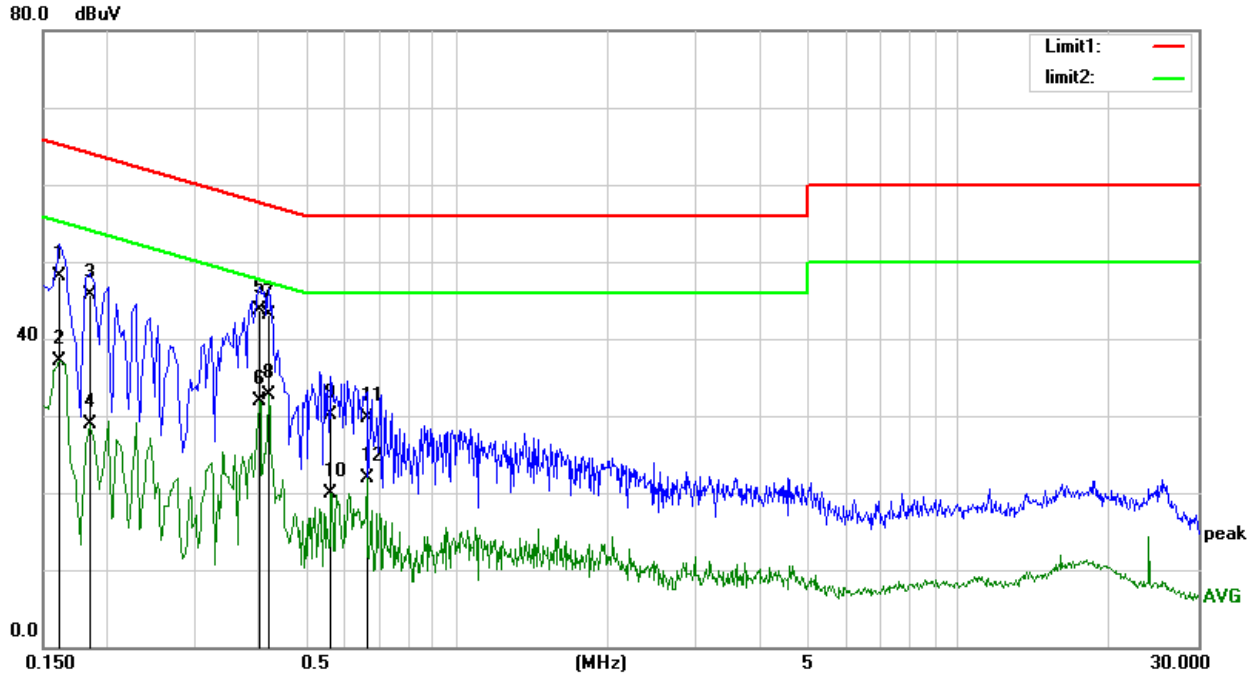


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1620	36.65	11.47	48.12	65.36	-17.24	QP
2	0.1620	25.67	11.47	37.14	55.36	-18.22	AVG
3	0.1860	34.31	11.30	45.61	64.21	-18.60	QP
4	0.1860	17.58	11.30	28.88	54.21	-25.33	AVG
5	0.4060	33.23	10.42	43.65	57.73	-14.08	QP
6	0.4060	21.50	10.42	31.92	47.73	-15.81	AVG
7	0.4220	32.70	10.40	43.10	57.41	-14.31	QP
8	0.4220	22.30	10.40	32.70	47.41	-14.71	AVG
9	0.5620	19.91	10.29	30.20	56.00	-25.80	QP
10	0.5620	9.62	10.29	19.91	46.00	-26.09	AVG
11	0.6620	19.34	10.27	29.61	56.00	-26.39	QP
12	0.6620	11.57	10.27	21.84	46.00	-24.16	AVG

Remarks:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX Mode Channel 78 _3Mbps

Neutral

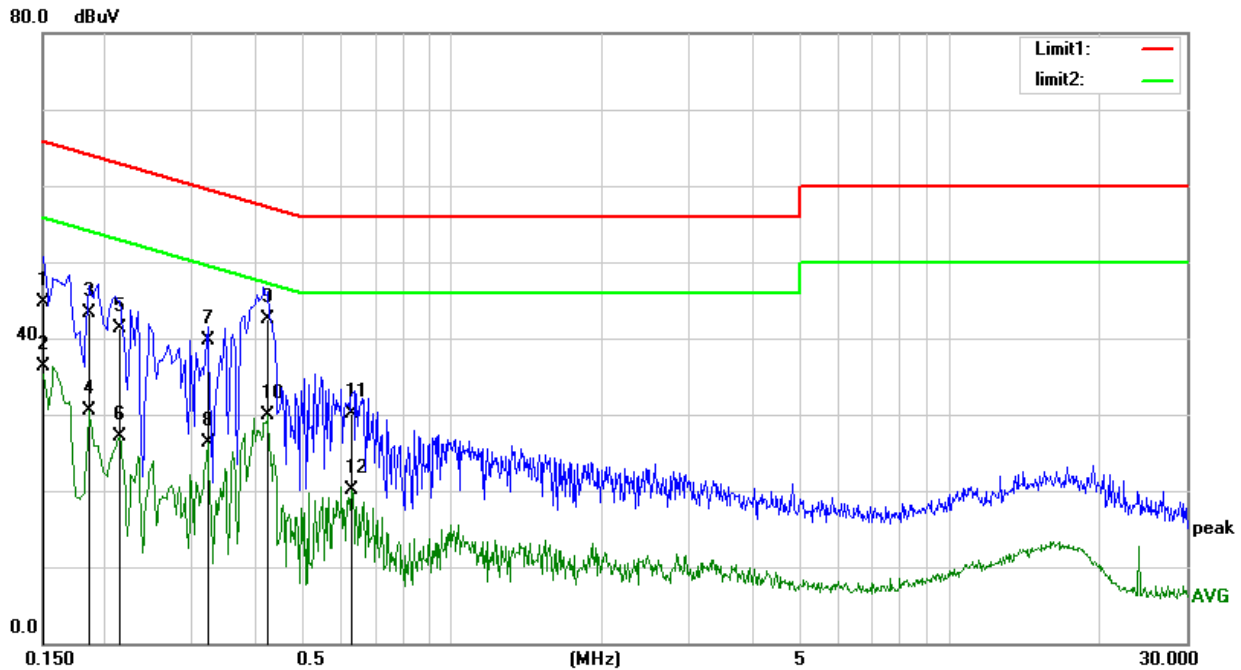

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1500	33.06	11.55	44.61	65.99	-21.38	QP
2	0.1500	24.85	11.55	36.40	55.99	-19.59	AVG
3	0.1860	31.93	11.30	43.23	64.21	-20.98	QP
4	0.1860	19.21	11.30	30.51	54.21	-23.70	AVG
5	0.2140	30.21	11.12	41.33	63.04	-21.71	QP
6	0.2140	16.06	11.12	27.18	53.04	-25.86	AVG
7	0.3220	29.15	10.51	39.66	59.65	-19.99	QP
8	0.3220	15.85	10.51	26.36	49.65	-23.29	AVG
9	0.4260	32.11	10.40	42.51	57.33	-14.82	QP
10	0.4260	19.56	10.40	29.96	47.33	-17.37	AVG
11	0.6300	19.92	10.28	30.20	56.00	-25.80	QP
12	0.6300	9.84	10.28	20.12	46.00	-25.88	AVG

Remarks:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

5 RADIATED EMISSION TEST

5.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-30 MHz)

Frequency (MHz)	Magnetic field strength (H-Field) (μA/m)	Measurement Distance (meters)
0.009-0.490	6.37/F(kHz)	300
0.490-1.705	6.37/F(kHz)	30
1.705-30.0	0.08	30

LIMITS OF RADIATED EMISSION MEASUREMENT (30 MHz-1000MHz)

Frequency (MHz)	Field Strength (μV/m at 3m)
30-88	100
88-216	150
216-960	200
Above 960	500

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	(dBuV/m at 3 m)	
	Peak	Average
Above 1000	74	54

Note:

- (1) The limit for radiated test was performed according to FCC PART 15C and RSS-247.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

5.2 TEST PROCEDURE AND SETTING

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. (below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. (above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. The test result is calculated as the following:
 - (1) Result = Reading + Correct Factor
 - (2) Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain + Attenuator
 - (3) Margin = Result - Limit

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	RBW 1MHz VBW 3MHz peak detector for Pk value RMS detector for AV value


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

5.3 MEASUREMENT INSTRUMENTS LIST


Item	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESCI	101307	12/19/2022
2	Spectrum Analyzer	Agilent	E4407B	US40240708	11/16/2022
3	Loop antenna	SCHWARZBECK K	FMZB1519	1519-062	12/14/2022
4	Broadband antenna	SCHWARZBECK	VULB9168	VULB9168-192	08/05/2022
5	HORN ANTENNA	SCHWARZBECK	BBHA9120D	9120D 1065	04/18/2023
6	Preamplifier Amplifier	HP	8447F	3113A05680	12/19/2022
7	PRE-AMPLIFIER	CY	EMC011830	980136	12/19/2022
8	RF Cable	R&S	Test Cable 4	4	12/19/2022
9	RF Cable	R&S	Test Cable 5	5	12/19/2022
10	RF Cable	R&S	Test Cable 9	9	04/18/2023
11	RF Cable	R&S	Test Cable 10	10	12/19/2022
12	Measurement Software	Farad	EZ-EMC (Ver.ATT-03A)	N/A	N/A

5.4 TEST SETUP


9 kHz-30 MHz

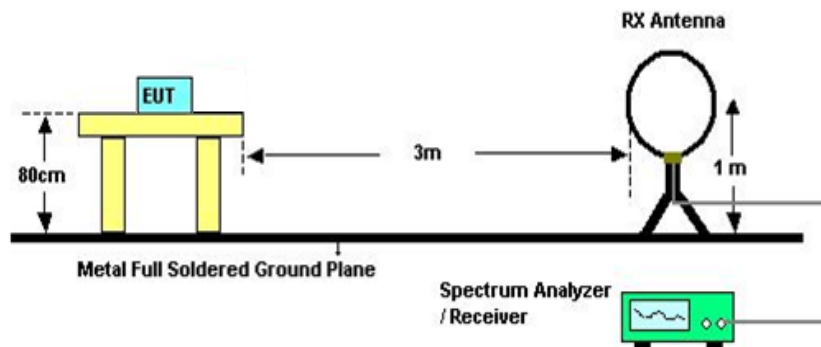

30 MHz to 1 GHz

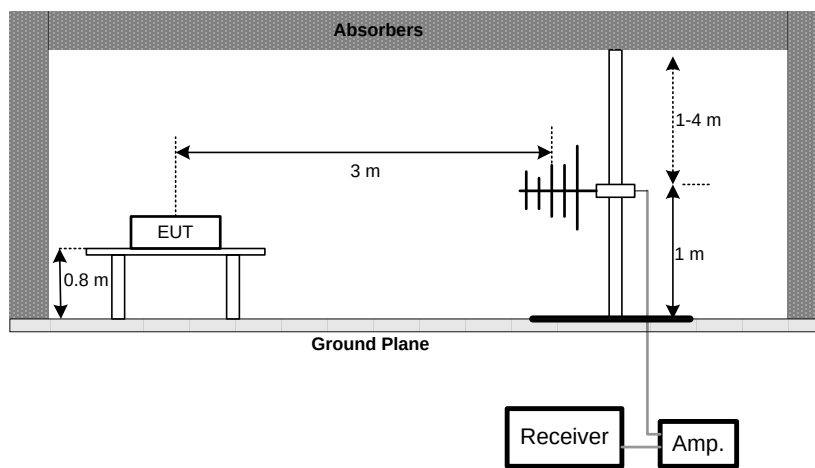

Above 1 GHz

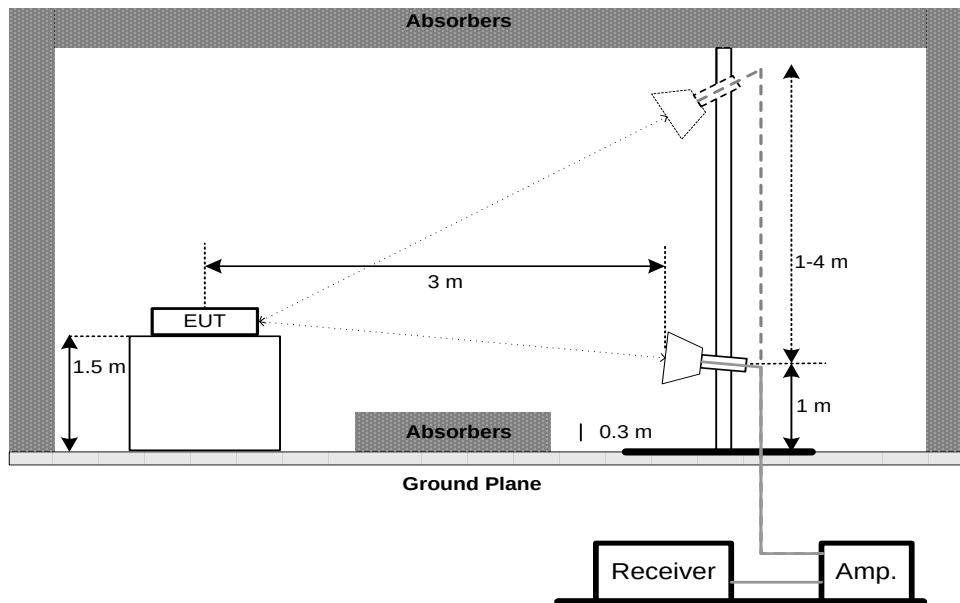

5.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULTS - 9 kHz TO 30MHz

Test Mode:	TX Mode Channel 78 _3Mbps
------------	---------------------------

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	P
--	--	--	--	P

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $20 \log (\text{specific distance/test distance})(\text{dB})$;

Limit line = specific limits(dBuv) + distance extrapolation factor

5.7 TEST RESULTS- 30 MHz TO 1000MHz


Test Mode: TX Mode Channel 78 _3Mbps

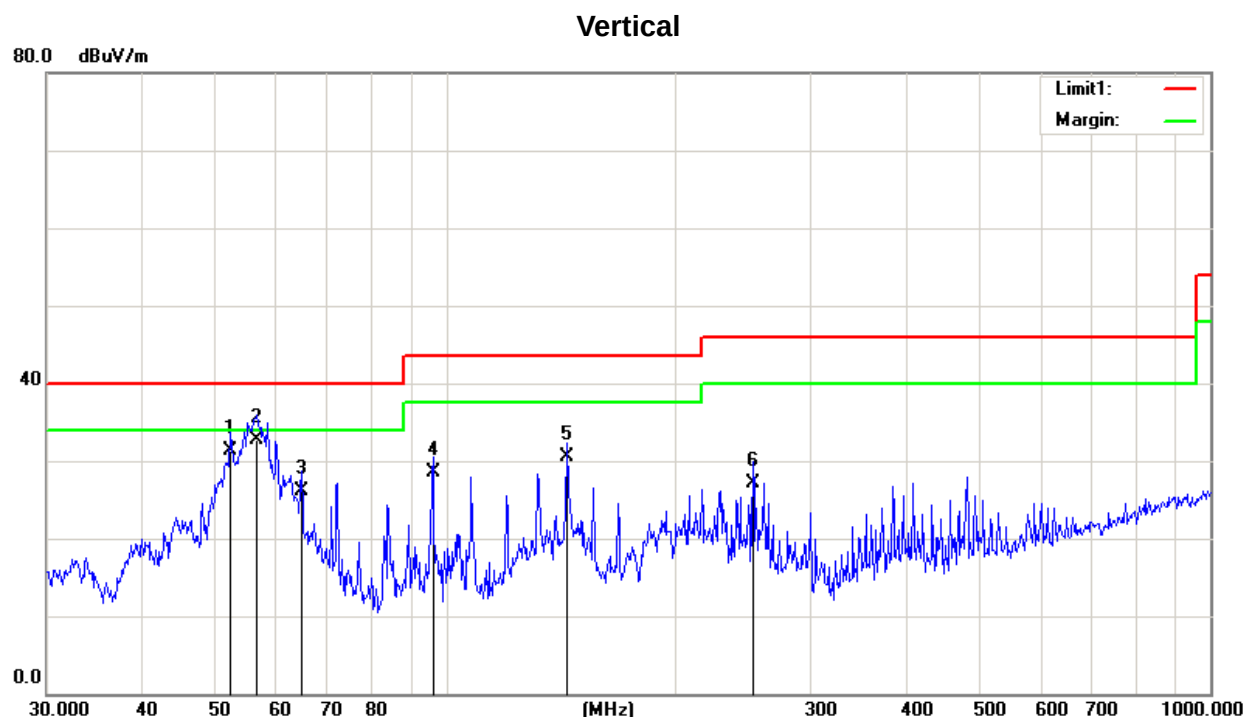

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Antenna Height	Table Degree
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(degree)
1	52.2079	44.99	-13.75	31.24	40.00	-8.76	QP	100	236
2	56.5929	46.26	-13.61	32.65	40.00	-7.35	QP	100	135
3	64.6594	39.63	-13.48	26.15	40.00	-13.85	QP	100	125
4	96.0986	44.53	-16.05	28.48	43.50	-15.02	QP	100	130
5	143.8295	44.16	-13.63	30.53	43.50	-12.97	QP	200	222
6	252.0627	37.90	-10.75	27.15	46.00	-18.85	QP	100	14

Test Mode: TX Mode Channel 78 _3Mbps

Horizontal

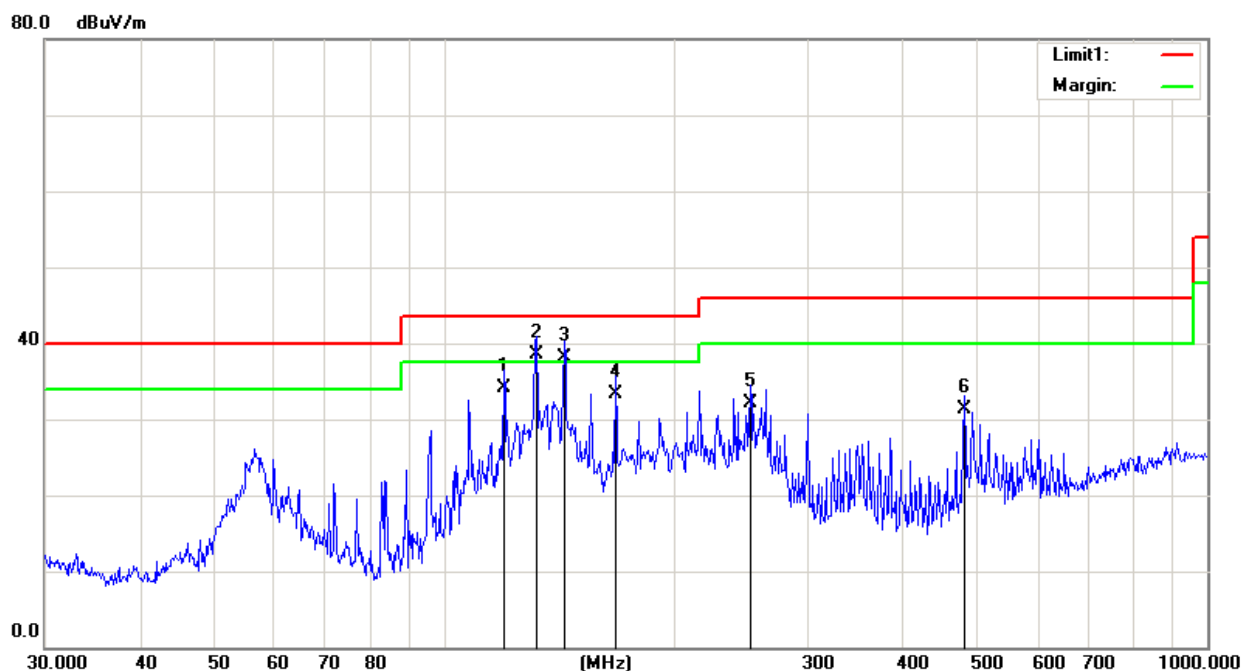


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Antenna Height	Table Degree
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(degree)
1	119.8555	49.53	-15.38	34.15	43.50	-9.35	QP	300	152
2	132.2205	53.08	-14.60	38.48	43.50	-5.02	QP	400	42
3	143.8294	52.49	-14.39	38.10	43.50	-5.40	QP	300	145
4	167.8242	45.98	-12.72	33.26	43.50	-10.24	QP	300	265
5	252.0627	40.30	-8.16	32.14	46.00	-13.86	QP	100	325
6	480.5276	39.31	-8.06	31.25	46.00	-14.75	QP	100	11

5.8TEST RESULTS - ABOVE 1000MHz (BAND EDGE)

Test Mode:	TX 2402 MHz_CH00_1Mbps
------------	------------------------


Vertical

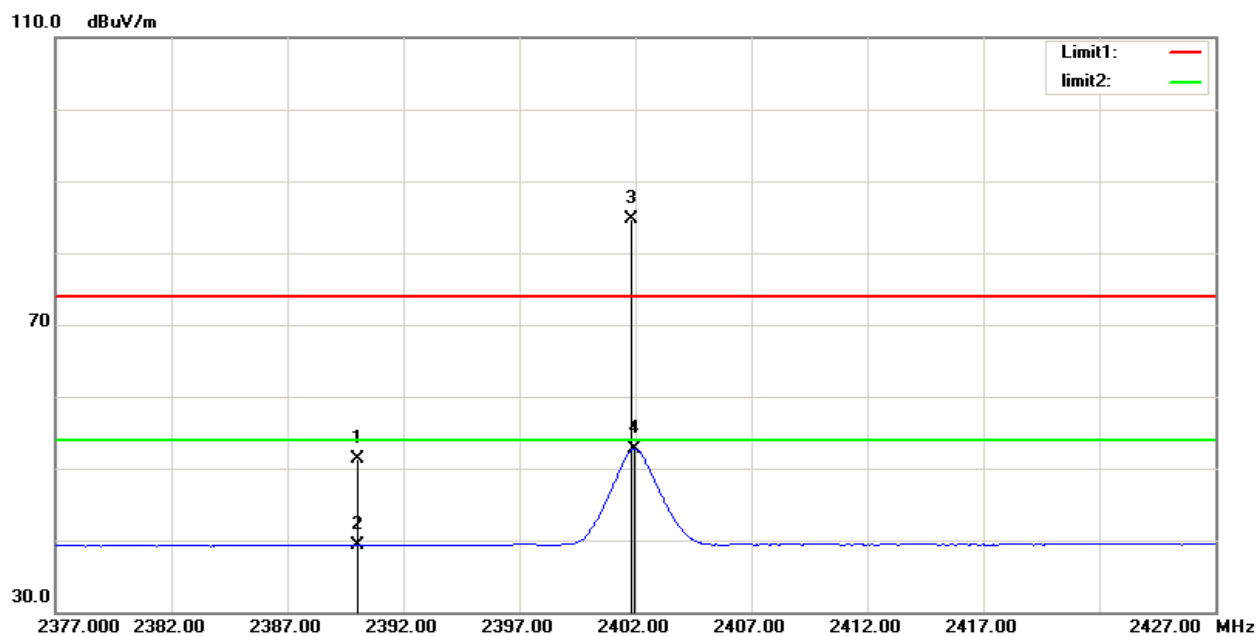

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Antenna Height	Table Degree
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(degree)
1	2390.000	21.81	29.47	51.28	74.00	-22.72	peak	150	108
2	2390.000	9.76	29.47	39.23	54.00	-14.77	AVG	150	108
3	2401.800	55.28	29.50	84.78	/	/	peak	150	108
4	2401.950	23.21	29.51	52.72	/	/	AVG	150	108

Test Mode: TX 2402 MHz_CH00_1Mbps


Horizontal

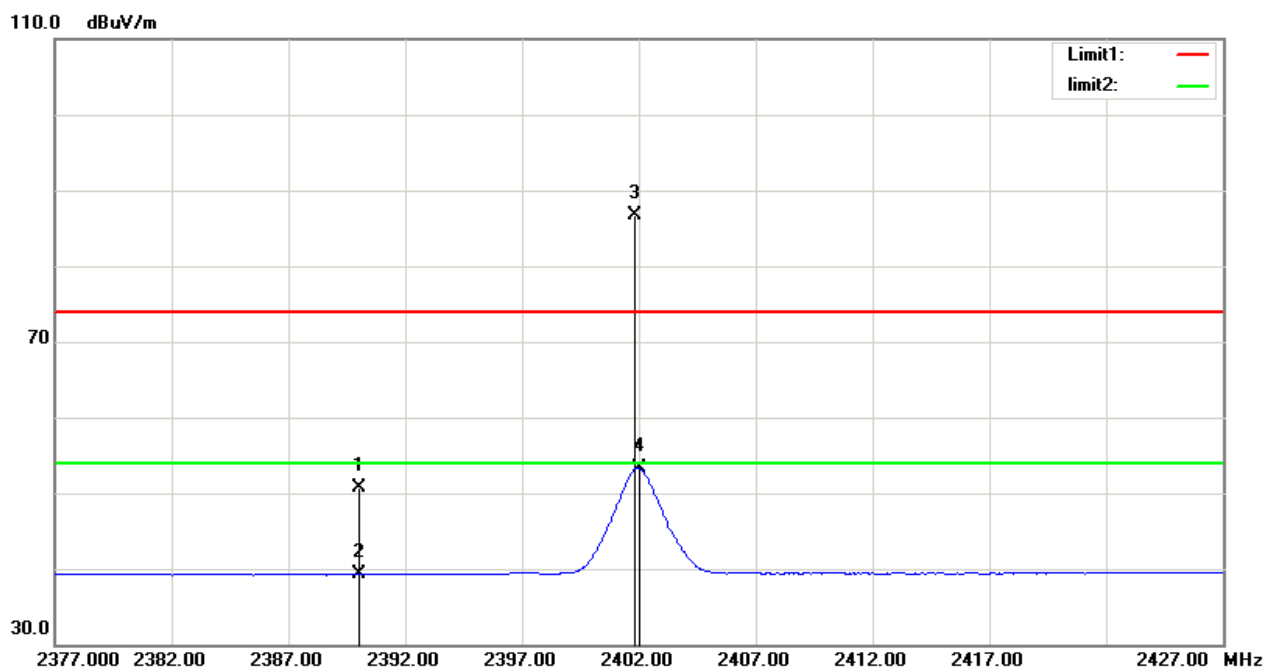

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Antenna Height	Table Degree
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(degree)
1	2390.000	21.26	29.47	50.73	74.00	-23.27	peak	150	346
2	2390.000	9.77	29.47	39.24	54.00	-14.76	AVG	150	346
3	2401.850	57.14	29.50	86.64	/	/	peak	150	346
4	2402.000	23.81	29.51	53.32	/	/	AVG	150	346

Test Mode: TX 2480 MHz_CH78_1Mbps


Vertical

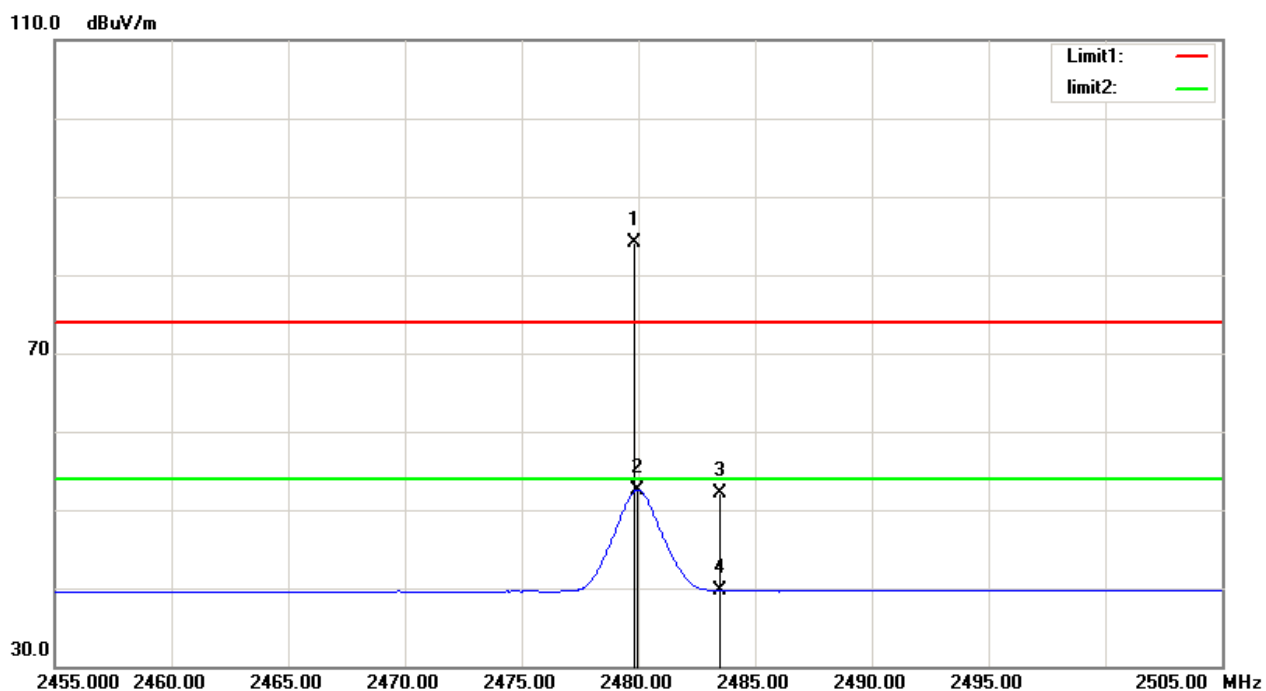

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Antenna Height	Table Degree
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(degree)
1	2479.850	54.32	29.72	84.04	/	/	peak	150	221
2	2479.950	22.85	29.72	52.57	/	/	AVG	150	221
3	2483.500	22.28	29.73	52.01	74.00	-21.99	peak	150	221
4	2483.500	9.99	29.73	39.72	54.00	-14.28	AVG	150	221

Test Mode: TX 2480 MHz_CH78_1Mbps


Horizontal

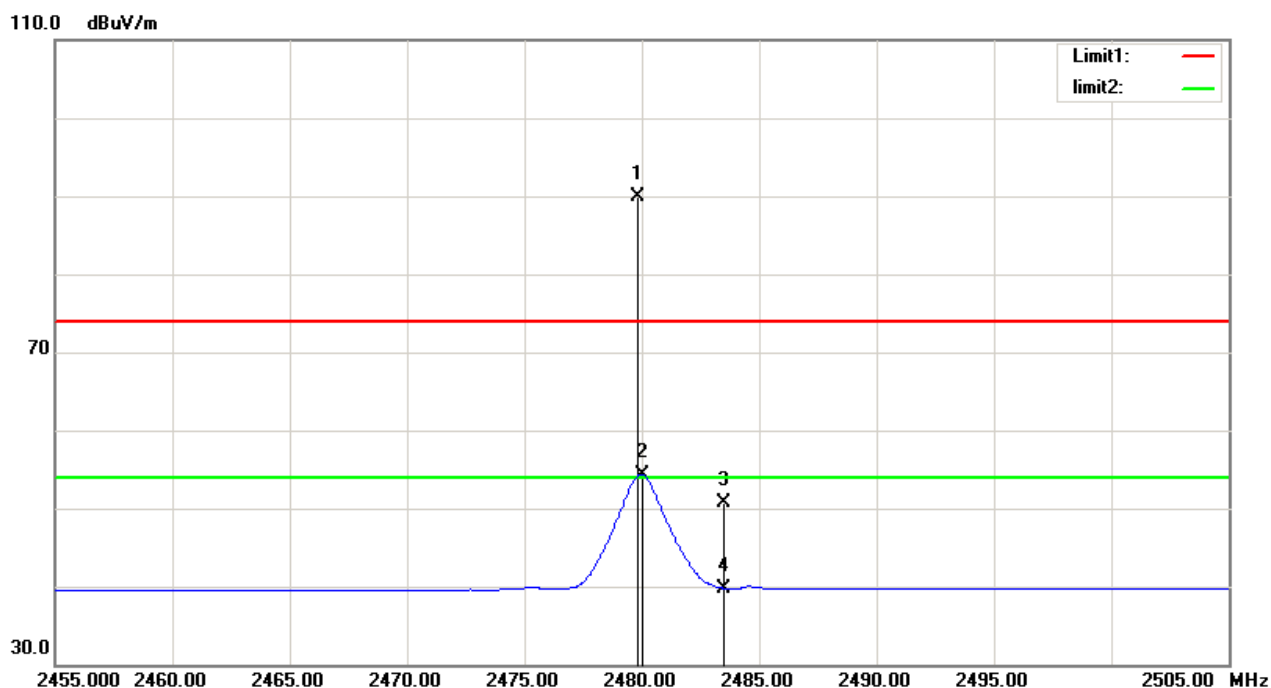

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Antenna Height	Table Degree
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(degree)
1	2479.850	60.15	29.72	89.87	/	/	peak	150	134
2	2480.000	24.64	29.72	54.36	/	/	AVG	150	134
3	2483.500	20.90	29.73	50.63	74.00	-23.37	peak	150	134
4	2483.500	10.07	29.73	39.80	54.00	-14.20	AVG	150	134

Test Mode: TX 2402 MHz_CH00_2Mbps


Vertical

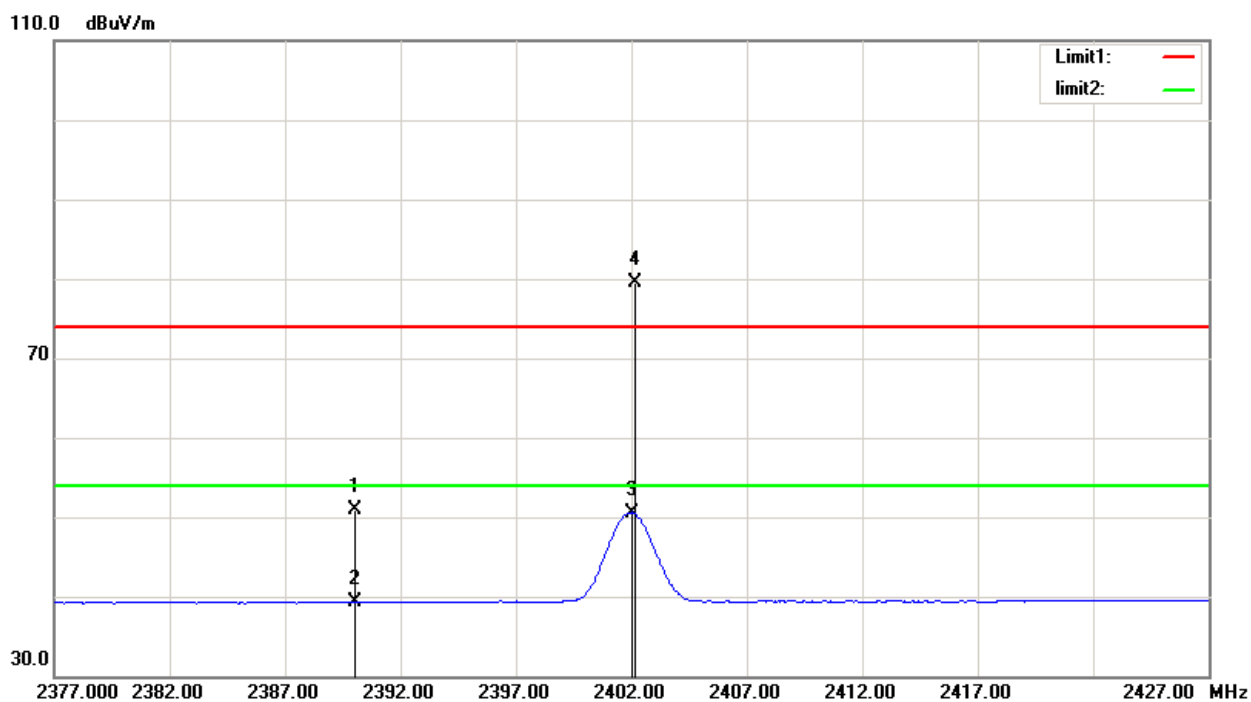

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Antenna Height	Table Degree
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(degree)
1	2390.000	21.47	29.47	50.94	74.00	-23.06	peak	150	215
2	2390.000	9.81	29.47	39.28	54.00	-14.72	AVG	150	215
3	2402.000	21.09	29.51	50.60	/	/	AVG	150	215
4	2402.150	50.04	29.51	79.55	/	/	peak	150	215

Test Mode: TX 2402 MHz_CH00_2Mbps


Horizontal

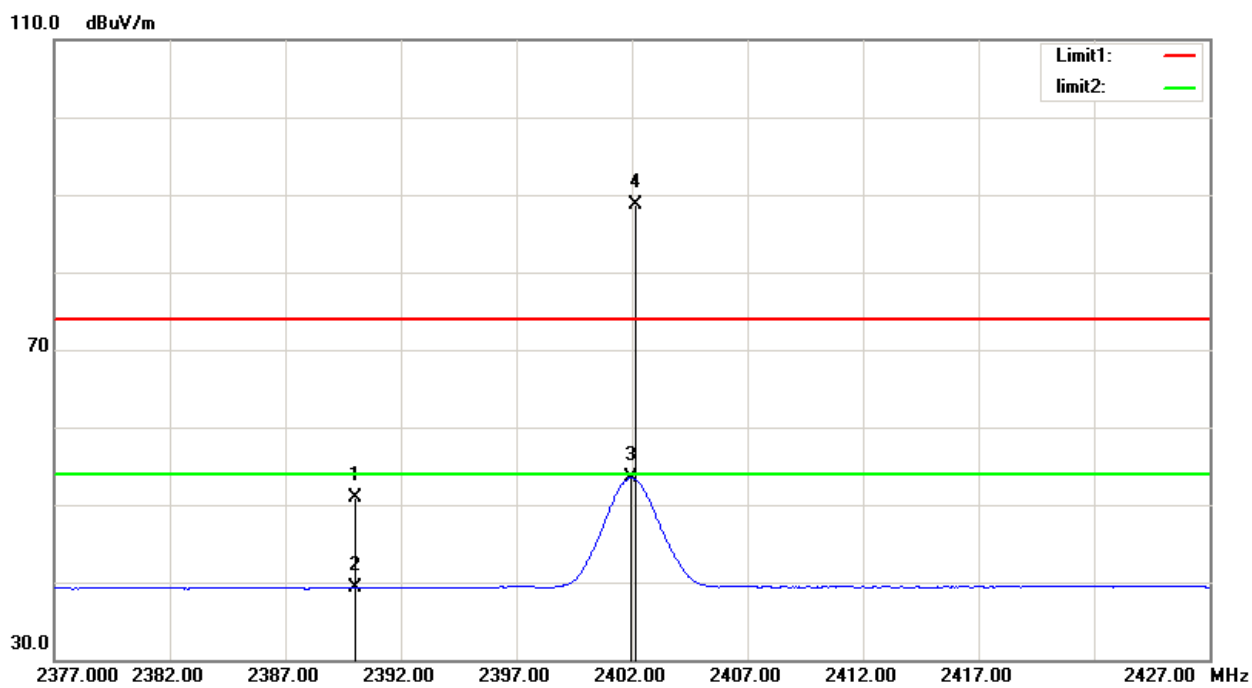

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Antenna Height (cm)	Table Degree (degree)
1	2390.000	21.39	29.47	50.86	74.00	-23.14	peak	150	74
2	2390.000	9.78	29.47	39.25	54.00	-14.75	AVG	150	74
3	2401.950	24.00	29.51	53.51	/	/	AVG	150	74
4	2402.150	59.16	29.51	88.67	/	/	peak	150	74

Test Mode: TX 2480 MHz_CH78_2Mbps


Vertical

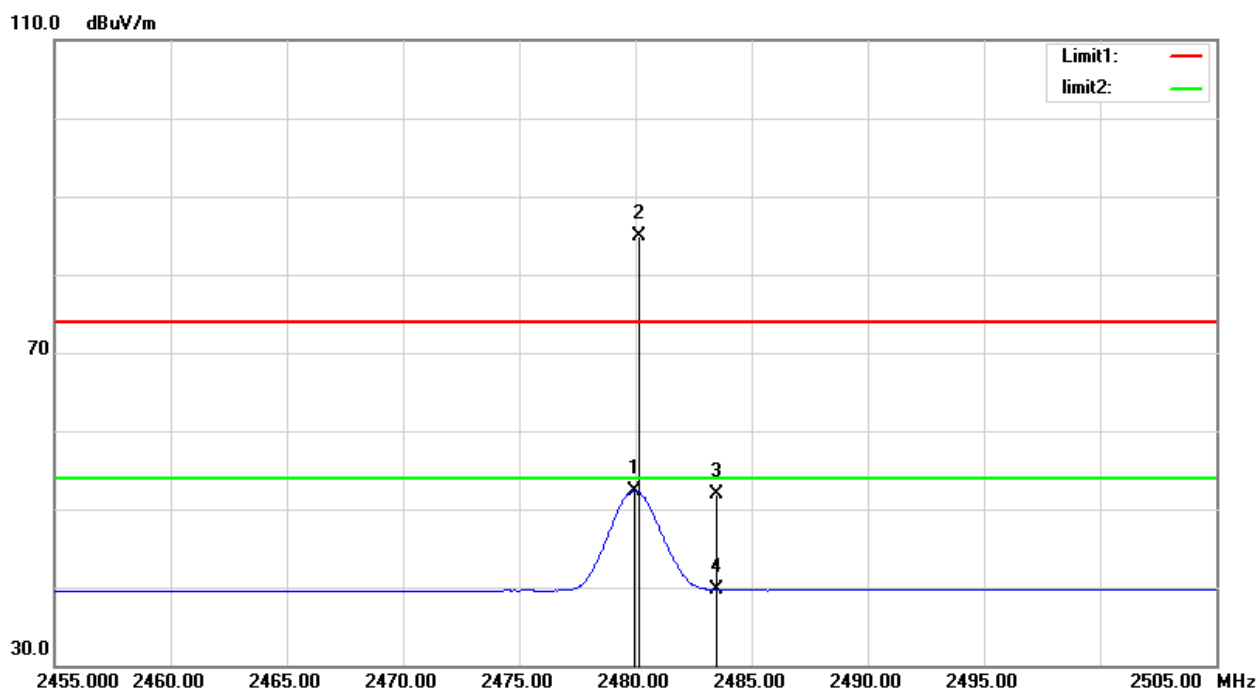

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Antenna Height	Table Degree
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(degree)
1	2479.950	22.62	29.72	52.34	/	/	AVG	150	221
2	2480.200	55.25	29.72	84.97	/	/	peak	150	221
3	2483.500	22.14	29.73	51.87	74.00	-22.13	peak	150	221
4	2483.500	9.93	29.73	39.66	54.00	-14.34	AVG	150	221

Test Mode: TX 2480 MHz_CH78_2Mbps


Horizontal

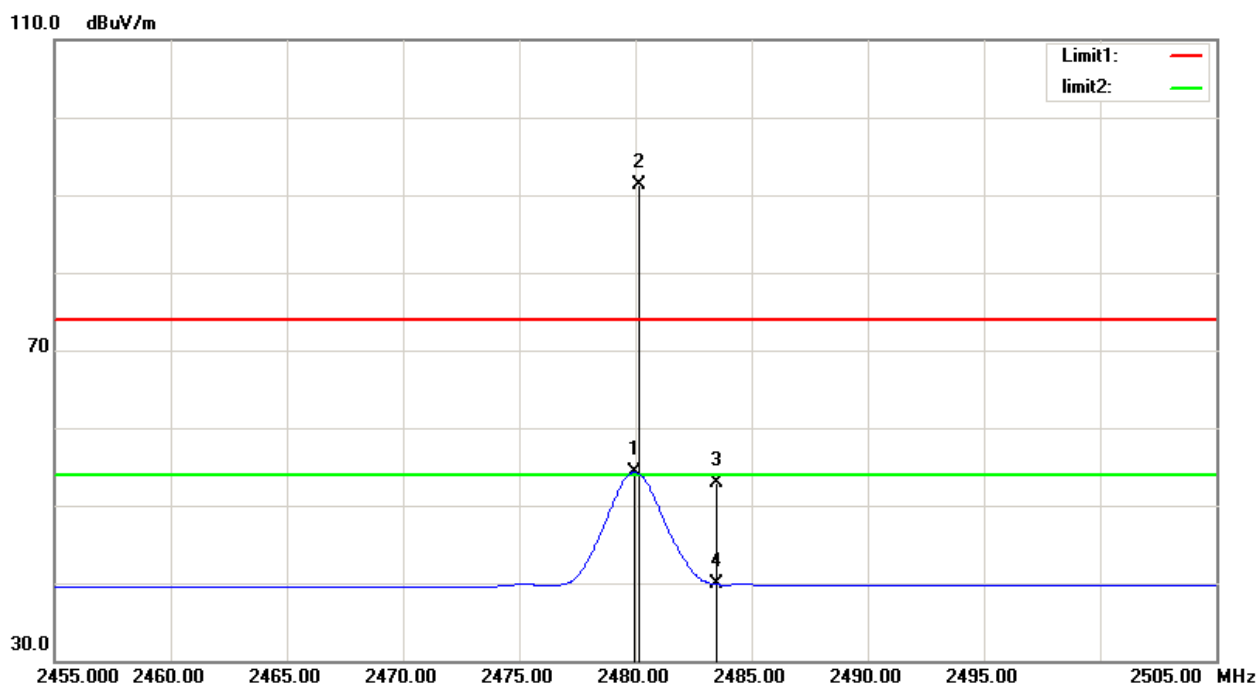

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Antenna Height	Table Degree
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(degree)
1	2479.950	24.58	29.72	54.30	/	/	AVG	150	134
2	2480.150	61.54	29.72	91.26	/	/	peak	150	134
3	2483.500	23.11	29.73	52.84	74.00	-21.16	peak	150	134
4	2483.500	10.10	29.73	39.83	54.00	-14.17	AVG	150	134

Test Mode: TX 2402 MHz_CH00_3Mbps


Vertical

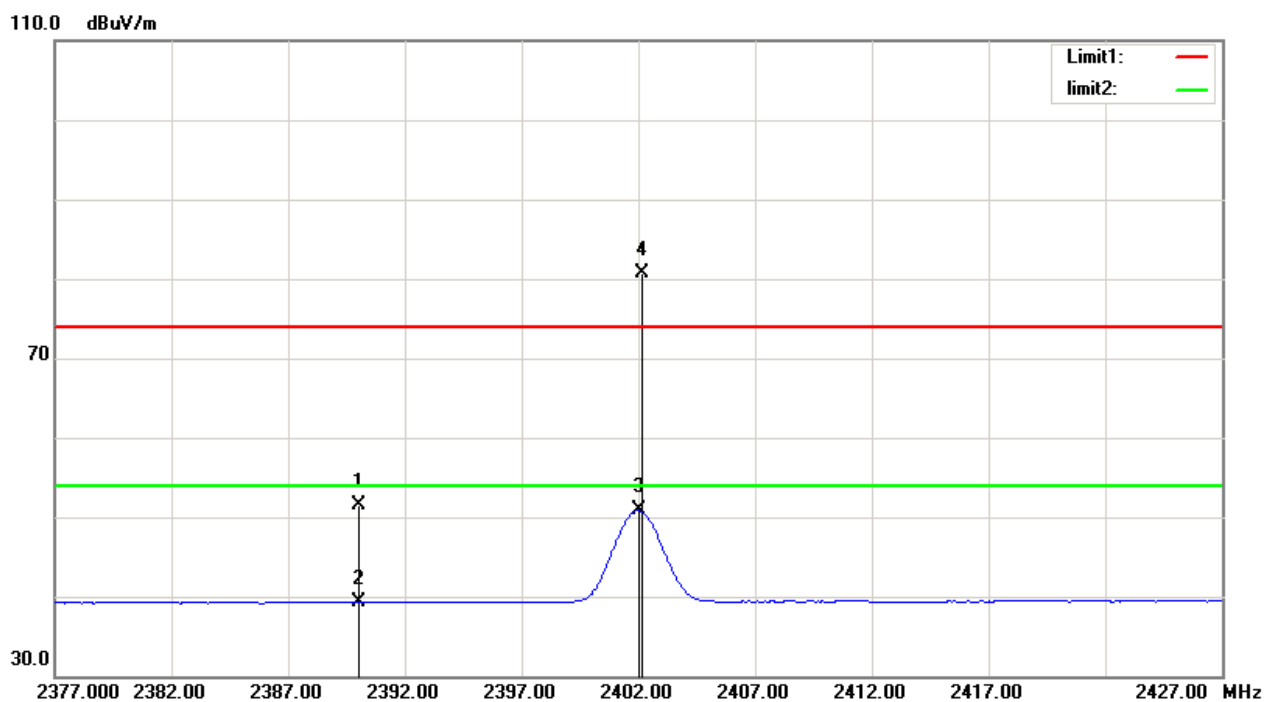

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Antenna Height	Table Degree
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(degree)
1	2390.000	21.99	29.47	51.46	74.00	-22.54	peak	150	107
2	2390.000	9.82	29.47	39.29	54.00	-14.71	AVG	150	107
3	2402.000	21.34	29.51	50.85	/	/	AVG	150	107
4	2402.200	51.14	29.51	80.65	/	/	peak	150	107

Test Mode: TX 2402 MHz_CH00_3Mbps


Horizontal

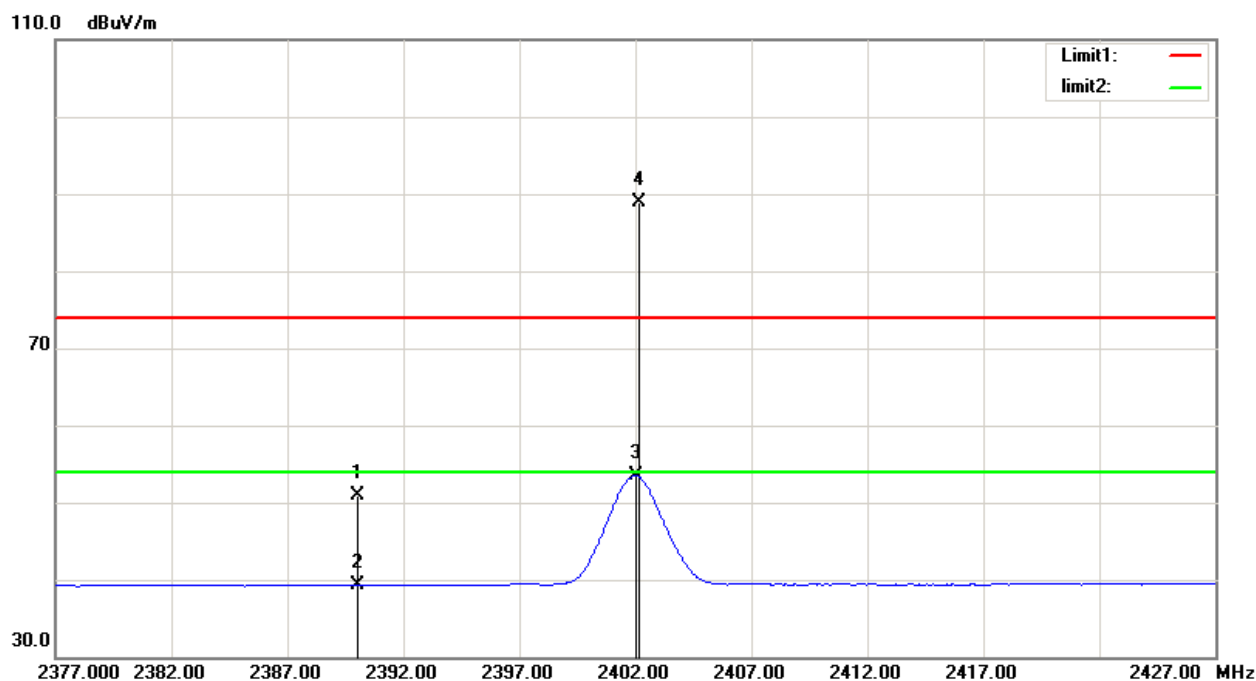

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Antenna Height	Table Degree
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(degree)
1	2390.000	21.38	29.47	50.85	74.00	-23.15	peak	150	141
2	2390.000	9.82	29.47	39.29	54.00	-14.71	AVG	150	141
3	2402.000	23.96	29.51	53.47	/	/	AVG	150	141
4	2402.200	59.44	29.51	88.95	/	/	peak	150	141

Test Mode: TX 2480 MHz_CH78_3Mbps


Vertical

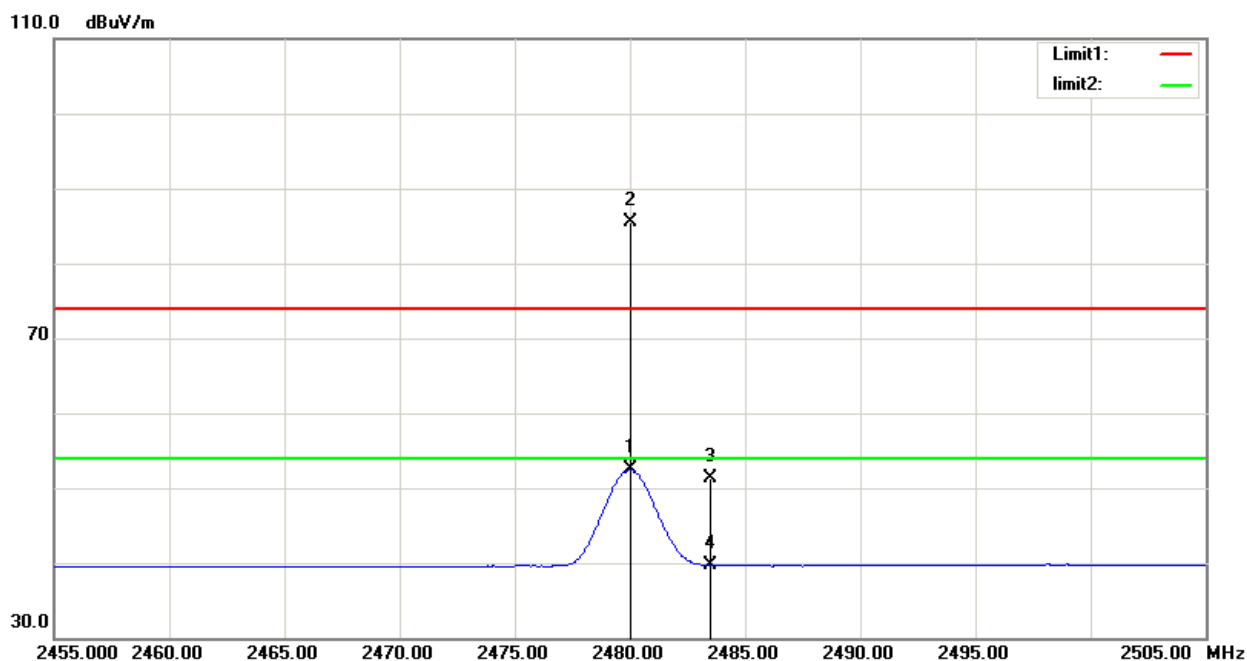

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Antenna Height	Table Degree
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(degree)
1	2480.000	22.70	29.72	52.42	/	/	AVG	150	221
2	2480.050	55.79	29.72	85.51	/	/	peak	150	221
3	2483.500	21.58	29.73	51.31	74.00	-22.69	peak	150	221
4	2483.500	9.92	29.73	39.65	54.00	-14.35	AVG	150	221

Test Mode: TX 2480 MHz_CH78_3Mbps

Horizontal

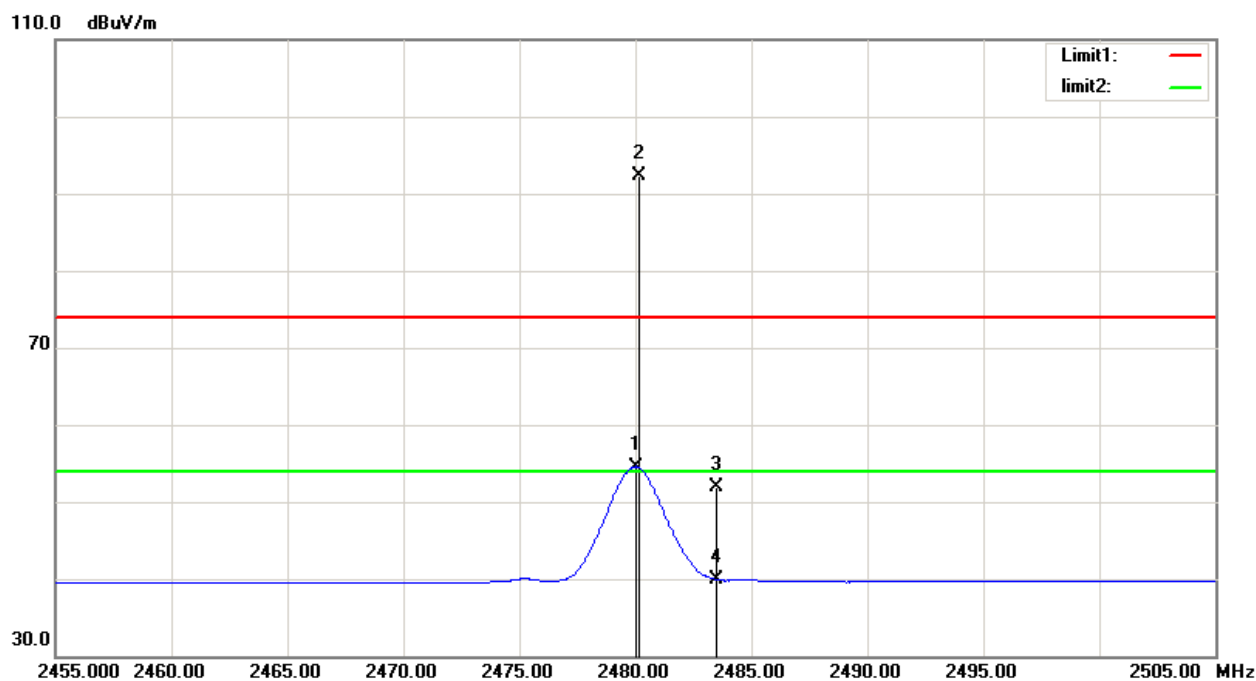


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Antenna Height	Table Degree
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(degree)
1	2480.050	24.88	29.72	54.60	/	/	AVG	150	141
2	2480.200	62.52	29.72	92.24	/	/	peak	150	141
3	2483.500	22.08	29.73	51.81	74.00	-22.19	peak	150	141
4	2483.500	10.16	29.73	39.89	54.00	-14.11	AVG	150	141

5.9TEST RESULTS - ABOVE 1000MHz(HARMONIC)

Test Mode: TX 2402 MHz_CH00_1Mbps


Vertical

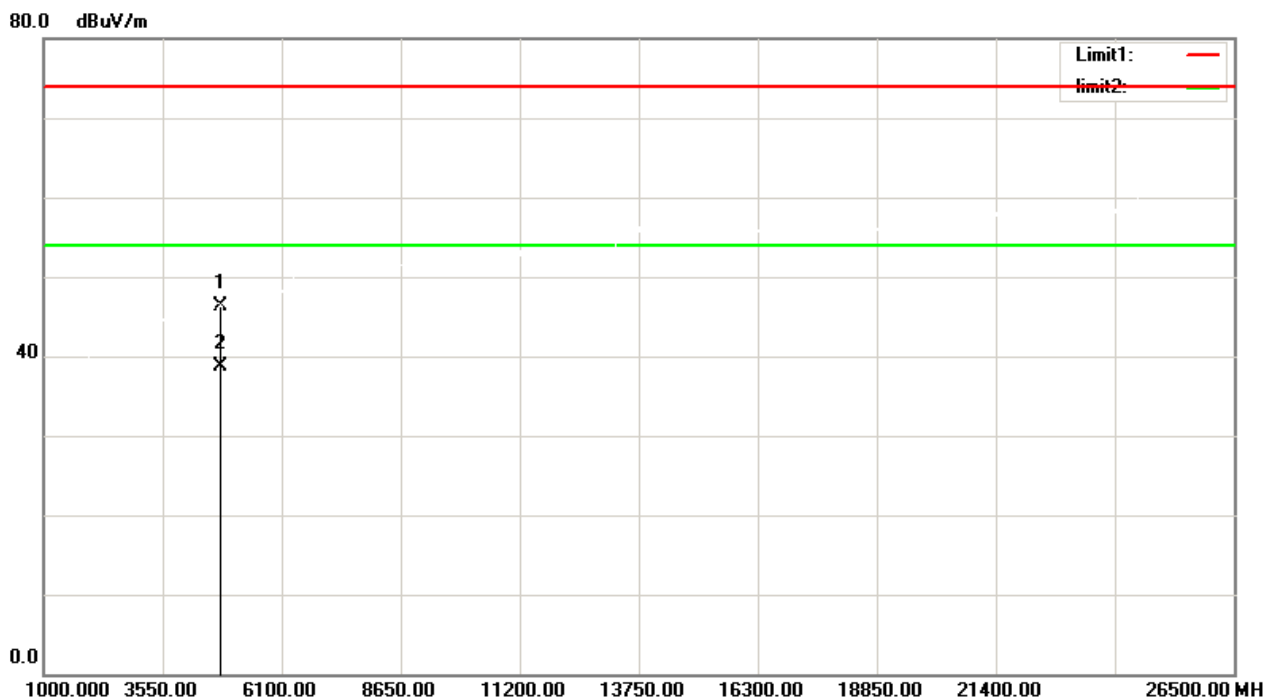

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Antenna Height	Table Degree
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(degree)
1	4804.000	54.35	-8.03	46.32	74.00	-27.68	peak	150	68
2	4804.000	46.65	-8.03	38.62	54.00	-15.38	AVG	150	68

Test Mode: TX 2402 MHz_CH00_1Mbps


Horizontal

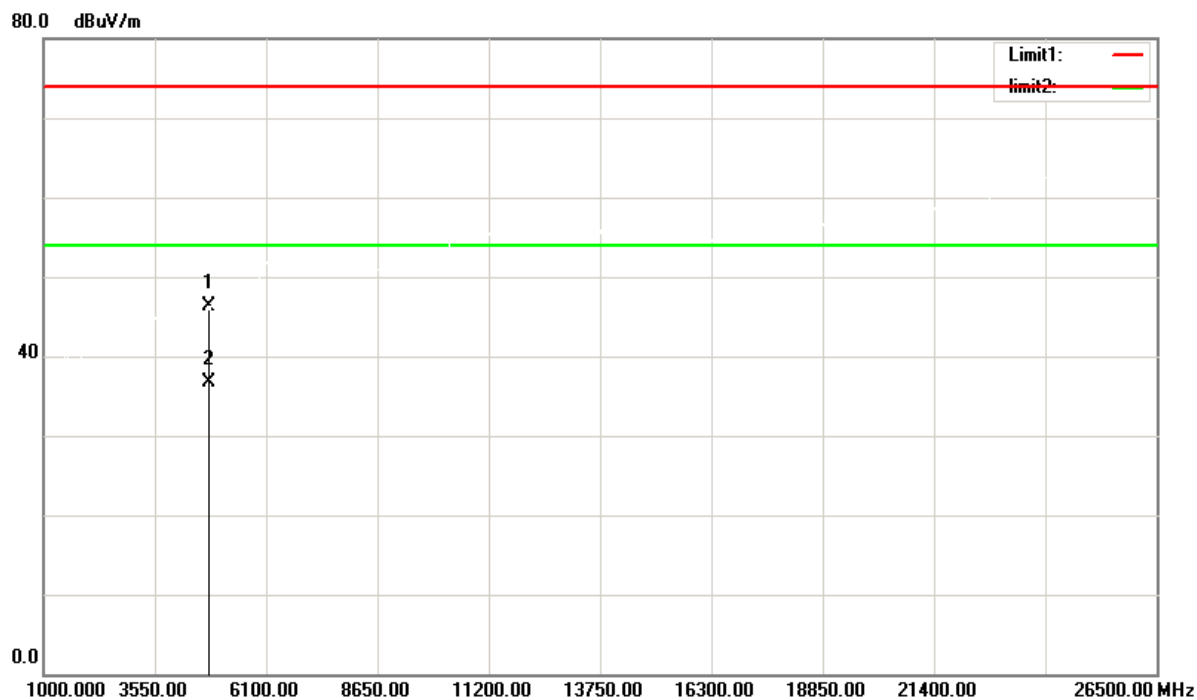

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Antenna Height	Table Degree
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(degree)
1	4804.000	54.43	-8.03	46.40	74.00	-27.60	peak	150	197
2	4804.000	44.69	-8.03	36.66	54.00	-17.34	AVG	150	197

Test Mode: TX 2441 MHz_CH39_1Mbps


Vertical

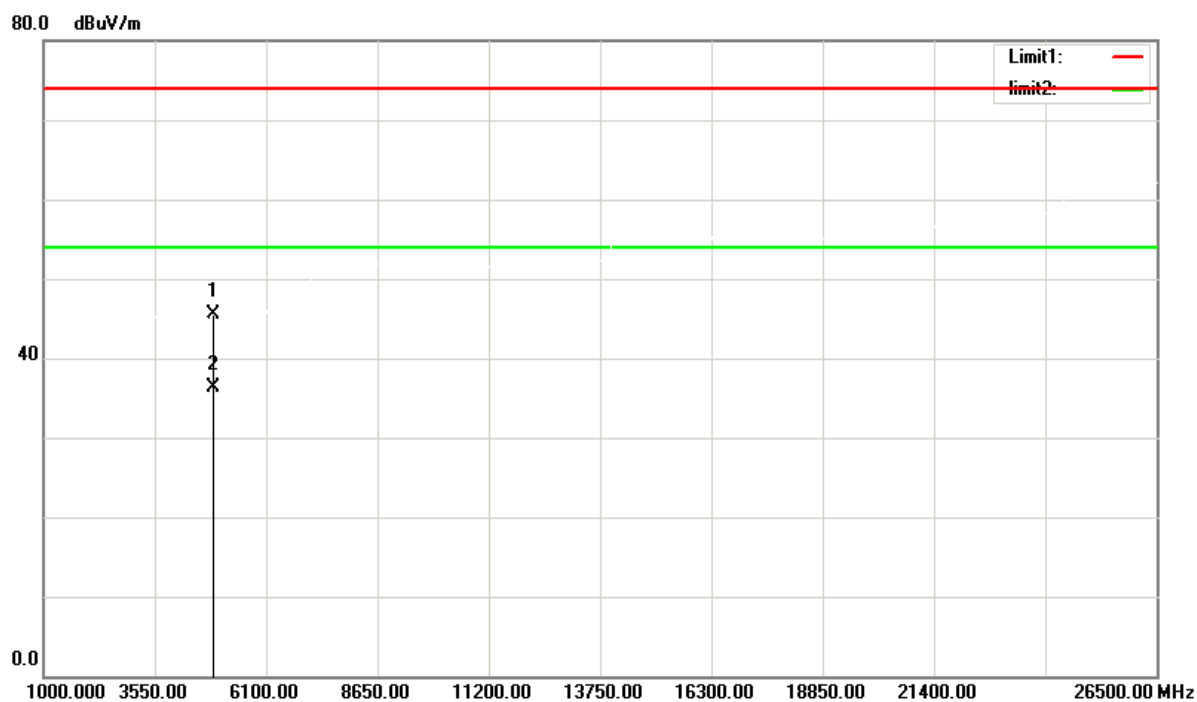

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Antenna Height	Table Degree
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(degree)
1	4882.000	53.43	-7.87	45.56	74.00	-28.44	peak	150	75
2	4882.000	44.13	-7.87	36.26	54.00	-17.74	AVG	150	75

Test Mode: TX 2441 MHz_CH39_1Mbps


Horizontal

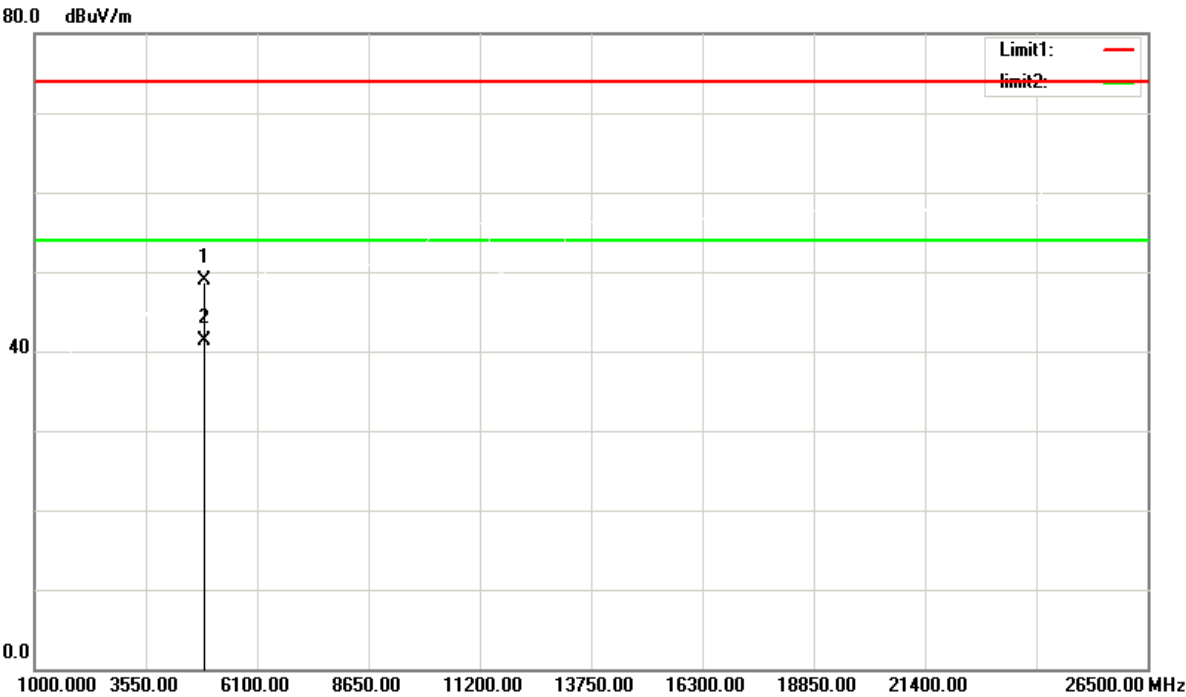

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Antenna Height	Table Degree
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(degree)
1	4881.750	56.78	-7.87	48.91	74.00	-25.09	peak	150	114
2	4881.750	49.21	-7.87	41.34	54.00	-12.66	AVG	150	114

Test Mode: TX 2480 MHz_CH78_1Mbps


Vertical

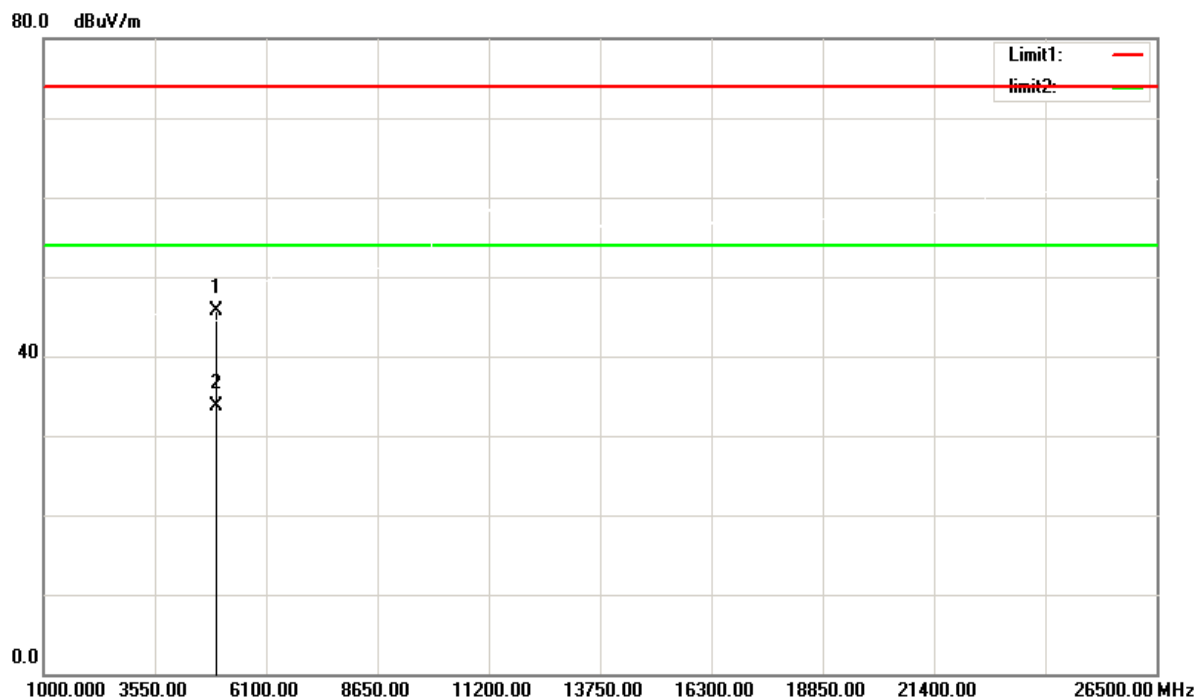

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Antenna Height	Table Degree
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(degree)
1	4960.000	53.44	-7.71	45.73	74.00	-28.27	peak	150	77
2	4960.000	41.33	-7.71	33.62	54.00	-20.38	AVG	150	77

Test Mode: TX 2480 MHz_CH78_1Mbps


Horizontal

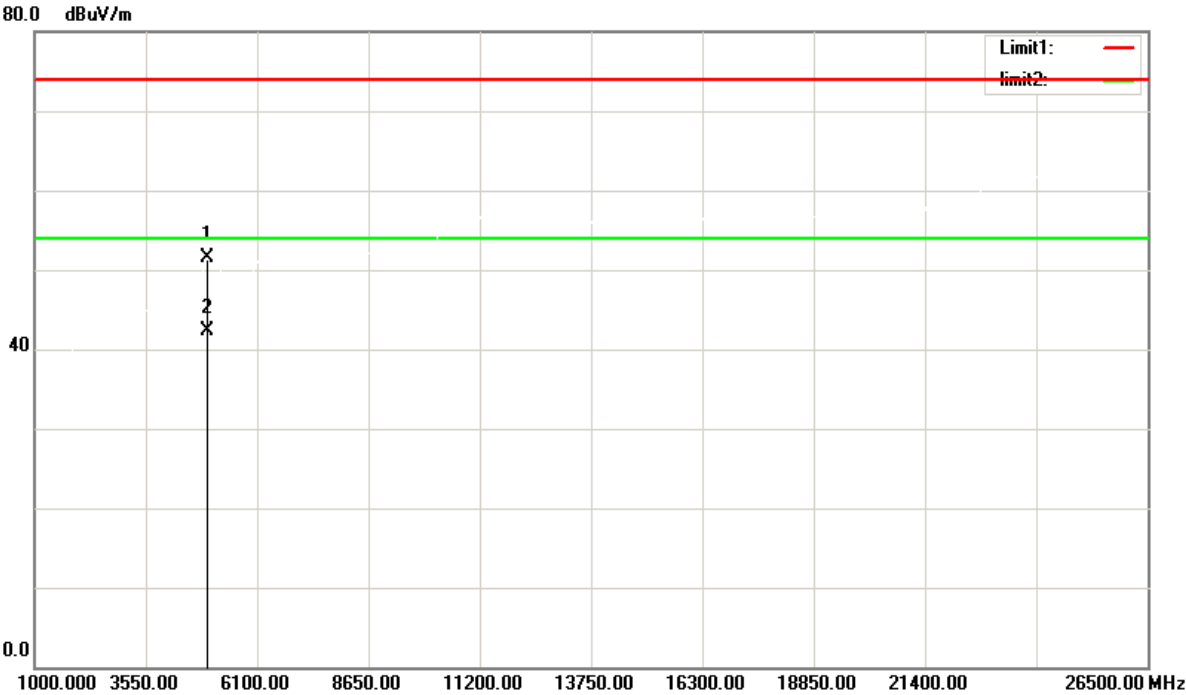

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Antenna Height	Table Degree
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(degree)
1	4960.000	59.19	-7.71	51.48	74.00	-22.52	peak	150	107
2	4960.000	50.07	-7.71	42.36	54.00	-11.64	AVG	150	107

Test Mode: TX 2402 MHz_CH00_2Mbps


Vertical

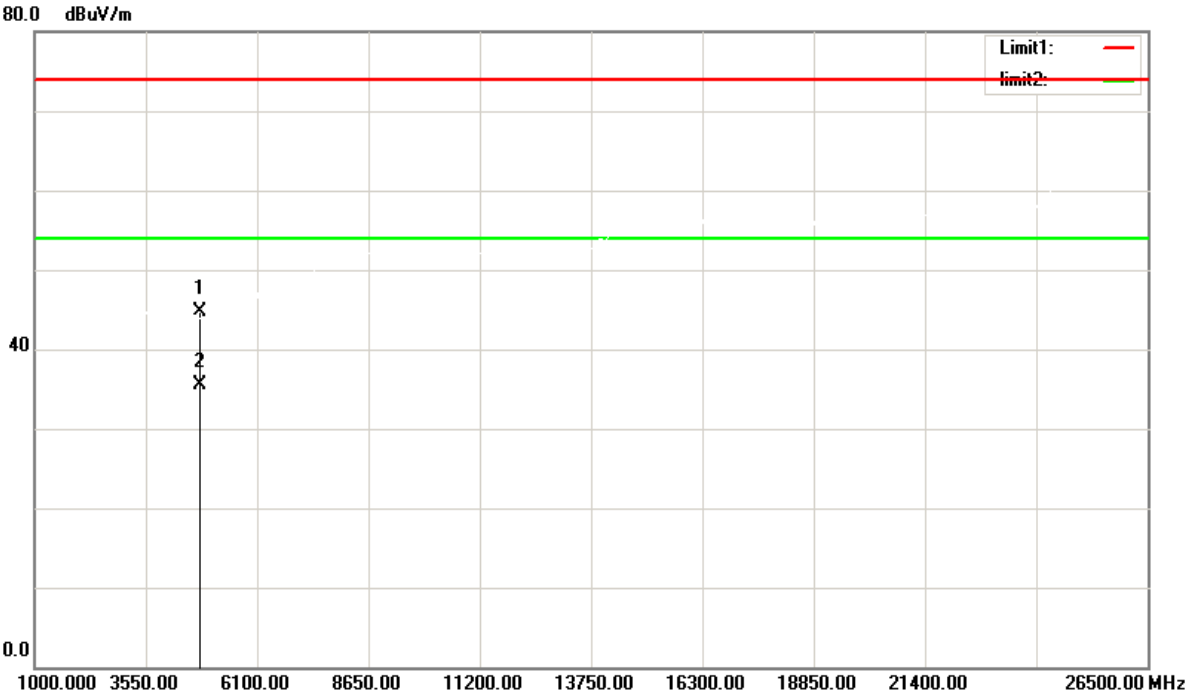

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Antenna Height	Table Degree
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(degree)
1	4804.000	52.68	-8.03	44.65	74.00	-29.35	peak	150	71
2	4804.000	43.63	-8.03	35.60	54.00	-18.40	AVG	150	71

Test Mode: TX 2402 MHz_CH00_2Mbps


Horizontal

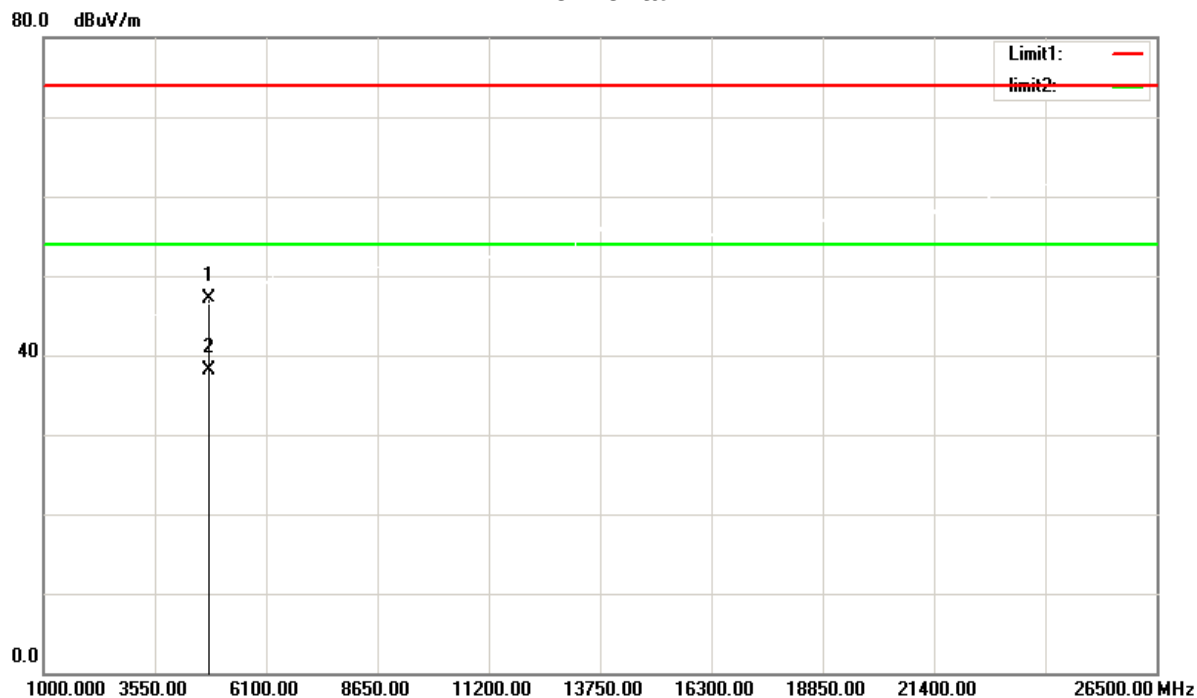

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Antenna Height	Table Degree
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(degree)
1	4804.000	55.12	-8.03	47.09	74.00	-26.91	peak	150	177
2	4804.000	46.18	-8.03	38.15	54.00	-15.85	AVG	150	177

Test Mode: TX 2441 MHz_CH39_2Mbps


Vertical

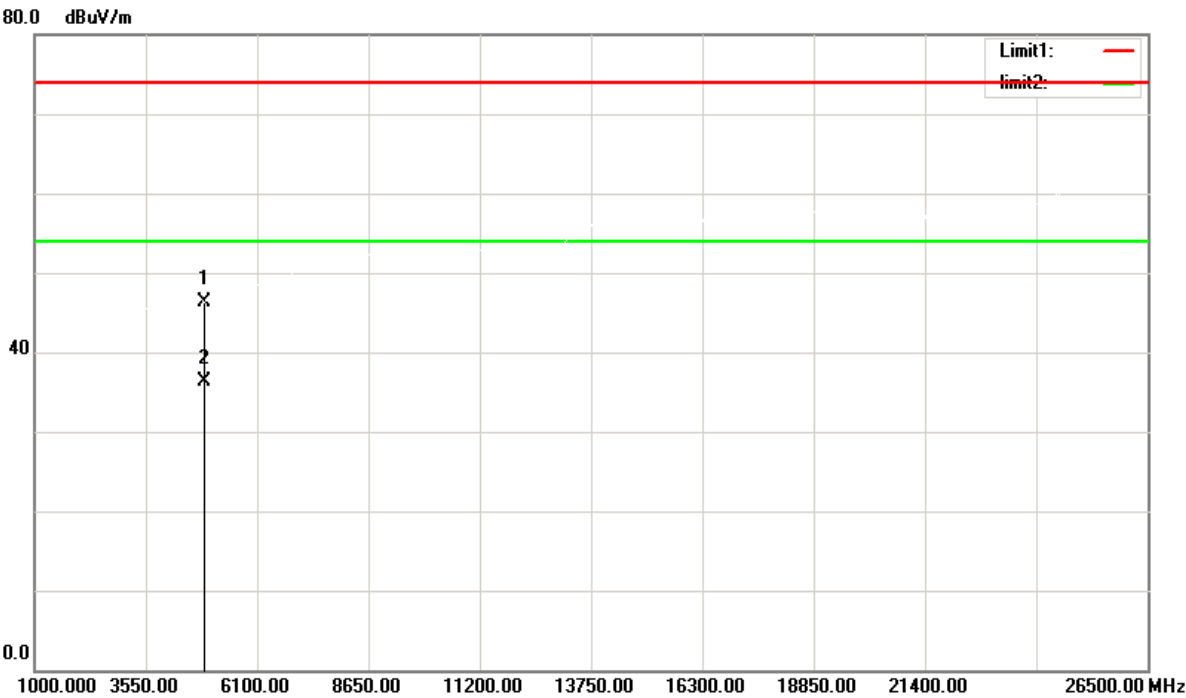

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Antenna Height	Table Degree
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(degree)
1	4882.000	54.20	-7.87	46.33	74.00	-27.67	peak	150	68
2	4882.000	44.13	-7.87	36.26	54.00	-17.74	AVG	150	68

Test Mode: TX 2441 MHz_CH39_2Mbps


Horizontal

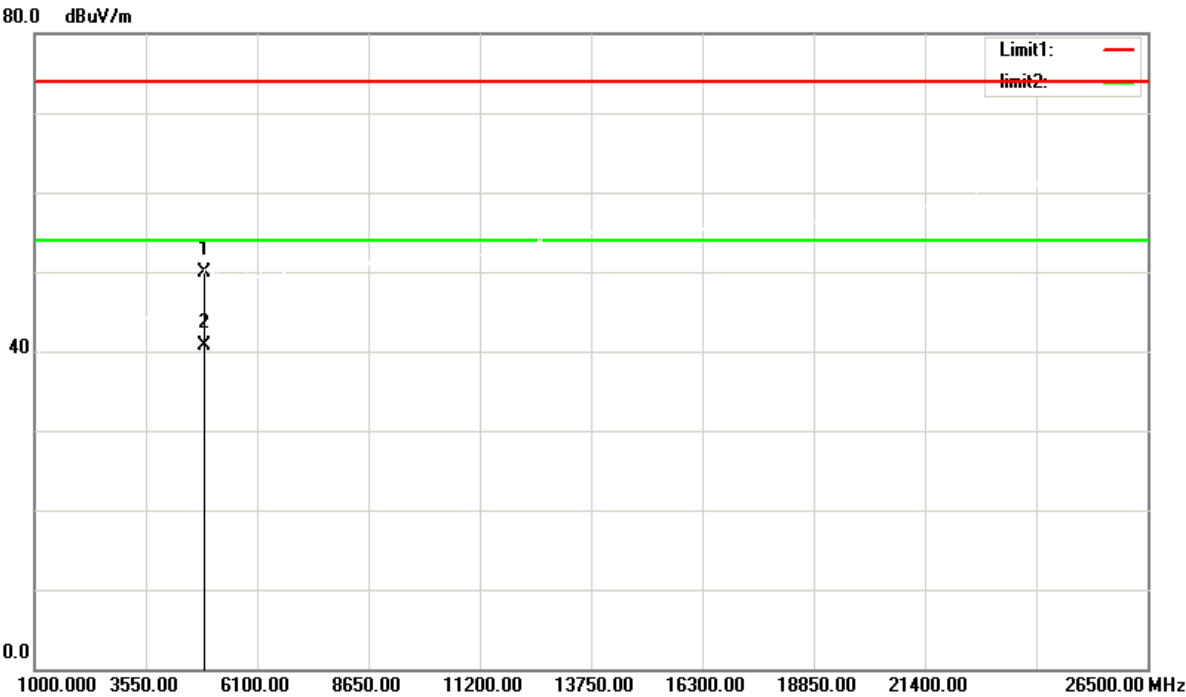

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Antenna Height	Table Degree
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(degree)
1	4882.000	57.73	-7.87	49.86	74.00	-24.14	peak	150	172
2	4882.000	48.48	-7.87	40.61	54.00	-13.39	AVG	150	172

Test Mode: TX 2480 MHz_CH78_2Mbps


Vertical

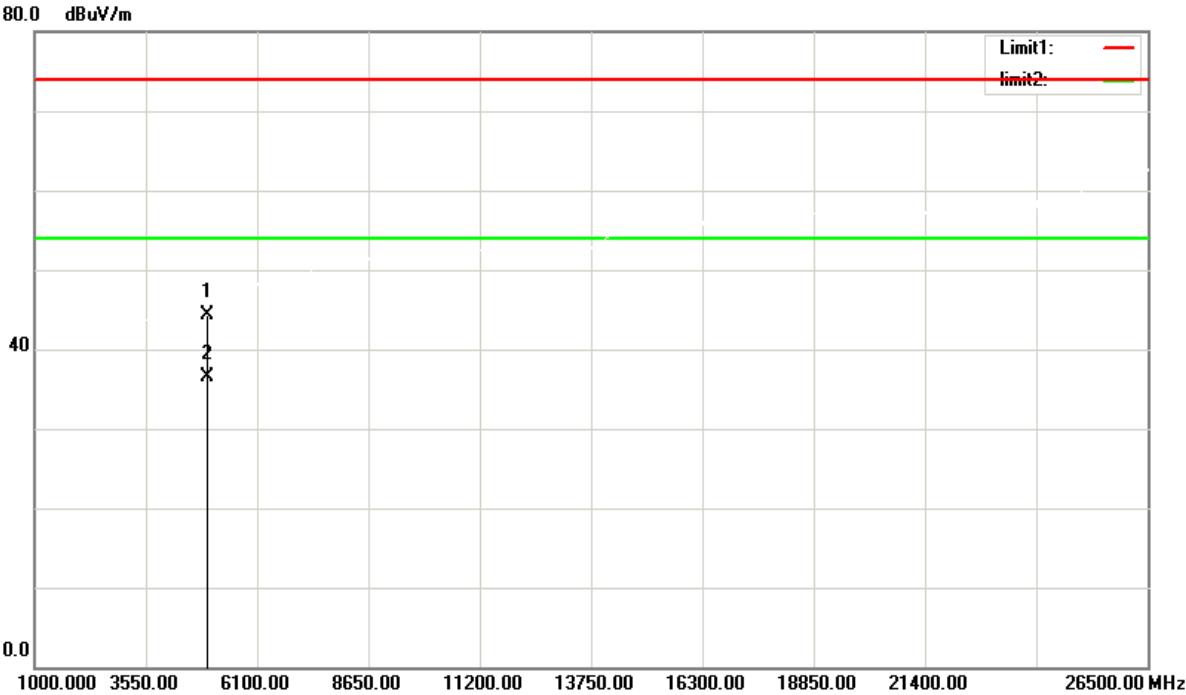

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Antenna Height	Table Degree
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(degree)
1	4960.000	52.06	-7.71	44.35	74.00	-29.65	peak	150	72
2	4960.000	44.24	-7.71	36.53	54.00	-17.47	AVG	150	72

Test Mode: TX 2480 MHz_CH78_2Mbps


Horizontal

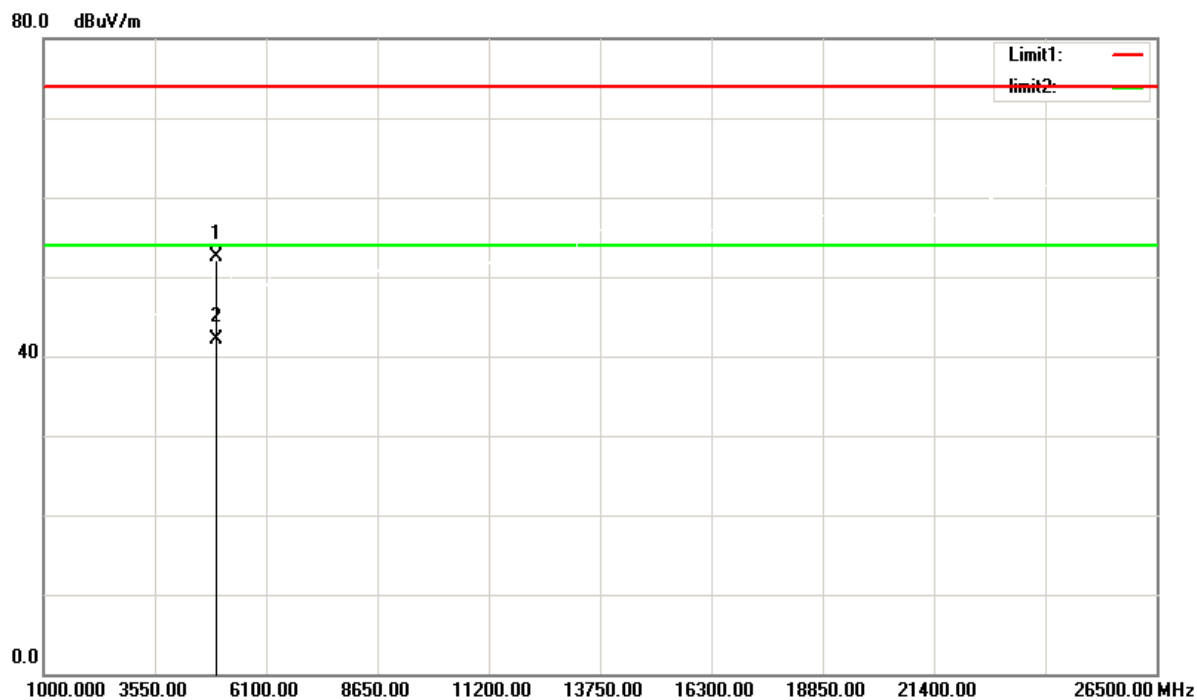

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Antenna Height	Table Degree
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(degree)
1	4960.000	60.24	-7.71	52.53	74.00	-21.47	peak	150	180
2	4960.000	49.86	-7.71	42.15	54.00	-11.85	AVG	150	180

Test Mode: TX 2402 MHz_CH00_3Mbps


Vertical

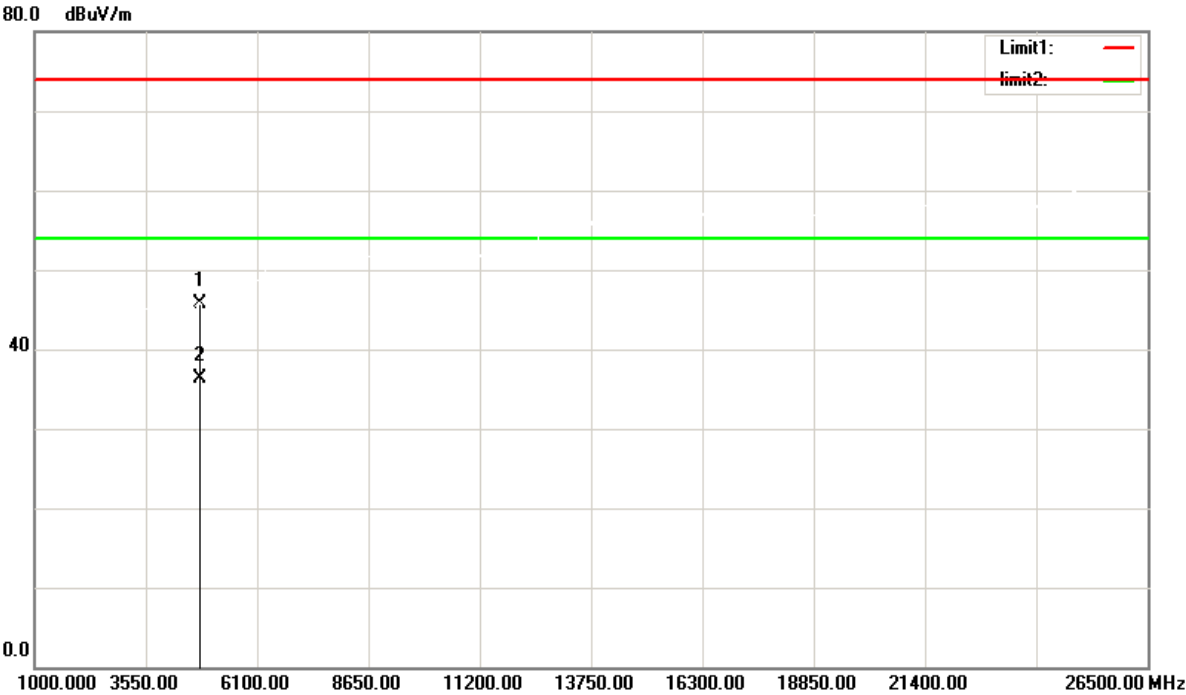

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Antenna Height	Table Degree
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(degree)
1	4804.000	53.65	-8.03	45.62	74.00	-28.38	peak	150	77
2	4804.000	44.29	-8.03	36.26	54.00	-17.74	AVG	150	77

Test Mode: TX 2402 MHz_CH00_3Mbps


Horizontal

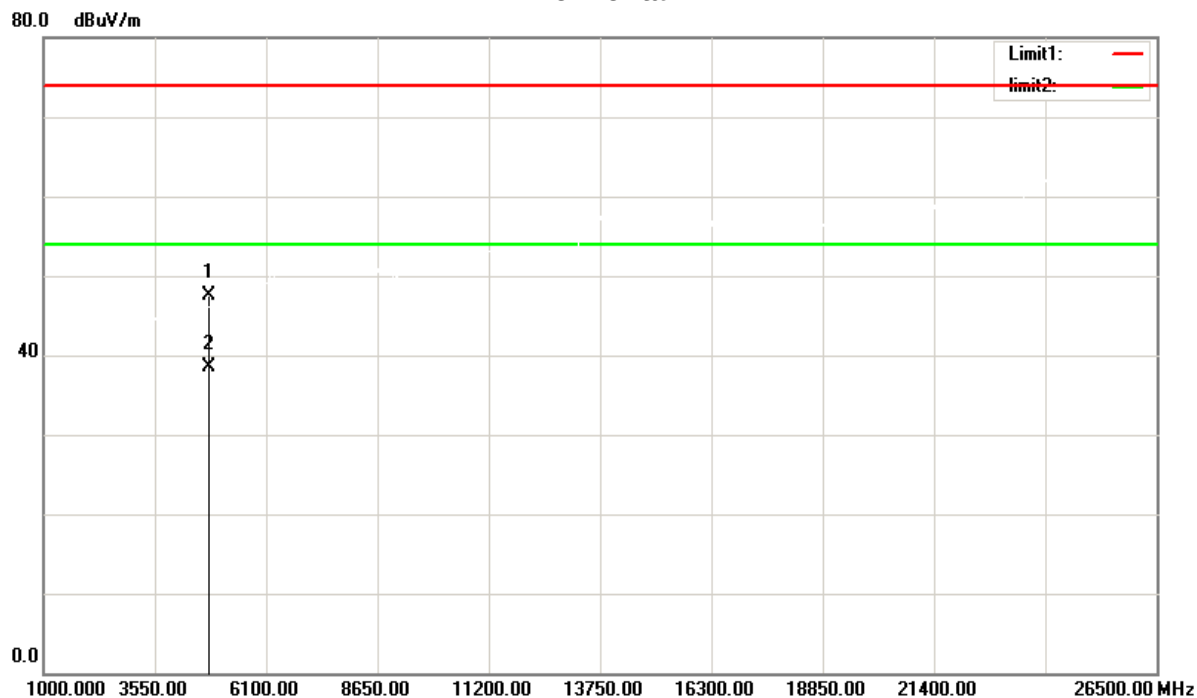

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Antenna Height	Table Degree
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(degree)
1	4804.000	55.49	-8.03	47.46	74.00	-26.54	peak	150	178
2	4804.000	46.51	-8.03	38.48	54.00	-15.52	AVG	150	178

Test Mode: TX 2441 MHz_CH39_3Mbps


Vertical

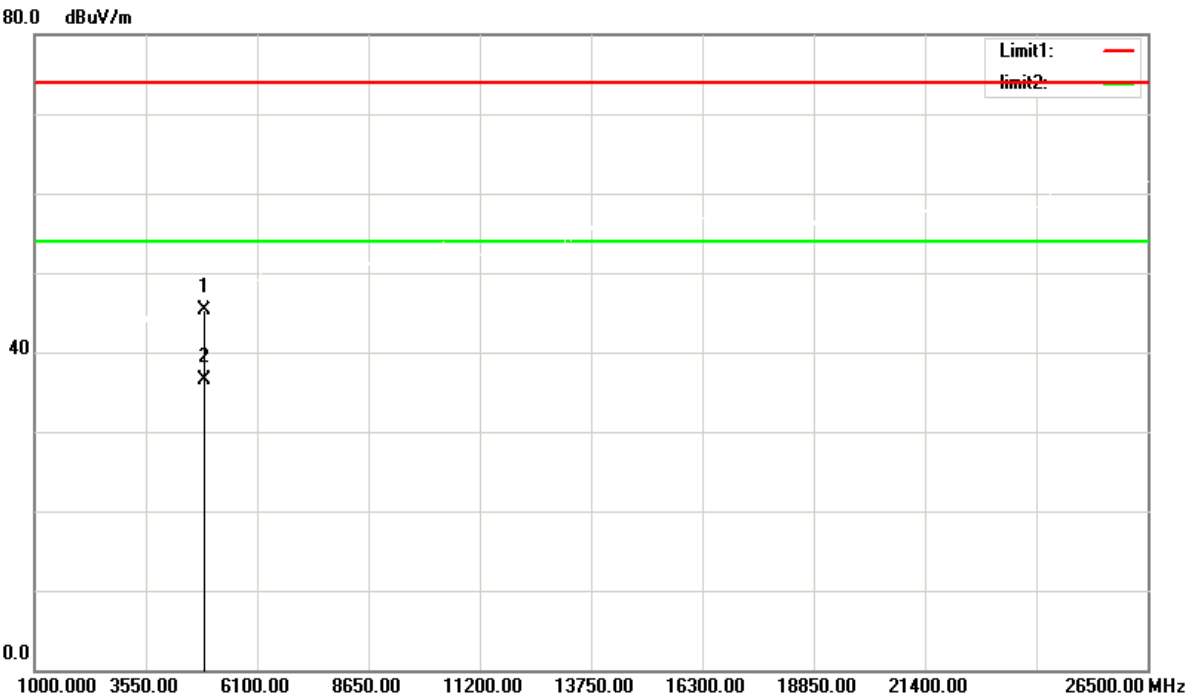

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Antenna Height	Table Degree
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(degree)
1	4882.000	53.17	-7.87	45.30	74.00	-28.70	peak	150	68
2	4882.000	44.46	-7.87	36.59	54.00	-17.41	AVG	150	68

Test Mode: TX 2441 MHz_CH39_3Mbps


Horizontal

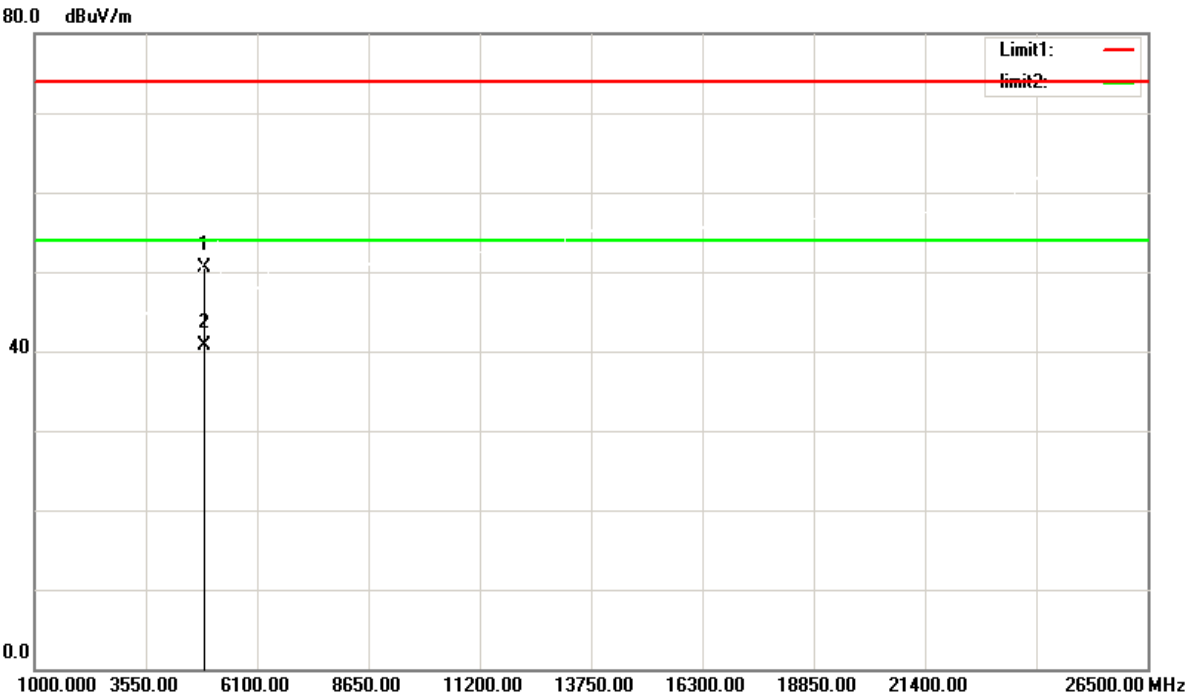

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Antenna Height	Table Degree
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(degree)
1	4882.000	58.36	-7.87	50.49	74.00	-23.51	peak	150	172
2	4882.000	48.54	-7.87	40.67	54.00	-13.33	AVG	150	172

Test Mode: TX 2480 MHz_CH78_3Mbps


Vertical

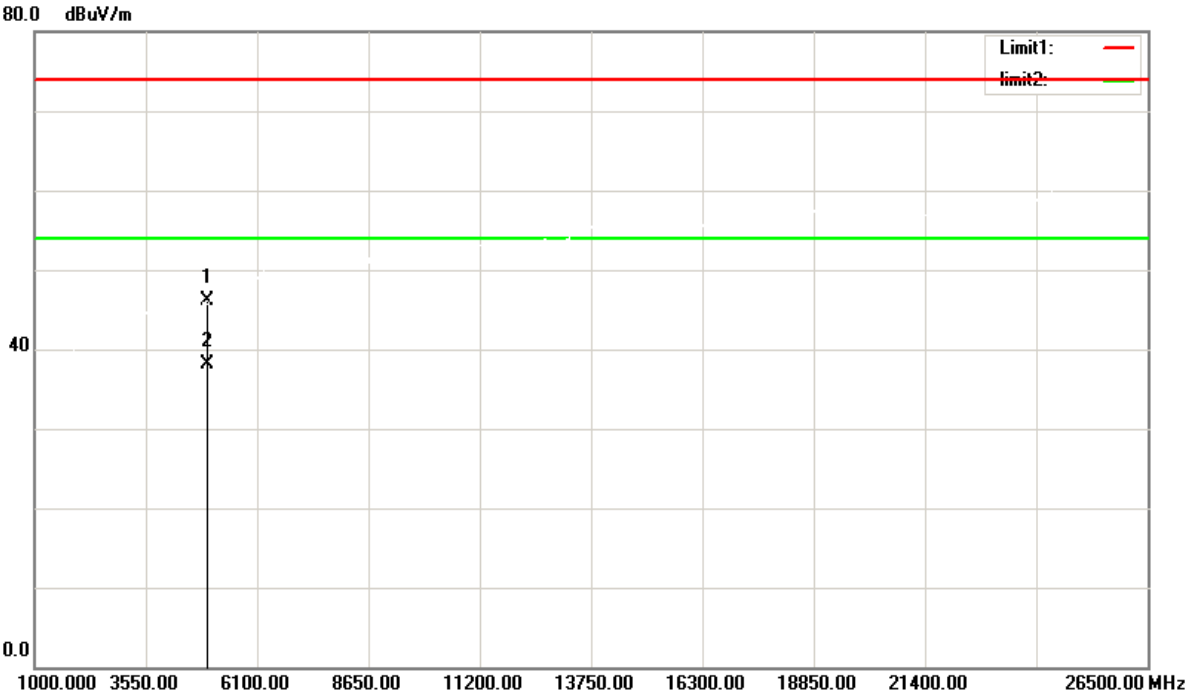

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Antenna Height	Table Degree
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(degree)
1	4960.000	53.82	-7.71	46.11	74.00	-27.89	peak	150	74
2	4960.000	45.85	-7.71	38.14	54.00	-15.86	AVG	150	74

Test Mode: TX 2480 MHz_CH78_3Mbps

Horizontal

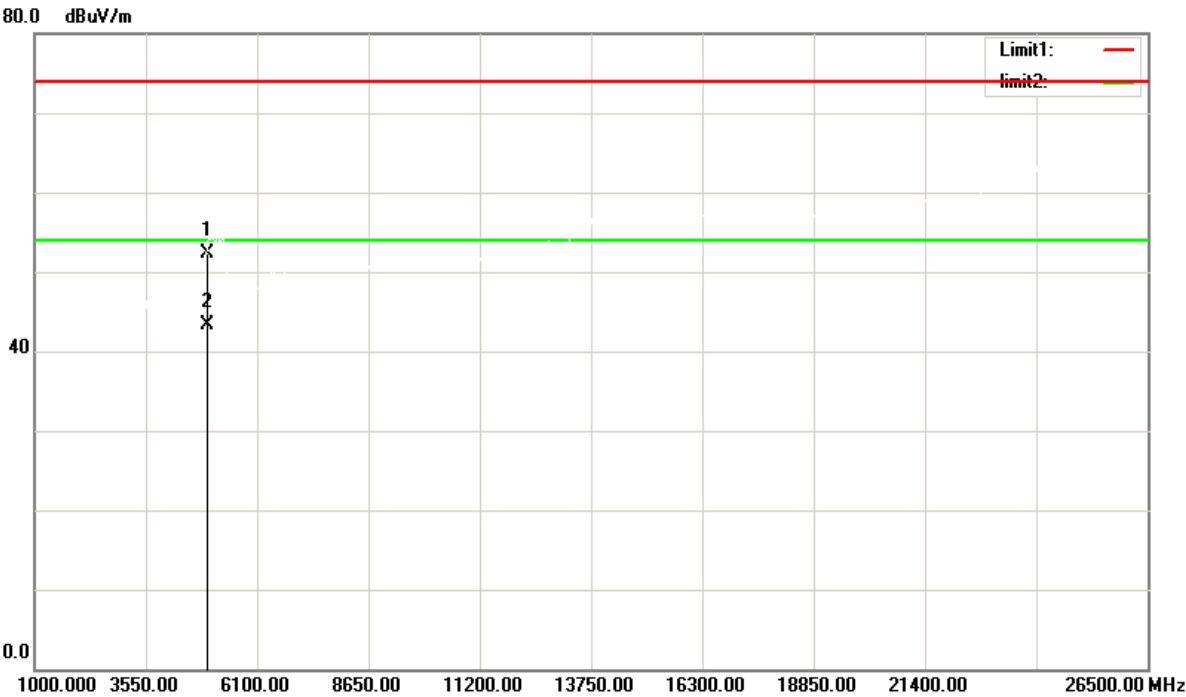

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Antenna Height	Table Degree
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(degree)
1	4960.000	60.03	-7.71	52.32	74.00	-21.68	peak	150	165
2	4960.000	50.94	-7.71	43.23	54.00	-10.77	AVG	150	165

6. NUMBER OF HOPPING FREQUENCY**6.1 LIMIT**

FCC Part15, Subpart C (15.247)&RSS-247	
Section	Test Item
15.247(a)(1)(iii)	Number of Hopping Frequency


6.2 TEST PROCEDURE AND SETTING

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW=100 kHz, VBW=300 kHz, Sweep time = Auto.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RBW	100kHz
VBW	300kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

6.3 MEASUREMENT INSTRUMENTS LIST


Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum analyzer	KEYSIGHT	N9010A	MY55150427	2023/05/26
2	Attenuator	Mini-Circuits	BW-S10W2	101109	N/A
3	RF Cable	Mi-cable	C10-01-01-1	100309	N/A

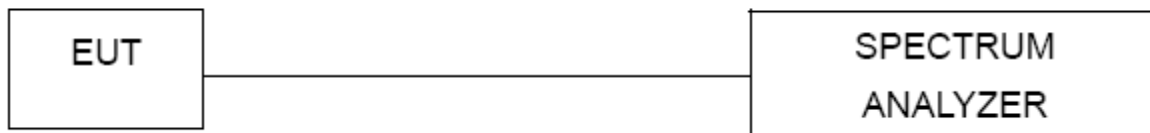6.4 TEST SETUP**6.5 EUT OPERATION CONDITIONS**


The EUT tested system was configured as the statements of 4.5 unless otherwise a special operating condition is specified in the follows during the testing.

6.6 TEST RESULTS

Hopping Mode_1Mbps		
Number of Hopping Frequency	Measurement result(CH)	Limit(CH)
	79	≥15

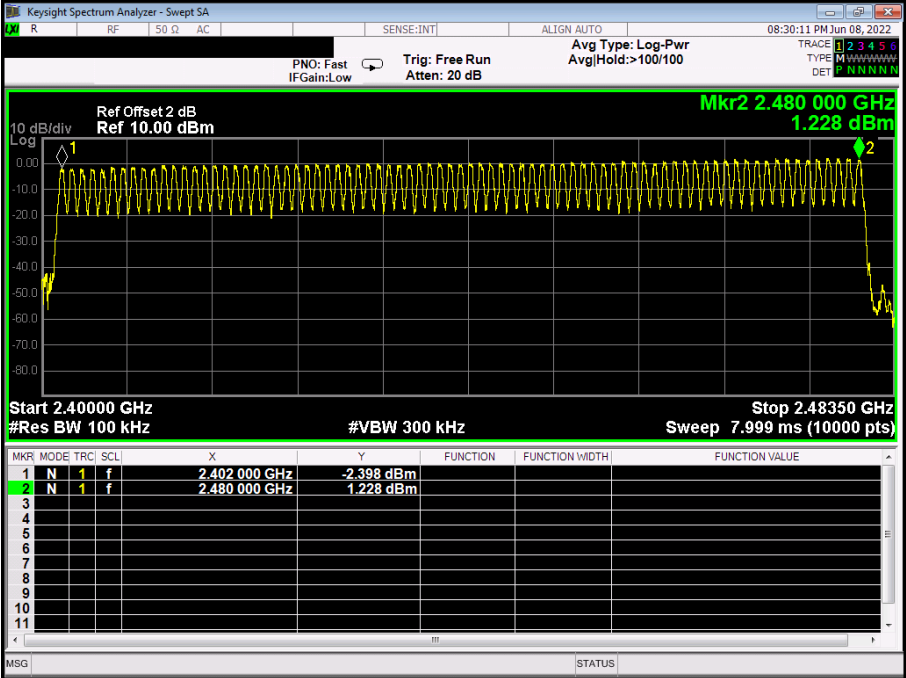

Hopping Mode_2Mbps		
Number of Hopping Frequency	Measurement result(CH)	Limit(CH)
	79	≥15

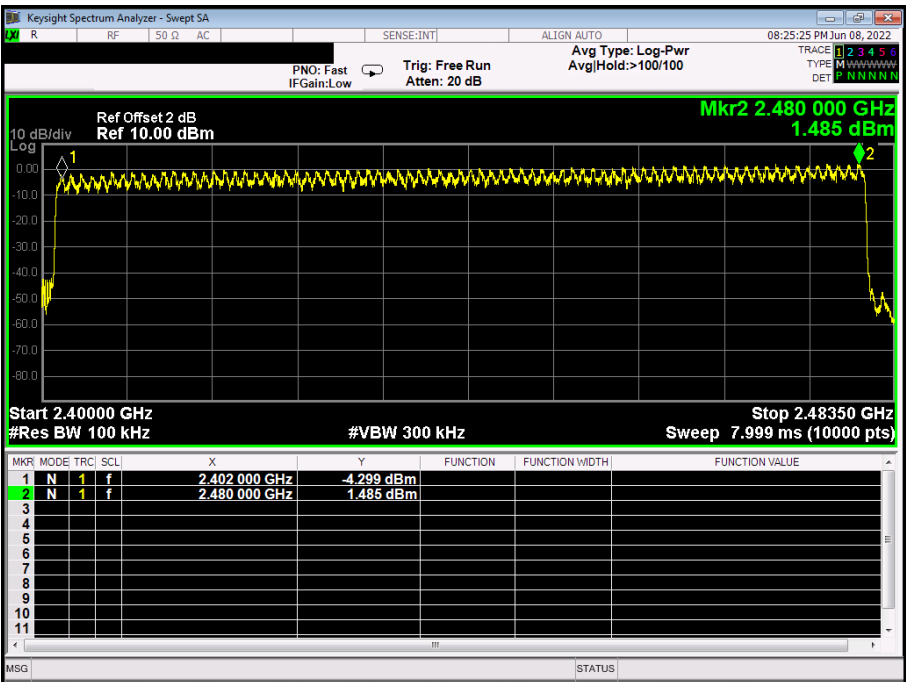

Keysight Spectrum Analyzer - Swept SA

08:28:10 PM Jun 08, 2022

REF: 50 Ω AC

SENSE: INT

ALIGN: AUTO

Avg Type: Log-Pwr

Avg/Hold: >100/100

PNO: Fast IF Gain: Low

Trig: Free Run

Atten: 20 dB

TRACE 1 2 3 4 5 6

TYPE M W W W W W

DET P N N N N N

Ref Offset 2 dB

Ref 10.00 dBm

10 dB/div

Log

Mkr2 2.480 000 GHz

1.587 dBm

Start 2.40000 GHz

Stop 2.48350 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 7.999 ms (10000 pts)

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	2.402 000 GHz	-2.521 dBm			
2	N	1	f	2.480 000 GHz	1.587 dBm			
3								
4								
5								
6								
7								
8								
9								
10								
11								

MSG

STATUS

7.AVERAGE TIME OF OCCUPANCY**7.1LIMIT**

FCC Part15, Subpart C (15.247)&RSS-247		
Section	Test Item	Limit
15.247(a)(1)(iii)	Average Time of Occupancy	0.4sec

7.2TEST PROCEDURE AND SETTING

- The transmitter output (antenna port) was connected to the spectrum analyzer
- Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz
- Use a video trigger with the trigger level set to enable triggering only on full pulses
- Sweep Time is more than once pulse time
- Set the center frequency on any frequency would be measure and set the frequency span to zero span
- Measure the maximum time duration of one single pulse
- Set the EUT for DH1, DH3 and DH5 packet transmitting
- Measure the maximum time duration of one single pulse
- DH1 Packet permit maximum $1600 / 79 / 2 = 10.12$ hops per second in each channel (1 time slot TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $10.12 \times 31.6 = 320$ within 31.6 seconds
- DH3 Packet permit maximum $1600 / 79 / 4 = 5.06$ hops per second in each channel (3 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $5.06 \times 31.6 = 160$ within 31.6 seconds
- DH5 Packet permit maximum $1600 / 79 / 6 = 3.37$ hops per second in each channel (5 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $3.37 \times 31.6 = 106.6$ within 31.6 seconds

7.3MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum analyzer	KEYSIGHT	N9010A	MY55150427	2023/05/26
2	Attenuator	Mini-Circuits	BW-S10W2	101109	N/A
3	RF Cable	Mi-cable	C10-01-01-1	100309	N/A

7.4TEST SETUP**7.5EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 4.5 unless otherwise a special operating condition is specified in the follows during the testing.

7.6 TEST RESULTS

TX Mode_1Mbps				
Mode	Channel Frequency (MHz)	Pulse Time (ms)	Dwell Time (ms)	Limit (ms)
DH1	2441	0.398	127.4	400
DH3	2441	1.660	265.6	400
DH5	2441	2.907	310.1	400


DH1



DH3



DH5

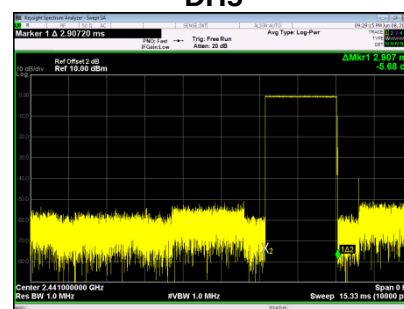


TX Mode_2Mbps				
Mode	Channel Frequency (MHz)	Pulse Time (ms)	Dwell Time (ms)	Limit (ms)
DH1	2441	0.404	129.3	400
DH3	2441	1.664	266.2	400
DH5	2441	2.913	310.7	400

DH1



DH3

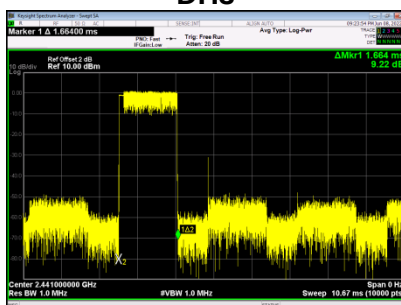


DH5



TX Mode_3Mbps				
Mode	Channel Frequency (MHz)	Pulse Time (ms)	Dwell Time (ms)	Limit (ms)
DH1	2441	0.404	129.3	400
DH3	2441	1.660	265.6	400
DH5	2441	2.907	310.1	400


2441MHzDH1

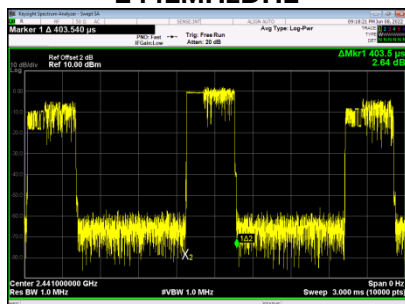

2441MHzDH3



2441MHzDH5

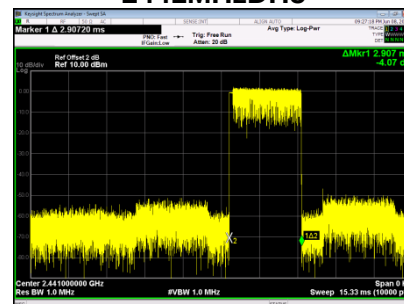

8 HOPPING CHANNEL SEPARATION MEASUREMENT

8.1 LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

8.2 TEST PROCEDURE AND SETTING

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Span = wide enough to capture the peaks of two adjacent channels
 Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span
 Video (or Average) Bandwidth (VBW) $\geq$ RBW
 Sweep = Auto
 Detector function = Peak
 Trace = Max Hold

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RBW	10 kHz
VBW	30 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

8.3 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum analyzer	KEYSIGHT	N9010A	MY55150427	2023/05/26
2	Attenuator	Mini-Circuits	BW-S10W2	101109	N/A
3	RF Cable	Mi-cable	C10-01-01-1	100309	N/A

8.4 TEST SETUP




8.5 EUT OPERATION CONDITIONS



The EUT tested system was configured as the statements of 4.5 unless otherwise a special operating condition is specified in the follows during the testing.

8.6 TEST RESULTS

TX Mode_1Mbps				
Channel	Frequency (MHz)	Channel Separation(MHz)	Limit (MHz)	Result
CH00	2402	1.0066	>(25KHz or 2/3*20dB Bandwidth)	PASS
CH39	2441	1.0003	>(25KHz or 2/3*20dB Bandwidth)	PASS
CH78	2480	1.0048	>(25KHz or 2/3*20dB Bandwidth)	PASS

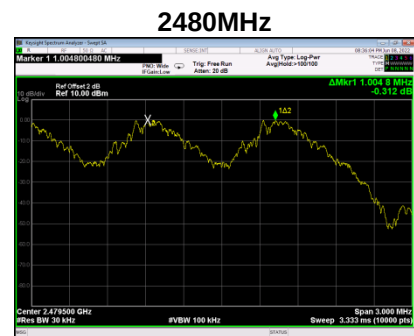

TX Mode_2Mbps				
Channel	Frequency (MHz)	Channel Separation(MHz)	Limit (MHz)	Result
CH00	2402	0.9862	>(25KHz or 2/3*20dB Bandwidth)	PASS
CH39	2441	1.0036	>(25KHz or 2/3*20dB Bandwidth)	PASS
CH78	2480	0.9949	>(25KHz or 2/3*20dB Bandwidth)	PASS

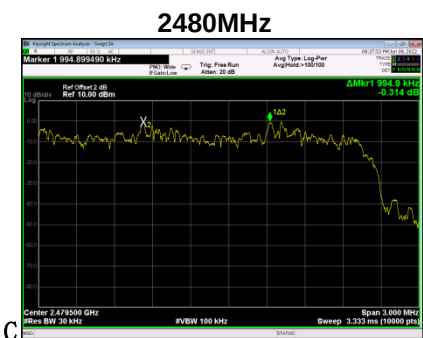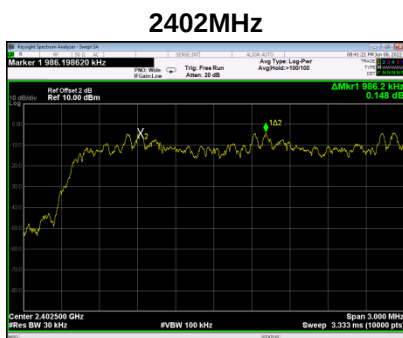


TX Mode_3Mbps				
Channel	Frequency (MHz)	Channel Separation(MHz)	Limit (MHz)	Result
CH00	2402	0.9943	>(25KHz or 2/3*20dB Bandwidth)	PASS
CH39	2441	1.0018	>(25KHz or 2/3*20dB Bandwidth)	PASS
CH78	2480	0.9976	>(25KHz or 2/3*20dB Bandwidth)	PASS


2402MHz



2441MHz

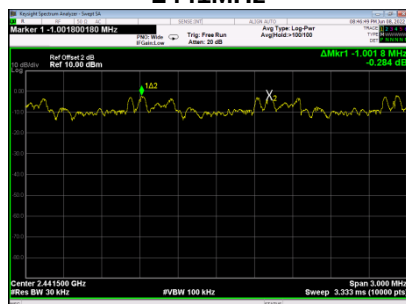

2480MHz

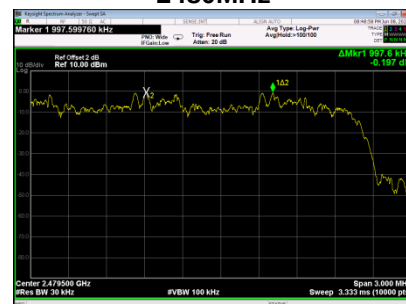

9BANDWIDTH TEST**9.1LIMIT**

FCC Part15, Subpart C (15.247)&RSS-247	
Section	Test Item
15.247(a)(1)	Bandwidth

9.2TEST PROCEDURE AND SETTING

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting: RBW= 30 kHz, VBW=100 kHz, Sweep Time = Auto.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth
RBW	30kHz
VBW	100kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

9.3MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum analyzer	KEYSIGHT	N9010A	MY55150427	2023/05/26
2	Attenuator	Mini-Circuits	BW-S10W2	101109	N/A
3	RF Cable	Mi-cable	C10-01-01-1	100309	N/A


9.4TEST SETUP**9.5EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 4.5 unless otherwise a special operating condition is specified in the follows during the testing.


9.6 TEST RESULTS

TX Mode_1Mbps				
Channel	Frequency (MHz)	20dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)	Result
CH00	2402	0.8863	0.8461	PASS
CH39	2441	0.9261	0.8500	PASS
CH78	2480	0.9192	0.8434	PASS


2402MHz

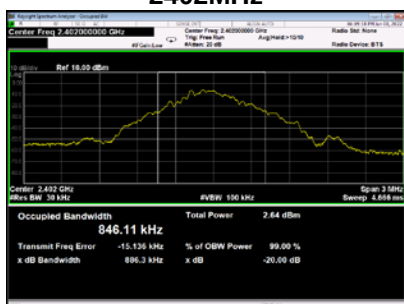

2441MHz

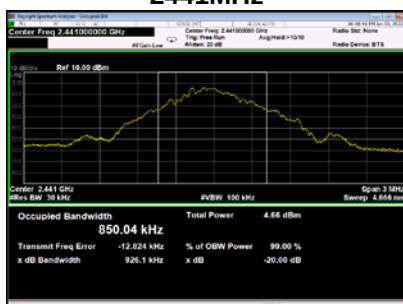


2480MHz

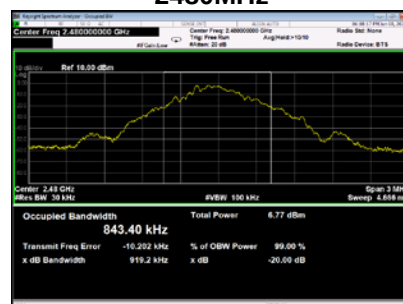


TX Mode_2Mbps				
Channel	Frequency (MHz)	20dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)	Result
CH00	2402	1.268	1.1699	PASS
CH39	2441	1.267	1.1702	PASS
CH78	2480	1.268	1.1696	PASS


2402MHz

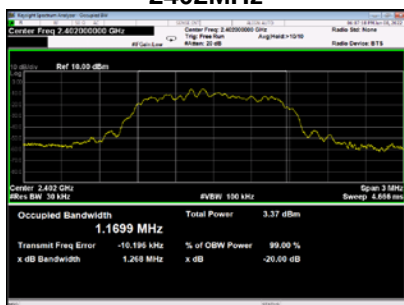

2441MHz

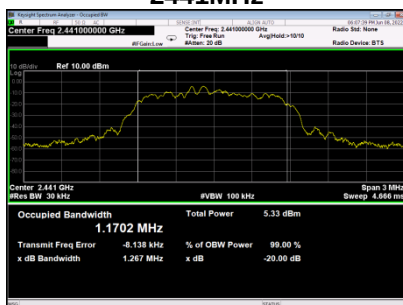


2480MHz

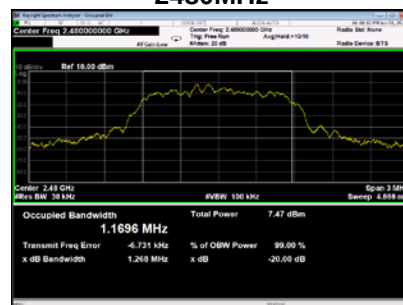


TX Mode_3Mbps				
Channel	Frequency (MHz)	20dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)	Result
CH00	2402	1.237	1.1597	PASS
CH39	2441	1.239	1.1604	PASS
CH78	2480	1.239	1.1610	PASS


2402MHz

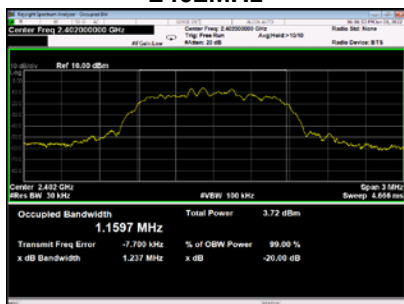

2441MHz

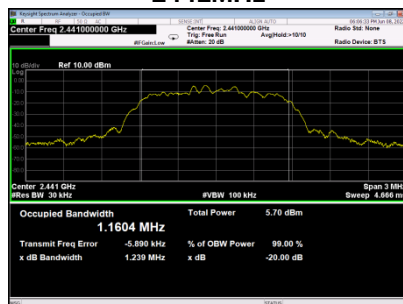

2480MHz

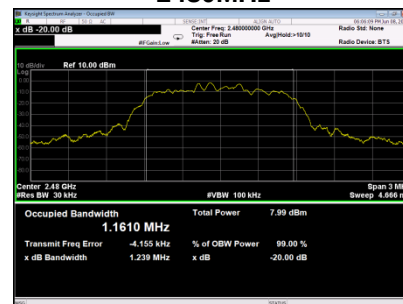

10 MAXIMUM OUTPUT POWER**10.1 LIMIT**

FCC Part15 , Subpart C (15.247)&RSS-247		
Section	Test Item	Limit
15.247(a)(1)	Maximum Output Power	0.125Watt or 21dBm

Note:


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

10.2 TEST PROCEDURE AND SETTING

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW= 1MHz/3MHz, VBW= 1MHz/3MHz, Sweep time = Auto.

10.3 MEASUREMENT INSTRUMENTS LIST


Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum analyzer	KEYSIGHT	N9010A	MY55150427	2023/05/26
2	Attenuator	Mini-Circuits	BW-S10W2	101109	N/A
3	RF Cable	Mi-cable	C10-01-01-1	100309	N/A

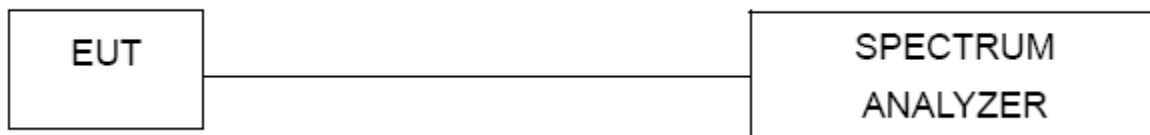10.4 TEST SETUP**10.5 EUT OPERATION CONDITIONS**




The EUT tested system was configured as the statements of 4.5 unless otherwise a special operating condition is specified in the follows during the testing.

10.6 TEST RESULTS

TX Mode_1Mbps				
Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Result
CH00	2402	-3.448	0.000452	PASS
CH39	2441	-1.310	0.000740	PASS
CH78	2480	0.982	0.001254	PASS
Limit	21dBm /0.125W			

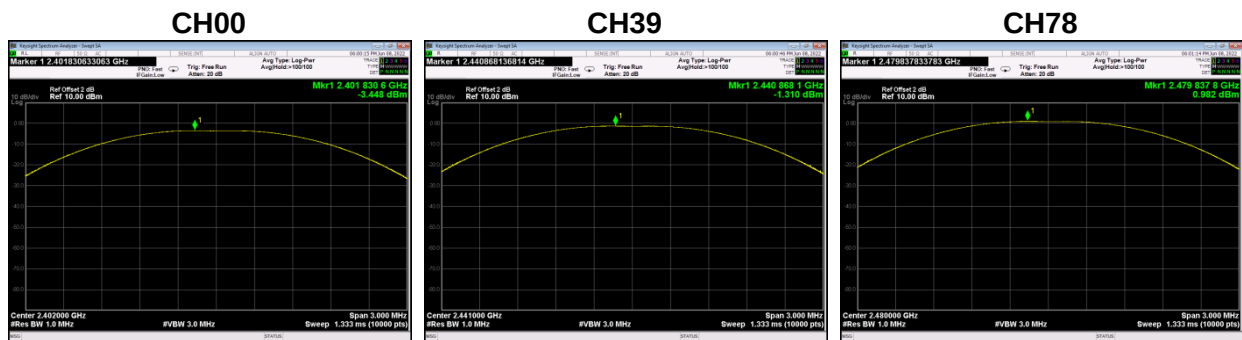


TX Mode_2Mbps				
Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Result
CH00	2402	-0.950	0.000804	PASS
CH39	2441	1.035	0.001269	PASS
CH78	2480	3.481	0.002229	PASS
Limit	21dBm /0.125W			

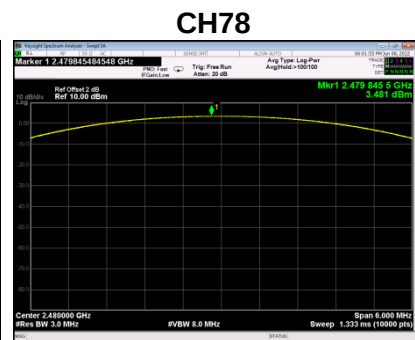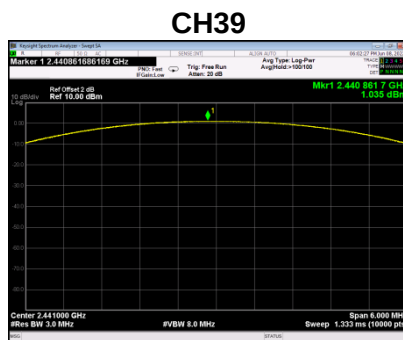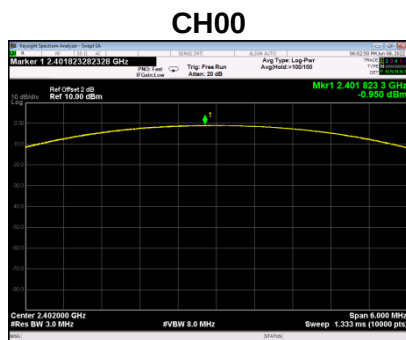


TX Mode_3Mbps				
Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Result
CH00	2402	-0.296	0.000934	PASS
CH39	2441	1.753	0.001497	PASS
CH78	2480	3.987	0.002504	PASS
Limit	21dBm /0.125W			


CH00

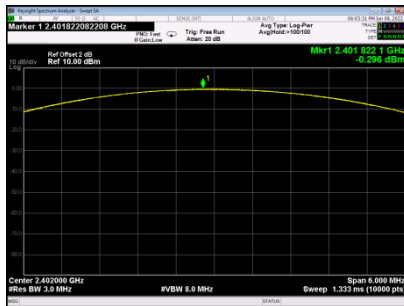

CH39

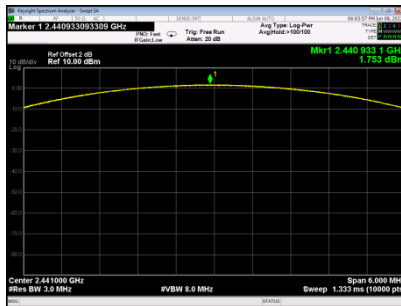

CH78

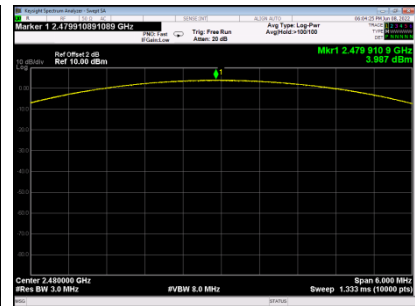

11 CONDUCTED SPURIOUS EMISSION

11.1 LIMIT

For FCC

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required.


11.2 TEST PROCEDURE AND SETTING

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting: RBW= 100 kHz, VBW=300 kHz, Sweep time = Auto.

11.3 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum analyzer	KEYSIGHT	N9010A	MY55150427	2023/05/26
2	Attenuator	Mini-Circuits	BW-S10W2	101109	N/A
3	RF Cable	Mi-cable	C10-01-01-1	100309	N/A

11.4 TEST SETUP

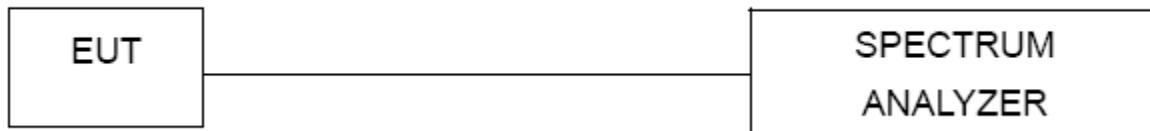


11.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.5 unless otherwise a special operating condition is specified in the follows during the testing.


11.6 TEST RESULTS

TX Mode_1Mbps


Bandedge- CH00 (Lower)

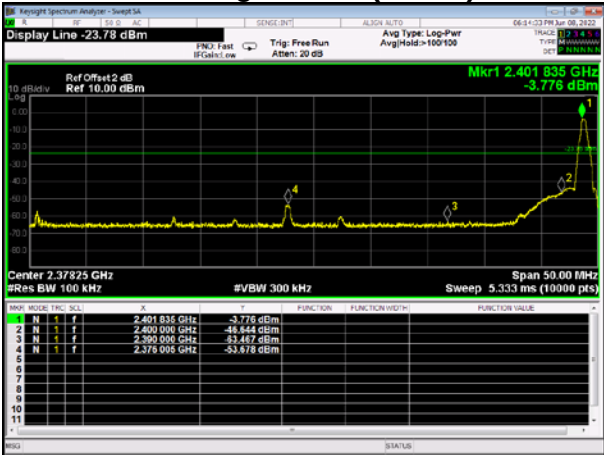


Bandedge CH78 (Upper)

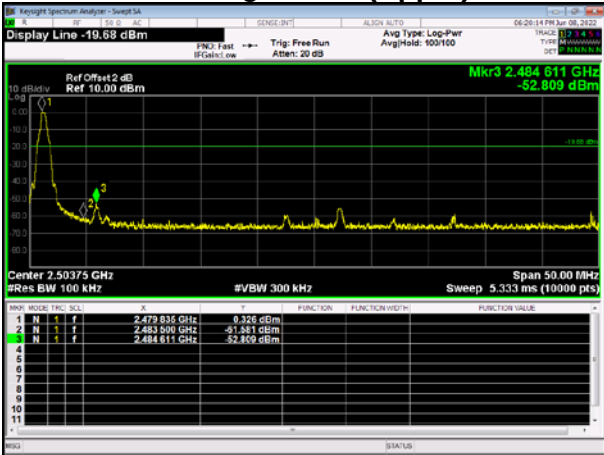

Bandedge- Hopping on (Lower)

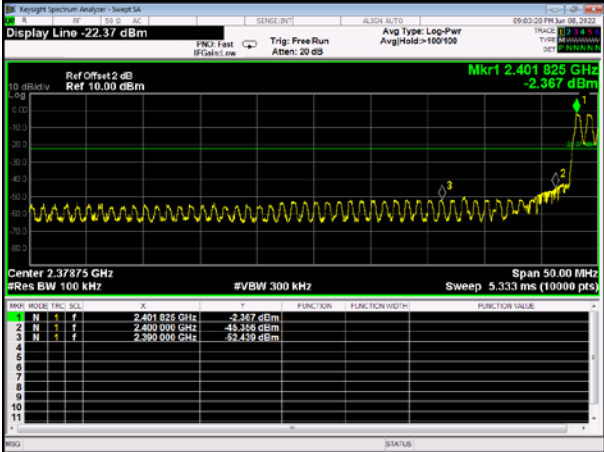


Bandedge Hopping on (Upper)

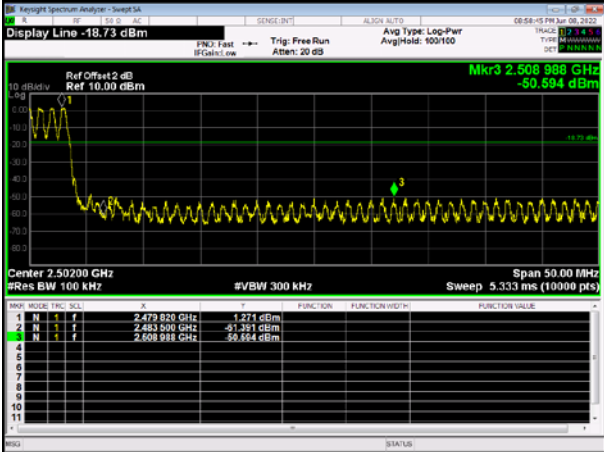


10th Harmonic of the fundamental frequency


CH00

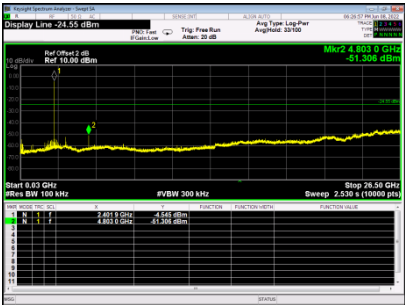

CH39

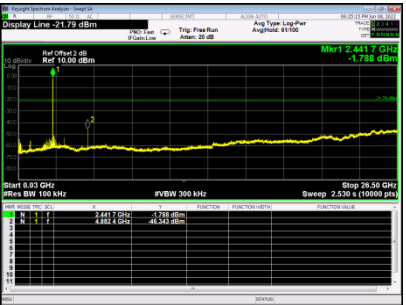


CH78

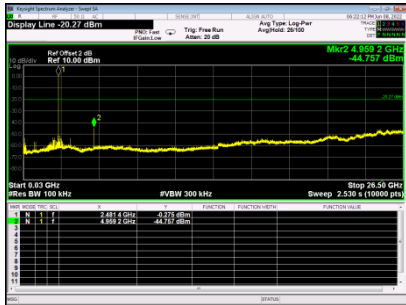


TX Mode_2Mbps


Bandedge- CH00 (Lower)

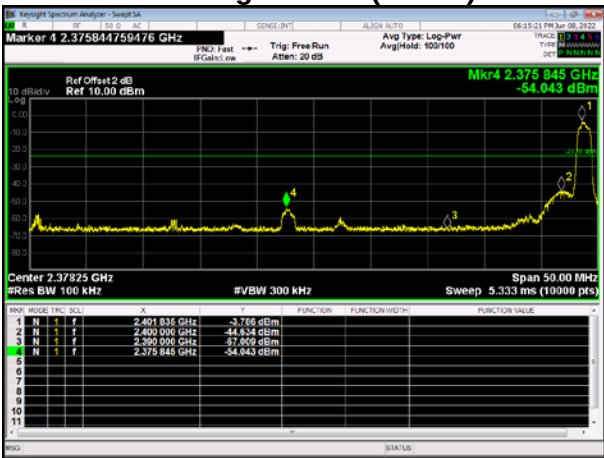


Bandedge CH78 (Upper)

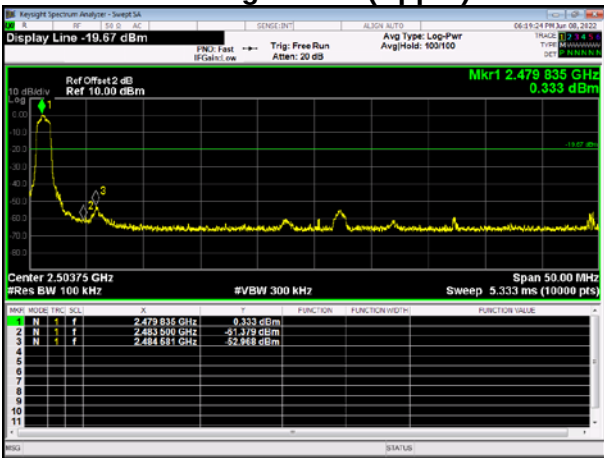

Bandedge- Hopping on (Lower)

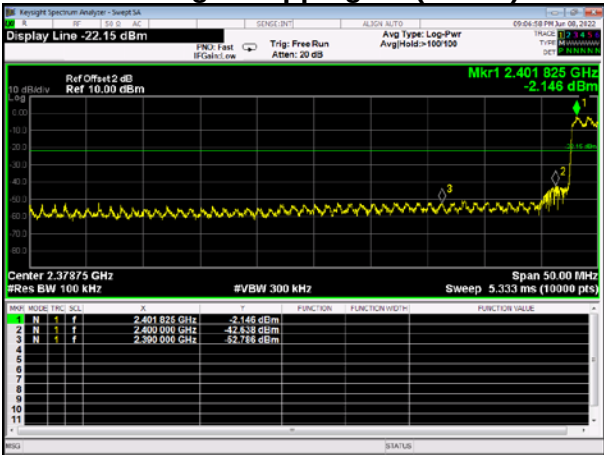


Bandedge Hopping on (Upper)

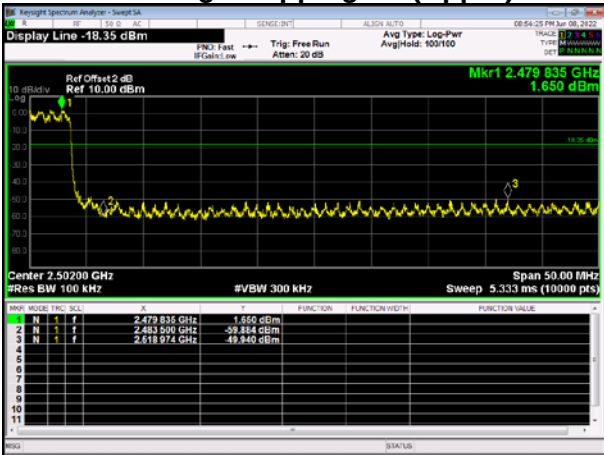


10th Harmonic of the fundamental frequency


CH00

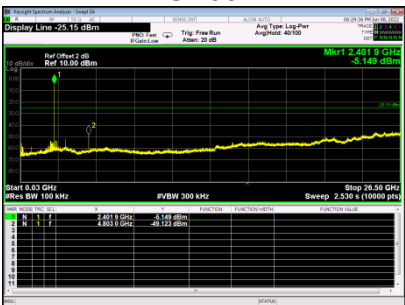

CH39

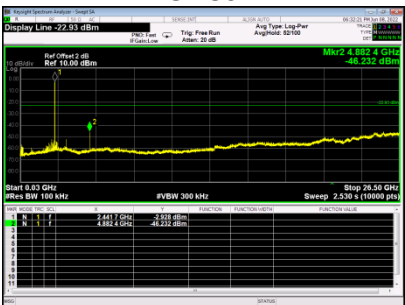


CH78

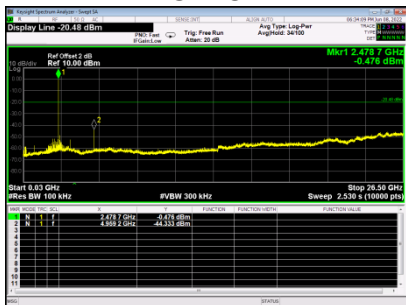


TX Mode_3Mbps


Bandedge- CH00 (Lower)

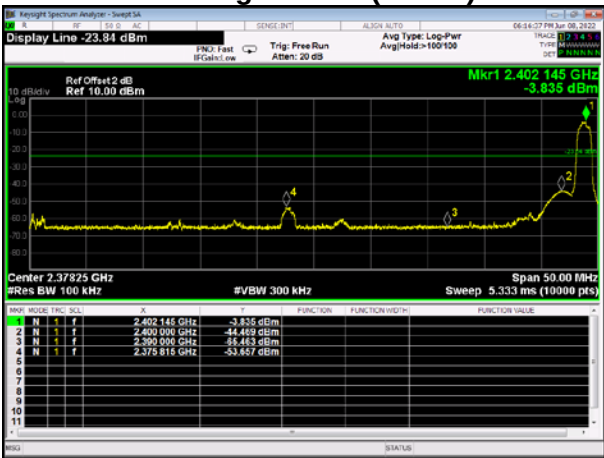


Bandedge CH78 (Upper)

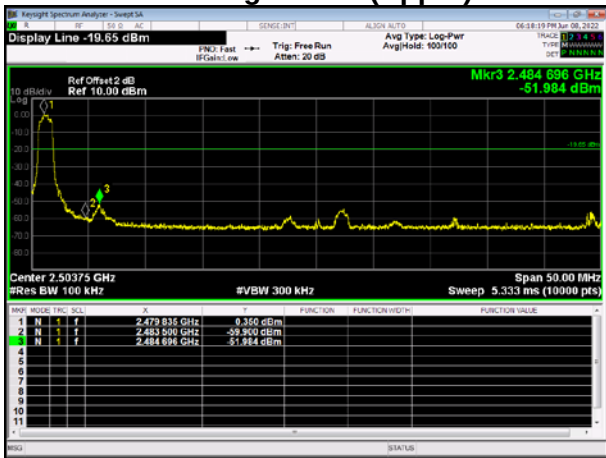


Bandedge- Hopping on (Lower)

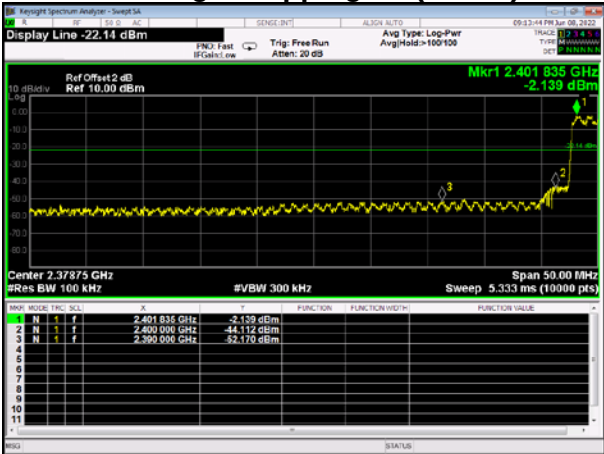


Bandedge- Hopping on (Upper)

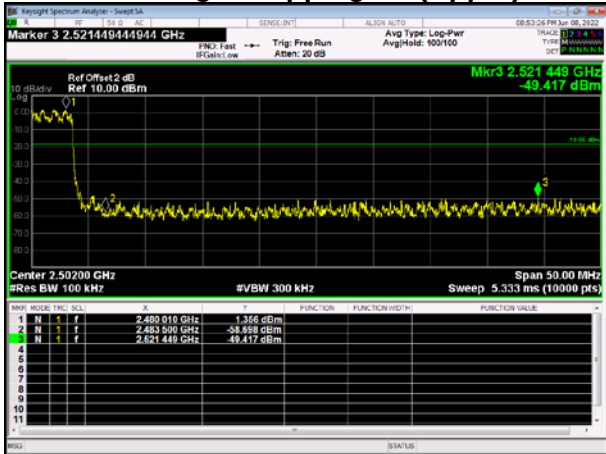


10th Harmonic of the fundamental frequency
CH00

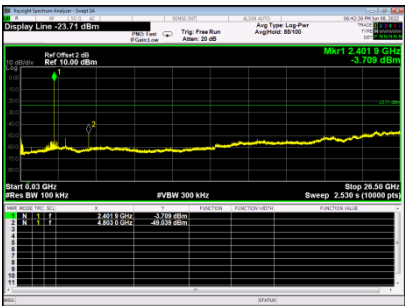

CH39

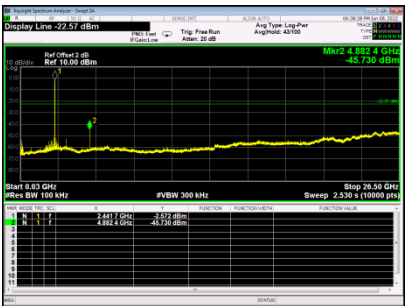

CH78

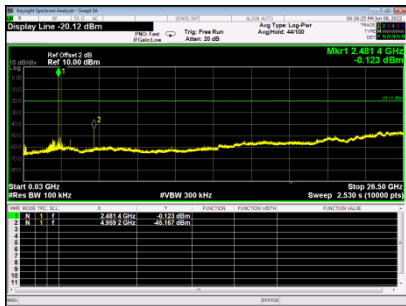

END OF TEST REPORT