

TEST REPORT

Product Name : Tablet pc
Brand Mark : tibuta
Model No. : E100
Extension Model : E101, E102, E103
FCC ID : 2AXUI-E100
Report Number : BLA-EMC-202106-A2603
Date of Sample Receipt : 2021/6/8
Date of Test : 2021/6/8 to 2021/7/16
Date of Issue : 2021/7/16
Test Standard : 47 CFR Part 15, Subpart E 15.407
Test Result : Pass

Prepared for:

CHITECH SHENZHEN TECHNOLOGY CO.,LTD
Chitech industrial Park, NO.48, Xiashijia Road, Gongming Town,
Guangming New Dist., Shenzhen, China

Prepared by:

BlueAsia of Technical Services(Shenzhen) Co.,Ltd.
Building C, No. 107, Shihuan Road, Shiyuan Sub-District, Baoan District,
Shenzhen, Guangdong Province, China
TEL: +86-755-23059481

Compiled by:

Jozu.

Review by:

Sueels

Approved by:

Jmen li

Date:

2021/7/16



REPORT REVISE RECORD

Version No.	Date	Description
00	2021/7/16	Original

BlueAsia

TABLE OF CONTENTS

1	TEST SUMMARY	5
2	GENERAL INFORMATION	6
3	GENERAL DESCRIPTION OF E.U.T.	6
4	TEST ENVIRONMENT	7
5	TEST MODE	7
6	MEASUREMENT UNCERTAINTY	7
7	DESCRIPTION OF SUPPORT UNIT.....	8
8	LABORATORY LOCATION.....	8
9	TEST INSTRUMENTS LIST	9
1	26DB EMISSION BANDWIDTH.....	13
1.1	BLOCK DIAGRAM OF TEST SETUP	13
1.2	TEST DATA	13
2	DUTY CYCLE	14
2.1	BLOCK DIAGRAM OF TEST SETUP	14
2.2	TEST DATA	14
3	CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ).....	15
3.1	LIMITS	15
3.2	BLOCK DIAGRAM OF TEST SETUP	15
3.3	PROCEDURE	15
3.4	TEST DATA	17
4	FREQUENCY STABILITY	19
4.1	LIMITS	19
4.2	BLOCK DIAGRAM OF TEST SETUP	19
4.3	TEST DATA	19
5	RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS.....	20
5.1	LIMITS	20
5.2	BLOCK DIAGRAM OF TEST SETUP	21
5.3	PROCEDURE	21
5.4	TEST DATA	23

6	RADIATED SPURIOUS EMISSIONS AND BAND-EDGE	31
6.1	LIMITS	31
6.2	BLOCK DIAGRAM OF TEST SETUP	32
6.3	PROCEDURE	32
6.4	TEST DATA	34
7	PEAK POWER SPECTRUM DENSITY	56
7.1	LIMITS	56
7.2	BLOCK DIAGRAM OF TEST SETUP	56
7.3	TEST DATA	57
8	MAXIMUM CONDUCTED OUTPUT POWER	58
8.1	LIMITS	58
8.2	BLOCK DIAGRAM OF TEST SETUP	58
8.3	TEST DATA	59
9	ANTENNA REQUIREMENT	60
9.1	CONCLUSION	60
10	APPENDIX	61
10.1	MAXIMUM CONDUCTED OUTPUT POWER	61
10.2	-26DB BANDWIDTH	69
10.3	OCCUPIED CHANNEL BANDWIDTH	77
10.4	MAXIMUM POWER SPECTRAL DENSITY LEVEL	85
10.5	BAND EDGE	93
10.6	FREQUENCY STABILITY	99
10.7	CONDUCTED RF SPURIOUS EMISSION	107
	APPENDIX A: PHOTOGRAPHS OF TEST SETUP	115
	APPENDIX B: PHOTOGRAPHS OF EUT	118

1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
26dB Emission bandwidth	47 CFR Part 15, Subpart E 15.407	KDB 789033 D02 II C 1	47 CFR Part 15, Subpart C 15.407 (a)	Pass
Duty Cycle	47 CFR Part 15, Subpart E 15.407	KDB 789033 II B 1	KDB 789033 D02 II B 1	Pass
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart E 15.407	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207 & 15.407 b(6)	Pass
Frequency Stability	47 CFR Part 15, Subpart E 15.407	ANSI C63.10 (2013) Section 6.8	47 CFR Part 15, Subpart C 15.407 (g)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart E 15.407	KDB 789033 D02 II G	47 CFR Part 15, Subpart C 15.209 & 15.407(b)	Pass
Radiated Spurious emissions and Band-edge	47 CFR Part 15, Subpart E 15.407	KDB 789033 D02 II G	47 CFR Part 15, Subpart C 15.209 & 15.407(b)	Pass
Peak Power spectrum density	47 CFR Part 15, Subpart E 15.407	KDB 789033 D02 II F	47 CFR Part 15, Subpart C 15.407 (a)	Pass
Maximum Conducted output power	47 CFR Part 15, Subpart E 15.407	KDB 789033 D02 II E	47 CFR Part 15, Subpart C 15.407 (a)	Pass
Antenna Requirement	47 CFR Part 15, Subpart E 15.407	N/A	47 CFR Part 15, Subpart C 15.203	Pass

2 GENERAL INFORMATION

Applicant	CHITECH SHENZHEN TECHNOLOGY CO.,LTD
Address	Chitech industrial Park,NO.48,Xiashijia Road,Gongming Town,Guangming New Dist.,Shenzhen,China
Manufacturer	CHITECH SHENZHEN TECHNOLOGY CO.,LTD
Address	Chitech industrial Park,NO.48,Xiashijia Road,Gongming Town,Guangming New Dist.,Shenzhen,China
Factory	CHITECH SHENZHEN TECHNOLOGY CO.,LTD
Address	Chitech industrial Park,NO.48,Xiashijia Road,Gongming Town,Guangming New Dist.,Shenzhen,China
Product Name	Tablet pc
Test Model No.	Tibuta_MasterPad_E100

3 GENERAL DESCRIPTION OF E.U.T.

Hardware Version	863A_MB_V5.1
Software Version	Tibuta_MasterPad-E100_20210717
Operation Frequency:	Band 1 : 5180MHz-5240MHz
Operation mode:	Indoor used
Channel numbers:	Band 1: 802.11a/802.11n(HT20)/802.11ac(HT20): 4, 802.11n(HT40)/802.11ac(HT40):2, 802.11ac(HT80): 1 Band 4: 802.11a/802.11(HT20)/802.11ac(HT20): 5, 802.11n(HT40)/802.11ac(HT40): 2, 802.11ac(HT80): 1
Channel separation:	802.11a/n/ac(HT2): 20MHz, 802.11n/ac(HT40): 40MHz, 802.11ac(HT80): 80MHz
Modulation technology: (IEEE 802.11a/n/ac)	BPSK, QPSK,16-QAM, 64-QAM, 256-QAM
Data speed(IEEE 802.11a)	6Mbps, 9Mbps,12Mbps,18Mbps, 24Mbps,36Mbps,48Mbps, 54Mbps
Data speed (IEEE 802.11n/ac):	Up to 433Mbps
Antenna Type:	Internal Antenna
Antenna Gain:	1.57dBi
Power supply:	Rechargeable Li-ion Battery DC3.7V-6000mAh
AC adapter:	Model: JK050200-S86USU Input: AC100~240V, 50/60Hz 0.5A Output: DC 5.0V=2000Ma, 10.0W

4 TEST ENVIRONMENT

Environment	Temperature	Voltage
Normal	+25°C	3.7Vdc

5 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
TX	Keep the EUT in transmitting mode with modulation(Duty cycle \geq 98%)
Remark:Only the data of the worst mode would be recorded in this report.	

6 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Radiated Emission(9kHz-30MHz)	\pm 4.34dB
Radiated Emission(30Mz-1000MHz)	\pm 4.24dB
Radiated Emission(1GHz-18GHz)	\pm 4.68dB
AC Power Line Conducted Emission(150kHz-30MHz)	\pm 3.45dB

7 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
N/A	N/A	N/A	N/A	N/A

8 LABORATORY LOCATION

All tests were performed at:
BlueAsia of Technical Services(Shenzhen) Co., Ltd.
Building C, No. 107, Shihuan Road, Shiyuan Sub-District, Baoan District, Shenzhen, Guangdong Province,
China
Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673
No tests were sub-contracted.

9 TEST INSTRUMENTS LIST

Test Equipment Of 26dB Emission bandwidth					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Duty Cycle					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Shield room	SKET	833	N/A	2020/11/25	2023/11/24
Receiver	R&S	ESPI3	101082	2020/10/12	2021/10/11
LISN	R&S	ENV216	3560.6550.15	2020/10/12	2021/10/11
LISN	AT	AT166-2	AKK1806000003	2020/10/12	2021/10/11
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A

Test Equipment Of Frequency Stability					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due

Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Radiated Emissions which fall in the restricted bands

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	2020/11/10	2023/11/9
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Receiver	R&S	ESR7	101199	2020/10/12	2021/10/11
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2020/9/26	2022/9/25
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	2020/9/26	2022/9/25
Amplifier	SKET	PA-000318G-45	N/A	2020/10/16	2021/10/15
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2020/9/26	2022/9/25
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

Test Equipment Of Radiated Spurious emissions and Band-edge

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	2020/11/10	2023/11/9

Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Receiver	R&S	ESR7	101199	2020/10/12	2021/10/11
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2020/9/26	2022/9/25
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	2020/9/26	2022/9/25
Amplifier	SKET	PA-000318G-45	N/A	2020/10/16	2021/10/15
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2020/9/26	2022/9/25
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

Test Equipment Of Peak Power spectrum density

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Maximum Conducted output power

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11


Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11
------------------	---------	--------	------------	------------	------------

BlueAsia

1 26DB EMISSION BANDWIDTH

Test Standard	47 CFR Part 15, Subpart E 15.407
Test Method	KDB 789033 D02 II C 1
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

1.1 BLOCK DIAGRAM OF TEST SETUP

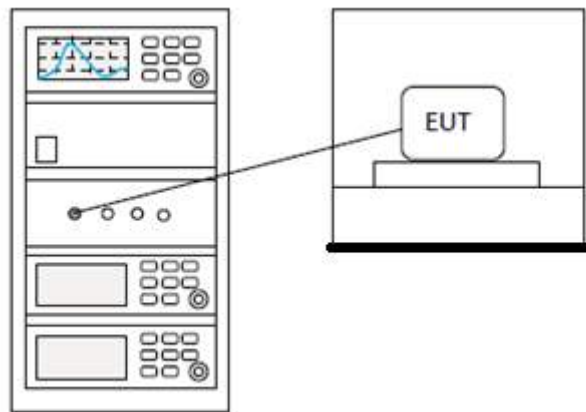


1.2 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

2 DUTY CYCLE

Test Standard	47 CFR Part 15, Subpart E 15.407
Test Method	KDB 789033 II B 1
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

2.1 BLOCK DIAGRAM OF TEST SETUP

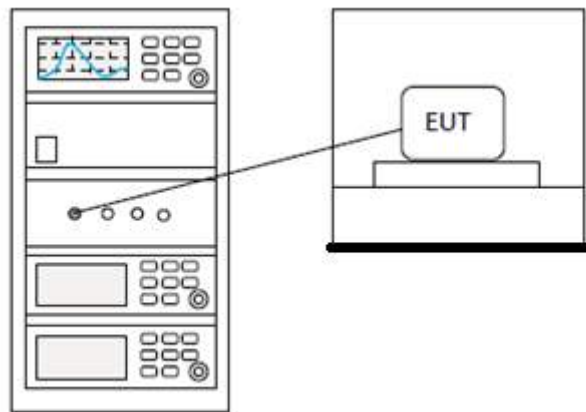

2.2 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

3 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)


Test Standard	47 CFR Part 15, Subpart E 15.407
Test Method	ANSI C63.10 (2013) Section 6.2
Test Mode (Pre-Scan)	5G wifi TX
Test Mode (Final Test)	5G wifi TX
Tester	Jozu
Temperature	25°C
Humidity	60%

3.1 LIMITS

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.2 BLOCK DIAGRAM OF TEST SETUP

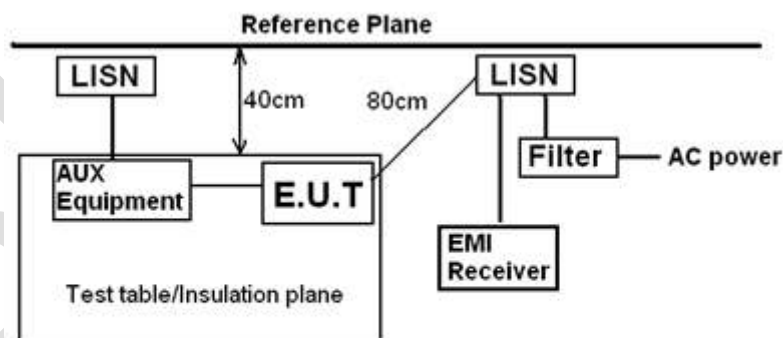

Remark:
 E.U.T: Equipment Under Test
 LISN: Line Impedance Stabilization Network
 Test table height=0.8m

3.3 PROCEDURE


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.

- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
 - 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
 - 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
- Remark: LISN=Read Level+ Cable Loss+ LISN Factor

BlueAsia

3.4 TEST DATA

[TestMode: 5G wifi TX]; [Line: Line]

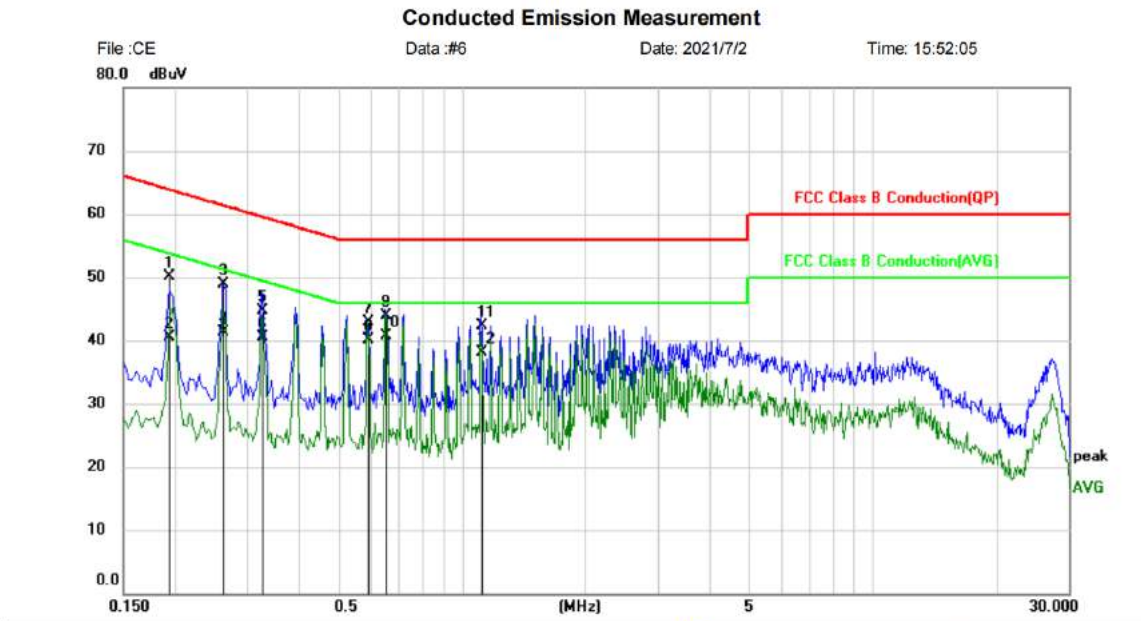

File :CE Data :#6 Date: 2021/7/2 Time: 15:52:05

Site Phase: **L1** Temperature:

Limit: FCC Class B Conduction(QP) Power: Humidity: %

EUT: Tablet pc

M/N: 5g wifi

Mode: Tibuta_MasterPad_E100

Note:


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1940	40.19	9.83	50.02	63.86	-13.84	QP	
2		0.1940	30.61	9.83	40.44	53.86	-13.42	AVG	
3		0.2620	39.12	9.84	48.96	61.37	-12.41	QP	
4		0.2620	31.56	9.84	41.40	51.37	-9.97	AVG	
5		0.3260	34.84	9.85	44.69	59.55	-14.86	QP	
6		0.3260	30.57	9.85	40.42	49.55	-9.13	AVG	
7		0.5899	32.94	9.87	42.81	56.00	-13.19	QP	
8		0.5899	30.28	9.87	40.15	46.00	-5.85	AVG	
9		0.6540	33.98	9.88	43.86	56.00	-12.14	QP	
10	*	0.6540	30.88	9.88	40.76	46.00	-5.24	AVG	
11		1.1140	32.38	9.92	42.30	56.00	-13.70	QP	
12		1.1140	28.19	9.92	38.11	46.00	-7.89	AVG	

*:Maximum data x:Over limit !:over margin <Reference Only

Test Result: Pass

[TestMode: 5G wifi TX]; [Line: Neutral]

Conducted Emission Measurement

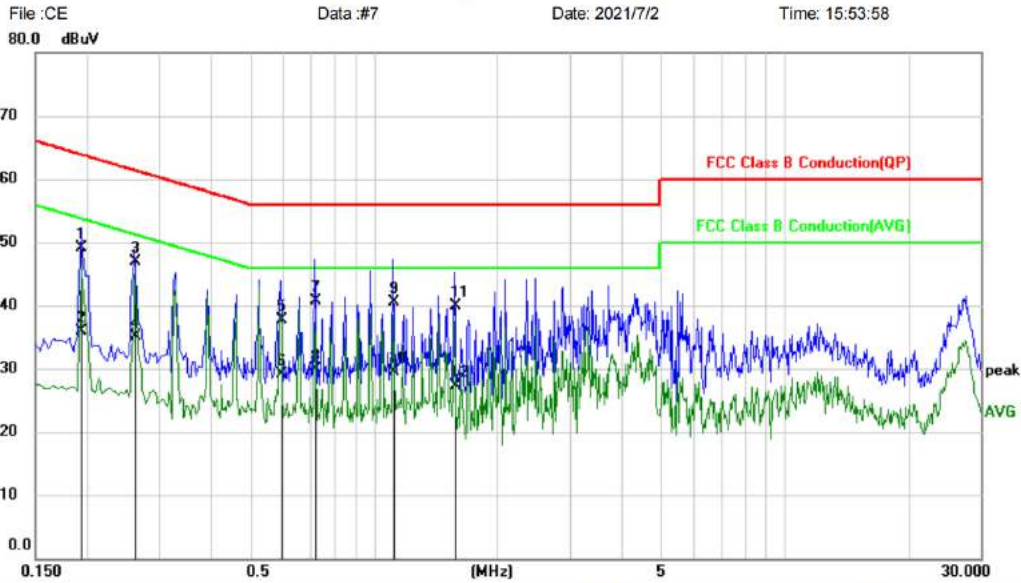

File :CE Data :#7 Date: 2021/7/2 Time: 15:53:58
80.0 dBuV

Site: Phase: **N** Temperature: Humidity: %
Limit: FCC Class B Conduction(QP) Power: EUT: Tablet pc
M/N: 5g wifi Mode: Tibuta_MasterPad_E100
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1940	39.32	9.75	49.07	63.86	-14.79	QP	
2		0.1940	26.09	9.75	35.84	53.86	-18.02	AVG	
3	*	0.2620	37.21	9.76	46.97	61.37	-14.40	QP	
4		0.2620	25.35	9.76	35.11	51.37	-16.26	AVG	
5		0.5940	27.91	9.80	37.71	56.00	-18.29	QP	
6		0.5940	19.28	9.80	29.08	46.00	-16.92	AVG	
7		0.7180	30.83	9.82	40.65	56.00	-15.35	QP	
8		0.7180	20.02	9.82	29.84	46.00	-16.16	AVG	
9		1.1140	30.61	9.84	40.45	56.00	-15.55	QP	
10		1.1140	19.75	9.84	29.59	46.00	-16.41	AVG	
11		1.5700	29.96	9.85	39.81	56.00	-16.19	QP	
12		1.5700	17.40	9.85	27.25	46.00	-18.75	AVG	

*:Maximum data x:Over limit !:over margin (Reference Only)

Test Result: Pass


4 FREQUENCY STABILITY

Test Standard	47 CFR Part 15, Subpart E 15.407
Test Method	ANSI C63.10 (2013) Section 6.8
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

4.1 LIMITS

Limit:	The frequency tolerance shall be maintained within the band of operation frequency over a temperature variation of 0 degrees to 35 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.
---------------	---

4.2 BLOCK DIAGRAM OF TEST SETUP

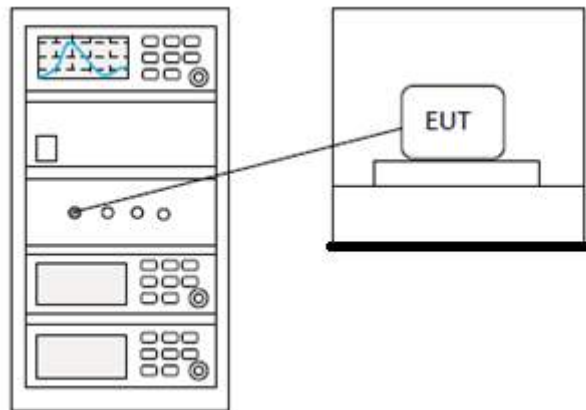

4.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

5 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS


Test Standard	47 CFR Part 15, Subpart E 15.407
Test Method	KDB 789033 D02 II G
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

5.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

5.2 BLOCK DIAGRAM OF TEST SETUP

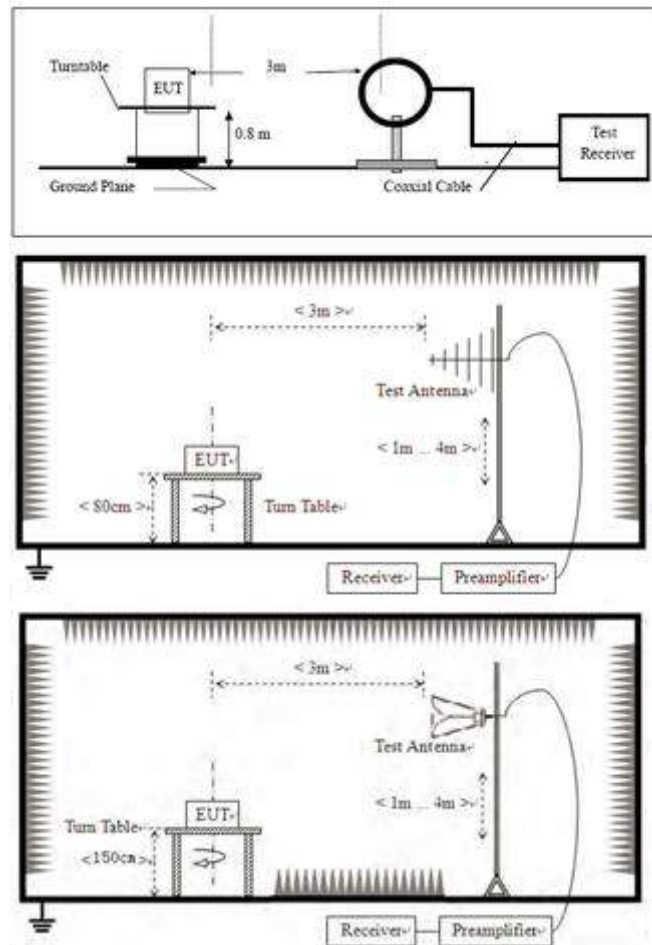

5.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
 - i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
 - j. Repeat above procedures until all frequencies measured was complete.
- Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor


BlueAsia

5.4 TEST DATA

Remark: During the test, pre-scan the 802.11a/n/ac mode, and found the 802.11a mode which it is worse case.

802.11a:

[TestMode: TX A low channel]; [Polarity: Horizontal]

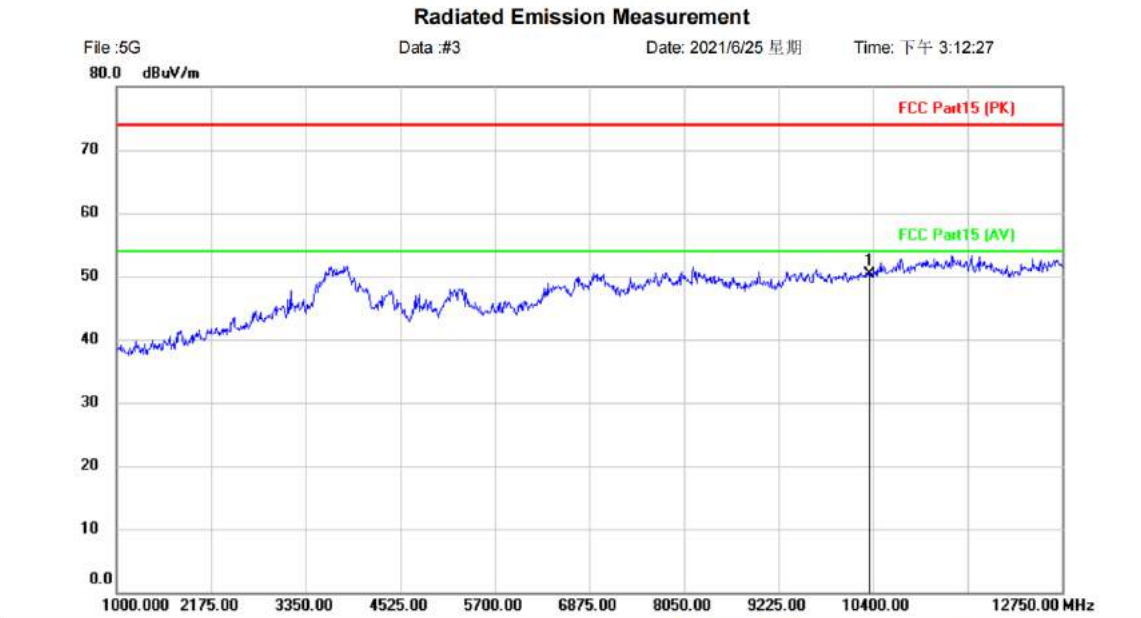

File :5G Data :#3 Date: 2021/6/25 星期 Time: 下午 3:12:27

Site Polarization: **Horizontal** Temperature:
Limit: FCC Part15 (PK) Power: Humidity: %
EUT: Tablet pc Distance:
M/N: Tibuta_MasterPad_E100
Mode: 5G-A-L
Note:


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10360.000	39.18	11.09	50.27	74.00	-23.73	peak		

*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[TestMode: TX A low channel]; [Polarity: Vertical]

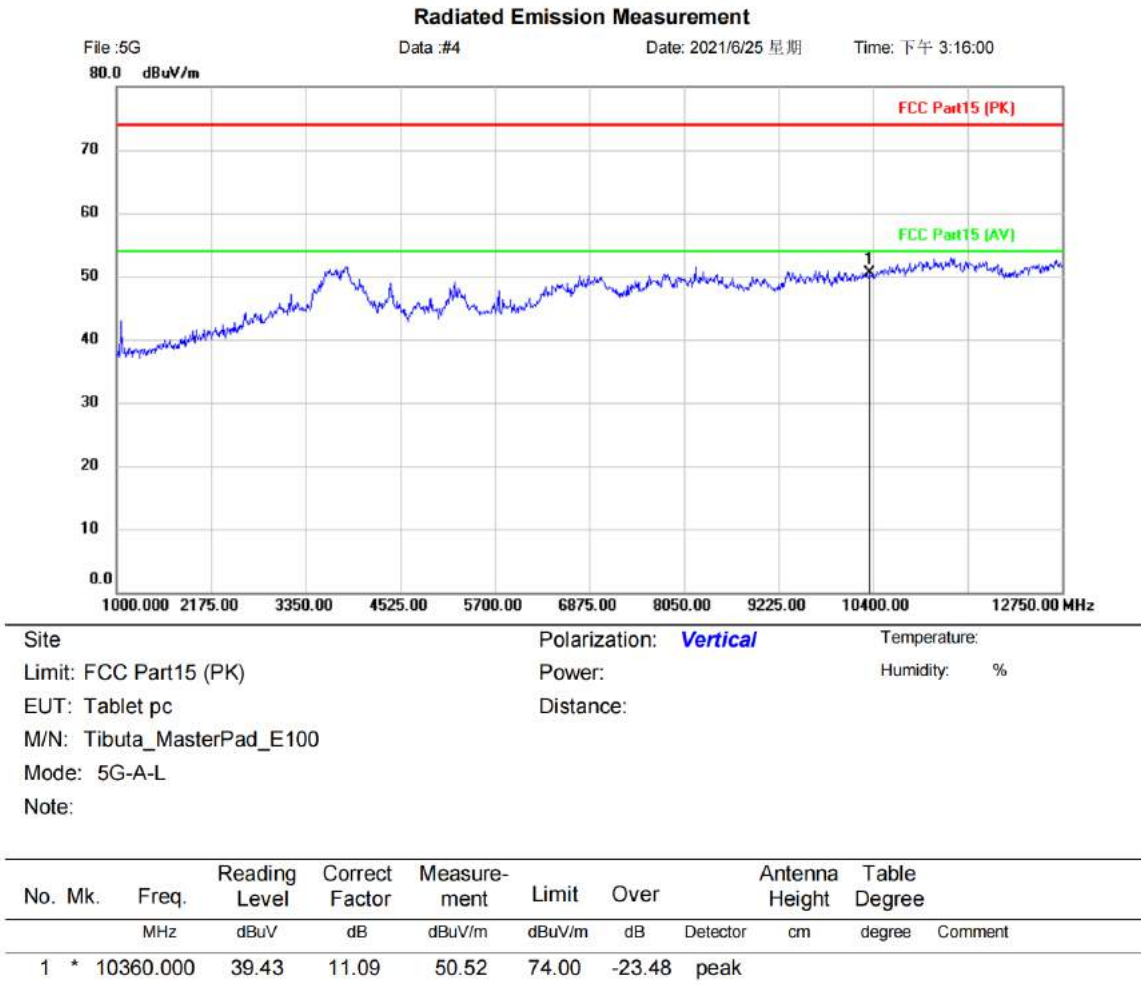


*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[TestMode: TX A mid channel]; [Polarity: Vertical]

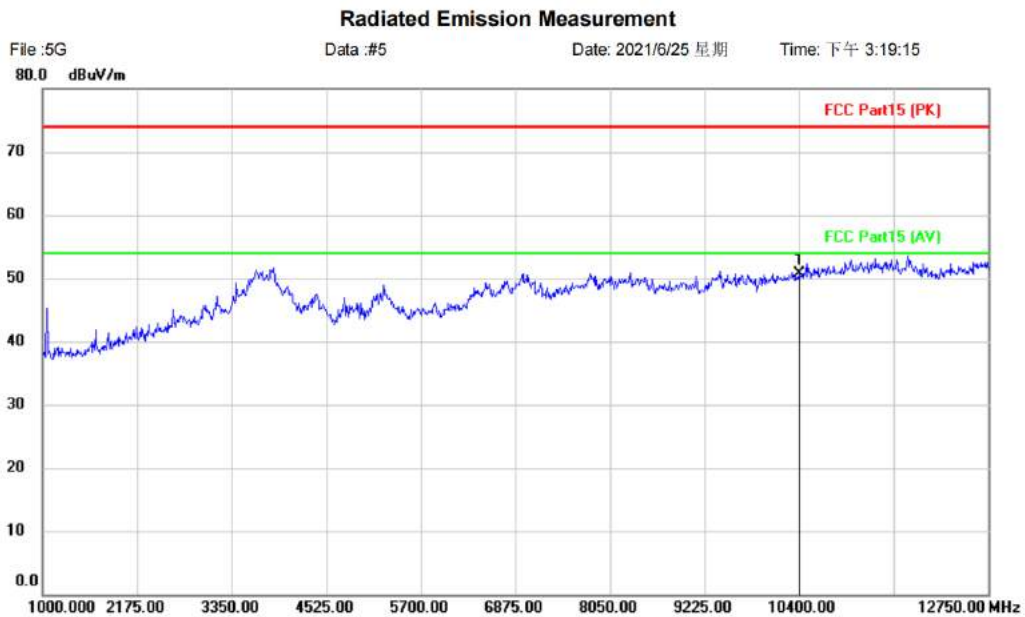

Site	Polarization: Vertical	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Tablet pc	Distance:	
M/N: Tibuta_MasterPad_E100		
Mode: 5G-A-M		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	10400.000	39.49	11.22	50.71	74.00	-23.29	peak	

*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[TestMode: TX A mid channel]; [Polarity: Horizontal]

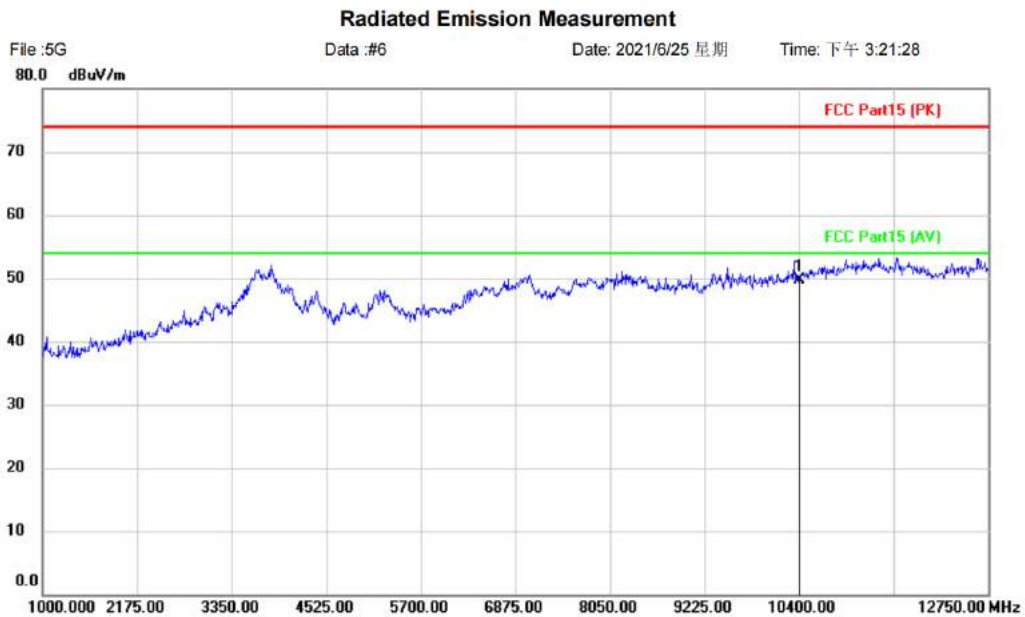

Site	Polarization: Horizontal	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Tablet pc	Distance:	
M/N: Tibuta_MasterPad_E100		
Mode: 5G-A-M		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10400.000	38.45	11.22	49.67	74.00	-24.33	peak		

*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[TestMode: TX A high channel]; [Polarity: Horizontal]

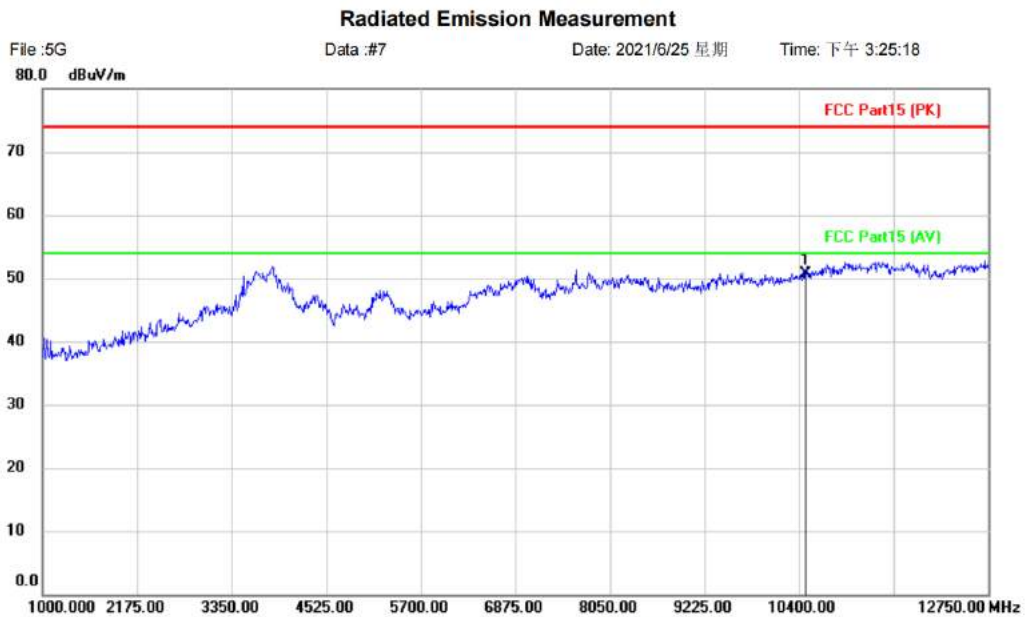

Site	Polarization: Horizontal	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Tablet pc	Distance:	
M/N: Tibuta_MasterPad_E100		
Mode: 5G-A-H		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10480.000	39.54	11.18	50.72	74.00	-23.28	peak		

*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[TestMode: TX A high channel]; [Polarity: Vertical]

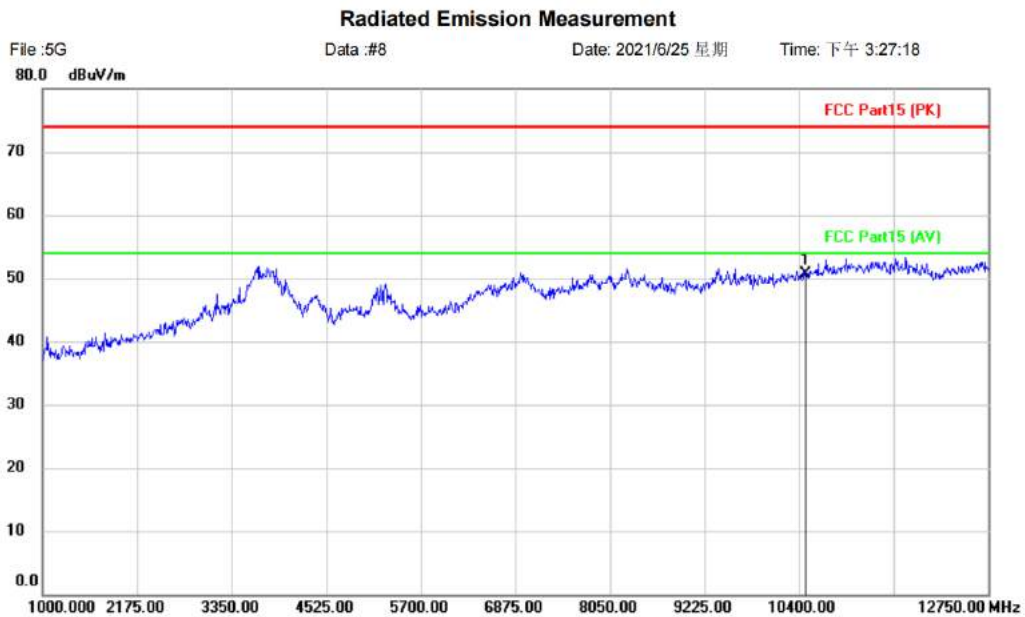

Site	Polarization: Vertical	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Tablet pc	Distance:	
M/N: Tibuta_MasterPad_E100		
Mode: 5G-A-H		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10480.000	39.44	11.18	50.62	74.00	-23.38	peak		


*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[TestMode: TX below 1G]; [Polarity: Horizontal]

Test Lab: BlueAsia EMC Lab (RE #1)	Project: BLA-EMC 202106-A26
EUT: Tablet pc	Test Engineer: Charlie
M/N: Tibuta_MastrePad_E100	Temperature: 25°C
S/N:	Humidity: 53%RH
Test Mode: 5.1 G WIFI	Test Voltage:
Note:	Test Data: 2021-07-02 11:35:29

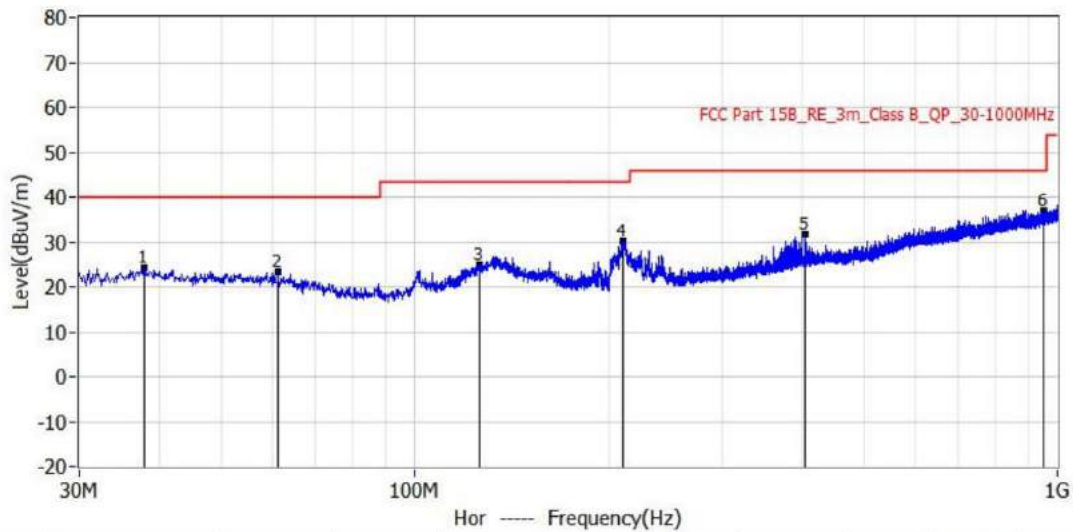


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	37.760MHz	40.0	24.3	-15.7	0.4	23.9	QP	Hor	100.0	17.0
2*	61.161MHz	40.0	23.3	-16.7	0.1	23.2	QP	Hor	100.0	312.0
3*	126.030MHz	43.5	25.0	-18.5	2.0	23.0	QP	Hor	100.0	39.0
4*	210.905MHz	43.5	30.2	-13.3	9.0	21.2	QP	Hor	100.0	78.0
5*	405.390MHz	46.0	31.6	-14.4	4.2	27.4	QP	Hor	100.0	294.0
6*	950.894MHz	46.0	37.0	-9.0	1.4	35.6	QP	Hor	100.0	162.0

Test Result: Pass

[TestMode: TX below 1G]; [Polarity: Vertical]

Test Lab: BlueAsia EMC Lab (RE #1)	Project: BLA-EMC 202106-A26
EUT: Tablet pc	Test Engineer: Charlie
M/N: Tibuta_MastrePad_E100	Temperature: 25°C
S/N:	Humidity: 53%RH
Test Mode: 5.1 G WIFI	Test Voltage:
Note:	Test Data: 2021-07-02 11:37:34

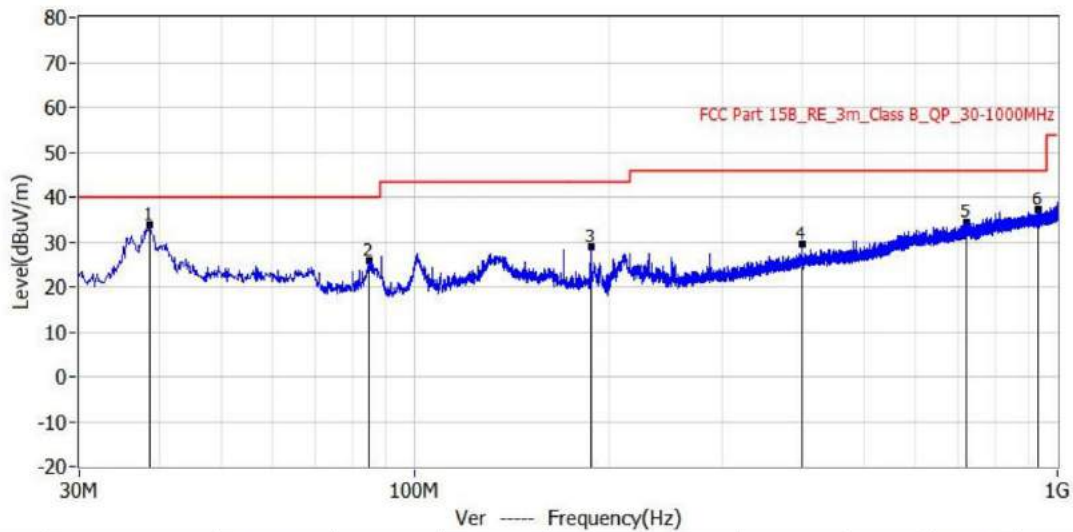

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	38.609MHz	40.0	33.7	-6.3	9.7	24.0	QP	Ver	100.0	0.0
2*	84.805MHz	40.0	25.8	-14.2	6.3	19.5	QP	Ver	100.0	238.0
3*	187.504MHz	43.5	29.0	-14.5	7.8	21.2	QP	Ver	100.0	354.0
4*	399.934MHz	46.0	29.6	-16.4	2.3	27.3	QP	Ver	100.0	238.0
5*	720.761MHz	46.0	34.5	-11.5	2.1	32.4	QP	Ver	100.0	190.0
6*	931.615MHz	46.0	37.2	-8.8	1.9	35.3	QP	Ver	100.0	238.0

Test Result: Pass

6 RADIATED SPURIOUS EMISSIONS AND BAND-EDGE


Test Standard	47 CFR Part 15, Subpart E 15.407
Test Method	KDB 789033 D02 II G
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

6.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

6.2 BLOCK DIAGRAM OF TEST SETUP

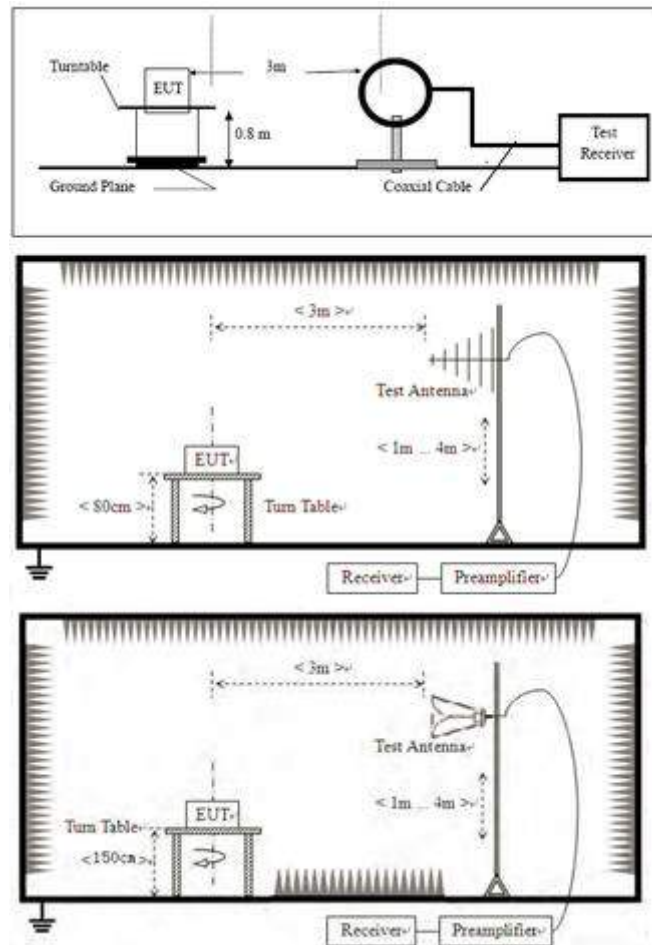

6.3 PROCEDURE


- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
 - i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
 - j. Repeat above procedures until all frequencies measured was complete.
- Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

BlueAsia

6.4 TEST DATA

[TestMode: TX A low channel]; [Polarity: Horizontal]

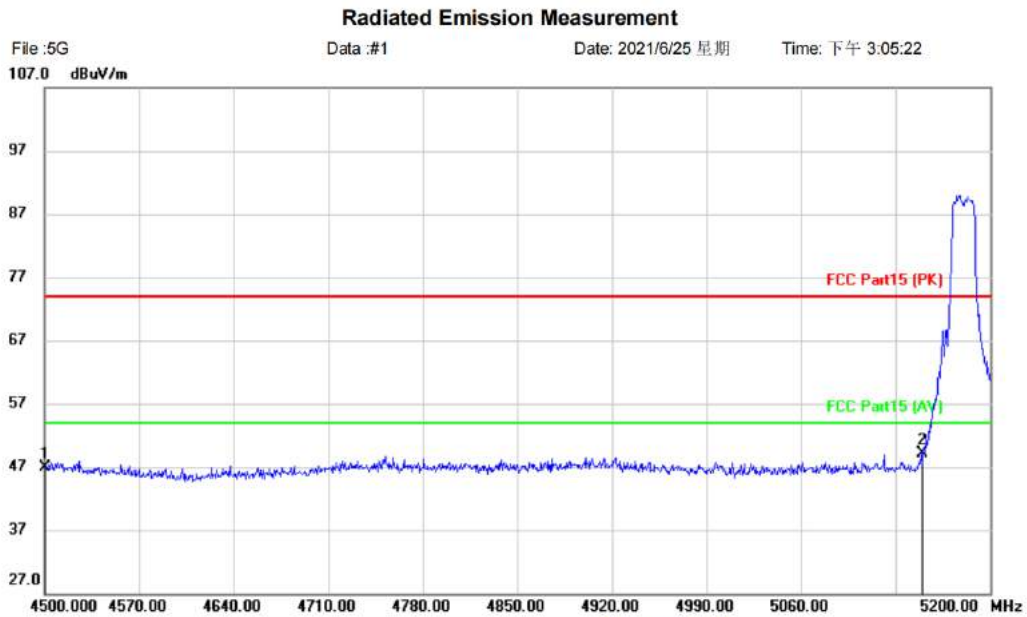

Site: Polarization: **Horizontal** Temperature: °C
 Limit: FCC Part15 (PK) Power: Humidity: %
 EUT: Tablet pc Distance: m
 M/N: Tibuta_MasterPad_E100
 Mode: 5G-A-L
 Note:


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		4500.000	47.15	-0.16	46.99	74.00	-27.01	peak			
2	*	5150.000	48.76	0.36	49.12	74.00	-24.88	peak			

*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[TestMode: TX A low channel]; [Polarity: Vertical]

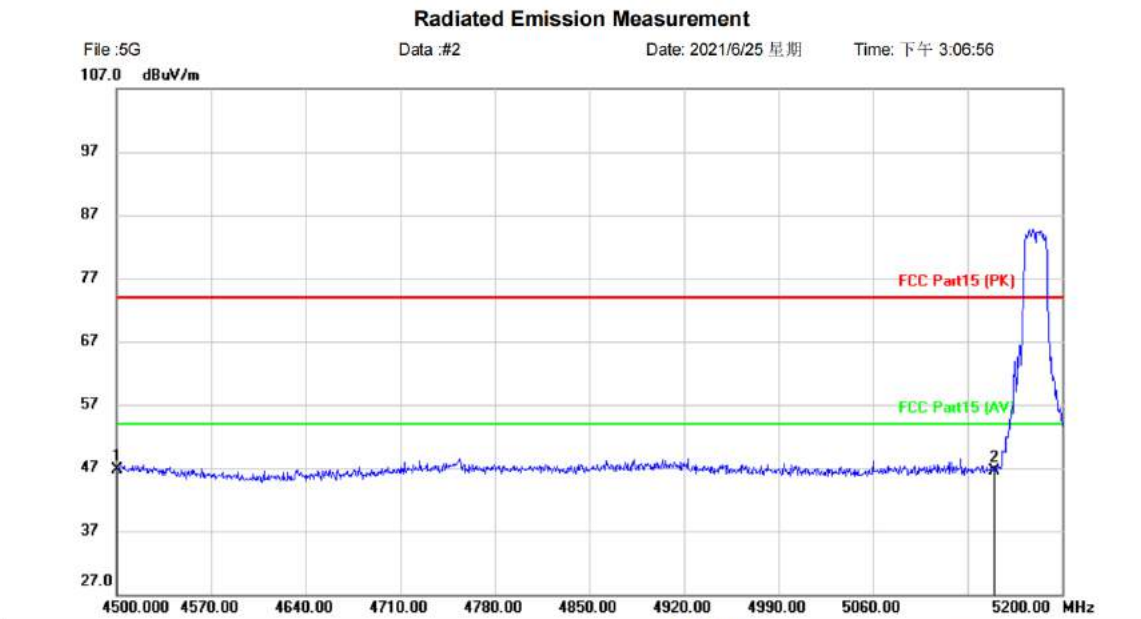


Site	Polarization: Vertical	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Tablet pc	Distance:	
M/N: Tibuta_MasterPad_E100		
Mode: 5G-A-L		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	4500.000	46.91	-0.16	46.75	74.00	-27.25	peak		
2		5150.000	46.23	0.36	46.59	74.00	-27.41	peak		

*:Maximum data x:Over limit !:over margin <Reference Only

Test Result: Pass

[TestMode: TX A high channel]; [Polarity: Horizontal]

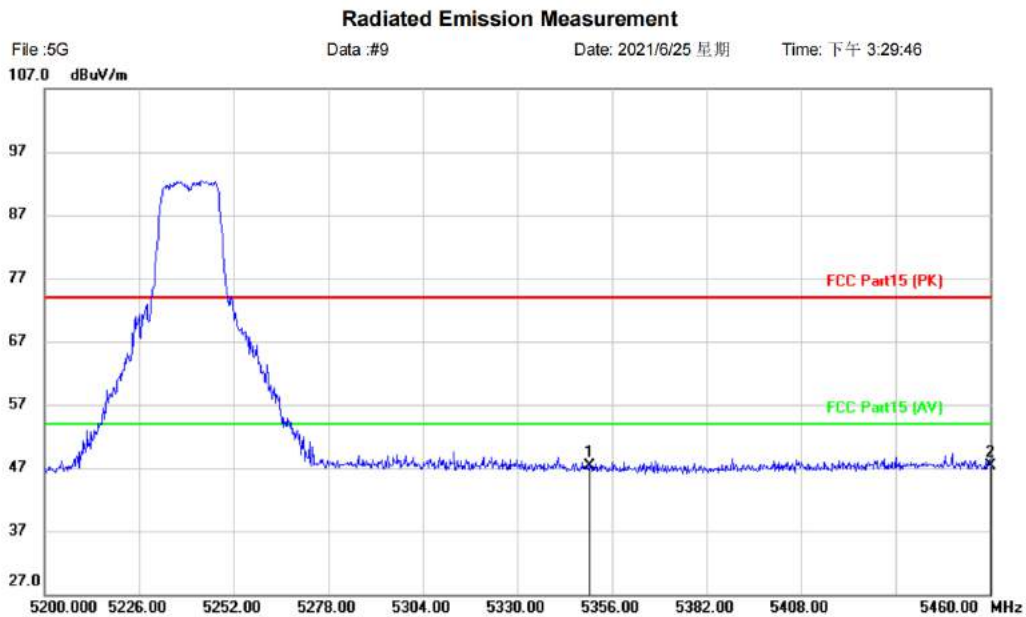

Site	Polarization: Horizontal	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Tablet pc	Distance:	
M/N: Tibuta_MasterPad_E100		
Mode: 5G-A-H		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5350.000	46.61	0.68	47.29	74.00	-26.71	peak		
2		5460.000	46.38	0.91	47.29	74.00	-26.71	peak		

*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[TestMode: TX A high channel]; [Polarity: Vertical]

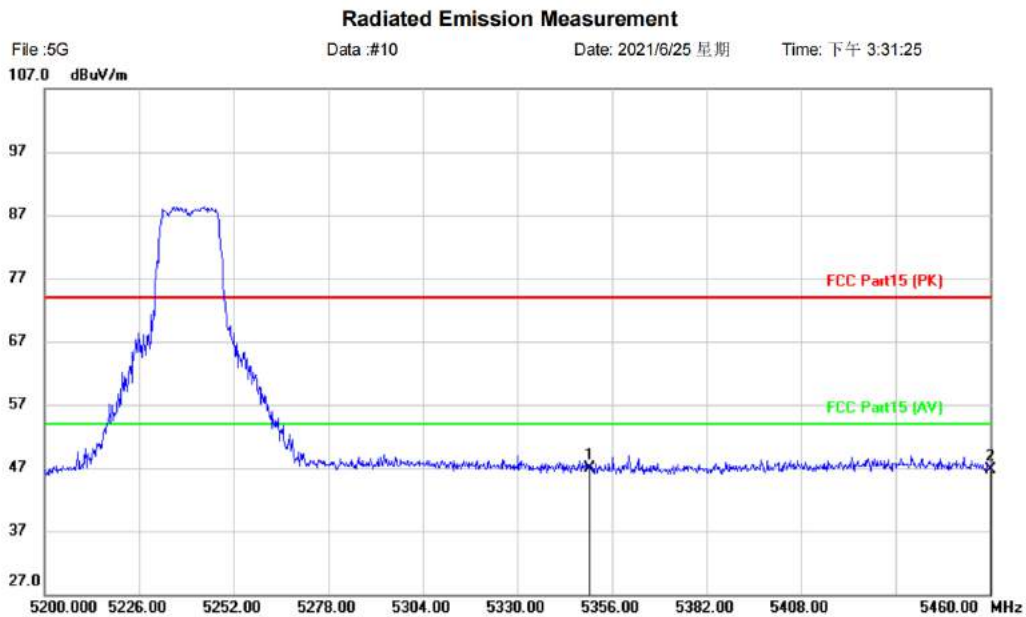

Site	Polarization: Vertical	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Tablet pc	Distance:	
M/N: Tibuta_MasterPad_E100		
Mode: 5G-A-H		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5350.000	46.21	0.68	46.89	74.00	-27.11	peak		
2		5460.000	45.83	0.91	46.74	74.00	-27.26	peak		

*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[TestMode: TX N20 low channel]; [Polarity: Vertical]

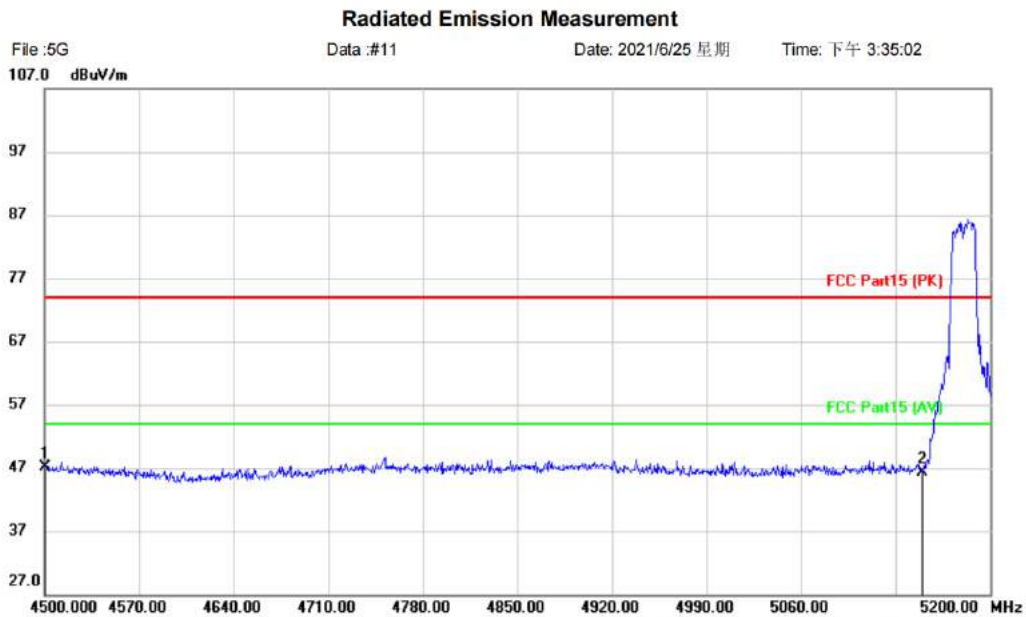

Site	Polarization: Vertical	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Tablet pc	Distance:	
M/N: Tibuta_MasterPad_E100		
Mode: 5G-N20-L		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	4500.000	47.29	-0.16	47.13	74.00	-26.87	peak		
2		5150.000	46.02	0.36	46.38	74.00	-27.62	peak		

*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[TestMode: TX N20 low channel]; [Polarity: Horizontal]

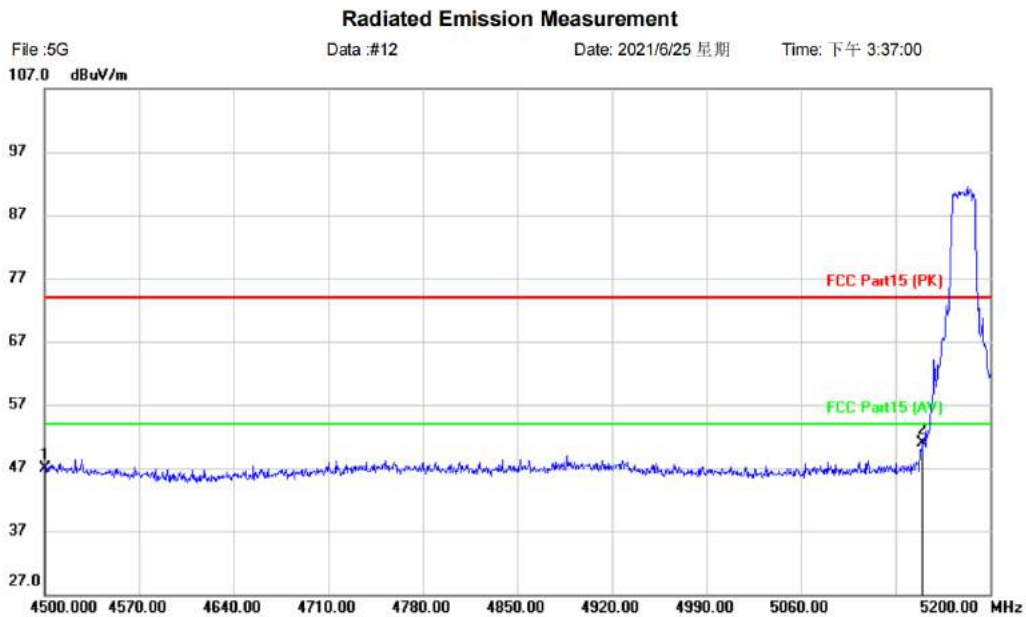

Site	Polarization: Horizontal	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Tablet pc	Distance:	
M/N: Tibuta_MasterPad_E100		
Mode: 5G-N20-L		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4500.000	47.02	-0.16	46.86	74.00	-27.14	peak		
2	*	5150.000	50.47	0.36	50.83	74.00	-23.17	peak		

*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[TestMode: TX N20 high channel]; [Polarity: Horizontal]

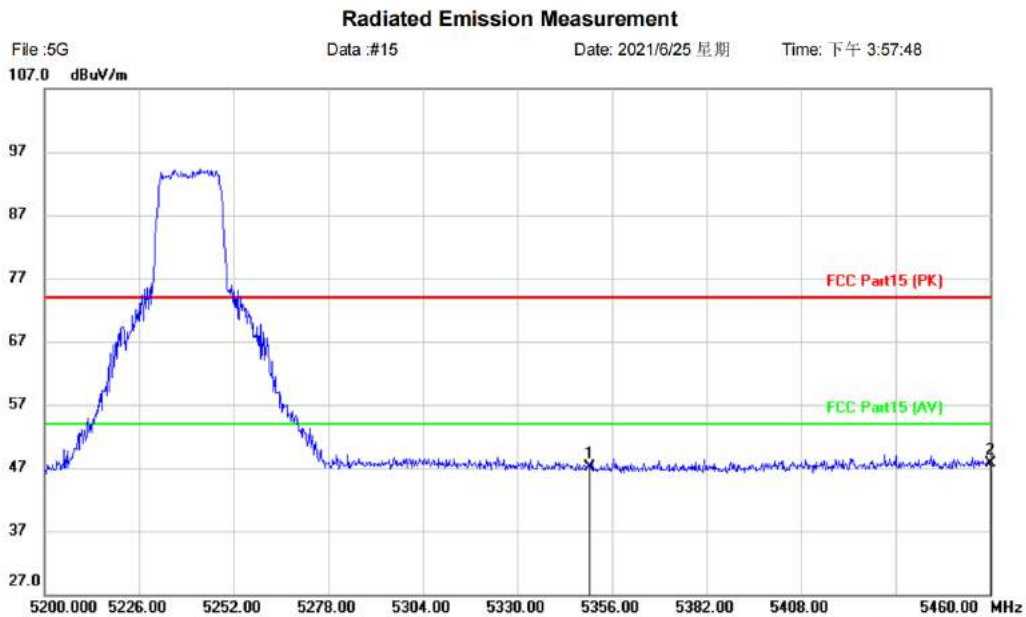

Site	Polarization: Horizontal	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Tablet pc	Distance:	
M/N: Tibuta_MasterPad_E100		
Mode: 5G-N20-H		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		5350.000	46.37	0.68	47.05	74.00	-26.95	peak	
2	*	5460.000	46.80	0.91	47.71	74.00	-26.29	peak	

*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[TestMode: TX N20 high channel]; [Polarity: Vertical]

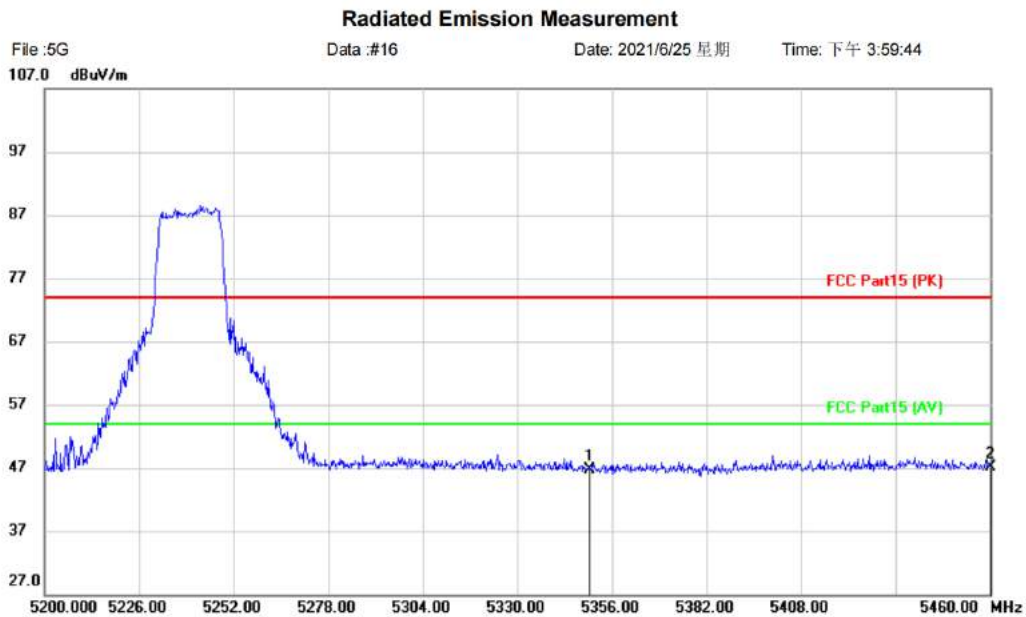

Site	Polarization: Vertical	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Tablet pc	Distance:	
M/N: Tibuta_MasterPad_E100		
Mode: 5G-N20-H		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5350.000	46.02	0.68	46.70	74.00	-27.30	peak		
2	*	5460.000	46.26	0.91	47.17	74.00	-26.83	peak		

*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[TestMode: TX N40 low channel]; [Polarity: Vertical]

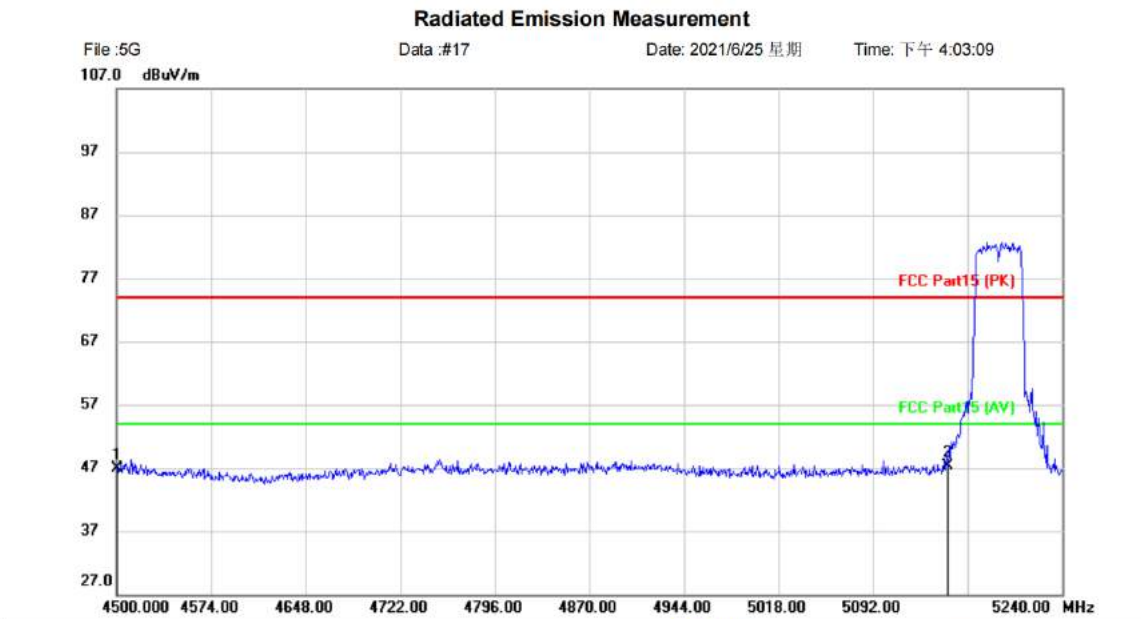


Site	Polarization: Vertical	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Tablet pc	Distance:	
M/N: Tibuta_MasterPad_E100		
Mode: 5G-N40-L		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4500.000	47.06	-0.16	46.90	74.00	-27.10	peak		
2	*	5150.000	46.97	0.36	47.33	74.00	-26.67	peak		

*:Maximum data x:Over limit !:over margin <Reference Only

Test Result: Pass

[TestMode: TX N40 low channel]; [Polarity: Horizontal]

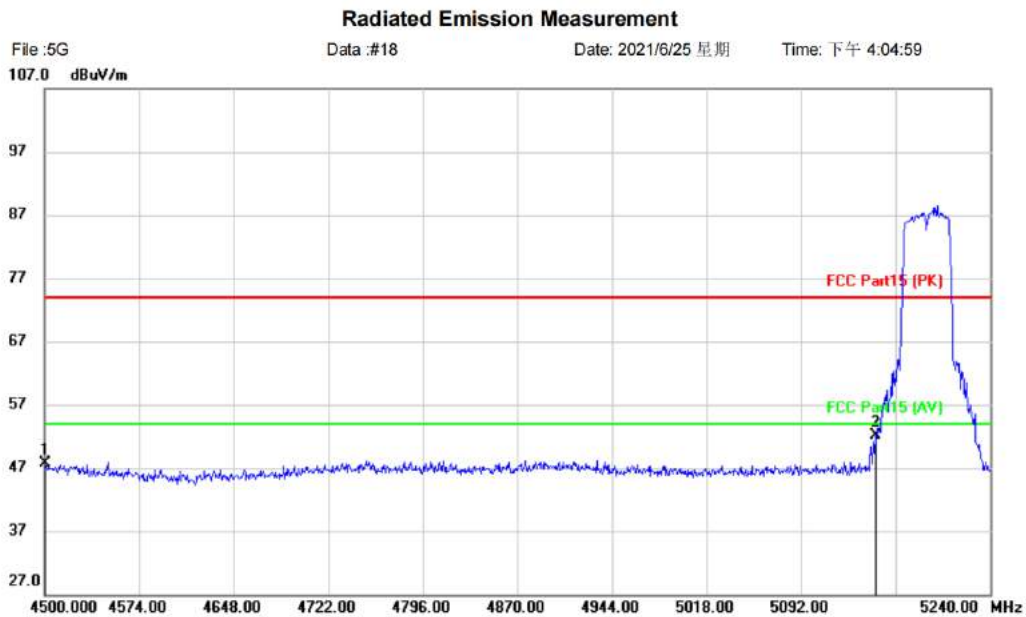

Site	Polarization: Horizontal	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Tablet pc	Distance:	
M/N: Tibuta_MasterPad_E100		
Mode: 5G-N40-L		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4500.000	47.93	-0.16	47.77	74.00	-26.23	peak		
2	*	5150.000	51.81	0.36	52.17	74.00	-21.83	peak		

*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[TestMode: TX N40 high channel]; [Polarity: Horizontal]

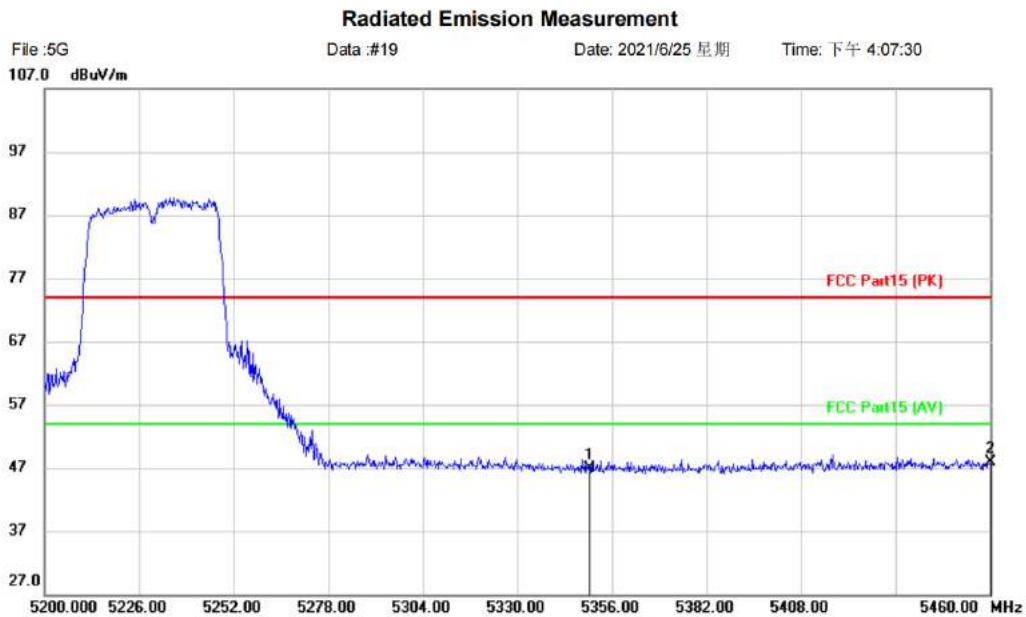

Site	Polarization: Horizontal	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Tablet pc	Distance:	
M/N: Tibuta_MasterPad_E100		
Mode: 5G-N40-H		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5350.000	46.15	0.68	46.83	74.00	-27.17	peak		
2	*	5460.000	47.08	0.91	47.99	74.00	-26.01	peak		

*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[TestMode: TX N40 high channel]; [Polarity: Vertical]

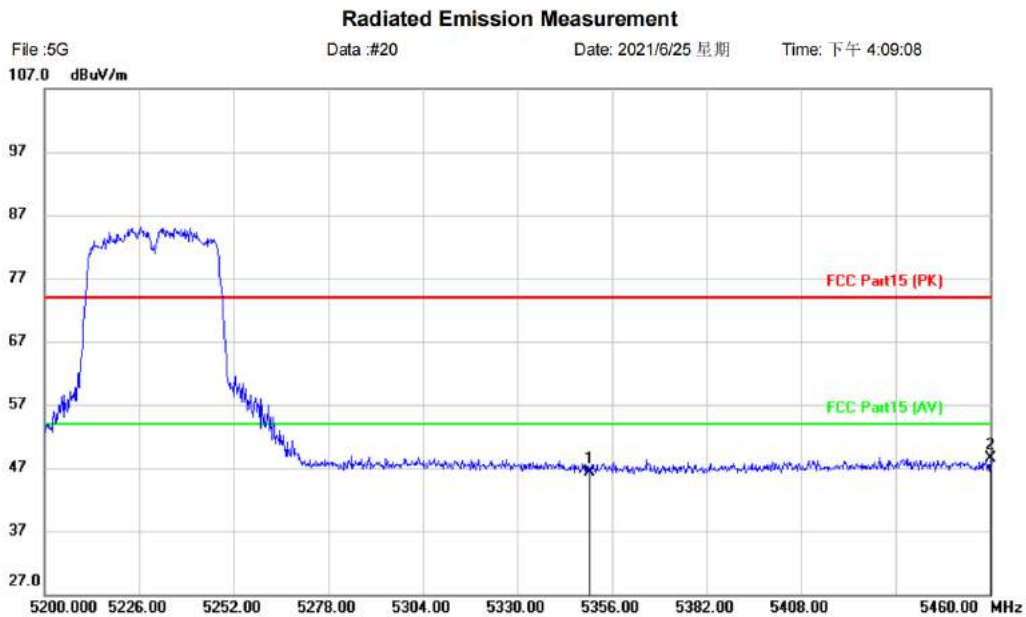

Site	Polarization: Vertical	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Tablet pc	Distance:	
M/N: Tibuta_MasterPad_E100		
Mode: 5G-N40-H		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5350.000	45.55	0.68	46.23	74.00	-27.77	peak		
2	*	5460.000	47.61	0.91	48.52	74.00	-25.48	peak		

*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[TestMode: TX AC20 low channel]; [Polarity: Vertical]

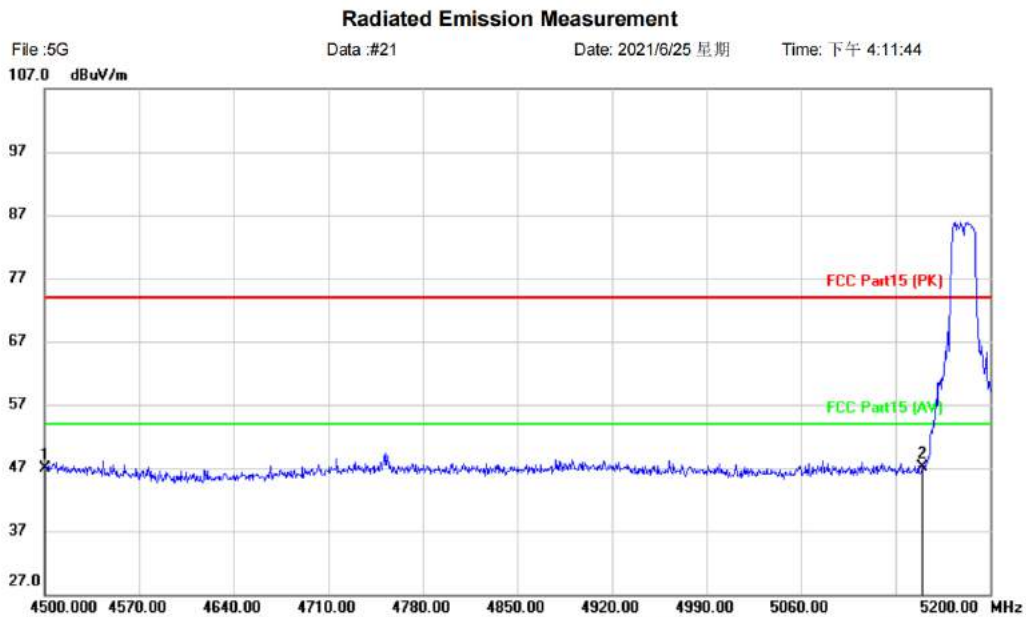

Site	Polarization: Vertical	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Tablet pc	Distance:	
M/N: Tibuta_MasterPad_E100		
Mode: 5G-AC20-L		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4500.000	47.07	-0.16	46.91	74.00	-27.09	peak		
2	*	5150.000	46.70	0.36	47.06	74.00	-26.94	peak		

*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[TestMode: TX AC20 low channel]; [Polarity: Horizontal]

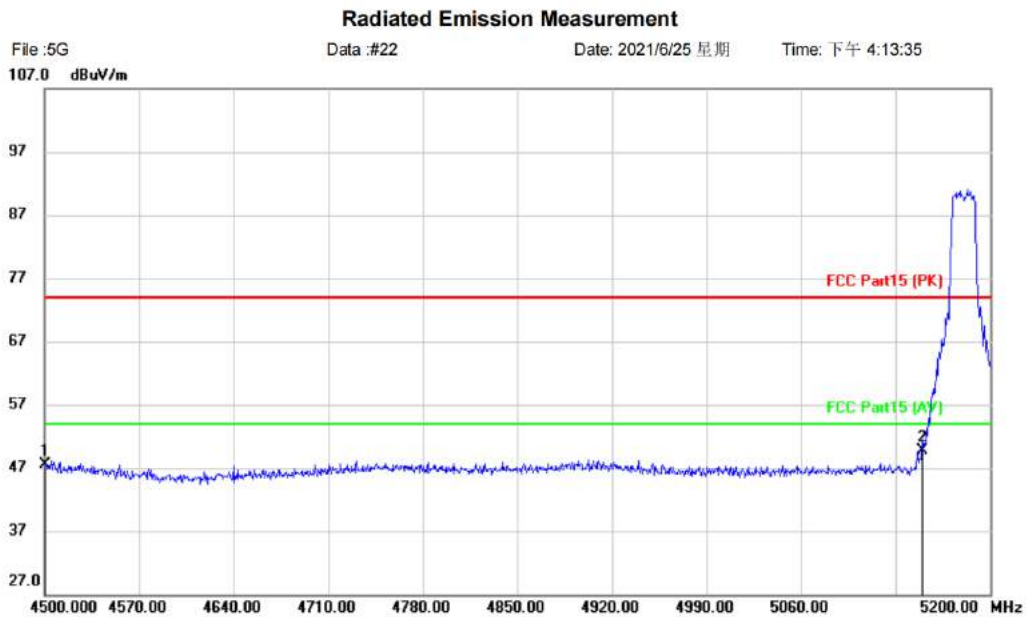

Site	Polarization: Horizontal	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Tablet pc	Distance:	
M/N: Tibuta_MasterPad_E100		
Mode: 5G-AC20-L		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4500.000	47.66	-0.16	47.50	74.00	-26.50	peak		
2	*	5150.000	49.35	0.36	49.71	74.00	-24.29	peak		

*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[TestMode: TX AC20 high channel]; [Polarity: Horizontal]

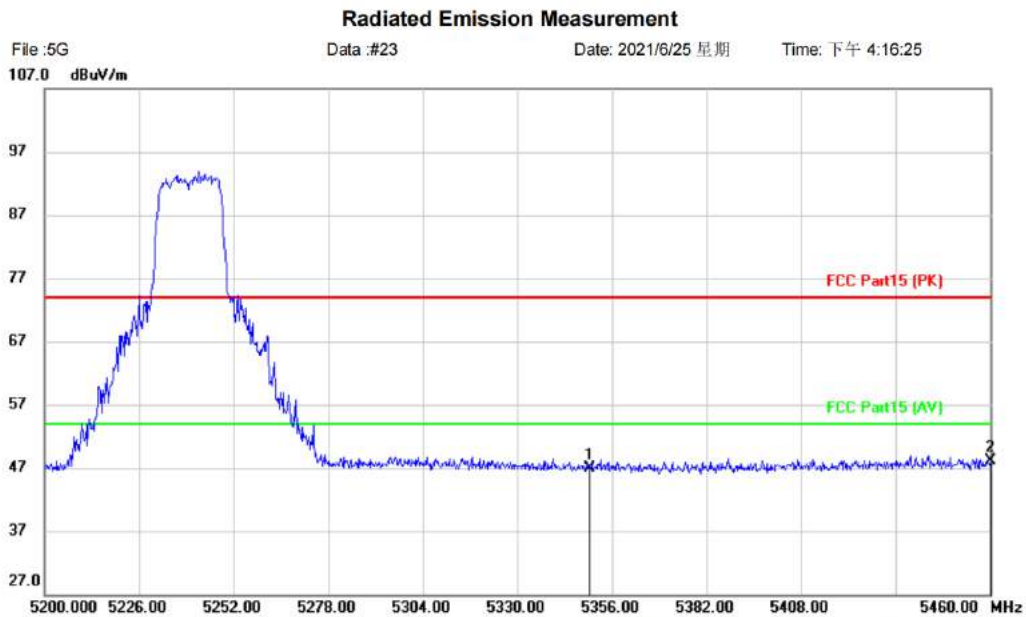

Site	Polarization: Horizontal	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Tablet pc	Distance:	
M/N: Tibuta_MasterPad_E100		
Mode: 5G-AC20-H		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5350.000	46.24	0.68	46.92	74.00	-27.08	peak		
2	*	5460.000	47.15	0.91	48.06	74.00	-25.94	peak		

*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[TestMode: TX AC20 high channel]; [Polarity: Vertical]

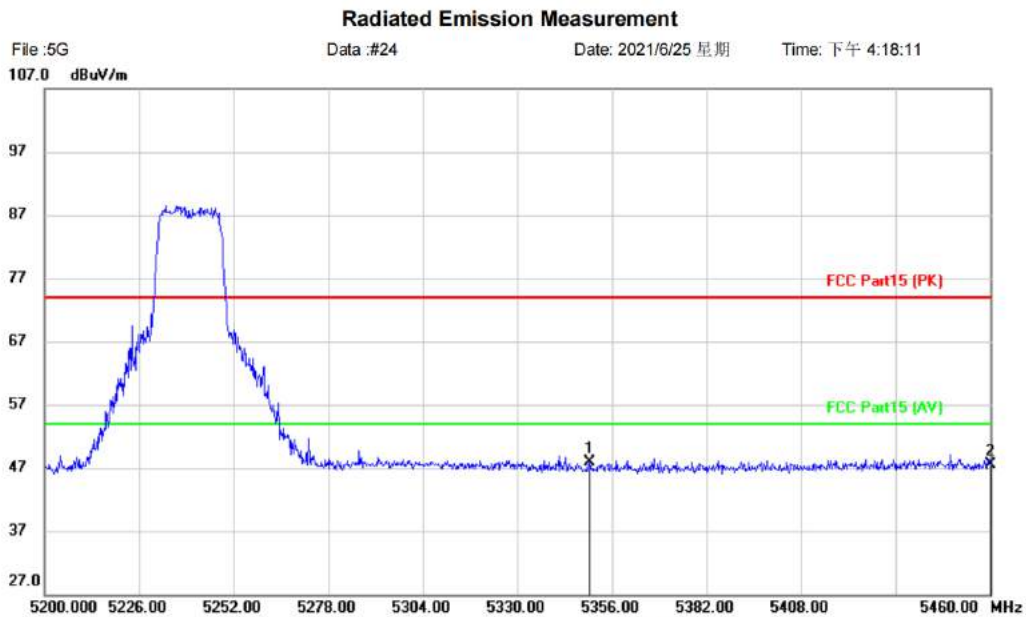

Site	Polarization: Vertical	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Tablet pc	Distance:	
M/N: Tibuta_MasterPad_E100		
Mode: 5G-AC20-H		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5350.000	47.15	0.68	47.83	74.00	-26.17	peak		
2		5460.000	46.62	0.91	47.53	74.00	-26.47	peak		

*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[TestMode: TX AC40 low channel]; [Polarity: Vertical]

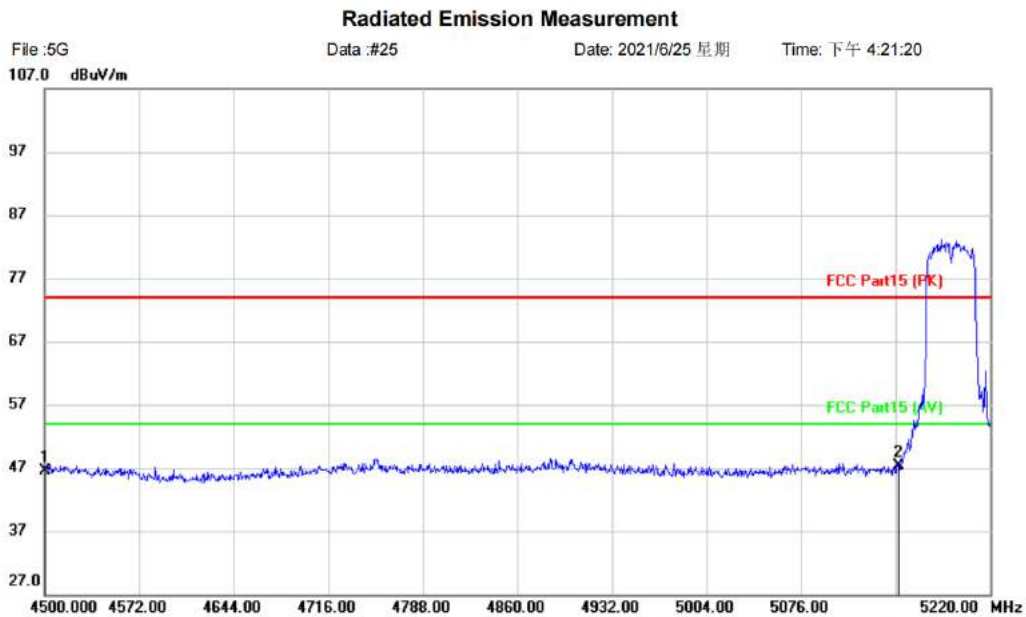

Site	Polarization: Vertical	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Tablet pc	Distance:	
M/N: Tibuta_MasterPad_E100		
Mode: 5G-AC40-L		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4500.000	46.67	-0.16	46.51	74.00	-27.49	peak		
2	*	5150.000	47.00	0.36	47.36	74.00	-26.64	peak		

*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[TestMode: TX AC40 low channel]; [Polarity: Horizontal]

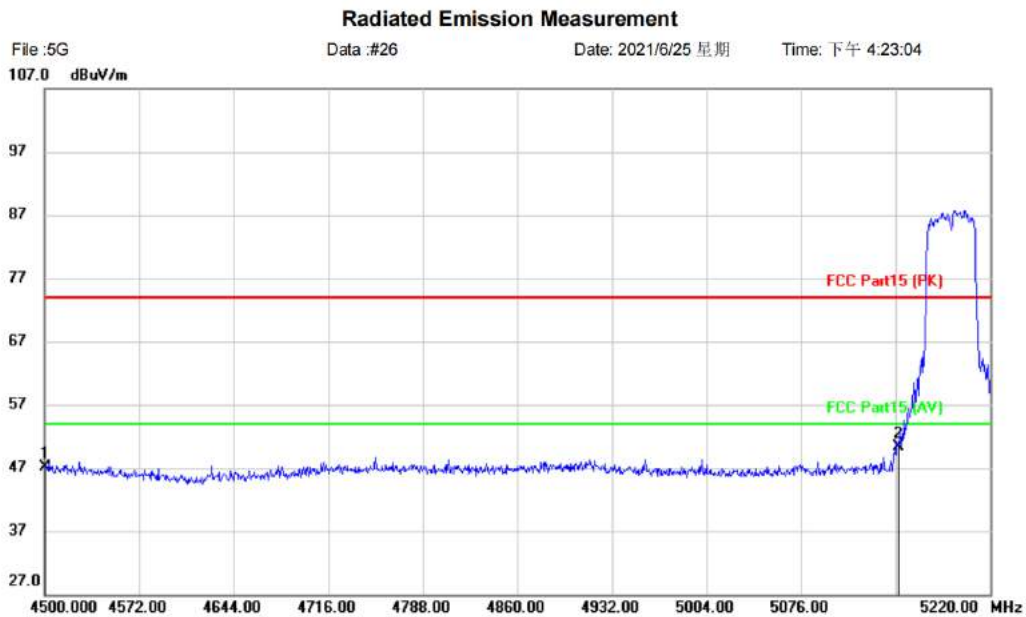

Site	Polarization: Horizontal	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Tablet pc	Distance:	
M/N: Tibuta_MasterPad_E100		
Mode: 5G-AC40-L		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4500.000	47.27	-0.16	47.11	74.00	-26.89	peak		
2	*	5150.000	49.88	0.36	50.24	74.00	-23.76	peak		

*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[TestMode: TX AC40 high channel]; [Polarity: Horizontal]

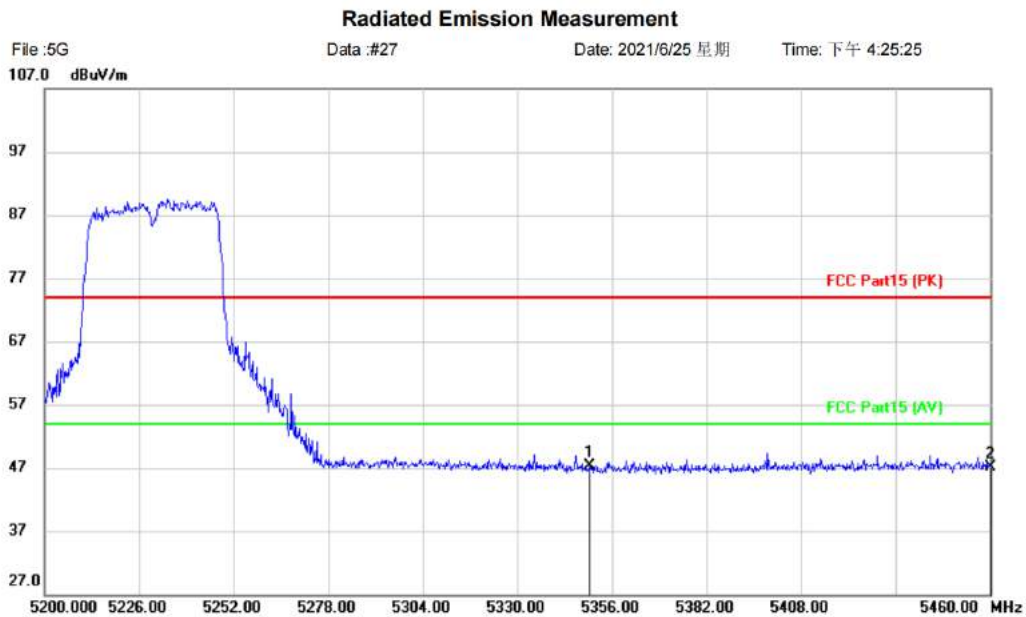

Site	Polarization: Horizontal	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Tablet pc	Distance:	
M/N: Tibuta_MasterPad_E100		
Mode: 5G-AC40-H		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5350.000	46.72	0.68	47.40	74.00	-26.60	peak		
2		5460.000	46.17	0.91	47.08	74.00	-26.92	peak		

*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[TestMode: TX AC40 high channel]; [Polarity: Vertical]

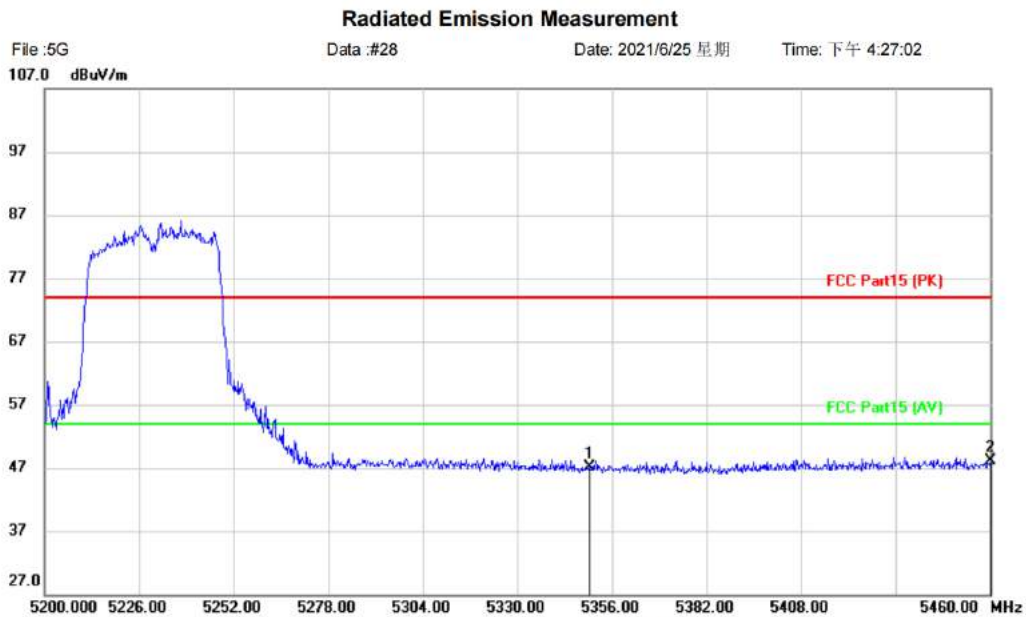

Site	Polarization: Vertical	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Tablet pc	Distance:	
M/N: Tibuta_MasterPad_E100		
Mode: 5G-AC40-H		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5350.000	46.40	0.68	47.08	74.00	-26.92	peak		
2	*	5460.000	47.16	0.91	48.07	74.00	-25.93	peak		

*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[TestMode: TX AC80 channel]; [Polarity: Vertical]

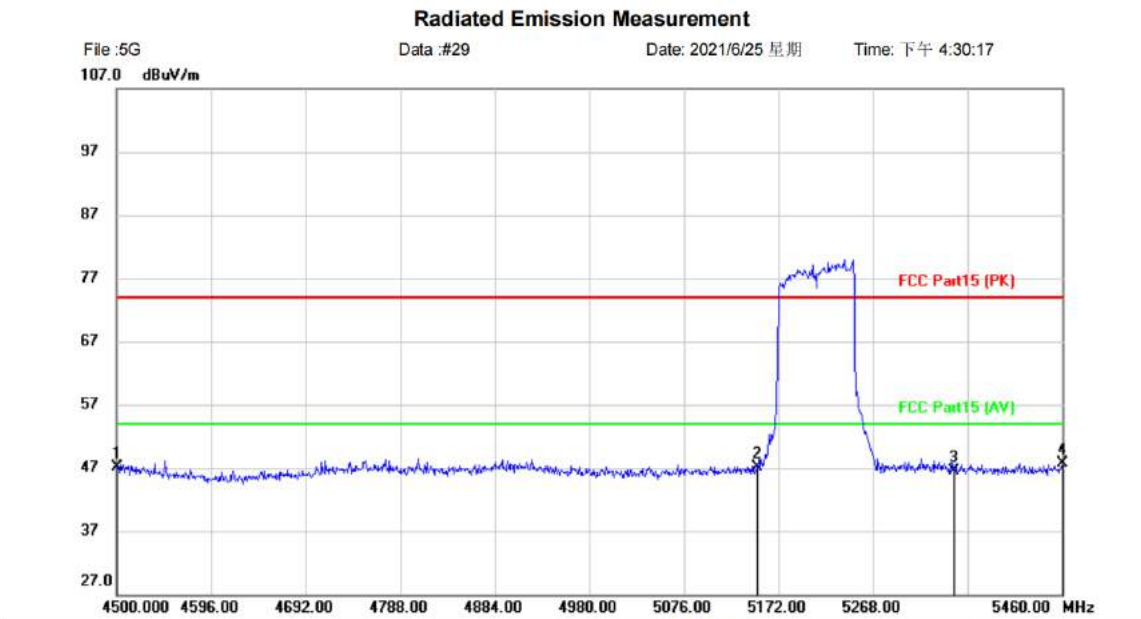

Site	Polarization: Vertical	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: Tablet pc	Distance:	
M/N: Tibuta_MasterPad_E100		
Mode: 5G-AC80		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4500.000	47.18	-0.16	47.02	74.00	-26.98	peak		
2		5150.000	46.72	0.36	47.08	74.00	-26.92	peak		
3		5350.000	45.85	0.68	46.53	74.00	-27.47	peak		
4	*	5460.000	46.76	0.91	47.67	74.00	-26.33	peak		

*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[TestMode: TX AC80 channel]; [Polarity: Horizontal]

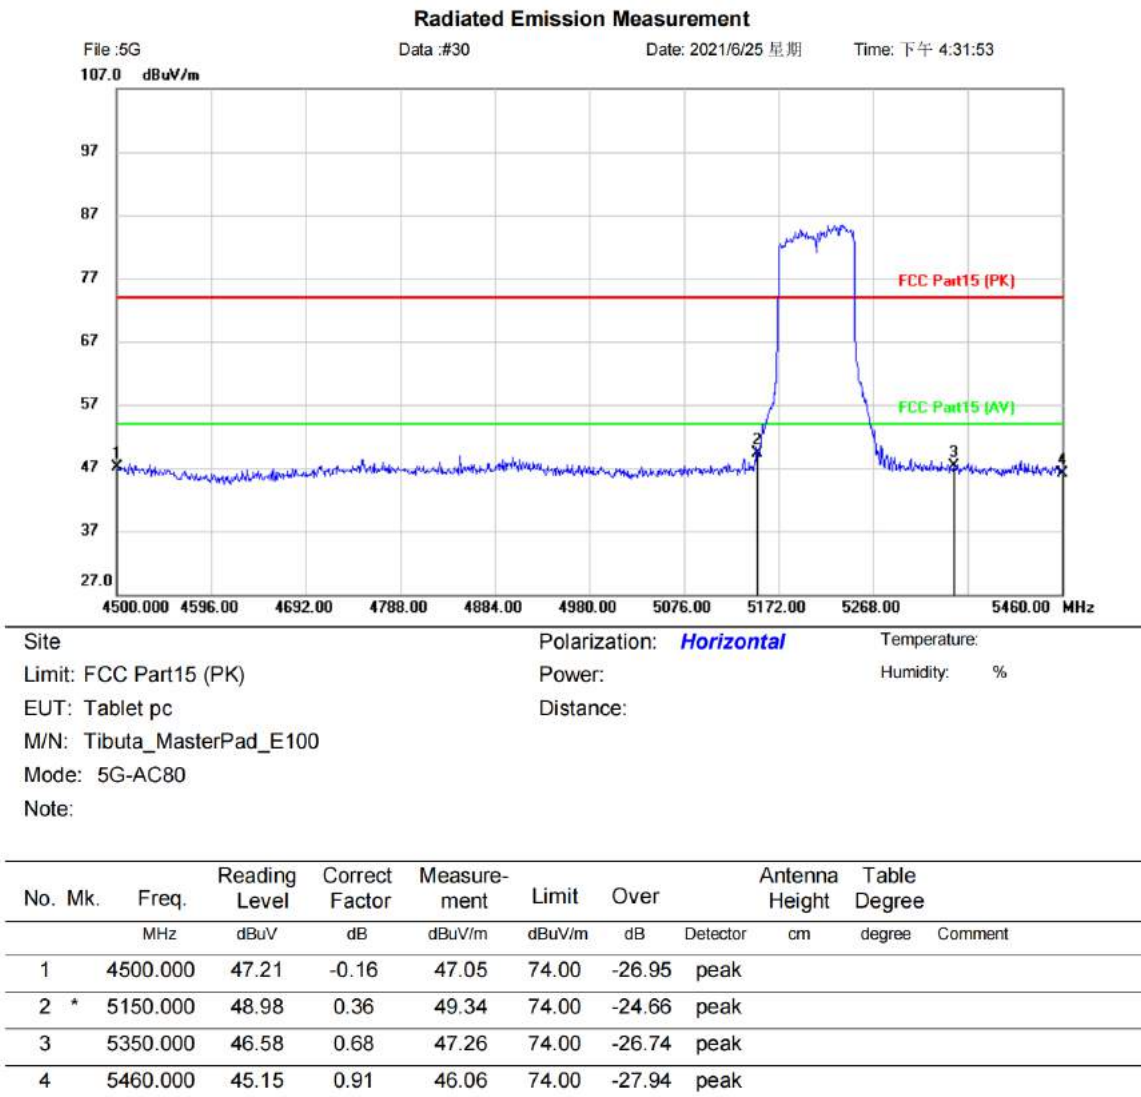

*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass


7 PEAK POWER SPECTRUM DENSITY

Test Standard	47 CFR Part 15, Subpart E 15.407
Test Method	KDB 789033 D02 II F
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

7.1 LIMITS

Frequency band(MHz)	Limit
5150-5250	≤17dBm in 1MHz for master device
	≤11dBm in 1MHz for client device
5250-5350	≤11dBm in 1MHz for client device
5470-5725	≤11dBm in 1MHz for client device
5725-5850	≤30dBm in 500 kHz
Remark:	The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test.

7.2 BLOCK DIAGRAM OF TEST SETUP

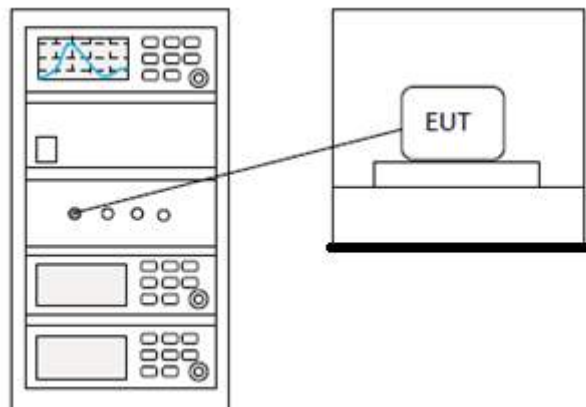

7.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia


8 MAXIMUM CONDUCTED OUTPUT POWER

Test Standard	47 CFR Part 15, Subpart E 15.407
Test Method	KDB 789033 D02 II E
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

8.1 LIMITS

Frequency band(MHz)	Limit
5150-5250	$\leq 1\text{W}(30\text{dBm})$ for master device
	$\leq 250\text{mW}(24\text{dBm})$ for client device
5250-5350	$\leq 250\text{mW}(24\text{dBm})$ for client device or $11\text{dBm}+10\log B^*$
5470-5725	$\leq 250\text{mW}(24\text{dBm})$ for client device or $11\text{dBm}+10\log B^*$
5725-5850	$\leq 1\text{W}(30\text{dBm})$
Remark:	<p>* Where B is the 26dB emission bandwidth in MHz.</p> <p>The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.</p>

8.2 BLOCK DIAGRAM OF TEST SETUP

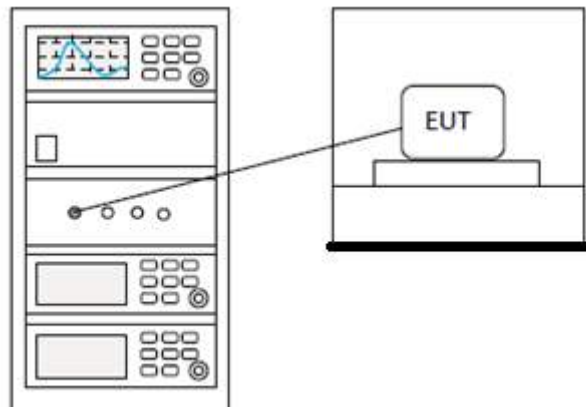

8.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia

9 ANTENNA REQUIREMENT

Test Standard	47 CFR Part 15, Subpart E 15.407
Test Method	N/A


9.1 CONCLUSION

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 1.57dBi.

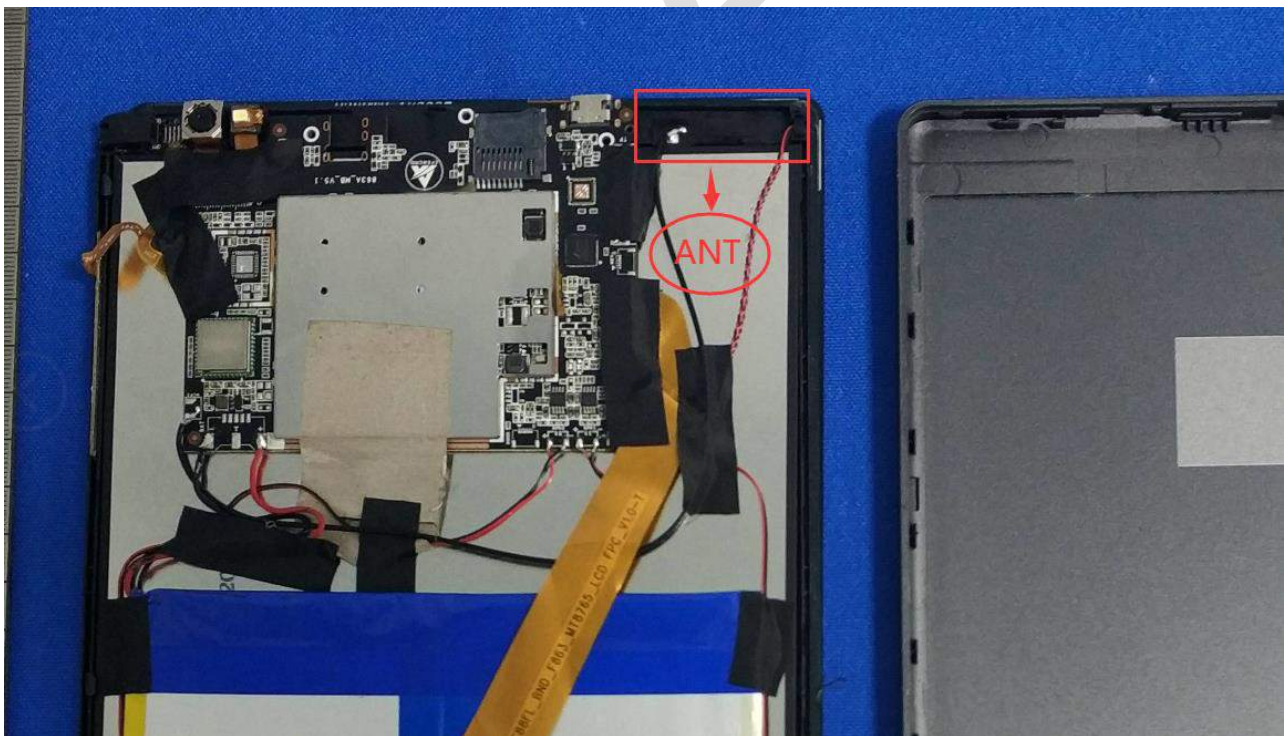


10 APPENDIX


10.1 MAXIMUM CONDUCTED OUTPUT POWER

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	2.777	24	Pass
NVNT	a	5200	Ant1	2.769	24	Pass
NVNT	a	5240	Ant1	3.185	24	Pass
NVNT	ac20	5180	Ant1	3.545	24	Pass
NVNT	ac20	5200	Ant1	3.55	24	Pass
NVNT	ac20	5240	Ant1	3.649	24	Pass
NVNT	ac40	5190	Ant1	2.867	24	Pass
NVNT	ac40	5230	Ant1	3.915	24	Pass
NVNT	ac80	5210	Ant1	4.052	24	Pass
NVNT	n20	5180	Ant1	3.516	24	Pass
NVNT	n20	5200	Ant1	3.446	24	Pass
NVNT	n20	5240	Ant1	3.709	24	Pass
NVNT	n40	5190	Ant1	3.237	24	Pass
NVNT	n40	5230	Ant1	3.343	24	Pass


Power NVNT a 5180MHz Ant1

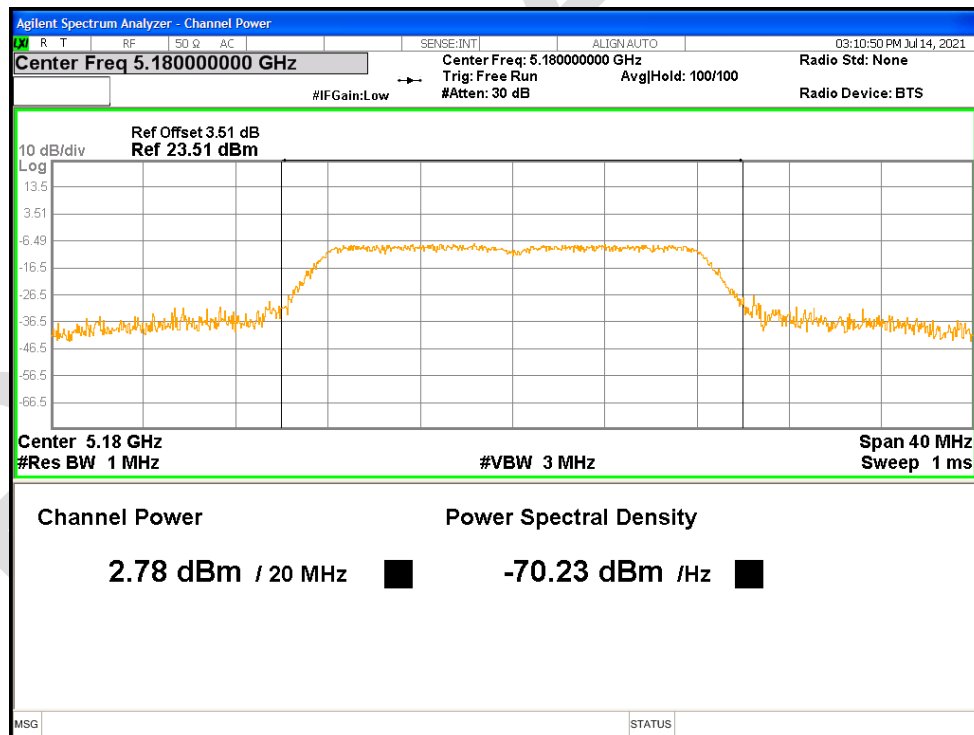


Power NVNT a 5200MHz Ant1

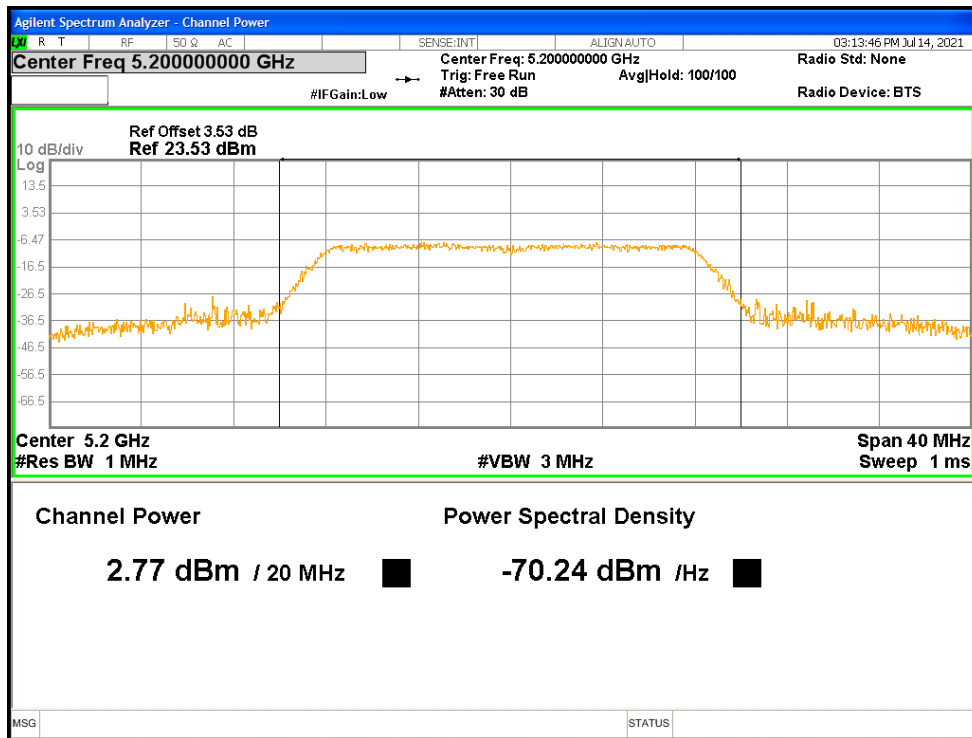


Power NVNT a 5240MHz Ant1

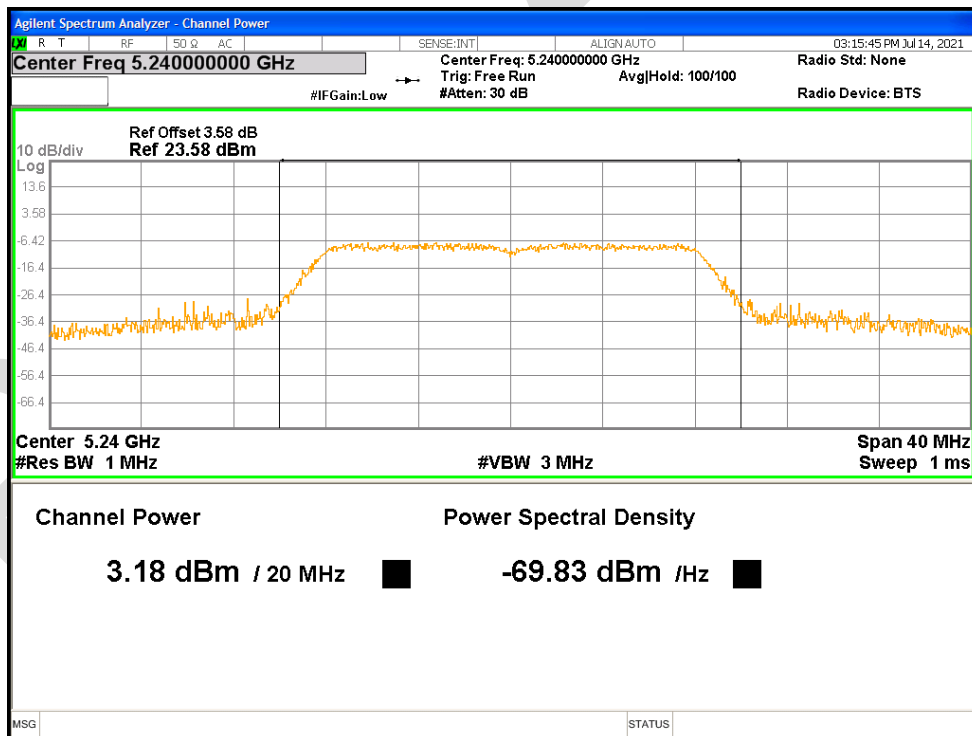


Power NVNT ac20 5180MHz Ant1

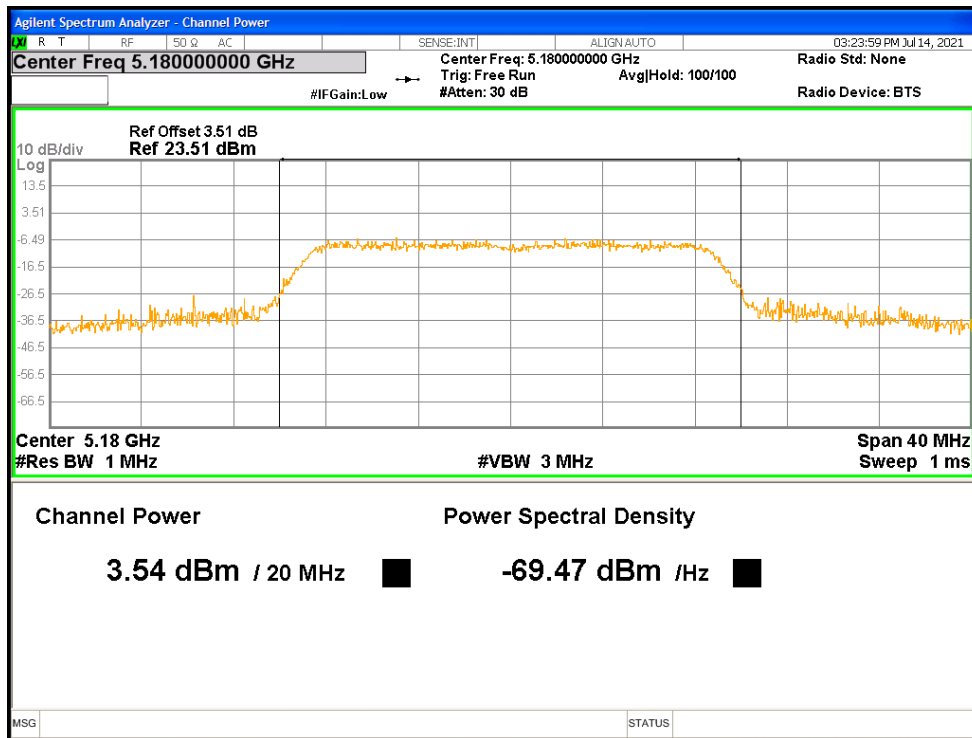


Power NVNT ac20 5200MHz Ant1

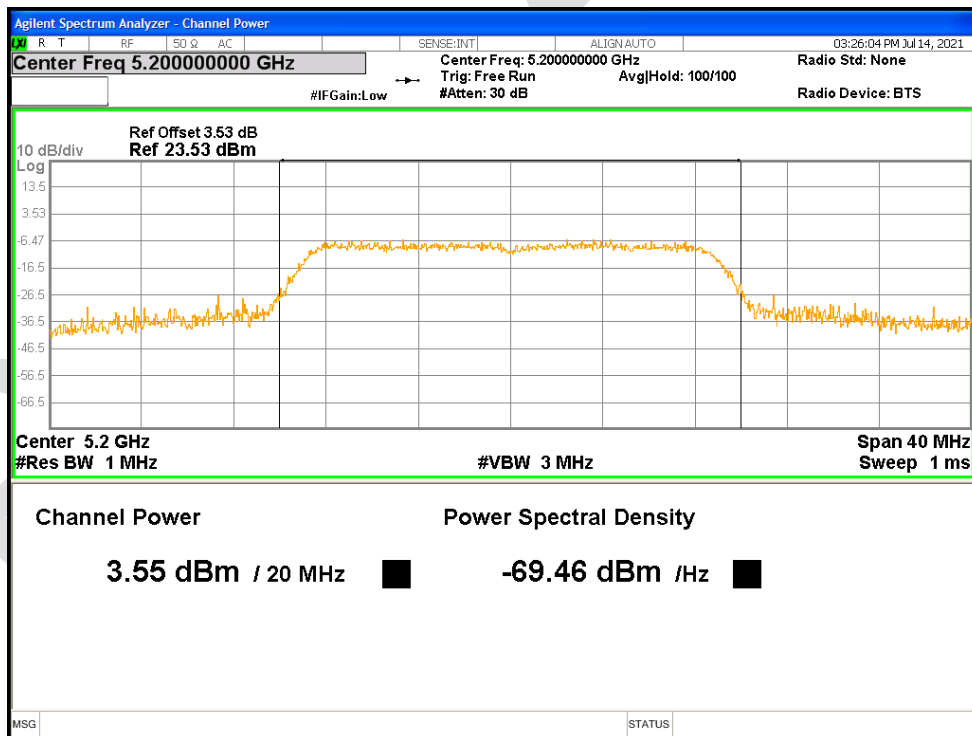


Power NVNT ac20 5240MHz Ant1

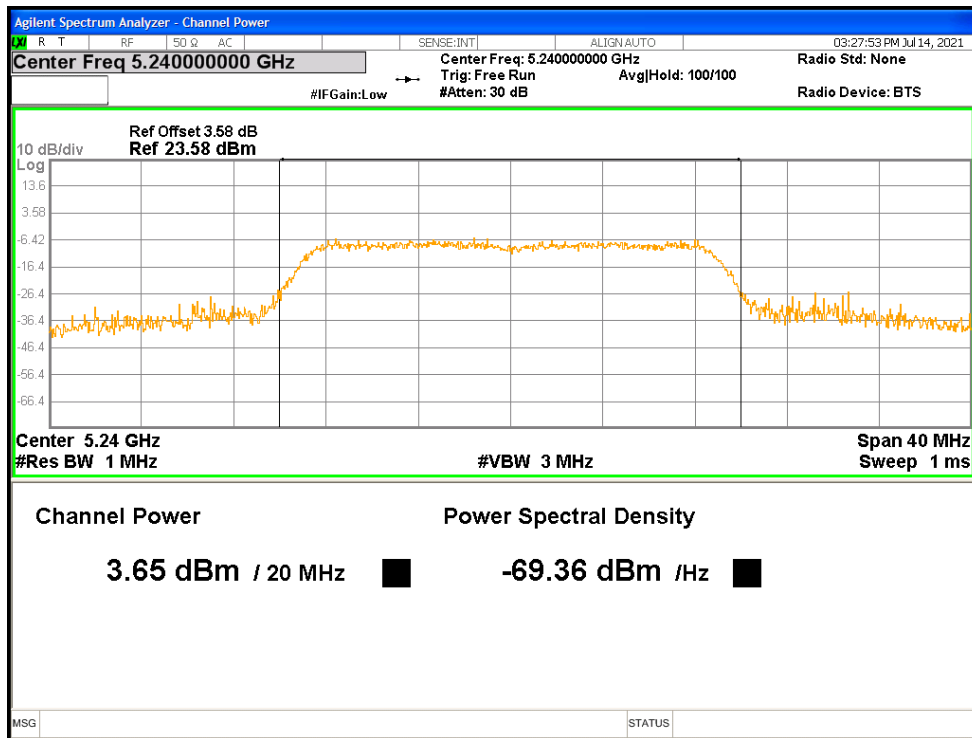


Power NVNT ac40 5190MHz Ant1

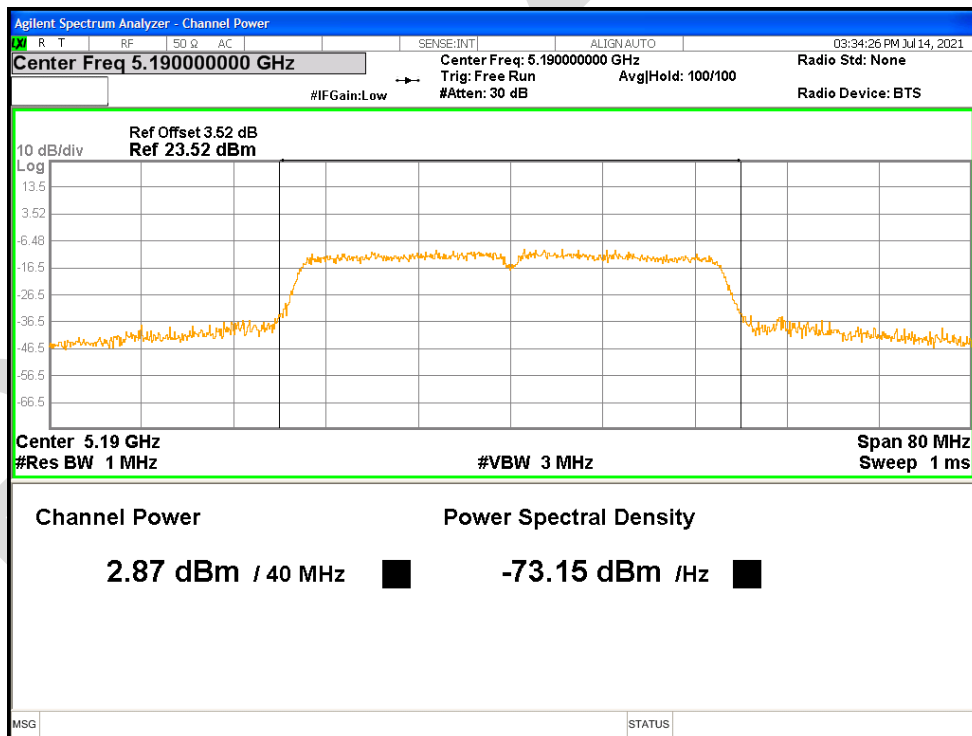


Power NVNT ac40 5230MHz Ant1

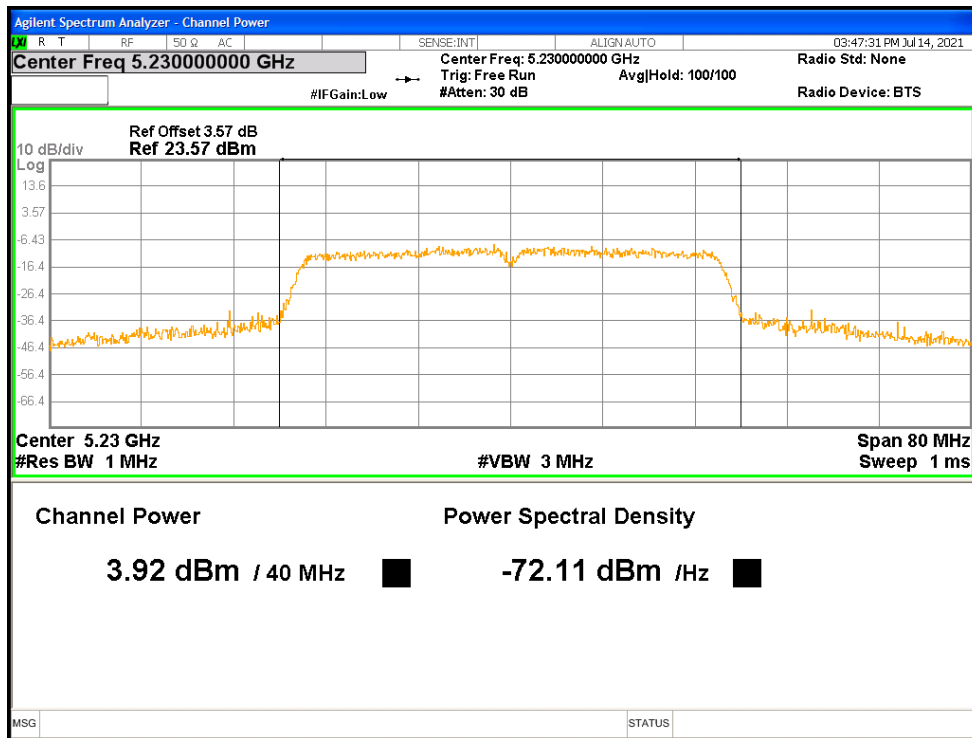


Power NVNT ac80 5210MHz Ant1

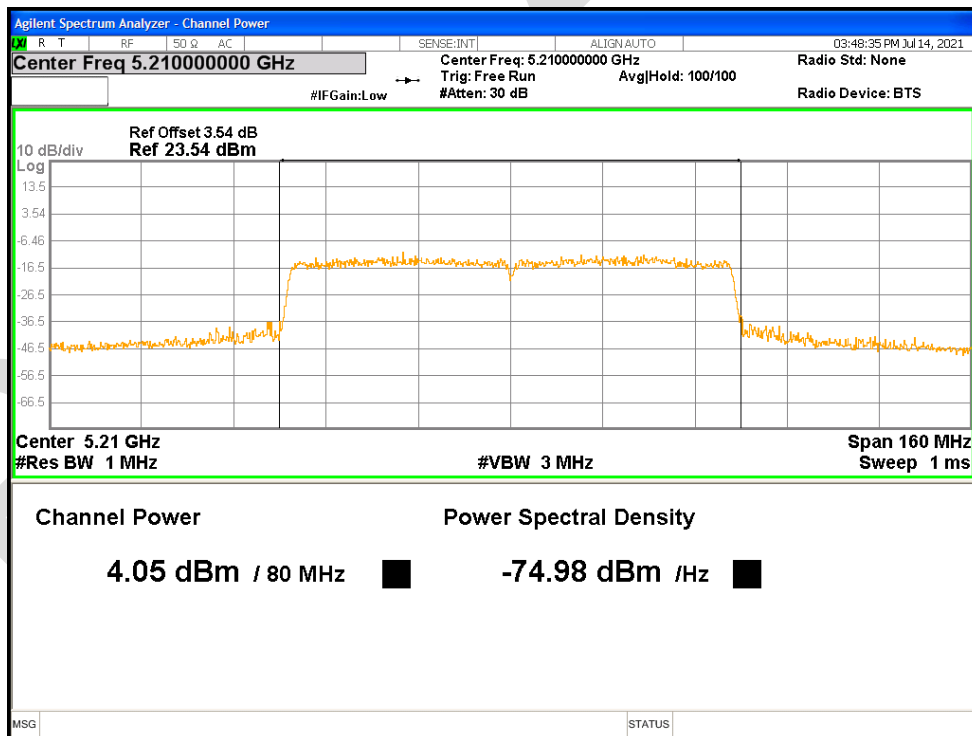


Power NVNT n20 5180MHz Ant1

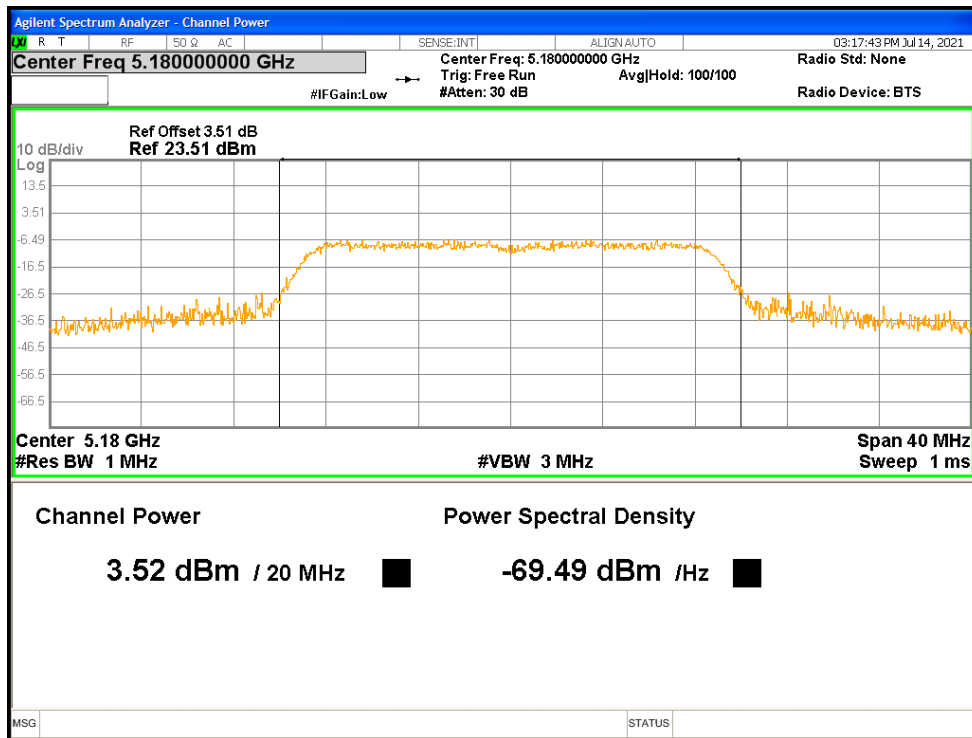


Power NVNT n20 5200MHz Ant1

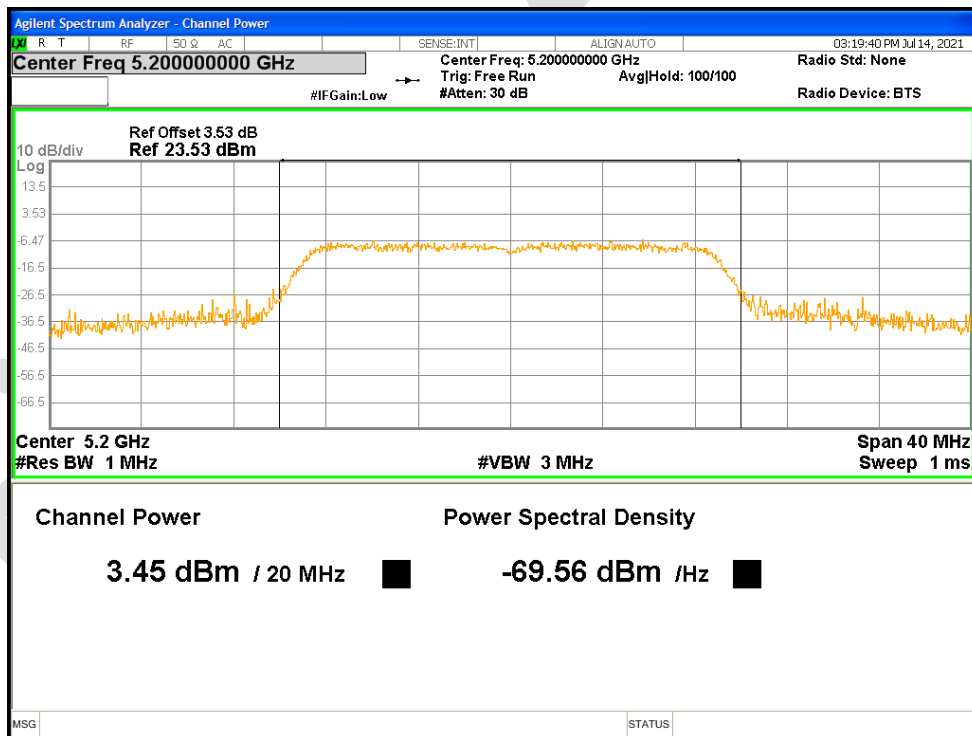


Power NVNT n20 5240MHz Ant1

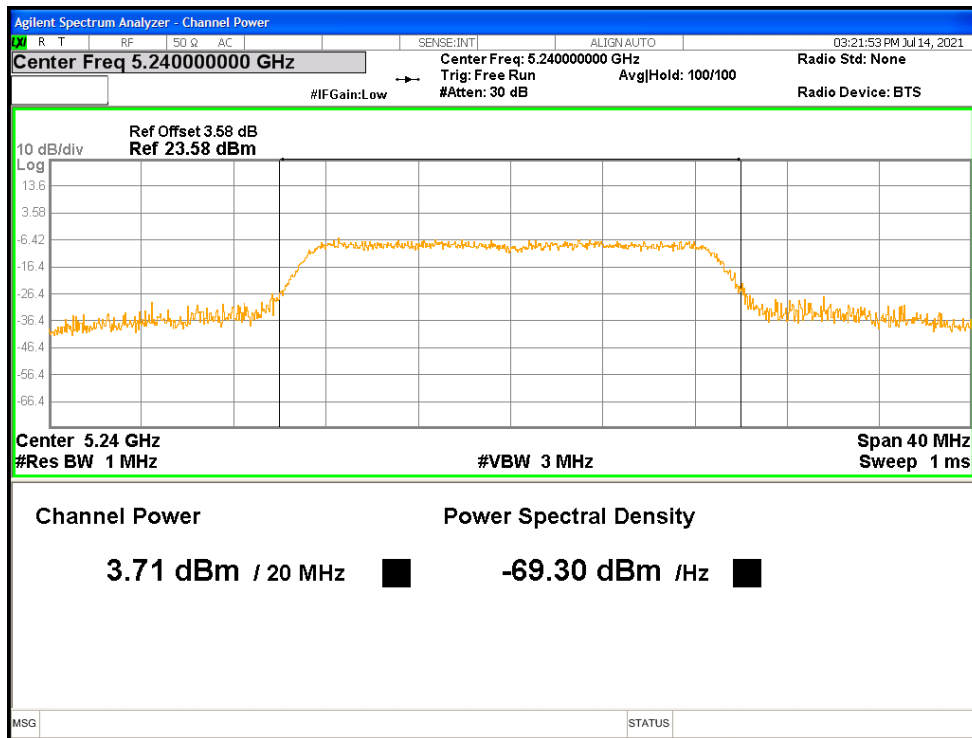

Power NVNT n40 5190MHz Ant1

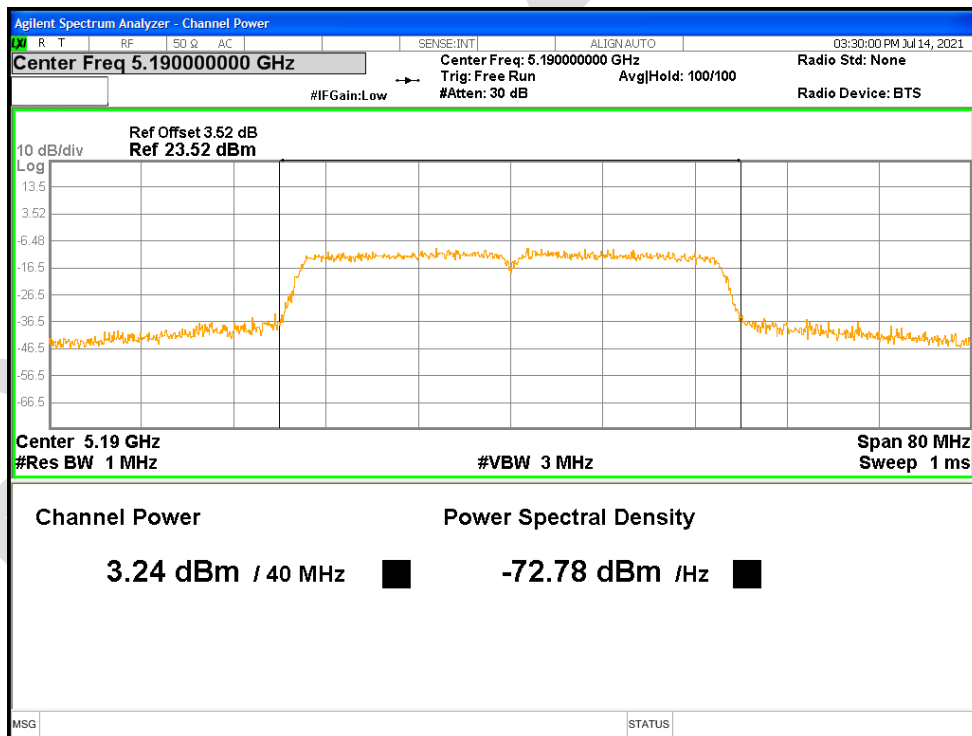


Power NVNT n40 5230MHz Ant1

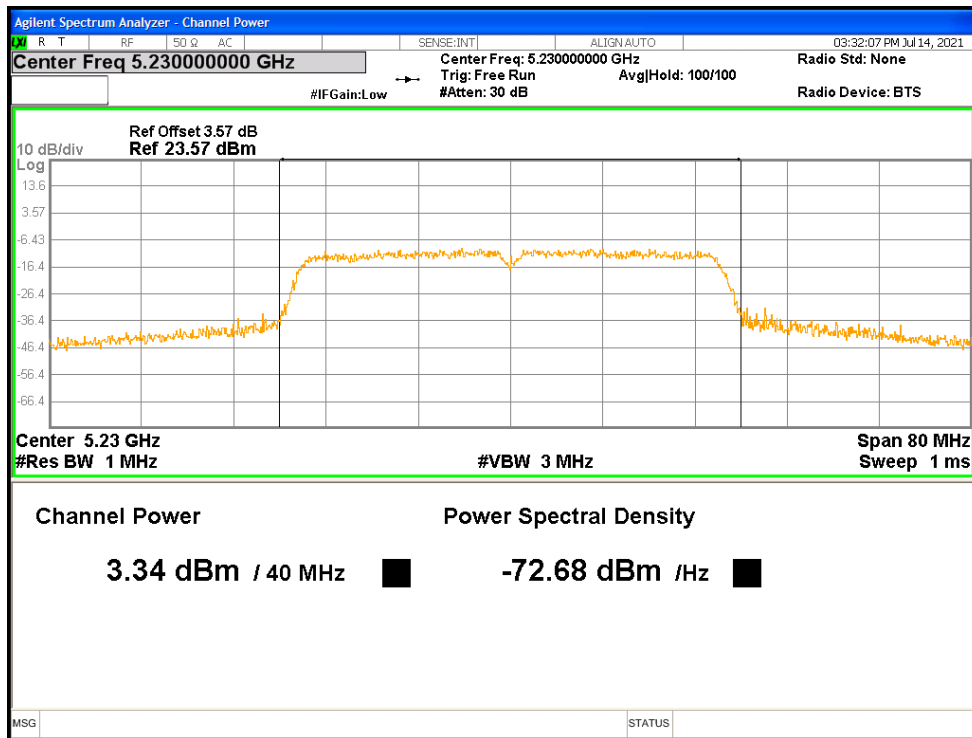


10.2 -26DB BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant1	28.411	0.5	Pass
NVNT	a	5200	Ant1	28.37	0.5	Pass
NVNT	a	5240	Ant1	26.776	0.5	Pass
NVNT	ac20	5180	Ant1	28.89	0.5	Pass
NVNT	ac20	5200	Ant1	28.976	0.5	Pass
NVNT	ac20	5240	Ant1	26.087	0.5	Pass
NVNT	ac40	5190	Ant1	43.753	0.5	Pass
NVNT	ac40	5230	Ant1	47.05	0.5	Pass
NVNT	ac80	5210	Ant1	83.105	0.5	Pass
NVNT	n20	5180	Ant1	28.782	0.5	Pass
NVNT	n20	5200	Ant1	28.968	0.5	Pass
NVNT	n20	5240	Ant1	28.316	0.5	Pass
NVNT	n40	5190	Ant1	45.214	0.5	Pass
NVNT	n40	5230	Ant1	39.47	0.5	Pass


-26dB Bandwidth NVNT a 5180MHz Ant1

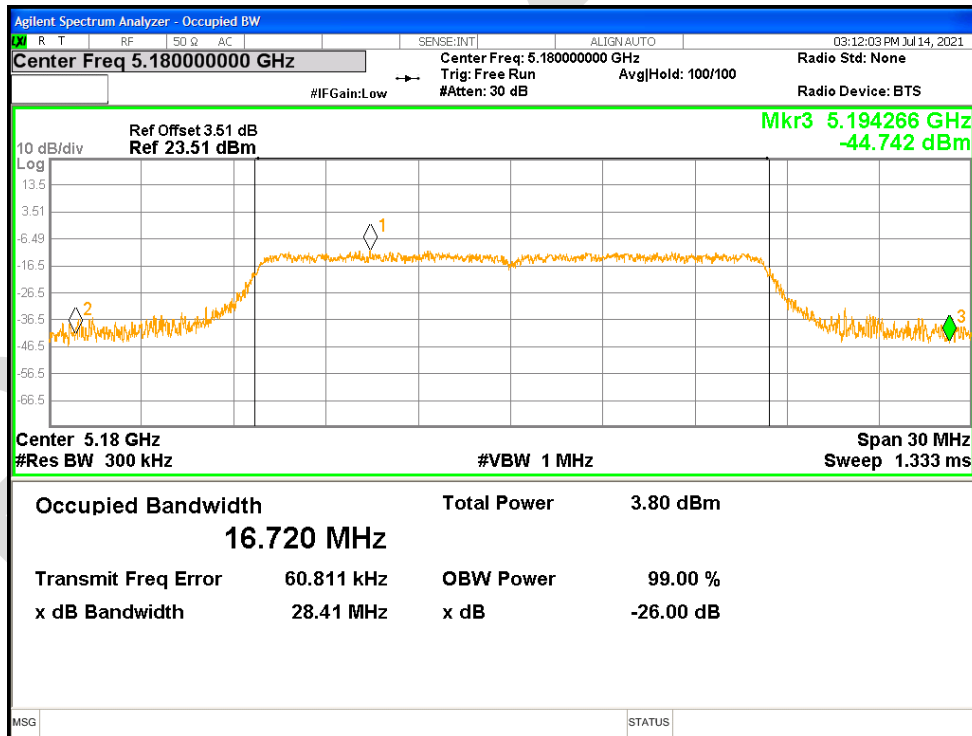


-26dB Bandwidth NVNT a 5200MHz Ant1

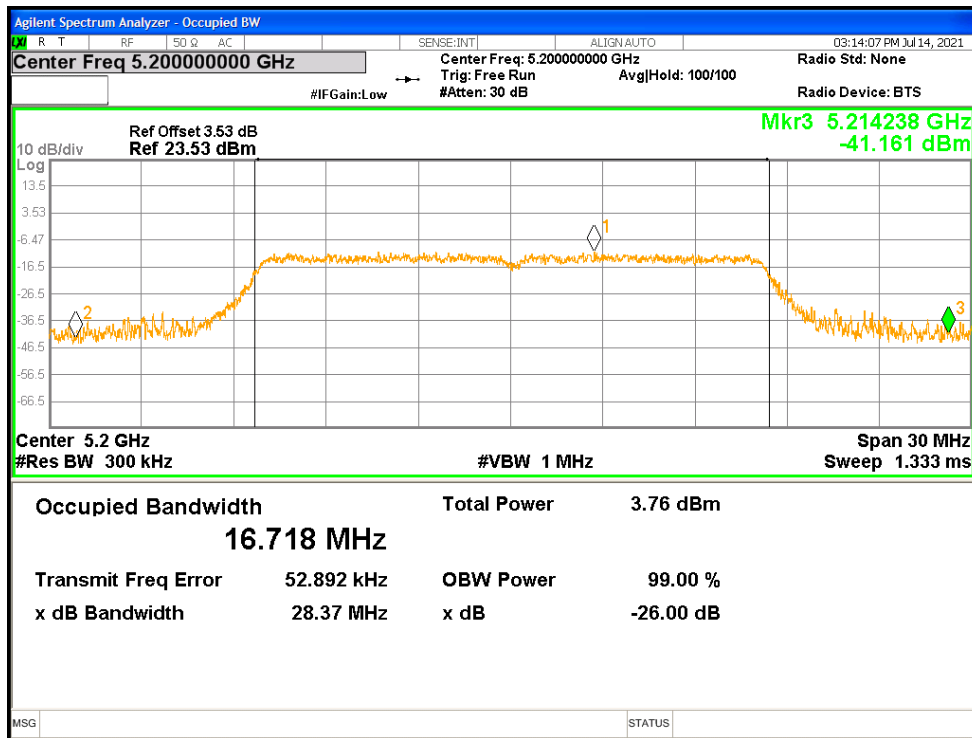


-26dB Bandwidth NVNT a 5240MHz Ant1

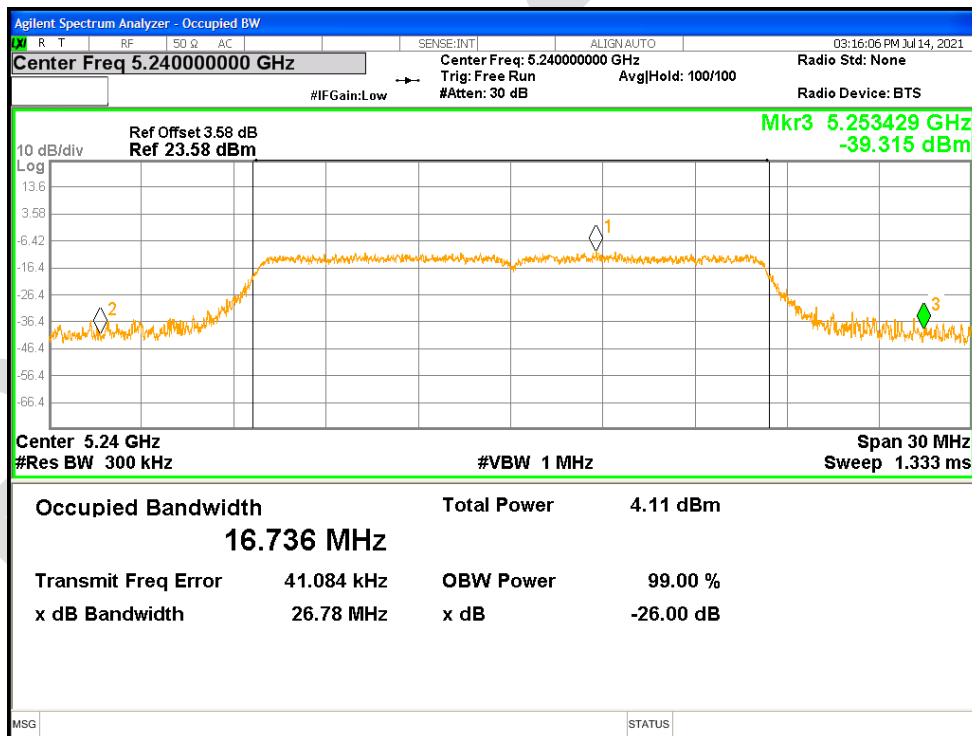


-26dB Bandwidth NVNT ac20 5180MHz Ant1

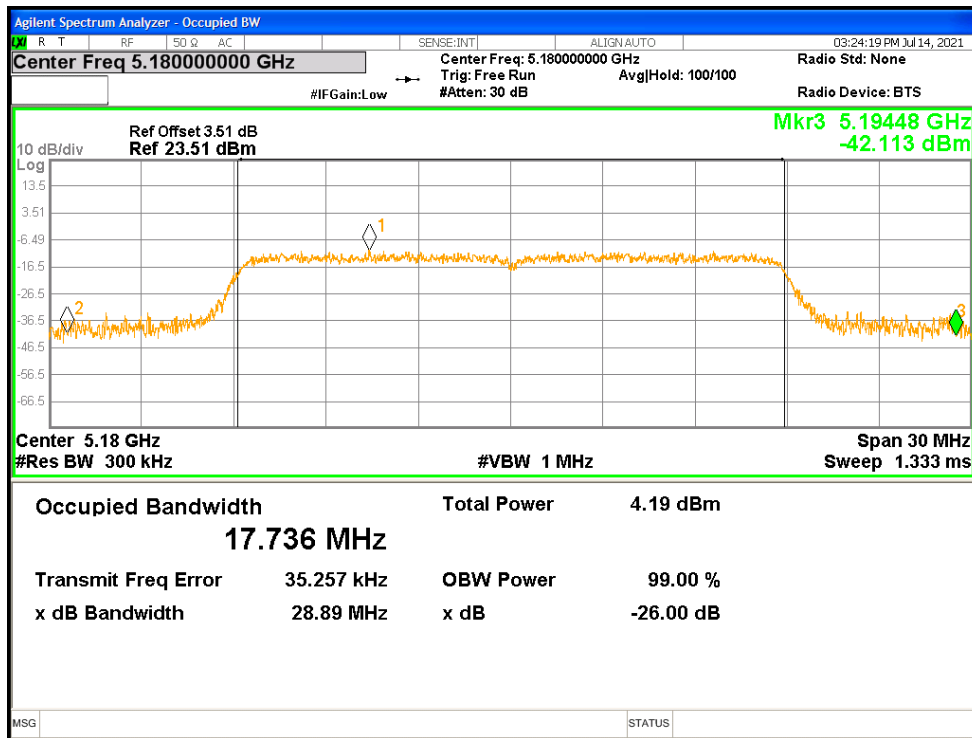


-26dB Bandwidth NVNT ac20 5200MHz Ant1

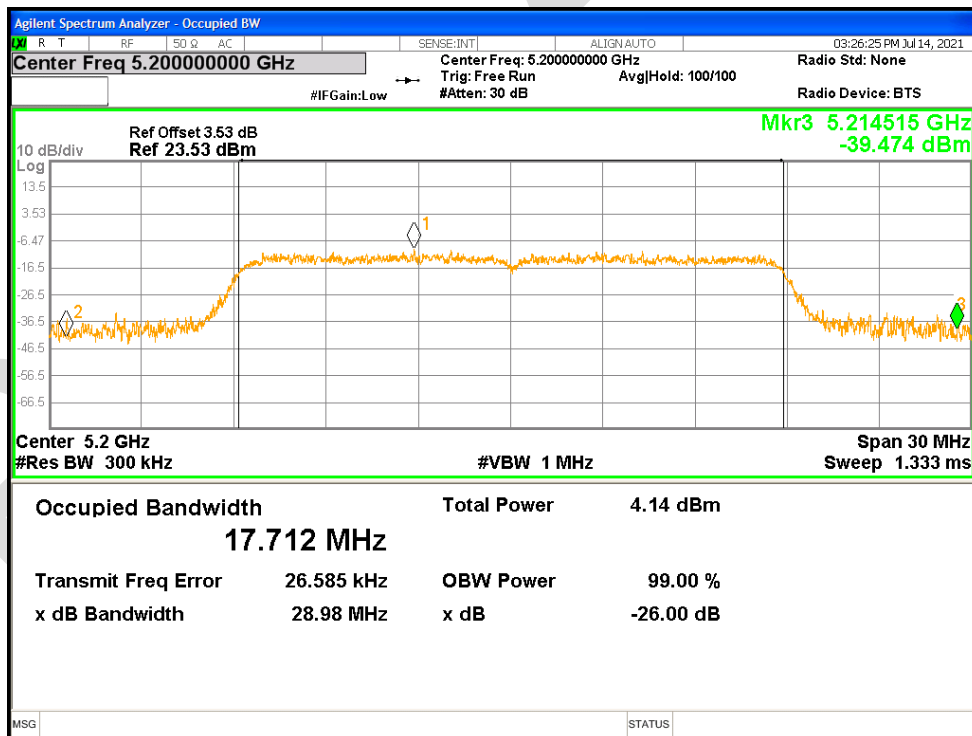


-26dB Bandwidth NVNT ac20 5240MHz Ant1

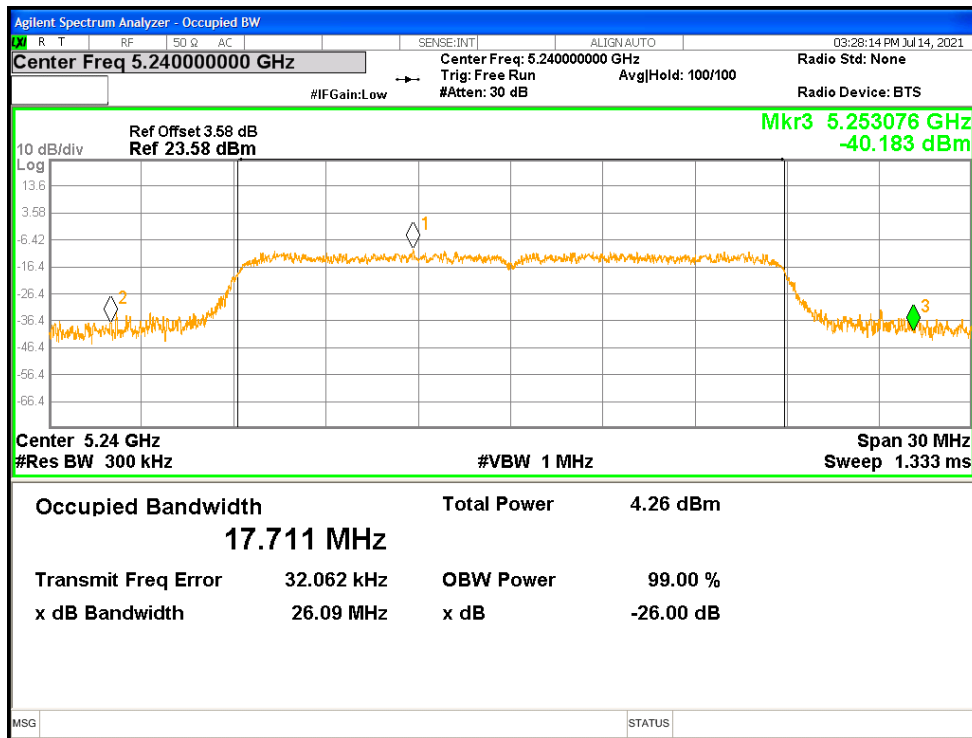


-26dB Bandwidth NVNT ac40 5190MHz Ant1

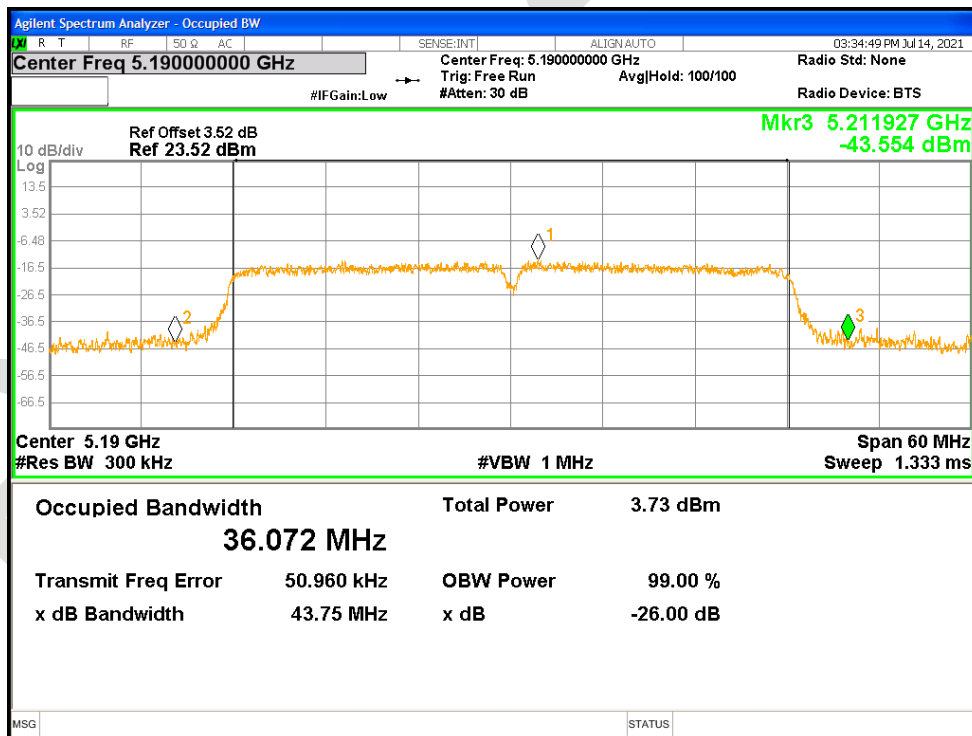


-26dB Bandwidth NVNT ac40 5230MHz Ant1

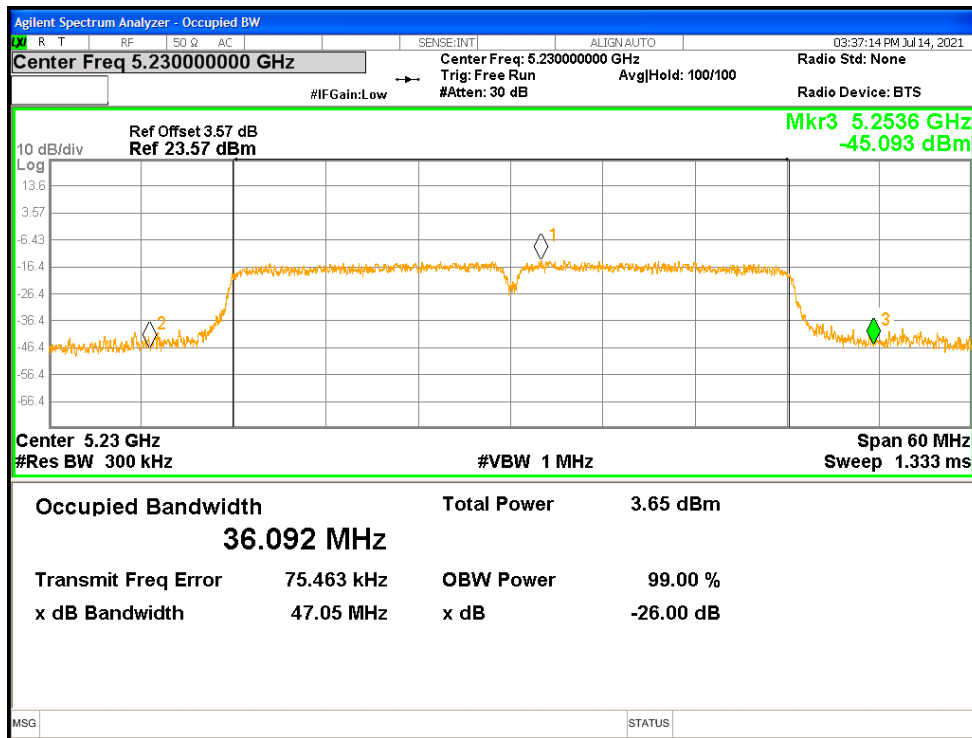


-26dB Bandwidth NVNT ac80 5210MHz Ant1

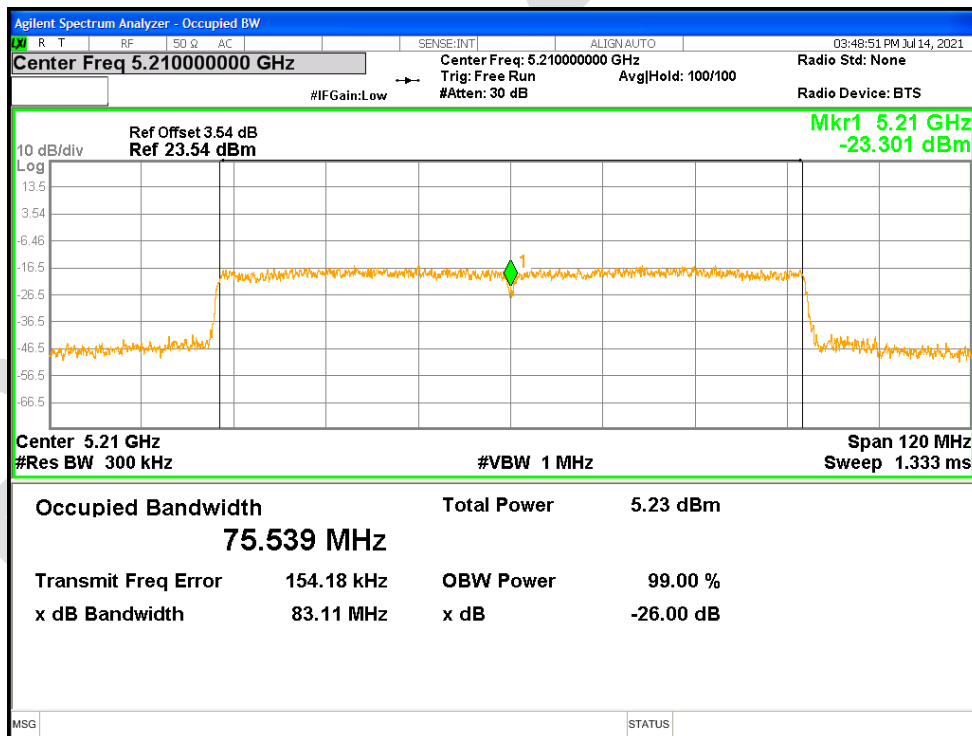


-26dB Bandwidth NVNT n20 5180MHz Ant1

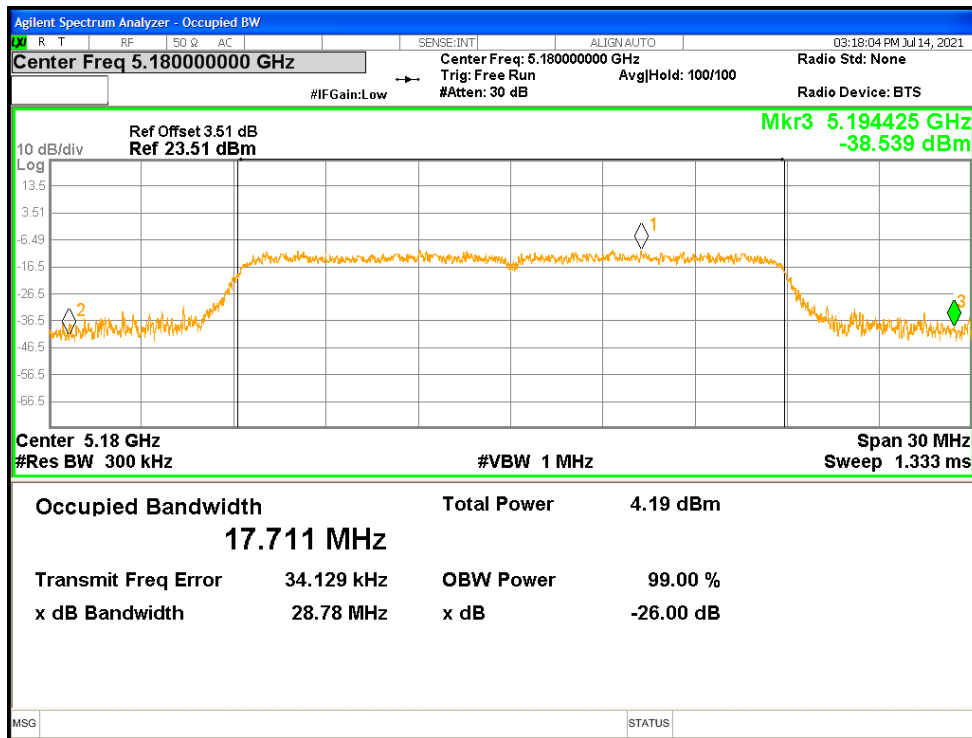


-26dB Bandwidth NVNT n20 5200MHz Ant 1

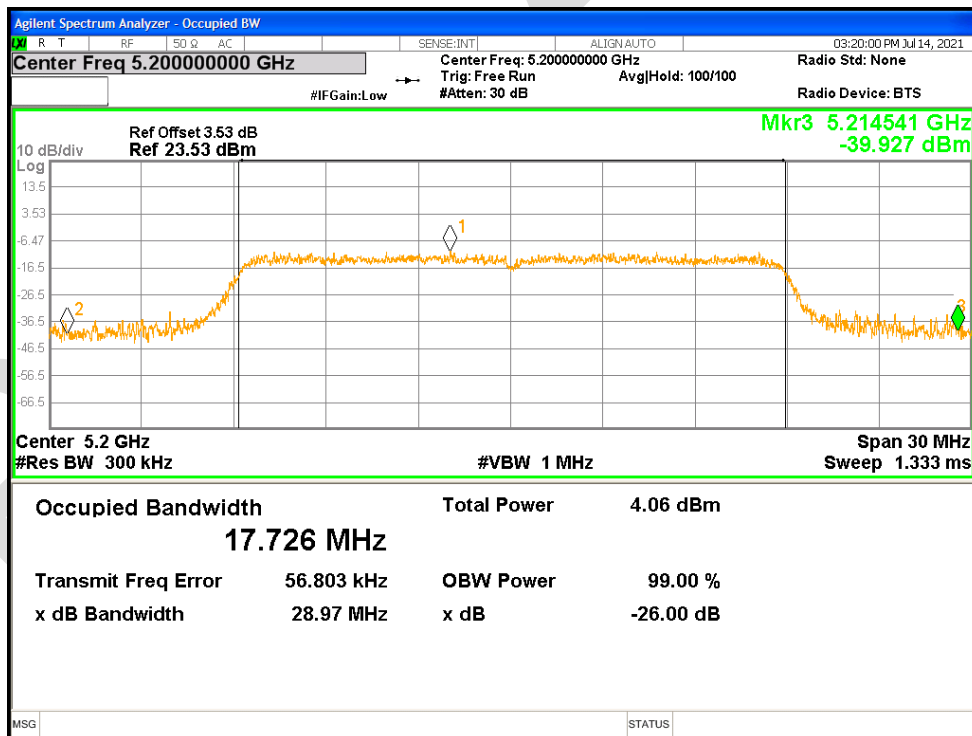


-26dB Bandwidth NVNT n20 5240MHz Ant 1

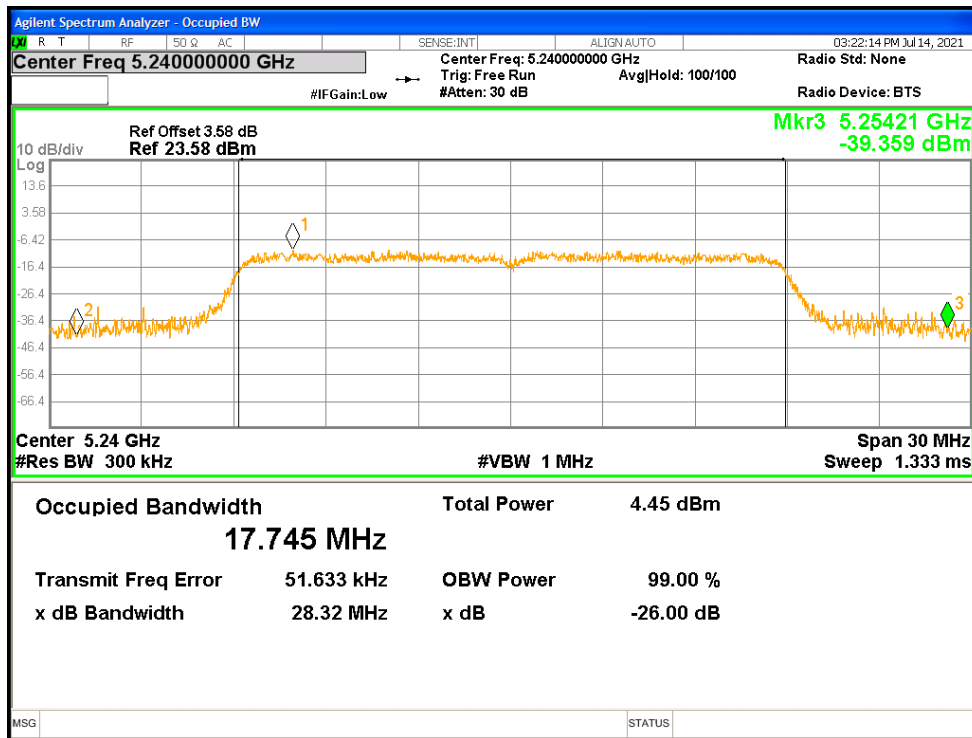

-26dB Bandwidth NVNT n40 5190MHz Ant 1

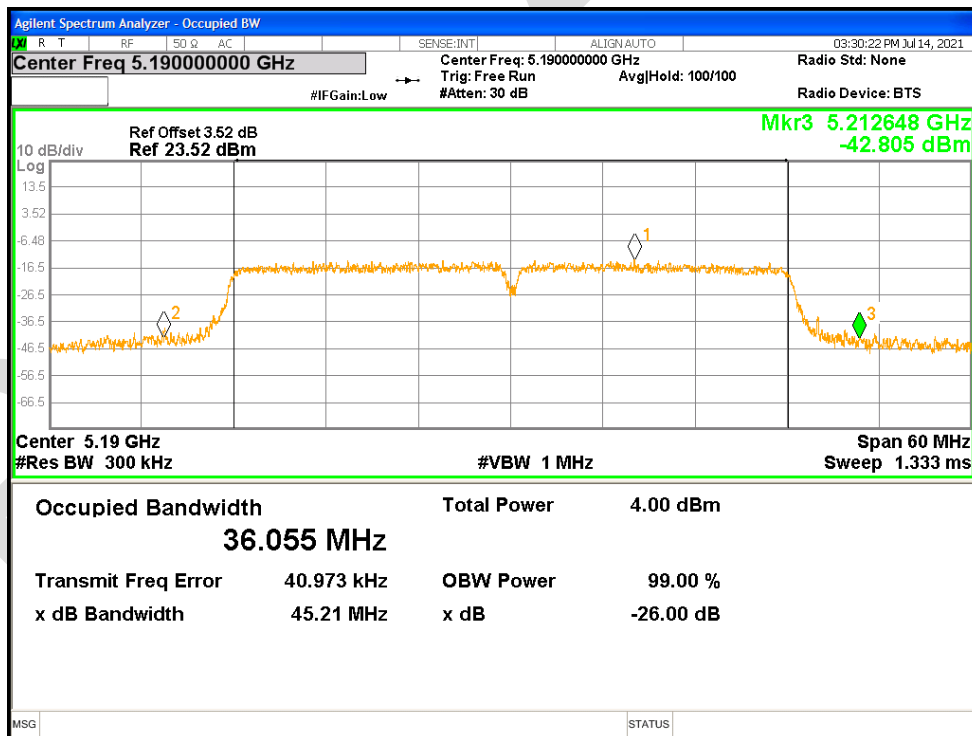


-26dB Bandwidth NVNT n40 5230MHz Ant 1

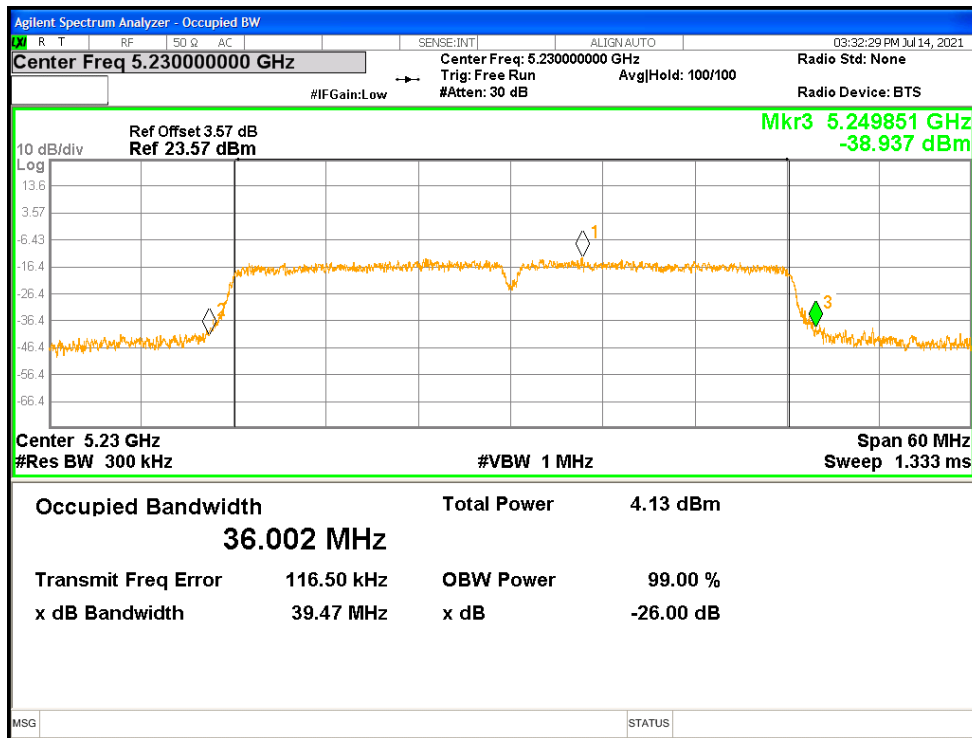


10.3 OCCUPIED CHANNEL BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5180	Ant1	16.55516675
NVNT	a	5200	Ant1	16.59826044
NVNT	a	5240	Ant1	16.55763756
NVNT	ac20	5180	Ant1	17.65025978
NVNT	ac20	5200	Ant1	17.63879919
NVNT	ac20	5240	Ant1	17.64524841
NVNT	ac40	5190	Ant1	36.0629378
NVNT	ac40	5230	Ant1	36.08176829
NVNT	ac80	5210	Ant1	75.57588424
NVNT	n20	5180	Ant1	17.6530173
NVNT	n20	5200	Ant1	17.62054123
NVNT	n20	5240	Ant1	17.63344102
NVNT	n40	5190	Ant1	36.12571498
NVNT	n40	5230	Ant1	36.1001941


OBW NVNT a 5180MHz Ant1

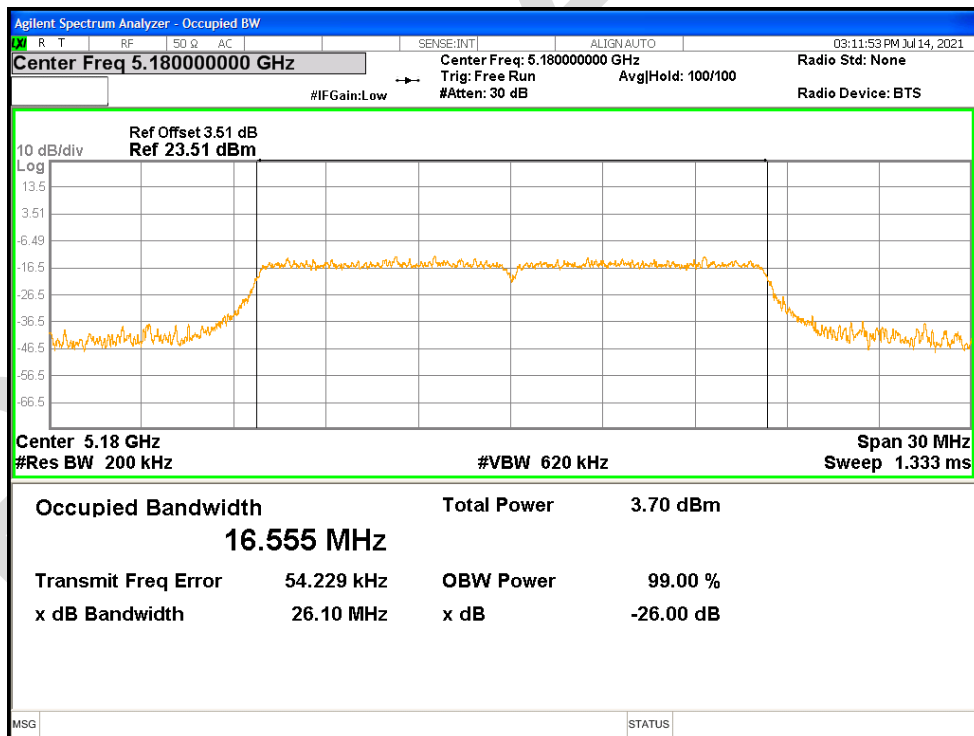


OBW NVNT a 5200MHz Ant1

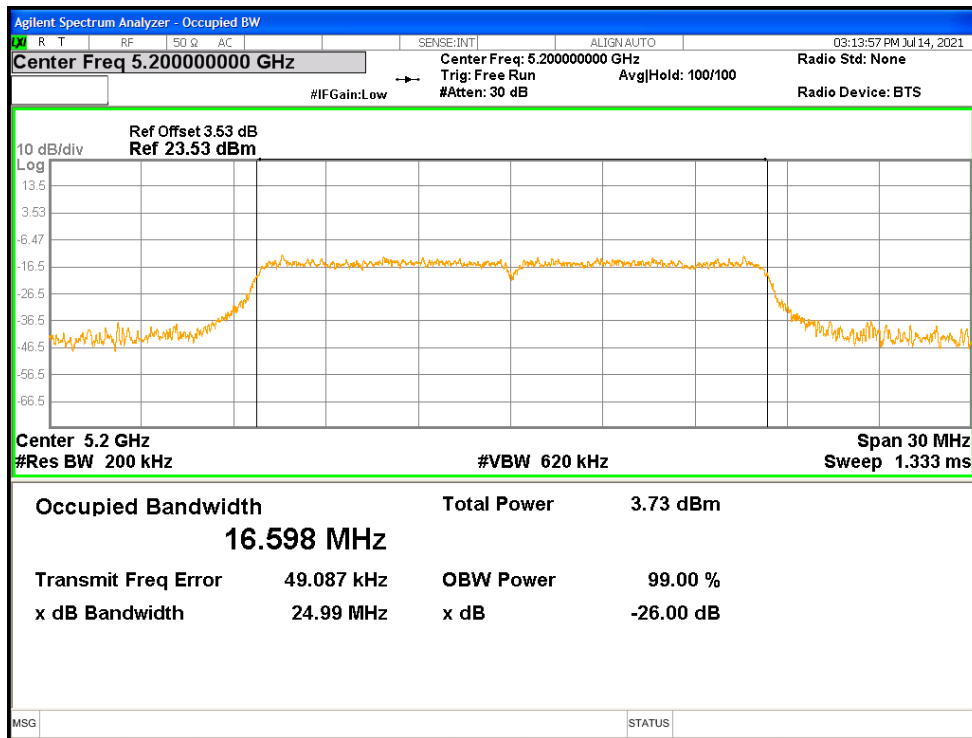


OBW NVNT a 5240MHz Ant1

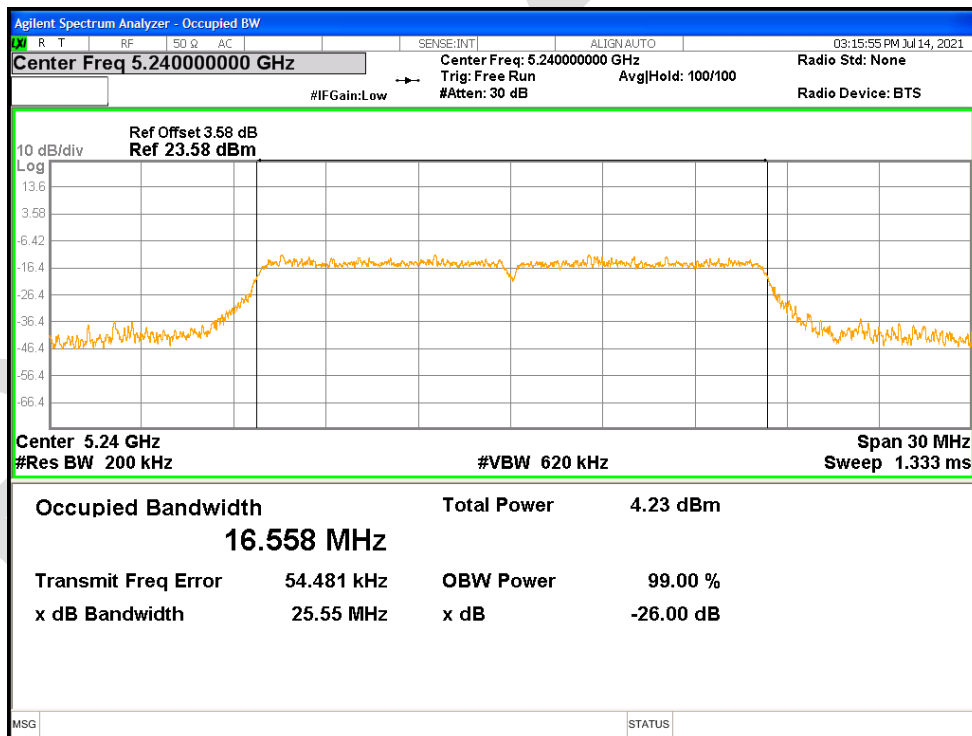


OBW NVNT ac20 5180MHz Ant1

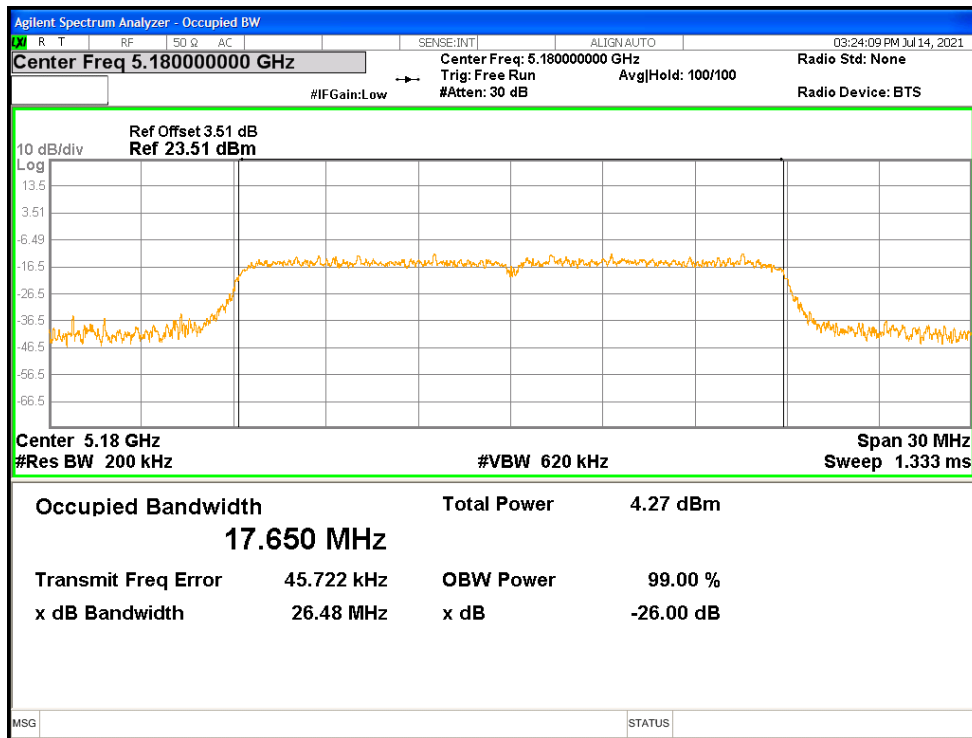


OBW NVNT ac20 5200MHz Ant1

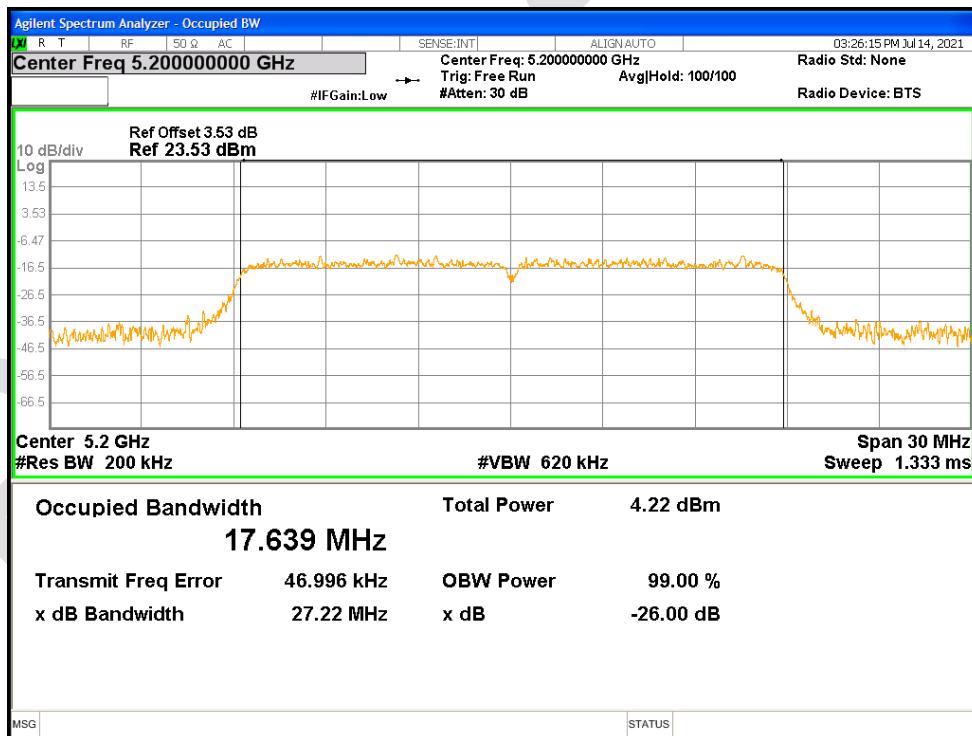


OBW NVNT ac20 5240MHz Ant1

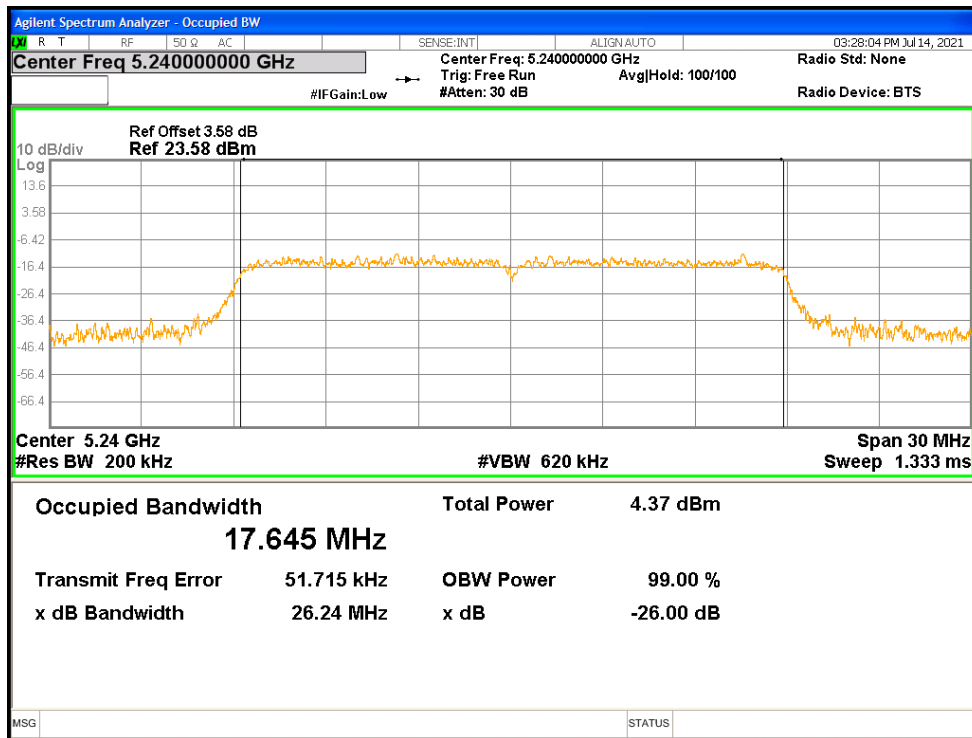


OBW NVNT ac40 5190MHz Ant1

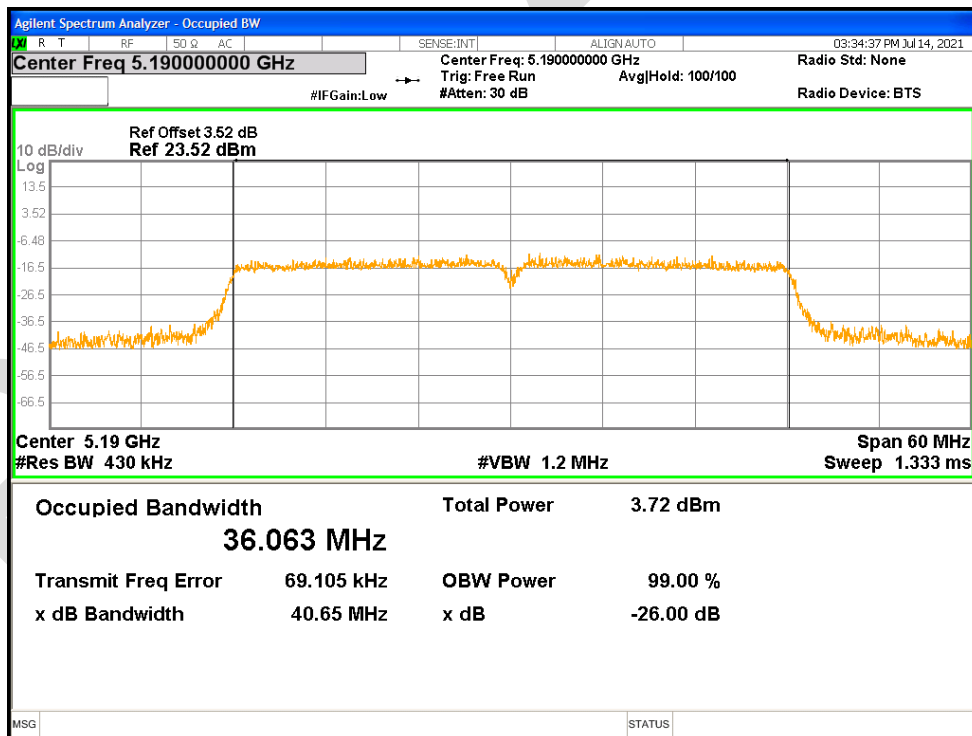


OBW NVNT ac40 5230MHz Ant1

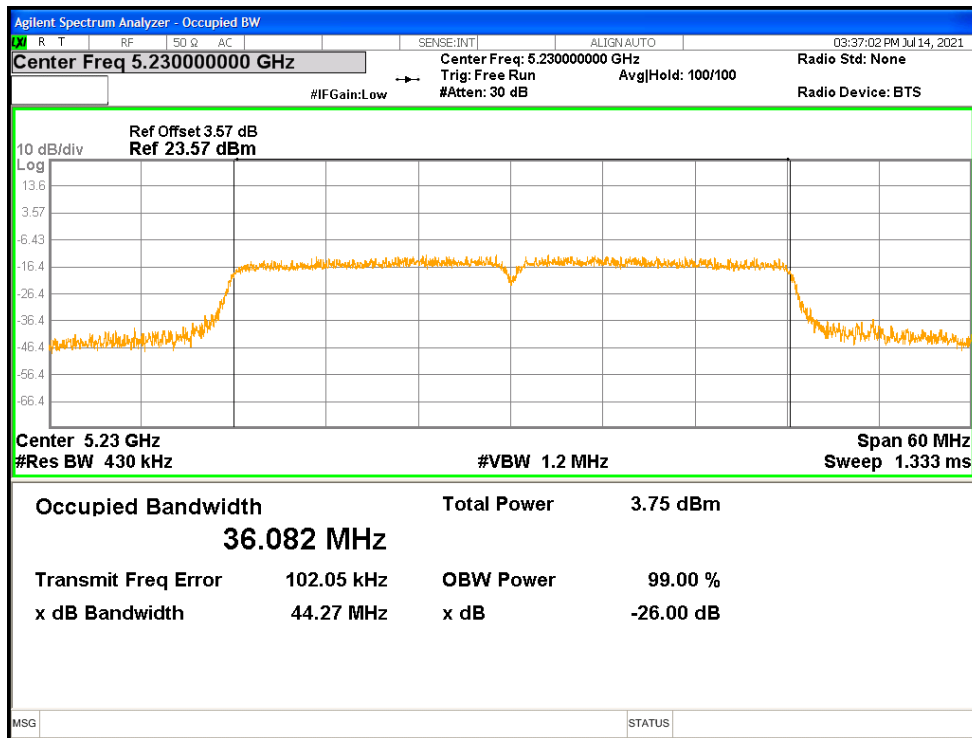


OBW NVNT ac80 5210MHz Ant1

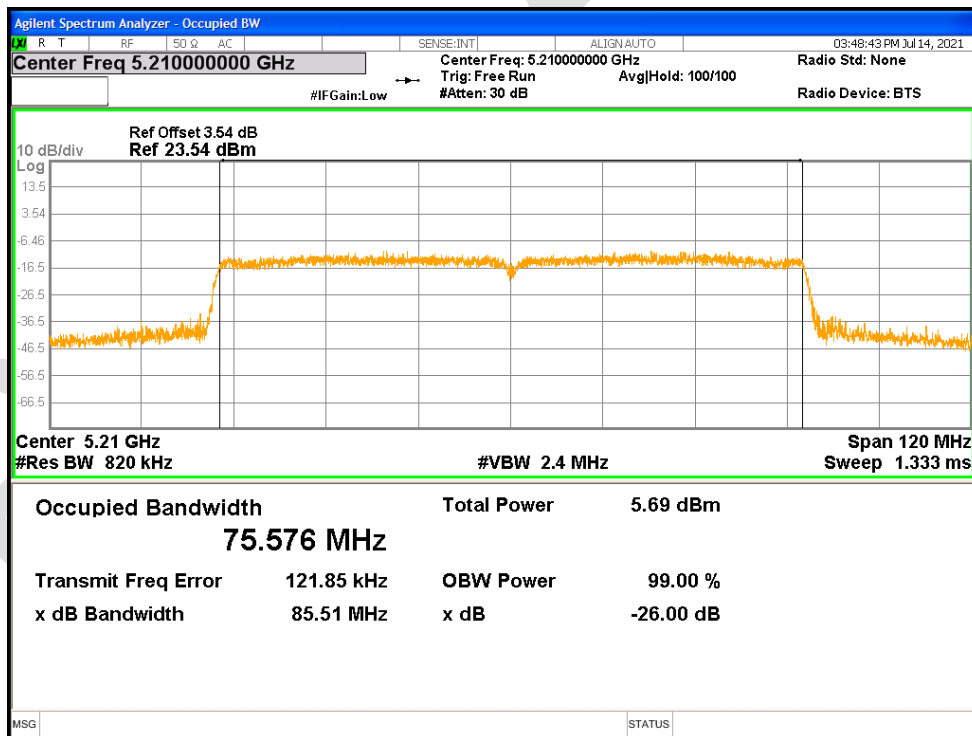


OBW NVNT n20 5180MHz Ant1

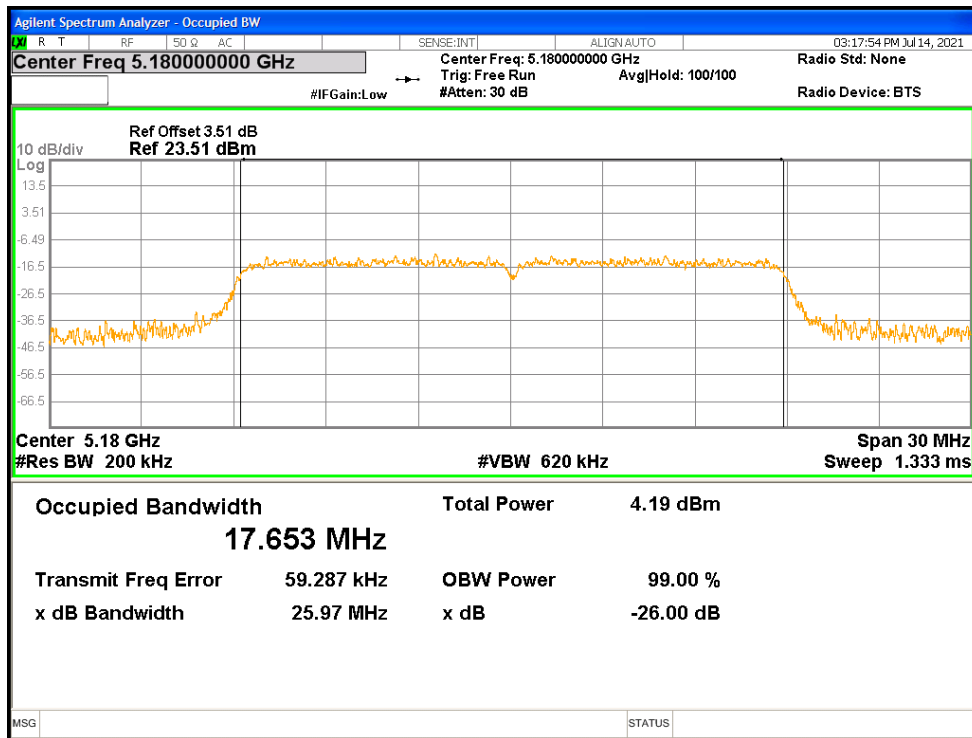


OBW NVNT n20 5200MHz Ant1

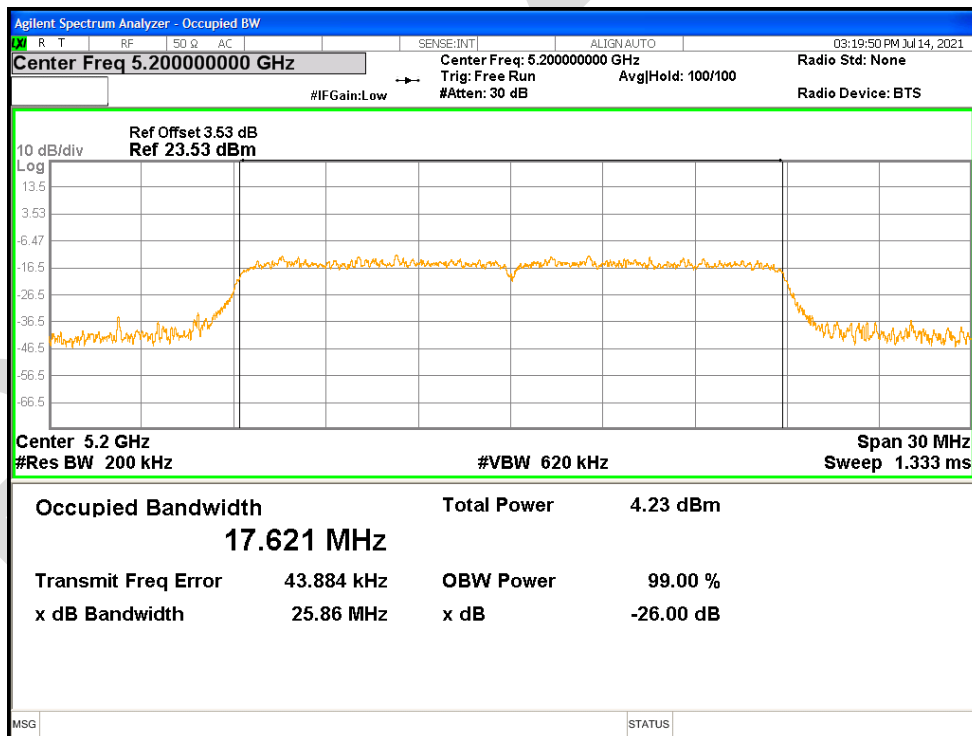


OBW NVNT n20 5240MHz Ant1

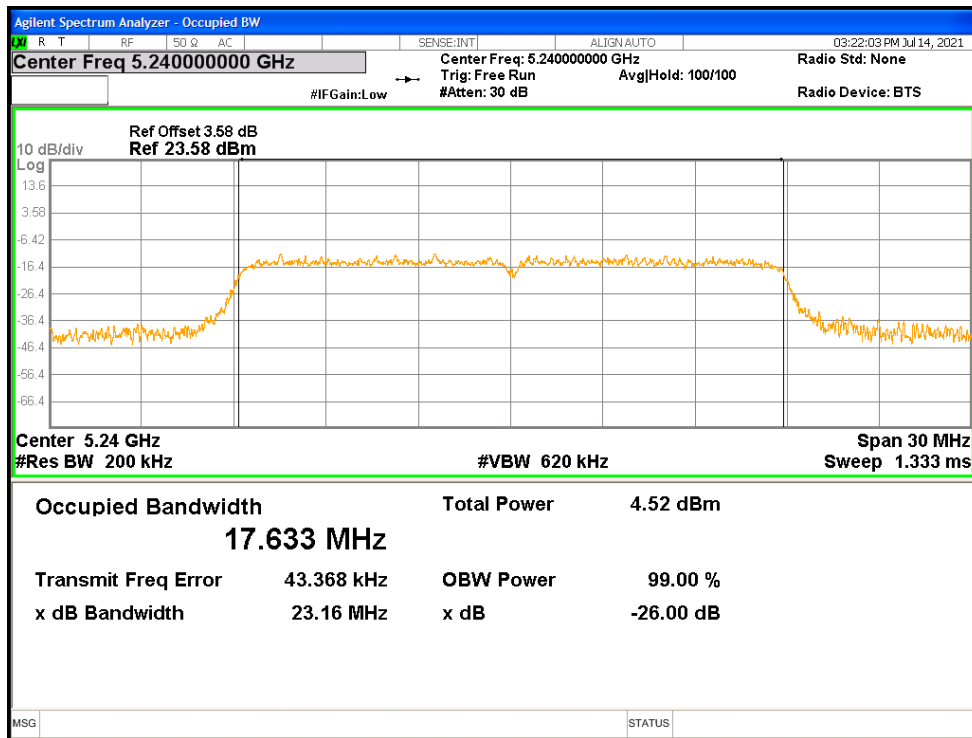

OBW NVNT n40 5190MHz Ant1

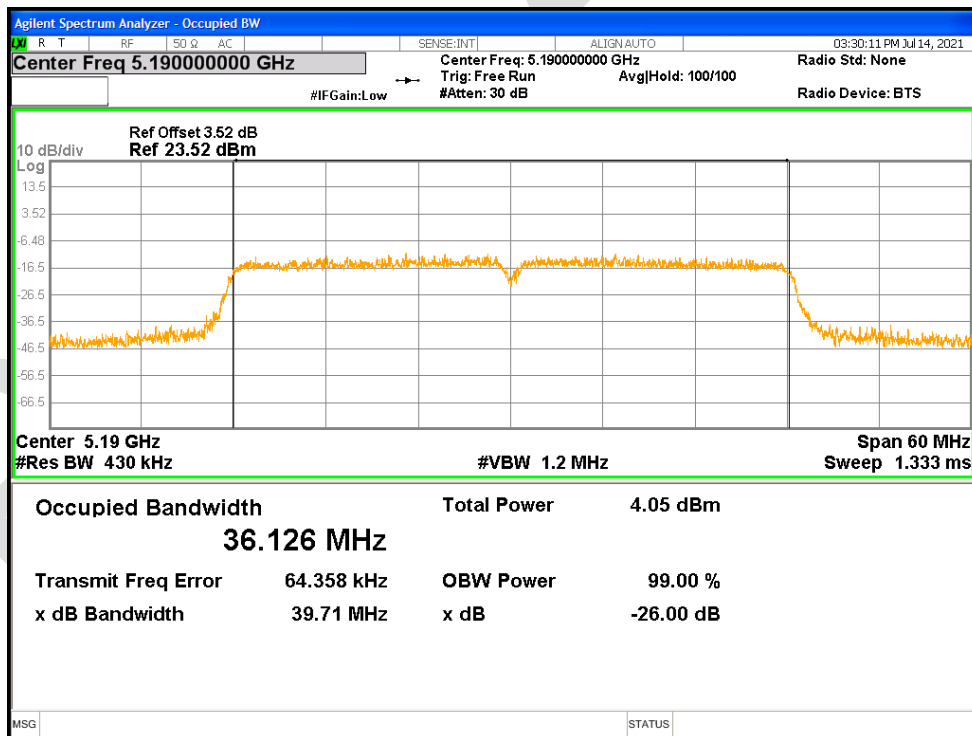


OBW NVNT n40 5230MHz Ant1

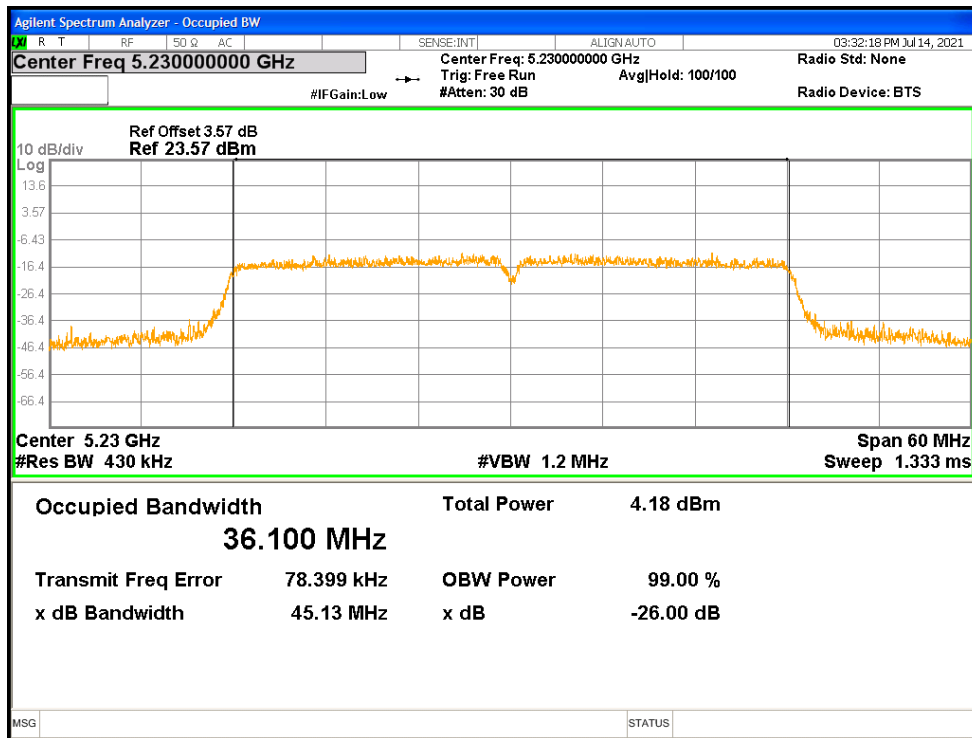


10.4 MAXIMUM POWER SPECTRAL DENSITY LEVEL

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	-5.086	11	Pass
NVNT	a	5200	Ant1	-5	11	Pass
NVNT	a	5240	Ant1	-4.582	11	Pass
NVNT	ac20	5180	Ant1	-4.078	11	Pass
NVNT	ac20	5200	Ant1	-3.746	11	Pass
NVNT	ac20	5240	Ant1	-3.817	11	Pass
NVNT	ac40	5190	Ant1	-7.166	11	Pass
NVNT	ac40	5230	Ant1	-7.718	11	Pass
NVNT	ac80	5210	Ant1	-9.26	11	Pass
NVNT	n20	5180	Ant1	-3.693	11	Pass
NVNT	n20	5200	Ant1	-4.169	11	Pass
NVNT	n20	5240	Ant1	-3.234	11	Pass
NVNT	n40	5190	Ant1	-6.92	11	Pass
NVNT	n40	5230	Ant1	-7.161	11	Pass


PSD NVNT a 5180MHz Ant1

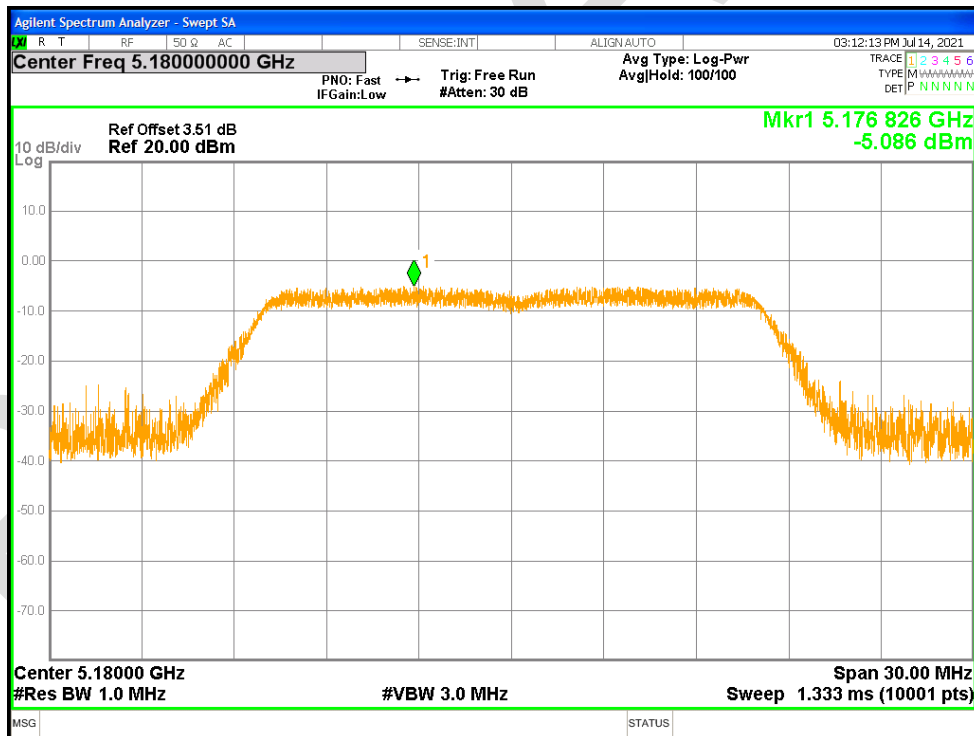


PSD NVNT a 5200MHz Ant1

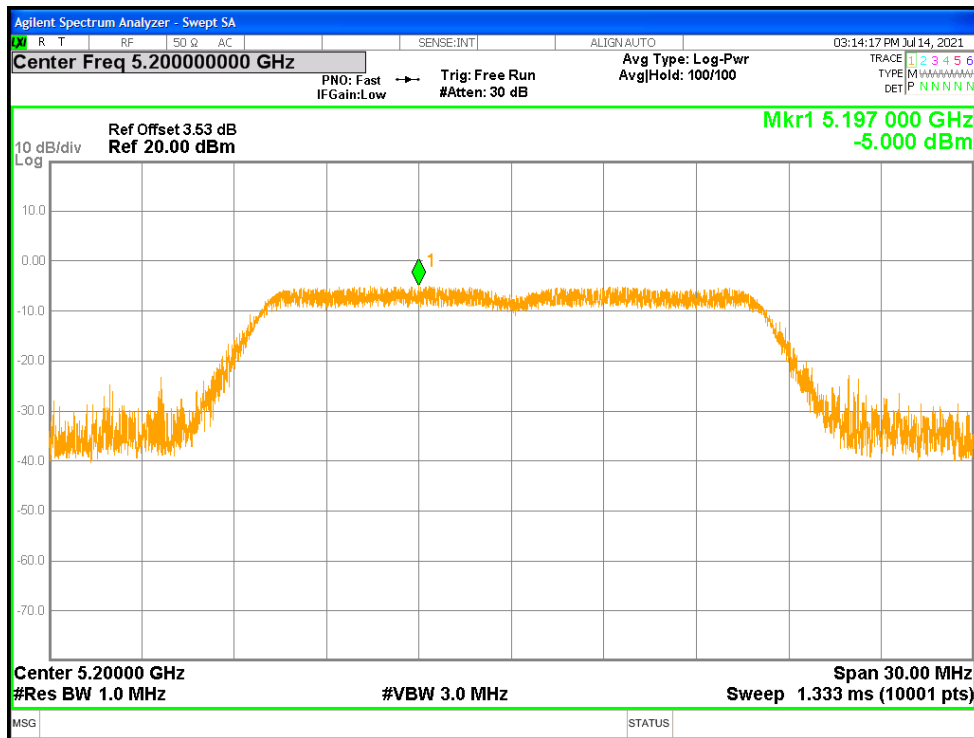


PSD NVNT a 5240MHz Ant1

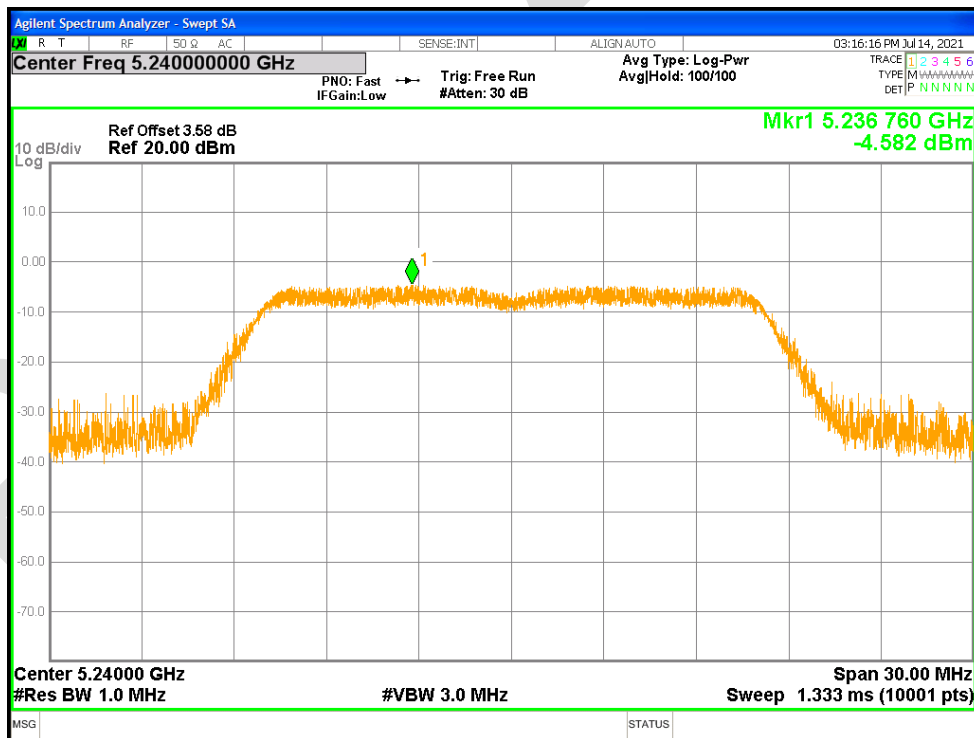


PSD NVNT ac20 5180MHz Ant1

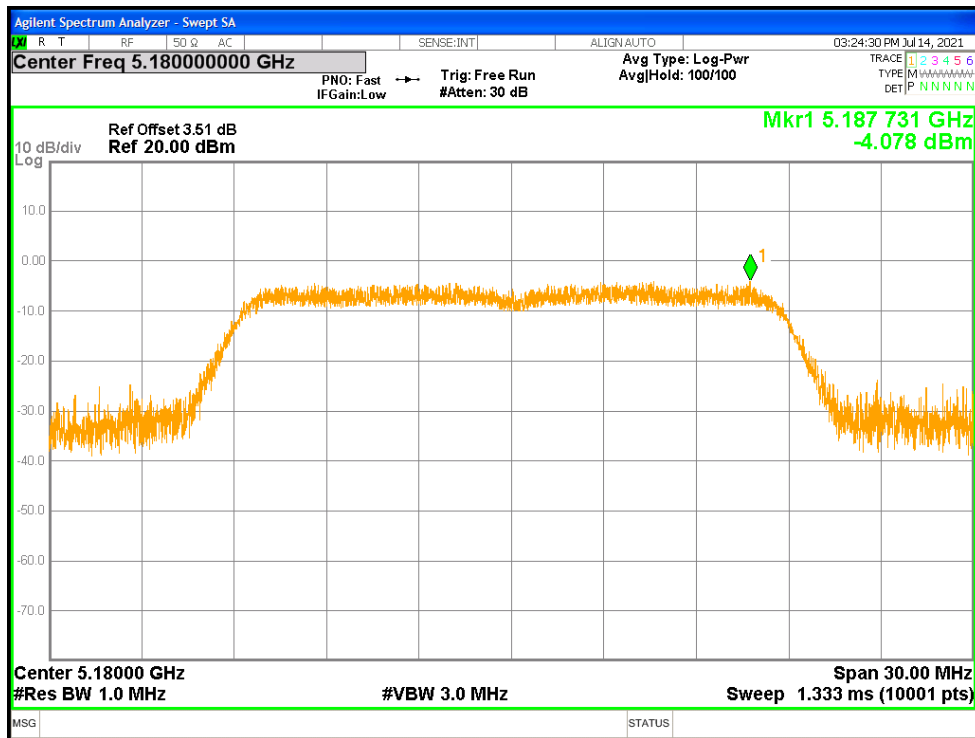


PSD NVNT ac20 5200MHz Ant1

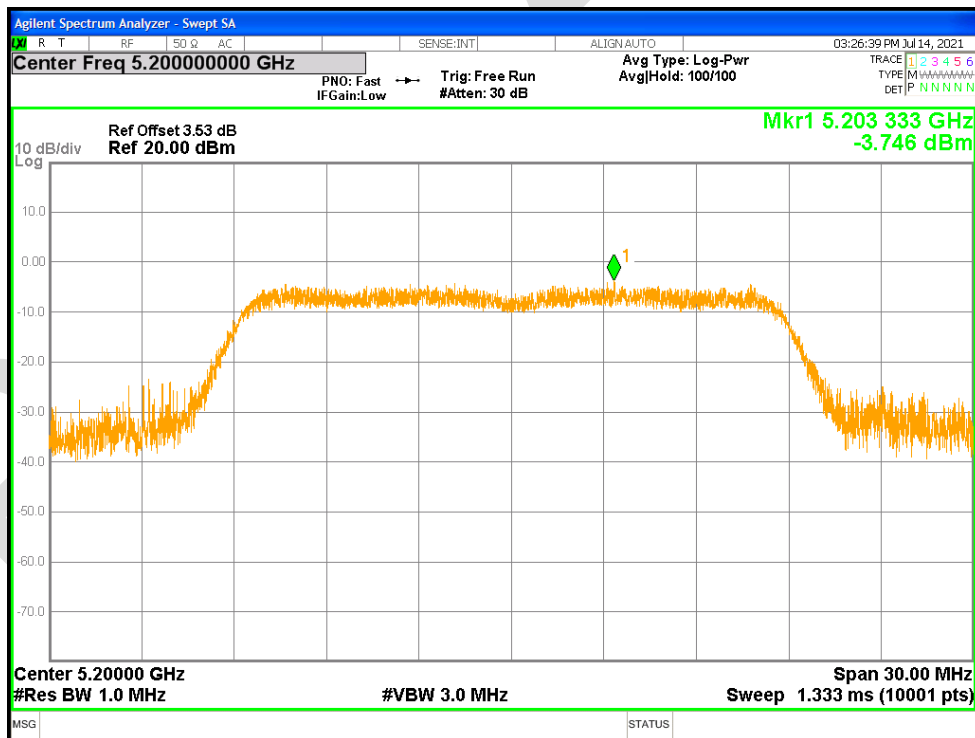


PSD NVNT ac20 5240MHz Ant1

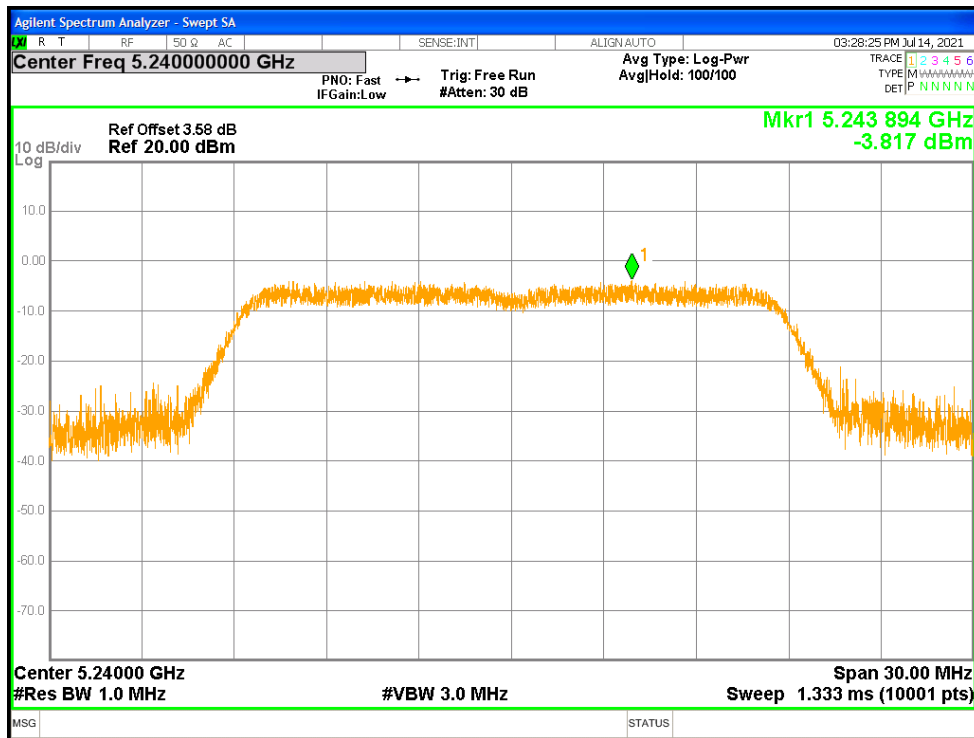


PSD NVNT ac40 5190MHz Ant1

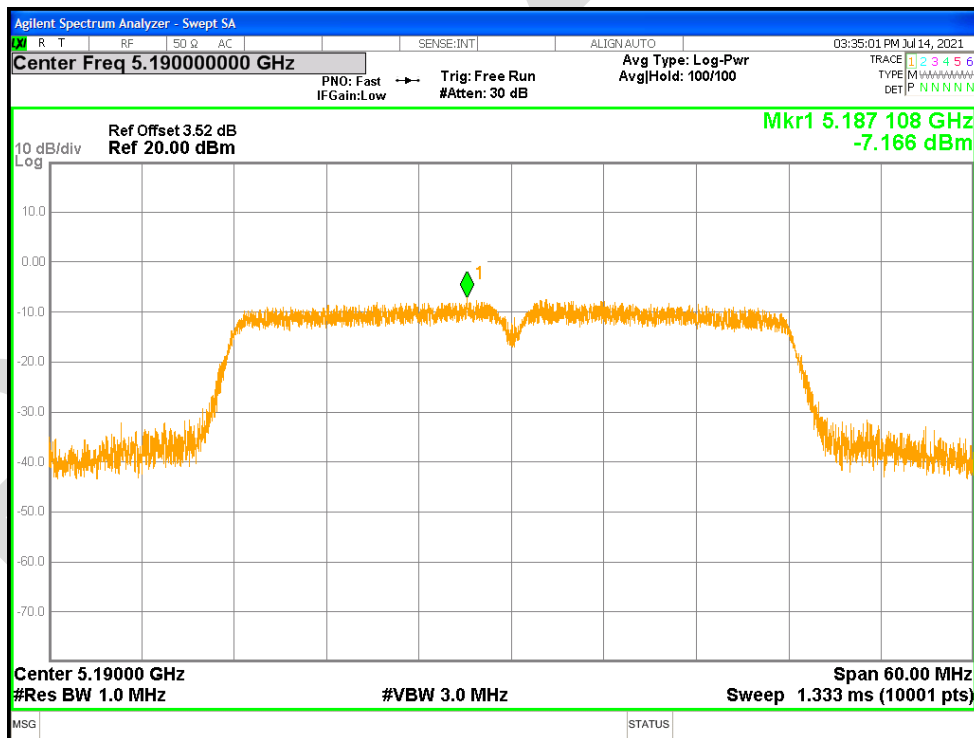


PSD NVNT ac40 5230MHz Ant1

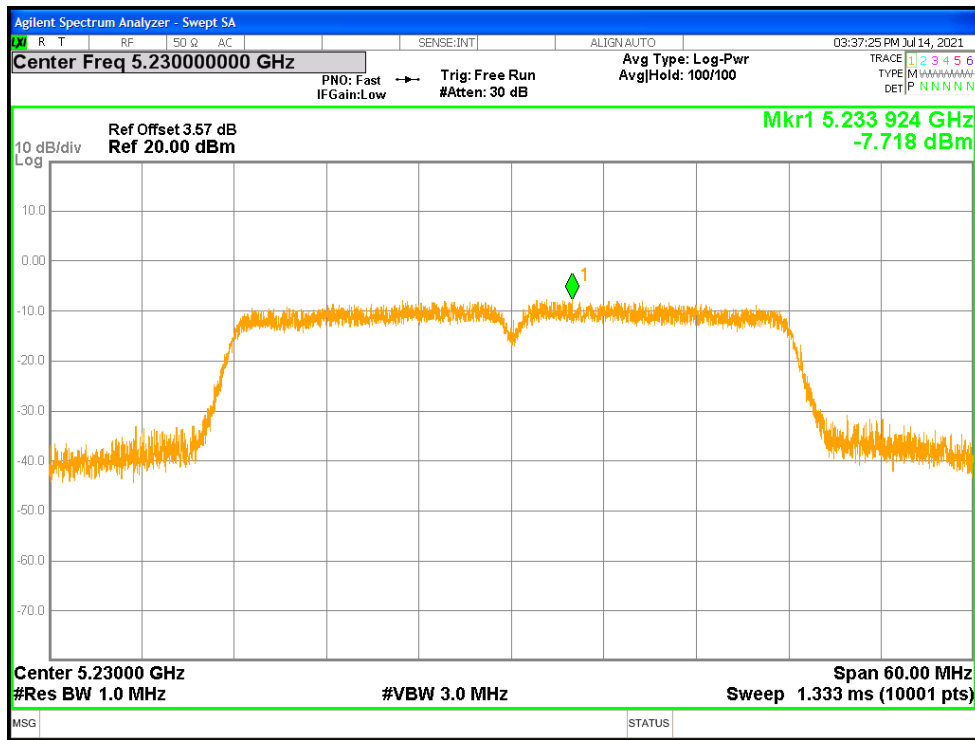


PSD NVNT ac80 5210MHz Ant1

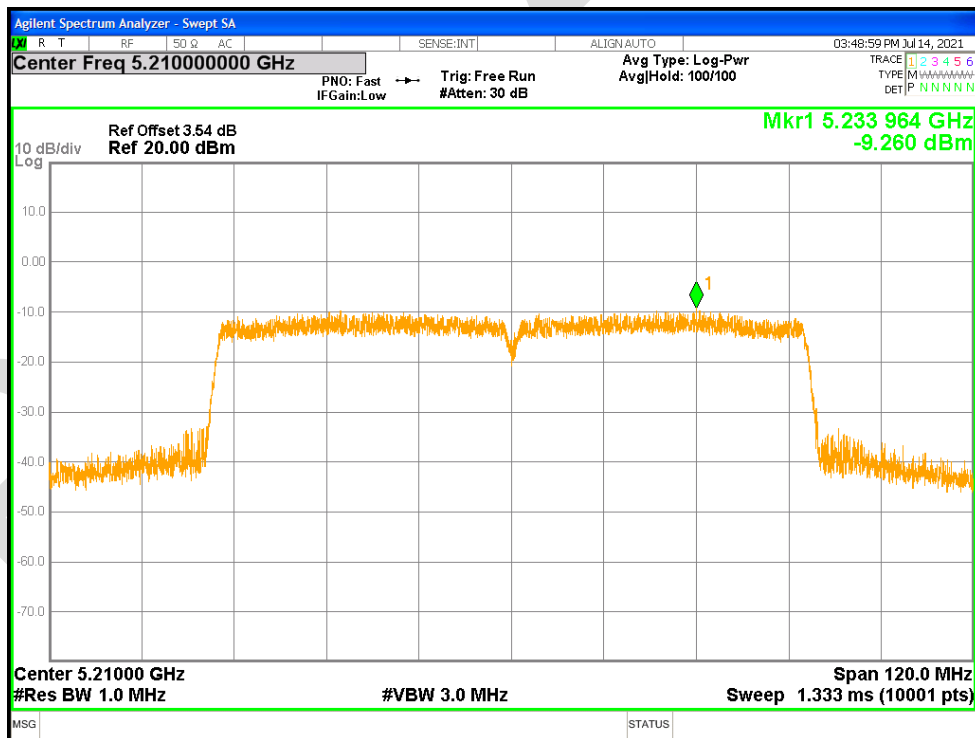


PSD NVNT n20 5180MHz Ant1

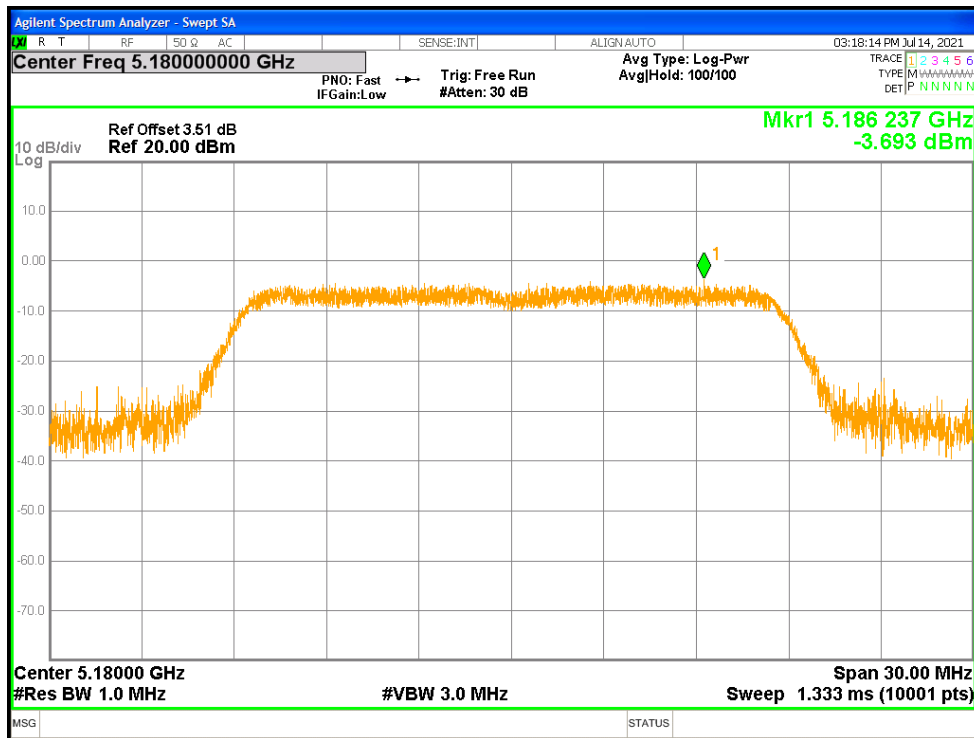


PSD NVNT n20 5200MHz Ant1

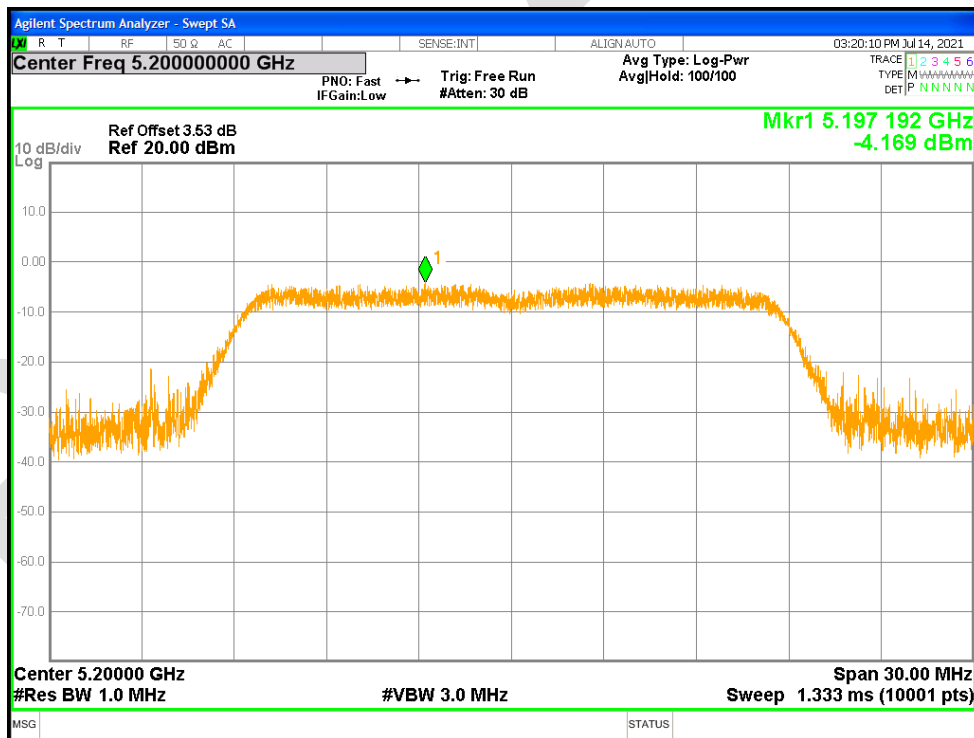


PSD NVNT n20 5240MHz Ant1

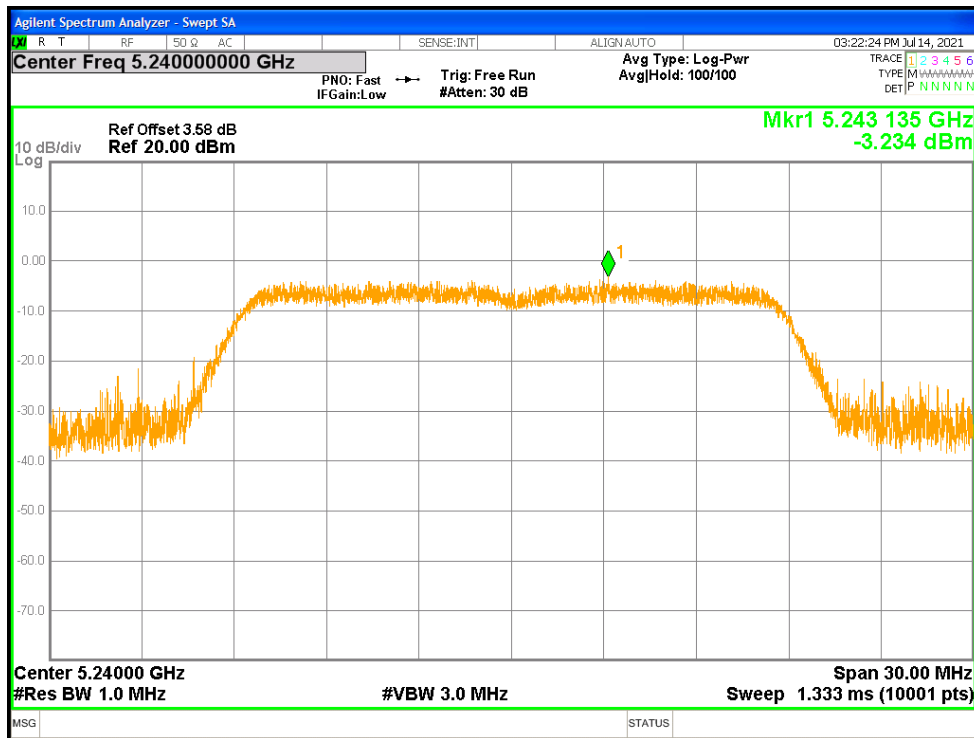

PSD NVNT n40 5190MHz Ant1

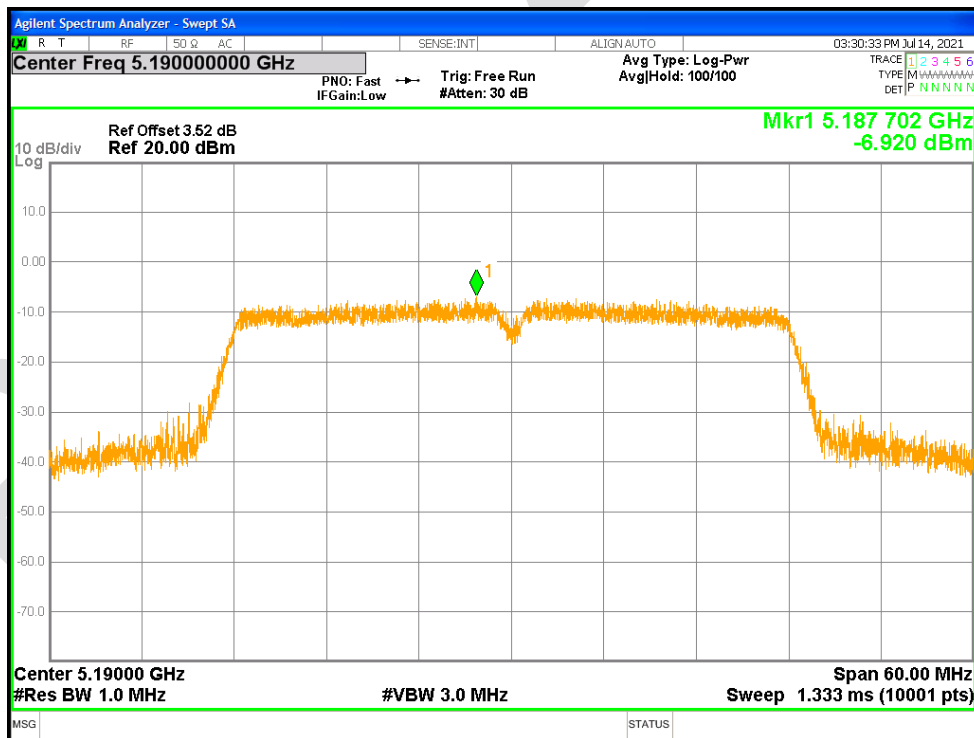


PSD NVNT n40 5230MHz Ant1

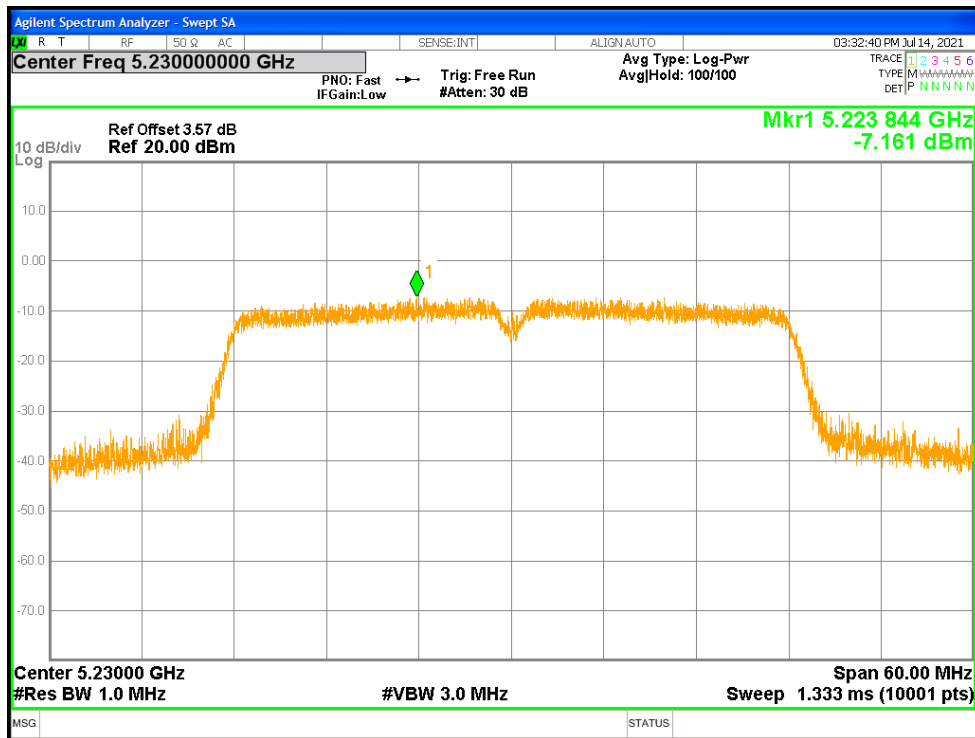


10.5 BAND EDGE

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	a	5180	Ant1	-46.7	-27	Pass
NVNT	a	5240	Ant1	-48.46	-27	Pass
NVNT	ac20	5180	Ant1	-44.68	-27	Pass
NVNT	ac20	5240	Ant1	-47.89	-27	Pass
NVNT	ac40	5190	Ant1	-44.21	-27	Pass
NVNT	ac40	5230	Ant1	-48.27	-27	Pass
NVNT	ac80	5210	Ant1	-42.04	-27	Pass
NVNT	n20	5180	Ant1	-44.25	-27	Pass
NVNT	n20	5240	Ant1	-48.7	-27	Pass
NVNT	n40	5190	Ant1	-43.28	-27	Pass
NVNT	n40	5230	Ant1	-48.61	-27	Pass


Band Edge NVNT a 5180MHz Low Ant1

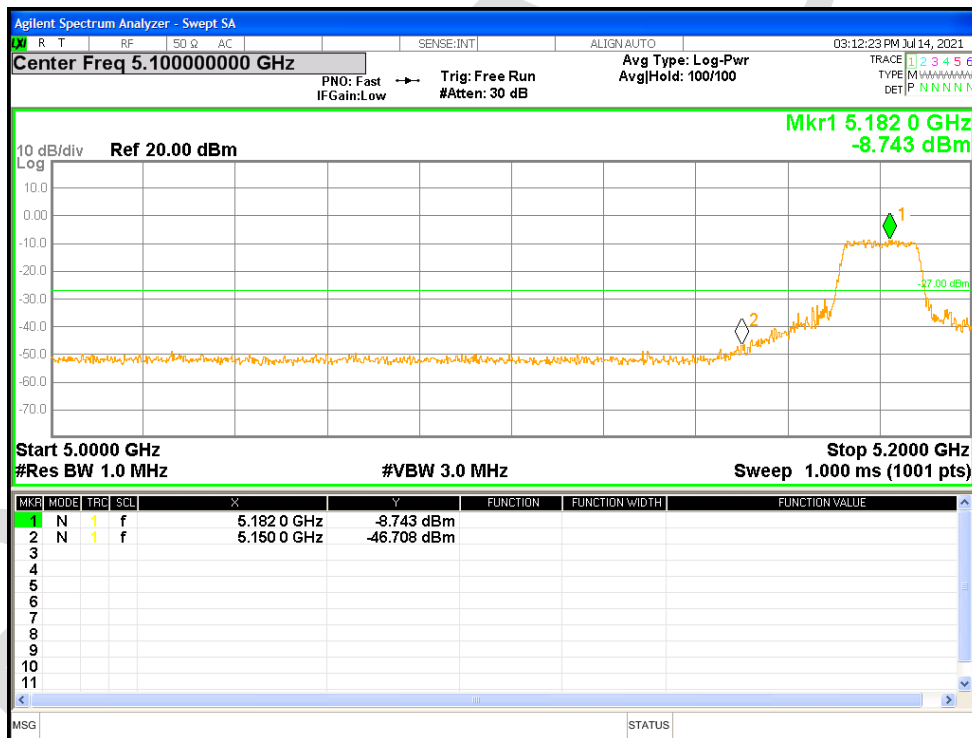


Band Edge NVNT a 5240MHz High Ant1

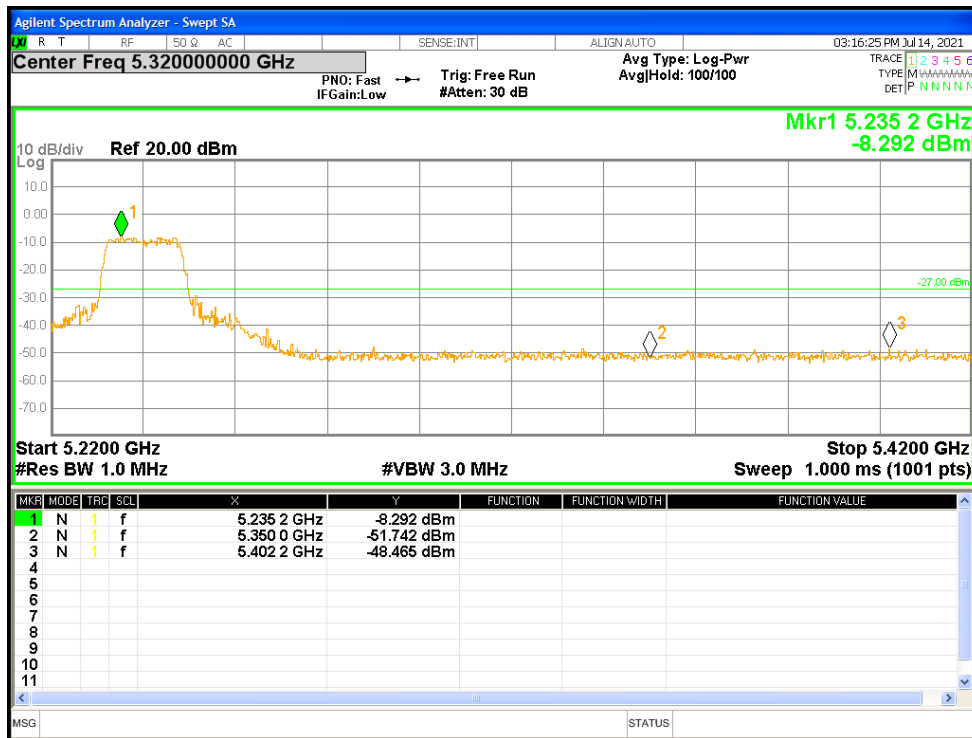


Band Edge NVNT ac20 5180MHz Low Ant1

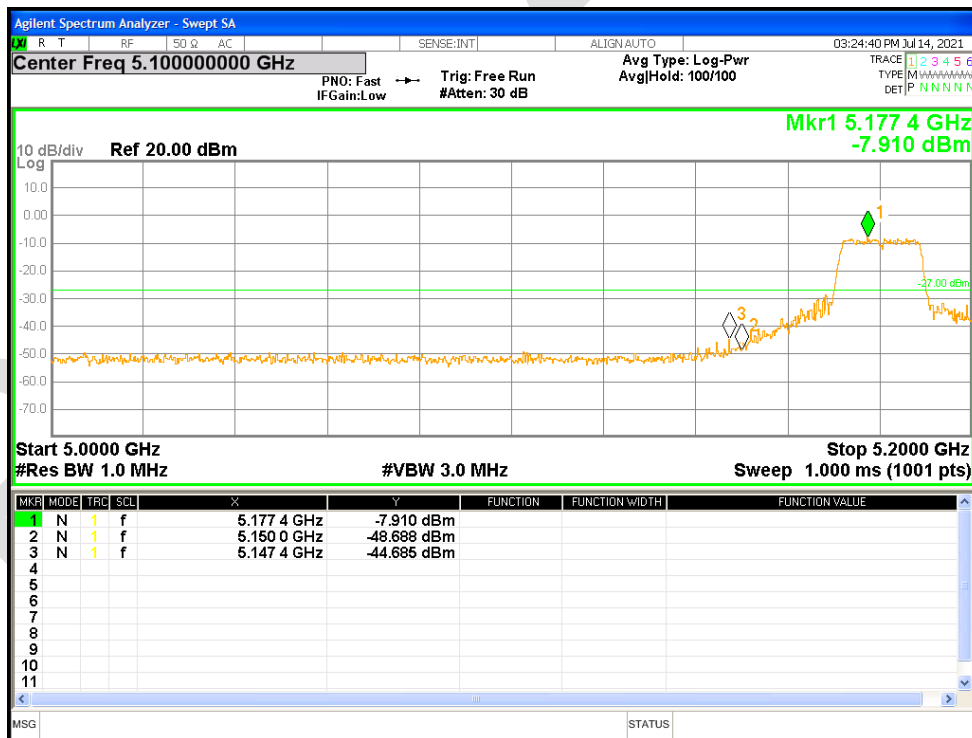


Band Edge NVNT ac20 5240MHz High Ant1

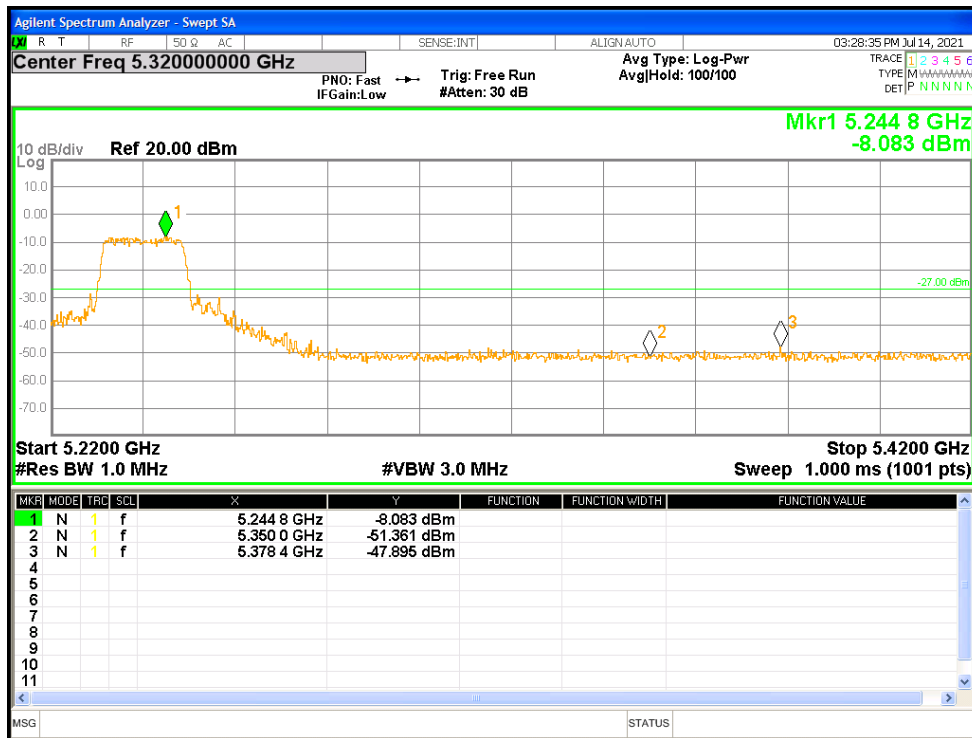


Band Edge NVNT ac40 5190MHz Low Ant1

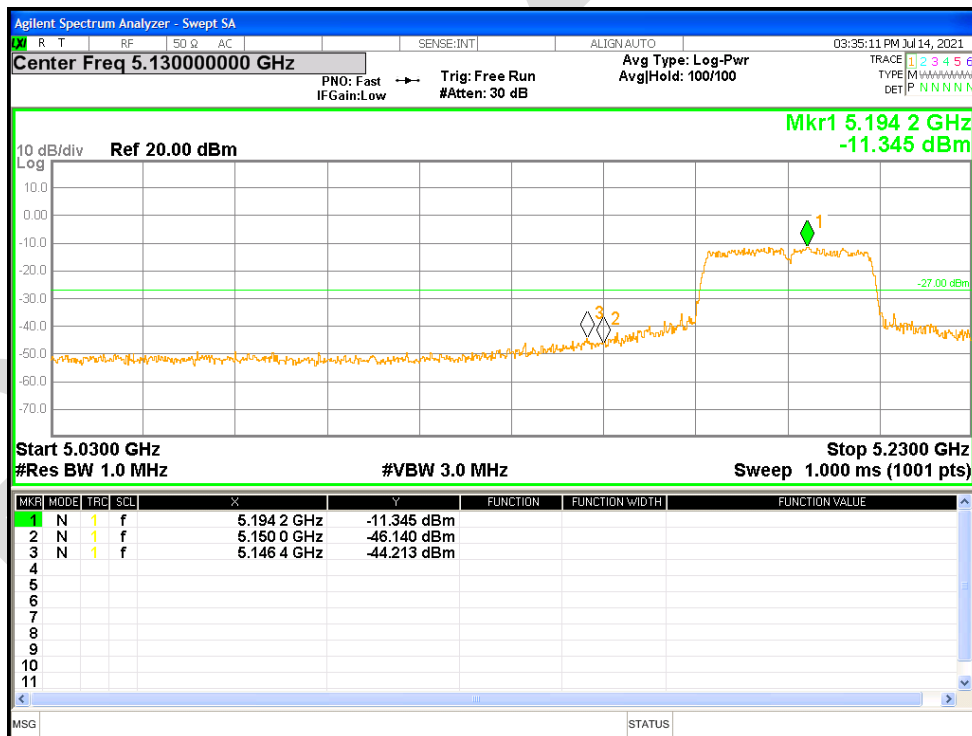


Band Edge NVNT ac40 5230MHz High Ant1

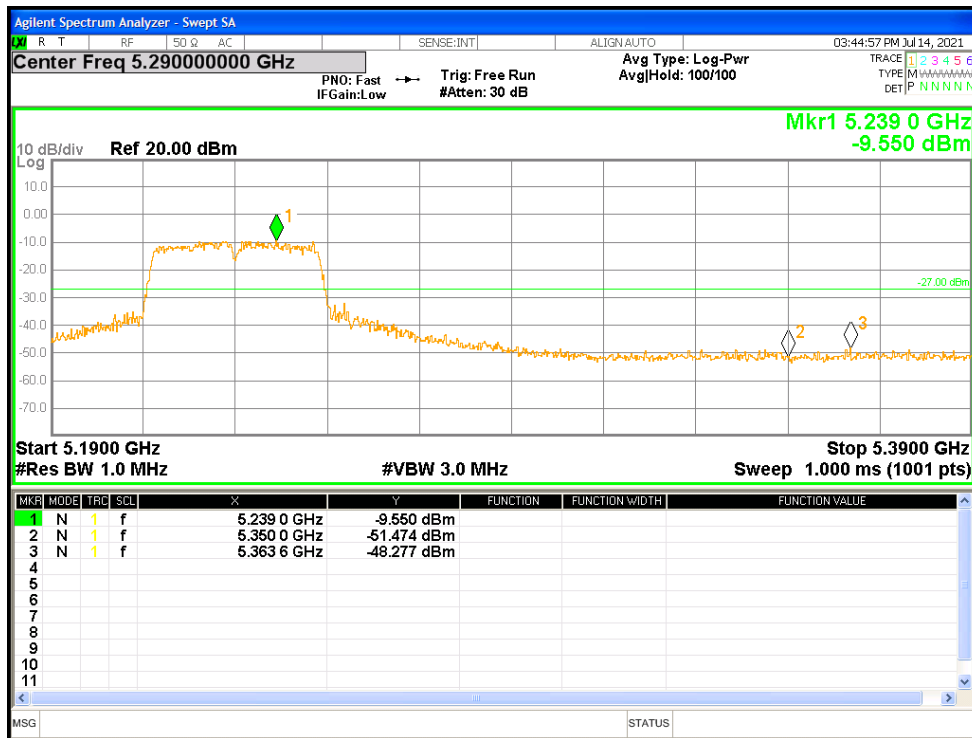


Band Edge NVNT ac80 5210MHz Low Ant1

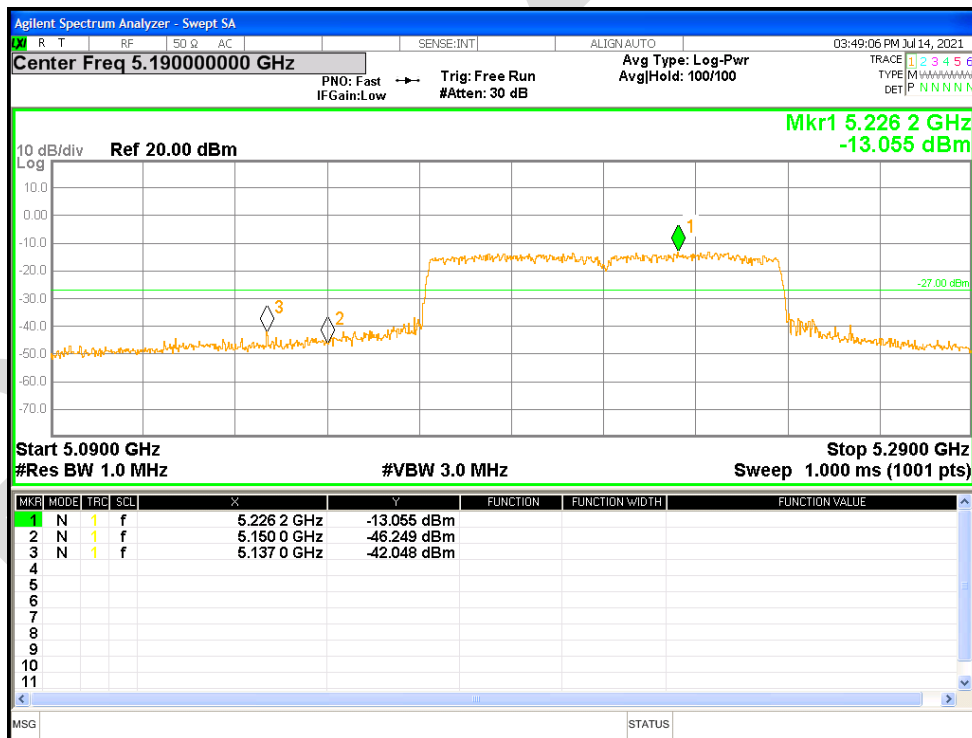


Band Edge NVNT n20 5180MHz Low Ant1

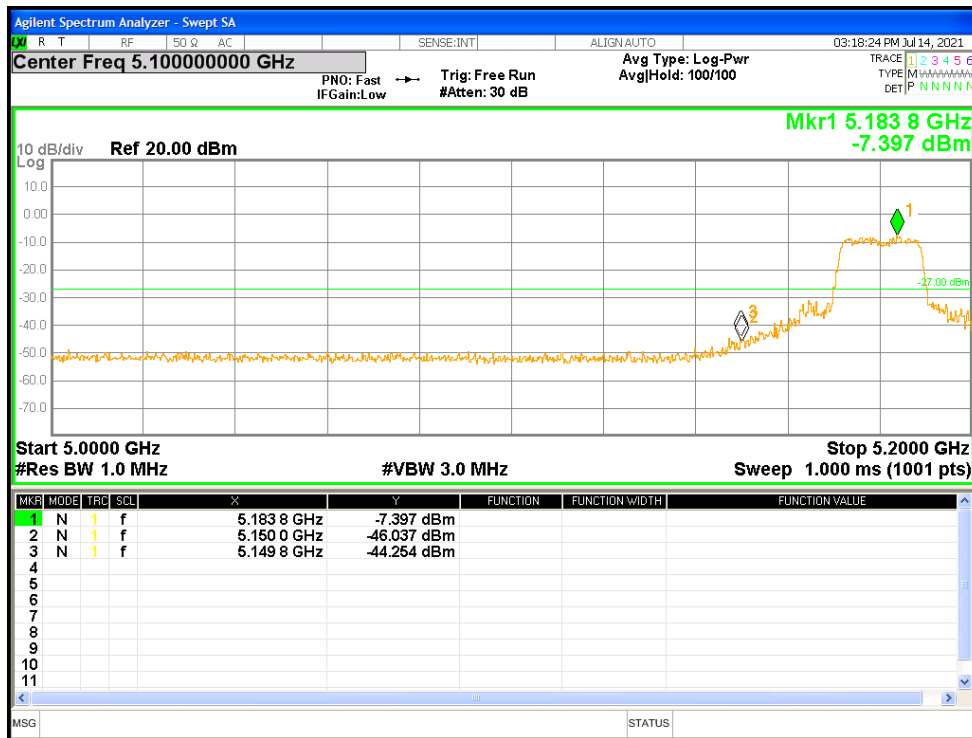


Band Edge NVNT n20 5240MHz High Ant1

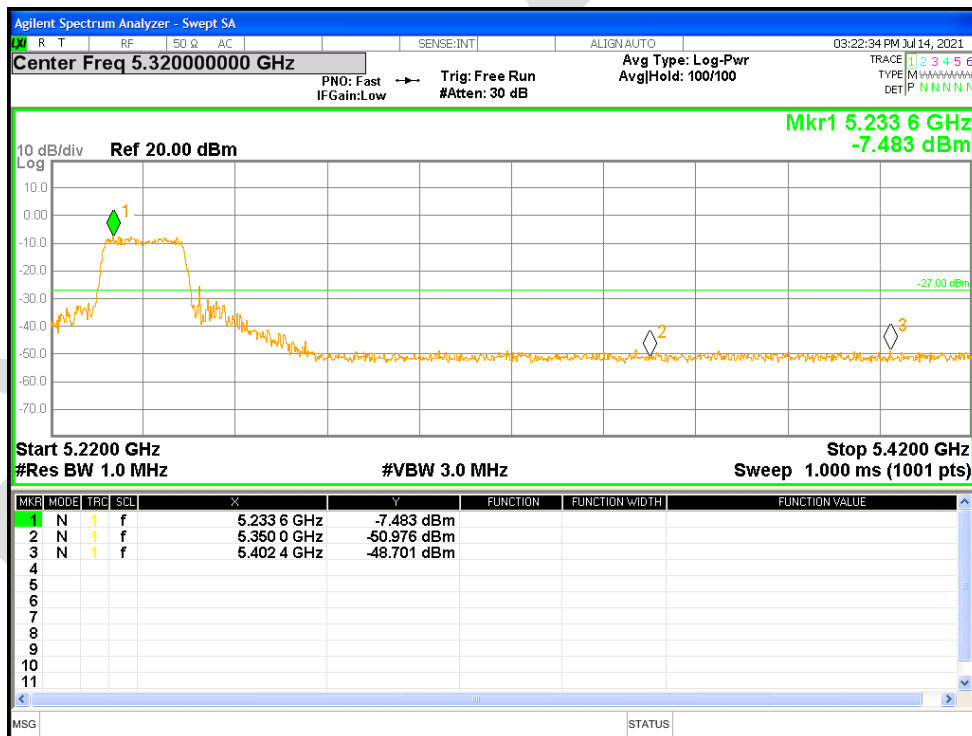

Band Edge NVNT n40 5190MHz Low Ant1

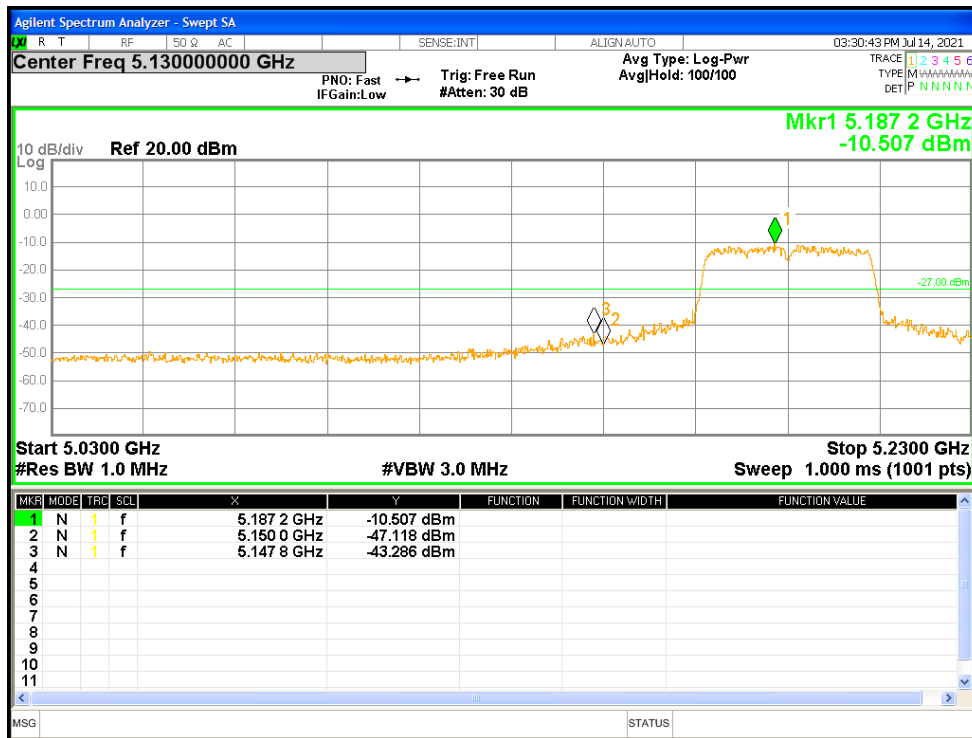


Band Edge NVNT n40 5230MHz High Ant1

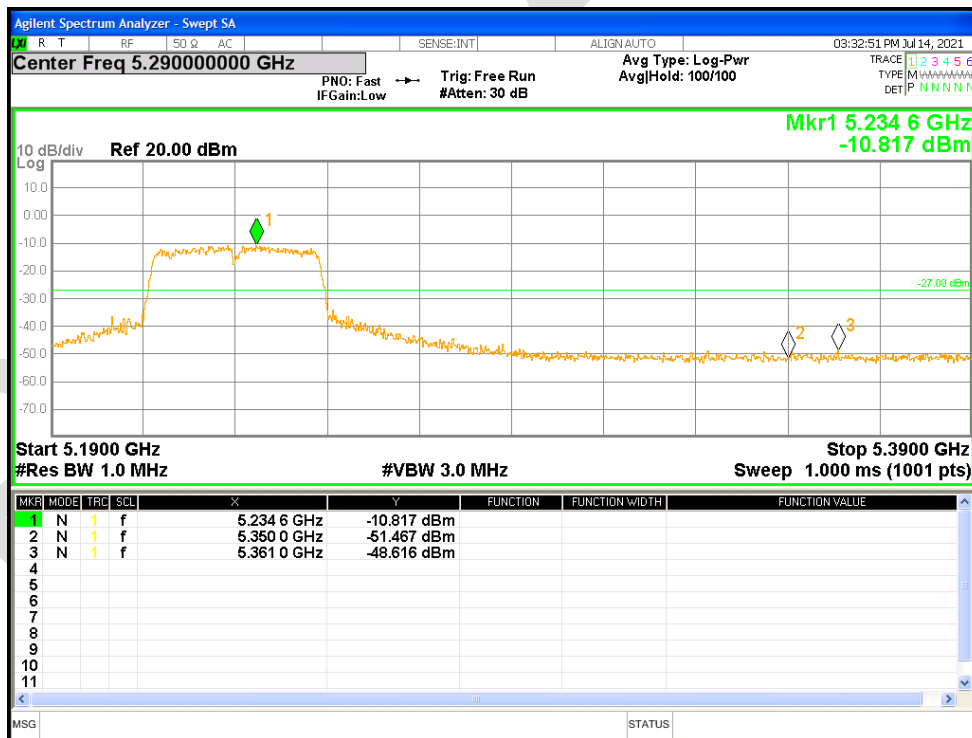


10.6 FREQUENCY STABILITY

Condition	Mode	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
NVNT	a	5180	Ant1	5180.04	40000	7.72	25	Pass
NVNT	a	5200	Ant1	5200.02	20000	3.85	25	Pass
NVNT	a	5240	Ant1	5240.04	40000	7.63	25	Pass
NVNT	ac20	5180	Ant1	5180.02	20000	3.86	25	Pass
NVNT	ac20	5200	Ant1	5200.02	20000	3.85	25	Pass
NVNT	ac20	5240	Ant1	5240.02	20000	3.82	25	Pass
NVNT	ac40	5190	Ant1	5190	0	0	25	Pass
NVNT	ac40	5230	Ant1	5230.04	40000	7.65	25	Pass
NVNT	ac80	5210	Ant1	5210	0	0	25	Pass
NVNT	n20	5180	Ant1	5180.02	20000	3.86	25	Pass
NVNT	n20	5200	Ant1	5200.02	20000	3.85	25	Pass
NVNT	n20	5240	Ant1	5240.04	40000	7.63	25	Pass
NVNT	n40	5190	Ant1	5190.04	40000	7.71	25	Pass
NVNT	n40	5230	Ant1	5230.04	40000	7.65	25	Pass


Freq. Stability NVNT a 5180MHz Ant1

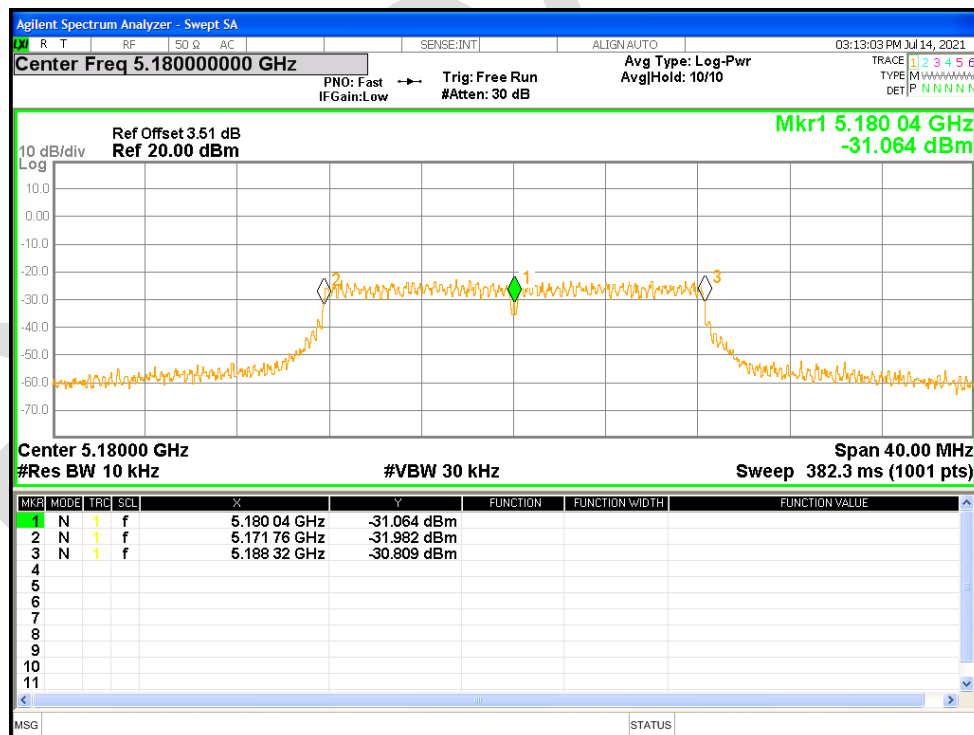


Freq. Stability NVNT a 5200MHz Ant1

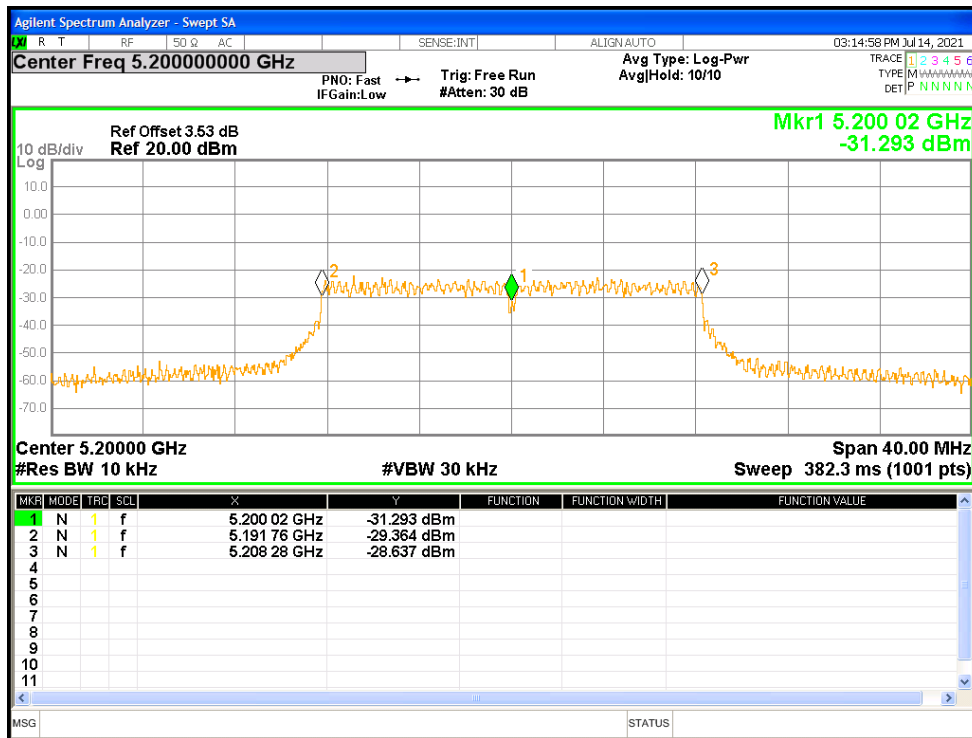


Freq. Stability NVNT a 5240MHz Ant1

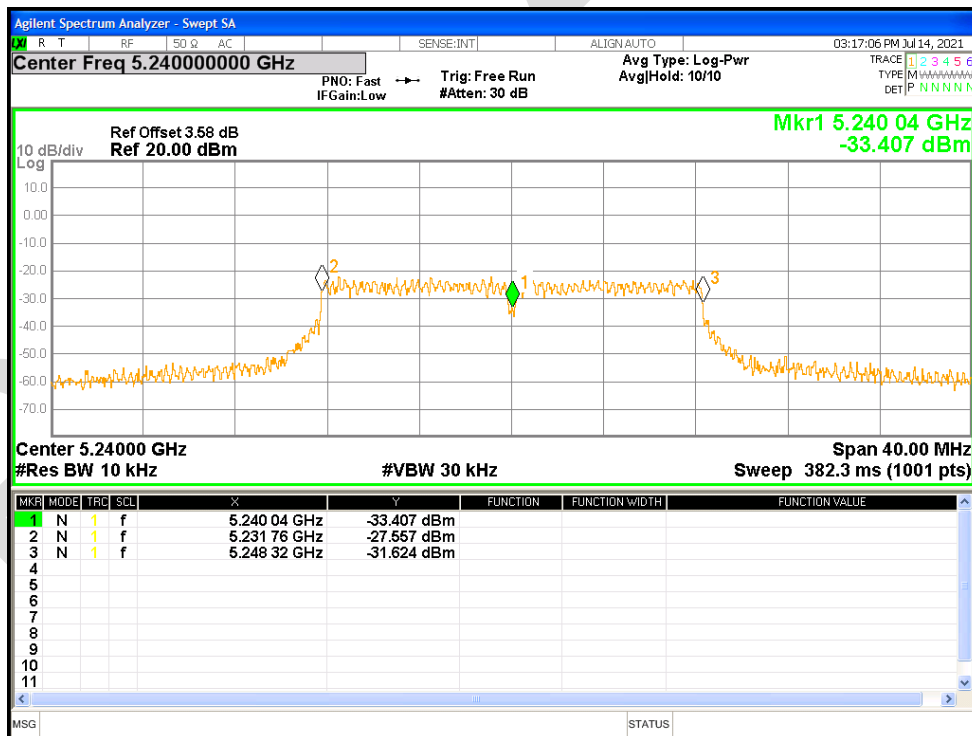


Freq. Stability NVNT ac20 5180MHz Ant1

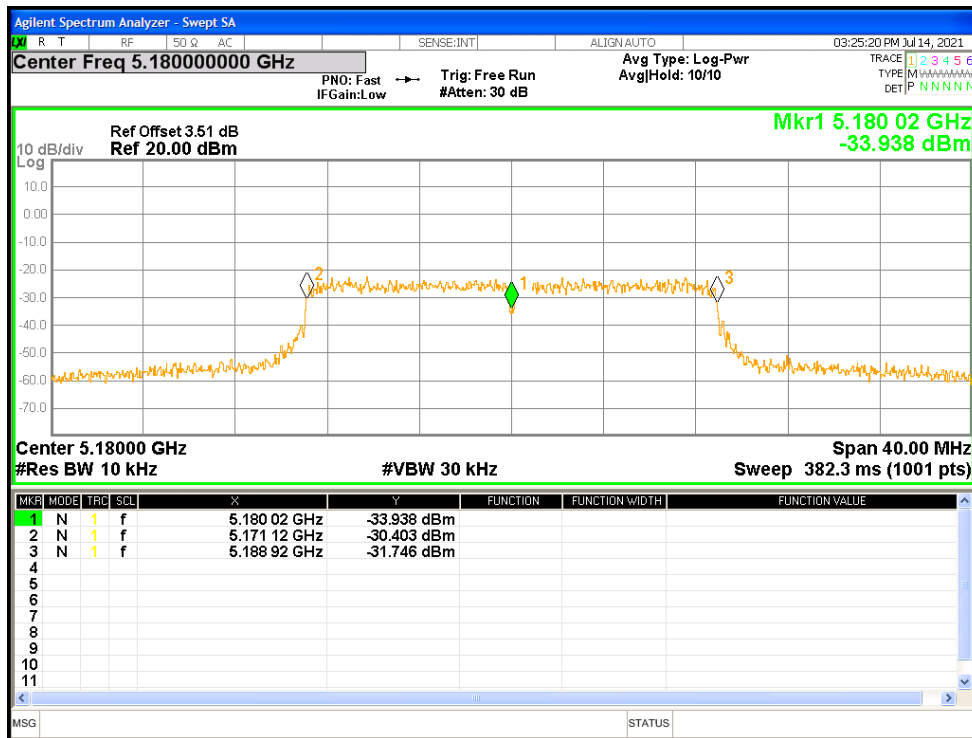


Freq. Stability NVNT ac20 5200MHz Ant1

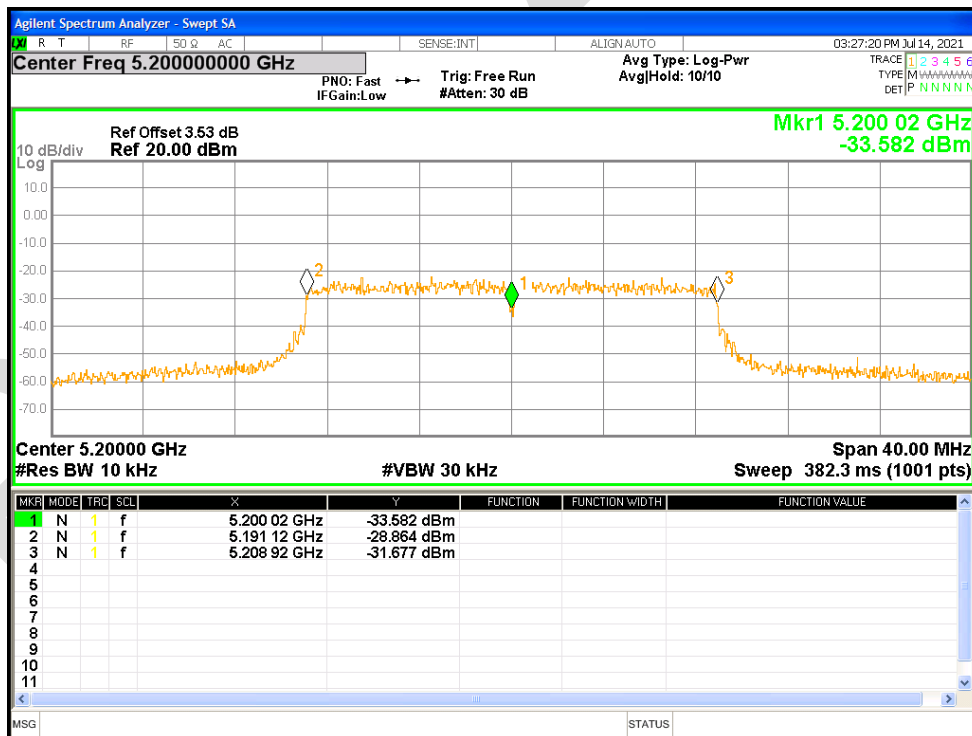


Freq. Stability NVNT ac20 5240MHz Ant1

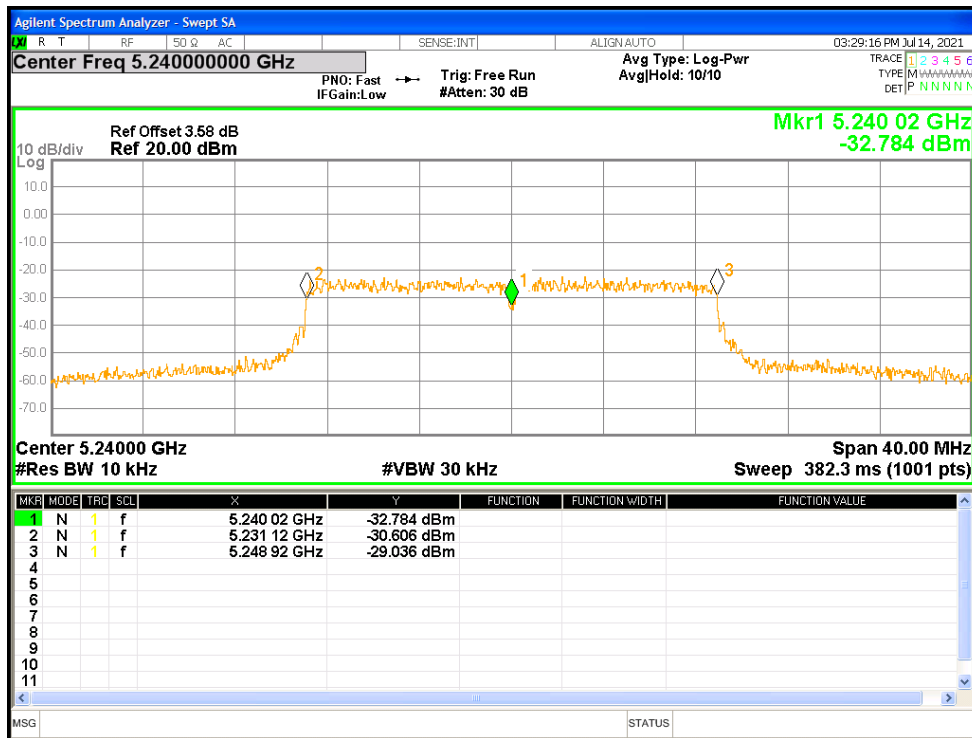


Freq. Stability NVNT ac40 5190MHz Ant1

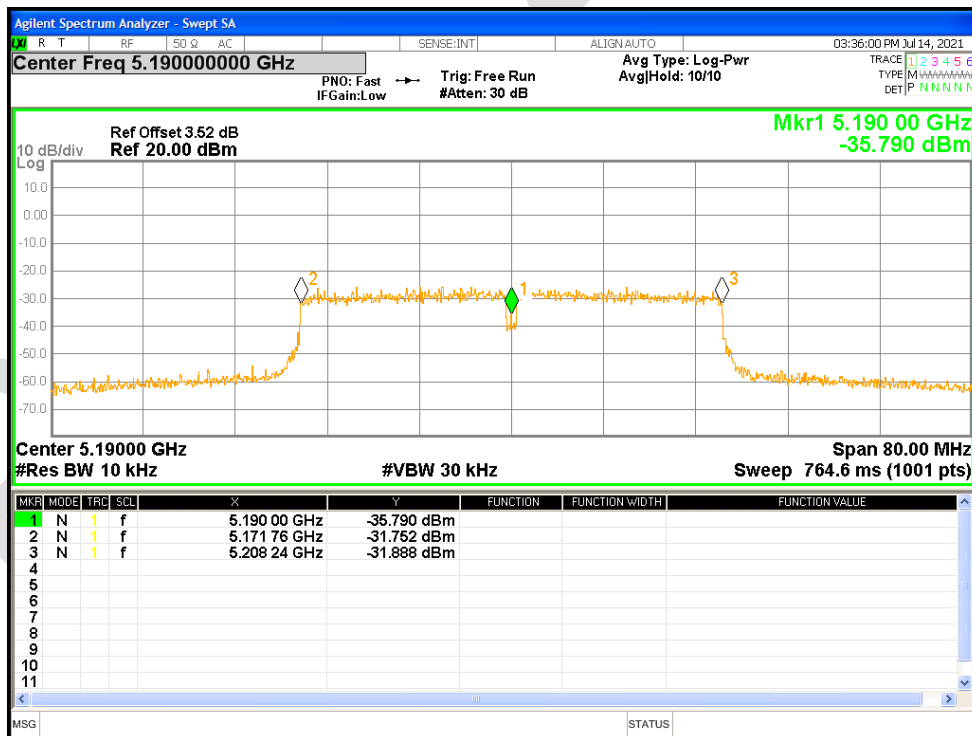


Freq. Stability NVNT ac40 5230MHz Ant1

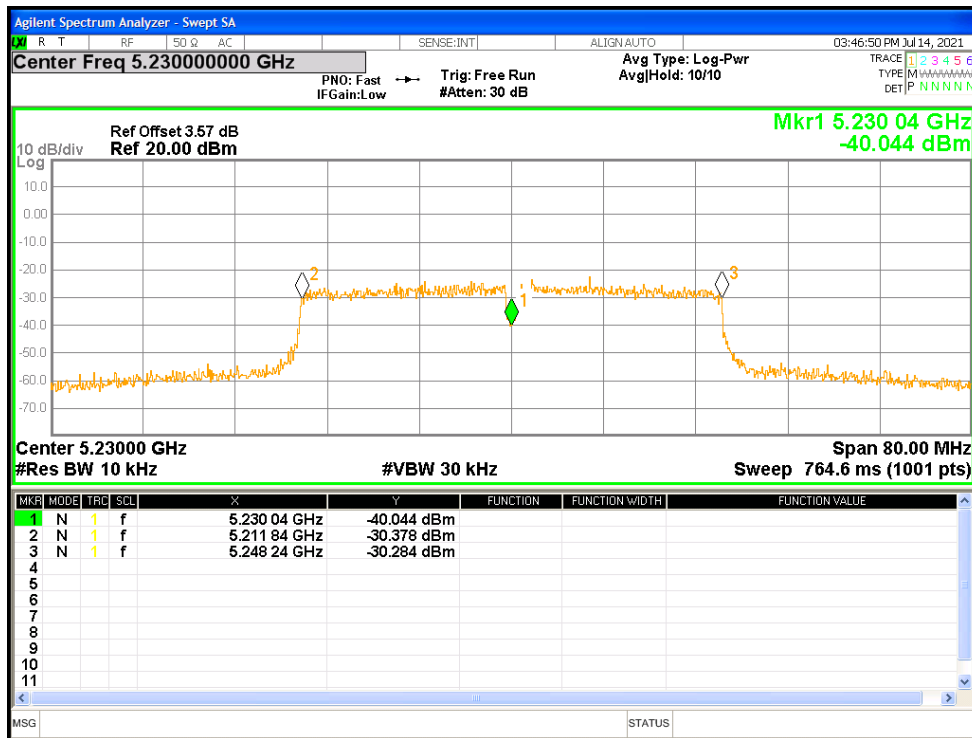


Freq. Stability NVNT ac80 5210MHz Ant1

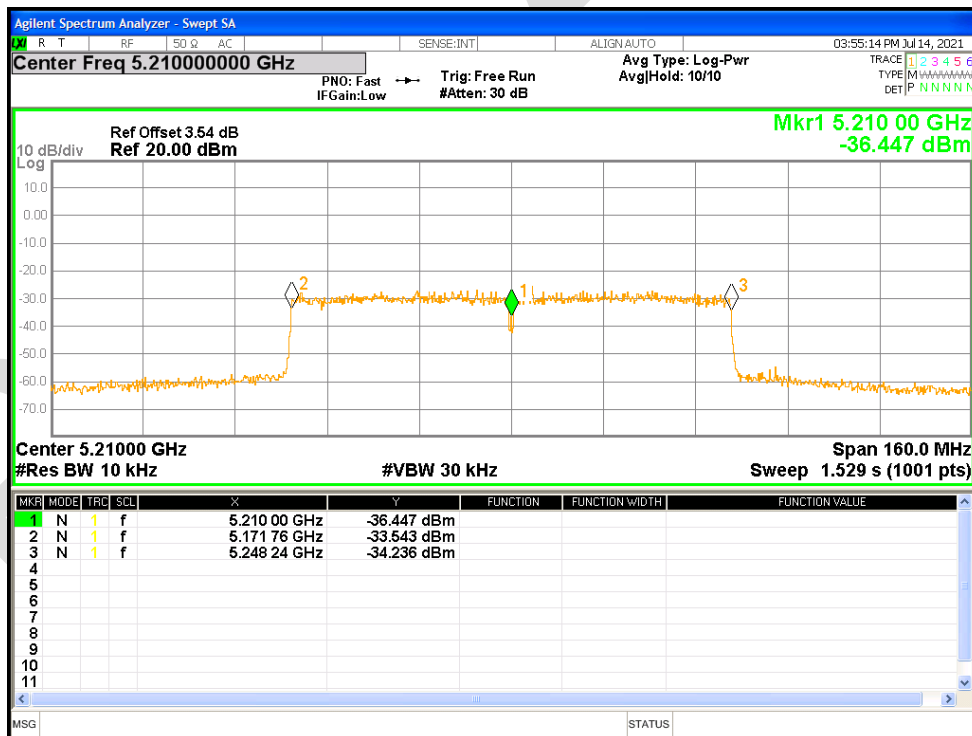


Freq. Stability NVNT n20 5180MHz Ant1

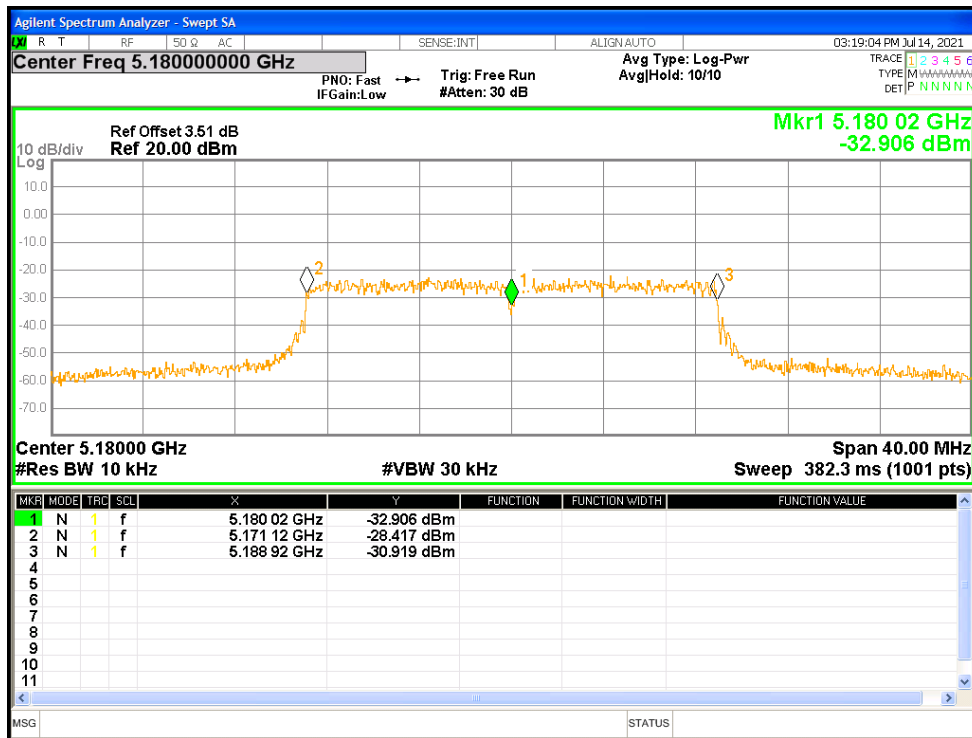


Freq. Stability NVNT n20 5200MHz Ant1

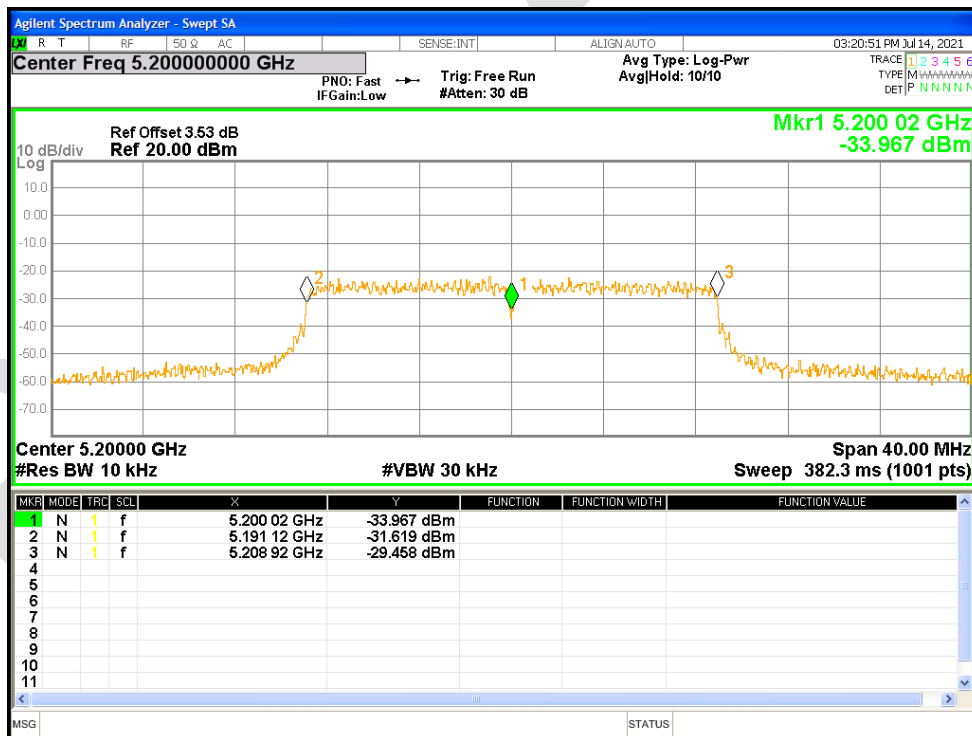


Freq. Stability NVNT n20 5240MHz Ant1

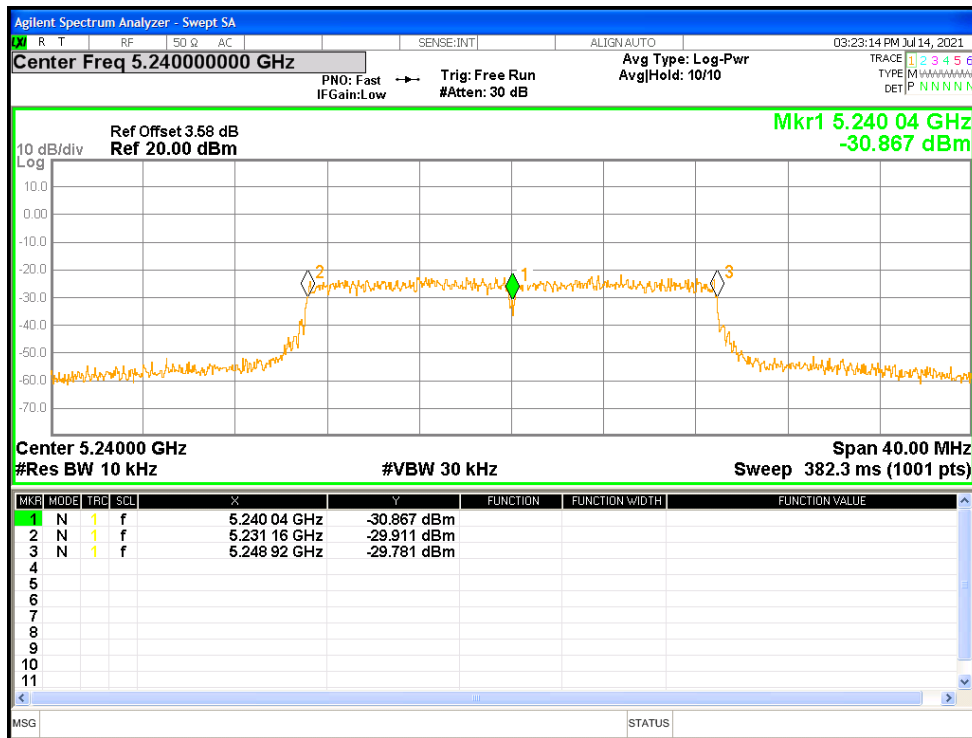

Freq. Stability NVNT n40 5190MHz Ant1

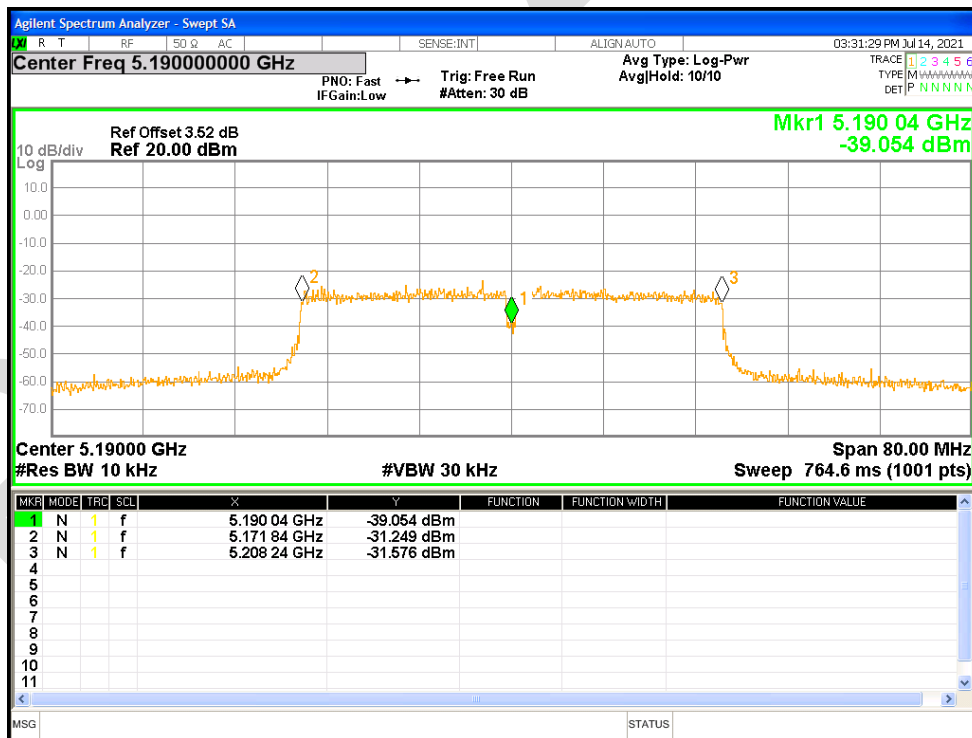


Freq. Stability NVNT n40 5230MHz Ant1

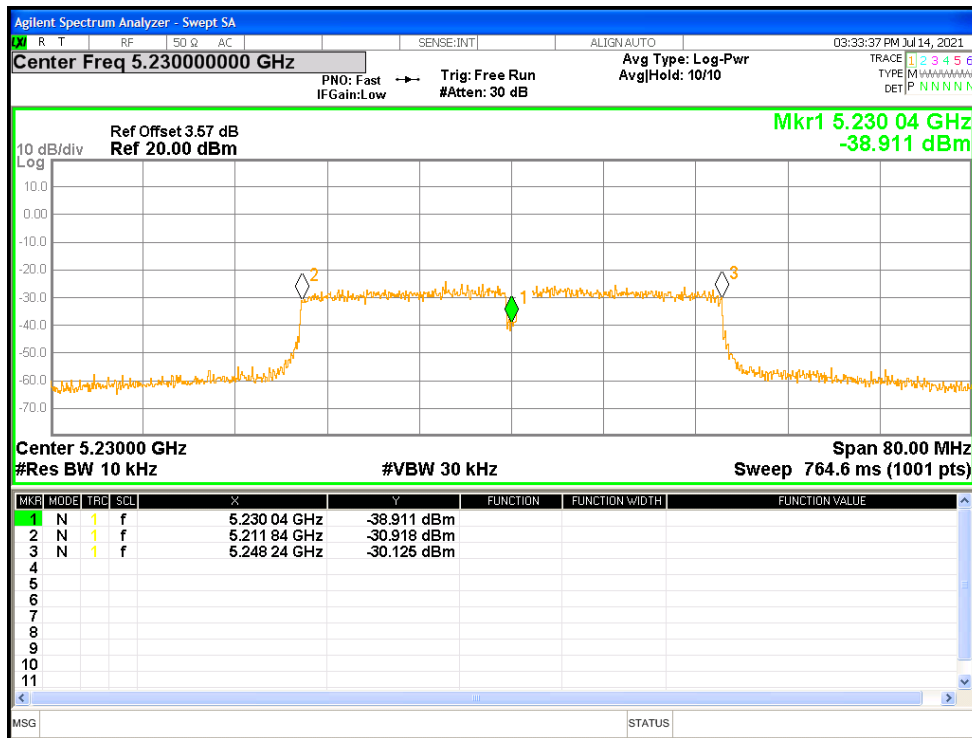


10.7 CONDUCTED RF SPURIOUS EMISSION

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	a	5180	Ant1	-33.93	-27	Pass
NVNT	a	5200	Ant1	-33.62	-27	Pass
NVNT	a	5240	Ant1	-33.98	-27	Pass
NVNT	ac20	5180	Ant1	-33.58	-27	Pass
NVNT	ac20	5200	Ant1	-33.86	-27	Pass
NVNT	ac20	5240	Ant1	-33.57	-27	Pass
NVNT	ac40	5190	Ant1	-33.88	-27	Pass
NVNT	ac40	5230	Ant1	-33.84	-27	Pass
NVNT	ac80	5210	Ant1	-34.52	-27	Pass
NVNT	n20	5180	Ant1	-33.81	-27	Pass
NVNT	n20	5200	Ant1	-33.97	-27	Pass
NVNT	n20	5240	Ant1	-33.41	-27	Pass
NVNT	n40	5190	Ant1	-33.73	-27	Pass
NVNT	n40	5230	Ant1	-33.54	-27	Pass


Tx. Spurious NVNT a 5180MHz Ant1 Emission

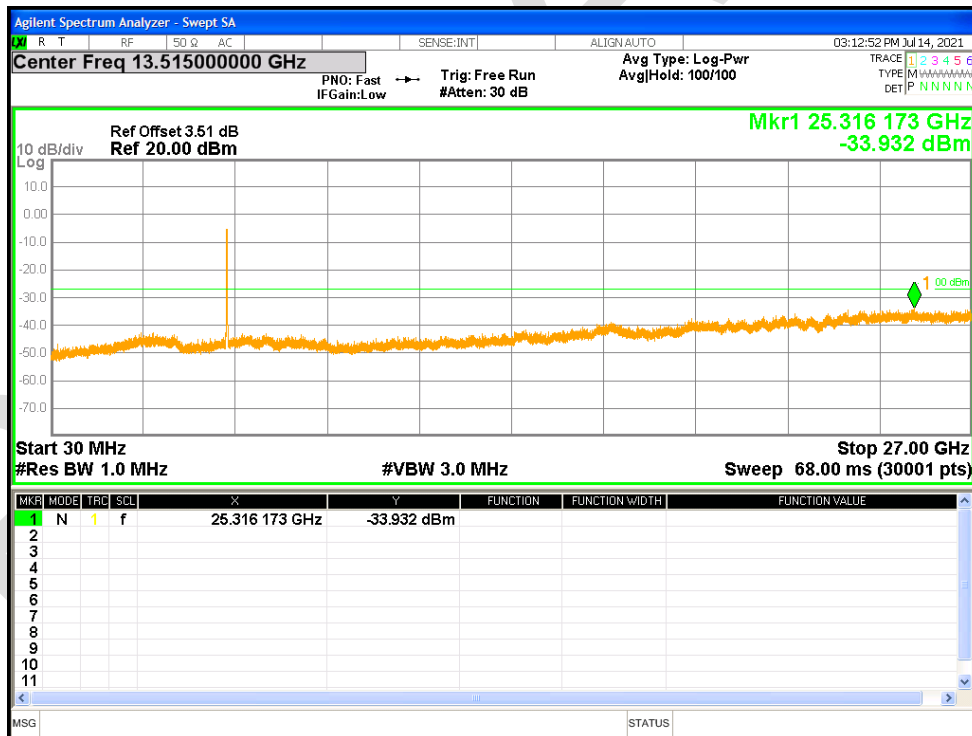


Tx. Spurious NVNT a 5200MHz Ant1 Emission

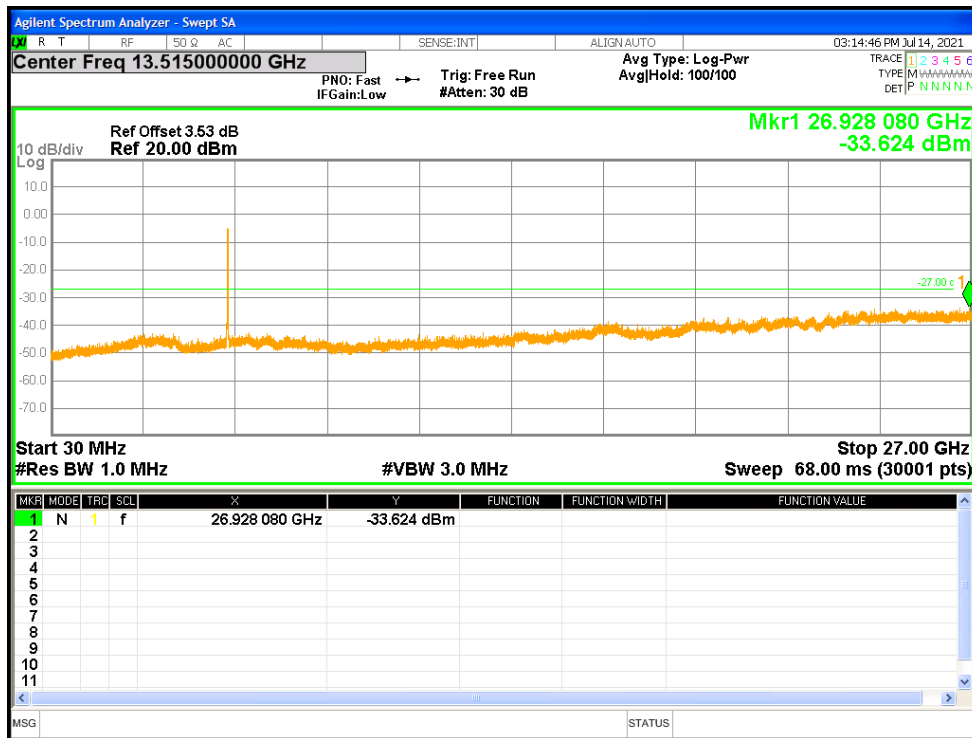


Tx. Spurious NVNT a 5240MHz Ant1 Emission

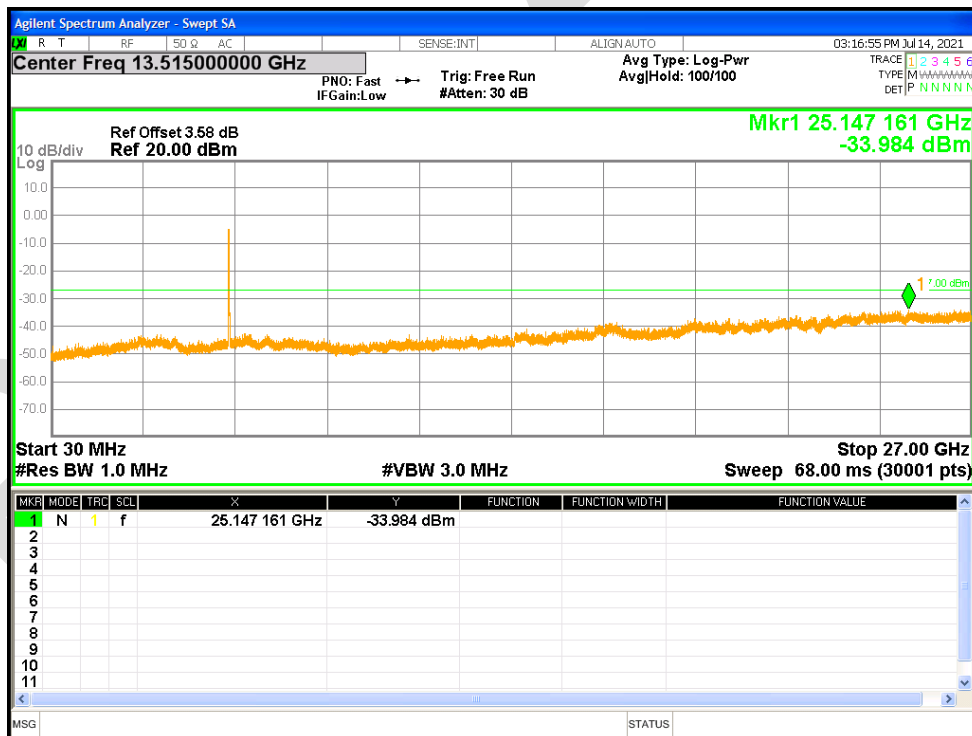


Tx. Spurious NVNT ac20 5180MHz Ant1 Emission

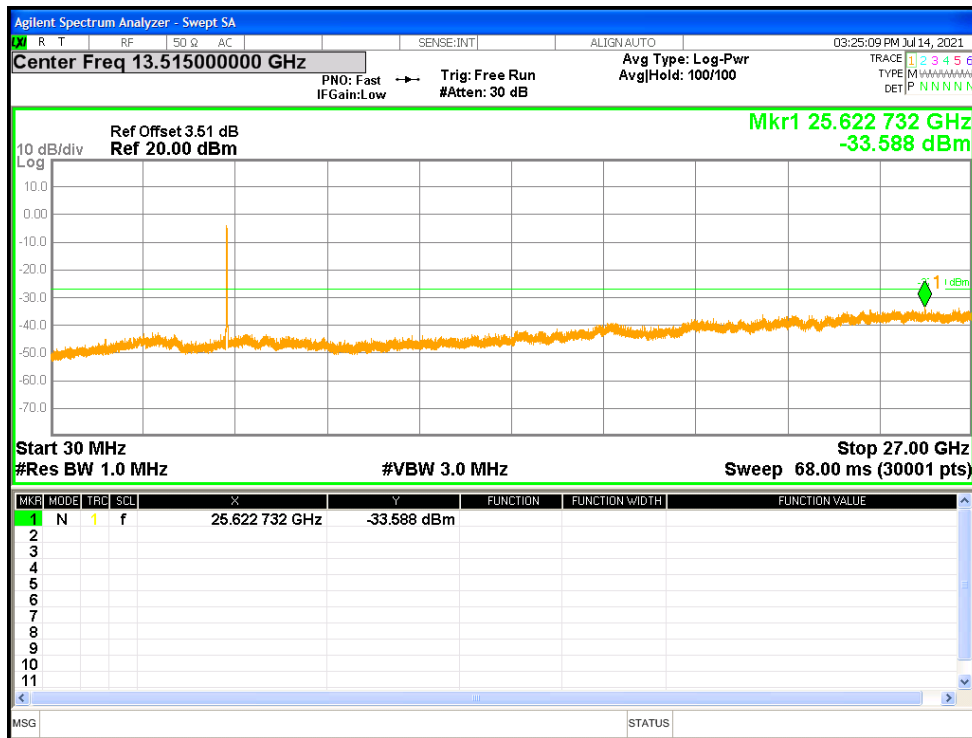


Tx. Spurious NVNT ac20 5200MHz Ant1 Emission

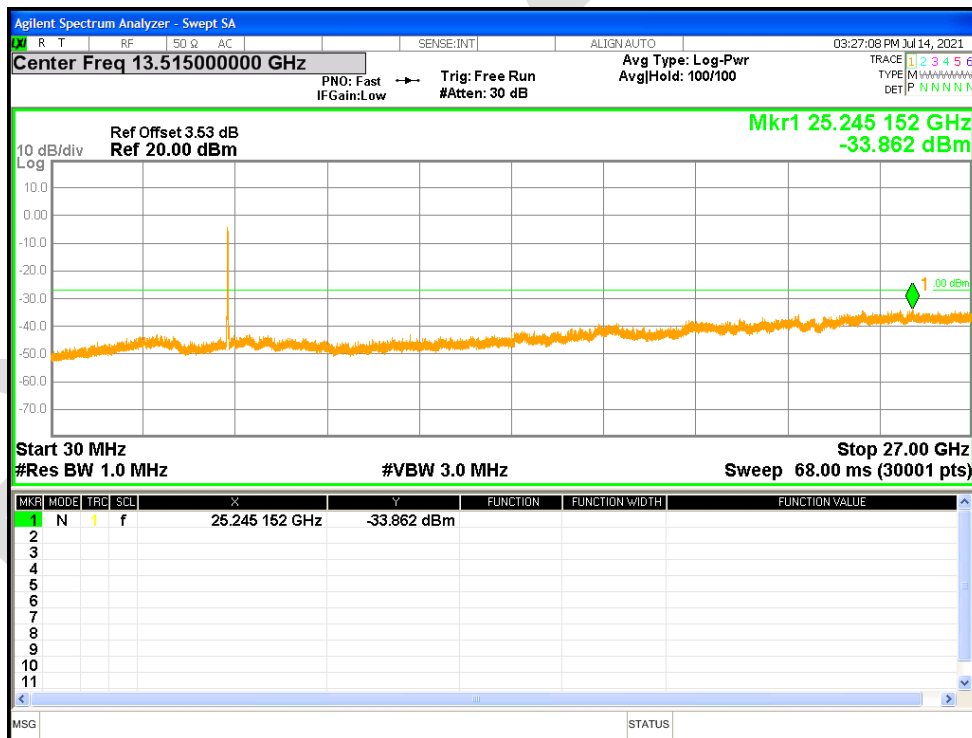


Tx. Spurious NVNT ac20 5240MHz Ant1 Emission

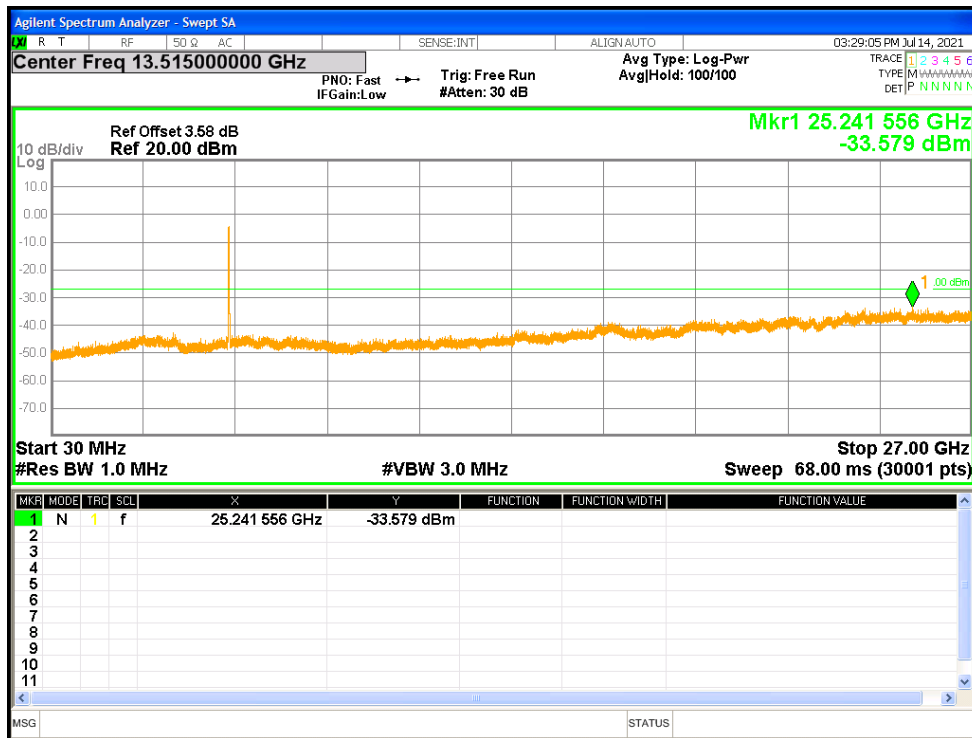


Tx. Spurious NVNT ac40 5190MHz Ant1 Emission

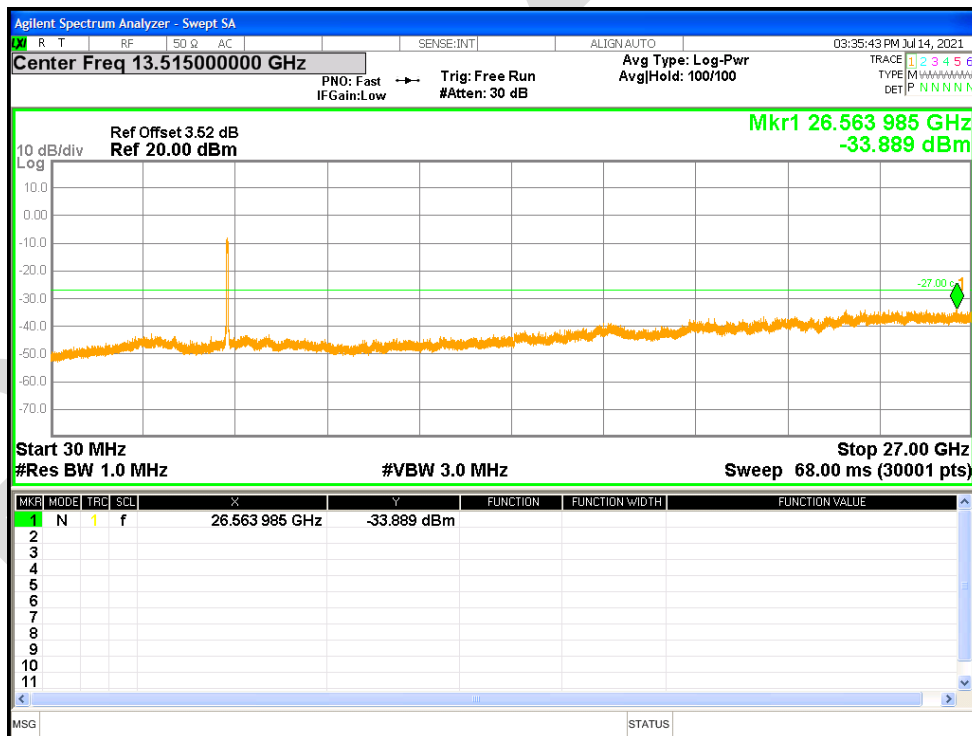


Tx. Spurious NVNT ac40 5230MHz Ant1 Emission

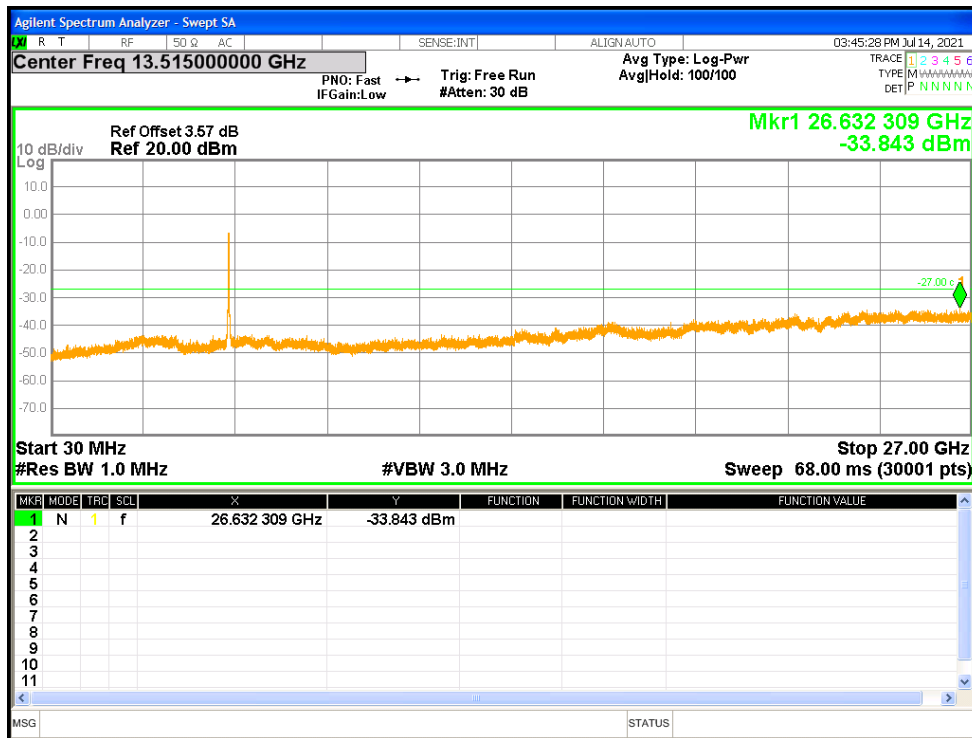


Tx. Spurious NVNT ac80 5210MHz Ant1 Emission

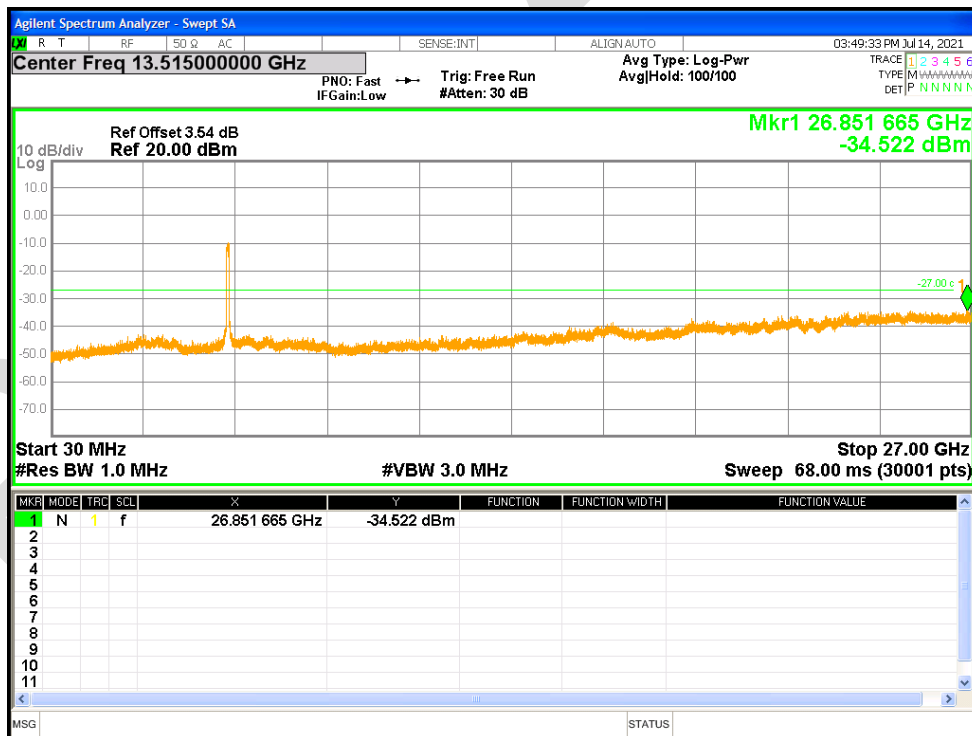


Tx. Spurious NVNT n20 5180MHz Ant1 Emission

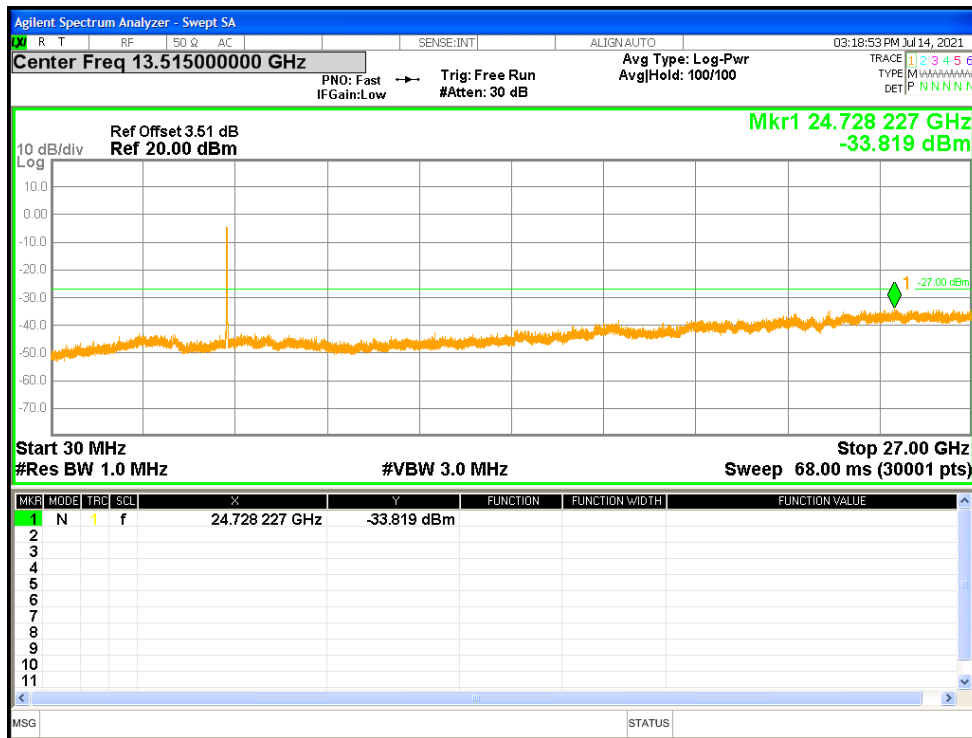


Tx. Spurious NVNT n20 5200MHz Ant1 Emission

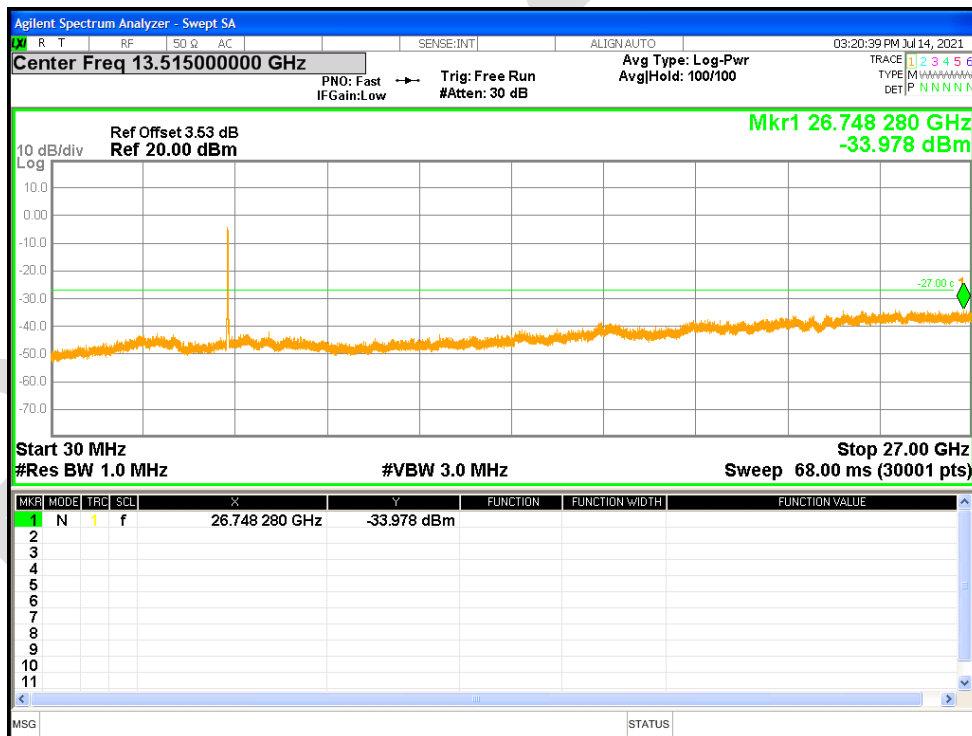


Tx. Spurious NVNT n20 5240MHz Ant1 Emission

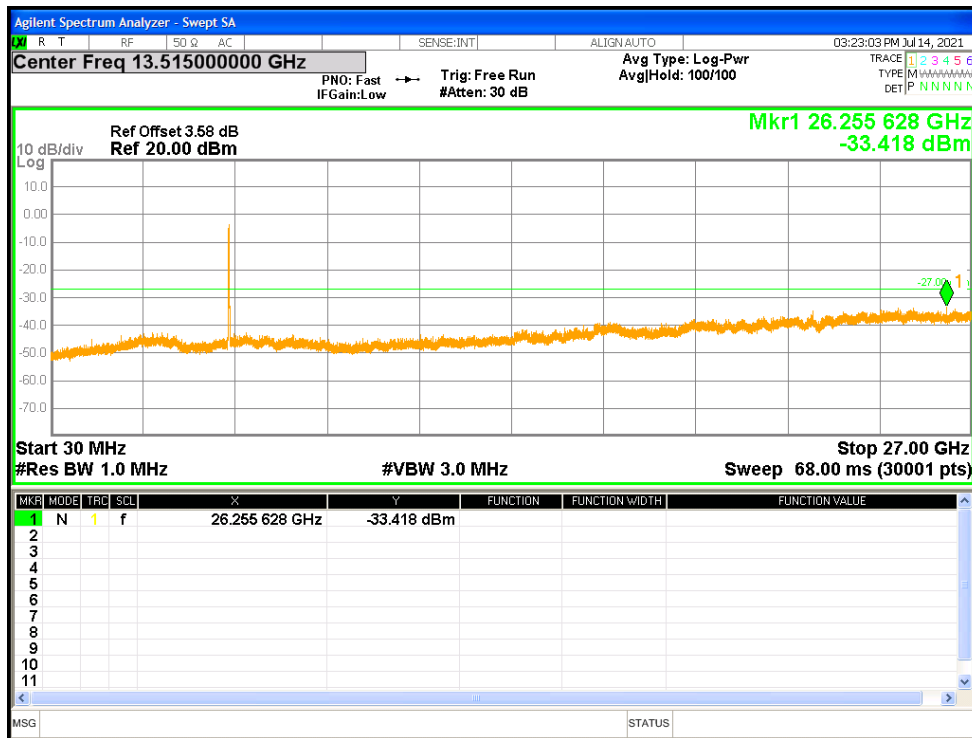

Tx. Spurious NVNT n40 5190MHz Ant1 Emission

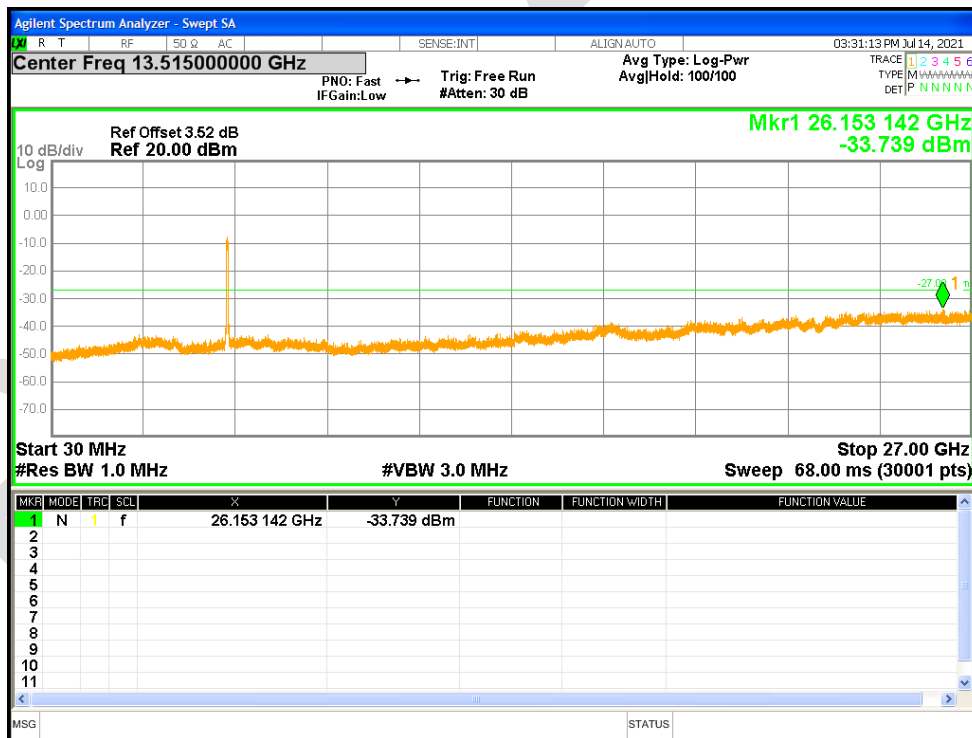

Tx. Spurious NVNT n40 5230MHz Ant1 Emission

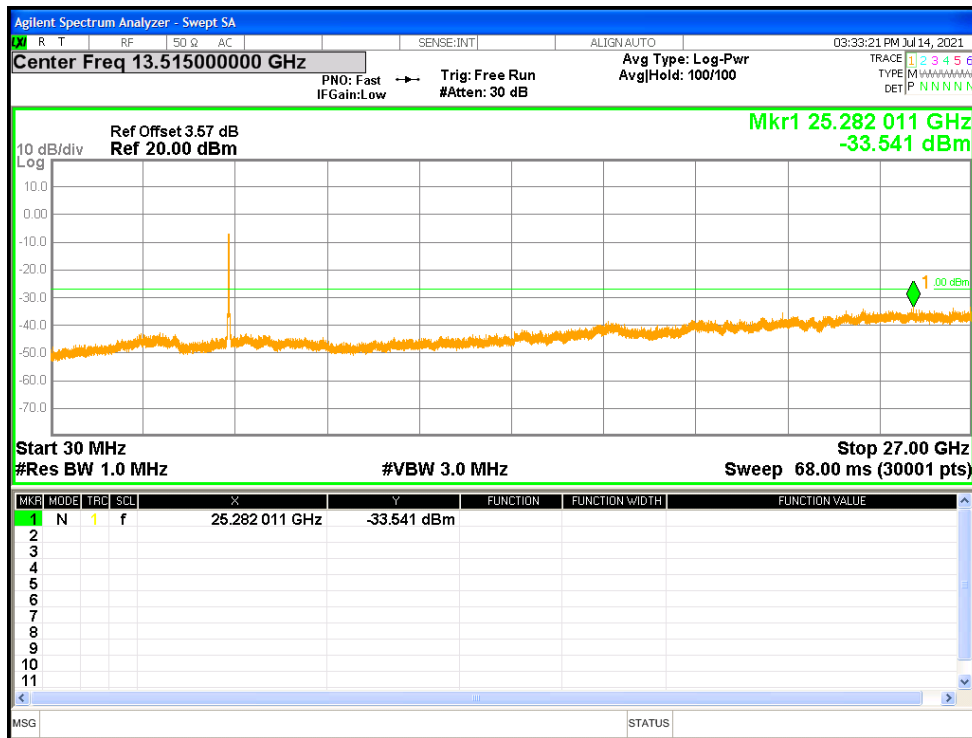

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Conducted Emissions at AC Power Line (150kHz-30MHz)



Radiated Spurious Emissions





BlueAsia

BlueAsia

APPENDIX B: PHOTOGRAPHS OF EUT

Reference to the test report No. BLA-EMC-202106-A2601

----END OF REPORT----

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full.

BlueAsia