



Test Report No. 7012318227

For Tag&Find Wireless Solutions Ltd.

Equipment Under Test:

***Compact UNF RFID reader with BLE connectivity
GearEye BLE transceiver***

Model: GearEye-A4

FCC ID: 2AXUS-GRY4

***From The Standards Institution
Of Israel
Industry Division
Electronics & Telematics Laboratory
EMC Branch***



Certificate Number: AT-1359



Test report No: 7012318227
Title: GearEye BLE transceiver
Model: GearEye-A4

Page 2 of 31 Pages

FCC ID: 2AXUS-GRY4

Table of Contents

| | |
|---|-----------|
| 1. Applicant information | 3 |
| 2. Test performance | 3 |
| 3. Summary of test: | 5 |
| 4. Equipment under test description. | 6 |
| 4.1 General description..... | 6 |
| 5. Test results..... | 7 |
| 5.1 Transmitter characteristics | 7 |
| 5.1.1 Transmitter 6 dB occupied bandwidth..... | 7 |
| 5.1.2 Maximum conducted output power test. | 9 |
| 5.1.3 Power spectral density test | 11 |
| 5.1.4 Radiated emissions test according to §§ 15.247(d), 15.205(a) | 13 |
| 5.1.5 Radiated emissions test according to § 15.209..... | 21 |
| 5.1.6 Conducted emissions test according to § 15.207 | 23 |
| APPENDIX A Test equipment used. | 25 |
| APPENDIX B Photo of the test setups. | 30 |
| APPENDIX C Abbreviations and acronyms | 31 |



Test report No: 7012318227
Title: GearEye BLE transceiver
Model: GearEye-A4

Page 3 of 31 Pages

FCC ID: 2AXUS-GRY4

1. Applicant information

| | |
|------------------------------|-----------------------------------|
| Applicant: | Tag&Find Wireless Solutions Ltd.. |
| Address: | Golda Meir 21, Haifa, Israel. |
| Sample for test selected by: | The customer |
| The date of tests: | 6, 12 August, 15 September 2020 |

Equipment under test information

| | |
|---|--|
| Description of Equipment Under Test (EUT): | Compact UHF RFID reader with BLE connectivity GearEye BLE transceiver |
| Model: | GearEye-A4 |
| Software version of radio unit: | GearEye-A4-2.3.1 |
| Hardware version: | GearEye-A4 |
| Manufactured by: | Tag&Find Wireless Solutions Ltd. |

2. Test performance

| | |
|-----------------------------|--|
| Location: | SII EMC Section |
| Purpose of test: | Apparatus compliance verification in accordance with emission requirements |
| Test specifications: | 47CFR part 15.247, 15.205, 15.207, 15.209 and part 1 §1.1310 |

This Test Report contains 31 pages and may be used only in full.

This Test Report applies only to the specimen tested and may not be applied to other specimens of the same product.



Test report No: 7012318227
Title: GearEye BLE transceiver
Model: GearEye-A4

Page 4 of 31 Pages

FCC ID: 2AXUS-GRY4

Normative References.

| | |
|-------------------------------|---|
| FCC 47 CFR Part 15, Subpart C | Radio Frequency Devices Subpart C – Intentional Radiators |
| ANSI C63.4: 2014 | American National Standard for Method of Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz |
| ANSI C63.10: 2013 | American National Standard for Testing of Unlicensed Wireless Devices. |



Test report No: 7012318227
Title: GearEye BLE transceiver
Model: GearEye-A4

Page 5 of 31 Pages**FCC ID: 2AXUS-GRY4**

3. Summary of test:

The EUT was found to comply with requirements of: 47CFR Part 15, §§ 15.247, 15.205, 15.207, 15.209.

| Transmitter characteristics | Subclause |
|---|-------------------|
| Minimum 6 dB bandwidth | 15.247(a)(2) |
| Maximum output power | 15.247(b)(3) |
| Peak power spectral density | 15.247(e) |
| Out of band spurious emissions radiated | 15.205, 15.247(d) |
| Unwanted radiated emissions below 1 GHz | 15.209 |
| Conducted emissions on AC power line | 15.207 |

Electronics & Telematics
Laboratory

September 2020

Name: Eng. Yuri Rozenberg
Position: Head of EMC Branch.

Name: Michael Feldman.
Position: Test engineer.

Measurement uncertainty.

The test equipment was calibrated according to its recommended procedures and is within the manufacturer's published limit of error.

The laboratory calibrates its standards by a third party (traceable to NIST, USA) on a regular basis according to equipment manufacturer requirements.

In the following table the uncertainty calculation is given.

| Test description | Calculated uncertainty U_{LAB} |
|--|-------------------------------------|
| Conducted measurements | |
| Frequency error | 37.6 Hz |
| Spurious emission | ± 2.98 dB |
| Radiated emissions | |
| Electric field strength in a SAR at 3 m distance 30 MHz – 1.0 GHz | ± 4.32 dB |
| Electric field strength in a FAR at 3 m distance 1.0 GHz – 18 GHz | ± 4.47 dB |
| Substitution measurements | |
| In a FAR at 3 m distance 1.0 GHz – 18 GHz | ± 3.41 dB |



Test report No: 7012318227
Title: GearEye BLE transceiver
Model: GearEye-A4

Page 6 of 31 Pages

FCC ID: 2AXUS-GRY4

4. Equipment under test description.

*The applicant provided description.

4.1 General description

The GearEye transceiver (hereinafter: EUT) is tracking solution for organizes and locates items tagged with UHF RFID stickers. The device communicates with controlling mobile device like phone or tablet via BLE transceiver. EUT powered from Li-Ion 3.6VDC internal battery.

EUT technical characteristics

| Transmitter technical characteristics: | | Note |
|--|-----------------------|-------------------|
| Assigned frequency band | 2400 MHz – 2483.5 MHz | |
| Operating frequency range: | 2402 MHz – 2480 MHz | |
| DTS transmitter: | BLE 5.0 | |
| Types of modulation: | G-FSK | |
| Antenna information | | |
| Type | Manufacturer/Model | Antenna gain, dBi |
| Printed on PCB's Flex | GearEye-A4 | 0.6 |

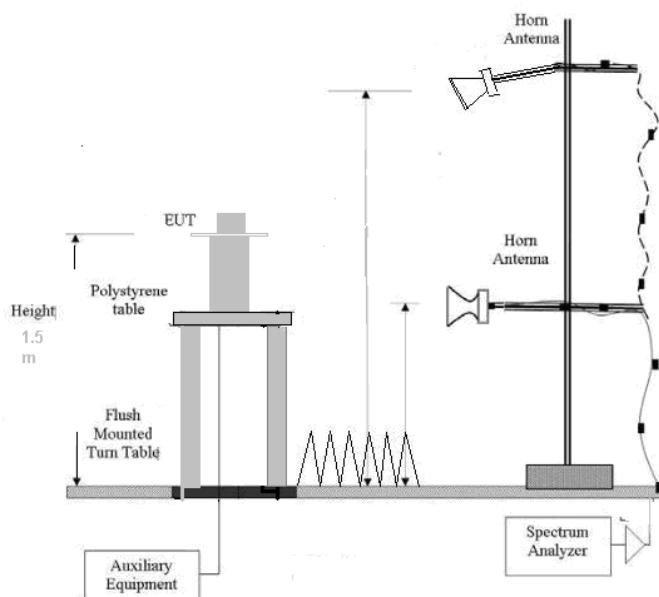


Fig.1. RE test setup above 1 GHz.

**Test report No: 7012318227****Page 7 of 31 Pages****Title: GearEye BLE transceiver****Model: GearEye-A4****FCC ID: 2AXUS-GRY4**

5. Test results

5.1 Transmitter characteristics

5.1.1 Transmitter 6 dB occupied bandwidth.

| | | | |
|----------------------------------|-------------------------------------|------------|------------------------------|
| Method of measurement | ANSI C63.10 subclause 11.8.2 | | |
| Operating Frequency Range | 2402– 2480 MHz | | |
| Detector used | Peak | | |
| Resolution bandwidth | 100 kHz | | |
| Video bandwidth | > 3 x RBW. | | |
| Trace mode | Max Hold. | | |
| Sweep time: | Auto couple. | | |
| Ambient Temperature 22° C | Relative Humidity | 53% | Air Pressure 1010 hPa |

The minimum 6 dB occupied bandwidth shall be at least 500 kHz.

| Carrier frequency, MHz | Measured 6 dB occupied bandwidth, kHz | 6 dB occupied bandwidth limit, kHz | Reference to plot # |
|------------------------|---------------------------------------|------------------------------------|---------------------|
| 2402 | 672 | 500 | 1 |
| 2440 | 666 | 500 | 2 |
| 2480 | 658 | 500 | 3 |

TEST EQUIPMENT USED:


| | | | | | | |
|---|---|----|--|--|--|--|
| 1 | 3 | 13 | | | | |
|---|---|----|--|--|--|--|



Test report No: 7012318227
Title: GearEye BLE transceiver
Model: GearEye-A4

Page 8 of 31 Pages


FCC ID: 2AXUS-GRY4

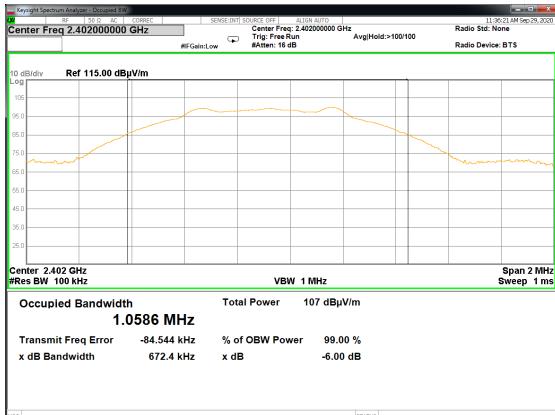

Plot # 1. Carrier frequency – 2402 MHz



Plot # 2. Carrier frequency – 2440 MHz

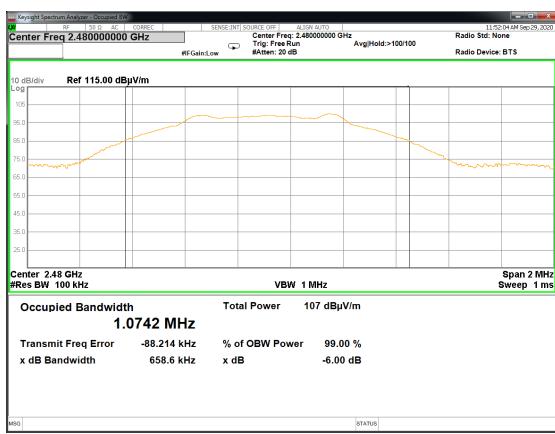

Plot # 3. Carrier frequency – 2480 MHz



Test report No: 7012318227
Title: GearEye BLE transceiver
Model: GearEye-A4

Page 9 of 31 Pages**FCC ID: 2AXUS-GRY4**

5.1.2 Maximum conducted output power test.

| | | | |
|----------------------------------|---------------------------------------|-----|------------------------------|
| Method of measurement | ANSI C63.10 subclause 11.9.2.2 | | |
| Operating Frequency Range | 2402– 2480 MHz | | |
| Detector used | RMS | | |
| Resolution bandwidth | 1 MHz | | |
| Video bandwidth | 3 x RBW. | | |
| Trace mode | Max Hold. | | |
| Ambient Temperature 23° C | Relative Humidity | 53% | Air Pressure 1010 hPa |

For Digital Transmit System the peak conducted output power in the 2400 – 2483.5 MHz band shall not exceed 1W (30 dBm) with antennas gain that do not exceed 6 dBi.

| Carrier frequency, MHz | Field strength, dB μ V/m | 99% power OBW, MHz | **EIR power, dBm | *Conducted output power, dBm | Conducted power limit, dBm | Reference to plot # |
|------------------------|------------------------------|--------------------|------------------|------------------------------|----------------------------|---------------------|
| 2402 | 101.3 | 1.1 | 6.5 | 5.9 | 30 | 4 |
| 2440 | 102.9 | 1.1 | 8.1 | 7.5 | 30 | 5 |
| 2480 | 100.8 | 1.1 | 6.0 | 5.4 | 30 | 6 |

*The maximum conducted output power = EIR power – Antenna gain. Where antenna gain = 0.6 dBi.

**EIR power = (E Field strength (dB μ V/m@3m) - 95.2) +10Log (99% OBW).

Measured field straight level was converted to EIRP level. The EIRP calculation provided after verification according to substitution test method. EUT was replaced by generator and substitution antenna. Result calculated from generator output level, substitution antenna gain and loss of connected cable was used for EIRP calculation.

Transmitter was operated in continuous transmit mode at bottom, middle and top of the 2402 – 2480 MHz frequency band and at maximum output power and maximum data bit rate.

TEST EQUIPMENT USED:


| | | | | | | |
|---|---|----|--|--|--|--|
| 1 | 3 | 13 | | | | |
|---|---|----|--|--|--|--|



Test report No: 7012318227
Title: GearEye BLE transceiver
Model: GearEye-A4

Page 10 of 31 Pages

FCC ID: 2AXUS-GRY4

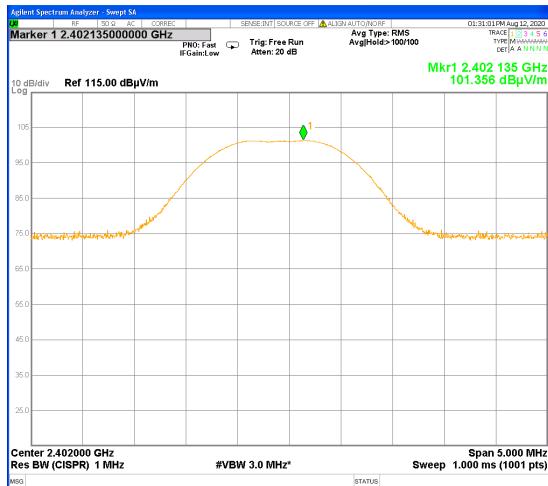

Plot # 4. Carrier frequency – 2402 MHz



Plot # 5. Carrier frequency – 2440 MHz



Plot # 6. Carrier frequency – 2480 MHz



Test report No: 7012318227
Title: GearEye BLE transceiver
Model: GearEye-A4

Page 11 of 31 Pages

FCC ID: 2AXUS-GRY4

5.1.3 Power spectral density test

| | | | |
|--|--------------------------------------|-----|------------------------------|
| Method of measurement | ANSI C63.10 subclause 11.10.2 | | |
| Operating Frequency Range | 2402– 2480 MHz | | |
| Detector used | RMS | | |
| Resolution bandwidth | 10 kHz | | |
| Video bandwidth | >3 x RBW. | | |
| Trace mode | Max Hold. | | |
| Ambient Temperature 23 ⁰ C | Relative Humidity | 53% | Air Pressure 1010 hPa |

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

| Carrier frequency, MHz | Field strength, dB μ V/m | *EIR power, dBm | **Conducted PSD dBm | Conducted PSD limit, dBm/3 kHz | Reference to plot # |
|------------------------|------------------------------|-----------------|---------------------|--------------------------------|---------------------|
| 2402 | 90.8 | -9.6 | -9.0 | 8 | 7 |
| 2440 | 93.0 | -7.4 | -6.8 | 8 | 8 |
| 2480 | 90.3 | -10.1 | -9.5 | 8 | 9 |

**The conducted to antenna PSD = EIR power – Antenna gain. Where antenna gain = 0.6 dBi.

*EIRP = E Field strength (dB μ V/m@3m) - 95.2 + 10 Log (3 kHz RBW/ 10 kHz RBW).

Calculation of EIRP performed after verification by substitution method.

TEST SUMMARY

EUT maximum output power result is below PSD limit per 47 CFR 15.247 (e).

The EUT was found complies with standard requirement.

TEST EQUIPMENT USED:

| | | | | | |
|---|---|----|--|--|--|
| 1 | 3 | 13 | | | |
|---|---|----|--|--|--|



Test report No: 7012318227
Title: GearEye BLE transceiver
Model: GearEye-A4

Page 12 of 31 Pages

FCC ID: 2AXUS-GRY4



Plot # 7. Carrier frequency – 2402 MHz



Plot # 8. Carrier frequency – 2440 MHz



Plot # 9. Carrier frequency – 2480 MHz



Test report No: 7012318227
Title: GearEye BLE transceiver
Model: GearEye-A4

Page 13 of 31 Pages**FCC ID: 2AXUS-GRY4**

5.1.4 Radiated emissions test according to §§ 15.247(d), 15.205(a)

| | | | |
|----------------------------------|---|------------------------------|--|
| Method of measurement | ANSI C63.10 sub clauses 11.11/ 11.12 | | |
| Operating Frequency Range | 2402– 2480 MHz | | |
| Detector used: | Trace 1 – Peak; Trace 2 - RMS | | |
| Resolution bandwidth | 100 kHz /1 MHz | | |
| Video bandwidth | 3x RBW. | | |
| Trace mode: | Trace 1 – Max hold; Trace 2 – Power averaging. | | |
| Ambient Temperature 23° C | Relative Humidity 53% | Air Pressure 1010 hPa | |

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

In addition, radiated emissions, which fall in the restricted bands, as, defined in Section 15.205(a) must also comply with the radiated emission limits specified in Section 15.209(a).

Carrier frequency 2402 MHz

| Frequency, MHz | Radiated emissions, dBμV/m | Peak limit, dBμV/m | Avg limit, dBμV/m | Margin, dB | Note | Note | Reference to plot# |
|-----------------------|--|--|---|-------------------|-------------|------------------|---------------------------|
| 2353.8 | 50.7 | 74 | - | >20 | *RB | Detector peak | 10 |
| 2373.3 | 38.8 | - | 54 | 14.2 | RB | Detector average | 10 |
| 2400.0 | 61.3 | 80.5 | - | 19.2 | Band edge | Detector peak. | 11 |
| 2500.0 | 50.3 | 74.0 | - | >20 | RB | Detector peak | 12 |
| 2500.0 | 39.4 | - | 54 | 14.6 | RB | Detector average | 12 |
| 4803.3 | 56.4 | 74.0 | - | 7.6 | RB | Detector peak | 14 |
| 4804.0 | 47.0 | - | 54.0 | 7.0 | RB | Detector average | 14 |

*RB – restricted band

Carrier frequency 2440 MHz

| Frequency, MHz | Radiated emissions, dBμV/m | Peak limit, dBμV/m | Avg limit, dBμV/m | Margin, dB | Note | Note | Reference to plot# |
|-----------------------|--|--|---|-------------------|-------------|------------------|---------------------------|
| 2227.4 | 49.6 | 74 | - | >20 | RB | Detector peak | 17 |
| 2227.4 | 39.5 | - | 54 | 14.5 | RB | Detector average | 17 |
| 4880.1 | 56.1 | 74 | - | 17.9 | RB | Detector peak | 21 |
| 4879.9 | 46.5 | - | 54 | 7.5 | RB | Detector average | 21 |
| 10923.0 | 55.5 | 74 | - | 17.9 | RB | Detector peak | 22 |
| 10923.0 | 43.8 | - | 54 | 10.2 | RB | Detector average | 22 |

**Test report No: 7012318227****Page 14 of 31 Pages****Title: GearEye BLE transceiver****Model: GearEye-A4****FCC ID: 2AXUS-GRY4**

Carrier frequency 2480 MHz

| Frequency, MHz | Radiated emissions, dB μ V/m | Peak limit, dB μ V/m | Avg limit, dB μ V/m | Margin, dB | Note | Note | Reference to plot# |
|----------------|----------------------------------|--------------------------|-------------------------|------------|------|-------------------|--------------------|
| 2373.3 | 49.3 | 74 | - | >20 | *RB | Detector peak | 24 |
| 2373.3 | 38.7 | - | 54 | 15.3 | RB | Detector average. | 24 |
| 2483.8 | 52.2 | 74 | - | >20 | RB | Detector peak | 26 |
| 2483.7 | 40.9 | - | 54 | 13.1 | RB | Detector average | 26 |
| 4960.3 | 52.4 | 74 | - | >20 | RB | Detector peak | 28 |
| 4960.0 | 43.9 | - | 54 | 10.1 | RB | Detector average | 28 |

*RB – restricted band

TEST SUMMARY

All emissions outside of the 2400 – 2483.5 MHz frequency band founded below 15.247(d) limits.

TEST EQUIPMENT USED:

| | | | | | | |
|---|---|---|----|----|----|--|
| 1 | 3 | 4 | 10 | 13 | 14 | |
|---|---|---|----|----|----|--|








Test report No: 7012318227
Title: GearEye BLE transceiver
Model: GearEye-A4

Page 15 of 31 Pages

FCC ID: 2AXUS-GRY4

Carrier frequency – 2402 MHz.

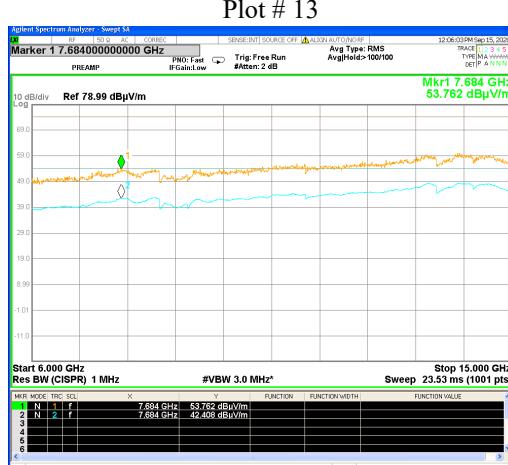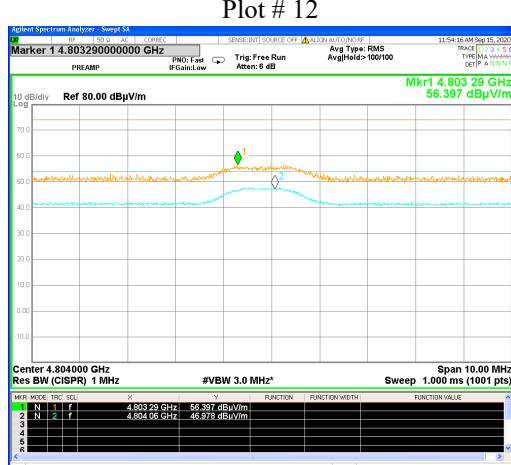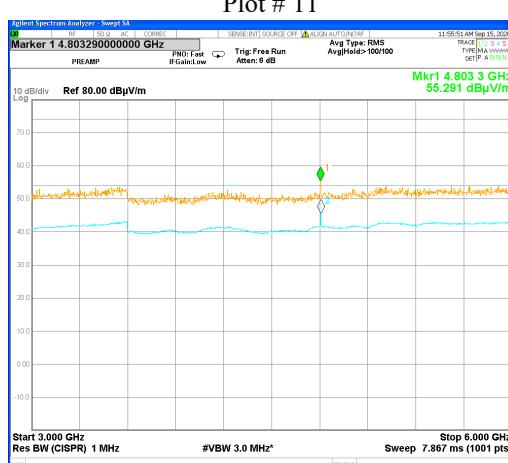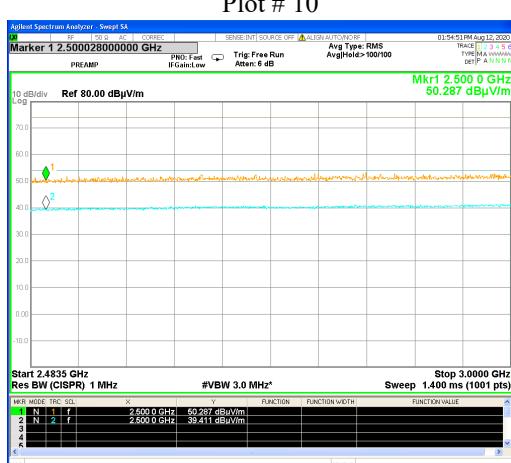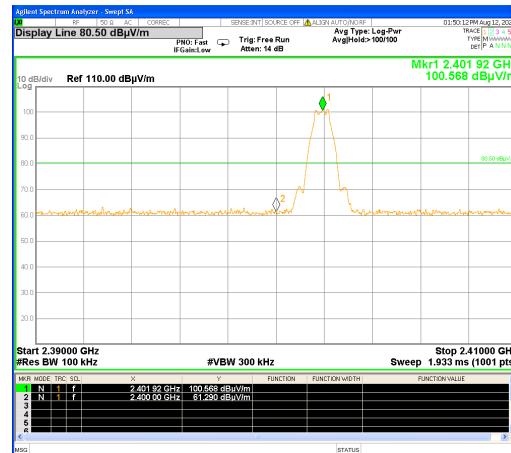

**Test report No: 7012318227****Title: GearEye BLE transceiver****Model: GearEye-A4****Page 16 of 31 Pages****FCC ID: 2AXUS-GRY4**

Plot # 16.




Test report No: 7012318227
Title: GearEye BLE transceiver
Model: GearEye-A4


Page 17 of 31 Pages

FCC ID: 2AXUS-GRY4


Carrier frequency - 2440 MHz.

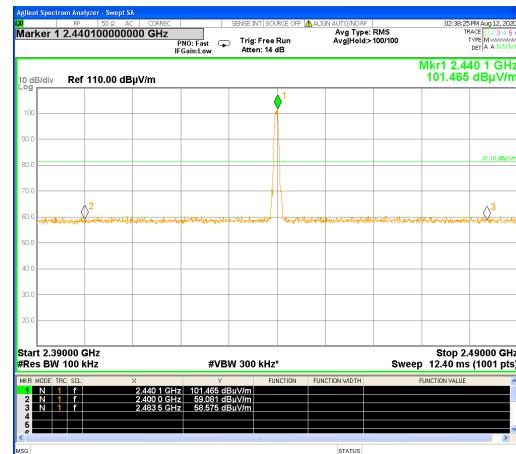


Plot # 17

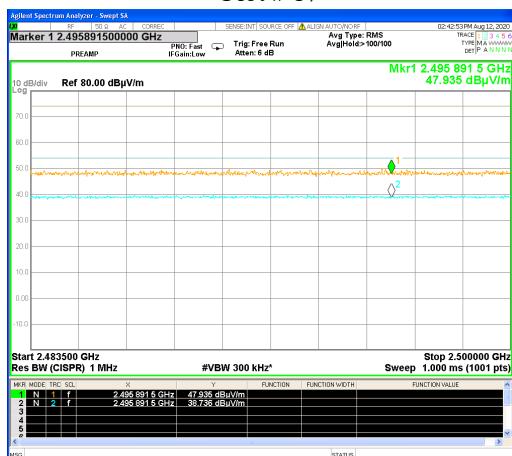

Plot # 19

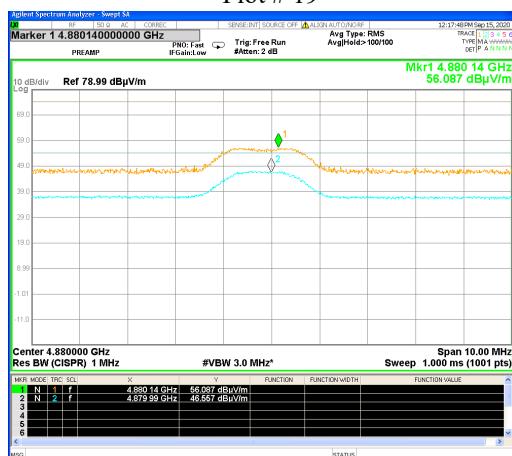

Plot # 21.

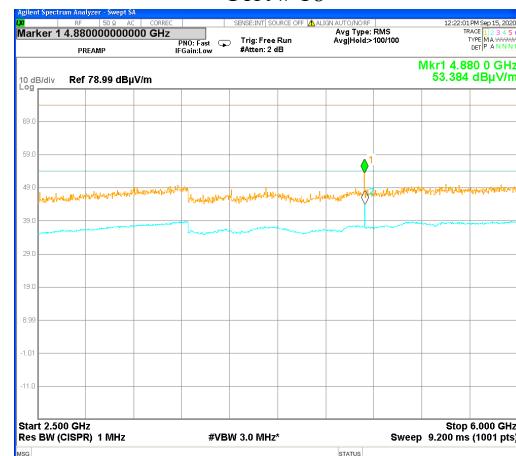

Plot # 20



Plot # 22.




Test report No: 7012318227

Page 18 of 31 Pages

Title: GearEye BLE transceiver

Model: GearEye-A4

FCC ID: 2AXUS-GRY4

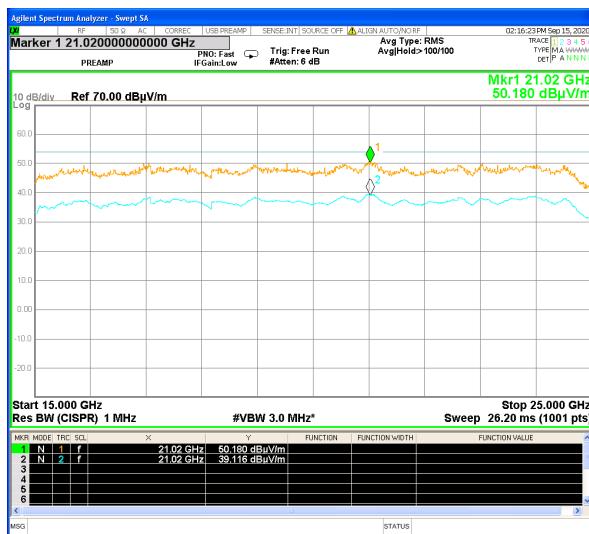

Plot # 23.



Test report No: 7012318227





Title: GearEye BLE transceiver

Model: GearEye-A4

Page 19 of 31 Pages

FCC ID: 2AXUS-GRY4

Carrier frequency 2480 MHz.

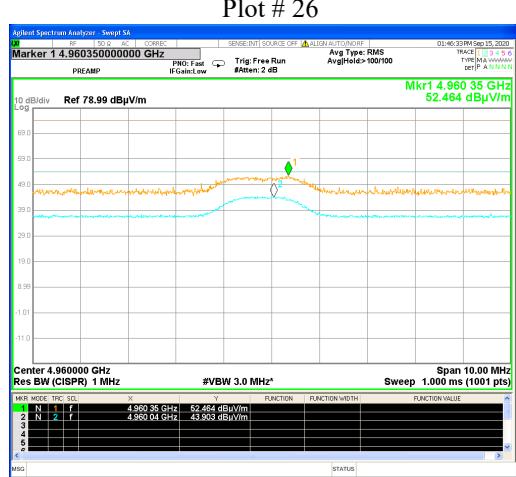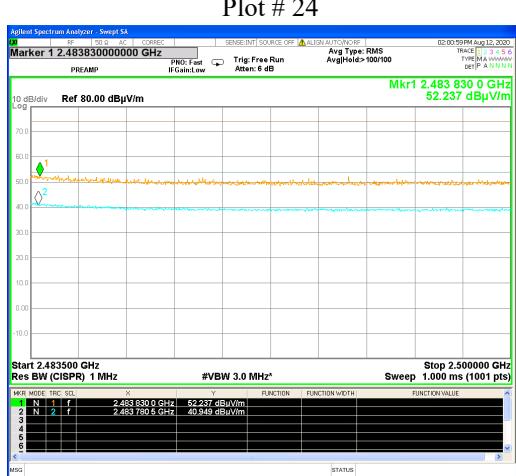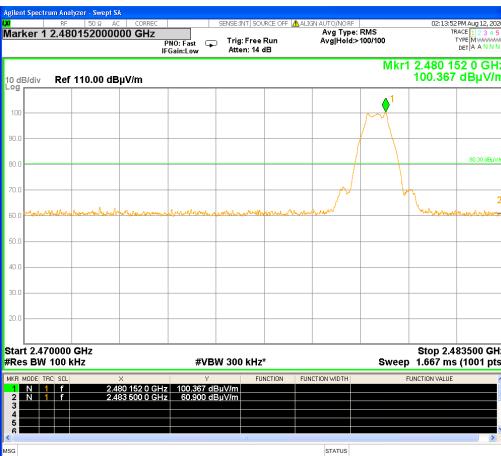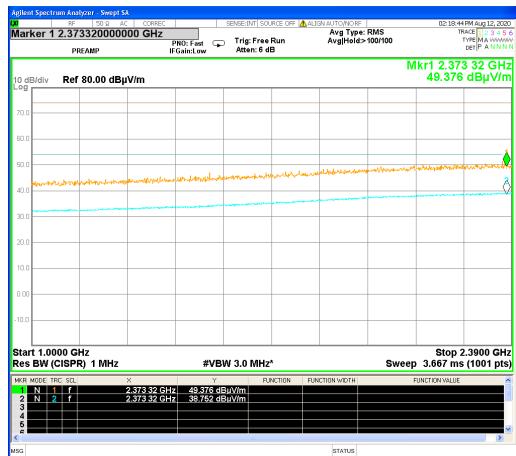

Test report No: 7012318227
Title: GearEye BLE transceiver
Model: GearEye-A4

Page 20 of 31 Pages

FCC ID: 2AXUS-GRY4



Plot # 30



Test report No: 7012318227
Title: GearEye BLE transceiver
Model: GearEye-A4

Page 21 of 31 Pages

FCC ID: 2AXUS-GRY4

5.1.5 Radiated emissions test according to § 15.209

| | | | |
|----------------------------------|--------------------------|-----|------------------------------|
| Method of measurement | ANSI C63.10 §6.5 | | |
| Detectors used | CISPR Quasi-Peak | | |
| Resolution bandwidth | 9 kHz/120 kHz | | |
| Video bandwidth | >3 x RBW. | | |
| Trace mode | Free run | | |
| Ambient Temperature 24° C | Relative Humidity | 53% | Air Pressure 1010 hPa |

TEST DESCRIPTION:

The measurements were performed at 3 m test distance in Anechoic chamber. The EUT was arranged on a polystyrene table 0.8 m height and placed on the turn - table. The Active Loop antenna in 150 kHz to 30 MHz frequency band and Biconilog antenna in 30 MHz – 1.0 GHz frequency band were used. The emission level was maximized by initially rotating turntable through 360°, varying the antenna height between 1 m and 4 m, rerouting EUT cables and changing antenna polarization from vertical to horizontal.

Radiated emission test results.

| Frequency (MHz) | Antenna polariz. V/H | Antenna Height m | Turn- table Angle (°) | Emission Level Note 1 dB μ V/m | Limit @ 3m dB μ V/m | Margin Note 2 dB | Results |
|--------------------|----------------------------|------------------------|--------------------------------|---|-------------------------------|------------------------|---------|
| 811.1 | V | 1.0 | 249 | 35.0 | 46.0 | 11.0 | Pass |

Note 1: Emission level = E Reading (dB μ V) + Cable loss (dB) + Antenna Factor (dB/m).
 For Cable Loss and Antenna Factor refer to Appendix 2.

Note 2: Margin (dB) = Limit (dB μ V/m) – Emission level (dB μ V/m)

REQUIREMENTS:

EUT radiated emission shall not exceed value required in section 15.209

TEST RESULT:

Test results presented in a table and in plots ## 31, 32.

TEST EQUIPMENT USED:

| | | | | | |
|---|---|----|----|--|--|
| 1 | 6 | 13 | 15 | | |
|---|---|----|----|--|--|




Test report No: 7012318227

Title: GearEye BLE transceiver

Model: GearEye-A4

Page 22 of 31 Pages

FCC ID: 2AXUS-GRY4

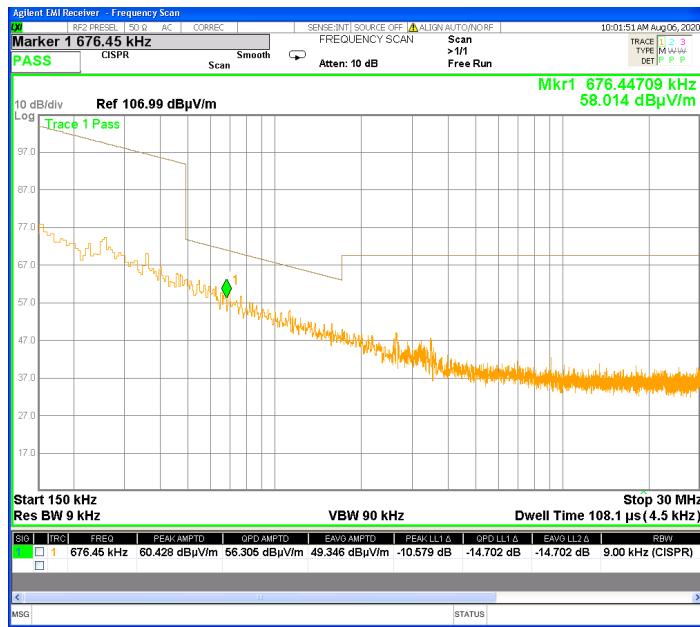

Plot # 31. Investigation result in 0.15 – 30 MHz frequency range.



Plot # 32. Investigation result in 30 - 1000 MHz frequency range.



Test report No: 7012318227
Title: GearEye BLE transceiver
Model: GearEye-A4

Page 23 of 31 Pages

FCC ID: 2AXUS-GRY4

5.1.6 Conducted emissions test according to § 15.207

| | | |
|---------------------------|-----------------------|-----------------------|
| Method of measurement | ANSI 63.10 § 6.2 | |
| Ambient Temperature 23° C | Relative Humidity 54% | Air Pressure 1010 hPa |

| Frequency, MHz | Class B equipment, dB (μV) | |
|-------------------|----------------------------|----------|
| | QP | AVRG |
| 0.15 - 0.5 | 66 - 56* | 56 - 46* |
| 0.5 - 5 | 56 | 46 |
| 5 - 30 | 60 | 50 |

* Decreases linearly with the logarithm of the frequency.

TEST PROCEDURE

EUT was connected to 120VAC main via auxiliary 5VDC power supply. The EUT was placed on a table in shielded room at a height 80 cm from floor and 40 cm from the vertical reference plane and at more than 80 cm from any other metal surfaces. The measurements were performed at mains terminals by means of LISN, connected to spectrum analyzer in the frequency range as referred to in the table above. The measurements were made with quasi-peak (CISPR) and average detectors. The position of the EUT cables was varied to determine maximum emission level.

TEST RESULTS:

Test results present at plots # 33 for line Phase and # 34 for line Neutral.

TEST EQUIPMENT USED:

| | | | | | |
|---|----|----|--|--|--|
| 1 | 11 | 12 | | | |
|---|----|----|--|--|--|




Test report No: 7012318227

Page 24 of 31 Pages


Title: GearEye BLE transceiver

Model: GearEye-A4

FCC ID: 2AXUS-GRY4

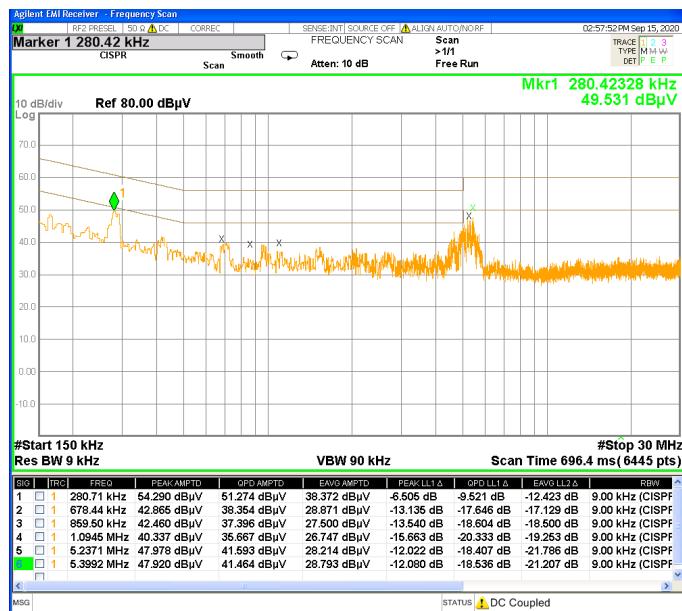

Plot # 33. AC line conducted emissions test. Line Phase

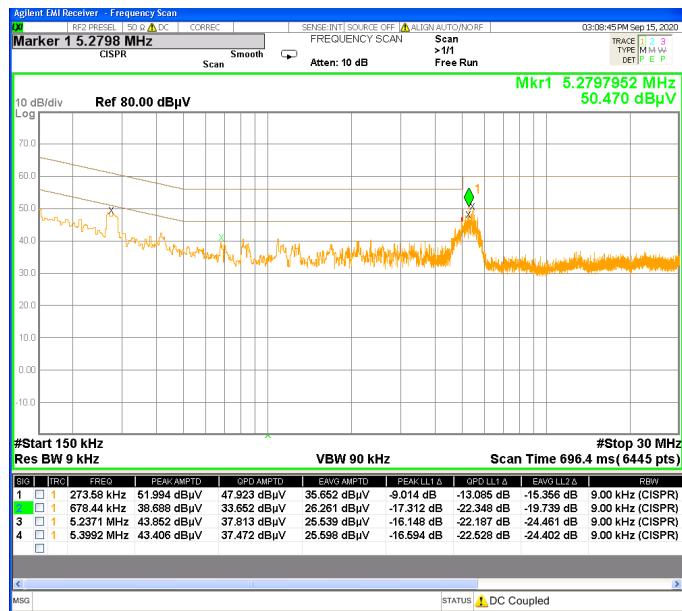

Plot # 34. AC line conducted emissions test. Line Neutral



Test report No: 7012318227
Title: GearEye BLE transceiver
Model: GearEye-A4

Page 25 of 31 Pages**FCC ID: 2AXUS-GRY4**

APPENDIX A Test equipment used.

Test equipment used

| No | Description | Manufacturer information | | | Due Calibration date |
|----|--|--------------------------------|------------------|------------|----------------------|
| | | Name | Model | Serial No | |
| 1 | MXE EMI Receiver 20 Hz -26.5 GHz | Agilent | N9038A | SII 650114 | June 2021 |
| 2 | Cable RF 1m | Huber-Suhner | Sucoflex 104 | 21325/4PE | October 2020 |
| 3 | Double Ridged Guide Antenna 0.75 – 18 GHz | ETS-Lindgren | 3115 | 00143138 | December 2020 |
| 4 | Broadband Horn antenna 15 – 40 GHz | Schwarzbeck Mess-Electronik | BBHA 9170 | 9170-341 | December 2020 |
| 5 | Double Ridged Waveguide Horn Antenna 1 – 18 GHz | ETS-Lindgren | 3117 | 00139055 | December 2020 |
| 6 | Antenna Biconilog 26 – 6000 MHz | ETS-Lindgren | 31142D | 0146490 | December 2020 |
| 7 | Spectrum analyzer 20 Hz-40 GHz | Rohde&Schwarz | ESU 40 | 100168 | November 2020 |
| 8 | MXG Signal Generator 100 KHz - 20 GHz | Agilent | N5183A | 6501148 | May 2021 |
| 9 | Attenuator 3 dB DC – 12.4 GHz | HP | 8491A | 50469 | October 2020 |
| 10 | USB preamplifier 2 GHz – 50 GHz | Keysight | U7227F | MY55380004 | January 2021 |
| 11 | LISN 9 kHz – 30 MHz | FCC | LISN 250-32-4-16 | SII5023 | October 2020 |
| 12 | Transient limiter 0.009-200 MHz | HP | 11947A | 3107105 | August 2021 |
| 13 | Cable RF 5m | Harbour Industries | Neoflex LLEF142 | 1802 | July 2021 |
| 14 | Cable RF 0.5m | Huber-Suhner | Multiflex 141 | 520201 | October 2020 |
| 15 | Active Loop antenna 1.0 kHz – 30 MHz | ETS-Lindgren | 6507 | 00144641 | December 2020 |



Test report No: 7012318227

Page 26 of 31 Pages

Title: GearEye BLE transceiver

Model: GearEye-A4

FCC ID: 2AXUS-GRY4

Cable Loss (Mast 6 m set cable.)

| Point | Frequency (MHz) | Cable Loss (dB) | Point | Frequency (MHz) | Cable Loss (dB) |
|-------|-----------------|-----------------|-------|-----------------|-----------------|
| 1 | 30 | 0.3 | 21 | 1000 | 2.5 |
| 2 | 50 | 0.4 | 22 | 1100 | 2.6 |
| 3 | 100 | 0.6 | 23 | 1200 | 2.8 |
| 4 | 150 | 0.8 | 24 | 1300 | 2.9 |
| 5 | 200 | 1.0 | 25 | 1400 | 3.1 |
| 6 | 250 | 1.1 | 26 | 1500 | 3.2 |
| 7 | 300 | 1.2 | 27 | 1600 | 3.3 |
| 8 | 350 | 1.3 | 28 | 1700 | 3.5 |
| 9 | 400 | 1.5 | 29 | 1800 | 3.6 |
| 10 | 450 | 1.6 | 30 | 1900 | 3.7 |
| 11 | 500 | 1.7 | 31 | 2000 | 3.9 |
| 12 | 550 | 1.8 | 32 | 2100 | 4.0 |
| 13 | 600 | 1.9 | 33 | 2200 | 4.1 |
| 14 | 650 | 1.9 | 34 | 2300 | 4.2 |
| 15 | 700 | 2.0 | 35 | 2400 | 4.4 |
| 16 | 750 | 2.1 | 36 | 2500 | 4.6 |
| 17 | 800 | 2.1 | 37 | 2600 | 4.7 |
| 18 | 850 | 2.2 | 38 | 2700 | 4.8 |
| 19 | 900 | 2.3 | 39 | 2800 | 4.9 |
| 20 | 950 | 2.4 | 40 | 2900 | 5.0 |

**Test report No: 7012318227****Page 27 of 31 Pages****Title: GearEye BLE transceiver****Model: GearEye-A4****FCC ID: 2AXUS-GRY4****Antenna factor****Biconilog Antenna, ETS-Lindgren mod. 31142D, S/N: 0146490 3 m calibration.**

| f / MHz | AF / dB/m | f / MHz | AF / dB/m | f / MHz | AF / dB/m |
|----------------|------------------|----------------|------------------|----------------|------------------|
| 30 | 18.7 | 250 | 12.0 | 2750 | 31.0 |
| 35 | 15.7 | 300 | 13.8 | 3000 | 31.2 |
| 40 | 12.9 | 400 | 16.2 | 3250 | 32.7 |
| 45 | 10.6 | 500 | 18.6 | 3500 | 34.5 |
| 50 | 9.0 | 600 | 20.2 | 3750 | 34.3 |
| 60 | 7.3 | 700 | 21.8 | 4000 | 34.5 |
| 70 | 7.7 | 800 | 22.9 | 4250 | 35.3 |
| 80 | 8.2 | 900 | 24.1 | 4500 | 35.5 |
| 90 | 9.2 | 1000 | 24.8 | 4750 | 36.1 |
| 100 | 9.4 | 1250 | 26.9 | 5000 | 37.4 |
| 120 | 8.5 | 1500 | 30.2 | 5250 | 38.4 |
| 140 | 8.5 | 1750 | 28.5 | 5000 | 39.9 |
| 160 | 9.1 | 2000 | 28.9 | 5750 | 38.2 |
| 180 | 10.5 | 2250 | 29.8 | 6000 | 39.1 |
| 200 | 10.9 | 2500 | 32.5 | - | - |

**Test report No: 7012318227****Page 28 of 31 Pages****Title: GearEye BLE transceiver****Model: GearEye-A4****FCC ID: 2AXUS-GRY4****Antenna Factor****Double Ridged Guide Antenna mfr ETS-Lindgren model 3115 1m calibration**

| Point | Frequency (MHz) | Antenna Factor (dB/m) |
|-------|-----------------|-----------------------|
| 1 | 1000 | 23.7 |
| 2 | 1500 | 25.5 |
| 3 | 2000 | 28.5 |
| 4 | 2500 | 28.1 |
| 5 | 3000 | 29.6 |
| 6 | 3500 | 31.1 |
| 7 | 4000 | 32.5 |
| 8 | 4500 | 32.5 |
| 9 | 5000 | 33.5 |
| 10 | 5500 | 34.7 |
| 11 | 6000 | 36.1 |
| 12 | 6500 | 36.5 |
| 13 | 7000 | 37.3 |
| 14 | 7500 | 38.0 |
| 15 | 8000 | 37.3 |
| 16 | 8500 | 37.9 |
| 17 | 9000 | 38.1 |
| 18 | 9500 | 38.5 |
| 19 | 10000 | 38.7 |
| 20 | 10500 | 38.8 |
| 21 | 11000 | 38.6 |
| 22 | 11500 | 38.8 |
| 23 | 12000 | 38.9 |
| 24 | 12500 | 39.3 |
| 25 | 13000 | 40.2 |
| 26 | 13500 | 40.6 |
| 27 | 14000 | 40.6 |
| 28 | 14500 | 40.4 |
| 29 | 15000 | 39.6 |
| 30 | 15500 | 39.5 |
| 31 | 16000 | 39.8 |
| 32 | 16500 | 40.4 |
| 33 | 17000 | 41.3 |
| 34 | 17500 | 42.6 |
| 35 | 18000 | 43.2 |

Cable Loss**Type: Neoflex LLEF142; Ser.No.1802; 5 m length**

| Point | Frequency (GHz) | Cable Loss (dB) |
|-------|-----------------|-----------------|
| 0 | 0.0-1.0 | 1.3 |
| 1 | 1.0 – 3.0 | 2.4 |
| 2 | 3.0 – 5.0 | 3.2 |
| 3 | 5.0-7.0 | 4.0 |
| 4 | 7.0-9.0 | 4.4 |
| 5 | 9.0-10.0 | 4.7 |
| 6 | 10.0-12.0 | 5.2 |
| 7 | 12.0-14.0 | 5.9 |
| 8 | 14.0-16.0 | 6.1 |
| 9 | 16.2-18.00 | 6.6 |



Test report No: 7012318227

Page 29 of 31 Pages

Title: GearEye BLE transceiver

Model: GearEye-A4

FCC ID: 2AXUS-GRY4

Antenna Factor
Broadband Horn Antenna model BBHA 9170 1m calibration

| Point | Frequency (GHz) | Antenna Factor (dB/m) |
|-------|-----------------|-----------------------|
| 1 | 15.0 | 38.5 |
| 2 | 16.0 | 37.7 |
| 3 | 17.0 | 38.1 |
| 4 | 18.0 | 37.9 |
| 5 | 19.0 | 38.0 |
| 6 | 20.0 | 38.0 |
| 7 | 21.0 | 37.9 |
| 8 | 22.0 | 38.2 |
| 9 | 23.0 | 39.6 |
| 10 | 24.0 | 39.6 |
| 11 | 25.0 | 39.3 |
| 12 | 26.0 | 39.5 |
| 13 | 27.0 | 39.6 |
| 14 | 28.0 | 39.6 |
| 15 | 30.0 | 40.1 |
| 16 | 32.0 | 41.2 |
| 17 | 34.0 | 41.5 |
| 18 | 35.0 | 41.9 |
| 19 | 36.0 | 42.2 |
| 20 | 38.0 | 43.8 |
| 21 | 40.0 | 43.2 |

Antenna Factor
For Antenna Loop MFR ETS Lindgren, Type/Model 6507, S/N: 00144641

| No. | Frequency MHz | Magnetic antenna factor, dBs/m | Electric antenna factor, dB/m |
|-----|------------------|-----------------------------------|----------------------------------|
| 1 | 9 | -21.5 | 30.0 |
| 2 | 10 | -22.0 | 29.5 |
| 3 | 20 | -27.7 | 23.8 |
| 4 | 50 | -32.2 | 19.4 |
| 5 | 75 | -33.0 | 18.5 |
| 6 | 100 | -33.4 | 18.2 |
| 7 | 150 | -33.6 | 17.9 |
| 8 | 250 | -33.7 | 17.9 |
| 9 | 500 | -33.8 | 17.8 |
| 10 | 750 | -33.8 | 17.7 |
| 11 | 1000 | -33.8 | 17.7 |
| 12 | 2000 | -33.7 | 17.9 |
| 13 | 3000 | -33.8 | 17.8 |
| 14 | 4000 | -34.0 | 17.5 |
| 15 | 5000 | -34.3 | 17.2 |
| 16 | 10000 | -35.2 | 16.4 |
| 17 | 15000 | -35.8 | 15.8 |
| 18 | 20000 | -36.0 | 15.6 |
| 19 | 25000 | -36.2 | 15.3 |
| 20 | 30000 | -36.4 | 15.2 |



Test report No: 7012318227
Title: GearEye BLE transceiver
Model: GearEye-A4

Page 30 of 31 Pages

FCC ID: 2AXUS-GRY4

APPENDIX B Photo of the test setups.

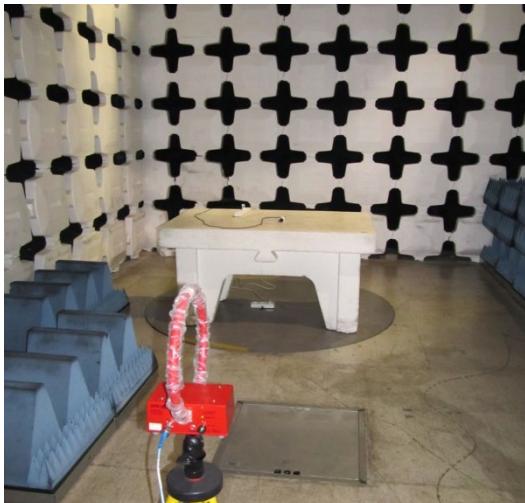


Photo 1.



Photo 2.

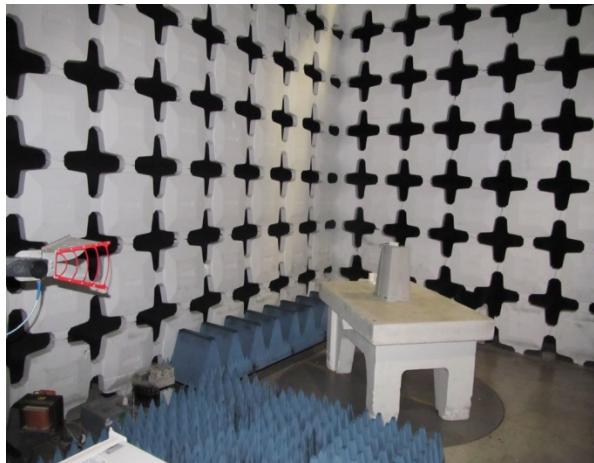


Photo 3.

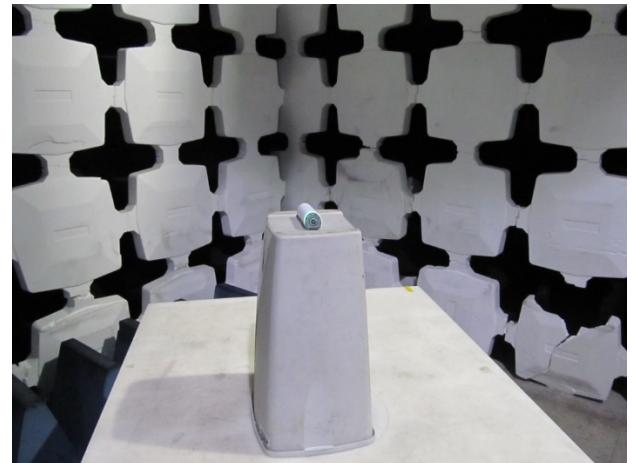


Photo 4.



Test report No: 7012318227
Title: GearEye BLE transceiver
Model: GearEye-A4

Page 31 of 31 Pages

FCC ID: 2AXUS-GRY4

APPENDIX C Abbreviations and acronyms.

The following abbreviations and acronyms are applicable to this test report:

| | |
|----------|---|
| AC | alternating current |
| cm | centimeter |
| dB | decibel |
| dBm | decibel referred to one milliwatt |
| dB(µV) | decibel referred to one microvolt |
| dB(µV/m) | decibel referred to one microvolt per meter |
| EBW | emission bandwidth. |
| EMC | electromagnetic compatibility |
| EUT | equipment under test |
| GHz | gigahertz |
| H | height |
| Hz | hertz |
| kHz | kilohertz |
| L | length |
| LNA | low noise amplifier |
| m | meter |
| Mbps | megabit per second |
| MHz | megahertz |
| NA | not applicable |
| OFDM | Orthogonal Frequency Division Multiple Access |
| PRBS | pseudo random binary sequence |
| QP | quasi-peak |
| RF | radio frequency |
| RE | radiated emission |
| SA | spectrum analyzer |
| rms | root mean square |
| W | width |

End of the document