





## Test Graphs

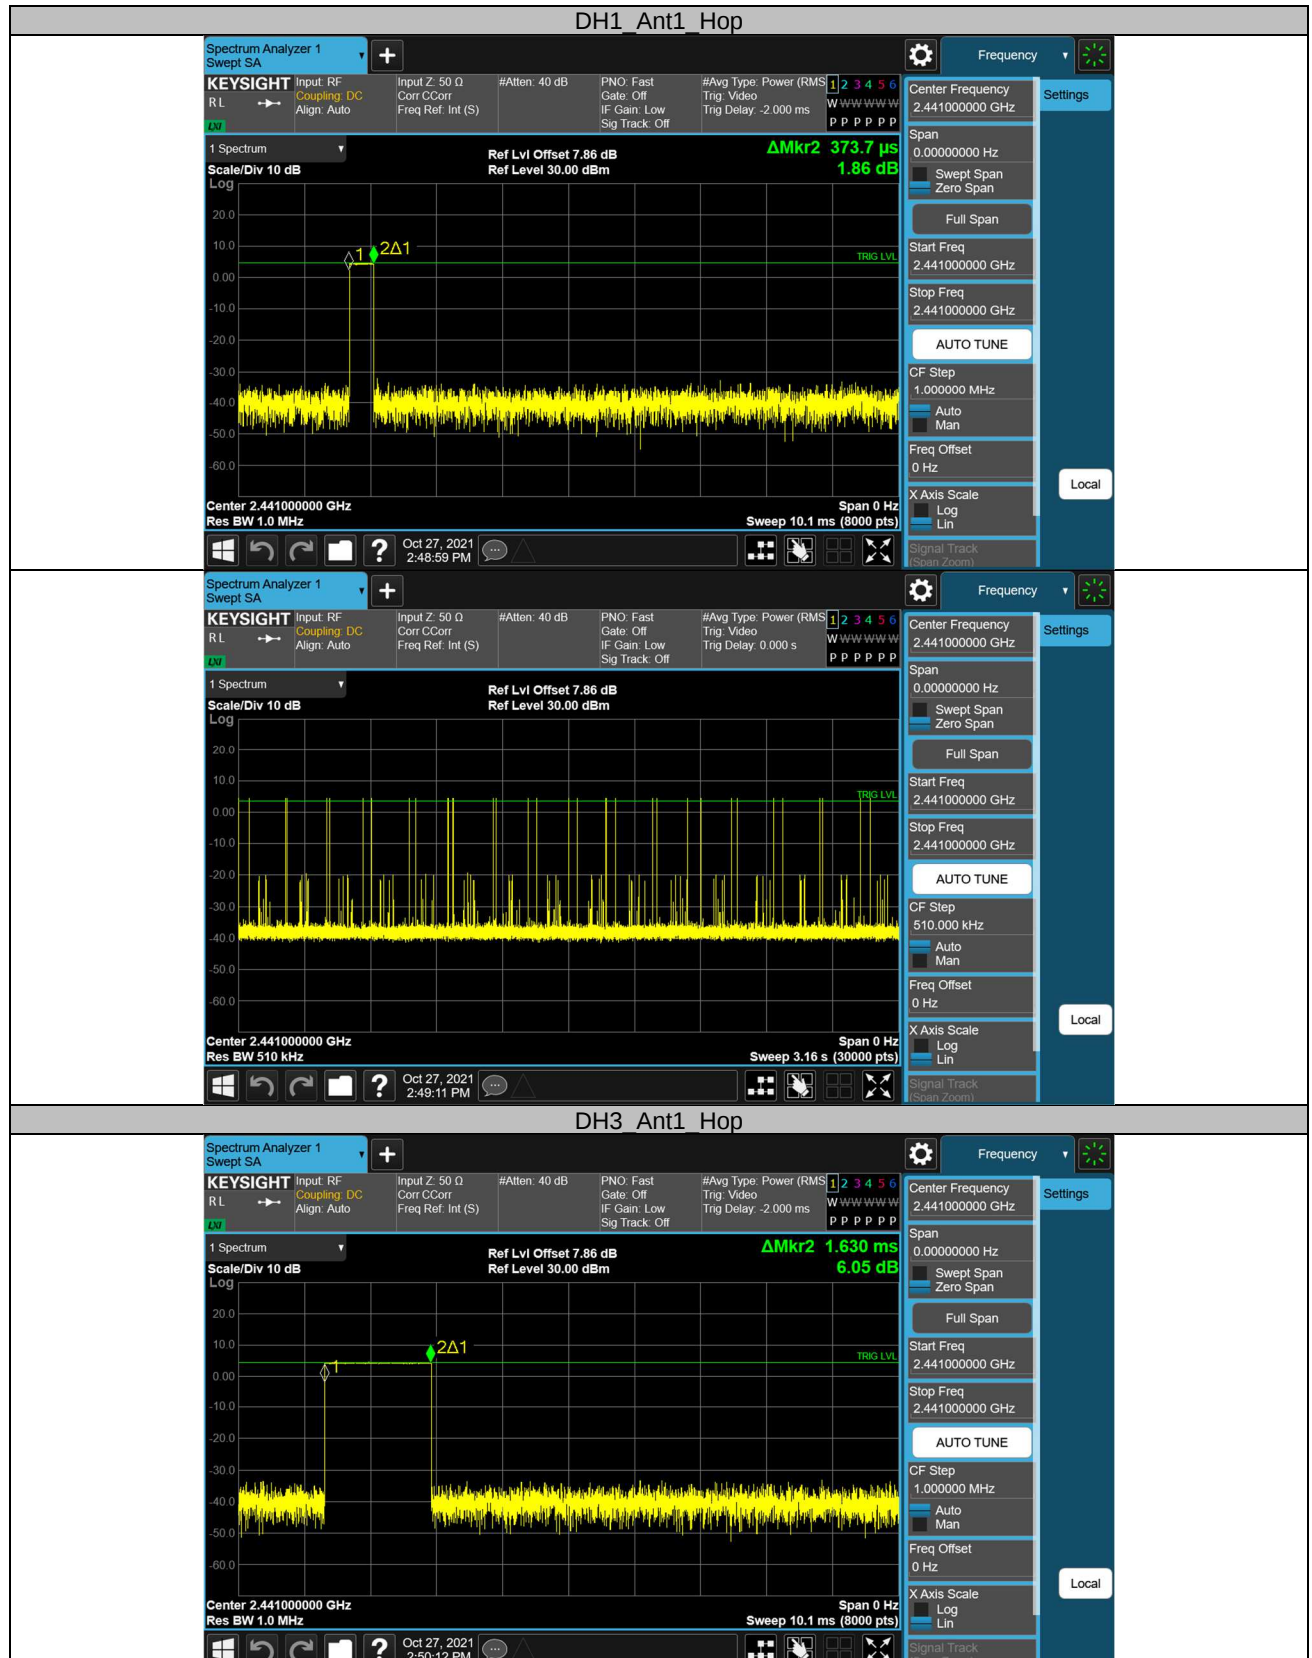

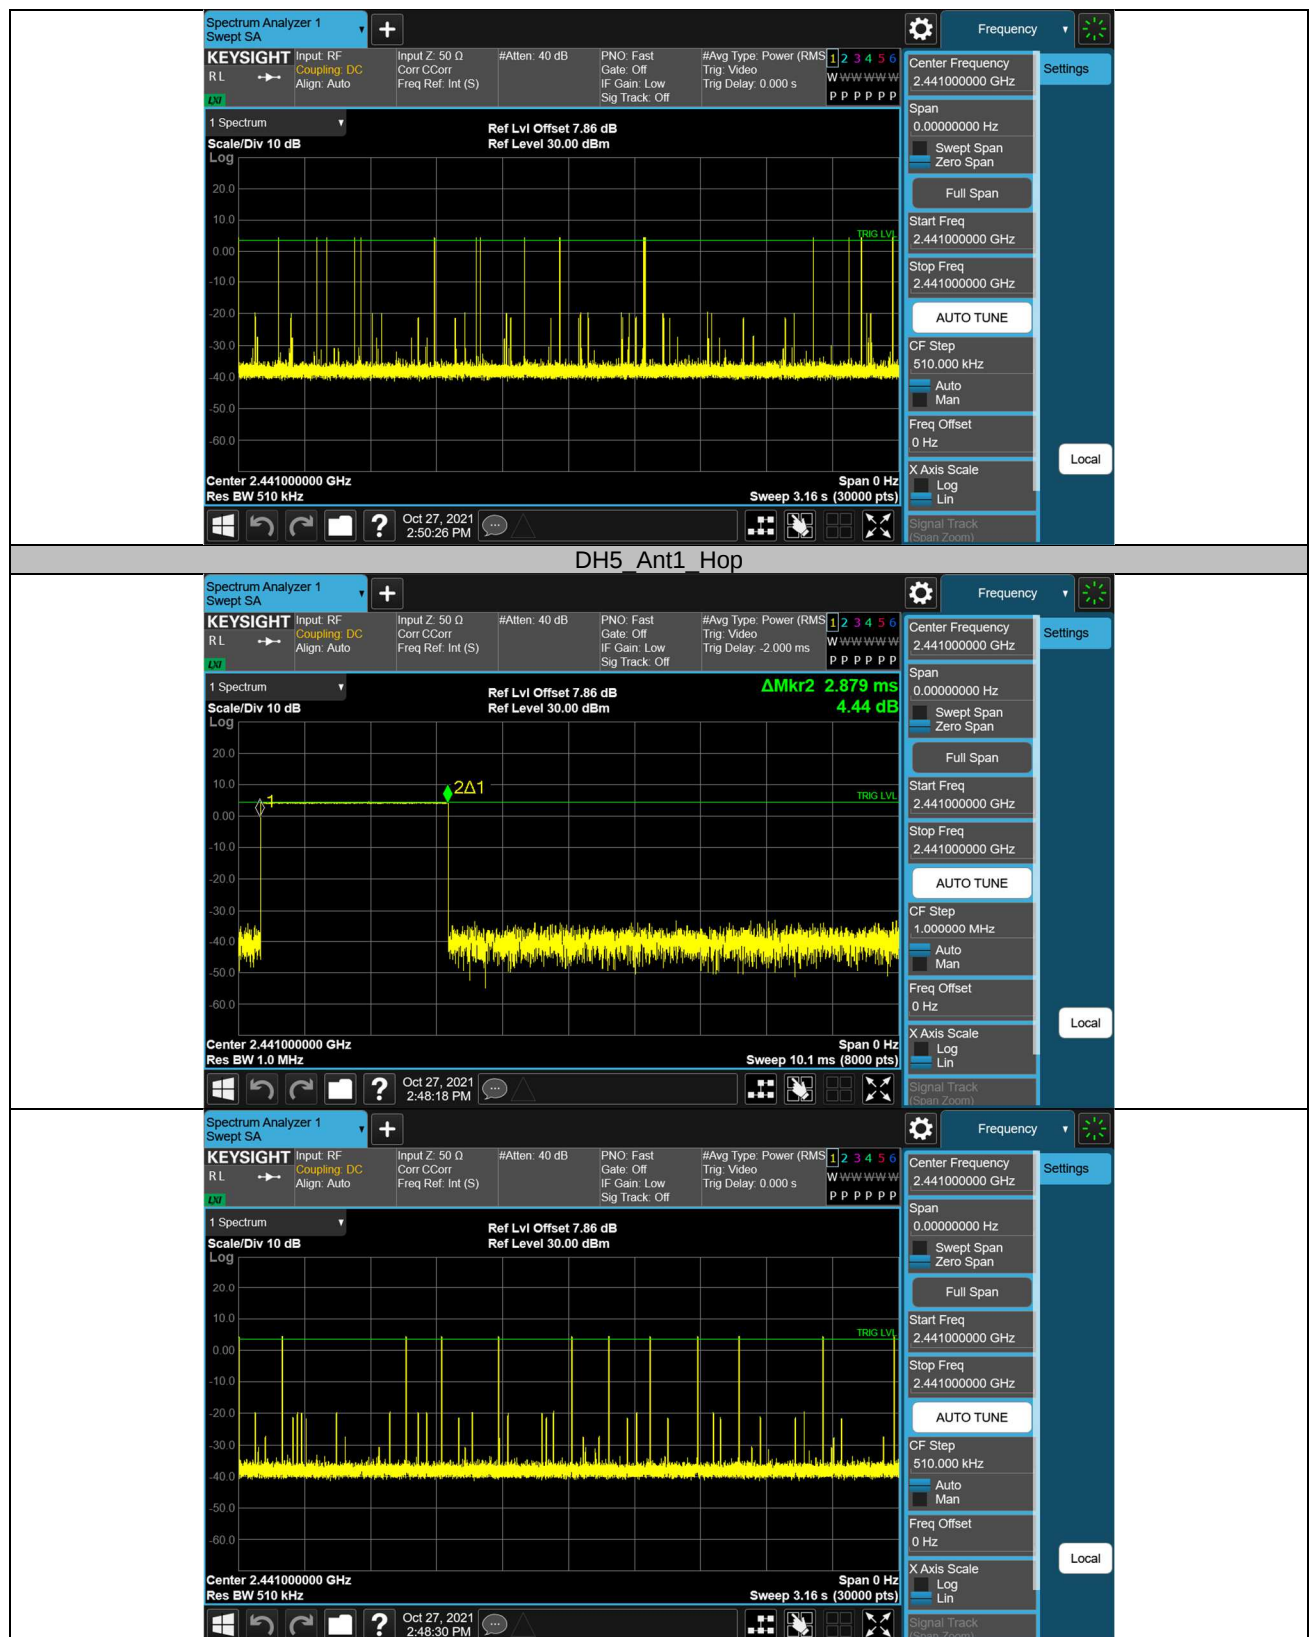

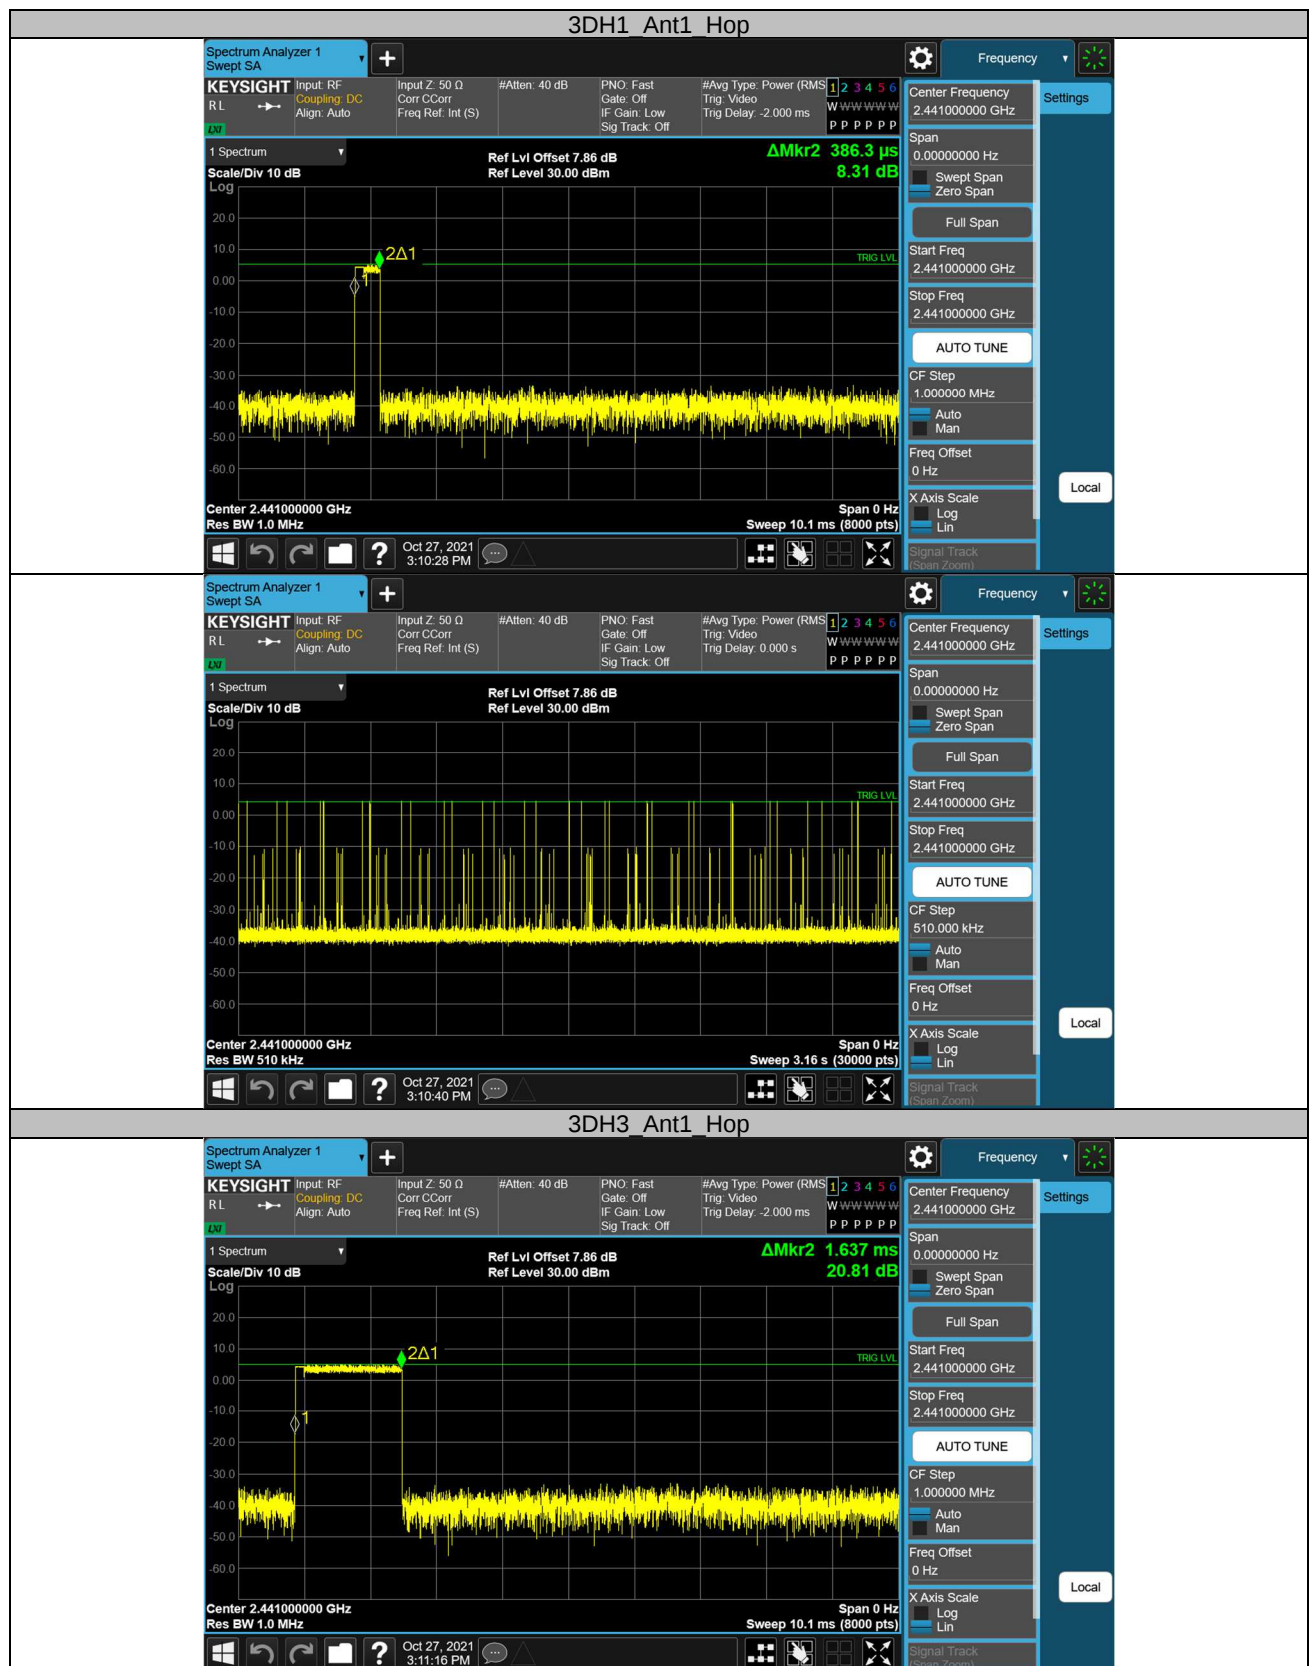

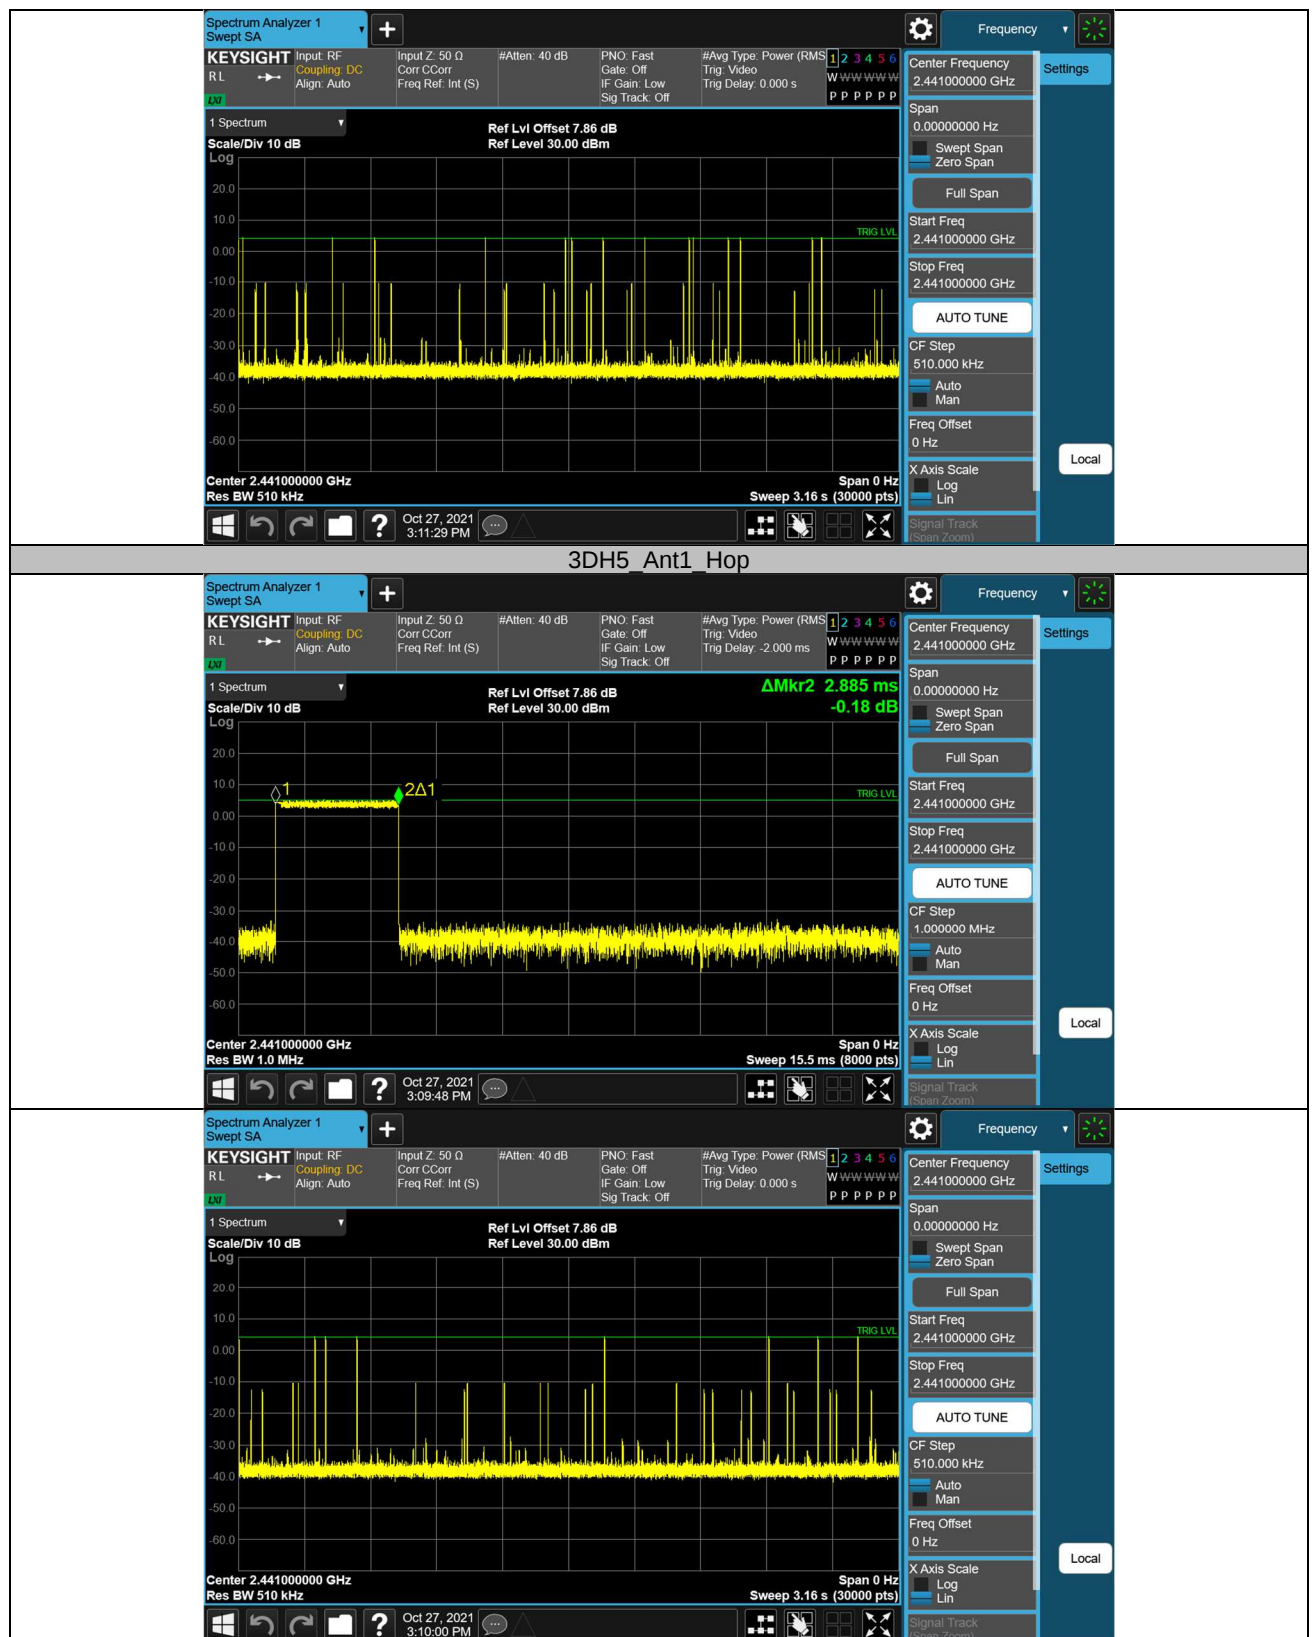


## Appendix B.6: Test Results of Conducted Spurious Emissions Measured in 100 kHz Bandwidth


### Conducted Spurious Emission


#### Test Result

| TestMode | Antenna | Channel | FreqRange [MHz] | RefLevel [dBm] | Result [dBm] | Limit [dBm] | Verdict |
|----------|---------|---------|-----------------|----------------|--------------|-------------|---------|
| DH5      | Ant1    | 2402    | Reference       | 4.13           | 4.13         | ---         | PASS    |
|          |         |         | 30~1000         | 4.13           | -53.08       | ≤-15.87     | PASS    |
|          |         |         | 1000~26500      | 4.13           | -47          | ≤-15.87     | PASS    |
|          |         | 2441    | Reference       | 4.08           | 4.08         | ---         | PASS    |
|          |         |         | 30~1000         | 4.08           | -59.15       | ≤-15.92     | PASS    |
|          |         |         | 1000~26500      | 4.08           | -44.64       | ≤-15.92     | PASS    |
|          |         | 2480    | Reference       | 6.27           | 6.27         | ---         | PASS    |
|          |         |         | 30~1000         | 6.27           | -53.84       | ≤-13.73     | PASS    |
|          |         |         | 1000~26500      | 6.27           | -41.51       | ≤-13.73     | PASS    |
| 3DH5     | Ant1    | 2402    | Reference       | 3.91           | 3.91         | ---         | PASS    |
|          |         |         | 30~1000         | 3.91           | -56          | ≤-16.09     | PASS    |
|          |         |         | 1000~26500      | 3.91           | -48.12       | ≤-16.09     | PASS    |
|          |         | 2441    | Reference       | 4.21           | 4.21         | ---         | PASS    |
|          |         |         | 30~1000         | 4.21           | -58.06       | ≤-15.79     | PASS    |
|          |         |         | 1000~26500      | 4.21           | -46.45       | ≤-15.79     | PASS    |
|          |         | 2480    | Reference       | 4.29           | 4.29         | ---         | PASS    |
|          |         |         | 30~1000         | 4.29           | -55.62       | ≤-15.71     | PASS    |
|          |         |         | 1000~26500      | 4.29           | -45.29       | ≤-15.71     | PASS    |

## Test Graphs

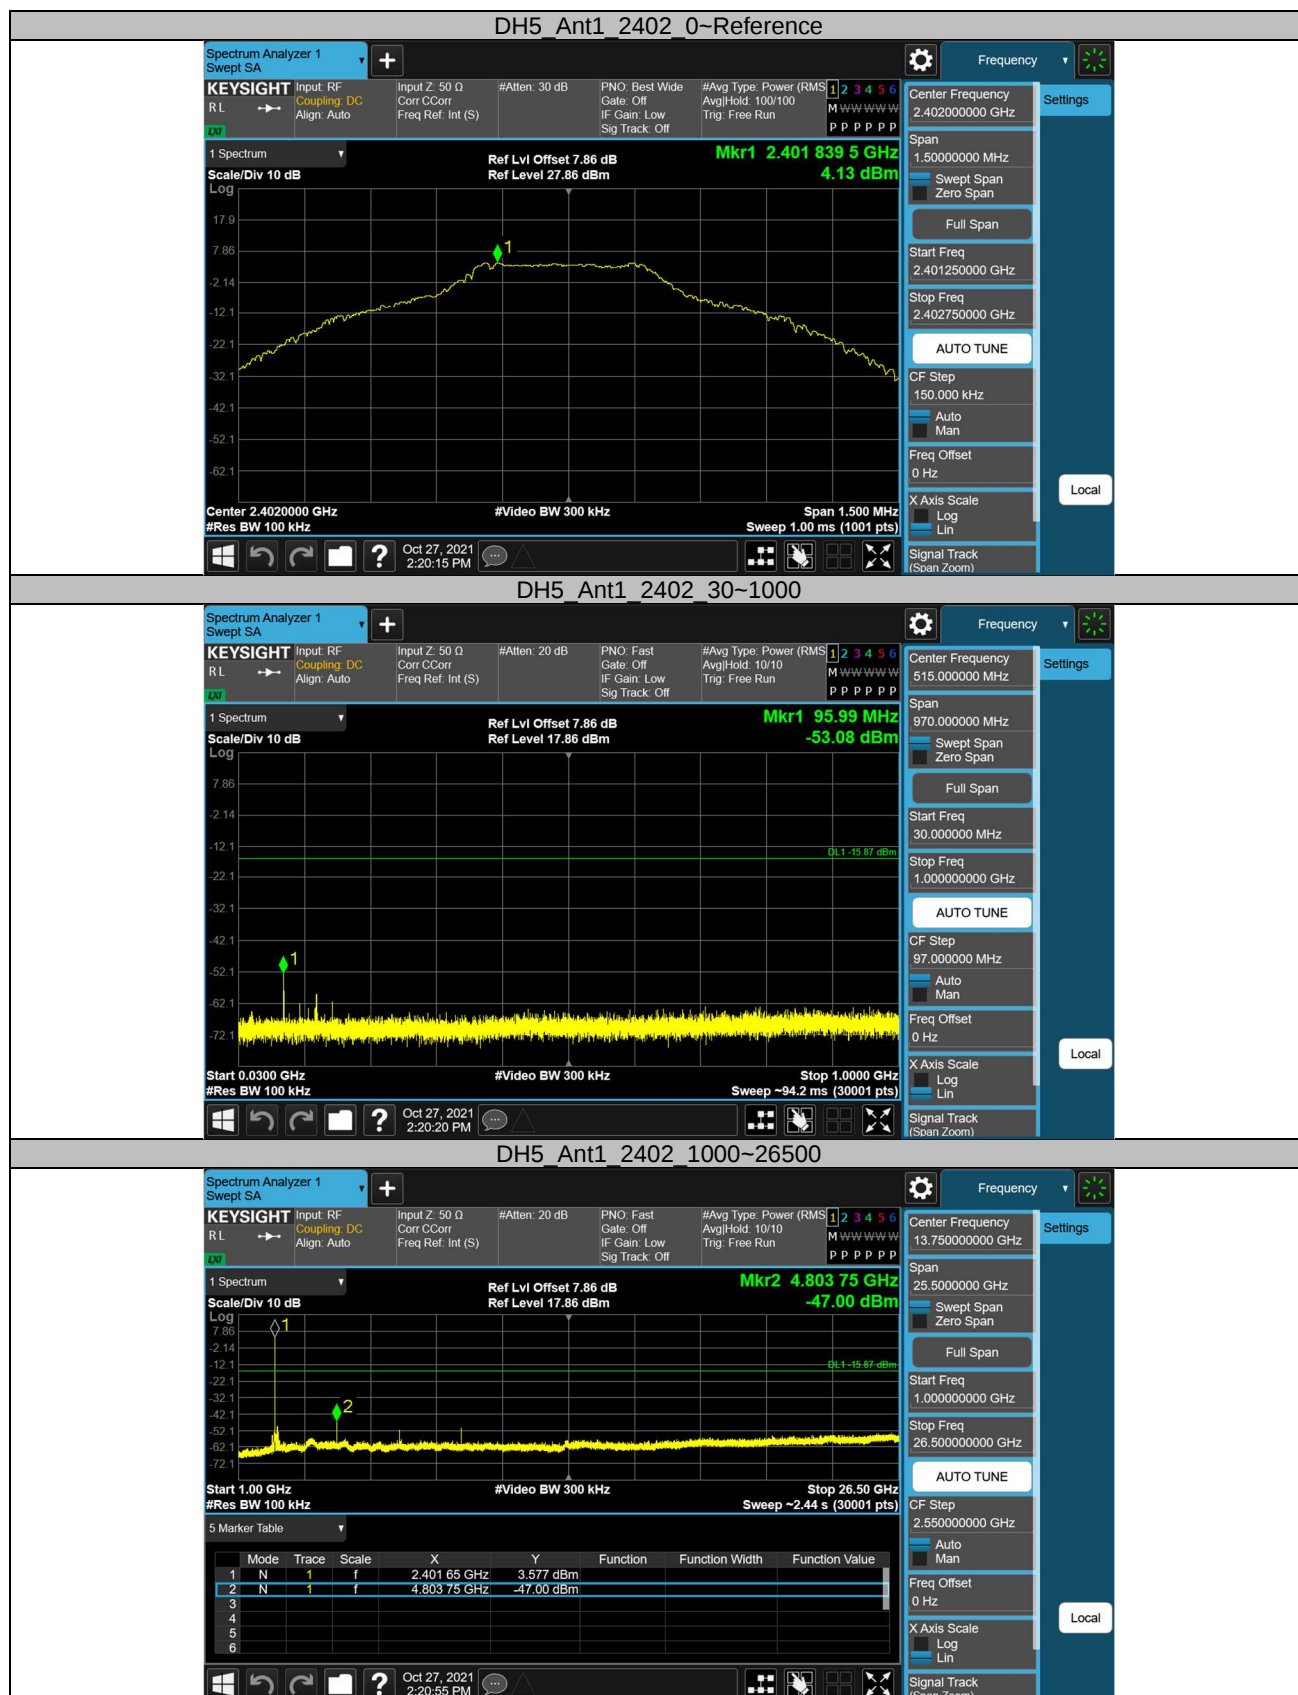

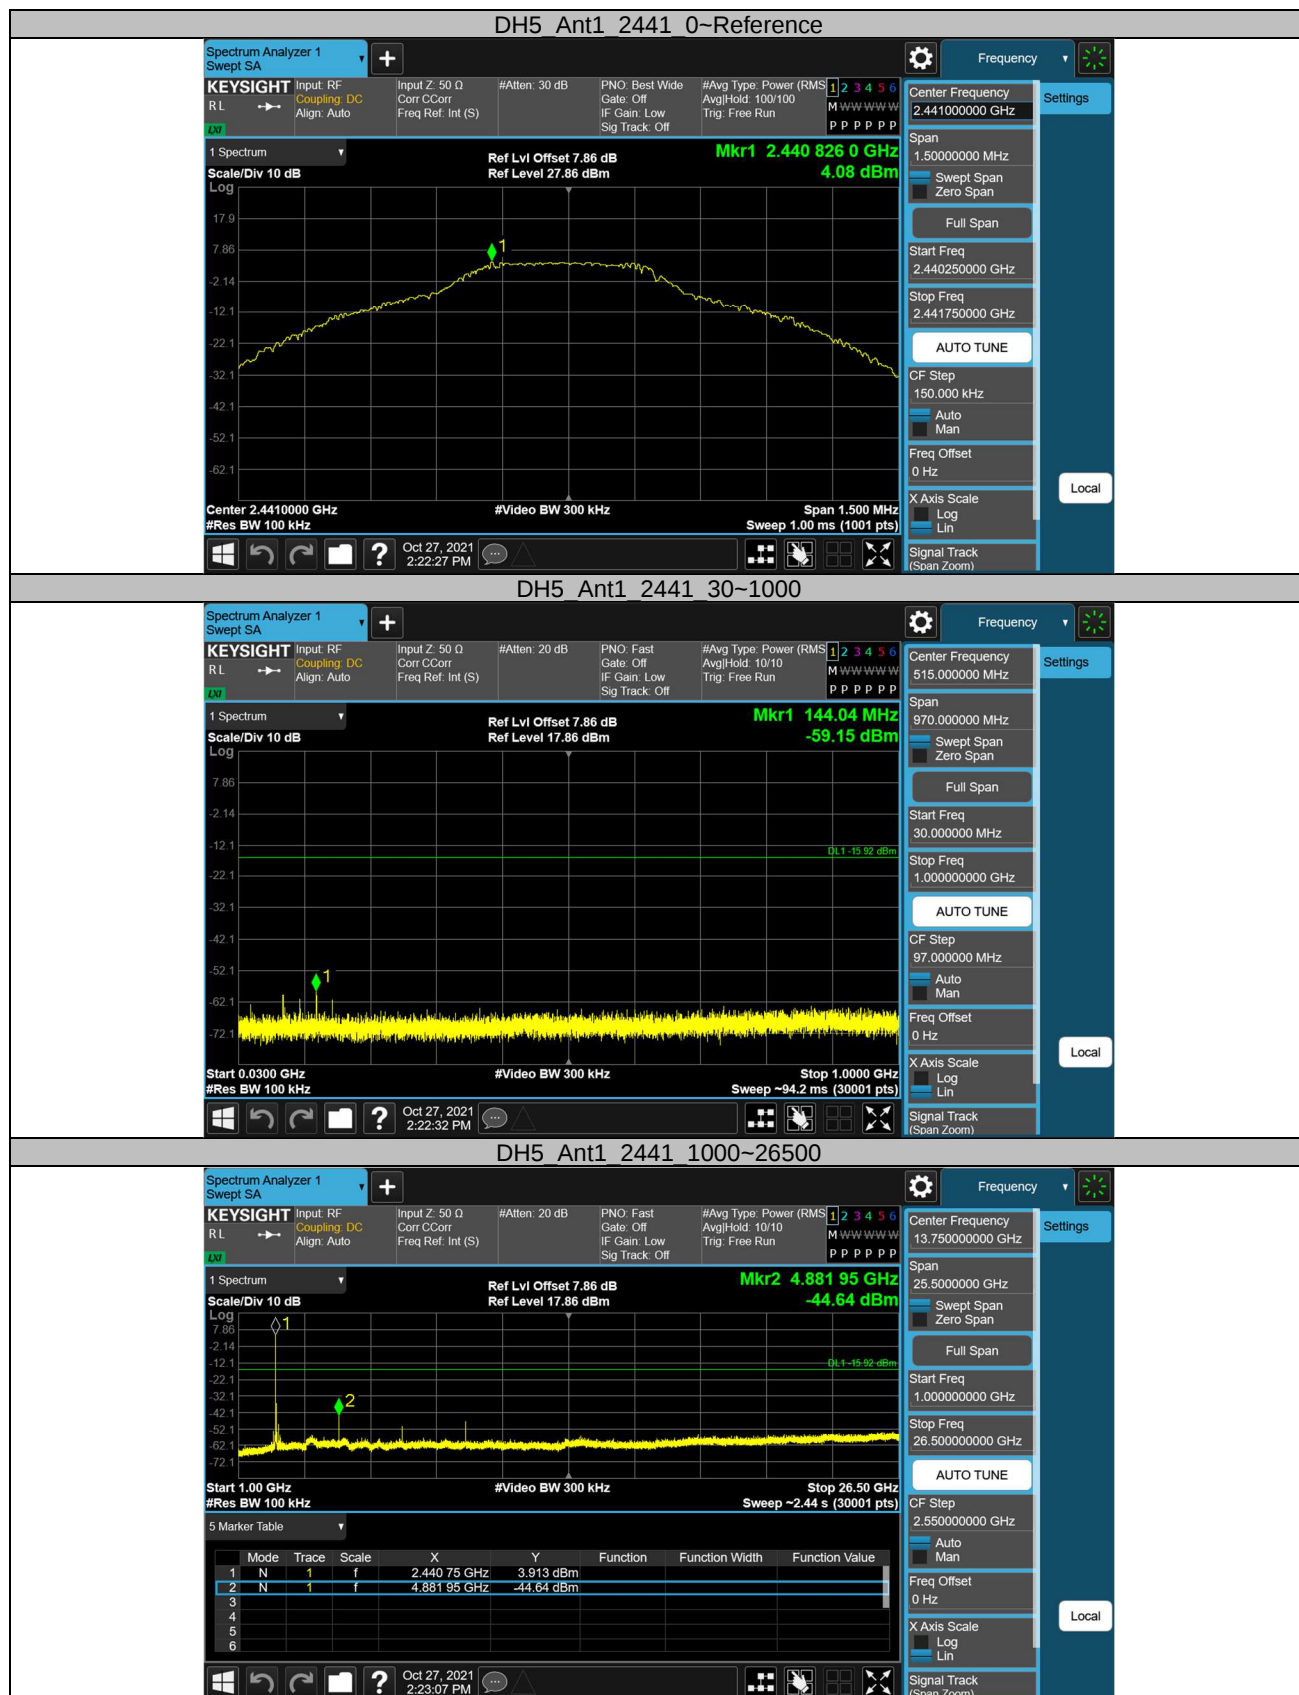

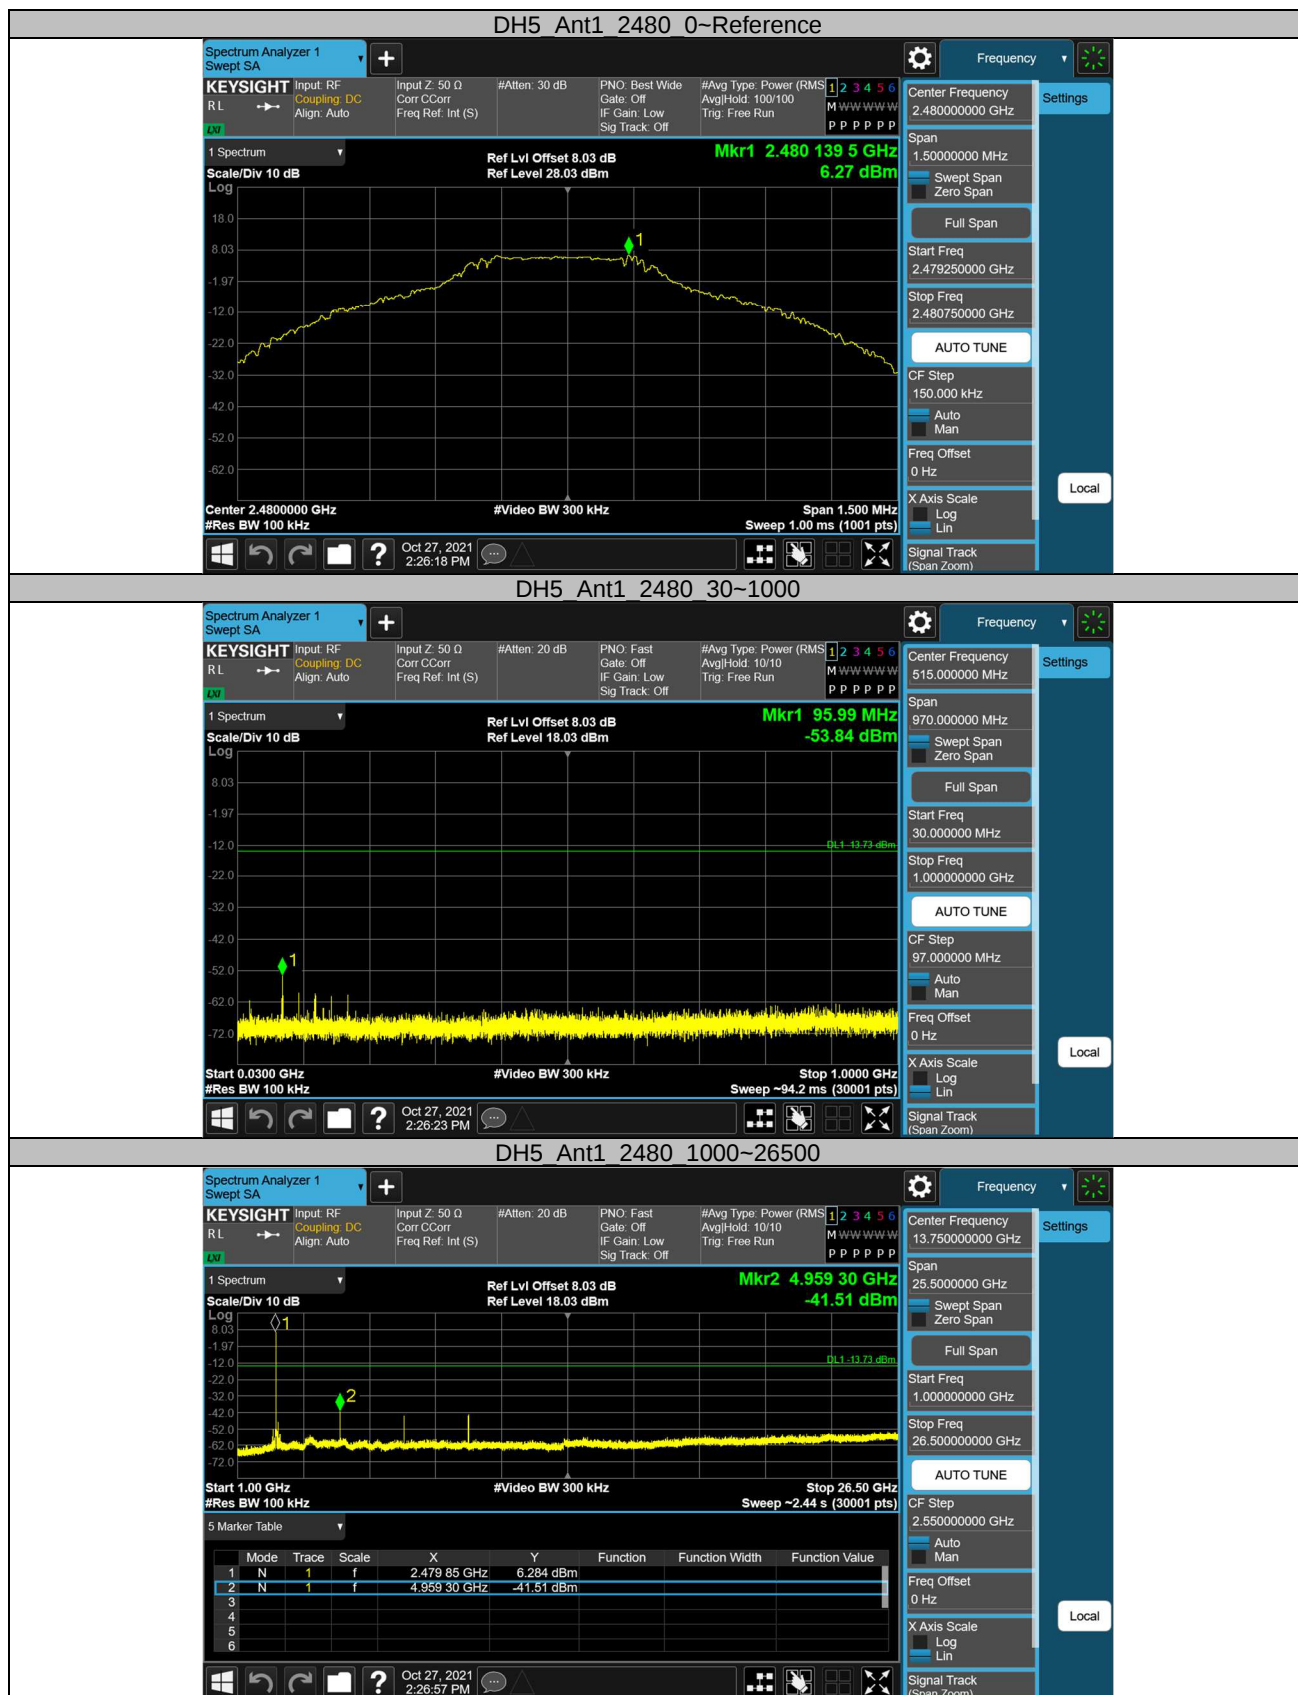









## Band Edge


### Test Result

| TestMode | Antenna | ChName | Channel  | RefLevel<br>[dBm] | Result<br>[dBm] | Limit<br>[dBm] | Verdict |
|----------|---------|--------|----------|-------------------|-----------------|----------------|---------|
| DH5      | Ant1    | Low    | 2402     | 4.22              | -30.28          | ≤-15.79        | PASS    |
|          |         | High   | 2480     | 6.50              | -32.24          | ≤-13.5         | PASS    |
|          |         | Low    | Hop 2402 | 3.39              | -47.86          | ≤-16.61        | PASS    |
|          |         | High   | Hop 2480 | 4.71              | -45.02          | ≤-15.3         | PASS    |
| 3DH5     | Ant1    | Low    | 2402     | 4.13              | -30.14          | ≤-15.87        | PASS    |
|          |         | High   | 2480     | 4.51              | -33.68          | ≤-15.49        | PASS    |
|          |         | Low    | Hop 2402 | 0.95              | -49.73          | ≤-19.05        | PASS    |
|          |         | High   | Hop 2480 | 1.69              | -46.59          | ≤-18.32        | PASS    |

## Test Graphs

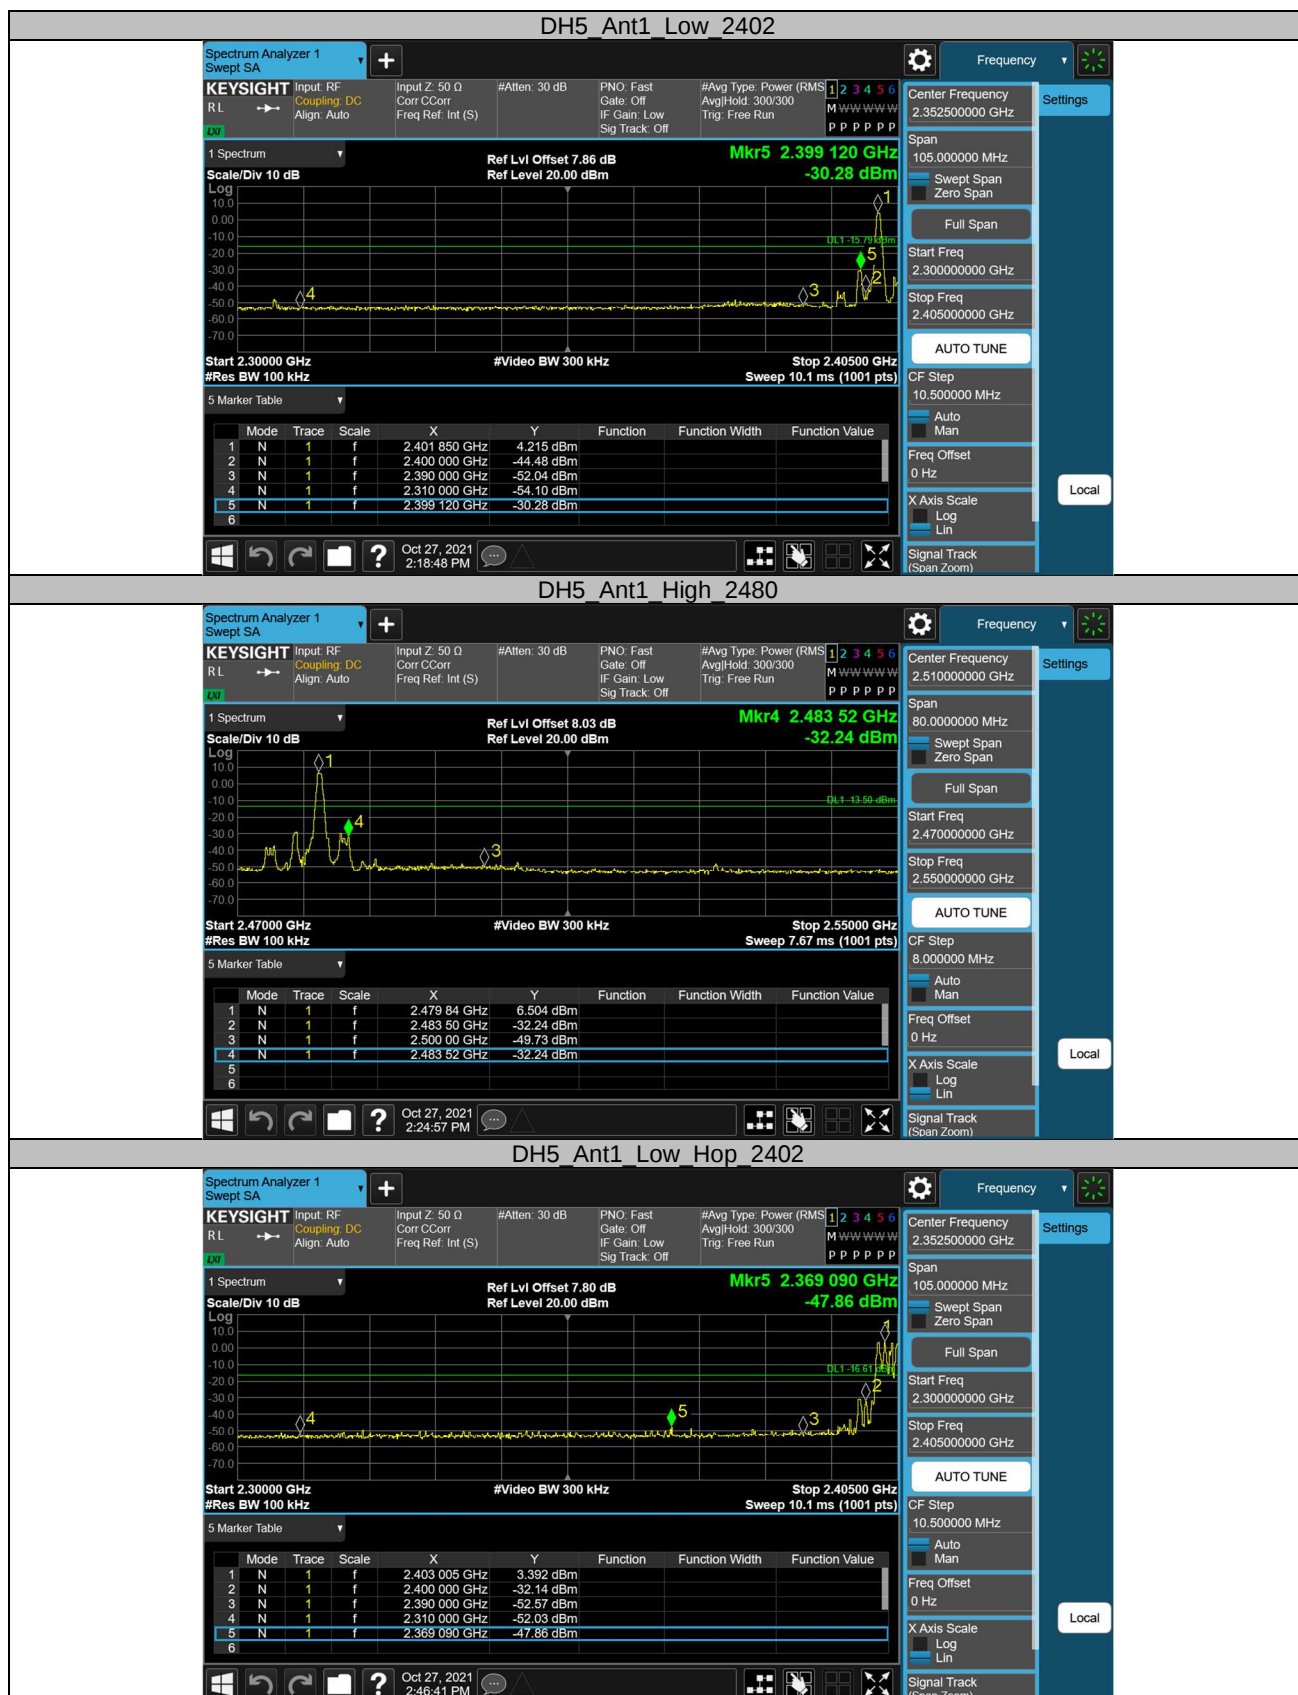

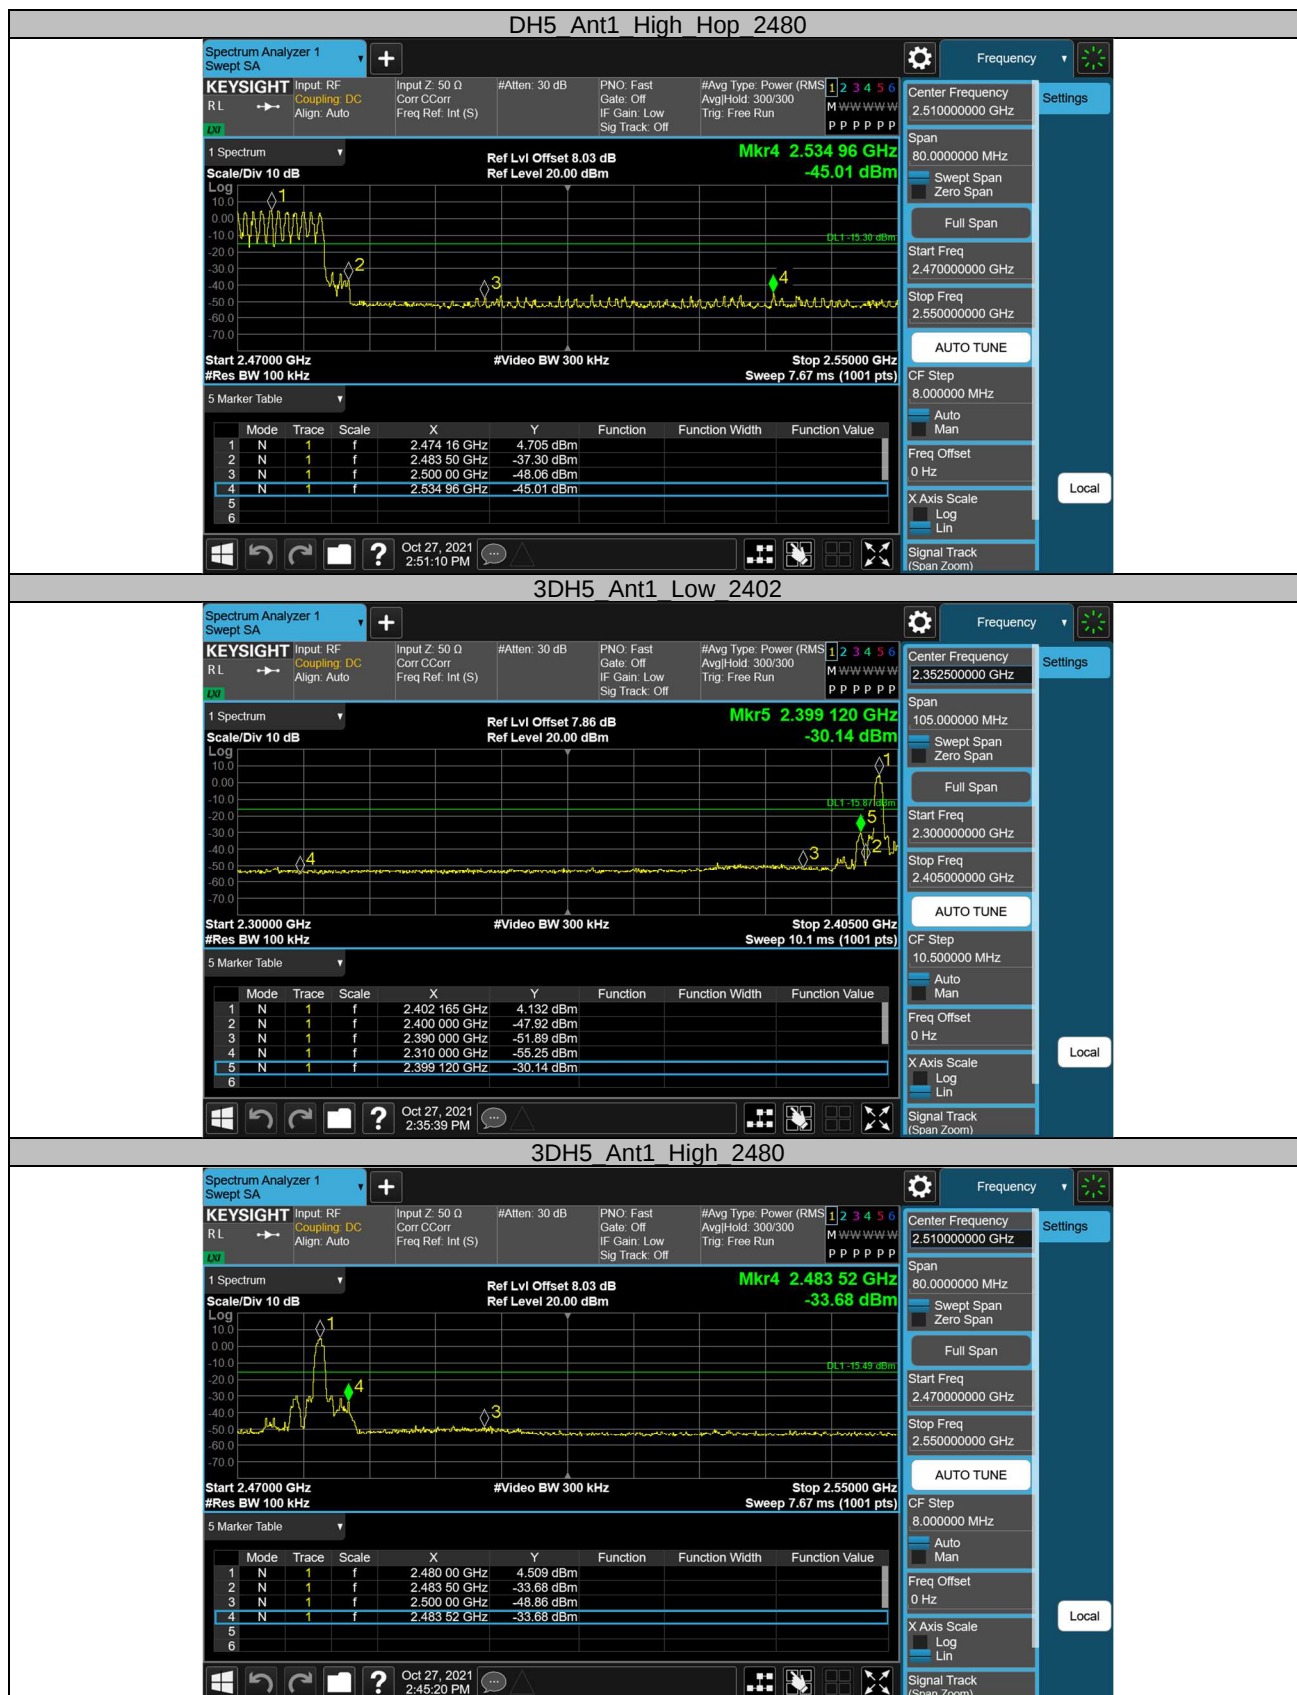

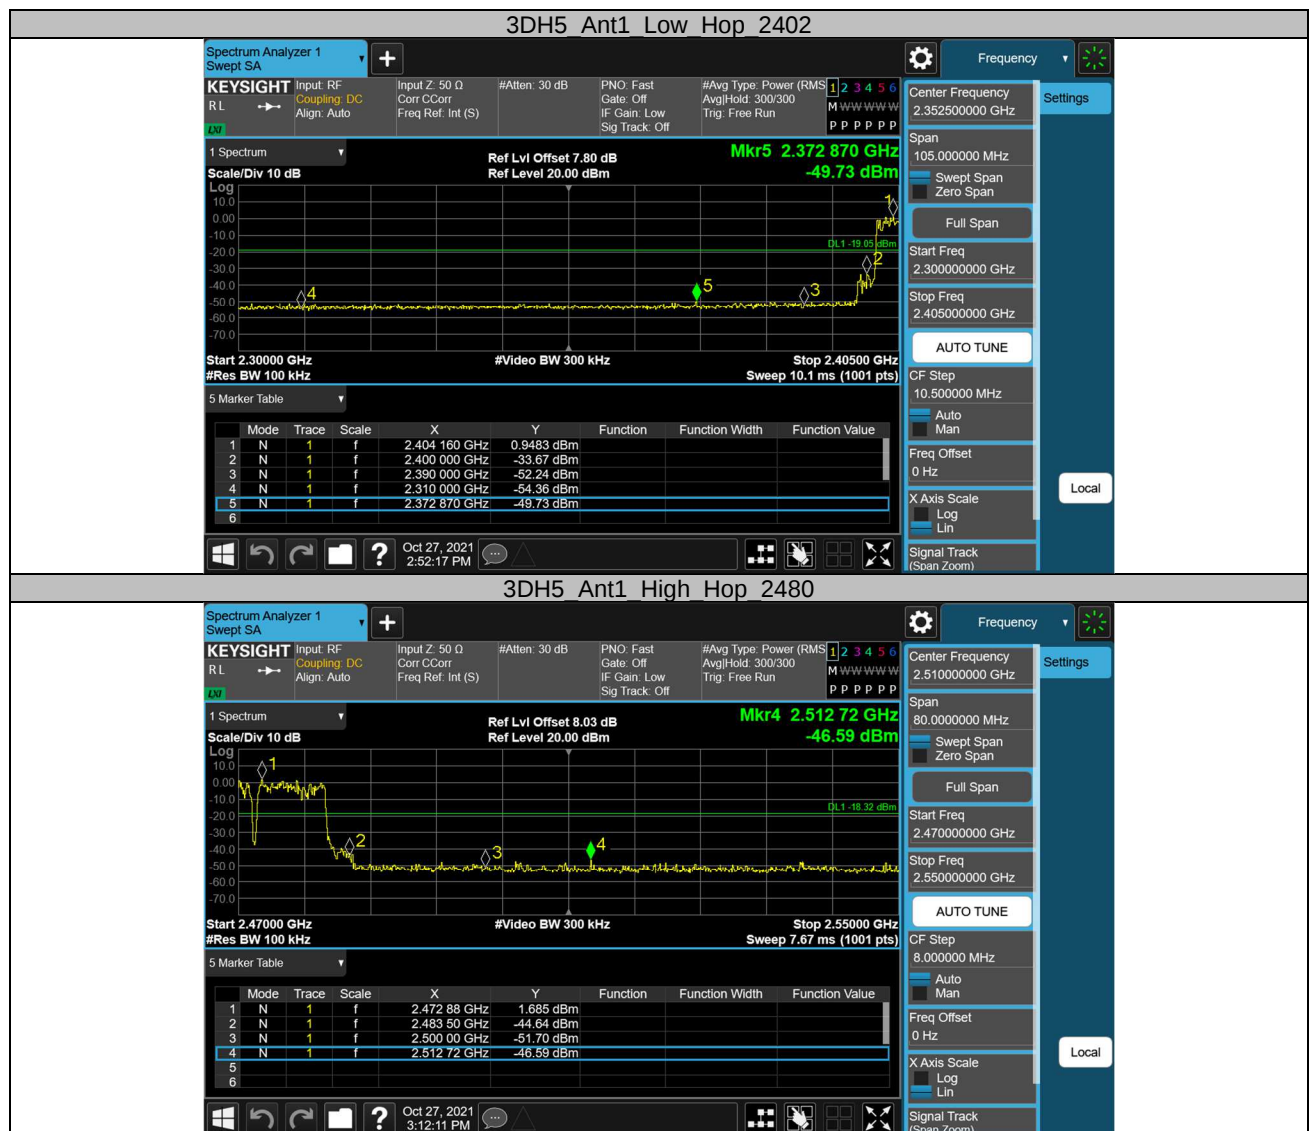

## Appendix B.7: Test Results of Radiated Spurious Emissions


Note:

- 1.This testing was carried out on different modulations, but only the worst case was presented in this report.
- 2.Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

30MHz - 1GHz

### EUT Information

|                |                     |
|----------------|---------------------|
| EUT Name:      | WIRELESS TRUE ROUND |
| Model:         | 7482404             |
| Test Mode:     | BDR_DH5_Low channel |
| Test Voltage:: | Battery             |
| Remark:        | Temp 22 Humi:52%    |
| Test Standard: | FCC 15.247          |
| Tested By:     | Kei Zhang           |
| Reviewed By:   | Terry Yin           |

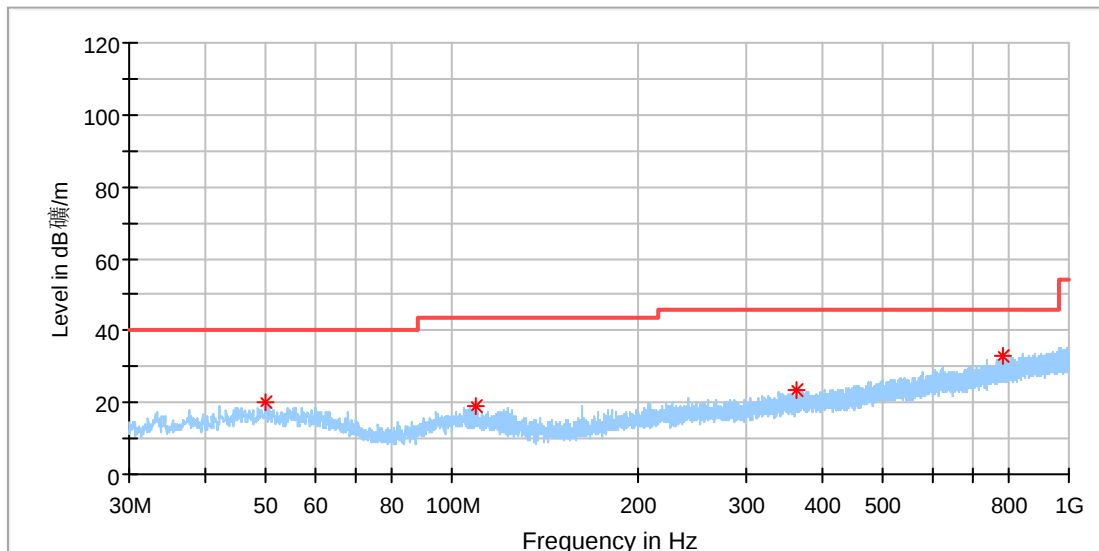


### Critical\_Freqs

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 49.982000       | 19.85            | 40.00          | 20.15       | 100.0       | H   | 149.0         | -18.3        |
| 109.200500      | 18.85            | 43.50          | 24.65       | 100.0       | H   | 355.0         | -19.0        |
| 360.964000      | 23.25            | 46.00          | 22.75       | 100.0       | H   | 0.0           | -14.6        |
| 779.858500      | 33.21            | 46.00          | 12.79       | 100.0       | H   | 34.0          | -6.7         |

## EUT Information

EUT Name: WIRELESS TRUE ROUND  
Model: 7482404  
Test Mode: BDR\_DH5\_Low channel  
Test Voltage:: Battery  
Remark: Temp 22 Humi:52%  
Test Standard: FCC 15.247  
Tested By: Kei Zhang  
Reviewed By: Terry Yin

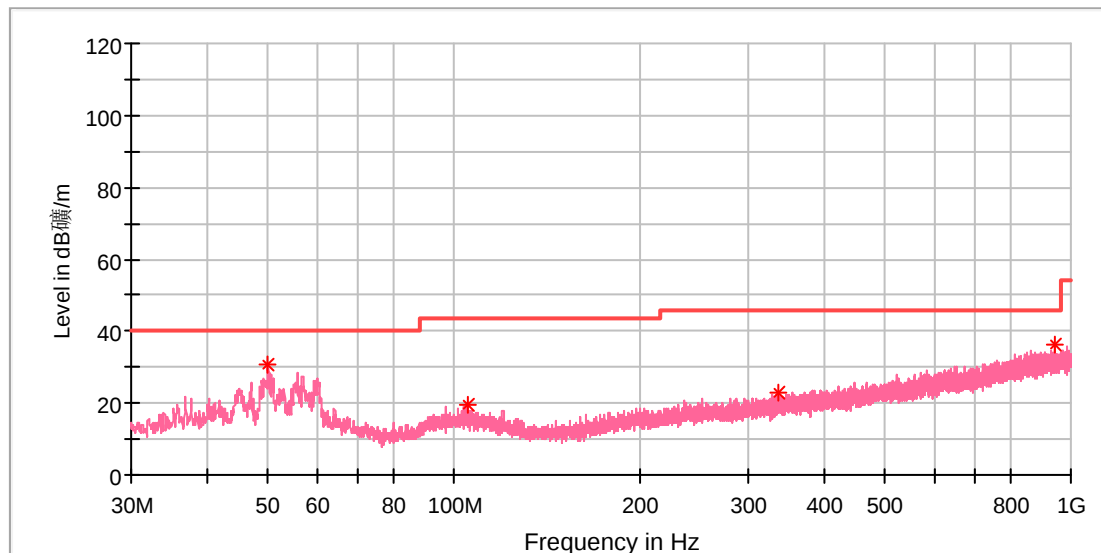


## Critical\_Freqs

| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 50.030500       | 30.75            | 40.00          | 9.25        | 100.0       | V   | 182.0         | -18.3        |
| 105.369000      | 19.71            | 43.50          | 23.79       | 100.0       | V   | 124.0         | -18.8        |
| 334.677000      | 23.06            | 46.00          | 22.94       | 100.0       | V   | 276.0         | -15.2        |
| 938.744500      | 36.13            | 46.00          | 9.87        | 100.0       | V   | 283.0         | -4.6         |

## EUT Information

EUT Name: WIRELESS TRUE ROUND  
Model: 7482404  
Test Mode: BDR\_DH5\_High channel  
Test Voltage:: Battery  
Remark: Temp 22 Humi:52%  
Test Standard: FCC 15.247  
Tested By: Kei Zhang  
Reviewed By: Terry Yin

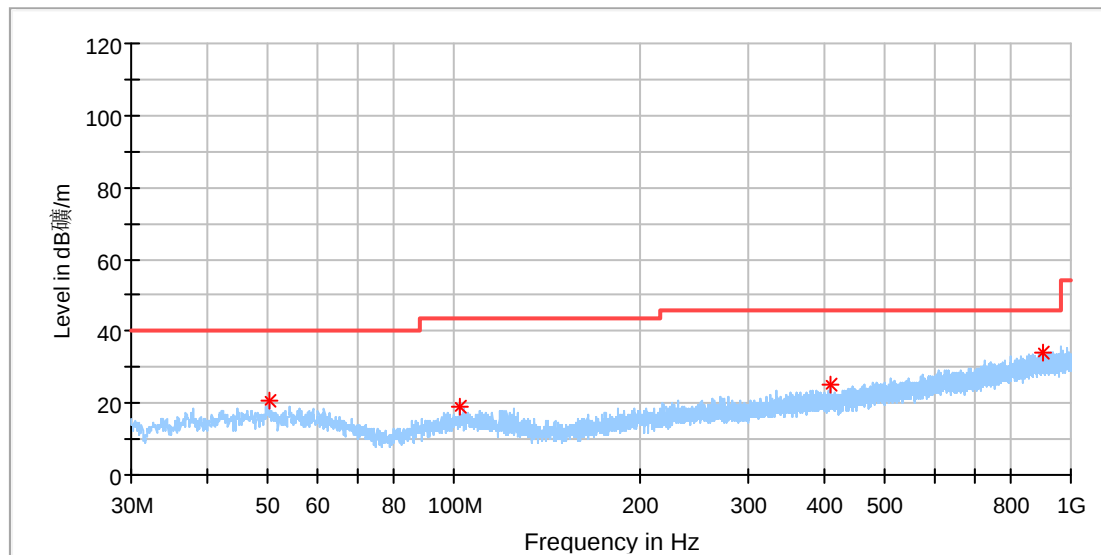


## Critical\_Freqs

| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 50.176000       | 20.74            | 40.00          | 19.26       | 100.0       | H   | 61.0          | -18.3        |
| 102.265000      | 18.72            | 43.50          | 24.78       | 100.0       | H   | 12.0          | -18.9        |
| 408.251500      | 25.15            | 46.00          | 20.85       | 100.0       | H   | 318.0         | -13.5        |
| 897.471000      | 34.04            | 46.00          | 11.96       | 100.0       | H   | 207.0         | -5.0         |

## EUT Information

EUT Name: WIRELESS TRUE ROUND  
Model: 7482404  
Test Mode: BDR\_DH5\_High channel  
Test Voltage:: Battery  
Remark: Temp 22 Humi:52%  
Test Standard: FCC 15.247  
Tested By: Kei Zhang  
Reviewed By: Terry Yin

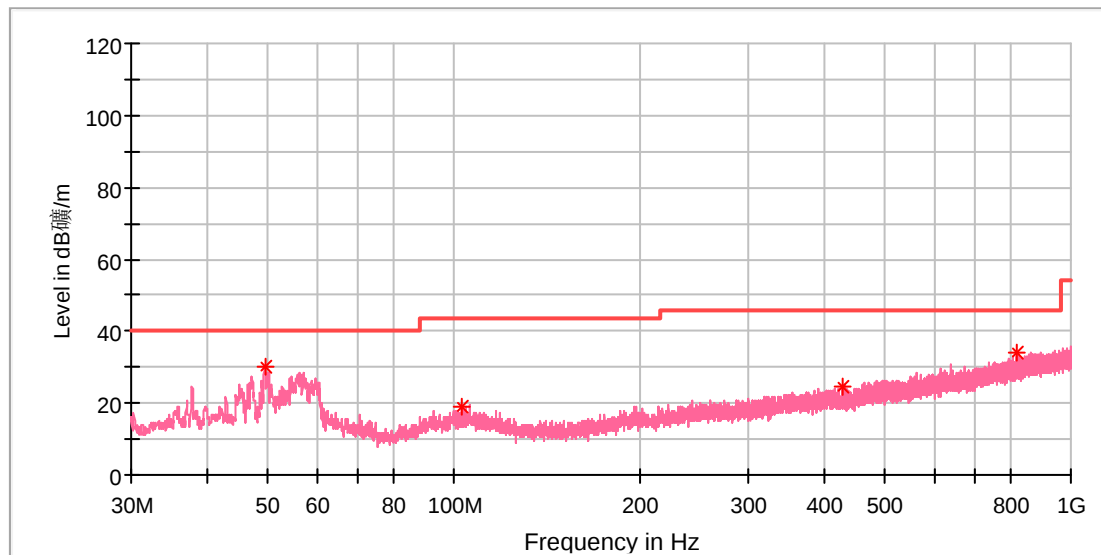

## Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 49.351500       | 29.88            | 40.00          | 10.12       | 100.0       | V   | 180.0         | -18.3        |
| 103.089500      | 18.90            | 43.50          | 24.60       | 100.0       | V   | 69.0          | -18.8        |
| 426.002500      | 24.38            | 46.00          | 21.62       | 100.0       | V   | 341.0         | -13.4        |
| 819.192000      | 34.08            | 46.00          | 11.92       | 100.0       | V   | 105.0         | -6.0         |

1GHz - 18GHz

Note: The highest waveform in the figure is Bluetooth Fundamental.

## EUT Information

|                |                     |
|----------------|---------------------|
| EUT Name:      | WIRELESS TRUE ROUND |
| Model:         | 7482404             |
| Test Mode:     | BDR_DH5_Low channel |
| Test Voltage:: | Battery             |
| Remark:        | Temp 22 Humi:52%    |
| Test Standard: | FCC 15.247          |
| Tested By:     | Kei Zhang           |
| Reviewed By:   | Terry Yin           |

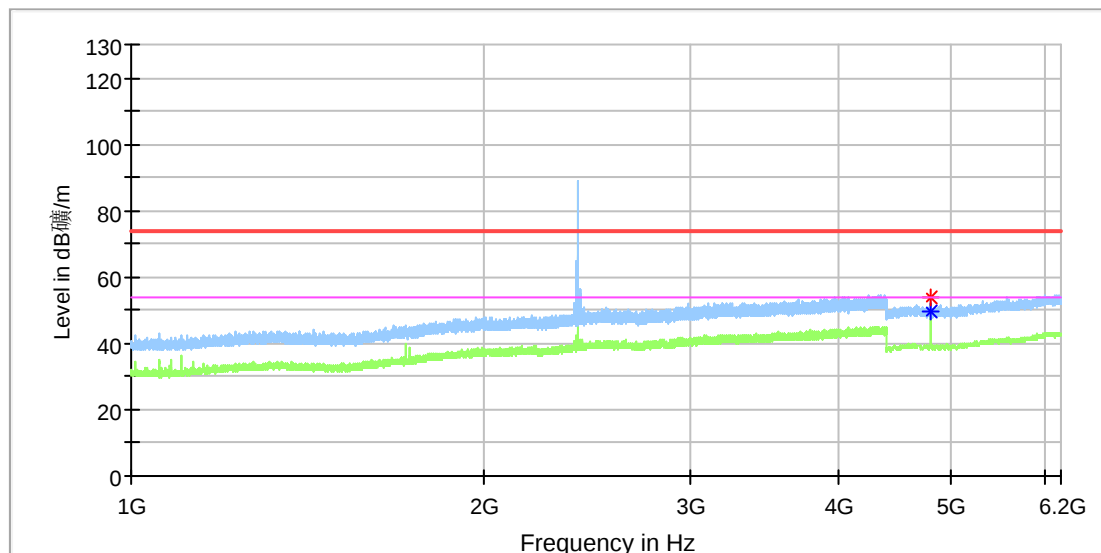


## Critical\_Freqs

| Frequency (MHz) | MaxPeak (dBμV/m) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 4804.000000     | ---              | 49.87            | 54.00          | 4.13        | 100.0       | H   | 125.0         | 11.8         |
| 4804.500000     | 54.00            | ---              | 74.00          | 20.00       | 100.0       | H   | 132.0         | 11.8         |

## EUT Information

EUT Name: WIRELESS TRUE ROUND  
Model: 7482404  
Test Mode: BDR\_DH5\_Low channel  
Test Voltage:: Battery  
Remark: Temp 22 Humi:52%  
Test Standard: FCC 15.247  
Tested By: Kei Zhang  
Reviewed By: Terry Yin

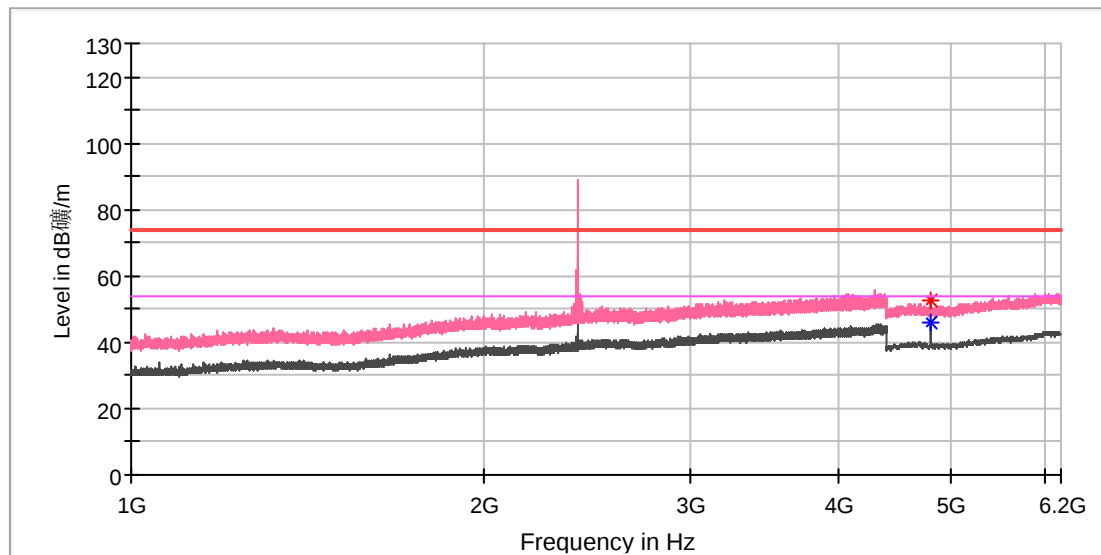


## Critical\_Freqs

| Frequency (MHz) | MaxPeak (dBμV/m) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 4803.500000     | 52.66            | ---              | 74.00          | 21.34       | 100.0       | V   | 108.0         | 11.8         |
| 4803.500000     | ---              | 46.08            | 54.00          | 7.92        | 100.0       | V   | 108.0         | 11.8         |

## EUT Information

EUT Name: WIRELESS TRUE ROUND  
Model: 7482404  
Test Mode: BDR\_DH5\_Low channel  
Test Voltage:: Battery  
Remark: Temp 22 Humi:52%  
Test Standard: FCC 15.247  
Tested By: Kei Zhang  
Reviewed By: Terry Yin

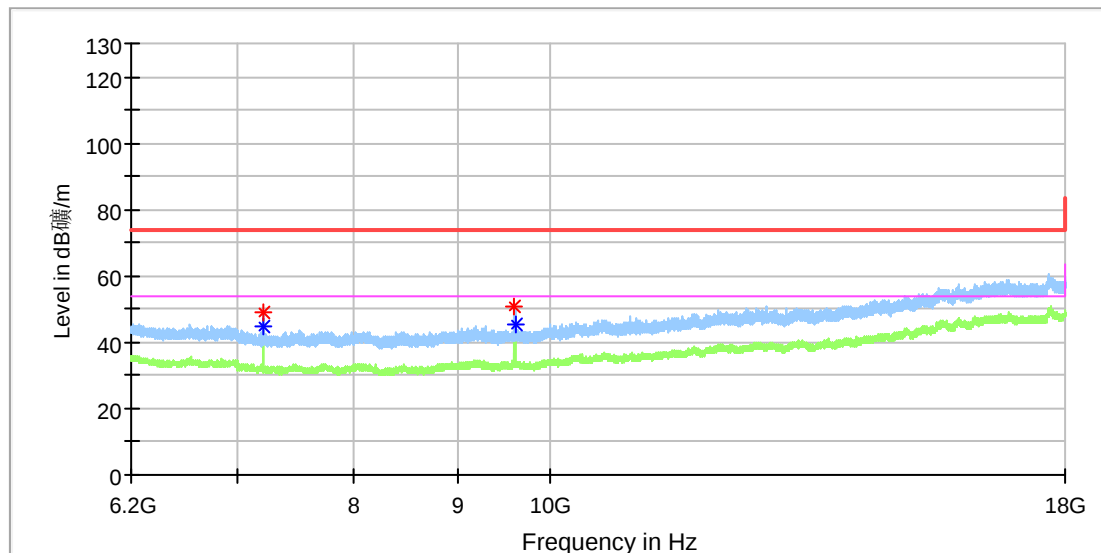


## Critical\_Freqs

| Frequency (MHz) | MaxPeak (dBμV/m) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 7205.950000     | ---              | 44.78            | 54.00          | 9.22        | 100.0       | H   | 125.0         | 8.8          |
| 7206.441667     | 48.94            | ---              | 74.00          | 25.06       | 100.0       | H   | 290.0         | 8.8          |
| 9607.250000     | 50.56            | ---              | 74.00          | 23.44       | 100.0       | H   | 277.0         | 10.4         |
| 9607.741667     | ---              | 45.29            | 54.00          | 8.71        | 100.0       | H   | 277.0         | 10.4         |

## EUT Information

EUT Name: WIRELESS TRUE ROUND  
Model: 7482404  
Test Mode: BDR\_DH5\_Low channel  
Test Voltage:: Battery  
Remark: Temp 22 Humi:52%  
Test Standard: FCC 15.247  
Tested By: Kei Zhang  
Reviewed By: Terry Yin

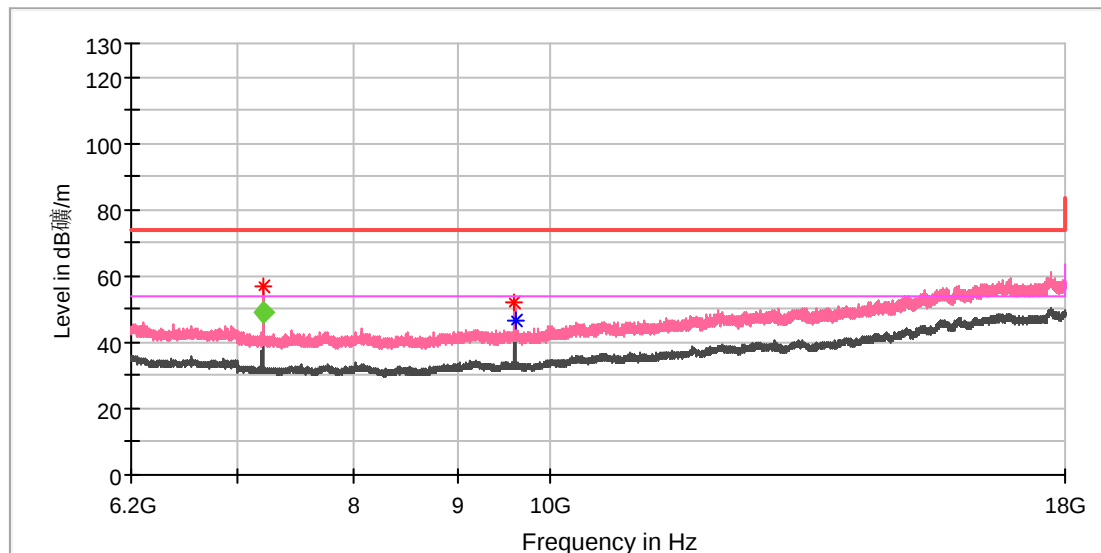

## Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBμV/m) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 7204.966667     | 57.08            | ---              | 74.00          | 16.92       | 100.0       | V   | 97.0          | 8.8          |
| 9607.250000     | 51.81            | ---              | 74.00          | 22.19       | 100.0       | V   | 324.0         | 10.4         |
| 9607.741667     | ---              | 46.48            | 54.00          | 7.52        | 100.0       | V   | 168.0         | 10.4         |

## Final\_Result

| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 7205.624583     | 48.76            | 54.00          | 5.24        | 100.0       | V   | 92.0          | 8.8          |

## EUT Information

EUT Name: WIRELESS TRUE ROUND  
Model: 7482404  
Test Mode: BDR\_DH5\_Mid channel  
Test Voltage:: Battery  
Remark: Temp 22 Humi:52%  
Test Standard: FCC 15.247  
Tested By: Kei Zhang  
Reviewed By: Terry Yin

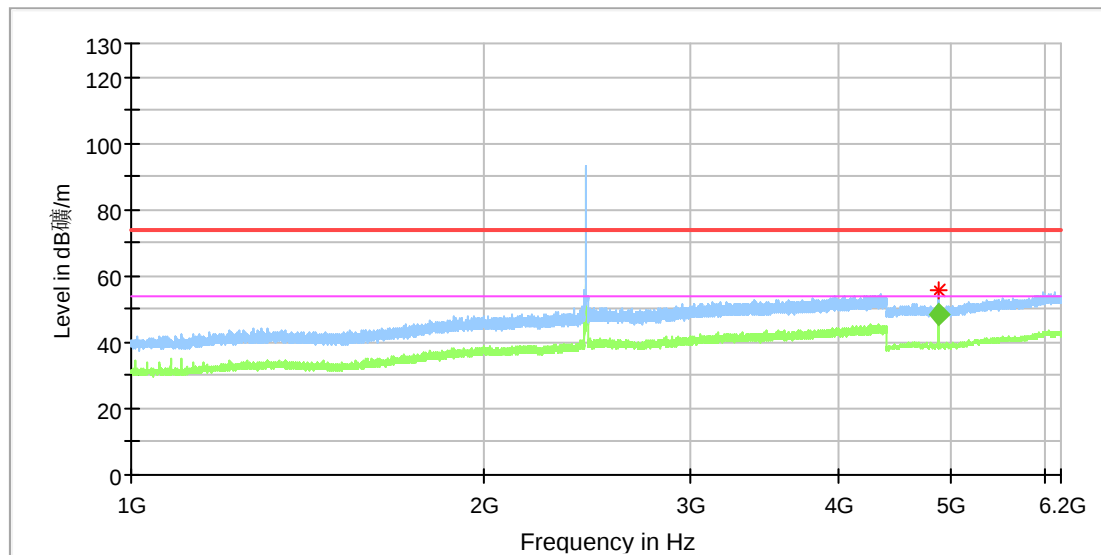

## Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBμV/m) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 4881.500000     | 55.40            | ---              | 74.00          | 18.60       | 100.0       | H   | 301.0         | 11.8         |

## Final\_Result

| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 4882.008333     | 48.46            | 54.00          | 5.54        | 105.0       | H   | 296.0         | 11.8         |

## EUT Information

EUT Name: WIRELESS TRUE ROUND  
Model: 7482404  
Test Mode: BDR\_DH5\_Mid channel  
Test Voltage:: Battery  
Remark: Temp 22 Humi:52%  
Test Standard: FCC 15.247  
Tested By: Kei Zhang  
Reviewed By: Terry Yin

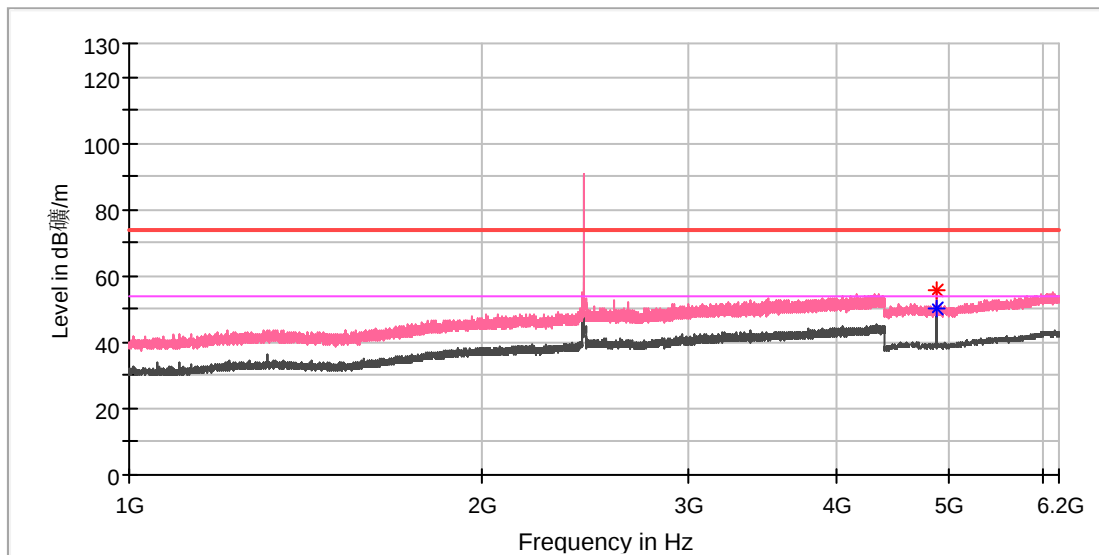


## Critical\_Freqs

| Frequency (MHz) | MaxPeak (dBμV/m) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 4881.500000     | 55.46            | ---              | 74.00          | 18.54       | 100.0       | V   | 0.0           | 11.8         |
| 4882.000000     | ---              | 50.20            | 54.00          | 3.80        | 100.0       | V   | 151.0         | 11.8         |

## EUT Information

EUT Name: WIRELESS TRUE ROUND  
Model: 7482404  
Test Mode: BDR\_DH5\_Mid channel  
Test Voltage:: Battery  
Remark: Temp 22 Humi:52%  
Test Standard: FCC 15.247  
Tested By: Kei Zhang  
Reviewed By: Terry Yin

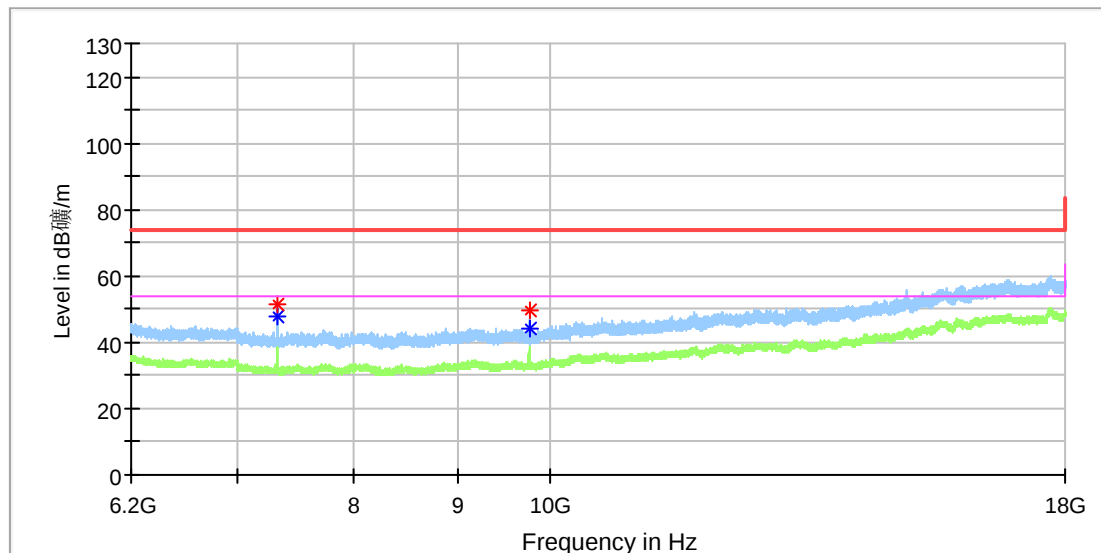


## Critical\_Freqs

| Frequency (MHz) | MaxPeak (dBμV/m) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 7322.475000     | 51.34            | ---              | 74.00          | 22.66       | 100.0       | H   | 287.0         | 8.2          |
| 7322.966667     | ---              | 47.95            | 54.00          | 6.05        | 100.0       | H   | 287.0         | 8.2          |
| 9764.091667     | ---              | 44.28            | 54.00          | 9.72        | 100.0       | H   | 301.0         | 10.4         |
| 9764.583333     | 49.80            | ---              | 74.00          | 24.20       | 100.0       | H   | 70.0          | 10.4         |

## EUT Information

EUT Name: WIRELESS TRUE ROUND  
Model: 7482404  
Test Mode: BDR\_DH5\_Mid channel  
Test Voltage:: Battery  
Remark: Temp 22 Humi:52%  
Test Standard: FCC 15.247  
Tested By: Kei Zhang  
Reviewed By: Terry Yin

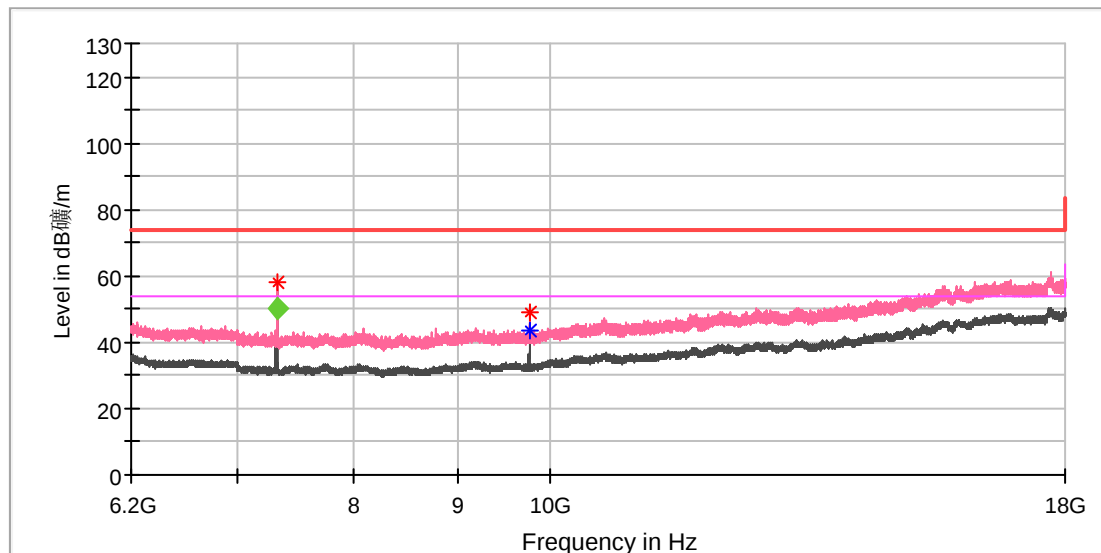

## Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBμV/m) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 7322.475000     | 57.92            | ---              | 74.00          | 16.08       | 100.0       | V   | 89.0          | 8.2          |
| 9763.108333     | 49.16            | ---              | 74.00          | 24.84       | 100.0       | V   | 245.0         | 10.4         |
| 9764.091667     | ---              | 43.41            | 54.00          | 10.59       | 100.0       | V   | 322.0         | 10.4         |

## Final\_Result

| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 7322.660000     | 49.94            | 54.00          | 4.06        | 100.0       | V   | 87.0          | 8.2          |

## EUT Information

EUT Name: WIRELESS TRUE ROUND  
Model: 7482404  
Test Mode: BDR\_DH5\_High channel  
Test Voltage:: Battery  
Remark: Temp 22 Humi:52%  
Test Standard: FCC 15.247  
Tested By: Kei Zhang  
Reviewed By: Terry Yin

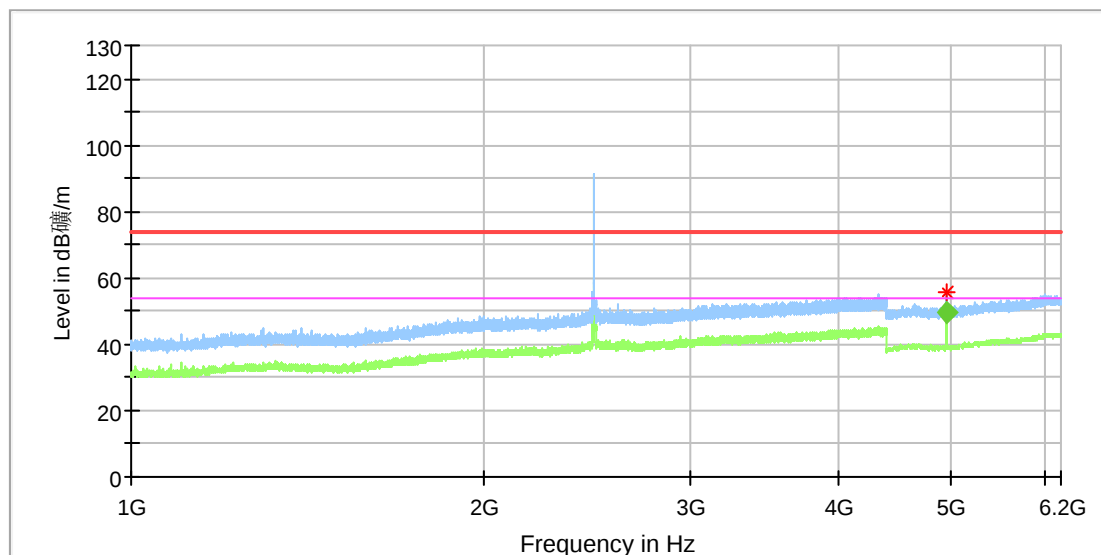

## Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBμV/m) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 4957.000000     | 55.69            | ---              | 74.00          | 18.31       | 100.0       | H   | 126.0         | 11.8         |

## Final\_Result

| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 4956.938889     | 49.71            | 54.00          | 4.29        | 100.0       | H   | 121.0         | 11.8         |

## EUT Information

EUT Name: WIRELESS TRUE ROUND  
Model: 7482404  
Test Mode: BDR\_DH5\_High channel  
Test Voltage:: Battery  
Remark: Temp 22 Humi:52%  
Test Standard: FCC 15.247  
Tested By: Kei Zhang  
Reviewed By: Terry Yin

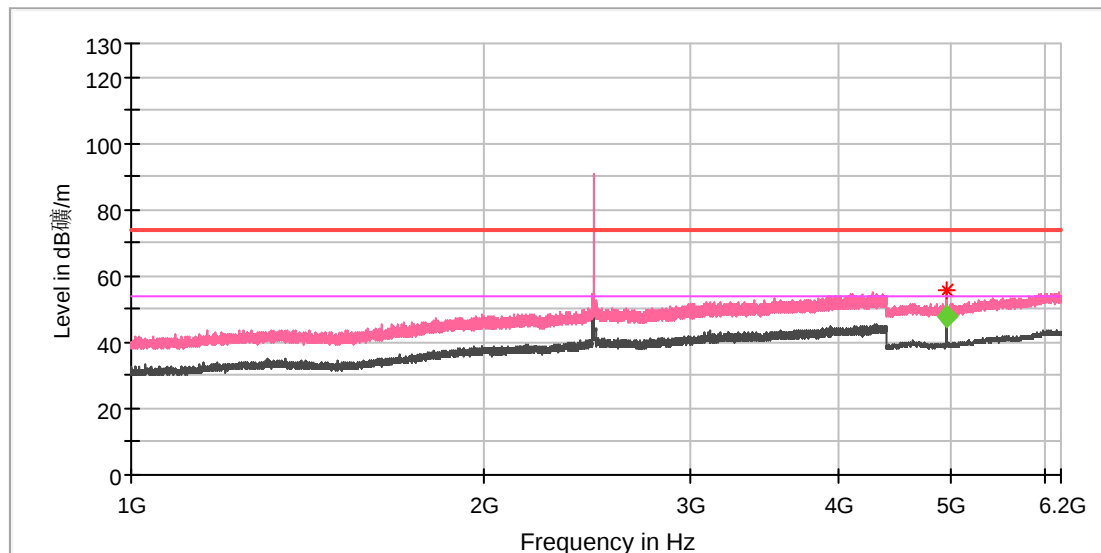

## Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBμV/m) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 4960.000000     | 55.50            | ---              | 74.00          | 18.50       | 100.0       | V   | 22.0          | 11.8         |

## Final\_Result

| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 4959.908333     | 47.48            | 54.00          | 6.52        | 100.0       | V   | 17.0          | 11.8         |

## EUT Information

EUT Name: WIRELESS TRUE ROUND  
Model: 7482404  
Test Mode: BDR\_DH5\_High channel  
Test Voltage:: Battery  
Remark: Temp 22 Humi:52%  
Test Standard: FCC 15.247  
Tested By: Kei Zhang  
Reviewed By: Terry Yin

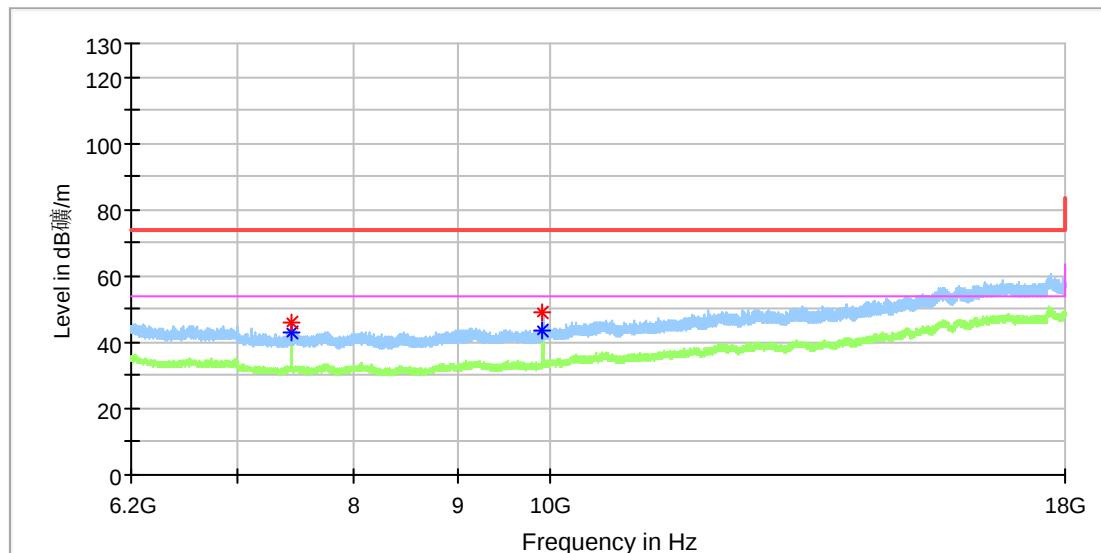


## Critical\_Freqs

| Frequency (MHz) | MaxPeak (dBμV/m) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 7439.983333     | 46.11            | ---              | 74.00          | 27.89       | 100.0       | H   | 295.0         | 8.4          |
| 7439.983333     | ---              | 42.64            | 54.00          | 11.36       | 100.0       | H   | 295.0         | 8.4          |
| 9918.966667     | 48.82            | ---              | 74.00          | 25.18       | 100.0       | H   | 52.0          | 10.8         |
| 9919.950000     | ---              | 43.67            | 54.00          | 10.33       | 100.0       | H   | 52.0          | 10.8         |

## EUT Information

EUT Name: WIRELESS TRUE ROUND  
Model: 7482404  
Test Mode: BDR\_DH5\_High channel  
Test Voltage:: Battery  
Remark: Temp 22 Humi:52%  
Test Standard: FCC 15.247  
Tested By: Kei Zhang  
Reviewed By: Terry Yin

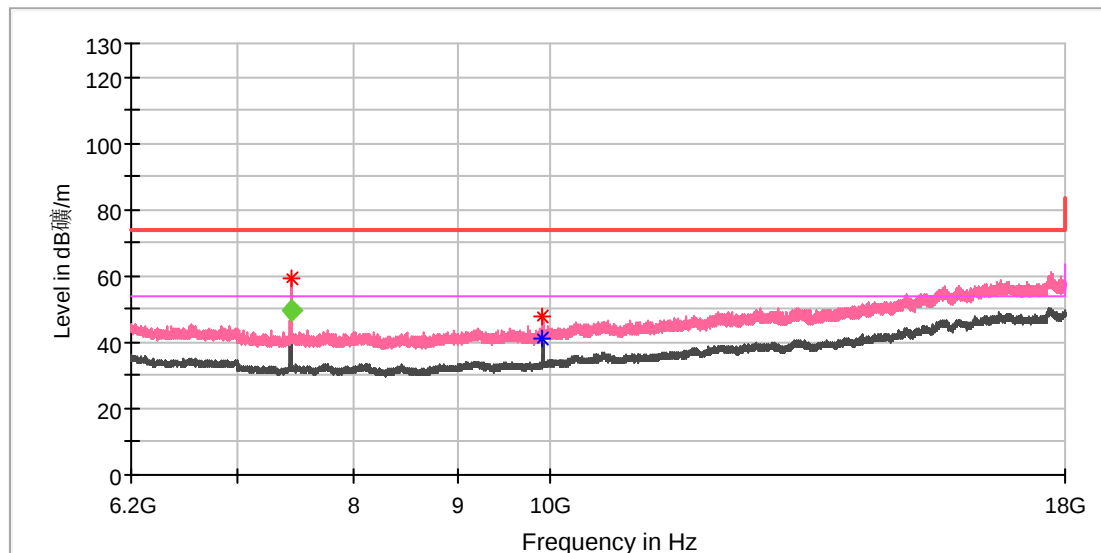

## Critical\_Freqs

| Frequency (MHz) | MaxPeak (dBμV/m) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 7439.000000     | 59.33            | ---              | 74.00          | 14.67       | 100.0       | V   | 92.0          | 8.4          |
| 9919.458333     | ---              | 40.88            | 54.00          | 13.12       | 100.0       | V   | 0.0           | 10.8         |
| 9919.950000     | 47.66            | ---              | 74.00          | 26.34       | 100.0       | V   | 356.0         | 10.8         |


## Final\_Result

| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 7439.636250     | 49.48            | 54.00          | 4.52        | 100.0       | V   | 90.0          | 8.4          |

## Appendix B.8: Test Results of Radiated Emissions in Restricted Bands

### EUT Information

EUT Name: WIRELESS TRUE ROUND  
Model: 7482404  
Test Mode: BDR\_DH5\_Low channel  
Test Voltage:: Battery  
Remark: Temp 22 Humi:52%  
Test Standard: FCC 15.247  
Tested By: Kei Zhang  
Reviewed By: Terry Yin

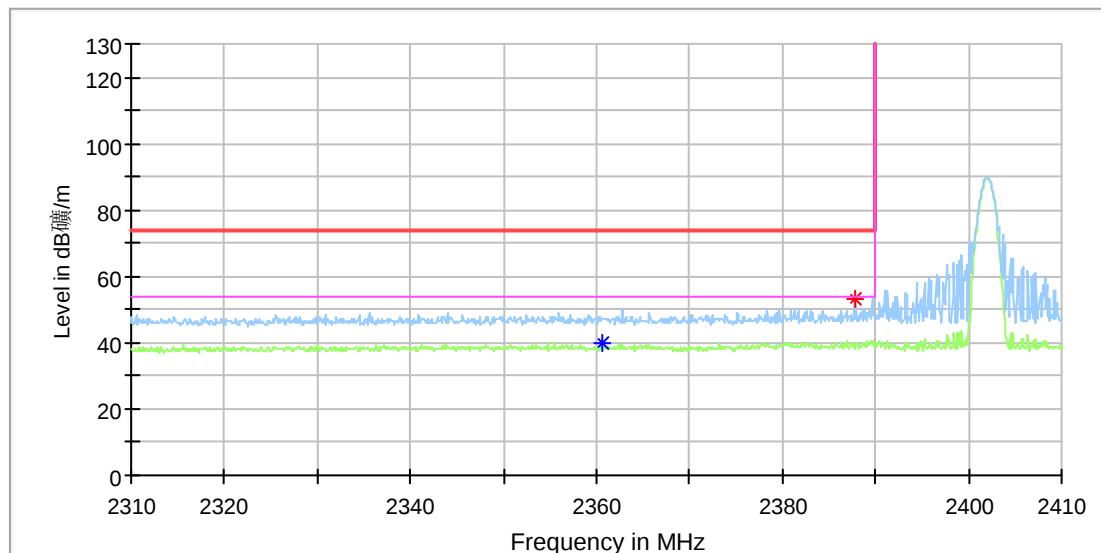


### Critical Freqs

| Frequency (MHz) | MaxPeak (dBμV/m) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2360.600000     | ---              | 39.62            | 54.00          | 14.38       | 100.0       | H   | 180.0         | 6.9          |
| 2387.700000     | 53.35            | ---              | 74.00          | 20.65       | 100.0       | H   | 67.0          | 7.0          |

## EUT Information

EUT Name: WIRELESS TRUE ROUND  
Model: 7482404  
Test Mode: BDR\_DH5\_Low channel  
Test Voltage:: Battery  
Remark: Temp 22 Humi:52%  
Test Standard: FCC 15.247  
Tested By: Kei Zhang  
Reviewed By: Terry Yin

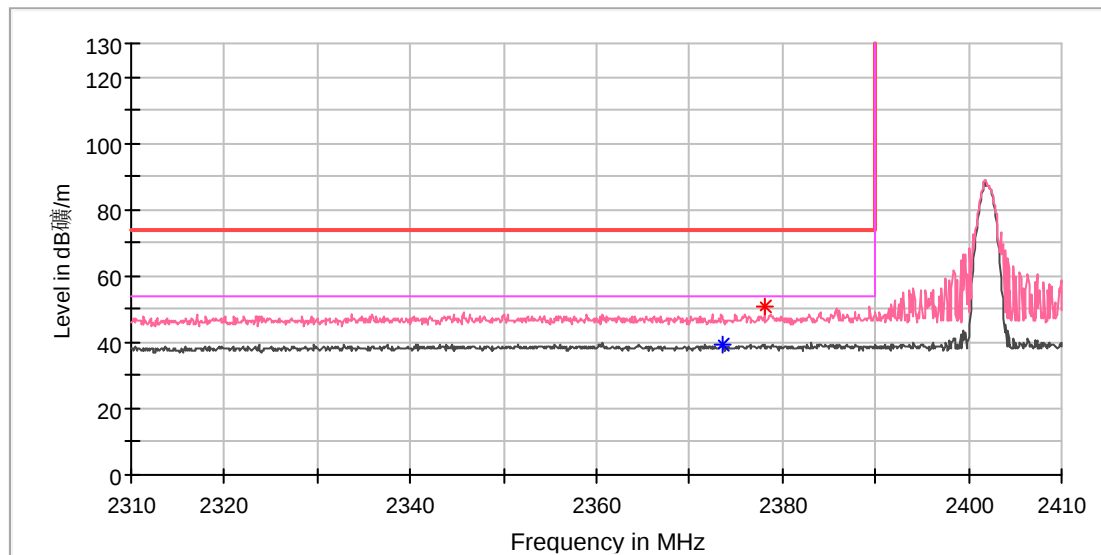


## Critical\_Freqs

| Frequency (MHz) | MaxPeak (dBμV/m) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2373.600000     | ---              | 39.18            | 54.00          | 14.82       | 100.0       | V   | 3.0           | 6.9          |
| 2378.100000     | 50.72            | ---              | 74.00          | 23.28       | 100.0       | V   | 12.0          | 6.9          |

## EUT Information

EUT Name: WIRELESS TRUE ROUND  
Model: 7482404  
Test Mode: BDR\_DH5\_High channel  
Test Voltage:: Battery  
Remark: Temp 22 Humi:52%  
Test Standard: FCC 15.247  
Tested By: Kei Zhang  
Reviewed By: Terry Yin

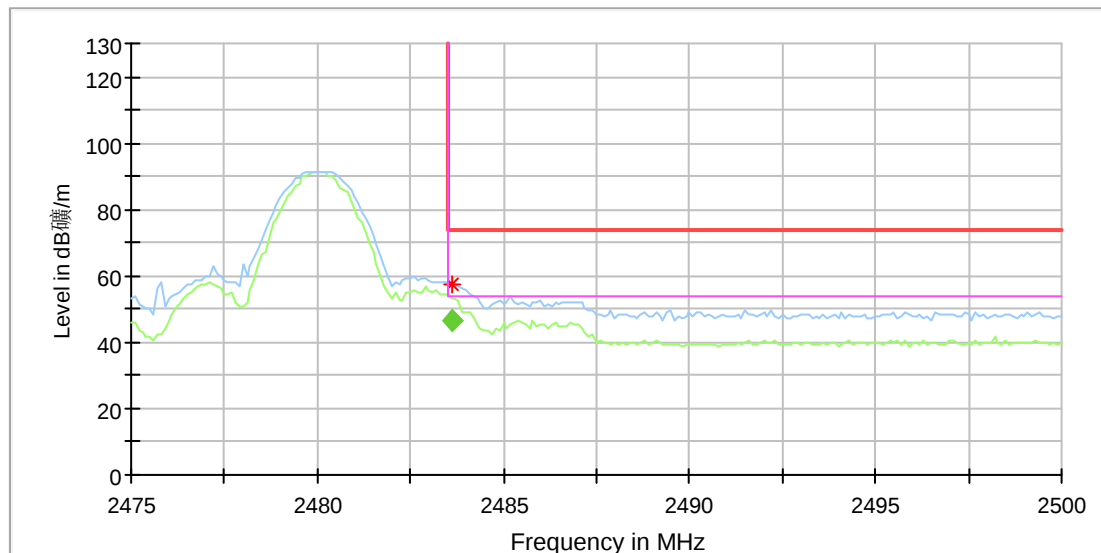

## Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2483.600000     | 57.65            | ---              | 74.00          | 16.35       | 100.0       | H   | 100.0         | 7.4          |

## Final\_Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2483.634950     | 46.56            | 54.00          | 7.44        | 100.0       | H   | 95.0          | 7.4          |

## EUT Information

EUT Name: WIRELESS TRUE ROUND  
Model: 7482404  
Test Mode: BDR\_DH5\_High channel  
Test Voltage:: Battery  
Remark: Temp 22 Humi:52%  
Test Standard: FCC 15.247  
Tested By: Kei Zhang  
Reviewed By: Terry Yin

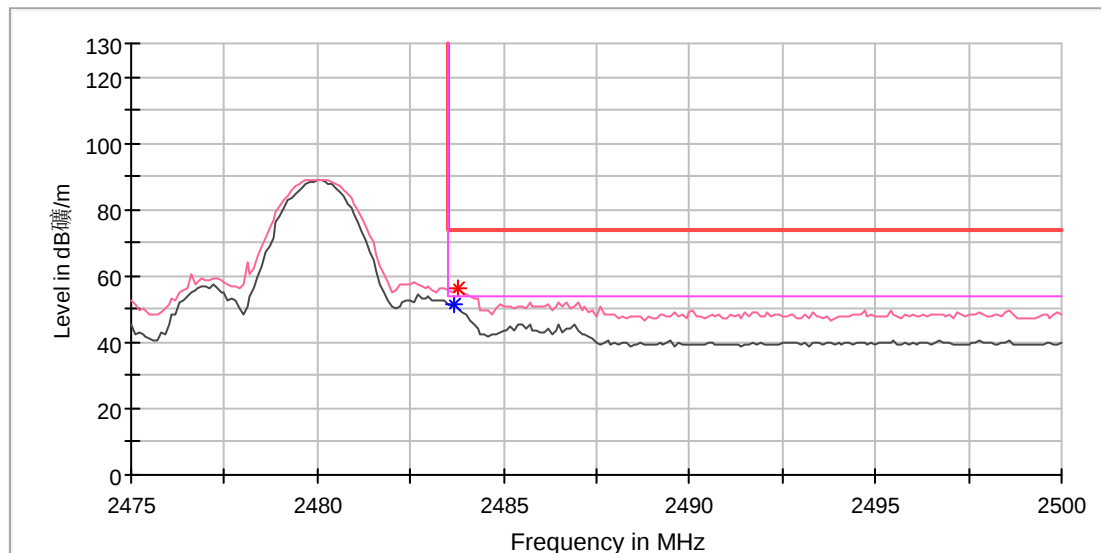


## Critical\_Freqs

| Frequency (MHz) | MaxPeak (dBμV/m) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2483.700000     | ---              | 51.17            | 54.00          | 2.83        | 100.0       | V   | 0.0           | 7.4          |
| 2483.800000     | 56.43            | ---              | 74.00          | 17.57       | 100.0       | V   | 355.0         | 7.4          |

## Appendix B.9: Test Results of Conducted Emission

### EUT Information

|               |                     |
|---------------|---------------------|
| EUT Name:     | WIRELESS TRUE ROUND |
| Model:        | 7482404             |
| Order No:     | 168338459 90        |
| Test Mode:    | Charging mode       |
| Test Voltage: | AC 120V/60Hz        |
| Test By:      | Charlie Zha         |
| Review By:    | Gary Chen           |
| Remark:       | SR2                 |

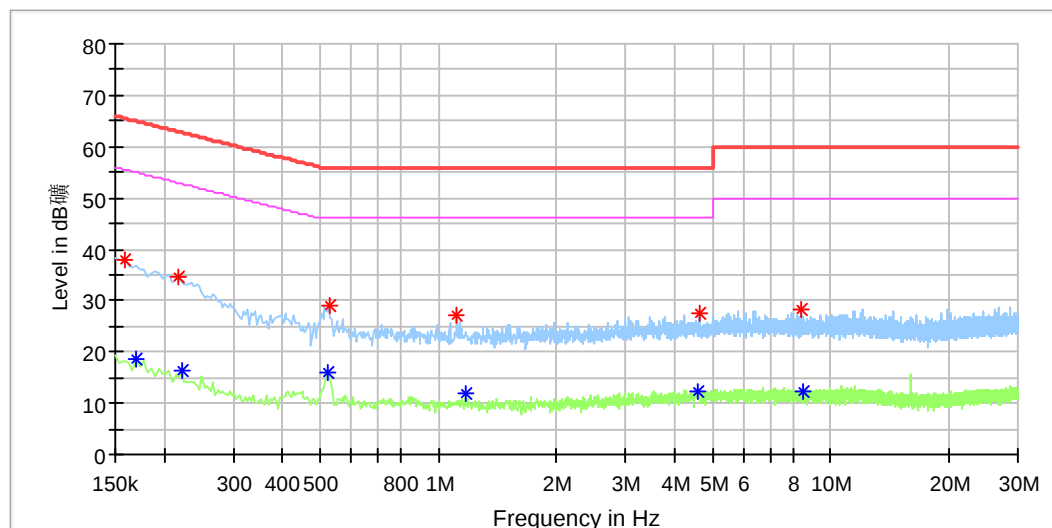


### Critical Freqs

| Frequency (MHz) | MaxPeak (dBμV) | Average (dBμV) | Limit (dBμV) | Margin (dB) | Line | Corr. (dB) |
|-----------------|----------------|----------------|--------------|-------------|------|------------|
| 0.158000        | 37.91          | ---            | 65.57        | 27.66       | L1   | 9.9        |
| 0.170000        | ---            | 18.58          | 54.96        | 36.38       | L1   | 9.9        |
| 0.218000        | 34.78          | ---            | 62.90        | 28.11       | L1   | 9.9        |
| 0.222000        | ---            | 16.25          | 52.74        | 36.49       | L1   | 9.9        |
| 0.522000        | ---            | 16.08          | 46.00        | 29.92       | L1   | 10.0       |
| 0.526000        | 29.02          | ---            | 56.00        | 26.98       | L1   | 10.0       |
| 1.114000        | 27.00          | ---            | 56.00        | 29.00       | L1   | 10.0       |
| 1.174000        | ---            | 11.73          | 46.00        | 34.27       | L1   | 10.1       |
| 4.606000        | ---            | 12.38          | 46.00        | 33.62       | L1   | 10.2       |
| 4.642000        | 27.68          | ---            | 56.00        | 28.32       | L1   | 10.2       |
| 8.458000        | 28.36          | ---            | 60.00        | 31.64       | L1   | 10.3       |
| 8.518000        | ---            | 12.39          | 50.00        | 37.61       | L1   | 10.3       |

## EUT Information

EUT Name: WIRELESS TRUE ROUND  
Model: 7482404  
Order No: 168338459 90  
Test Mode: Charging mode  
Test Voltage: AC 120V/60Hz  
Test By: Charlie Zha  
Review By: Gary Chen  
Remark: SR2

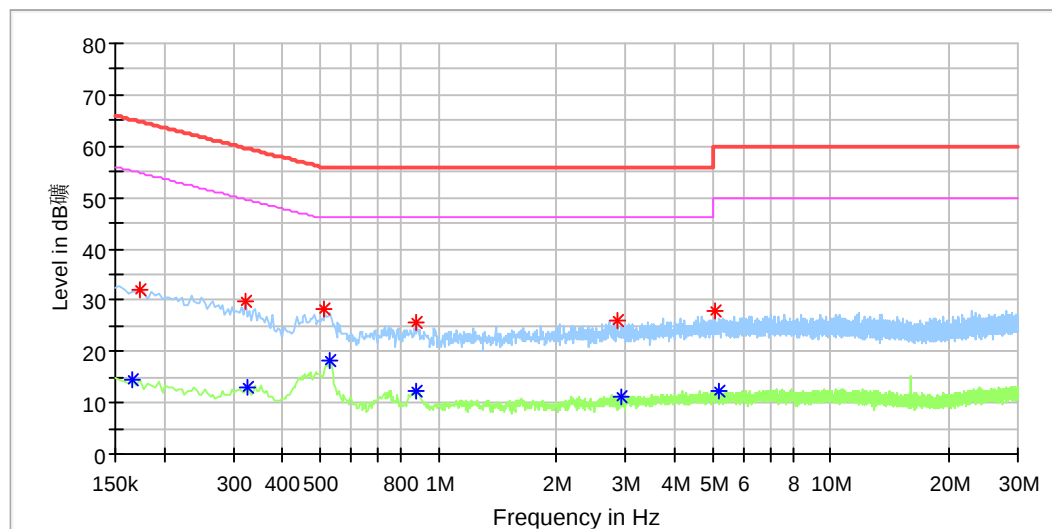

## Critical\_Freqs

| Frequency (MHz) | MaxPeak (dBμV) | Average (dBμV) | Limit (dBμV) | Margin (dB) | Line | Corr. (dB) |
|-----------------|----------------|----------------|--------------|-------------|------|------------|
| 0.166000        | ---            | 14.45          | 55.16        | 40.70       | N    | 9.8        |
| 0.174000        | 31.98          | ---            | 64.77        | 32.79       | N    | 9.8        |
| 0.322000        | 29.72          | ---            | 59.66        | 29.93       | N    | 9.8        |
| 0.326000        | ---            | 13.02          | 49.55        | 36.53       | N    | 9.8        |
| 0.514000        | 28.36          | ---            | 56.00        | 27.64       | N    | 9.8        |
| 0.526000        | ---            | 18.33          | 46.00        | 27.67       | N    | 9.8        |
| 0.882000        | ---            | 12.29          | 46.00        | 33.71       | N    | 9.8        |
| 0.882000        | 25.82          | ---            | 56.00        | 30.18       | N    | 9.8        |
| 2.846000        | 26.19          | ---            | 56.00        | 29.81       | N    | 9.9        |
| 2.918000        | ---            | 11.12          | 46.00        | 34.88       | N    | 9.9        |
| 5.082000        | 27.86          | ---            | 60.00        | 32.14       | N    | 9.9        |
| 5.170000        | ---            | 12.22          | 50.00        | 37.78       | N    | 9.9        |