

FCC Test Report

Report No.: AGC09601201002FE03

FCC ID : 2AXV4G03060R

APPLICATION PURPOSE : Original Equipment

PRODUCT DESIGNATION: remote control car

BRAND NAME : N/A

MODEL NAME : See page 5

APPLICANT : HONGDI TOYS FACTORY

DATE OF ISSUE : Nov. 04, 2020

STANDARD(S)

TEST PROCEDURE(S)

: FCC Part 15 Rules

REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd






REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Nov. 04, 2020	Valid	Initial Release



TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	
2. GENERAL INFORMATION	
2.1. PRODUCT DESCRIPTION	6
2.2. TABLE OF CARRIER FREQUENCY	
2.3. ANTENNA REQUIREMENT	
4. DESCRIPTION OF TEST MODES	
5. SYSTEM TEST CONFIGURATION	
5.1. CONFIGURATION OF EUT SYSTEM	
5.2 EQUIPMENT USED IN TESTED SYSTEM	
5.3. SUMMARY OF TEST RESULTS	
6. TEST FACILITY	
7. RADIATED EMISSION	
7.1TEST LIMIT	
7.2. MEASUREMENT PROCEDURE	13
7.3. TEST SETUP	15
7.4. TEST RESULT	
8. BAND EDGE EMISSION	22
8.1. MEASUREMENT PROCEDURE	22
8.2 TEST SETUP	22
8.3 RADIATED TEST RESULT	
9. 20DB BANDWIDTH	27
9.1. MEASUREMENT PROCEDURE	27
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	27
9.3. MEASUREMENT RESULTS	28
10. FCC LINE CONDUCTED EMISSION TEST	30
10.1. LIMITS OF LINE CONDUCTED EMISSION TEST	30
10.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	
10.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	
12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	





APPENDIX A: PHOTOGRAPHS OF TEST SETUP	. 32
APPENDIX B: PHOTOGRAPHS OF THE EUT	. 34



1. VERIFICATION OF CONFORMITY

Applicant	IHONGDI TOYS FACTORY			
Address	No. 82 Zhenxing Road, Chenghai District, Shantou City, China			
Manufacturer	HONGDI TOYS FACTORY			
Address	No. 82 Zhenxing Road, Chenghai District, Shantou City, China			
Factory	HONGDI TOYS FACTORY			
Address	No. 82 Zhenxing Road, Chenghai District, Shantou City, China			
Product Designation	remote control car			
Brand Name	N/A			
Test Model	G03060R			
Series Model	G03050R, G03051R, G03052R, G03053R, G03054R, G03055R, G03056R, G03057R, G03058R, G03059R, G03061R, G03062R, G03063R, G03064R, G03065R, G03066R, G03067R, G03068R, G03069R, G03070R, G03071R, G03072R, G03073R, G03074R, G03075R, G03076R, G03077R, G03078R, G03079R, G03080R, G03081R, G03082R, G03083R, G03084R, G03085R, G03086R, G03087R, G03095R, G03090R, G03091R, G03092R, G03093R, G03094R, G03095R, G03096R, G03097R, G03098R, G03099R, G03100R, G03101R, G03102R, G03103R, G03104R, G03105R, G03106R, G03107R, G03108R, G03109R, G03110R, G03111R, G03112R, G03113R, G03114R, G03115R, G03116R, G03117R, G03118R, G03119R, G03120R, G03121R, G03122R, G03123R, G03124R, G03125R, G03126R, G03127R, G03128R, G03129R, G03130R, G03131R, G03132R, G03134R, G03142R, G03143R, G03144R, G03145R, G03146R, G03147R, G03148R, G03149R, G03150R			
Difference Description	All the series models are the same as the test model except for the model names and the color of appearance.			
Date of test	Oct. 14, 2020 to Nov. 04, 2020			
Deviation	No any deviation from the test method			
Condition of Test Sample Normal				
Test Result	Pass			
Report Template	AGCRT-US-BR/RF			

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.249.

> Sky dong Prepared By Sky Dong Nov. 04, 2020 (Project Engineer) Max Zhans Reviewed By Max Zhang Nov. 04, 2020 (Reviewer) Approved By

> > Forrest Lei

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stand by authorized approver, or having been altered without authorization, or having not been stand by authorized by the standard by the standar presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15d 🕊 after Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

7 tillajoi tooliilloal accomptic	To Let 16 described de following
Operation Frequency	2410MHz-2473MHz
Maximum field strength	89.92dBuV/m(Average)@3m
Modulation	GFSK
Number of channels	32
Antenna Gain	0dBi
Antenna Designation	Internal Antenna (Met 15.203 Antenna requirement)
Hardware Version	TS-703TA
Software Version	N/A
Power Supply	TX: DC 3.0V by battery RX: DC 7.4V by battery or DC 5V by adapter

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

/Inspection The test results




2.2. TABLE OF CARRIER FREQUENCY

Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz) 2444	
1	2410	19		
2	2414	20	2446	
3	2415	21	2450	
4	2416	22	2452	
5	2417	23	2454	
6	2418	24	2456	
7	2419	25	2458	
8	2421	26	2462	
9	2426	27	2464	
10	2428	28	2465	
11	2429	29	2466	
12	2430	30	2467	
13	2431	31	2469	
14	2433	32	2473	
15	2434			
16	2439	9 - 6	8	
17	2441			
18	2442		. 60	

2.3. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.





3. MEASUREMENT UNCERTAINTY

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in measurement" (GUM) published by CISPR and ANSI.

- Uncertainty of Conducted Emission, Uc = ±3.1 dB
- Uncertainty of Radiated Emission below 1GHz, Uc = ±4.0 dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.8 dB



4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DES	CRIPTION
1	TX mode at Low	r channel
2	TX mode at Midd	le channel
3	TX mode at High	n channel

Note:

- 1. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 2. The EUT enters test modes by pressing keys of EUT.
- 3. For battery operated equipment, the equipment tests are performed using a new battery.



5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Radiated Emission Configure:

EUT	

5.2 EQUIPMENT USED IN TESTED SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark	
1	remote control car	G03066R	2AXV4G03060R	EUT	

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249&15.209	Radiated Emission	Compliant
§15.249	Band Edges	Compliant
§15.215	20dB bandwidth	Compliant
§15.207	Conducted Emission	N/A

Note: The conducted emission tests at AC port are not required for devices which only employ battery power for operation.



6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd			
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China			
Designation Number	CN1259			
FCC Test Firm Registration Number	975832			
A2LA Cert. No.	5054.02			
Description	n Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA			

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	May 15, 2020	May 14, 2021
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec. 12, 2019	Dec. 11, 2020
2.4GHz Fliter	EM Electronics	2400-2500MHz	N/A	Mar. 23, 2020	Mar. 22, 2022
Attenuator	ZHINAN	E-002	N/A	Sep. 03, 2020	Sep. 02, 2022
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep.21, 2019	Sep. 20, 2021
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	May 22, 2020	May 21, 2022
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00154520	Oct. 26, 2019	Oct. 25, 2021
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Oct. 15, 2019	Oct. 16, 2021
ANTENNA	SCHWARZBECK	VULB9168	494	Jan. 09, 2019	Jan. 08, 2021
Test software	Tonscend	JS32-RE (Ver.2.5)	N/A	N/A	N/A

/Inspection The test results

he test report.



7. RADIATED EMISSION

7.1TEST LIMIT

Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)	
900-928MHz	50	500	
2400-2483.5MHz	50	500	
5725-5875MHz	50	500	
24.0-24.25GHz	250	2500	

Standard FCC 15.209

Frequency	Distance	Field	Field Strengths Limit			
(MHz)	Meters	μ V/m	dB(μV)/m			
0.009 ~ 0.490	300	2400/F(kHz)	<u></u>			
0.490 ~ 1.705	30	24000/F(kHz)				
1.705 ~ 30	30	30	\0 \0			
30 ~ 88	3	100	40.0			
88 ~ 216	3	150	43.5			
216 ~ 960	3	200	46.0			
960 ~ 1000	3	500	54.0			
Above 1000	3	Other:74.0 dB(µV)/m	Other:74.0 dB(µV)/m (Peak) 54.0 dB(µV)/m (Average)			

Remark:

- (1) Emission level dB μ V = 20 log Emission level μ V/m
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.



7.2. MEASUREMENT PROCEDURE

- The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use minimum resolution bandwidth of 1 MHz. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.



The following table is the setting of spectrum analyzer and receiver.

	Spectrum Parameter	Setting
	Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
@	Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
10°	Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
®	Start ~Stop Frequency	1GHz~26.5GHz RBW 2.4MHz/ VBW 8MHz for Peak,
		RBW 2.4MHz/10Hz for Average


Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




7.3. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

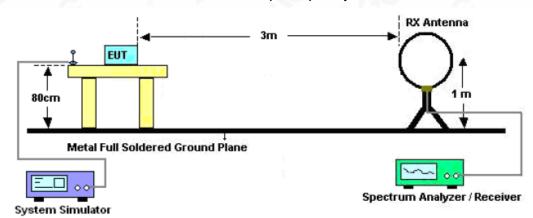

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

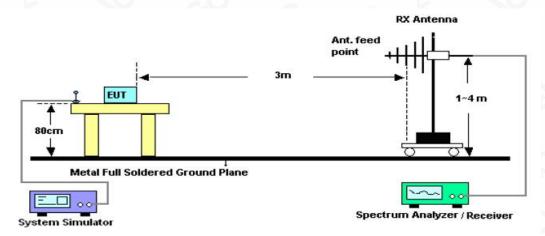

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

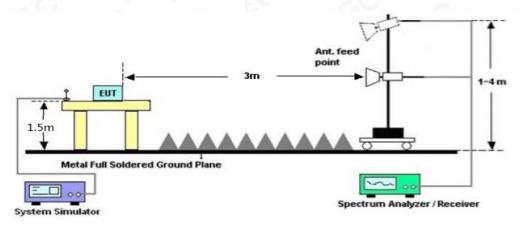

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Coedicated Postuagina Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written pathorization of AGC where the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




7.4. TEST RESULT

RADIATED EMISSION BELOW 30MHZ

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

RADIATED EMISSION 30MHz-1GHZ

EUT	REMOTE CONTROL CAR	Model Name	G03060R
Temperature	25 ℃	Relative Humidity	60%
Pressure	101kPa	Test Voltage	DC 3.0V
Test Mode	Mode 1	Polarization	Horizontal

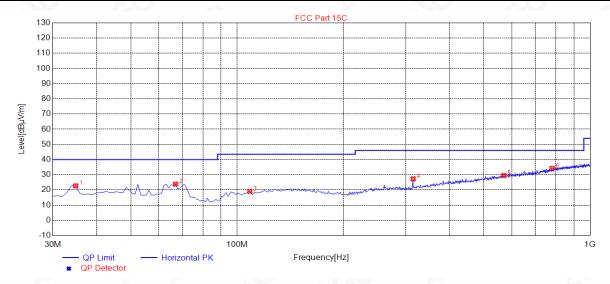


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	34.8500	22.74	10.70	40.00	17.26	100	78	Horizontal
2	66.8600	23.81	9.76	40.00	16.19	100	125	Horizontal
3	108.5700	19.10	12.27	43.50	24.40	100	230	Horizontal
4	315.1800	27.32	16.48	46.00	18.68	100	75	Horizontal
5	569.3200	29.47	23.67	46.00	16.53	100	80	Horizontal
6	780.7800	34.21	27.97	46.00	11.79	100	191	Horizontal

RESULT: PASS



EUT	remote control car	Model Name	G03060R
Temperature	25 ℃	Relative Humidity	60%
Pressure	101kPa	Test Voltage	DC 3.0V
Test Mode	Mode 1	Polarization	Vertical

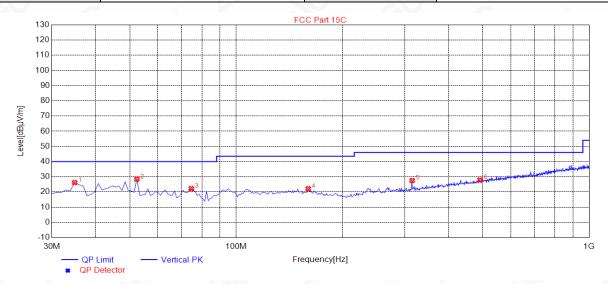

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	34.8500	26.16	10.70	40.00	13.84	100	6	Vertical
2	52.3100	28.45	11.49	40.00	11.55	100	68	Vertical
3	74.6200	22.22	8.27	40.00	17.78	100	99	Vertical
4	159.9800	22.14	14.94	43.50	21.36	100	78	Vertical
5	315.1800	27.53	16.48	46.00	18.47	100	316	Vertical
6	490.7500	27.92	21.96	46.00	18.08	100	349	Vertical

RESULT: PASS

Note: Factor=Antenna Factor + Cable loss, Margin=Limit-Level.

The "Factor" value can be calculated automatically by software of measurement system.

The mode 1 is the worst case, and only the data of the worst case recorded in this test report.



Test Modulation

GFSK

FIELD STRENGTH OF FUNDAMENTAL

EUT	remote control car	Model Name	G03060R
Temperature	25℃	Relative Humidity	60%
Pressure	101kPa	Test Voltage	DC 3.0V
Test Modulation	GFSK	Polarization	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
2410	47.63	49.05	99.57	114.00	-14.43	peak
2410	32.33	49.05	89.92	94.00	-4.08	AVG
2442	47.14	49.12	98.16	114.00	-15.84	peak
2442	28.66	49.12	89.64	94.00	-4.36	AVG
2473	46.22	49.25	97.66	114.00	-16.34	peak
2473	28.60	49.25	89.36	94.00	-4.64	AVG
Remark:			· · · · · · · · · · · · · · · · · · ·			
actor = Ante	enna Factor + Ca	able Loss –	Pre-amplifier.	8		

EUT	remote control car	Model Name	G03060R
Temperature	25℃	Relative Humidity	60%
Pressure	101kPa	Test Voltage	DC 3.0V

Polarization

Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
2410	45.65	49.05	97.57	114.00	-16.43	peak
2410	29.51	49.05	86.59	94.00	-7.41	AVG
2442	45.31	49.12	98.16	114.00	-15.84	peak
2442	30.11	49.12	87.69	94.00	-6.31	AVG
2473	40.78	49.25	99.67	114.00	-14.33	peak
2473	30.48	49.25	88.31	94.00	-5.69	AVG
lemark:	0					8



RADIATED EMISSION ABOVE 1GHZ

EUT	remote control car	Model Name	G03060R
Temperature	25 ℃	Relative Humidity	60%
Pressure	101kPa	Test Voltage	DC 3.0V
Test Modulation	Mode 1	Polarization	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4820.067	55.20	0.08	55.28	74.00	-18.72	peak
4820.067	42.93	0.08	43.01	54.00	-10.99	AVG
7230.426	50.14	2.21	52.35	74.00	-21.65	peak
7230.426	38.15	2.21	40.36	54.00	-13.64	AVG
Remark:	-,0		©			
actor = Ante	enna Factor + C	able Loss –	Pre-amplifier.			

EUT	remote control car	Model Name	G03060R
Temperature	25℃	Relative Humidity	60%
Pressure	101kPa	Test Voltage	DC 3.0V
Test Modulation	Mode 1	Polarization	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4820.067	53.15	0.08	53.23	74.00	-20.77	peak
4820.067	42.17	0.08	42.25	54.00	-11.75	AVG
7230.426	47.35	2.21	49.56	74.00	-24.44	peak
7230.426	35.47	2.21	37.68	54.00	-16.32	AVG
Remark:	7.0	(6)			60	- 6
actor = Ante	enna Factor + C	able Loss – Pi	re-amplifier.			



(%)		(8)	
EUT	remote control car	Model Name	G03060R
Temperature	25℃	Relative Humidity	60%
Pressure	101kPa	Test Voltage	DC 3.0V
Test Modulation	Mode 2	Polarization	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4884.683	51.14	0.14	51.28	74.00	-22.72	peak
4884.683	43.16	0.14	43.30	54.00	-10.70	AVG
7326.436	45.37	2.36	47.73	74.00	-26.27	peak
7326.436	34.49	2.36	36.85	54.00	-17.15	AVG
Remark:	®			-6	8	
actor = Ante	enna Factor + C	able Loss – I	Pre-amplifier.			8

EUT	remote control car	Model Name	G03060R
Temperature	25℃	Relative Humidity	60%
Pressure	101kPa	Test Voltage	DC 3.0V
Test Modulation	Mode 2	Polarization	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Ture
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4884.683	49.19	0.14	49.33	74.00	-24.67	peak
4884.683	39.28	0.14	39.42	54.00	-14.58	AVG
7326.436	44.29	2.36	46.65	74.00	-27.35	peak
7326.436	36.25	2.36	38.61	54.00	-15.39	AVG
emark:	0					

Factor = Antenna Factor + Cable Loss - Pre-amplifier.



(%)		(%)	
EUT	remote control car	Model Name	G03060R
Temperature	25℃	Relative Humidity	60%
Pressure	101kPa	Test Voltage	DC 3.0V
Test Modulation	Mode 3	Polarization	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4946.056	53.24	0.22	53.46	74.00	-20.54	peak
4946.056	46.25	0.22	46.47	54.00	-7.53	AVG
7419.384	50.97	2.64	53.61	74.00	-20.39	peak
7419.384	39.99	2.64	42.63	54.00	-11.37	AVG
Remark:	©			-G	8	
Factor = Ante	enna Factor + C	able Loss – F	Pre-amplifier.		6.0	

EUT	remote control car	Model Name	G03060R
Temperature	25℃	Relative Humidity	60%
Pressure	101kPa	Test Voltage	DC 3.0V
Test Modulation	Mode 3	Polarization	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4946.056	54.36	0.22	54.58	74.00	-19.42	peak
4946.056	43.39	0.22	43.61	54.00	-10.39	AVG
7419.384	49.78	2.64	52.42	74.00	-21.58	peak
7419.384	37.89	2.64	40.53	54.00	-13.47	AVG
Remark:	®				(8)	
actor = Ante	enna Factor + Ca	ble Loss – P	re-amplifier.			(6)

Note: The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.



8. BAND EDGE EMISSION

8.1. MEASUREMENT PROCEDURE

- 1. The EUT operates at transmitting mode. The operate channel is tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.
- 2. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission: (a) PEAK: RBW=1MHz, VBW=3MHz / Sweep=AUTO
- (b) AVERAGE: RBW=1MHz; VBW=3MHz / Sweep=AUTO
- 3. Other procedures refer to clause 7.2.

8.2 TEST SETUP

RADIATED EMISSION TEST SETUP Ant. feed point 1.5m Metal Full Soldered Ground Plane

8.3 RADIATED TEST RESULT

tem Simulator

Note:

- 1. Factor=Antenna Factor + Cable loss Amplifier gain. Field Strength=Factor + Reading level
- 2. The factor had been edited in the "Input Correction" of the Spectrum Analyzer. So the Amplitude of test plots is equal to Reading level plus the Factor in dB. Use the A dB(μ V) to represent the Amplitude. Use the F dB(μ V/m) to represent the Field Strength. So A=F.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC, the test resupresented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuence of the test report report and in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuence of the test report and in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuence of the test report apply only to the test report apply only to the test report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuence of the test report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuence of the test report apply only to th

The test results



EUT	remote control car	Model Name	G03060R
Temperature	25℃	Relative Humidity	60%
Pressure	101kPa	Test Voltage	DC 3.0V
Test Mode	Mode 2	Polarization	Horizontal

Peak Value



Average Value



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated restriction. Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/

The test results




EUT	remote control car	Model Name	G03060R
Temperature	25℃	Relative Humidity	60%
Pressure	101kPa	Test Voltage	DC 3.0V
Test Mode	Mode 2	Polarization	Vertical

Peak Value



Average Value

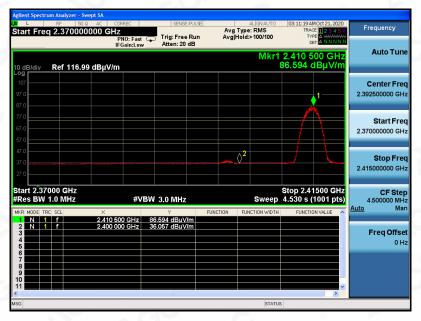

g/Inspection The test results the test report.



EUT	remote control car	Model Name	G03060R
Temperature	25℃	Relative Humidity	60%
Pressure	101kPa	Test Voltage	DC 3.0V
Test Mode	Mode 4	Polarization	Horizontal

Peak Value



Average Value



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the stedicated restroy is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



EUT	remote control car	Model Name	G03060R
Temperature	25℃	Relative Humidity	60%
Pressure	101kPa	Test Voltage	DC 3.0V
Test Mode	Mode 4	Polarization	Vertical

Peak Value



Average Value






9. 20DB BANDWIDTH

9.1. MEASUREMENT PROCEDURE

- 1. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 2. Set SPA Centre Frequency = Operation Frequency, RBW= 30 KHz, VBW ≥ × RBW.
- 3. Set SPA Trace 1 Max hold, then View.

9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

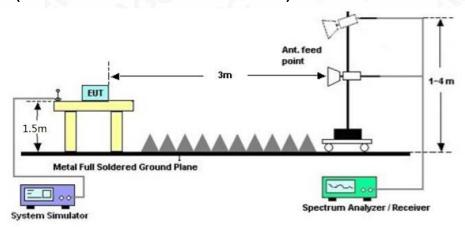

he test results the test report.



9.3. MEASUREMENT RESULTS

TEST ITEM	20DB BANDWIDTH	10	10°	-6	®	
TEST MODULATION	GFSK	8		10	10°C	-0

Test Channel	20DB BANDWIDTH (MHz)	99% BANDWIDTH (MHz)	Criteria
Low Channel	2.013	1.3433	PASS
Middle Channel	2.001	1.4243	PASS
High Channel	1.531	1.4600	PASS

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Pest Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuence of Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL



TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



10. FCC LINE CONDUCTED EMISSION TEST


10.1. LIMITS OF LINE CONDUCTED EMISSION TEST

F	Maximum RF Line Voltage		
Frequency	Q.P.(dBuV)	Average(dBuV)	
150kHz~500kHz	66-56	56-46	
500kHz~5MHz	56	46	
5MHz~30MHz	60	50	

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

10.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

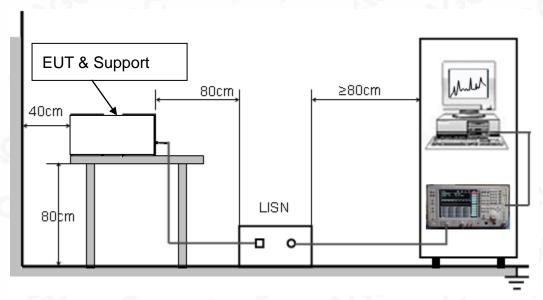

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated restrict inspection of stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test represented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuence of the test represented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuence of the test represented in the report apply only to the test report should be addressed to AGC by agc@agc-cert.com.

The test results



10.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST


- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average
- The test data of the worst case condition(s) was reported on the Summary Data page.

compliance besting/Inspection Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written exception of AGE ce of the test report. presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15d Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




APPENDIX A: PHOTOGRAPHS OF TEST SETUP

FCC RADIATED EMISSION TEST SETUP BELOW 1GHZ

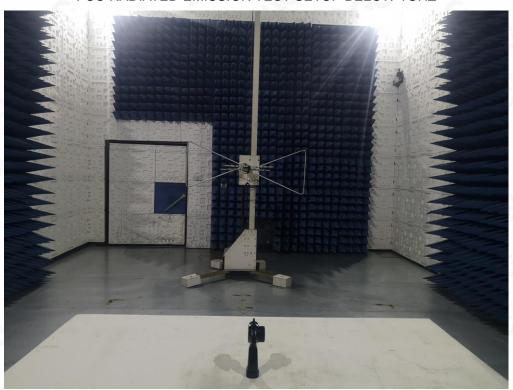


FCC RADIATED EMISSION TEST SETUP ABOVE 1

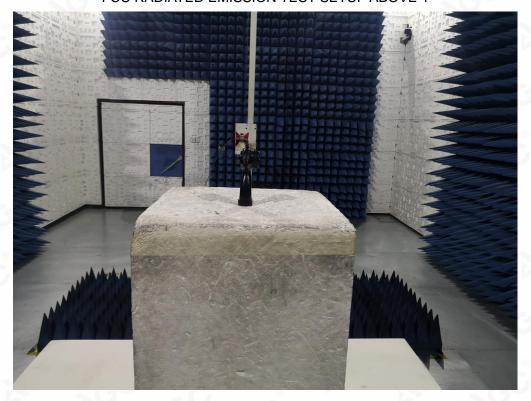

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




CONDUCTED TEST SETUP

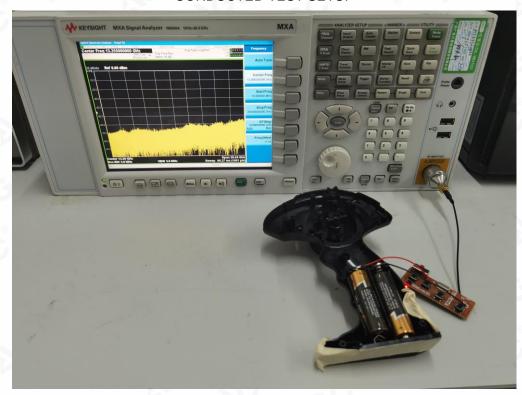



APPENDIX B: PHOTOGRAPHS OF THE EUT

ALL VIEW OF EUT-1

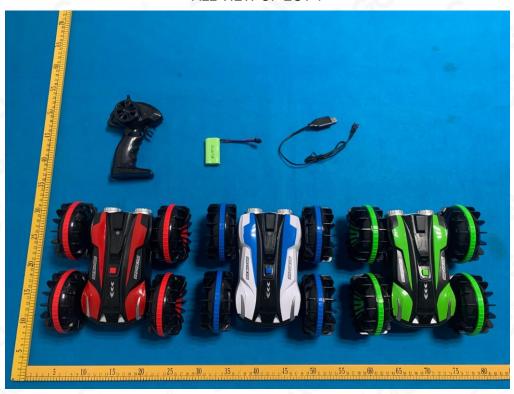

ALL VIEW OF EUT-2



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



ALL VIEW OF EUT-3



TOP VIEW OF EUT



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



BACK VIEW OF EUT



LEFT VIEW OF EUT



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the condition of stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written permitted without the written permitted without the written permitted in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



RIGHT VIEW OF EUT



OPEN VIEW OF EUT-1




Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the condition of stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written permitted without the written permitted without the written permitted in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



OPEN VIEW OF EUT-2




INTERNAL VIEW OF EUT-1

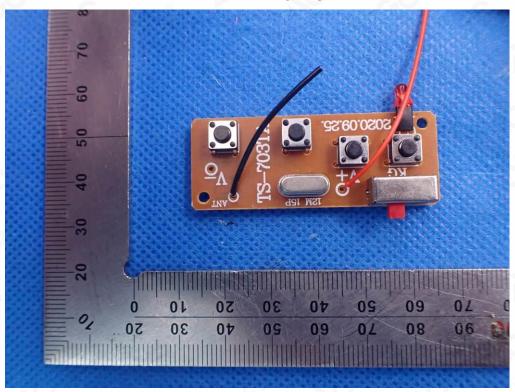


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



INTERNAL VIEW OF EUT-2

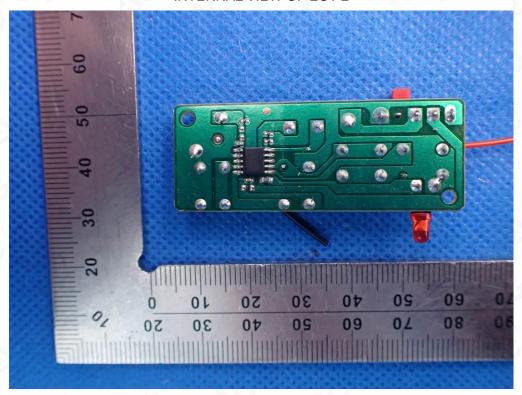

INTERNAL VIEW OF EUT-3

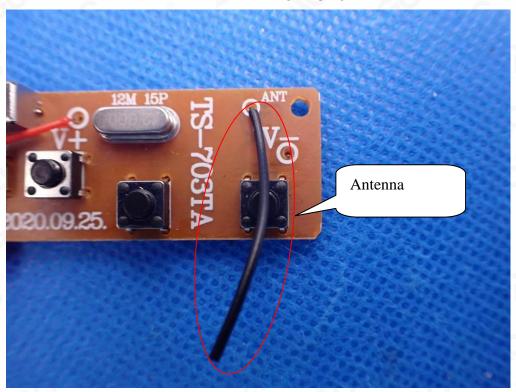

----END OF REPORT----

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. The non-CMA report issued by AGC is only permitted to be used by the client as internal reference use and shall not be used for public demonstration purpose.
- 5. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 6. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 7. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 8. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 9. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 10. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.