






# FCC Radio Test Report

## FCC ID: 2AXWO-M910

**Report No.** : TBR-C-202209-0184-3  
**Applicant** : Doors Korea Co.,Ltd  
**Equipment Under Test (EUT)**  
**EUT Name** : UHF Microphone  
**Model No.** : M910  
**Serial Model No.** : M910-Pro, M910-SE, M910-US, M910-CE, M910-KR, M910-PROE-PRO  
**Brand Name** : Miracle,M the Sing  
**Sample ID** : 202209-0184-2-1# & 202209-0184-2-2#  
**Receipt Date** : 2022-10-14  
**Test Date** : 2022-10-14 to 2022-12-08  
**Issue Date** : 2022-12-14  
**Standards** : FCC Part 15, Subpart C (15.249)  
**Test Method** : ANSI C63.10: 2013  
**Conclusions** : **PASS**

In the configuration tested, the EUT complied with the standards specified above,  
The EUT technically complies with the FCC requirements

**Test/Witness Engineer** :  Seven Wu  
**Engineer Supervisor** :  IVAN SU  
**Approved & Authorized** :  Ray Lai



This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.

## Contents

<b>CONTENTS</b> .....	<b>2</b>
<b>1. GENERAL INFORMATION ABOUT EUT</b> .....	<b>5</b>
1.1 Client Information.....	5
1.2 General Description of EUT (Equipment Under Test) .....	5
1.3 Block Diagram Showing the Configuration of System Tested.....	6
1.4 Description of Test Mode.....	7
1.5 Description of Test Software Setting .....	7
1.6 Measurement Uncertainty .....	8
1.7 Test Facility.....	8
<b>2. TEST SUMMARY</b> .....	<b>9</b>
<b>3. TEST EQUIPMENT</b> .....	<b>10</b>
<b>4. CONDUCTED EMISSION TEST</b> .....	<b>12</b>
4.1 Test Standard and Limit.....	12
4.2 Test Setup.....	12
4.3 Test Procedure.....	12
4.4 EUT Operating Mode .....	13
4.5 Test Data.....	13
<b>5. RADIATED EMISSION TEST</b> .....	<b>14</b>
5.1 Test Standard and Limit.....	14
5.2 Test Setup.....	15
5.3 Test Procedure.....	16
5.4 EUT Operating Condition .....	17
5.5 Test Data.....	17
<b>6. BANDWIDTH TEST</b> .....	<b>18</b>
6.1 Test Setup.....	18
6.2 Test Procedure.....	18
6.3 EUT Operating Condition .....	18
6.4 Test Data.....	18
<b>7. ANTENNA REQUIREMENT</b> .....	<b>19</b>
7.1 Standard Requirement.....	19
7.2 Antenna Connected Construction .....	19
7.3 Result.....	19



---

<b>ATTACHMENT A-- CONDUCTED EMISSION TEST DATA .....</b>	<b>20</b>
<b>ATTACHMENT B-- RADIATED EMISSION TEST DATA .....</b>	<b>22</b>
<b>ATTACHMENT C--BANDWIDTH DATA .....</b>	<b>34</b>



## Revision History

Report No.	Version	Description	Issued Date
TBR-C-202209-0184-3	Rev.01	Initial issue of report	2022-12-14



# 1. General Information about EUT

## 1.1 Client Information

<b>Applicant</b>	:	Doors Korea Co.,Ltd
<b>Address</b>	:	1F, 27, Mangu-ro 81-gil, Jungnang-gu, Seoul, South Korea
<b>Manufacturer</b>	:	DONGGUAN TUCHI ELECTRONIC TECHNOLOGY CO.LTD
<b>Address</b>	:	Room 201, 4th Building, No.1,XINWEI 1st Road, ShaJiao District, Humen, DongGuan, GD, CN

## 1.2 General Description of EUT (Equipment Under Test)

<b>EUT Name</b>	:	UHF Microphone	
<b>Model No.</b>	:	M910, M910-Pro, M910-SE, M910-US, M910-CE, M910-KR, M910-PROE-PRO	
<b>Model Difference</b>	:	All these models are on the same PCB, the layout and circuit are the same, the only difference is the sale model is different.	
<b>Product Description</b>	:	Operation Frequency:	Wireless microphone: 902.1-927.9 MHz
		Number of Channel:	Please see the note (2)
		Output power:	84.99 dBuV/m@3m Peak
		Antenna Gain:	-0.96dBi Internal Antenna
		Equipment System:	Analog signal
<b>Power Rating</b>	:	Input: DC 5V DC 3.7V by 450mAh Rechargeable Li-ion battery	
<b>Software Version</b>	:	1.0	
<b>Hardware Version</b>	:	V2.0	
<b>Connecting I/O Port(S)</b>	:	Please refer to the User's Manual	



**Note:**

- (1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- (2) Channel List:



Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	902.1	16	909.6	31	923.4
02	902.6	17	910.1	32	923.9
03	903.1	18	910.6	33	924.4
04	903.6	19	911.1	34	924.9
05	904.1	<b>20</b>	<b>911.6</b>	35	925.4
06	904.6	21	918.4	36	925.9
07	905.1	22	918.9	37	926.4
08	905.6	23	919.4	38	926.9
09	906.1	24	919.9	39	927.4
10	906.6	25	920.4	<b>40</b>	<b>927.9</b>
11	907.1	26	920.9		
12	907.6	27	921.4		
13	908.1	28	921.9		
14	908.6	29	922.4		
15	909.1	30	922.9		

### 1.3 Block Diagram Showing the Configuration of System Tested

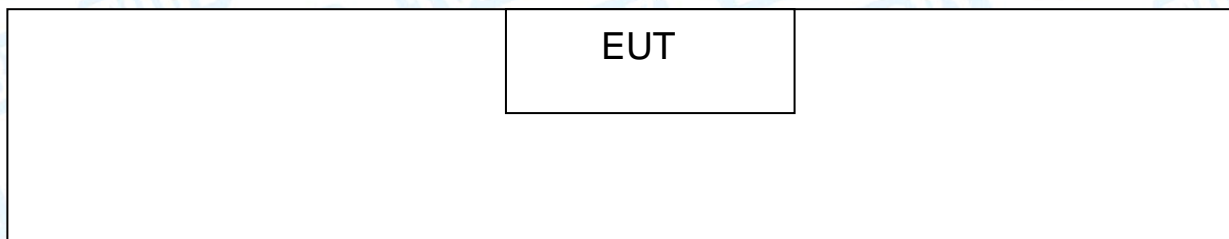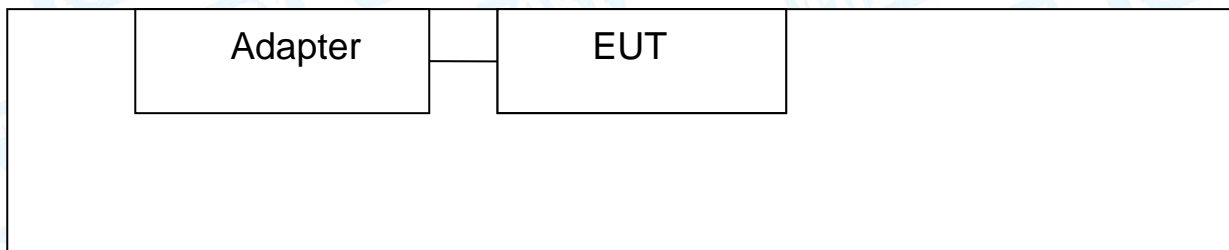

### 1.4 Description of Test Mode

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follows was evaluated respectively.

For Radiated Test	
Final Test Mode	Description
Mode 1	TX Mode(902.1MHz/911.6MHz/927.9MHz)

**Note:**

For all test, we have verified the construction and function in typical operation. And all the test modes were carried out with the EUT in transmitting operation in maximum power with all kinds of data rate.

- (1) According to ANSI C63.10 standards, the measurements are performed at the highest, middle, lowest available channels.
- (2) During the testing procedure, the continuously transmitting with the maximum power mode was programmed by the customer.
- (3) The EUT is considered a portable unit; it was pre-tested on the positioned of each 3 axis, X-plane, Y-plane and Z-plane. The worst case was found positioned on X-plane. Therefore only the test data of this X-plane was used for radiated emission measurement test.

### 1.5 Description of Test Software Setting

During testing channel & Power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of RF mode.

Test Software Version	Adjust and control the corresponding transmission frequency through the EUT entity key.		
Wireless microphone	902.1 MHz	911.6MHz	927.9MHz
Digital systems	DEF	DEF	DEF



## 1.6 Measurement Uncertainty

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

Test Item	Parameters	Expanded Uncertainty ( $U_{Lab}$ )
Conducted Emission	Level Accuracy: 9kHz~150kHz	$\pm 3.50$ dB
	150kHz to 30MHz	$\pm 3.10$ dB
Radiated Emission	Level Accuracy: 9kHz to 30 MHz	$\pm 4.60$ dB
Radiated Emission	Level Accuracy: 30MHz to 1000 MHz	$\pm 4.50$ dB
Radiated Emission	Level Accuracy: Above 1000MHz	$\pm 4.20$ dB

## 1.7 Test Facility

The testing report were performed by the Shenzhen Toby Technology Co., Ltd., in their facilities located at 1/F.,Building 6, Rundongsheng Industrial Zone, Longzhu, Xixiang, Bao'an District, Shenzhen, Guangdong, China. At the time of testing, the following bodies accredited the Laboratory:

### **CNAS (L5813)**

The Laboratory has been accredited by CNAS to ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories for the competence in the field of testing. And the Registration No.: CNAS L5813.

### **A2LA Certificate No.: 4750.01**

The laboratory has been accredited by American Association for Laboratory Accreditation(A2LA) to ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories for the technical competence in the field of Electrical Testing. And the A2LA Certificate No.: 4750.01. FCC Accredited Test Site Number: 854351. Designation Number: CN1223.

### **IC Registration No.: (11950A)**

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. The site registration: Site# 11950A.





## 2. Test Summary

FCC Part 15 Subpart C(15.249)			
Standard Section	Test Item	Judgment	Remark
15.203	Antenna Requirement	PASS	N/A
15.205	Restricted Bands	PASS	N/A
15.207	AC Power Conducted Emission	PASS	N/A
15.249 & 15.209	Radiated Spurious Emission	PASS	N/A
15.215(C)	20dB Bandwidth	PASS	N/A

**Note:** N/A is an abbreviation for Not Applicable.



### 3. Test Equipment

Conducted Emission Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
EMI Test Receiver	Rohde & Schwarz	ESCI	100321	Jun. 23, 2022	Jun. 22, 2023
RF Switching Unit	Compliance Direction Systems Inc	RSU-A4	34403	Jun. 23, 2022	Jun. 22, 2023
AMN	SCHWARZBECK	NNBL 8226-2	8226-2/164	Jun. 22, 2022	Jun. 21, 2023
LISN	Rohde & Schwarz	ENV216	101131	Jun. 22, 2022	Jun. 21, 2023
Radiation Emission Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102197	Jun. 23, 2022	Jun. 22, 2023
MXA Signal Analyzer	Agilent	N9020A	MY47380425	Sep. 01, 2022	Aug. 31, 2023
EMI Test Receiver	Rohde & Schwarz	ESPI	100010/007	Jun. 23, 2022	Jun. 22, 2023
EMI Test Receiver	Rohde & Schwarz	ESU-8	100472	Feb. 26, 2022	Feb.25, 2023
Bilog Antenna	ETS-LINDGREN	3142E	00117537	Feb. 27, 2022	Feb. 26, 2024
Bilog Antenna	SCHWARZBECK	VULB 9168	1225	Dec. 05, 2021	Dec. 04, 2023
Horn Antenna	ETS-LINDGREN	3117	00143207	Feb. 26, 2022	Feb. 25, 2024
Horn Antenna	SCHWARZBECK	BBHA 9120 D	2463	May 20, 2021	May 19, 2023
Horn Antenna	SCHWARZBECK	BBHA 9170	1118	Feb. 26, 2022	Feb. 25, 2024
Loop Antenna	SCHWARZBECK	FMZB 1519 B	1519B-059	Jun. 26, 2022	Jun.25, 2024
Pre-amplifier	SONOMA	310N	185903	Feb. 26, 2022	Feb. 25, 2023
Pre-amplifier	HP	8449B	3008A00849	Feb. 26, 2022	Feb.25, 2023
HF Amplifier	Tonscend	TAP9E6343	AP21C806117	Sep. 01, 2022	Aug. 31, 2023
HF Amplifier	Tonscend	TAP051845	AP21C806141	Sep. 01, 2022	Aug. 31, 2023
HF Amplifier	Tonscend	TAP0184050	AP21C806129	Sep. 01, 2022	Aug. 31, 2023
Antenna Conducted Emission					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Jun. 23, 2022	Jun. 22, 2023
Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102197	Jun. 23, 2022	Jun. 22, 2023
MXA Signal Analyzer	Agilent	N9020A	MY49100060	Sep. 01, 2022	Aug. 31, 2023
Spectrum Analyzer	KEYSIGT	N9020B	MY60110172	Sep. 01, 2022	Aug. 31, 2023
RF Power Sensor	DARE!! Instruments	RadiPowerRPR3006W	17100015SNO26	Sep. 01, 2022	Aug. 31, 2023
	DARE!! Instruments	RadiPowerRPR3006W	17100015SNO29	Sep. 01, 2022	Aug. 31, 2023



	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO31	Sep. 01, 2022	Aug. 31, 2023
	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO33	Sep. 01, 2022	Aug. 31, 2023
RF Control Unit	Tonsced	JS0806-2	21F8060439	Sep. 01, 2022	Aug. 31, 2023



## 4. Conducted Emission Test

### 4.1 Test Standard and Limit

#### 4.1.1 Test Standard

FCC Part 15.207

#### 4.1.2 Test Limit


**Conducted Emission Test Limit**

Frequency	Maximum RF Line Voltage (dB $\mu$ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Notes:

- (1) \*Decreasing linearly with logarithm of the frequency.
- (2) The lower limit shall apply at the transition frequencies.
- (3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 4.2 Test Setup

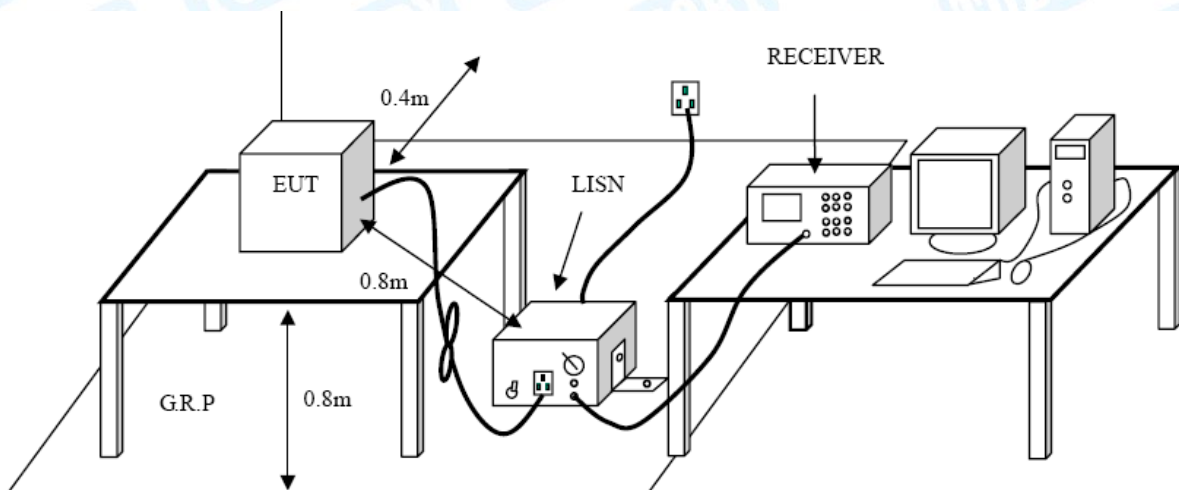

### 4.3 Test Procedure

The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.



Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

LISN is at least 80 cm from nearest part of EUT chassis.

The bandwidth of EMI test receiver is set at 9kHz, and the test frequency band is from 0.15MHz to 30MHz.

#### 4.4 EUT Operating Mode

Please refer to the description of test mode.

#### 4.5 Test Data

Please refer to the Attachment A.



## 5. Radiated Emission Test

### 5.1 Test Standard and Limit

#### 5.1.1 Test Standard

FCC Part 15.209

#### 5.1.2 Test Limit

#### Radiated Emission Limit (9kHz~1000MHz)

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### Radiated Emission Limit (Above 1000MHz)

Frequency (MHz)	(dBuV/m)(at 3 M)	
	Peak	Average
Above 1000	74	54

**Note:**

- (1) The tighter limit applies at the band edges.
- (2) Emission Level(dBuV/m)=20log Emission Level(Uv/m)

#### Limits of radiated emission measurement (15.249)


FCC Part 15 (15.249), Subpart C	
Limit	Frequency Range (MHz)
Field strength of fundamental 50000 $\mu$ V/m (94 dB $\mu$ V/m) @ 3 m	902.1~927.9
Field strength of harmonics 500 $\mu$ V/m (54 dB $\mu$ V/m) @ 3 m	Below 902.1 and Above 927.9



**Restricted bands requirement for equipment operating in 5725MHz to 5875 MHz (15.249)**


Restricted Frequency Band (MHz)	(dBuV/m)(at 3 M)
5725~5875	Attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in 15.209, whichever is the lesser attenuation

**5.2 Test Setup**

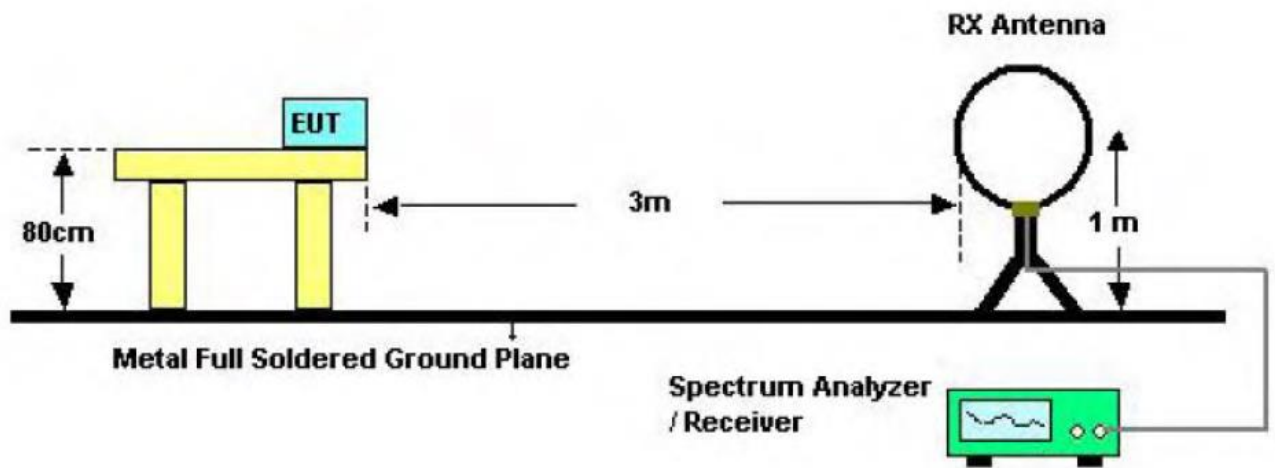


**Bellow 30MHz Test Setup**



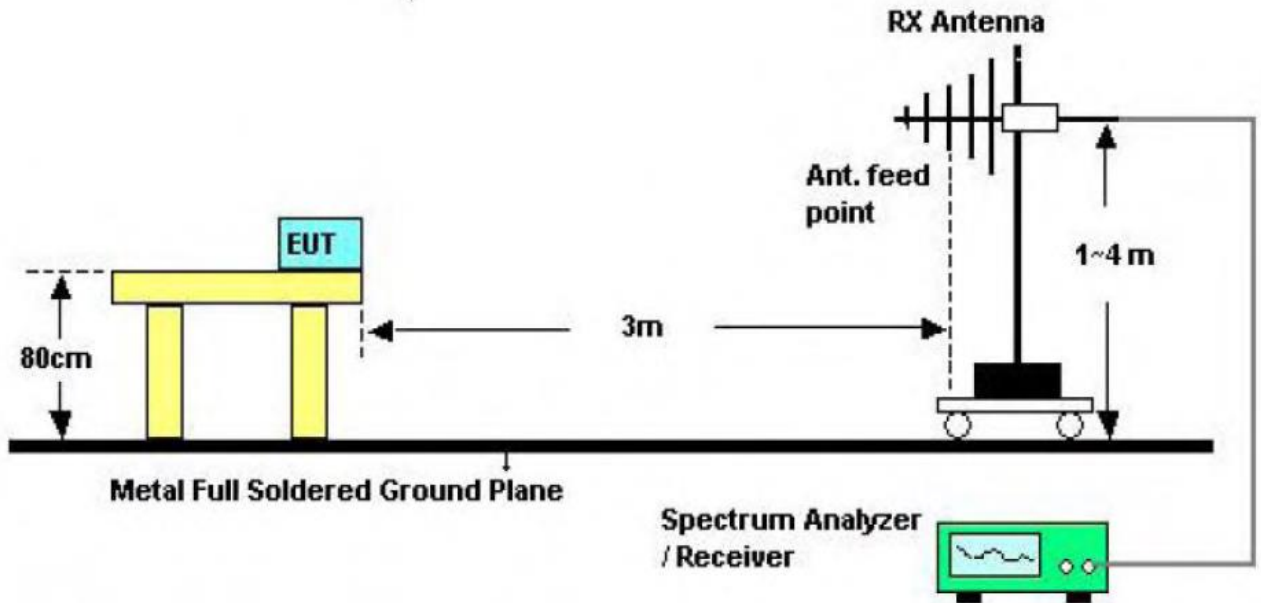

Below 1000MHz Test Setup

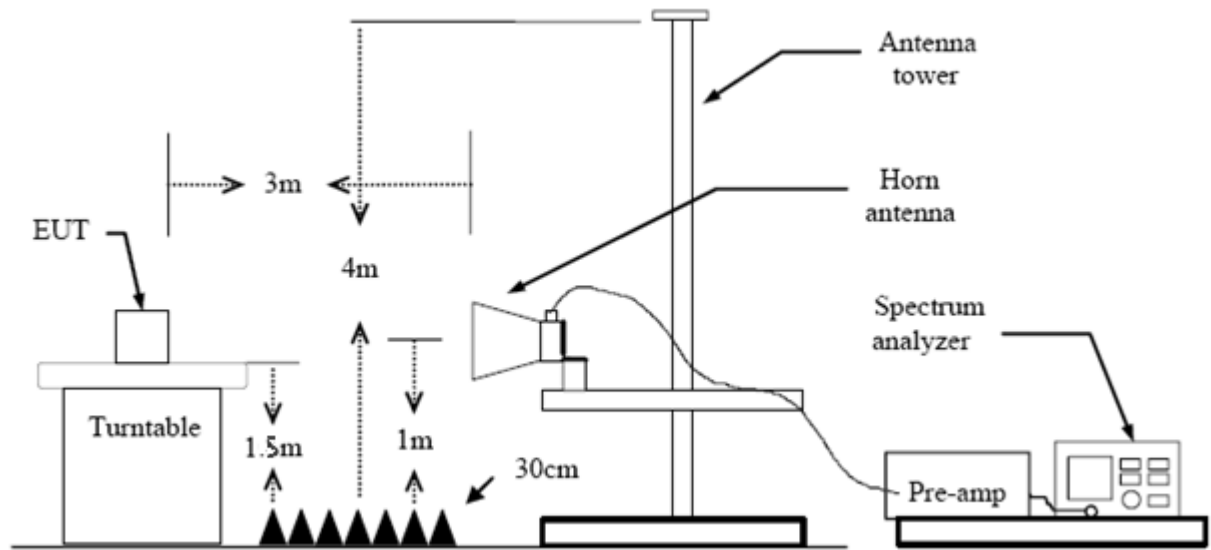

Above 1GHz Test Setup

### 5.3 Test Procedure

- (1) The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1 GHz. The EUT was placed on a rotating 0.8m high above ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- (2) Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to





determine the position of the highest radiation.

- (3) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (4) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- (5) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Bellow 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (6) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (7) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- (8) For the actual test configuration, please see the test setup photo.

#### 5.4 EUT Operating Condition

The EUT was set to Continual Transmitting in maximum power, and new batteries are used during testing.


#### 5.5 Test Data

Please refer to the Attachment B.



## 6. Bandwidth Test

### 6.1 Test Setup

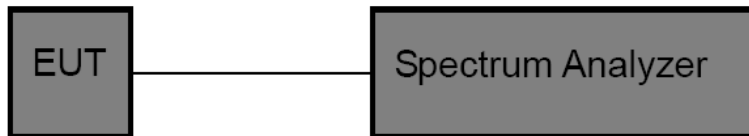

### 6.2 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting:  
Bandwidth: RBW=10 kHz, VBW=30kHz.
- (3) The bandwidth is measured at an amplitude level reduced 20dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst –case (i.e the widest) bandwidth.

### 6.3 EUT Operating Condition

The EUT was set to continuously transmitting for the Bandwidth Test.

### 6.4 Test Data

Please refer to the Attachment C.



## 7. Antenna Requirement

### 7.1 Standard Requirement

#### 7.1.1 Standard

FCC Part 15.203

#### 7.1.2 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 7.2 Antenna Connected Construction

The gains of the antenna used for transmitting is -0.96 dBi, and the antenna de-signed with permanent attachment and no consideration of replacement. Please see the EUT photo for details.

### 7.3 Result


The EUT antenna is a Internal Antenna. It complies with the standard requirement.

Antenna Type
<input checked="" type="checkbox"/> Permanent attached antenna
<input type="checkbox"/> Unique connector antenna
<input type="checkbox"/> Professional installation antenna



## Attachment A-- Conducted Emission Test Data

Temperature:	24.3°C	Relative Humidity:	58%
Test Voltage:	AC 120V/60Hz		
Terminal:	Line		
Test Mode:	Mode 1		
Remark:	Only worse case is reported.		

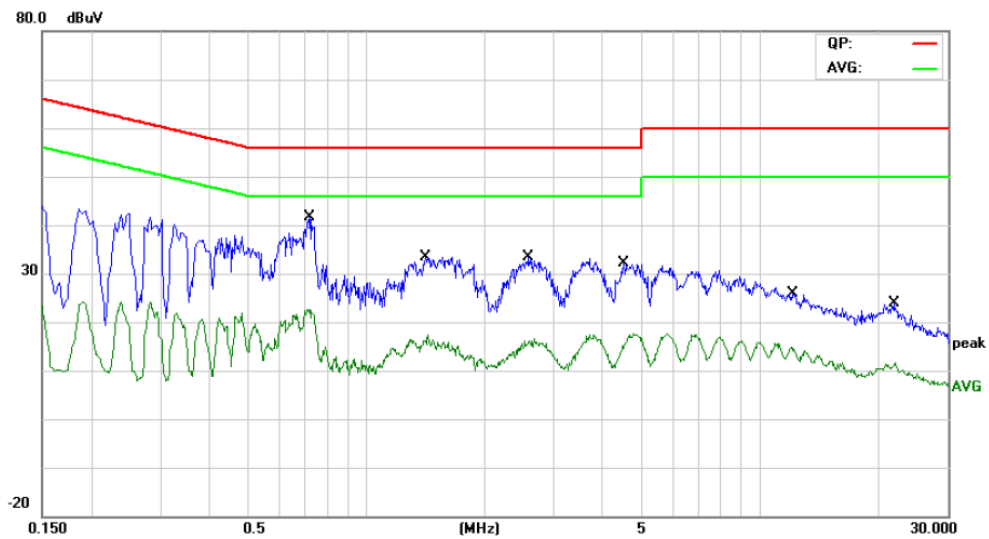

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.7180	24.94	10.87	35.81	56.00	-20.19	QP
2		0.7180	10.61	10.87	21.48	46.00	-24.52	AVG
3		1.4180	16.67	10.61	27.28	56.00	-28.72	QP
4		1.4180	4.36	10.61	14.97	46.00	-31.03	AVG
5		2.5820	16.11	10.32	26.43	56.00	-29.57	QP
6		2.5820	4.14	10.32	14.46	46.00	-31.54	AVG
7		4.5140	14.30	10.05	24.35	56.00	-31.65	QP
8		4.5140	4.02	10.05	14.07	46.00	-31.93	AVG
9		12.0780	9.30	10.21	19.51	60.00	-40.49	QP
10		12.0780	3.27	10.21	13.48	50.00	-36.52	AVG
11		21.8900	5.07	10.77	15.84	60.00	-44.16	QP
12		21.8900	-0.71	10.77	10.06	50.00	-39.94	AVG


**Remark:**

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)

2. Margin (dB) = QuasiPeak/Average (dBuV) - Limit (dBuV)



<b>Temperature:</b>	24.3°C	<b>Relative Humidity:</b>	58%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Terminal:</b>	Neutral		
<b>Test Mode:</b>	Mode 1		
<b>Remark:</b>	Only worse case is reported.		

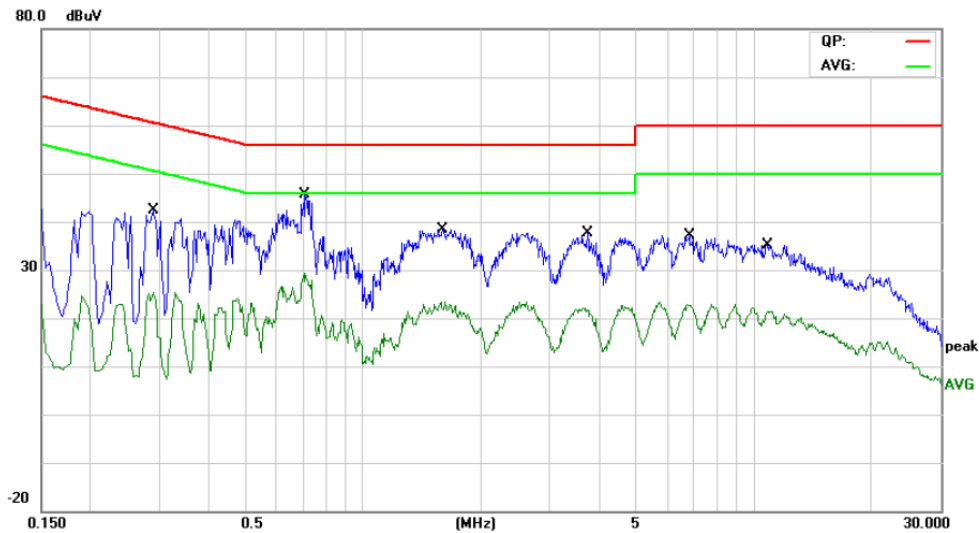

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	0.2900	27.02	10.98	38.00	60.52	-22.52	QP
2	0.2900	12.43	10.98	23.41	50.52	-27.11	AVG
3 *	0.7100	30.29	10.86	41.15	56.00	-14.85	QP
4	0.7100	18.22	10.86	29.08	46.00	-16.92	AVG
5	1.5940	22.03	10.61	32.64	56.00	-23.36	QP
6	1.5940	10.74	10.61	21.35	46.00	-24.65	AVG
7	3.7500	19.92	10.14	30.06	56.00	-25.94	QP
8	3.7500	10.93	10.14	21.07	46.00	-24.93	AVG
9	6.8340	20.05	10.06	30.11	60.00	-29.89	QP
10	6.8340	11.80	10.06	21.86	50.00	-28.14	AVG
11	10.8380	18.46	10.21	28.67	60.00	-31.33	QP
12	10.8380	10.15	10.21	20.36	50.00	-29.64	AVG

**Remark:**


1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = QuasiPeak/Average (dBuV) - Limit (dBuV)



## Attachment B-- Radiated Emission Test Data

### Field Strength of the Fundamental

Temperature:	22.6°C	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 902.1MHz		
Remark:			

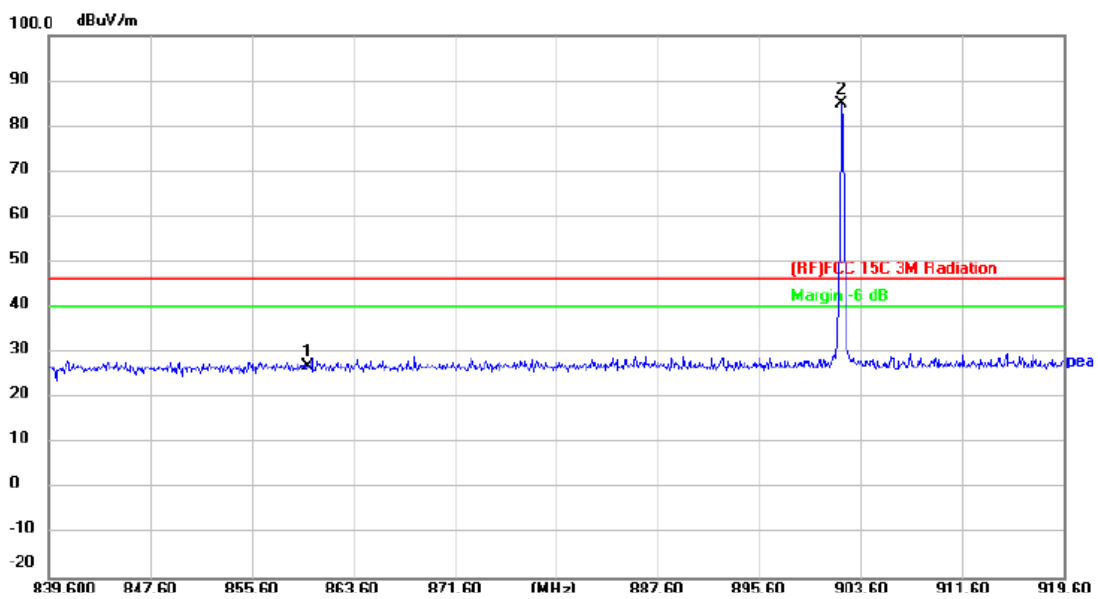


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	860.0000	35.79	-8.96	26.83	46.00	-19.17	peak
2 *	902.0800	93.51	-8.52	84.99	94.00	-9.01	peak

Emission Level= Read Level+ Correct Factor



Temperature:	22.6°C	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 902.1MHz		
Remark:			

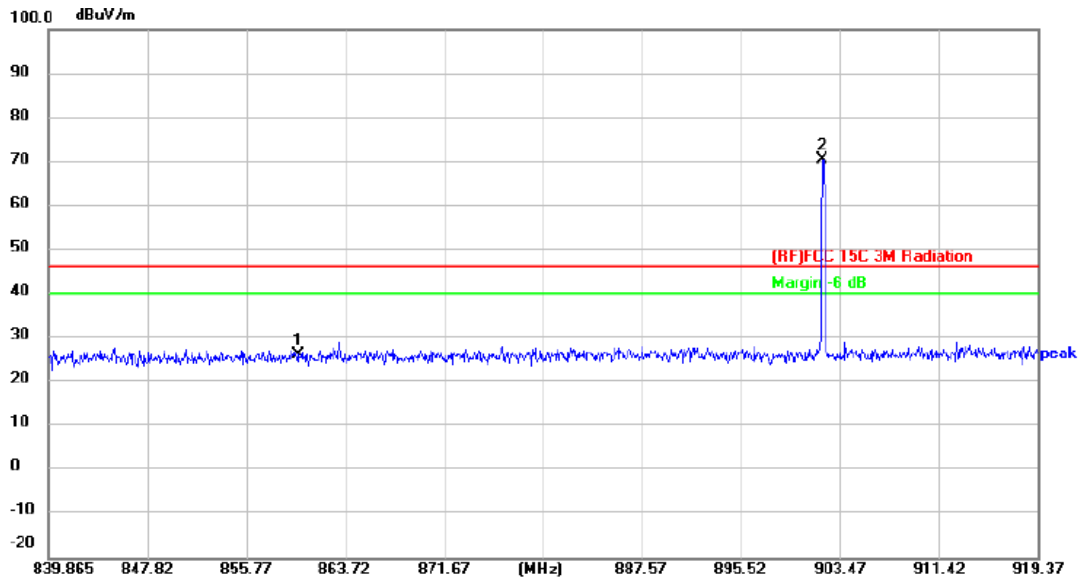


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	860.0000	35.43	-8.96	26.47	46.00	-19.53	peak
2 *	902.0800	78.96	-8.52	70.44	94.00	-23.56	peak

Emission Level= Read Level+ Correct Factor



Temperature:	22.6°C	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 927.9MHz		
Remark:			

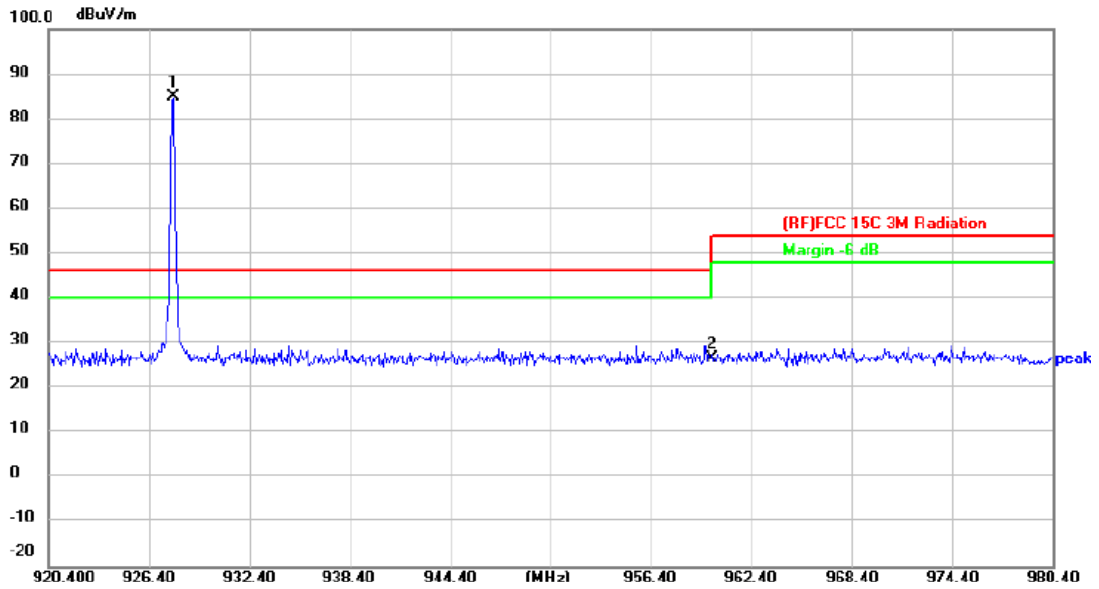


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	927.8400	93.10	-8.14	84.96	94.00	-9.04	peak
2	960.0000	34.67	-7.96	26.71	46.00	-19.29	peak

Emission Level= Read Level+ Correct Factor





Temperature:	22.6°C	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 927.9MHz		
Remark:			

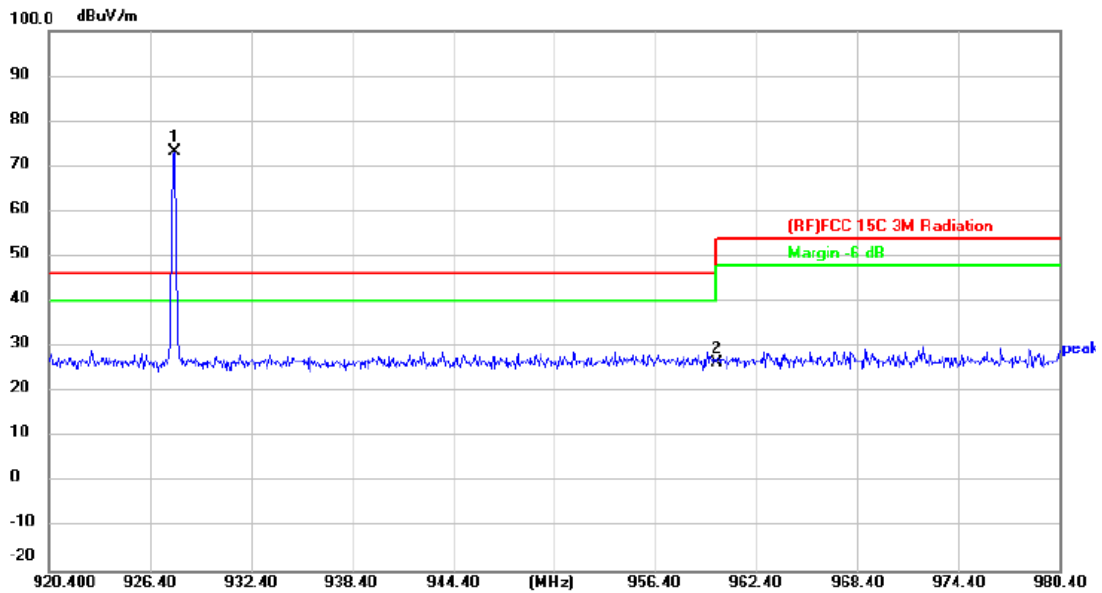

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	927.8400	81.29	-8.14	73.15	94.00	-20.85	peak
2	960.0000	34.46	-7.96	26.50	46.00	-19.50	peak

Emission Level= Read Level+ Correct Factor




**9 KHz to 30 MHz**

From 9 KHz to 30 MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

**30MHz-1GHz**

<b>Temperature:</b>	23.2°C	<b>Relative Humidity:</b>	41%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX Mode		
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.		

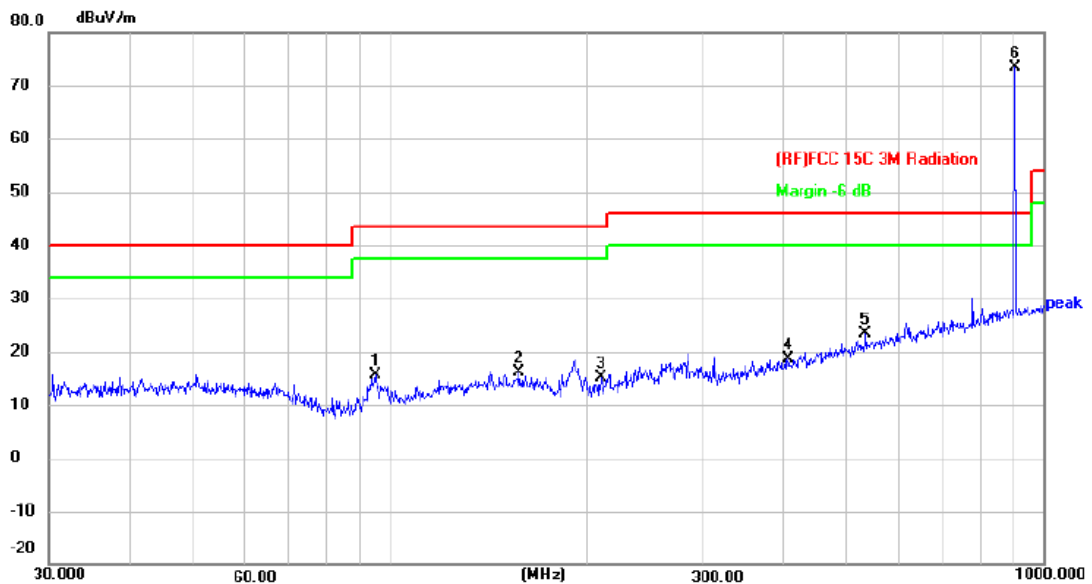


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	95.0930	41.42	-25.82	15.60	43.50	-27.90	peak
2	157.5588	37.70	-21.50	16.20	43.50	-27.30	peak
3	210.0482	38.91	-23.75	15.16	43.50	-28.34	peak
4	406.0880	36.97	-18.30	18.67	46.00	-27.33	peak
5	533.8321	38.08	-14.80	23.28	46.00	-22.72	peak
6 *	903.3094	81.83	-8.50	73.33	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor



Temperature:	23.2°C	Relative Humidity:	41%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX Mode		
Remark:	No report for the emission which more than 20 dB below the prescribed limit.		

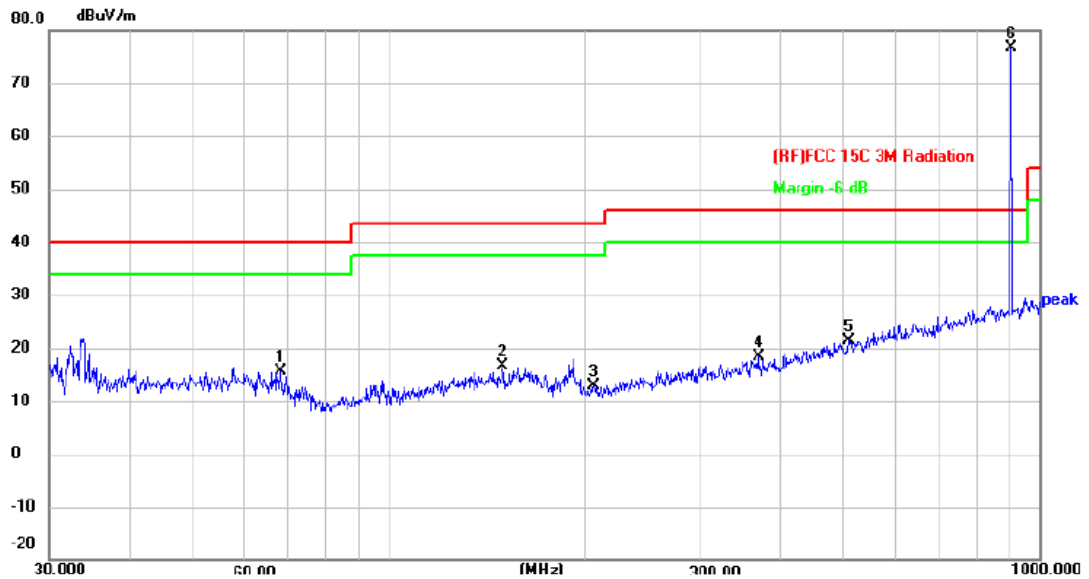


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	68.1514	39.78	-24.16	15.62	40.00	-24.38	peak
2	149.4857	38.27	-21.75	16.52	43.50	-26.98	peak
3	206.3976	36.88	-23.88	13.00	43.50	-30.50	peak
4	369.4047	37.45	-19.16	18.29	46.00	-27.71	peak
5	508.2582	36.84	-15.38	21.46	46.00	-24.54	peak
6 *	903.3094	85.04	-8.50	76.54	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor



### Radiated Spurious Emission (Above 1 GHz)

Temperature:	22.6°C	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 902.1MHz		
Remark:	No report for the emission which more than 20 dB below the prescribed limit.		

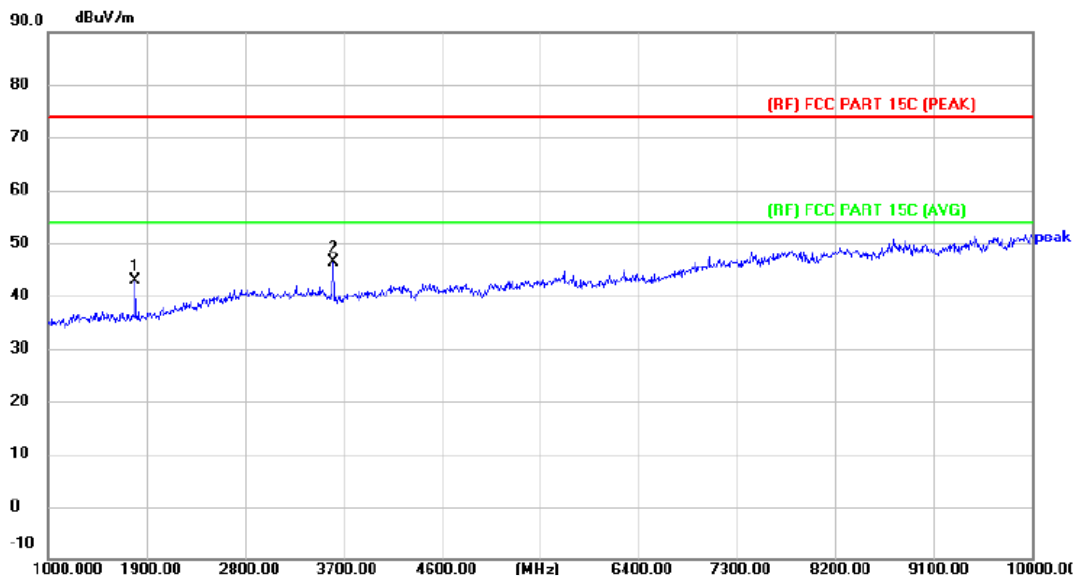


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1801.000	61.04	-18.06	42.98	74.00	-31.02	peak
2 *	3610.000	59.95	-13.46	46.49	74.00	-27.51	peak

Emission Level= Read Level+ Correct Factor



Temperature:	22.6°C	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 902.1MHz		
Remark:	No report for the emission which more than 20 dB below the prescribed limit.		

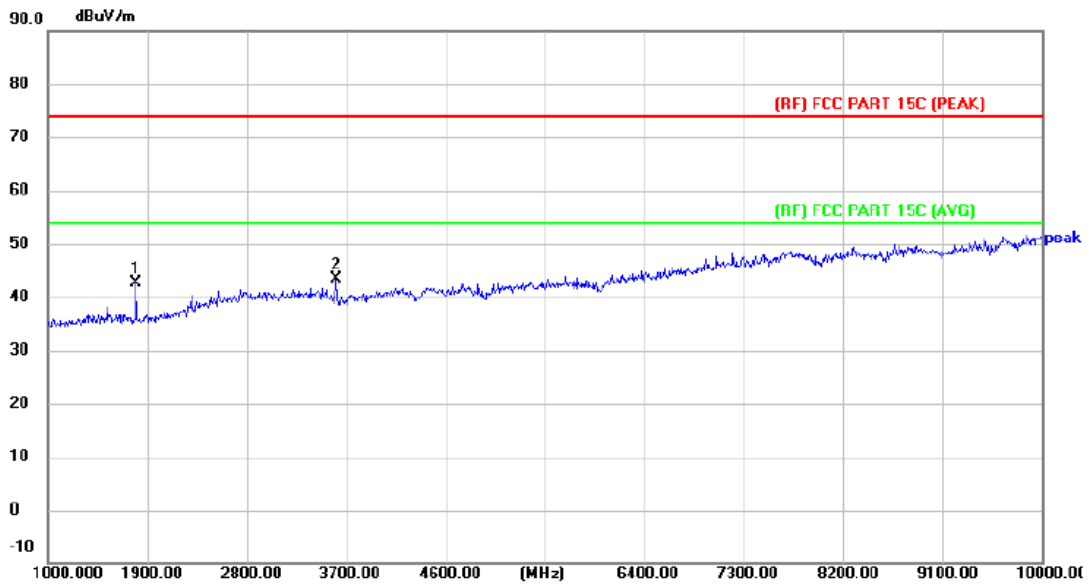


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1801.000	60.71	-18.06	42.65	74.00	-31.35	peak
2 *	3610.000	56.81	-13.46	43.35	74.00	-30.65	peak

Emission Level= Read Level+ Correct Factor



<b>Temperature:</b>	22.6°C	<b>Relative Humidity:</b>	42%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 911.6MHz		
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.		

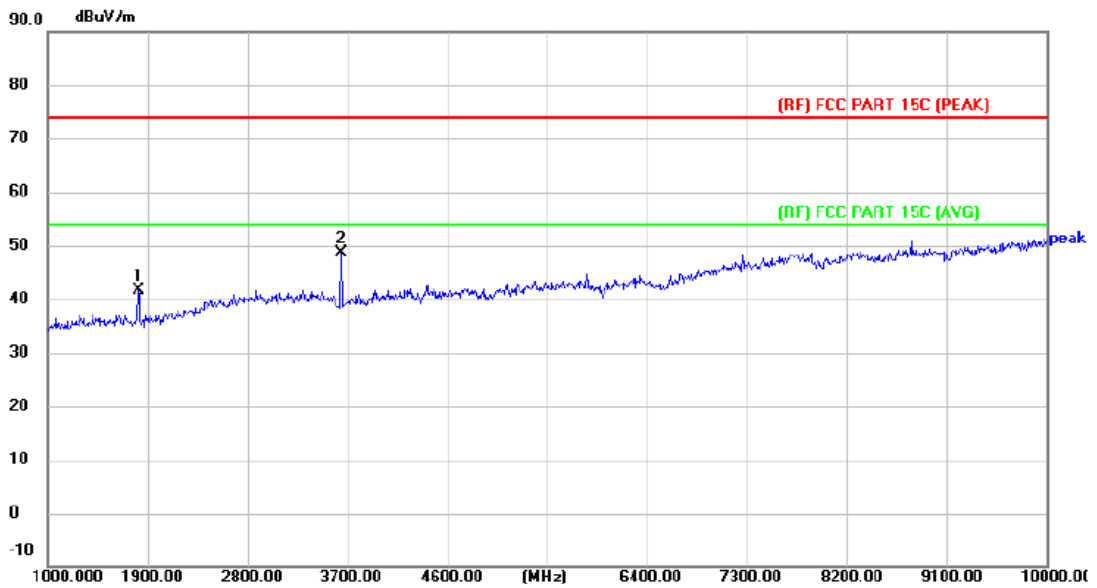


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1819.000	59.54	-17.92	41.62	74.00	-32.38	peak
2 *	3646.000	61.97	-13.38	48.59	74.00	-25.41	peak

Emission Level= Read Level+ Correct Factor



<b>Temperature:</b>	22.6°C	<b>Relative Humidity:</b>	42%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 911.6MHz		
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.		

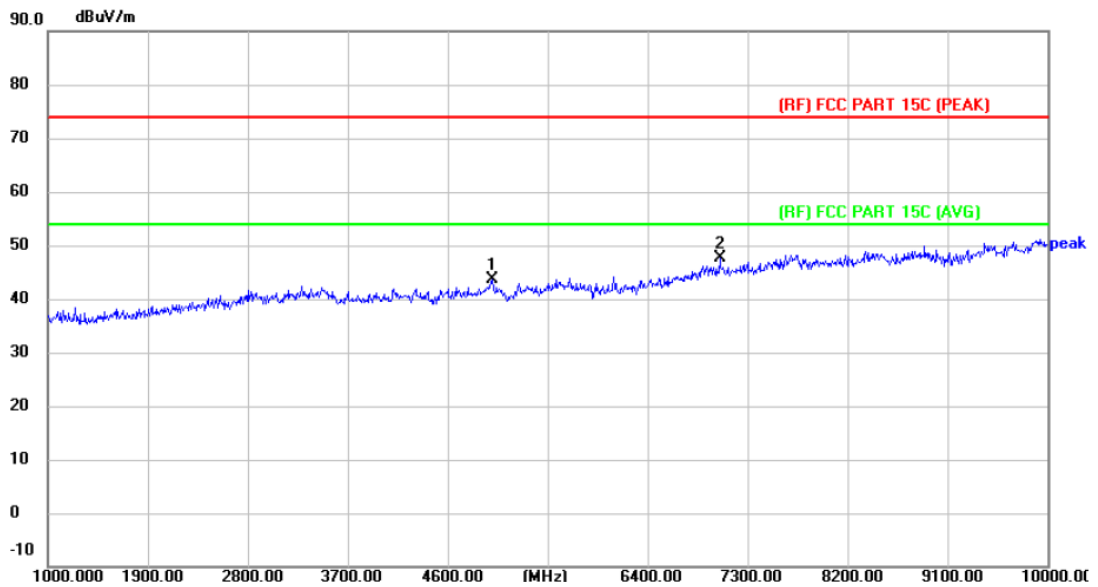


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1819.000	60.85	-17.92	42.93	74.00	-31.07	peak
2 *	3646.000	57.43	-13.38	44.05	74.00	-29.95	peak

Emission Level= Read Level+ Correct Factor



Temperature:	22.6°C	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 927.9MHz		
Remark:	No report for the emission which more than 20 dB below the prescribed limit.		

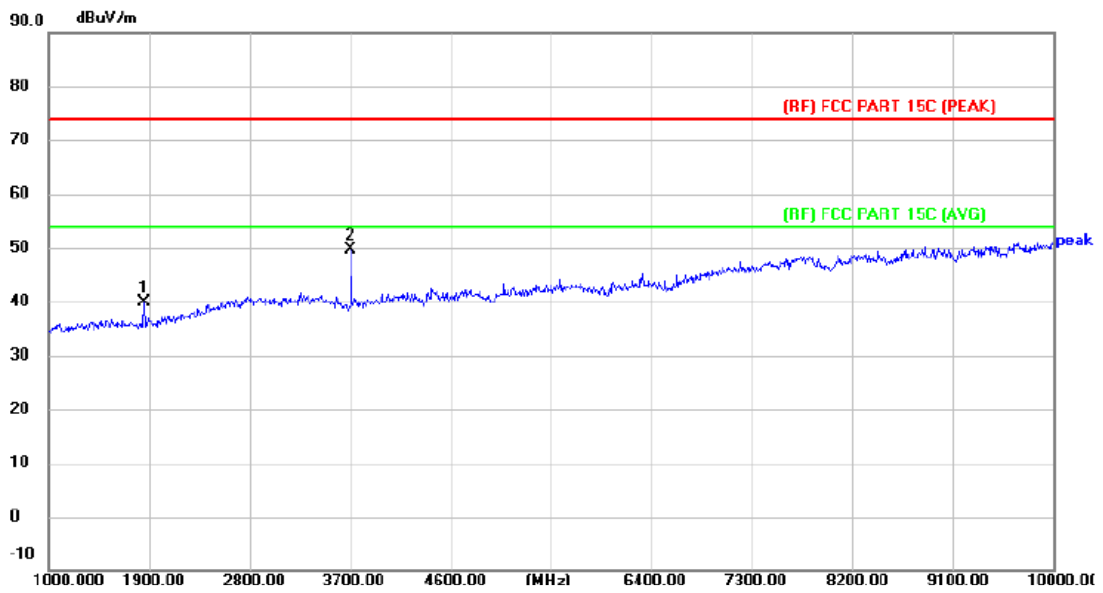


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1855.000	57.44	-17.66	39.78	74.00	-34.22	peak
2 *	3709.000	62.90	-13.22	49.68	74.00	-24.32	peak

Emission Level= Read Level+ Correct Factor





<b>Temperature:</b>	22.6°C	<b>Relative Humidity:</b>	42%
<b>Test Voltage:</b>	AC 120V/60Hz		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 927.9MHz		
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.		

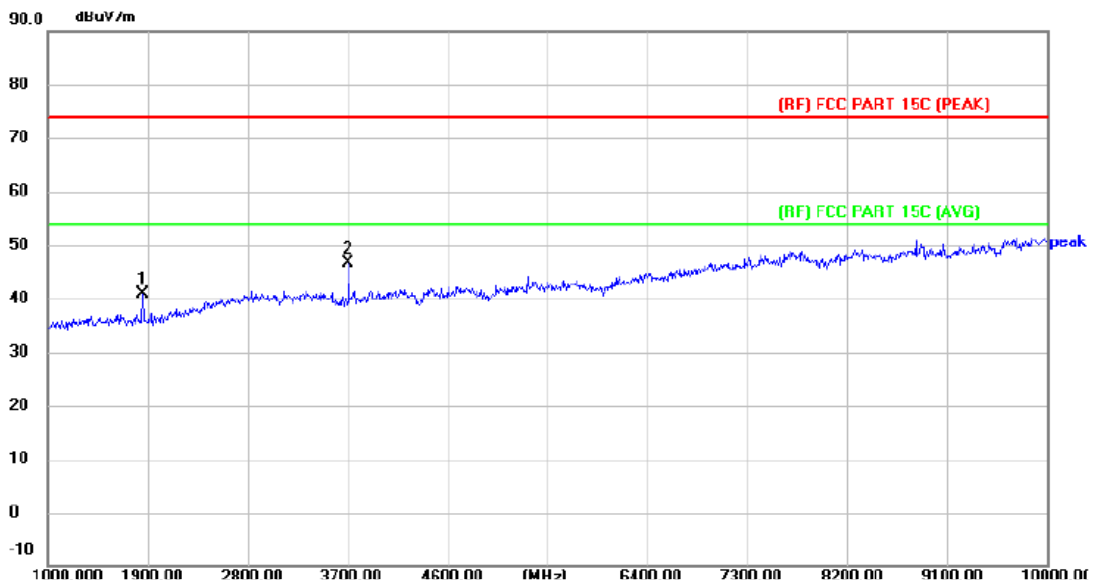



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1855.000	58.47	-17.66	40.81	74.00	-33.19	peak
2 *	3709.000	59.87	-13.22	46.65	74.00	-27.35	peak


Emission Level= Read Level+ Correct Factor



## Attachment C--Bandwidth Data

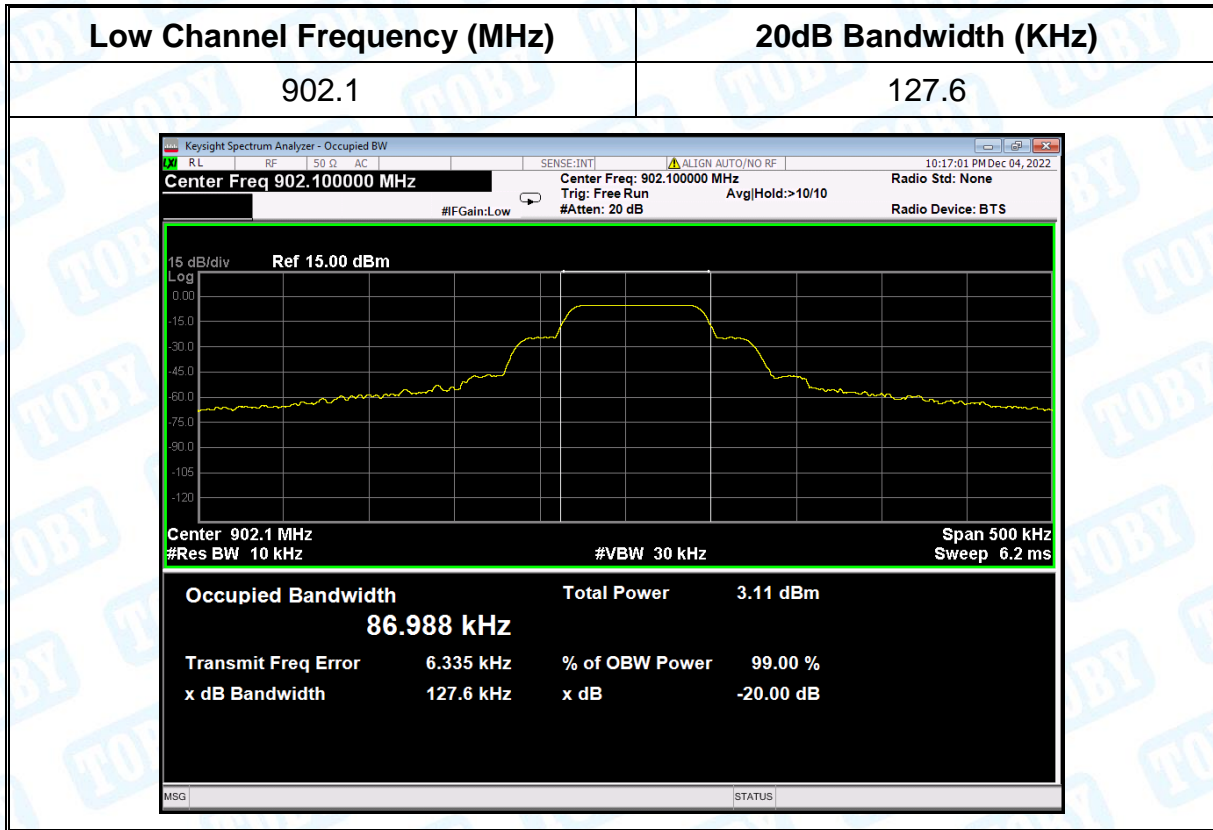

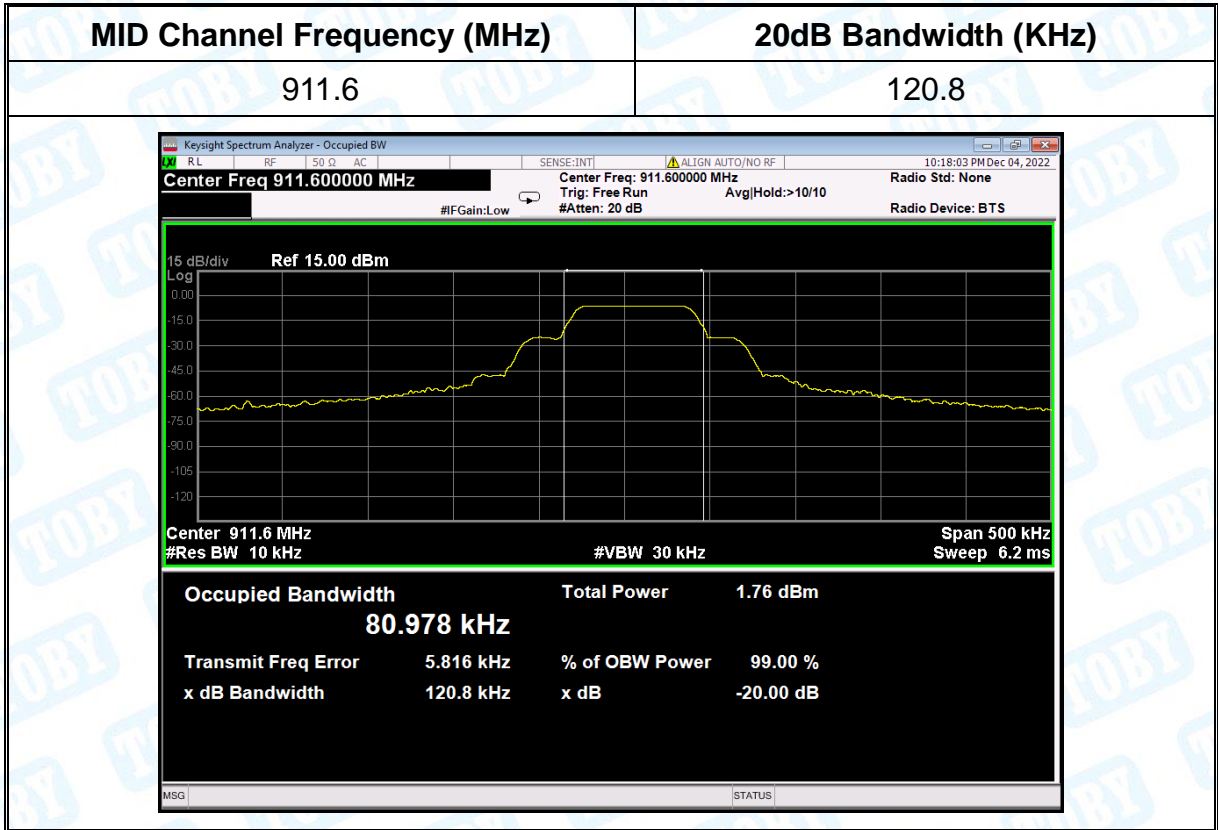

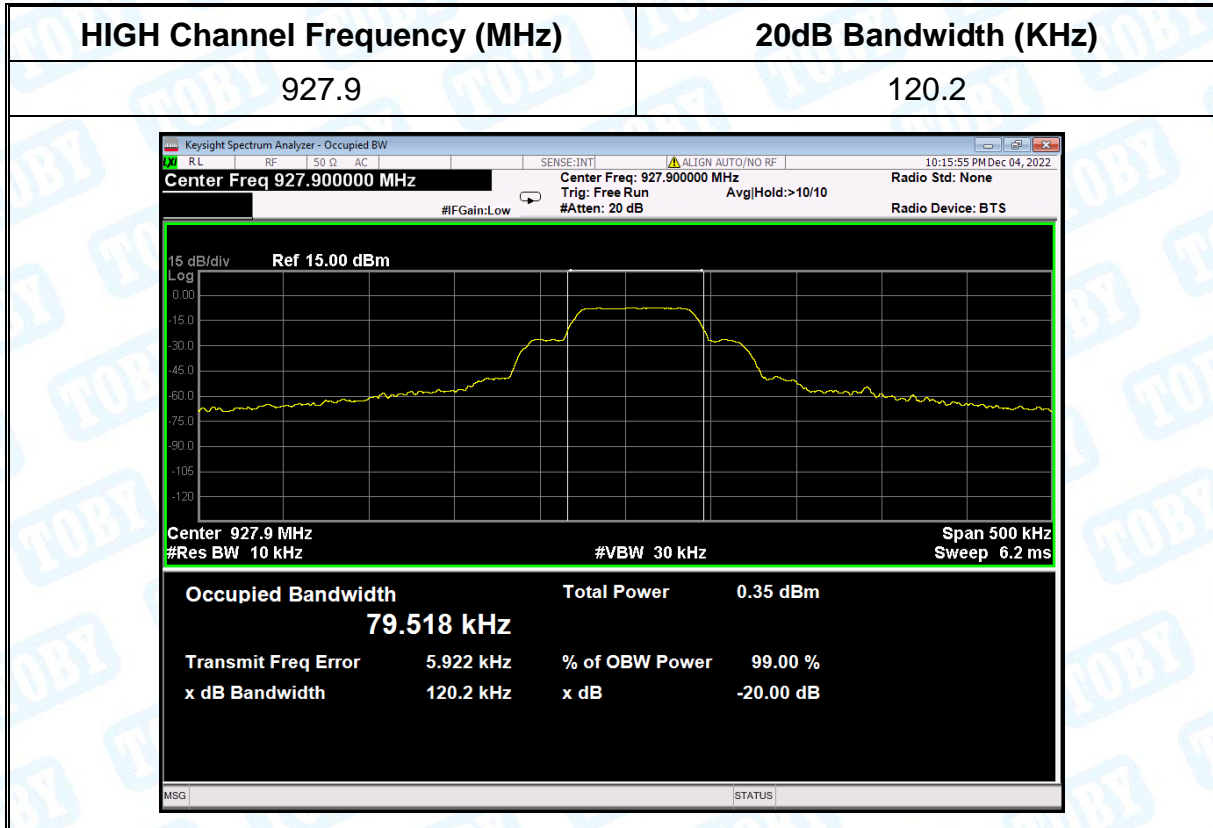

-----End of Report-----

