

Appendix A

RF Test Data for BT(BLE) (Conducted Measurement)


Product Name: Tablet PC
Trade Mark: Brightside
Test Model: BS101
FCC ID: 2AXX5BS101S

Environmental Conditions

Temperature:	23.8℃
Relative Humidity:	51%
ATM Pressure:	100.0 kPa
Test Engineer:	Anna Hu
Supervised by:	Hugo Chen
NOTE	N/A

A.1. 6dB Bandwidth

TestMode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.704	2401.644	2402.348	0.5	PASS
		2440	0.684	2439.652	2440.336	0.5	PASS
		2480	0.696	2479.640	2480.336	0.5	PASS

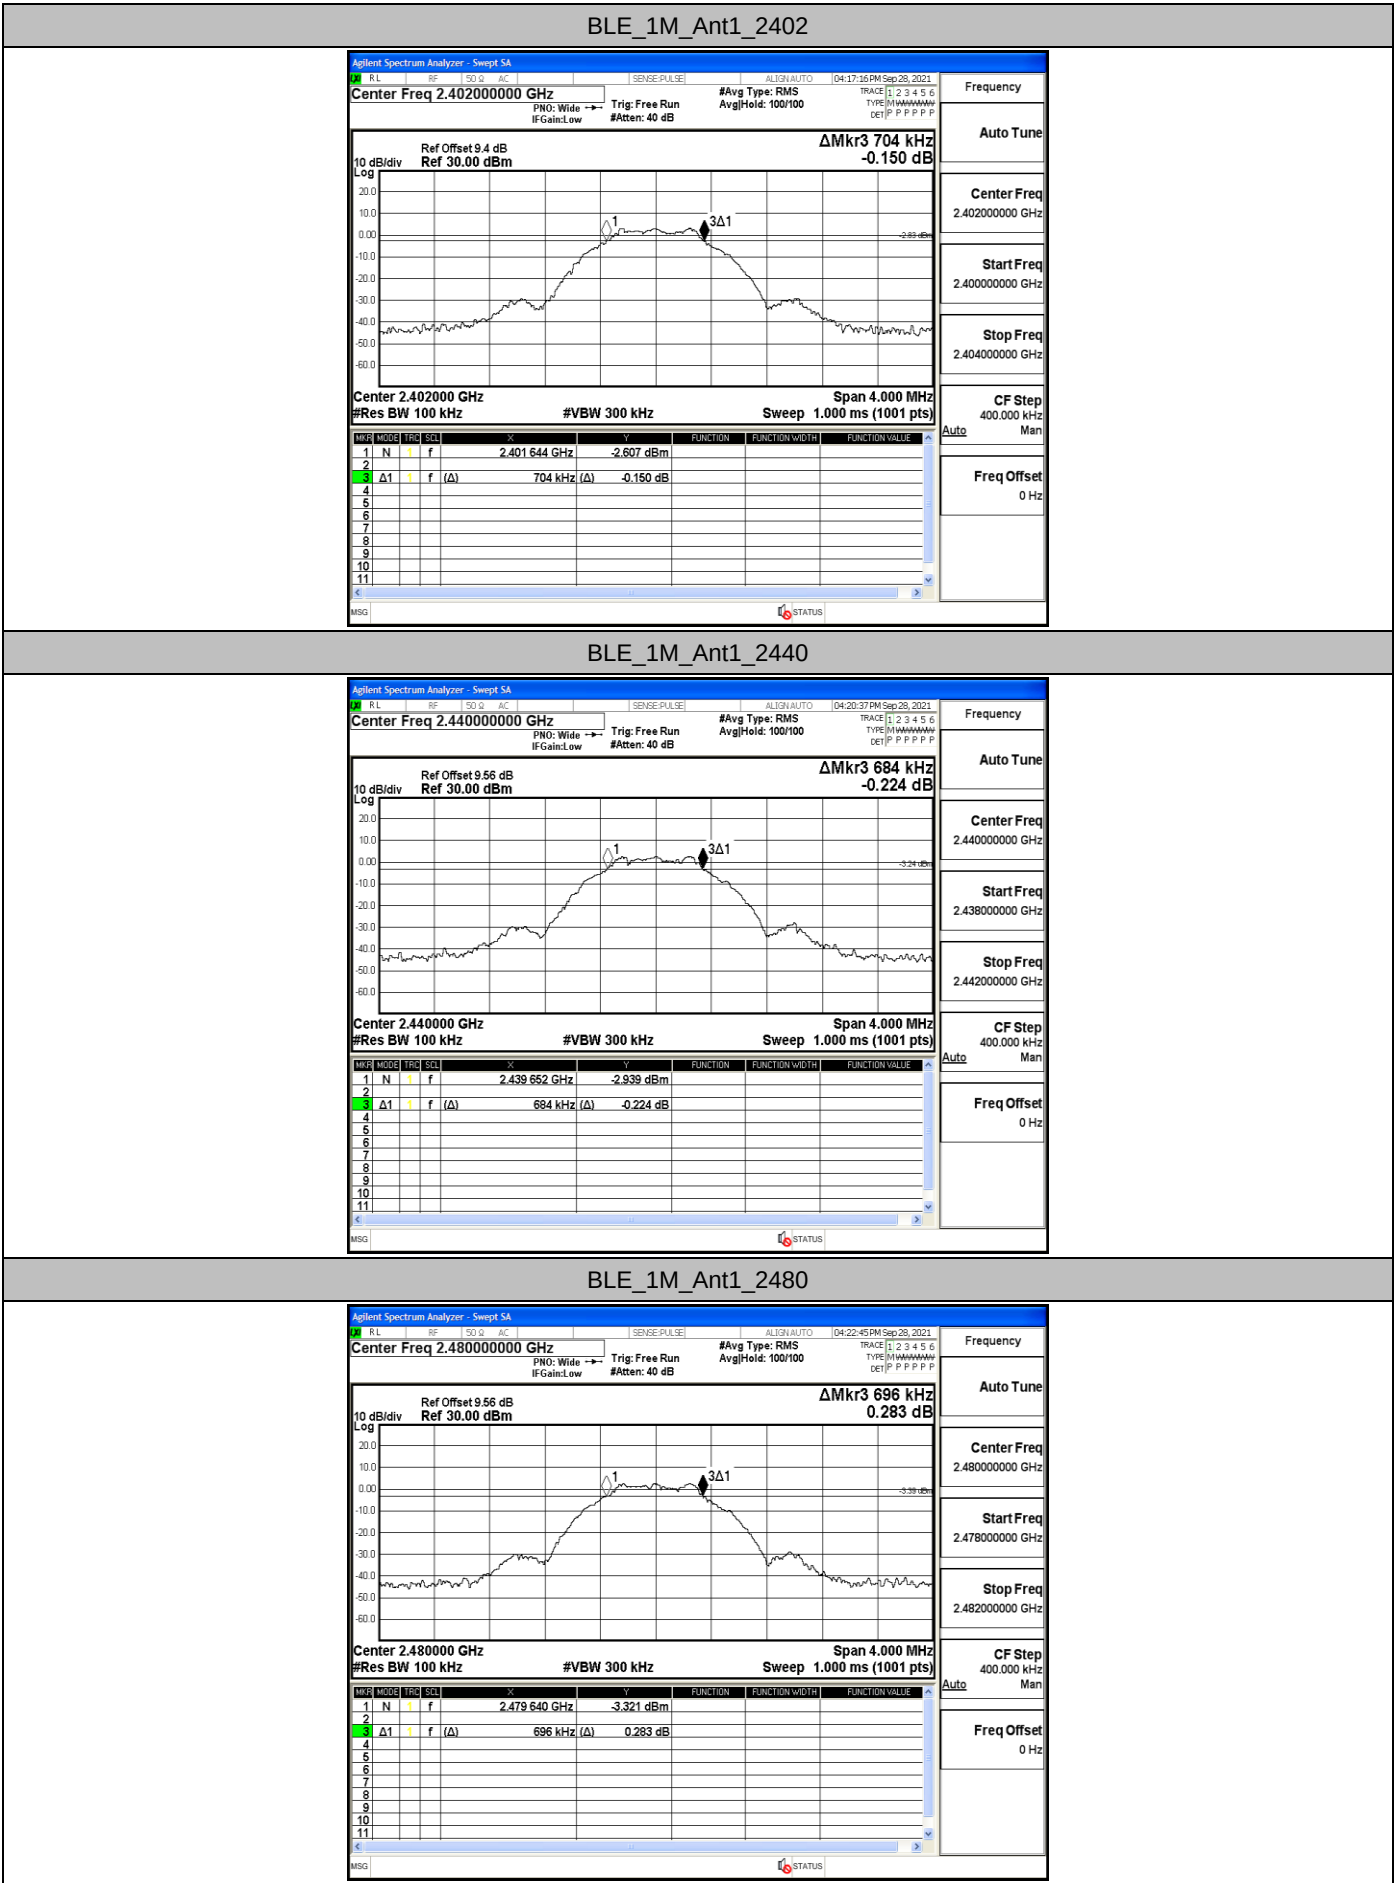


A.2. Occupied Bandwidth

Test Mode	Test Channel	Ant	OBW[MHz]	Limit[MHz]	Verdict
-----------	--------------	-----	----------	------------	---------


A.3. Maximum peak conducted output power

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	4.2	<=30	PASS
		2440	3.85	<=30	PASS
		2480	3.67	<=30	PASS

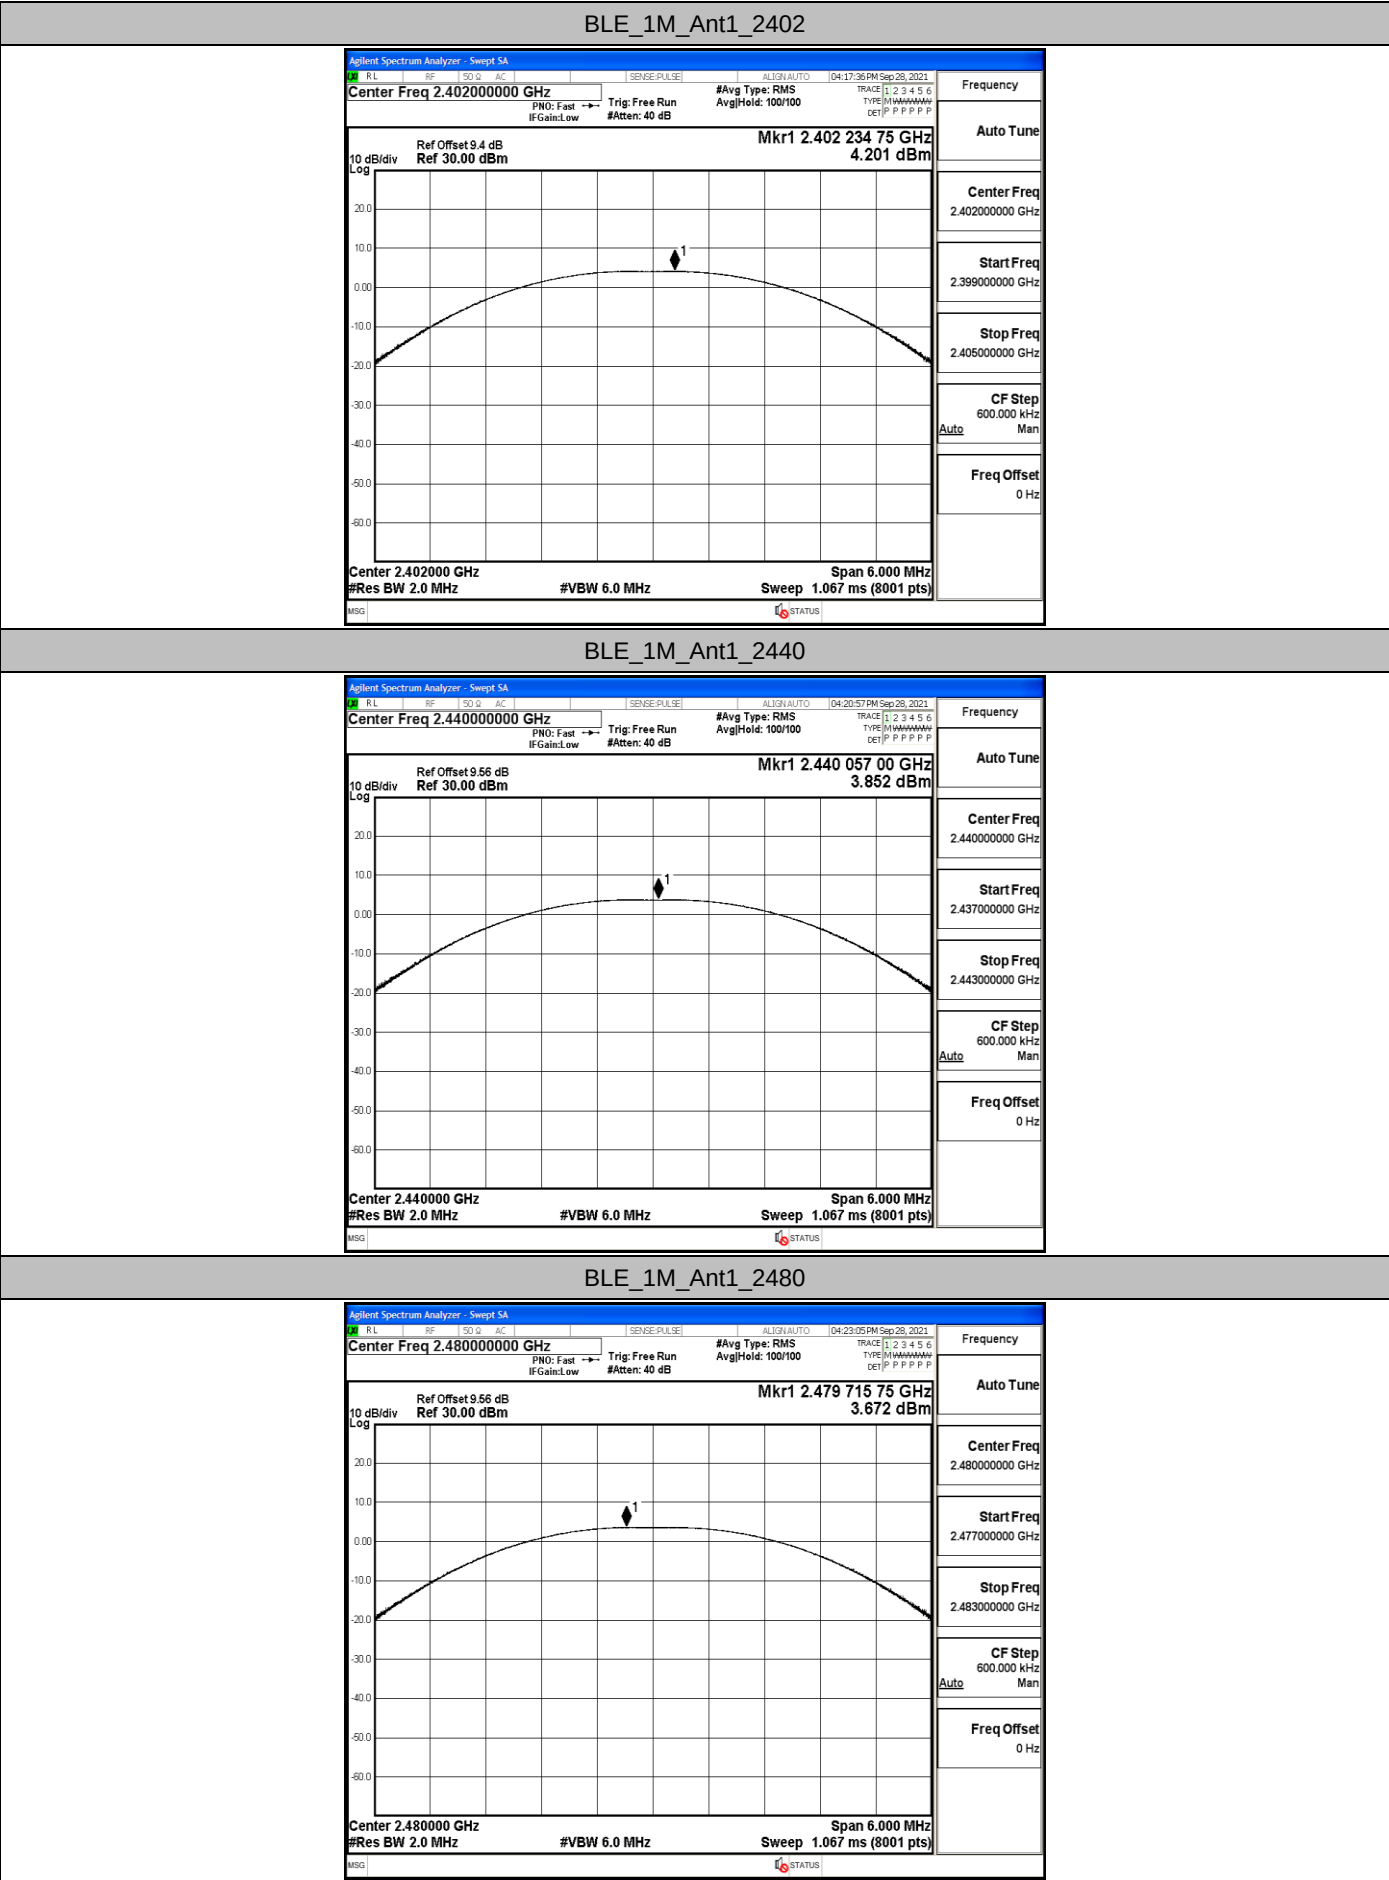


A.4. Maximum Peak power spectral density

TestMode	Antenna	Channel	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-11.55	<=8	PASS
		2440	-11.41	<=8	PASS
		2480	-11.76	<=8	PASS

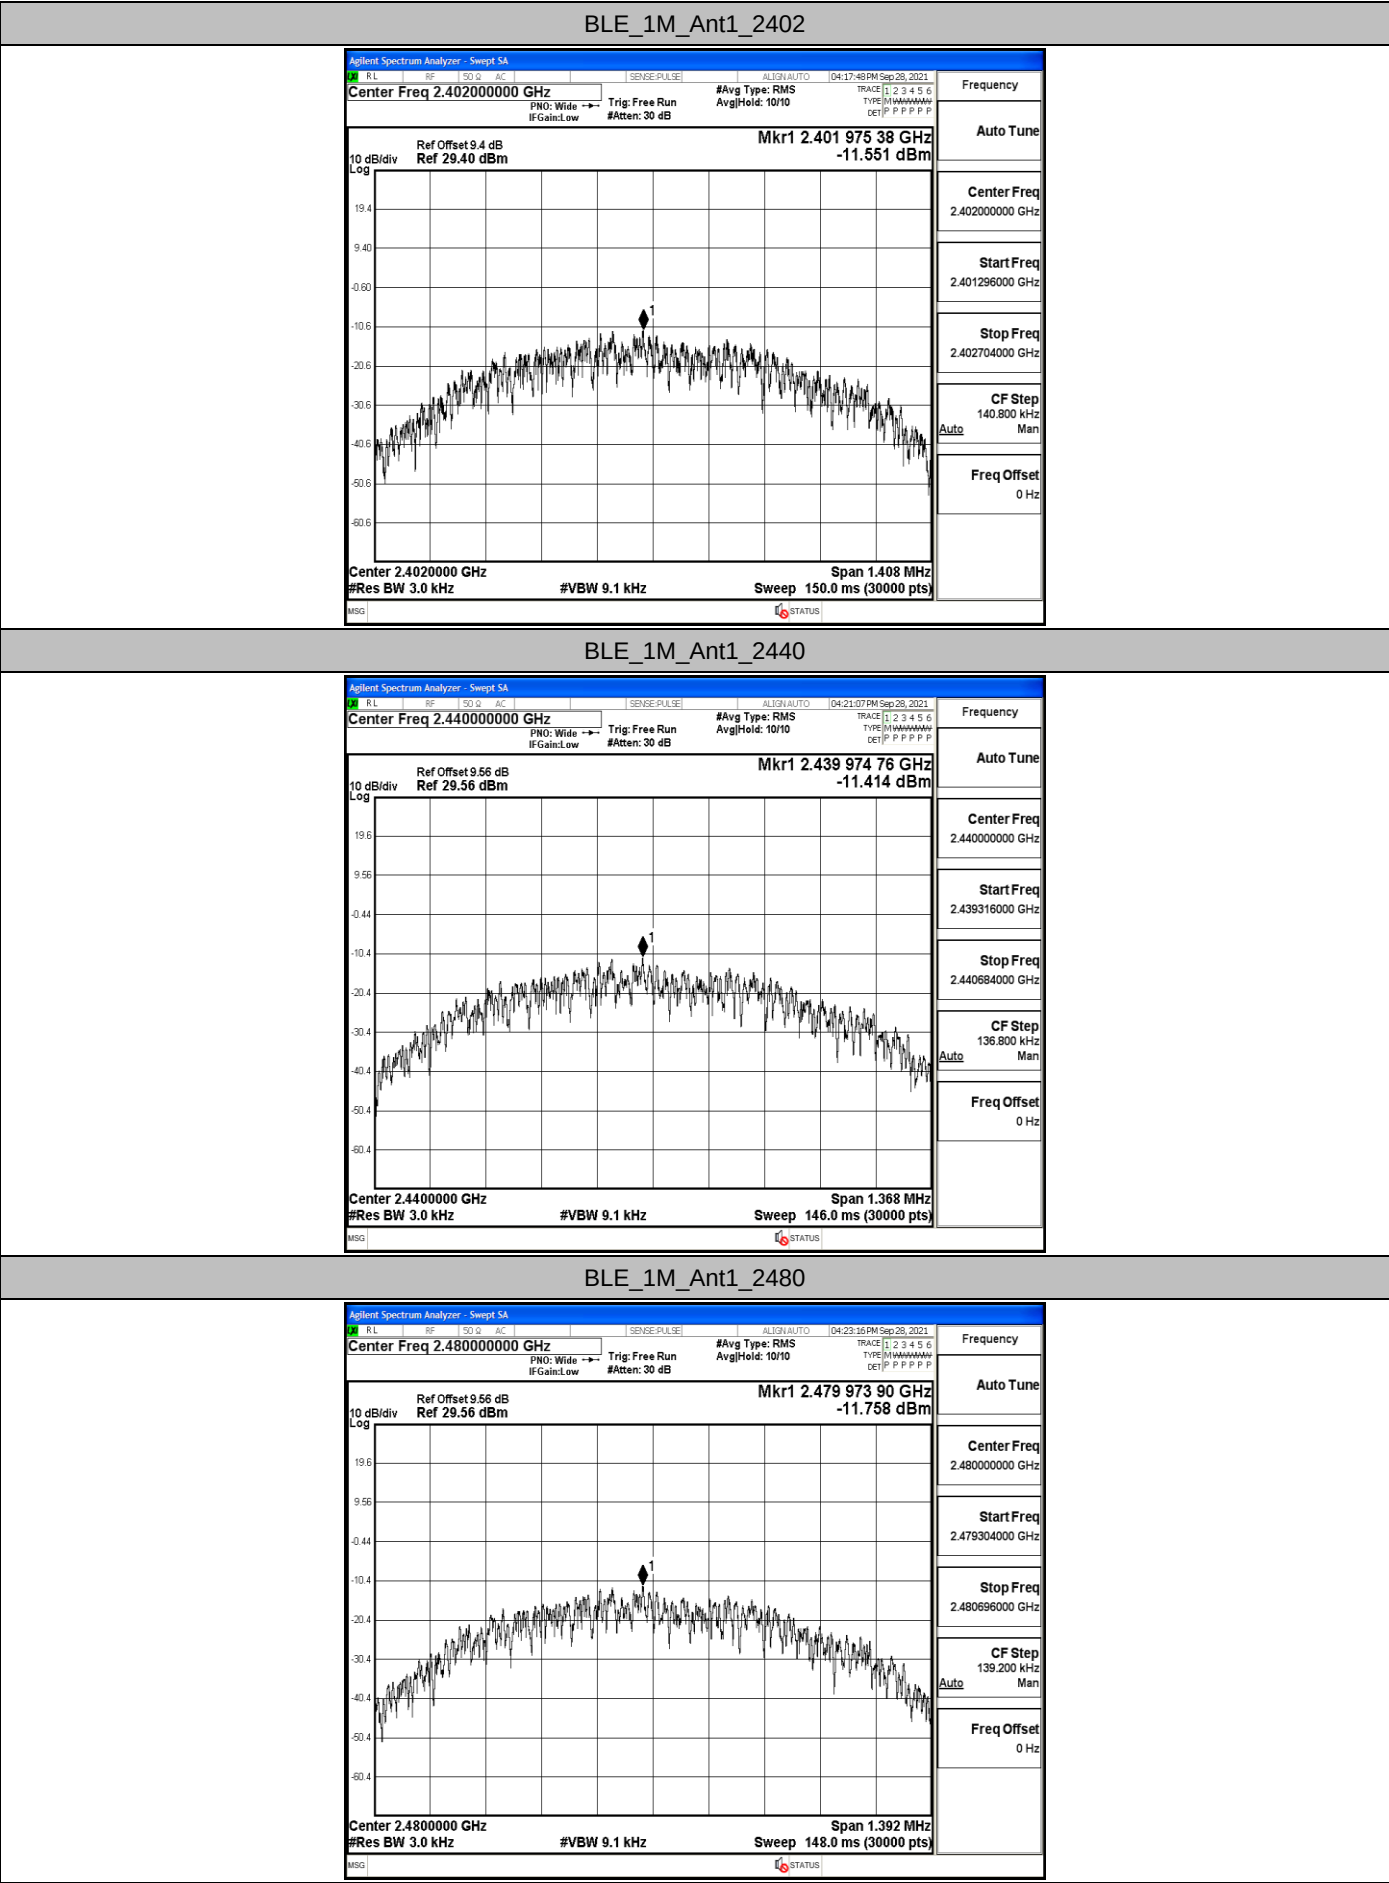



A.5. Band-edge for RF Conducted Emissions

TestMode	Antenna	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	Low	2402	3.41	-50.09	≤-16.59	PASS
		High	2480	2.92	-48.11	≤-17.08	PASS

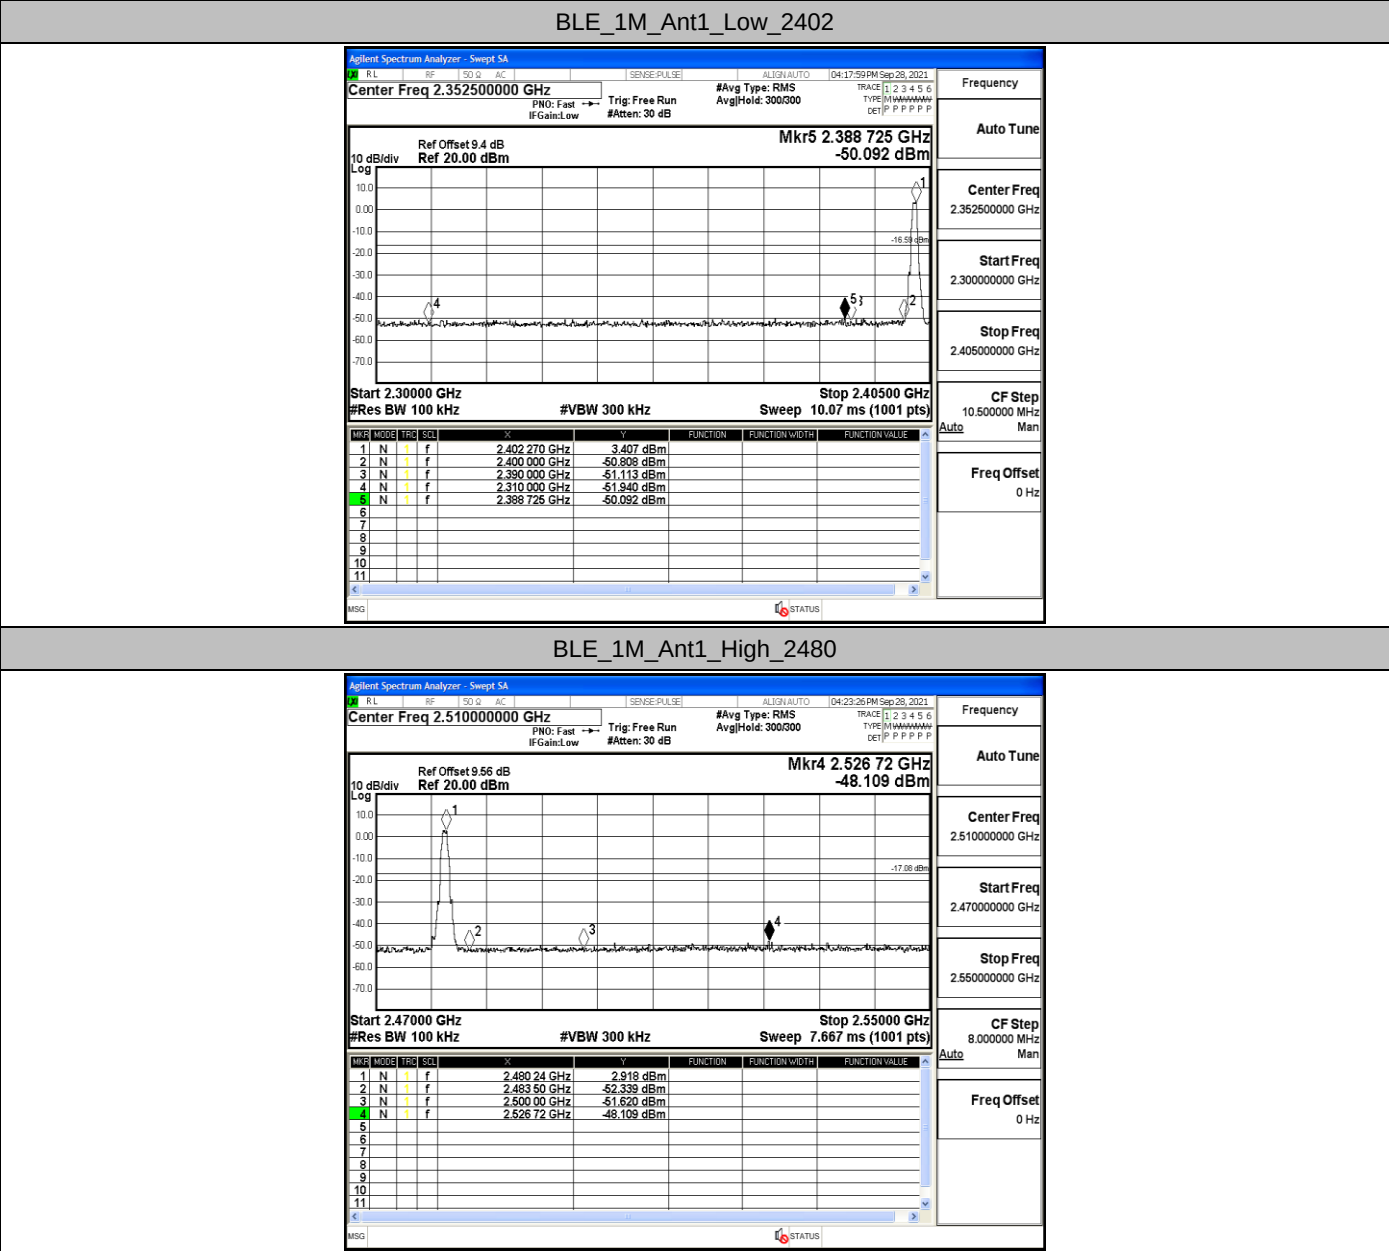


A.6. RF Conducted Spurious Emissions

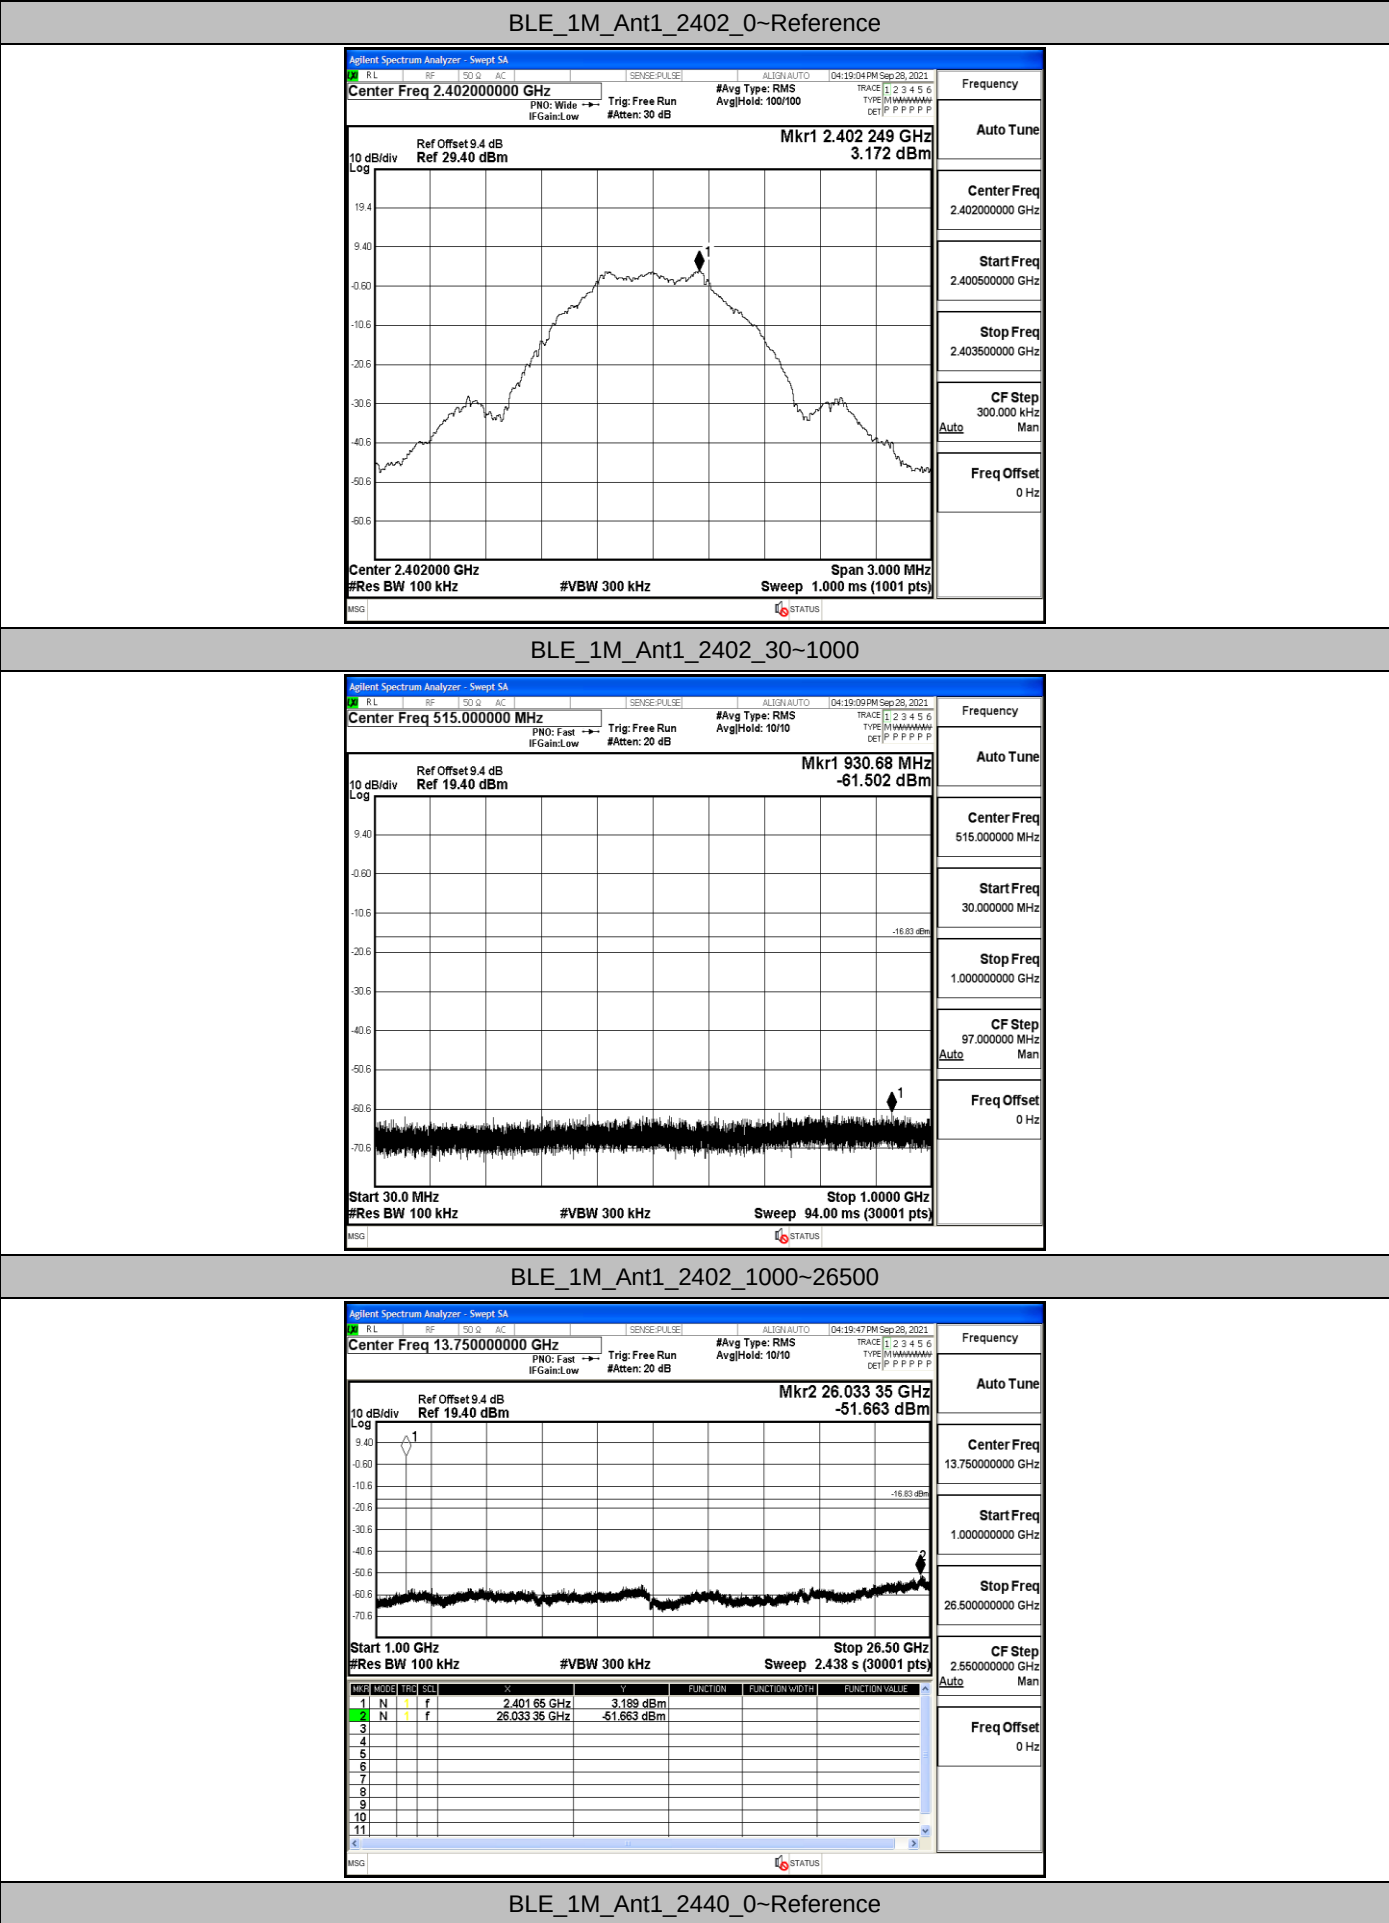


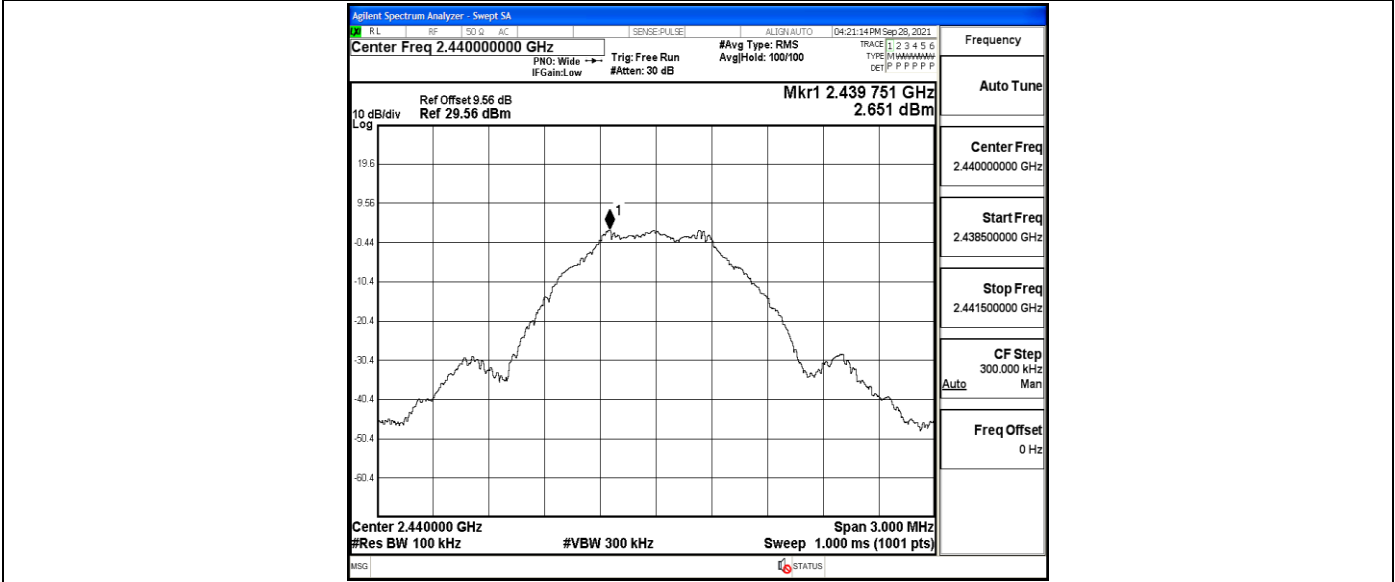


BLE_1M_Ant1_2440_30~1000

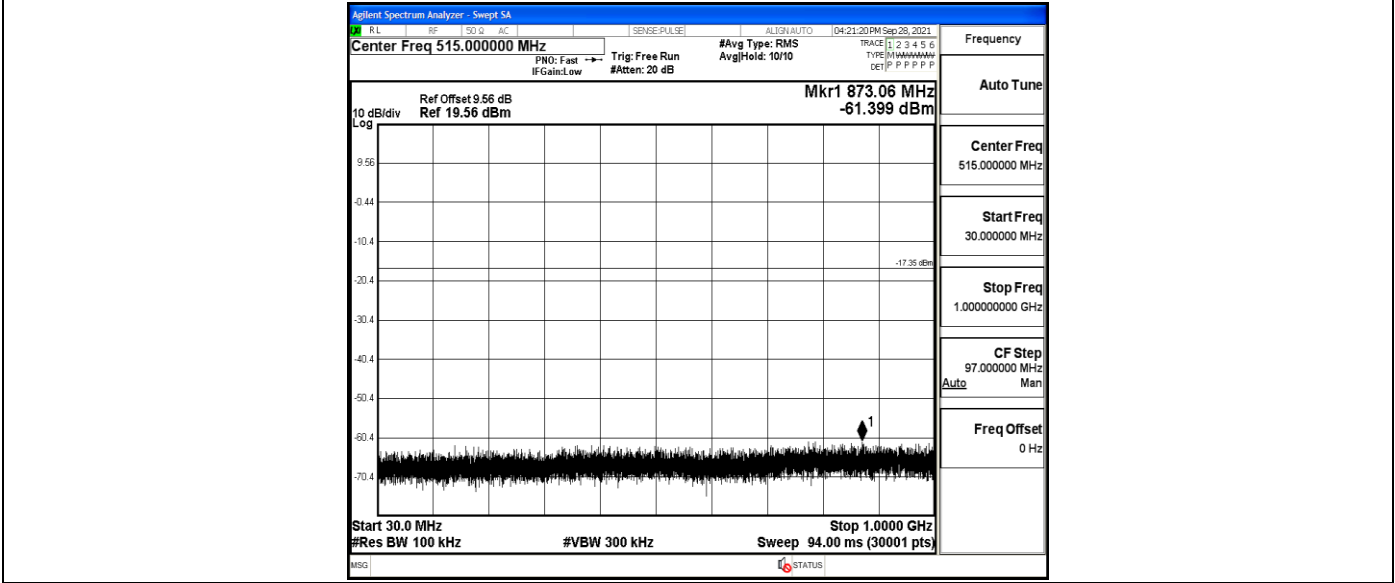


BLE_1M_Ant1_2440_1000~26500

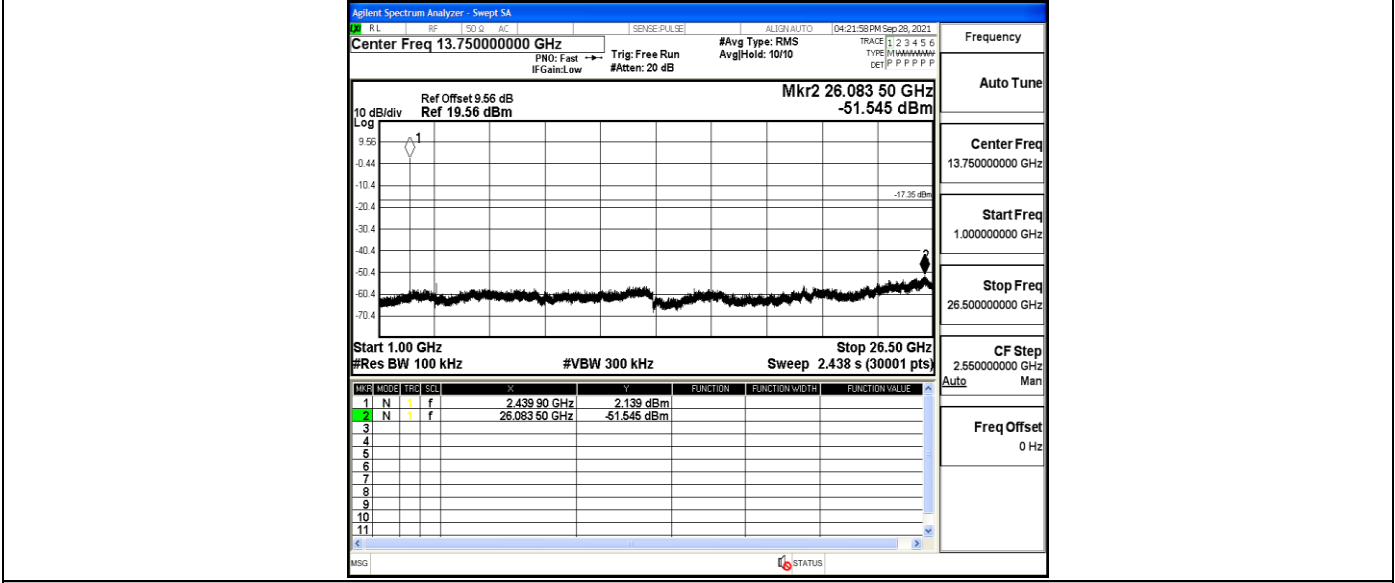


BLE_1M_Ant1_2480_0~Reference

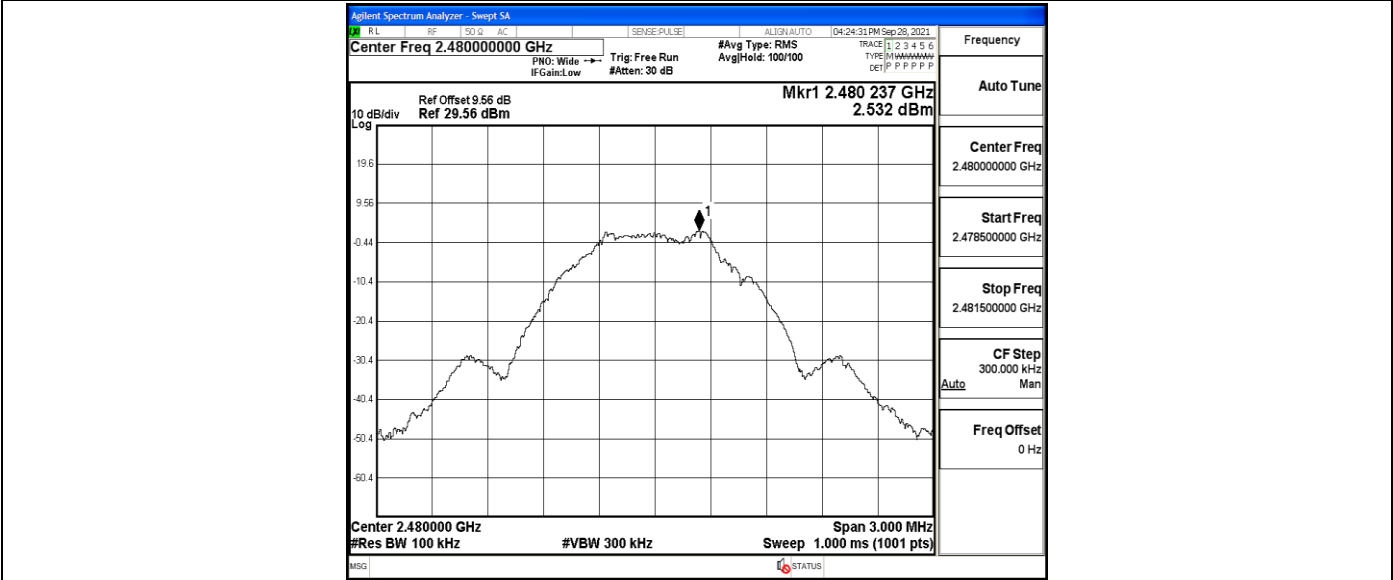

BLE_1M_Ant1_2480_30~1000

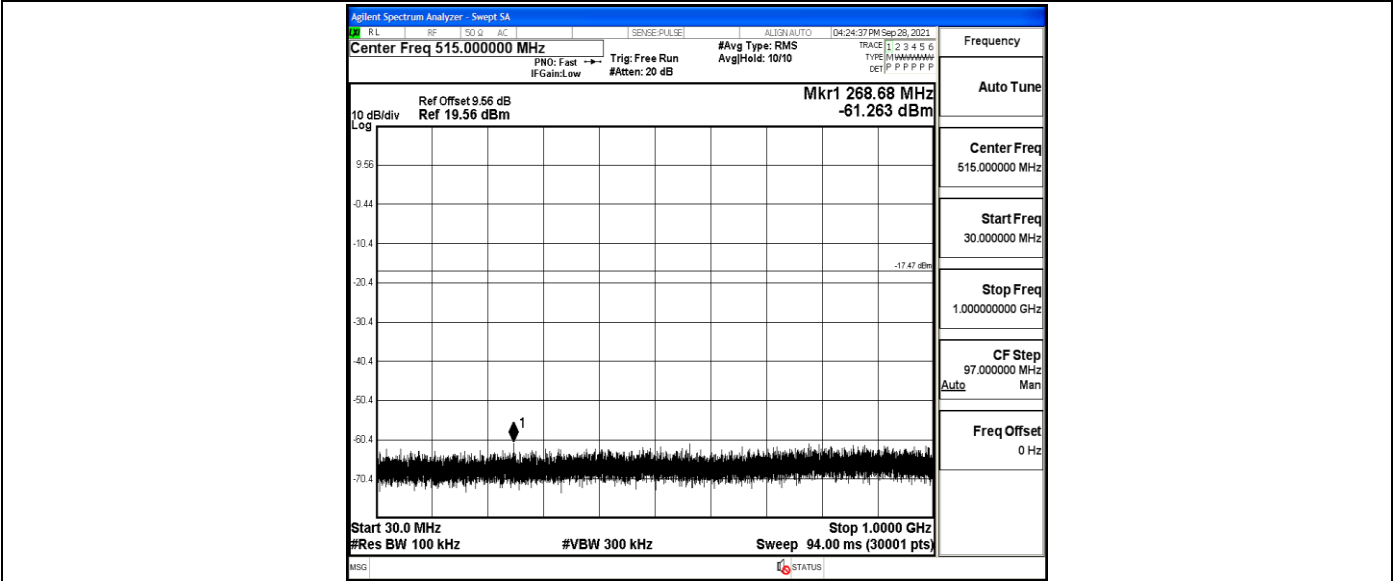

BLE_1M_Ant1_2480_1000~26500

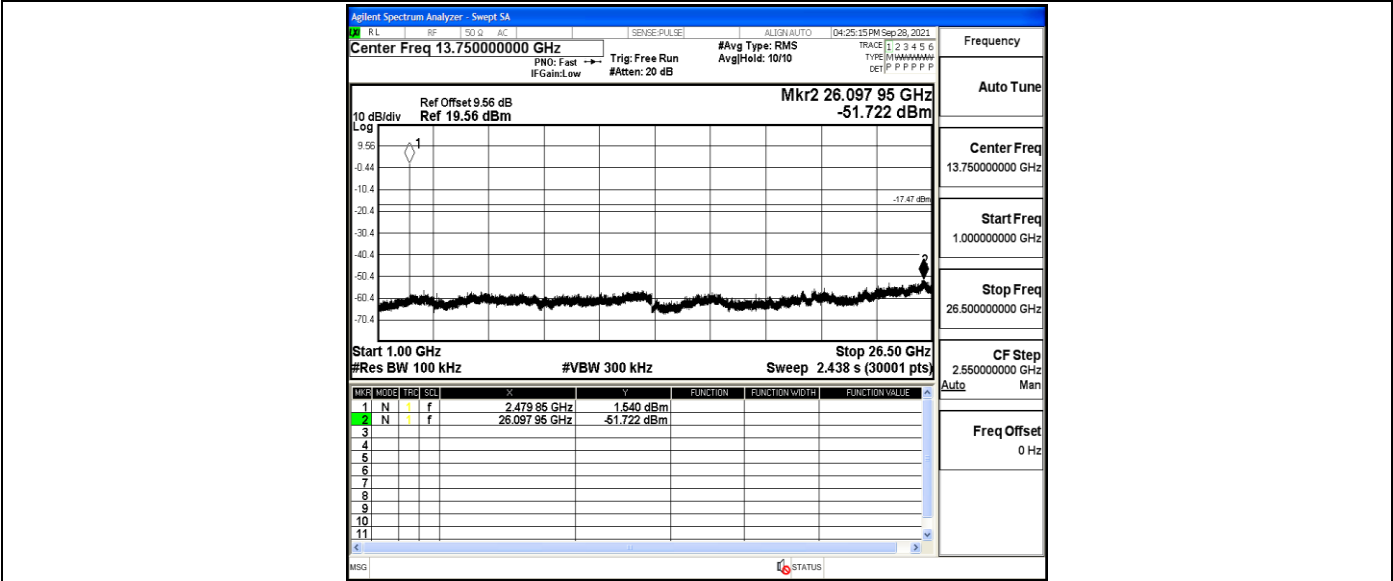



A.7. Restrict-band band-edge measurements

TestMode	Antenna	ChName	Channel	Detector	Freq. [MHz]	Result [dBm]	Limit [dBm]	Verdict
BLE_1M	Ant1	Low	2402	AV	2310.000	-48.52	<=-41.20	PASS
				AV	2373.815	-47.7	<=-41.20	PASS
				AV	2390.000	-48.26	<=-41.20	PASS
				Peak	2310.000	-41.58	<=-21.20	PASS
				Peak	2360.900	-38.43	<=-21.20	PASS
				Peak	2390.000	-41.7	<=-21.20	PASS
		High	2480	AV	2483.500	-46.77	<=-41.20	PASS
				AV	2483.520	-46.76	<=-41.20	PASS
				AV	2500.000	-47.25	<=-41.20	PASS
				Peak	2483.500	-41.19	<=-21.20	PASS
				Peak	2490.240	-38.14	<=-21.20	PASS
				Peak	2500.000	-41.29	<=-21.20	PASS

Note

1. The Antenna Gain is compensated in the graph with 2dBi and Antenna Gain which is Higher.
2. The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.

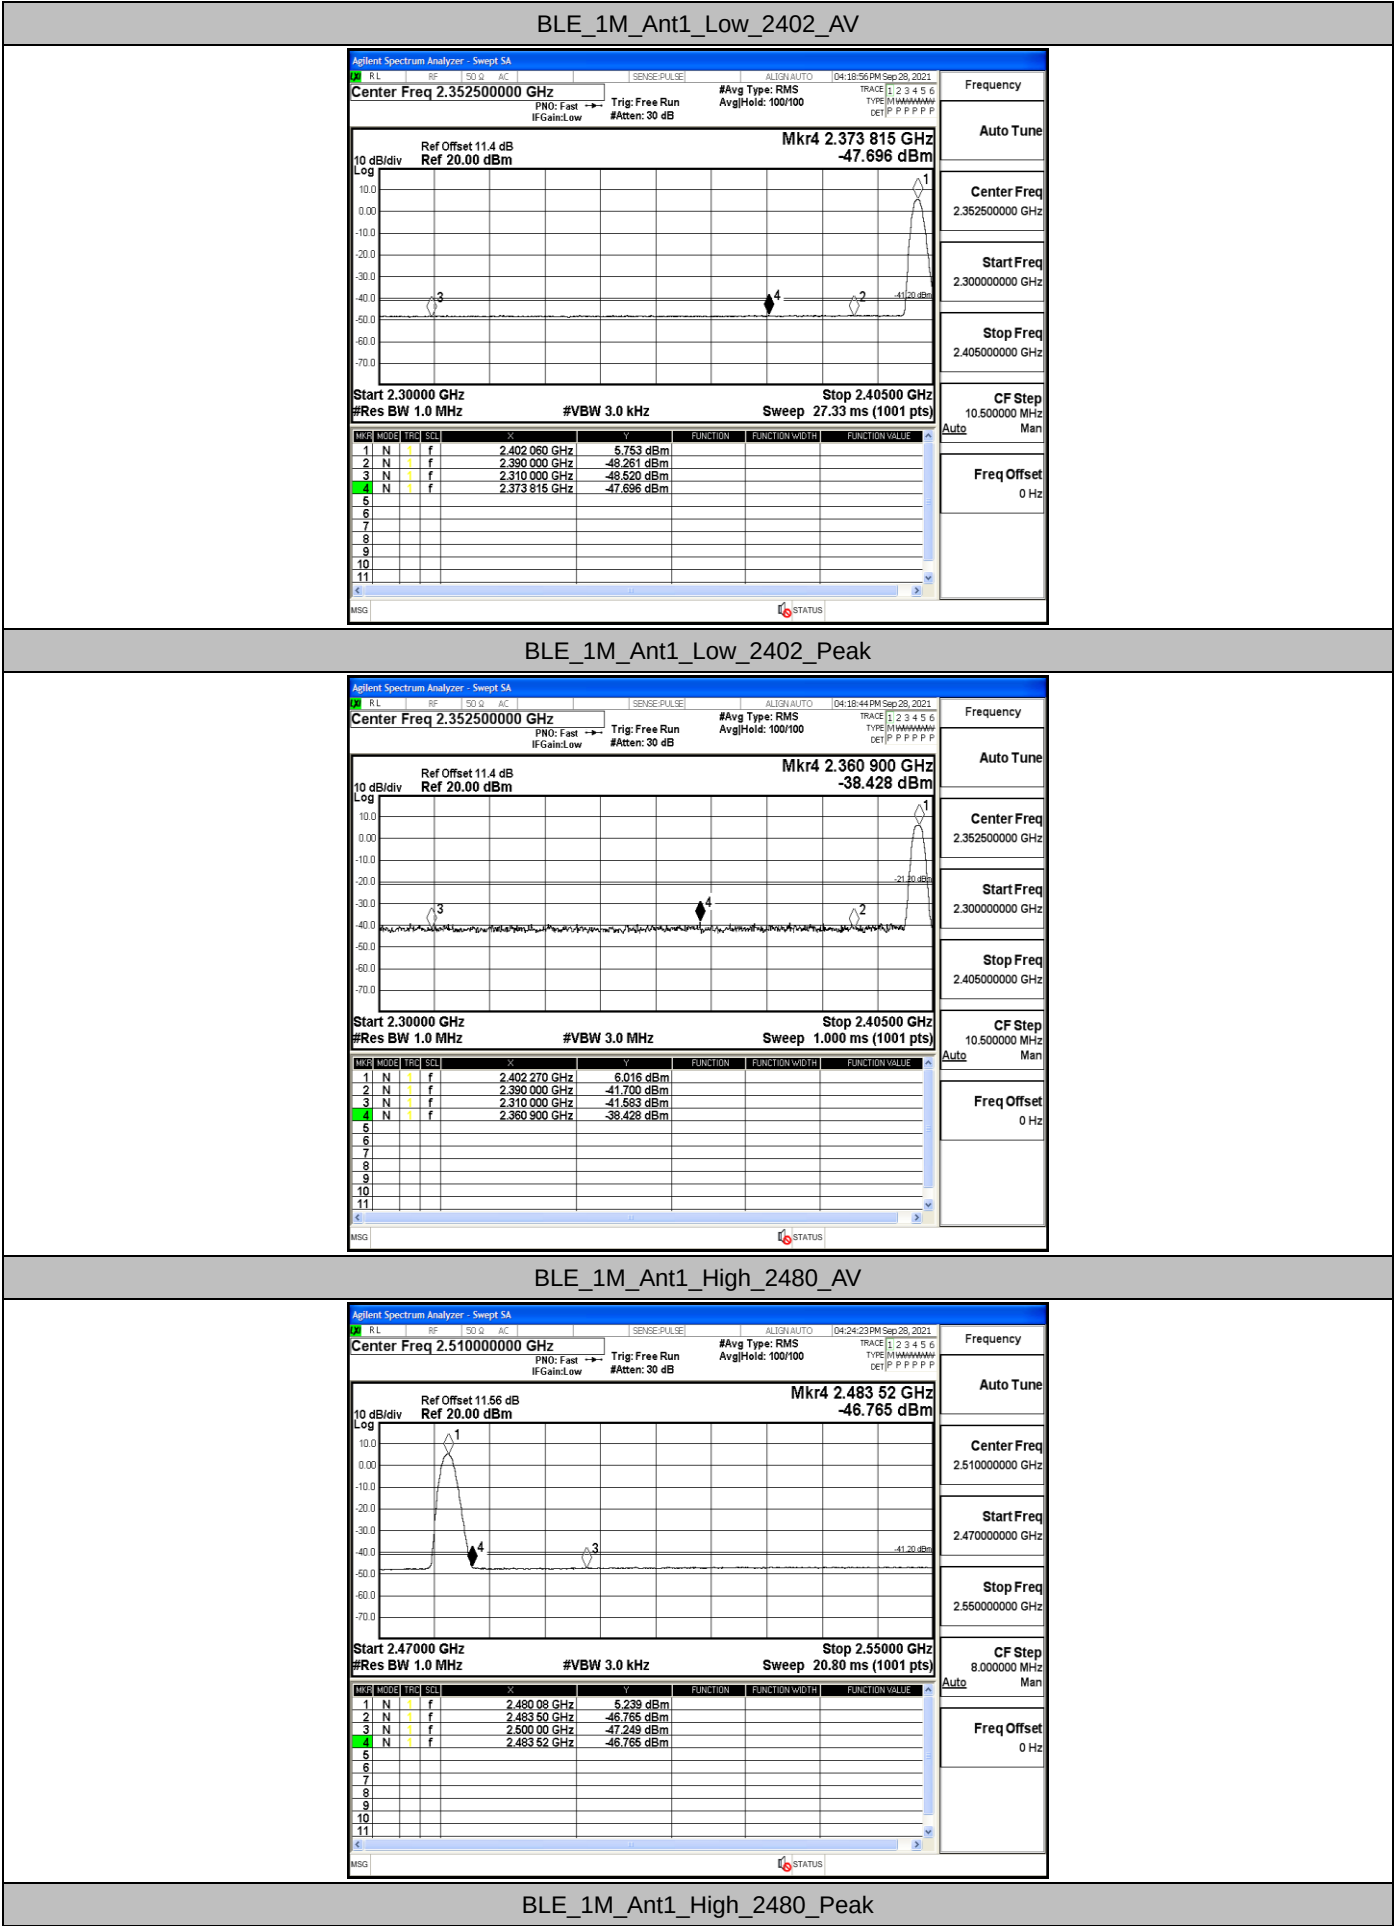

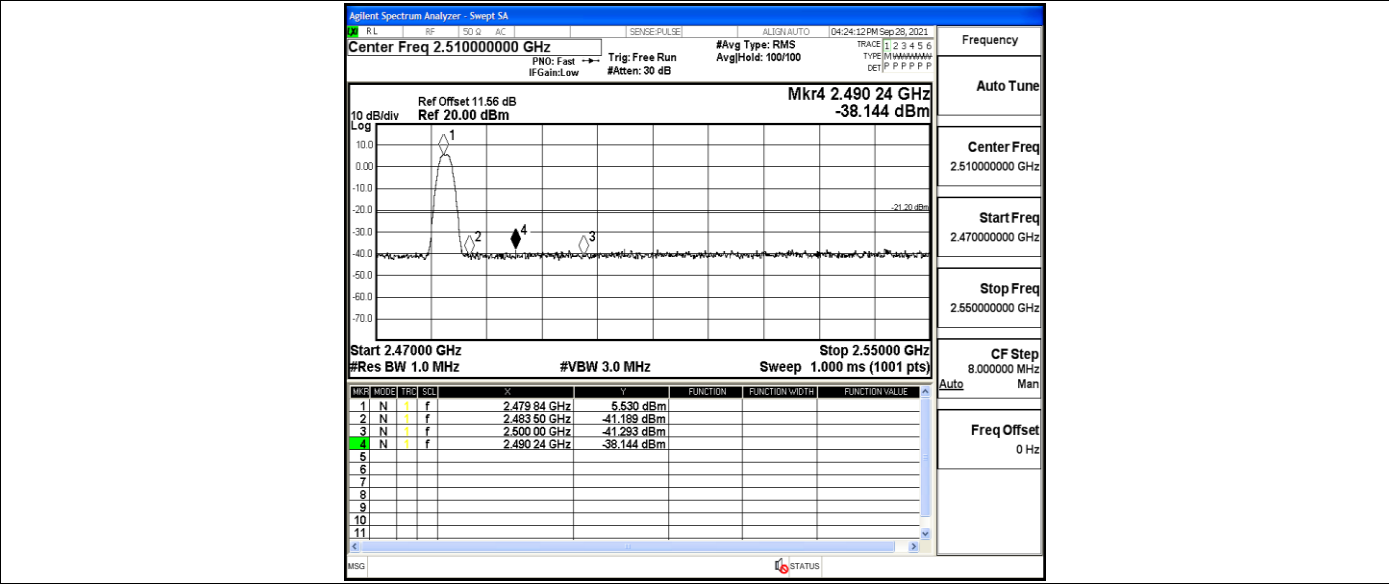

1. The Antenna Gain is compensated in the graph with 2dBi and Antenna Gain which is Higher.
- 2.The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.

A.8. Duty Cycle

TestMode	Antenna	Channel	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	1/B[KHz]
BLE_1M	Ant1	2402	0.38	0.63	60.32	2.63
		2440	0.38	0.62	61.29	2.63
		2480	0.38	0.62	61.29	2.63

