



RADIO EXPOSURE TEST REPORT

FCC ID : 2AXXQBGW321

Equipment : BGW320-500 Wireless Integrated ONT Residential Gateway

Brand Name : HUMAX

Model Name : BGW320-500


Applicant : Humax Networks, INC.
216, Hwangsaetul-ro, Bundang-gu, Seongnam-si, 463-875,
South Korea

Manufacturer : Humax Networks, INC.
216, Hwangsaetul-ro, Bundang-gu, Seongnam-si, 463-875,
South Korea

Standard : 47 CFR Part 2.1091

The product was received on Apr. 25, 2022, and testing was started from May 02, 2022 and completed on Aug. 04, 2022. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in 47 CFR Part 2.1091 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

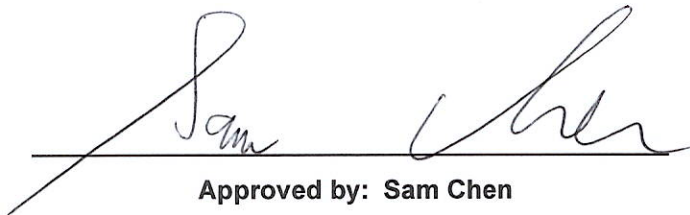

Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory
No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....3

Summary of Test Result.....4

1 General Description5

1.1 EUT General Information5

1.2 Antenna Information6

1.3 Accessories8

1.4 Applicable Standards8

1.5 Testing Location8

2 Maximum Permissible Exposure9

2.1 Limit of Maximum Permissible Exposure9

2.2 MPE Calculation Method9

2.3 MPE Exemption10

2.4 Calculated Result and Limit.....11

Photographs of EUT v01



Summary of Test Result

| Report Clause | Ref Std. Clause | Test Items | Result (PASS/FAIL) | Remark |
|---------------|-----------------|---------------------|--------------------|--------|
| 2 | - | Exposure evaluation | PASS | - |

Declaration of Conformity:

1. The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers. It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
2. The measurement uncertainty please refer to report "Measurement Uncertainty".

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: **Sam Chen**

Report Producer: **Vicky Huang**



1 General Description

1.1 EUT General Information

| RF General Information | | | |
|------------------------|------------------------|---------------------------|---|
| Evaluation Mode | Frequency Range (MHz) | Operating Frequency (MHz) | Modulation Type |
| 2.4GHz WLAN | 2400-2483.5 | 2412-2462 | 802.11b: DSSS (DBPSK, DQPSK, CCK) 802.11g/n: OFDM (BPSK, QPSK, 16QAM, 64QAM) VHT: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM) 802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM) |
| 5GHz WLAN | 5150-5250 5725-5850 | 5180-5240 5745-5825 | 802.11a/n: OFDM (BPSK, QPSK, 16QAM, 64QAM) 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM) 802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM) |



1.2 Antenna Information

| Ant. | Port | | Brand | Model Name | Antenna Type | Connector | Gain (dBi) |
|------|--------|------|------------|------------------|--------------|-----------|------------|
| | 2.4GHz | 5GHz | | | | | |
| 1 | 1 | 1 | GALTRONICS | 02102140-06811U1 | PCB | I-PEX | Note 1 |
| 2 | 2 | 2 | GALTRONICS | 02102140-06811U1 | PCB | I-PEX | |
| 3 | 3 | 3 | GALTRONICS | 02102140-06811U1 | PCB | I-PEX | |
| 4 | 4 | 4 | GALTRONICS | 02102140-06811U1 | PCB | I-PEX | |
| 5 | - | 1 | GALTRONICS | 02102140-06811U1 | PCB | I-PEX | |
| 6 | - | 2 | GALTRONICS | 02102140-06811U1 | PCB | I-PEX | |
| 7 | - | 3 | GALTRONICS | 02102140-06811U1 | PCB | I-PEX | |
| 8 | - | 4 | GALTRONICS | 02102140-06811U1 | PCB | I-PEX | |
| 9 | - | - | GALTRONICS | 02102140-06811U1 | PCB | I-PEX | 5.50 |

Note1:

| Ant. | Antenna Gain (dBi) | | | | |
|------|--------------------|-----------|---------|---------|--------|
| | WLAN 2.4GHz | WLAN 5GHz | | | |
| | | UNII 1 | UNII 2A | UNII 2C | UNII 3 |
| 1 | 4.3 | 2.43 | 2.5 | - | - |
| 2 | 3.63 | 2.08 | 2.97 | - | - |
| 3 | 2.69 | 2.93 | 2.8 | - | - |
| 4 | 4.67 | 3.28 | 3.24 | - | - |
| 5 | - | - | - | 2.57 | 2.64 |
| 6 | - | - | - | 3.98 | 4.12 |
| 7 | - | - | - | 2.29 | 2.9 |
| 8 | - | - | - | 3.18 | 4.21 |



| Ant. | Directional Gain (dBi) | | | | | | | | | | | | | | |
|------|------------------------|------|------|-----------|------|------|---------|------|------|---------|------|------|--------|------|------|
| | WLAN 2.4GHz | | | WLAN 5GHz | | | | | | | | | | | |
| | | | | UNII 1 | | | UNII 2A | | | UNII 2C | | | UNII 3 | | |
| | 4T1S | 4T2S | 4T4S | 4T1S | 4T2S | 4T4S | 4T1S | 4T2S | 4T4S | 4T1S | 4T2S | 4T4S | 4T1S | 4T2S | 4T4S |
| 1 | 5.99 | 4.67 | 4.67 | 4.45 | 3.28 | 3.28 | 4.07 | 3.24 | 3.24 | - | - | - | - | - | - |
| 2 | | | | | | | | | | | | | | | |
| 3 | | | | | | | | | | | | | | | |
| 4 | | | | | | | | | | | | | | | |
| 5 | - | - | - | - | - | - | - | - | - | 4.11 | 3.98 | 3.98 | 4.43 | 4.21 | 4.21 |
| 6 | | | | | | | | | | | | | | | |
| 7 | | | | | | | | | | | | | | | |
| 8 | | | | | | | | | | | | | | | |

Note 2: The above information(excepting antenna gain) was declared by manufacturer.

Note 3. The antenna 9 which has the receiving function only is used for zero wait.

Note 4: The EUT has nine antennas.

Note 5: The antenna gain and directional gain are measured which follow the procedure of KDB 662911 D03

Note 6: The EUT doesn't enable the DFS band for this application.

For 2.4GHz function:

For IEEE 802.11b/g/n/VHT/ax (4TX/4RX):

Port 1, Port 2, Port 3 and Port 4 can be use as transmitting/receiving antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit/receive simultaneously.

For 5GHz function:

For IEEE 802.11a/n/ac/ax (4TX/4RX):

Port 1, Port 2, Port 3 and Port 4 can be use as transmitting/receiving antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit/receive simultaneously.

For 1RX:

Ant. 9 can be use as receiving antenna only.



1.3 Accessories

| Accessories | | | |
|----------------|------------|------------|--|
| Equipment Name | Brand Name | Model Name | Rating |
| Adapter | DIRECTV | EPS48R1-16 | Input: 120V~1.1A, 60Hz Output: 12V, 4A, 48W |

1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2.1091
KDB 447498 D04 Interim General RF Exposure Guidance v01 The following reference test guidance is not within the scope of accreditation of TAF.
- ♦ 47 CFR Part 1.1307
- ♦ 47 CFR Part 1.1310

1.5 Testing Location

| Testing Location Information | |
|---|--|
| Test Lab. : Sporton International Inc. Hsinchu Laboratory | |
| Hsinchu | ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.) |
| (TAF: 3787) | TEL: 886-3-656-9065 FAX: 886-3-656-9085 |
| Test site Designation No. TW3787 with FCC. | |
| Conformity Assessment Body Identifier (CABID) TW3787 with ISED. | |



2 Maximum Permissible Exposure

2.1 Limit of Maximum Permissible Exposure

(A) Limits for Occupational / Controlled Exposure

| Frequency Range (MHz) | Electric Field Strength (E) (V/m) | Magnetic Field Strength (H) (A/m) | Power Density (S) (mW/ cm ²) | Averaging Time E ² , H ² or S (minutes) |
|-----------------------|-----------------------------------|-----------------------------------|--|--|
| 0.3-3.0 | 614 | 1.63 | *(100) | <6 |
| 3.0-30 | 1842/f | 4.89/f | *(900/f ²) | <6 |
| 30-300 | 61.4 | 0.163 | 1.0 | <6 |
| 300-1500 | - | - | f/300 | <6 |
| 1500-100,000 | - | - | 5 | <6 |

(B) Limits for General Population / Uncontrolled Exposure

| Frequency Range (MHz) | Electric Field Strength (E) (V/m) | Magnetic Field Strength (H) (A/m) | Power Density (S) (mW/ cm ²) | Averaging Time E ² , H ² or S (minutes) |
|-----------------------|-----------------------------------|-----------------------------------|--|--|
| 0.3-1.34 | 614 | 1.63 | *(100) | <30 |
| 1.34-30 | 824/f | 2.19/f | *(180/f ²) | <30 |
| 30-300 | 27.5 | 0.073 | 0.2 | <30 |
| 300-1500 | - | - | f/1500 | <30 |
| 1500-100,000 | - | - | 1.0 | <30 |

Note: f = frequency in MHz ; *Plane-wave equivalent power density

2.2 MPE Calculation Method

The MPE was calculated at 58 cm to show compliance with the power density limit.

The following formula was used to calculate the Power Density:

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \qquad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$



2.3 MPE Exemption

Option (A): 1.1307(b)(3)(i)(A): Available maximum time-averaged power is < 1 mW

Option (B): 1.1307(b)(3)(i)(B): Device operates between 300 MHz and 6 GHz and the maximum time-averaged power or effective radiated power (ERP), whichever is greater, <= Pth.

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}} (d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases}$$

Where

$$x = -\log_{10} \left(\frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right) \text{ and } f \text{ is in GHz;}$$

and

$$ERP_{20 \text{ cm}} \text{ (mW)} = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases}$$

d = the separation distance (cm);

Option (C): 1.1307(b)(3)(i)(C): ERP is below a threshold calculated based on the distance R between the person and the antenna / radiating structure, where $R > \lambda / 2 \pi$.

| Single RF Sources Subject to Routine Environmental Evaluation | |
|---|--|
| RF Source frequency (MHz) | Threshold ERP (watts) |
| 0.3-1.34 | 1,920 R ² . |
| 1.34-30 | 3,450 R ² /f ² . |
| 30-300 | 3.83 R ² . |
| 300-1,500 | 0.0128 R ² f. |
| 1,500-100,000 | 19.2R ² . |
| Note: R is in meters, f is in MHz. | |



2.4 Calculated Result and Limit

Exposure Environment: General Population / Uncontrolled Exposure

| Mode | DG (dBi) | Power (dBm) | EIRP (dBm) | Tolerance (dB) | Tune-up EIRP (dBm) | Tune-up EIRP (W) | Distance (cm) | S (mW/cm ²) | S Limit (mW/cm ²) |
|----------|----------|-------------|------------|----------------|--------------------|------------------|---------------|-------------------------|-------------------------------|
| 2.4G;D1D | 5.99 | 29.84 | 35.83 | 0.16 | 35.99 | 3.97192 | 58 | 0.09396 | 1.00000 |
| 5.2G;D1D | 4.45 | 29.98 | 34.43 | 0.50 | 34.93 | 3.11172 | 58 | 0.07361 | 1.00000 |
| 5.8G;D1D | 4.43 | 29.99 | 34.42 | 0.50 | 34.92 | 3.10456 | 58 | 0.07344 | 1.00000 |

| MPE Exemption Option C | | | | | | | |
|------------------------|--------------------|-------|--------------------|-------------------|-----------------|-------------------|---------------|
| Frequency (MHz) | $\lambda/2\pi$ (m) | R (m) | Tune-up EIRP (dBm) | Tune-up ERP (dBm) | Tune-up ERP (W) | ERP Threshold (W) | MPE Exemption |
| 2437 | 0.0196 | 0.58 | 35.99 | 33.84 | 2.421 | 6.459 | Complies |
| 5230 | 0.0091 | | 34.93 | 32.78 | 1.897 | 6.459 | Complies |
| 5785 | 0.0082 | | 34.92 | 32.77 | 1.892 | 6.459 | Complies |

Simultaneous Transmission Analysis Mode: WLAN 2.4GHz+WLAN 5GHz UNII 1+WLAN 5GHz UNII 3

| Simultaneous Transmissions Option C | | | | | | | |
|-------------------------------------|-------|--------------------|-------------------|-----------------|-------------------|----------------------------|----------------------------------|
| Frequency (MHz) | R (m) | Tune-up EIRP (dBm) | Tune-up ERP (dBm) | Tune-up ERP (W) | ERP Threshold (W) | Simultaneous Transmissions | Simultaneous Transmissions Limit |
| 2437 | 0.58 | 35.99 | 33.84 | 2.421 | 6.459 | 0.96 | <= 1 |
| 5230 | | 34.93 | 32.78 | 1.897 | 6.459 | | |
| 5785 | | 34.92 | 32.77 | 1.892 | 6.459 | | |

————THE END————