



RADIO EXPOSURE TEST REPORT

FCC ID : 2AXXQBGW321

Equipment : BGW320-500 Wireless Integrated ONT Residential Gateway

Brand Name : HUMAX

Model Name : BGW320-500


Applicant : Humax Networks, INC.
216, Hwangsaetul-ro, Bundang-gu, Seongnam-si, 463-875,
South Korea

Manufacturer : Humax Networks, INC.
216, Hwangsaetul-ro, Bundang-gu, Seongnam-si, 463-875,
South Korea

Standard : 47 CFR Part 2.1091

The product was received on Apr. 25, 2022, and testing was started from May 02, 2022 and completed on Aug. 04, 2022. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in 47 CFR Part 2.1091 and shown compliance with the applicable technical standards.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

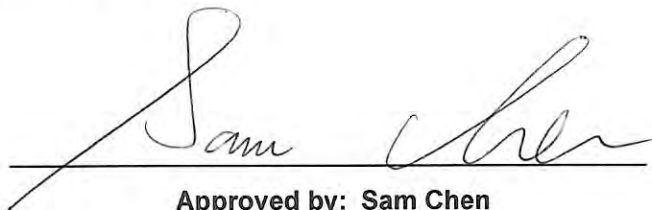

Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory
No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 EUT General Information	5
1.2 Antenna Information	6
1.3 Accessories	8
1.4 Table for Permissive Change	8
1.5 Applicable Standards	8
1.6 Testing Location	8
2 Maximum Permissible Exposure	9
2.1 Limit of Maximum Permissible Exposure	9
2.2 MPE Calculation Method	9
2.3 MPE Exemption	10
2.4 Calculated Result and Limit.....	11

Photographs of EUT v01



History of this test report

Report No.	Version	Description	Issued Date
FA242501-01	01	Initial issue of report	Aug. 15, 2022
FA242501-01	02	Changing the brand name of Antenna to GALTRONICS from CALTRONICS	Aug. 29, 2022



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
2	-	Exposure evaluation	PASS	-

Declaration of Conformity:

1. The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers. It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
2. The measurement uncertainty please refer to report "Measurement Uncertainty".

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Sam Chen

Report Producer: Vicky Huang



1 General Description

1.1 EUT General Information

RF General Information			
Evaluation Mode	Frequency Range (MHz)	Operating Frequency (MHz)	Modulation Type
2.4GHz WLAN	2400-2483.5	2412-2462	802.11b: DSSS (DBPSK, DQPSK, CCK) 802.11g/n: OFDM (BPSK, QPSK, 16QAM, 64QAM) VHT: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM) 802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)
5GHz WLAN	5150-5250 5250-5350 5470-5725 5725-5850	5180-5250 5250-5320 5500-5720 5745-5825	802.11a/n: OFDM (BPSK, QPSK, 16QAM, 64QAM) 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM) 802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)



1.2 Antenna Information

Ant.	Port		Brand	Model Name	Antenna Type	Connector	Gain (dBi)
	2.4GHz	5GHz					
1	1	1	GALTRONICS	02102140-06811U1	PCB	I-PEX	Note 1
2	2	2	GALTRONICS	02102140-06811U1	PCB	I-PEX	
3	3	3	GALTRONICS	02102140-06811U1	PCB	I-PEX	
4	4	4	GALTRONICS	02102140-06811U1	PCB	I-PEX	
5	-	1	GALTRONICS	02102140-06811U1	PCB	I-PEX	
6	-	2	GALTRONICS	02102140-06811U1	PCB	I-PEX	
7	-	3	GALTRONICS	02102140-06811U1	PCB	I-PEX	
8	-	4	GALTRONICS	02102140-06811U1	PCB	I-PEX	
9	-	-	GALTRONICS	02102140-06811U1	PCB	I-PEX	5.50

Note1:

Ant.	Antenna Gain (dBi)				
	WLAN 2.4GHz	WLAN 5GHz			
		UNII 1	UNII 2A	UNII 2C	UNII 3
1	4.3	2.43	2.5	-	-
2	3.63	2.08	2.97	-	-
3	2.69	2.93	2.8	-	-
4	4.67	3.28	3.24	-	-
5	-	-	-	2.57	2.64
6	-	-	-	3.98	4.12
7	-	-	-	2.29	2.9
8	-	-	-	3.18	4.21



Ant.	Directional Gain (dBi)														
	WLAN 2.4GHz			WLAN 5GHz											
				UNII 1			UNII 2A			UNII 2C			UNII 3		
	4T1S	4T2S	4T4S	4T1S	4T2S	4T4S	4T1S	4T2S	4T4S	4T1S	4T2S	4T4S	4T1S	4T2S	4T4S
1	5.99	4.67	4.67	4.45	3.28	3.28	4.07	3.24	3.24	-	-	-	-	-	-
2															
3															
4															
5	-	-	-	-	-	-	-	-	-	4.11	3.98	3.98	4.43	4.21	4.21
6															
7															
8															

Note 2: The above information(excepting antenna gain) was declared by manufacturer.

Note 3. The antenna 9 which has the receiving function only is used for zero wait.

Note 4: The EUT has nine antennas.

Note 5: The antenna gain and directional gain are measured which follow the procedure of KDB 662911 D03

For 2.4GHz function:

For IEEE 802.11b/g/n/VHT/ax (4TX/4RX):

Port 1, Port 2, Port 3 and Port 4 can be use as transmitting/receiving antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit/receive simultaneously.

For 5GHz function:

For IEEE 802.11a/n/ac/ax (4TX/4RX):

Port 1, Port 2, Port 3 and Port 4 can be use as transmitting/receiving antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit/receive simultaneously.

For 1RX:

Ant. 9 can be use as receiving antenna only.



1.3 Accessories

Accessories			
Equipment Name	Brand Name	Model Name	Rating
Adapter	DIRECTV	EPS48R1-16	Input: 120V~1.1A, 60Hz Output: 12V, 4A, 48W

1.4 Table for Permissive Change

This product is an extension of original one reported under Sporton project number: FA242501

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
1. Adding 5GHz UNII 2A and UNII 2C (5250~5350 MHz, 5470~5725 MHz) for this device, and it has the straddle channels (5690 MHz, 5710MHz, 5720 MHz). 2. Adding the 160MHz.	MPE

Note: Maximum Permissible Exposure of 2.4GHz Band and 5GHz UNII 1, UNII 3 Band are based on original test report

1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2.1091
- ♦ KDB 447498 D04 Interim General RF Exposure Guidance v01

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ 47 CFR Part 1.1307
- ♦ 47 CFR Part 1.1310

1.6 Testing Location

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)
(TAF: 3787)	TEL: 886-3-656-9065 FAX: 886-3-656-9085
Test site Designation No. TW3787 with FCC.	
Conformity Assessment Body Identifier (CABID) TW3787 with ISED.	



2 Maximum Permissible Exposure

2.1 Limit of Maximum Permissible Exposure

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	*(100)	<6
3.0-30	1842/f	4.89/f	*(900/f ²)	<6
30-300	61.4	0.163	1.0	<6
300-1500	-	-	f/300	<6
1500-100,000	-	-	5	<6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f ²)	<30
30-300	27.5	0.073	0.2	<30
300-1500	-	-	f/1500	<30
1500-100,000	-	-	1.0	<30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

2.2 MPE Calculation Method

The MPE was calculated at 58 cm to show compliance with the power density limit.

The following formula was used to calculate the Power Density:

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \qquad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$



2.3 MPE Exemption

Option (A): 1.1307(b)(3)(i)(A): Available maximum time-averaged power is < 1 mW

Option (B): 1.1307(b)(3)(i)(B): Device operates between 300 MHz and 6 GHz and the maximum time-averaged power or effective radiated power (ERP), whichever is greater, <= Pth.

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}} (d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases}$$

Where

$$x = -\log_{10} \left(\frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right) \text{ and } f \text{ is in GHz;}$$

and

$$ERP_{20 \text{ cm}} \text{ (mW)} = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases}$$

d = the separation distance (cm);

Option (C): 1.1307(b)(3)(i)(C): ERP is below a threshold calculated based on the distance R between the person and the antenna / radiating structure, where $R > \lambda / 2 \pi$.

Single RF Sources Subject to Routine Environmental Evaluation	
RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	1,920 R ² .
1.34-30	3,450 R ² /f ² .
30-300	3.83 R ² .
300-1,500	0.0128 R ² f.
1,500-100,000	19.2R ² .

Note: R is in meters, f is in MHz.



2.4 Calculated Result and Limit

Exposure Environment: General Population / Uncontrolled Exposure

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	Tolerance (dB)	Tune-up EIRP (dBm)	Tune-up EIRP (W)	Distance (cm)	S (mW/cm ²)	S Limit (mW/cm ²)
2.4G;D1D	5.99	29.84	35.83	0.16	35.99	3.97192	58	0.09396	1.00000
5.2G;D1D	4.45	29.98	34.43	0.50	34.93	3.11172	58	0.07361	1.00000
5.3G;D1D	4.07	23.93	28.00	0.50	28.50	0.70795	58	0.01675	1.00000
5.6G;D1D	4.11	23.89	28.00	0.50	28.50	0.70795	58	0.01675	1.00000
5.8G;D1D	4.43	29.99	34.42	0.50	34.92	3.10456	58	0.07344	1.00000

MPE Exemption Option C							
Frequency (MHz)	$\lambda/2\pi$ (m)	R (m)	Tune-up EIRP (dBm)	Tune-up ERP (dBm)	Tune-up ERP (W)	ERP Threshold (W)	MPE Exemption
2437	0.0196	0.58	35.99	33.84	2.421	6.459	Complies
5230	0.0091		34.93	32.78	1.897	6.459	Complies
5785	0.0082		34.92	32.77	1.892	6.459	Complies

Simultaneous Transmission Analysis Mode: WLAN 2.4GHz+WLAN 5GHz UNII 1, 2A+WLAN 5GHz UNII 2C, 3

Simultaneous Transmissions Option C							
Frequency (MHz)	R (m)	Tune-up EIRP (dBm)	Tune-up ERP (dBm)	Tune-up ERP (W)	ERP Threshold (W)	Simultaneous Transmissions	Simultaneous Transmissions Limit
2437	0.58	35.99	33.84	2.421	6.459	0.96	<= 1
5230		34.93	32.78	1.897	6.459		
5785		34.92	32.77	1.892	6.459		

—————THE END—————