


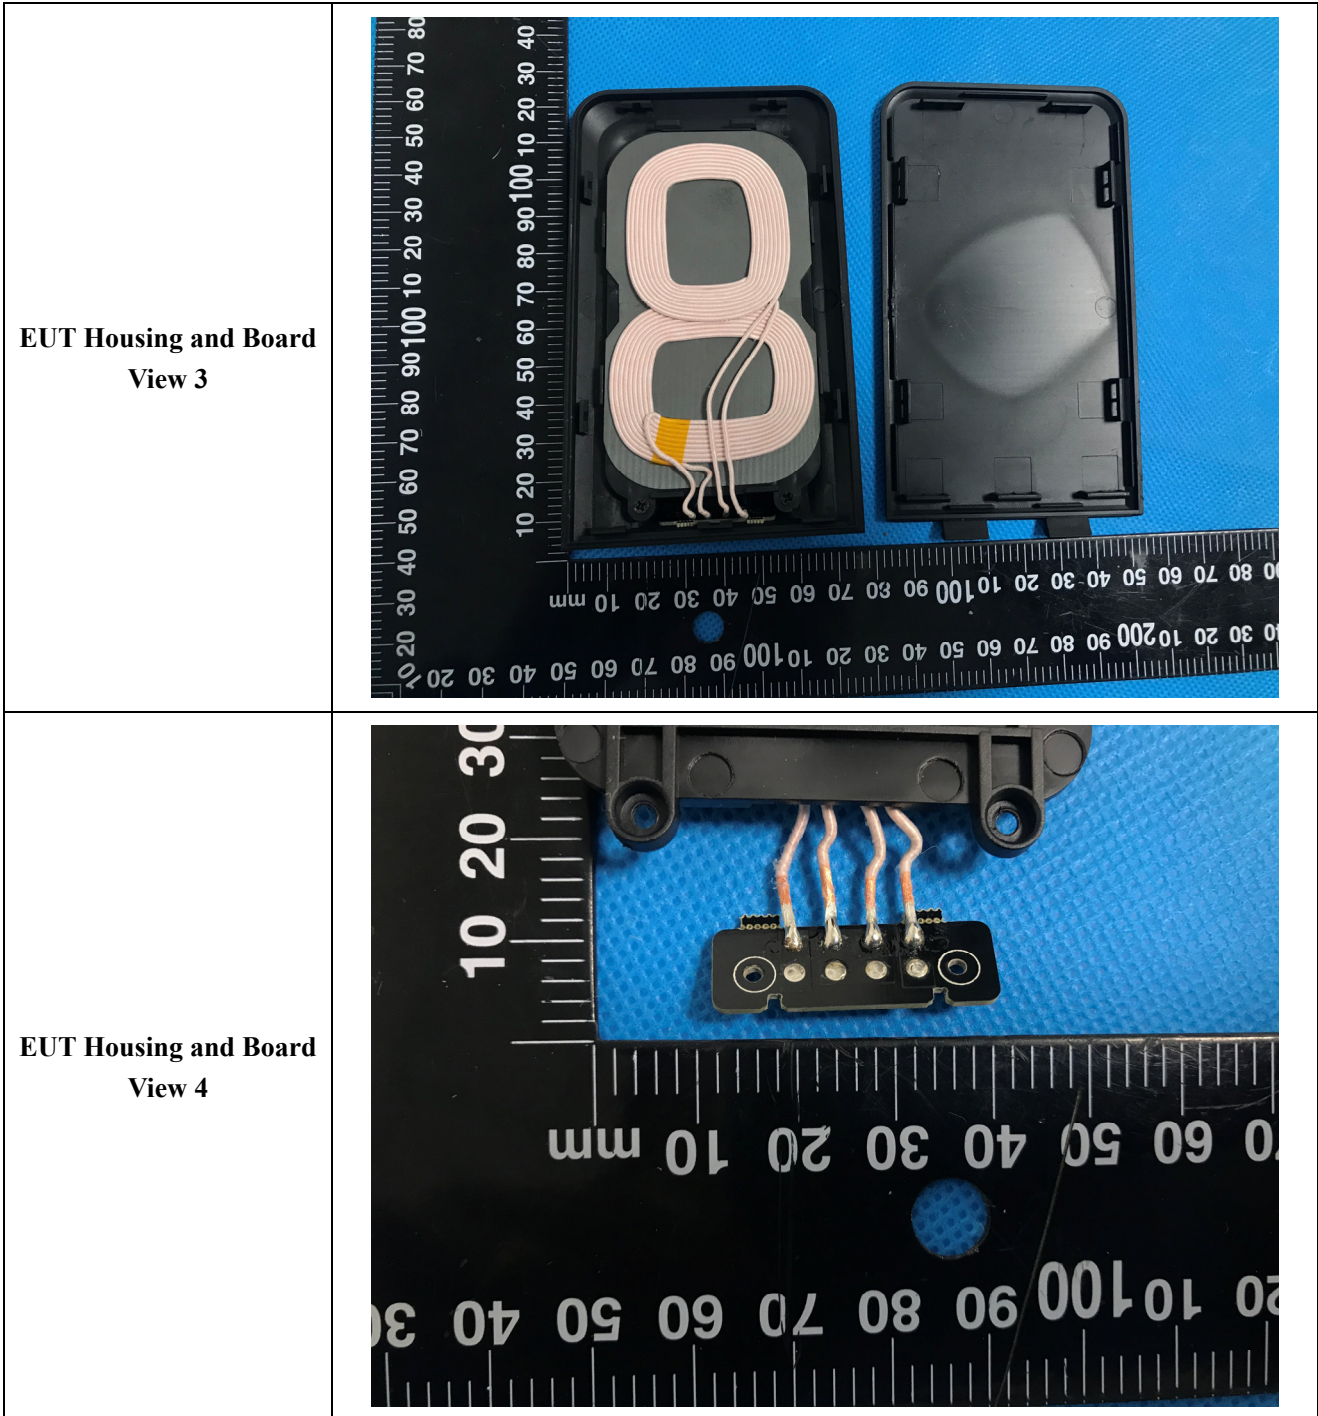


EXHIBIT 3 - EUT INTERNAL PHOTOGRAPHS


<p>EUT Housing and Board View 1</p>	 <p>This photograph shows the external components of the EUT. On the left is the main black plastic housing, which has a USB port on the top edge and a square-shaped button or sensor in the center. To its right is a separate black plastic component, possibly a speaker grille, featuring a grid of six small circular holes. A black plastic handle is attached to the right side of this component. A black ruler with white markings is placed horizontally below the components, showing measurements in millimeters. The background is a blue textured surface.</p>
<p>EUT Housing and Board View 2</p>	 <p>This photograph shows the internal components of the EUT. The main black plastic housing is open, revealing a green printed circuit board (PCB) populated with various electronic components, including a microcontroller, capacitors, and resistors. A white circular battery is mounted on the left side of the PCB. A piece of gold-colored thermal tape is visible on the top surface of the housing. A black ruler with white markings is placed horizontally below the housing, showing measurements in millimeters. The background is a blue textured surface.</p>





**EUT Housing and Board
View 5**

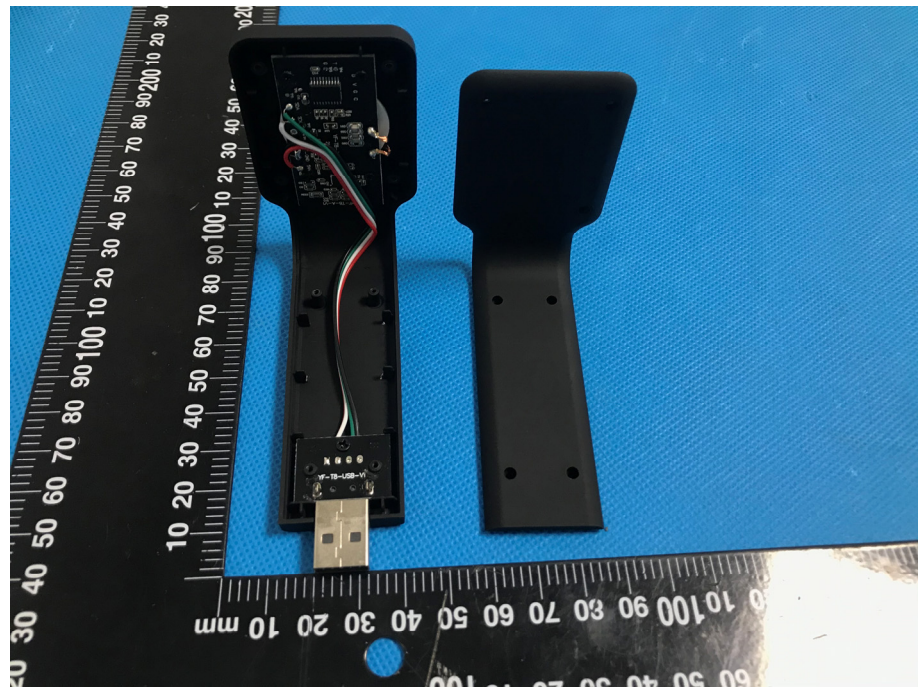

**Solder
Board-Component View
1**

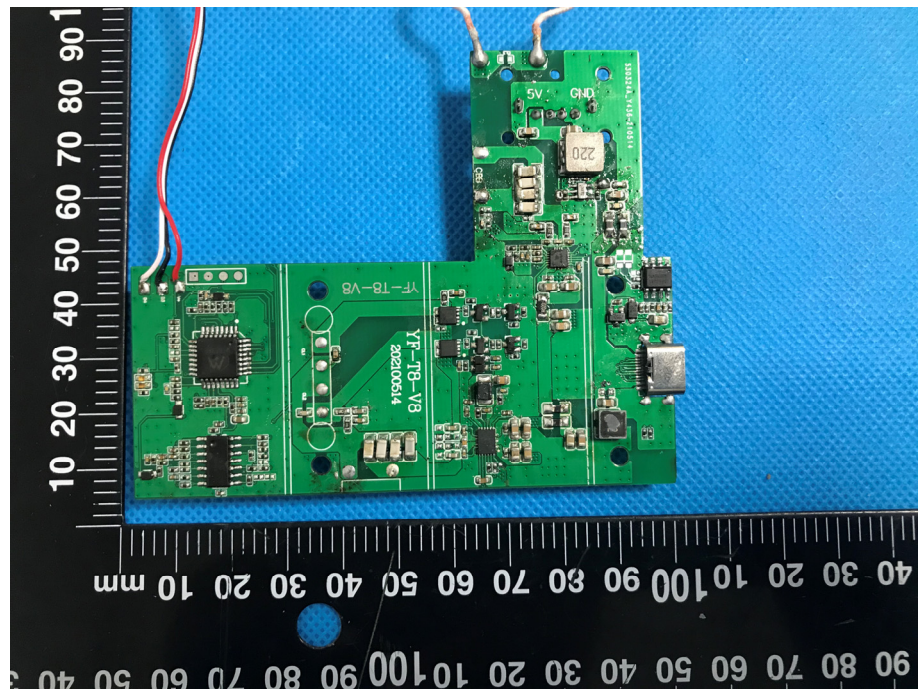
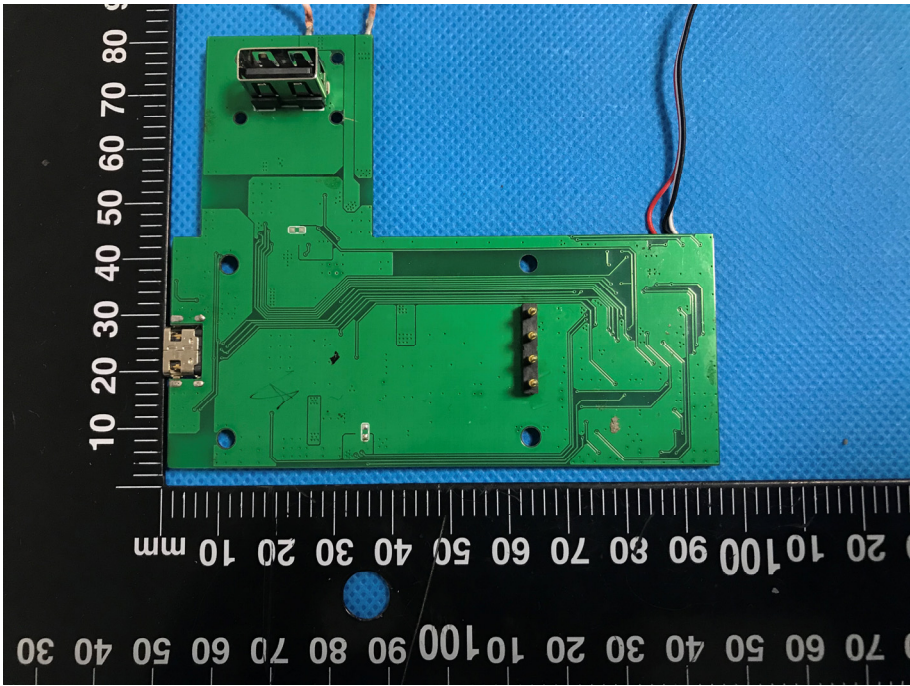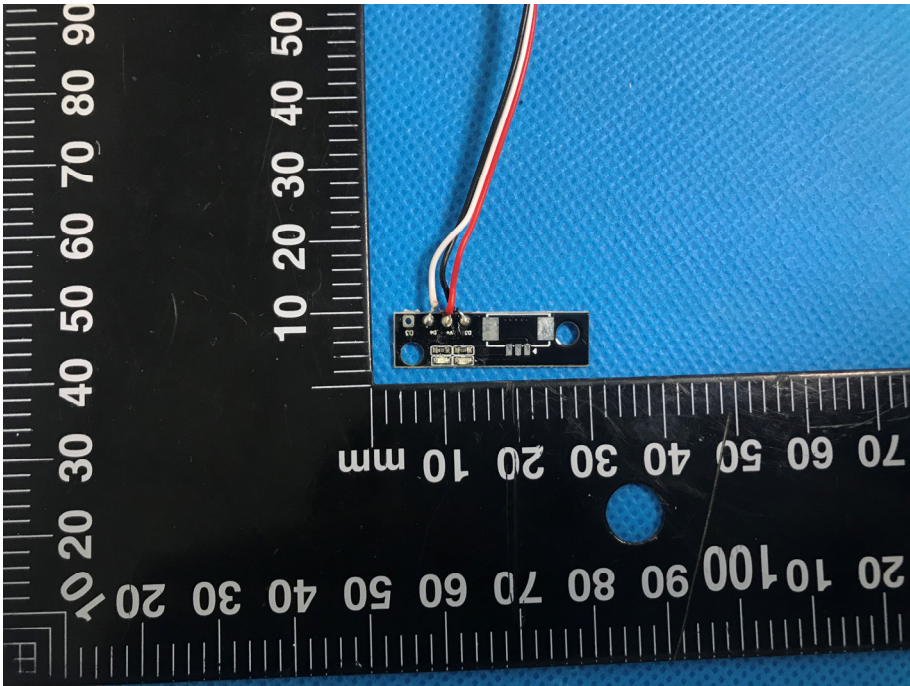
<p style="text-align: center;">Solder Board-Component View 2</p>	 A photograph of a green printed circuit board (PCB) component. The board is rectangular with a complex layout of copper traces. It features a USB-A connector on the left side and a multi-pin connector on the right side. The component is placed on a blue textured surface next to a black ruler with white markings in millimeters. The ruler shows measurements from 0 to 100 mm.
<p style="text-align: center;">Solder Board-Component View 3</p>	 A photograph of a small black PCB component. The board is rectangular and has several small components soldered onto it. It is connected to a multi-colored ribbon cable. The component is placed on a blue textured surface next to a black ruler with white markings in millimeters. The ruler shows measurements from 0 to 100 mm.