

# **FCC Test Report**

Report No.: AGC11438210101FE10

FCC ID : 2AXYD-US068SFWD

**PRODUCT DESIGNATION**: Two-way radio

**BRAND NAME** : Seodon, Firward

**MODEL NAME** : SED-6, SED-8S

**APPLICANT**: Shenzhen Firward Technology Co.,Ltd

**DATE OF ISSUE** : Mar. 22, 2021

**STANDARD(S)** : FCC Part 90 Rules

**REPORT VERSION**: V 1.0

# Attestation of Global Compliance (Shenzhen) Co., Ltd





Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the codecated restroy/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test result presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuence of the test report Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



# **Report Revise Record**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	1	Mar. 22, 2021	Valid	Initial Release

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Restrict/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.



# **TABLE OF CONTENTS**

	VERIFICATION OF COMPLIANCE	
2.	GENERAL INFORMATION	6
2	2.1PRODUCT DESCRIPTION	6
2	2.2RELATED SUBMITTAL(S) / GRANT (S)	9
2	2.3 TEST METHODOLOGY	9
2	2.4 ADDRESS OF THE TEST LABORATORY	9
2	2.5 TEST FACILITY	9
	2.6 SPECIAL ACCESSORIES	
2	2.7 EQUIPMENT MODIFICATIONS	10
3.	SYSTEM TEST CONFIGURATION	11
3	3.1EUT CONFIGURATION	11
3	3.2 EUT EXERCISE	11
3	3.3 MEASUREMENT UNCERTAINTY	11
3	3.4 CONFIGURATION OF TESTED SYSTEM	12
4.	SUMMARY OF TEST RESULTS	13
5.		
6.	FREQUENCY TOLERANCE	
	6.1 PROVISIONS APPLICABLE	
	6.2 MEASUREMENT PROCEDURE	
	6.3 TEST SETUP BLOCK DIAGRAM	
	6.4 TEST RESULTS	
7.	EMISSION BANDWIDTH	19
7	7.1 PROVISIONS APPLICABLE	19
7	7.2 MEASUREMENT PROCEDURE	19
7	7.3 TEST SETUP BLOCK DIAGRAM	19
	7.4 MEASUREMENT RESULT	
	UNWANTED RADIATION	
8	8.1 PROVISIONS APPLICABLE	24
8	8.2 MEASUREMENT PROCEDURE	24
8	8.3 TEST SETUP BLOCK DIAGRAM	25
	8.4 MEASUREMENT RESULTS:	
8	8.5 EMISSION MASK PLOT	35
9.1	MODULATION CHARACTERISTICS	
	9 1 PROVISIONS APPLICABLE	38

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



9.2 MEASUREMENT METHOD	38
9.3 MEASUREMENT RESULT	39
10.MAXIMUMN TRANSMITTER POWER (CONDUCTED OUTPUT POWER) P	PEAK POWER 42
10.1 PROVISIONS APPLICABLE	42
10.2 TEST PROCEDURE	42
10.3 TEST CONFIGURATION	42
10.4 TEST RESULT	
11.SPURIOUS EMISSION ON ANTENNA PORT	45
11.1 PROVISIONS APPLICABLE	45
11.2 TEST PROCEDURE	45
11.3 TEST CONFIGURATION	45
11.4 TEST RESULT	46
12.TRANSMITTER FREQUENCY BEHAVIOR	50
12.1PROVISIONS APPLICABLE	50
12.2 TEST CONFIGURATION	50
12.3 TEST METHOD	51
12.4 DESCRIBE LIMIT LINE OF RANSMITTER FREQUENCY BEHAVIOR	52
12.5 MEASURE RESULT	53
13.AUDIO LOW PASS FILTER RESPONSE	54
13.1.TEST LIMITS	54
13.2. METHOD OF MEASUREMENTS	
13.3.TEST CONFIGURATION	
13.4.TEST RESULT	
APPENDIX I: PHOTOGRAPHS OF SETUP	
APPENDIX II: PHOTOGRAPHS OF EUT	58

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC who the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



# 1. VERIFICATION OF COMPLIANCE

Applicant:	Shenzhen Firward Technology Co.,Ltd
Address	501 Juji Science&Technology Building, Bianyabian Xueziwei Baoan Ave.Shajing,Shenzhen,Guangdong,China
Manufacturer:	Shenzhen Firward Technology Co.,Ltd
Address	501 Juji Science&Technology Building, Bianyabian Xueziwei Baoan Ave.Shajing,Shenzhen,Guangdong,China
Factory	Shenzhen Firward Technology Co.,Ltd
Address	501 Juji Science&Technology Building, Bianyabian Xueziwei Baoan Ave.Shajing,Shenzhen,Guangdong,China
Product Designation:	Two-way radio
Brand Name:	Seodon, Firward
Test Model	SED-6, SED-8S
Difference Description	Only model, brand and shell design are different The brand of SED-6 is Firward. The brand of SED-8S is Seodon
Measurement Procedure	TIA/EIA 603-E-2016
Deviation	No any deviation from the test method.
Date of Test:	Jan. 13, 2021~Mar. 22, 2021
Condition of Test Sample	Normal
Test Result	Pass

The above equipment was tested by Shenzhen Attestation of Global Compliance Science & Technology Co., Ltd. The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI/TIA-603-E (2016). The sample tested as described in this report is in compliance with the FCC Rules Part 90 requirements. The test results of this report relate only to the tested sample identified in this report.

Prepared By

Donjon Huang
(Project Engineer)

Reviewed By

Calvin Liu
(Reviewer)

Mar. 22, 2021

Approved By

Forrest Lei
Authorized Officer

Mar. 22, 2021

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Restrog/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



# 2. GENERAL INFORMATION

# 2.1PRODUCT DESCRIPTION

The EUT is a **Two-way radio** designed for voice communication. It is designed by way of utilizing the FM modulation achieves the system operating.

A major technical description of EUT is described as following:

Communication Type	Voice/ Tone only
Hardware Version	KA2U-1903-V1.0
Software Version	V1.42
Modulation	FM
Emission Type	11K0F3E
Emission Bandwidth	10.18KHz
Peak Frequency Deviation	1.53KHz
Audio Frequency Response	6.76dB
Maximum Transmitter Power	32.70dBm
Output power Modification	2W (It was fixed by the manufacturer, any individual can't arbitrarily change it.)
Data Rate	12.5KHz(Channel Spacing)
Antenna Designation	Detachable
Antenna Gain	1.50dBi
Power Supply	DC 3.7V,1500mAh by battery, charging for DC4.2V
Limiting Voltage	DC 3.15V-4.26V
Operation Frequency Range and Channel	Frequency Range: 450 MHz to 470 MHz Channel Separation: 12.5KHz(Analog)  Bottom Channel: 450.025MHz Middle Channel: 453.2125MHz Middle Channel: 458.2125MHz High Channel: 469.975MHz
Frequency Tolerance	1.078ppm

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Frequency Range (MHz)	Rated Transmit Power(W)(Conducted)	Transmit Mode/Emission Designator
450-470	2W	11K0F3E(Analog Vioce;NB)

Channel No. (6.25KHz)	Channel No. (12.5KHz)	12.5KHz Channel Spaced 400MHz Band Plan(MHz)
1	1-2	450.025
3		
4	3-4	453.2125
5	5-6	458.2125
7	7-8	469.975
8		403.373

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



FCC Rules and Regulations Part 2.202: Necessary Bandwidth and Emission Bandwidth

#### For FM Mode (ChannelSpacing:12.5kHz)

Emission Designator 11K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation.

BW = 2(M+D) = 2\*(3.0 kHz + 2.5 kHz) = 11 kHz = 11KO

portion of the designator represents an FM voice transmission

Therefore, the entire designator for 12.5 kHz channel spacing FM mode is 11K0F3E.

# For FM Mode (Channel Spacing: 20kHz)

Emission Designator 16K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 5.0 kHz deviation.

BW = 2(M+D) = 2\*(3.0 kHz + 5.0 kHz) = 16 kHz = 16K0

F3E portion of the designator represents an FM voice transmission

Therefore, the entire designator for 20 kHz channel spacing FM mode is 16K0F3E.

# For FM Mode (Channel Spacing: 25kHz)

Emission Designator 16K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 5.0 kHz deviation.

BW = 2(M+D) = 2\*(3.0 kHz + 5.0 kHz) = 16 kHz = 16K0

F3E portion of the designator represents an FM voice transmission

Therefore, the entire designator for 25 kHz channel spacing FM mode is 16K0F3E.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated restrou/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



# 2.2RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for FCC ID: **2AXYD-US068SFWD**, filing to comply with Part 2, Part 90 of the Federal Communication Commission rules.

#### 2.3 TEST METHODOLOGY

The tests were performed according to following standards:

FCC Part 90 Private Land Mobile Radio Services

FCC Part 2 Frequency allocations and radio treaty matters, general rules and regulations.

TIA/EIA 603 E: March 2016 Land Mobile FM or PM Communications Equipment Measurement and

Performance Standards.

KDB579009 D03 v01: Applications Part 90 Refarming Bands.

KDB971168 D01 v03r01: Measurement Guidance For Certification Of Licensed Digital Transmitters

#### 2.4 ADDRESS OF THE TEST LABORATORY

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

#### 2.5 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories


A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE he test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.





IC-Registration No.: 24842

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.

# 2.6 SPECIAL ACCESSORIES

Not available for this EUT intended for grant.

# 2.7 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC he test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuence of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.



#### 3. SYSTEM TEST CONFIGURATION

# **3.1EUT CONFIGURATION**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

#### 3.2 EUT EXERCISE

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

# 3.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

- Uncertainty of Conducted Emission, Uc = ±3.2 dB
- Uncertainty of Radiated Emission below 1GHz, Uc = ±3.9 dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.8 dB
- Uncertainty of total RF power, conducted,  $Uc = \pm 0.8dB$
- Uncertainty of spurious emissions, conducted, Uc = ±2.7dB
- Uncertainty of Occupied Channel Bandwidth: Uc = ±2 %
- Uncertainty of Frequency: Uc = ±2 %
- Uncertainty of FM deviation: Uc=±2 %
- Uncertainty of Audio Level: Uc=±0.98dB
- Uncertainty of Modulation Limiting: Uc=0.42 %
- Uncertainty of Transient Frequency Behavior: Uc=6.8%

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC who test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuence of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



# 3.4 CONFIGURATION OF TESTED SYSTEM

Fig. 2-1 Configuration of Tested System

EUT

Table 2-1 Equipment Used in Tested System

		(R)		(2)
Item	Equipment	Model No.	Identifier	Note
1	Two-way radio	SED-6	FCC ID: 2AXYD-US068SFWD	EUT
2	Battery	BATT18L	DC 3.7V 1800mAh	Accessory
3	Charger	N/A	N/A	Accessory
4	Back clip	N/A	N/A	Accessory
5	Earphone	N/A	N/A	Accessory

Note: The battery is full-charged during the test

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



# 4. SUMMARY OF TEST RESULTS

Item	FCC Rules	Description Of Test	Result
1 ®	FCC PART 90	Antenna Equipment	Pass
2	§90.205& 2.1046	Maximum Transmitter Power	Pass
3	§90.207& 2.1047	Modulation Characteristic	Pass
4	§2.1047	Audio Low Pass Filter Response	Pass
5	§90.209& 2.1049	Occupied Bandwidth	Pass
6	§90.210& 2.1049	Emission Mask	Pass
7	§90.213& 2.1055	Frequency Tolerance	Pass
8	§90.214	Transmitter Frequency Behavior	Pass
9	§90.210& 2.1051	Spurious Emission on Antenna Port	Pass
10	§90.210& 2.1053	Spurious Ratiated Emission	Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



# LIST OF EQUIPMENTS USED

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	May 15, 2020	May 14, 2021
EXA Signal Analyzer	Aglient	N9020A	W1312-60196	Aug. 21, 2020	Aug. 20, 202
EXA Signal Analyzer	Aglient	N9020A	MY52090123	Sep. 03, 2020	Sep. 02, 202
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep.16, 2019	Sep.15, 2021
preamplifier	ChengYi	EMC184045SE	980508	Oct. 27, 2020	Oct. 26, 202
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	May. 17, 2019	May. 16, 202
Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-205	Jun. 09, 2020	Jun. 08, 202
HORN ANTENNA	EM	EM-AH-10180	/	Feb. 28, 2020	Feb. 27, 202
HORN ANTENNA	EM	EM-AH-10180	/ 0	Feb. 26, 2021	Feb. 25, 202
SIGNAL GENERATOR	AGILENT	E4421B	MY43351603	Jun. 09, 2020	Jun. 08, 202
SIGNAL GENERATOR	R&S	SMT03	A0304261	Jun. 09, 2020	Jun. 08, 202
ANTENNA	SCHWARZBECK	VULB9168	VULB9168-494	Jan. 08, 2021	Jan. 07, 2023
ANTENNA	SCHWARZBECK	VULB9168	D69250	Sep. 20, 2019	Sep. 19, 202
Modulation Domain Analyzer	HP	53310A	3121A02467	Jul. 03, 2020	Jul. 02, 2022
RF Communication Test Set	НР	8920B	· - C	Sep. 03, 2020	Sep. 02, 202
Attenuator	Weinachel Corp	58-30-33	ML030	Oct. 26, 2020	Oct. 25, 202
RF Cable	R&S	1#	-60	Each time	N/A
RF Cable	R&S	2#		Each time	N/A
Fliter-UHF	Microwave	N25155M2	498705	May. 11, 2020	May. 10, 202
Fliter-VHF	Microwave	N26460M1	498703	May. 11, 2020	May. 10, 202

NOTE: 8920B can generate audio modulation frequency.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



# 5. DESCRIPTION OF TEST MODES

#### **RF TEST MODES**

The EUT (**Two-way radio**) has been tested under normal operating condition. (The top channel, the middle channel and the bottom channel) are chosen for testing at each channel separation.

NO.	TEST MODE DESCRIPTION	CHANNEL SEPARATION	
1	TX Bottom channel	12.5 kHz	
2	TX Middle channel	12.5 kHz	
3	TX Middle channel	12.5 kHz	
4	TX Top channel	12.5 kHz	

#### Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.
- 4. Manufacturers use computer PC programming software to switch and operate frequency points, refer to the instructions for details

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Factorian (Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of ACC the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.



#### 6. FREQUENCY TOLERANCE

#### **6.1 PROVISIONS APPLICABLE**

- a). According to FCC §2.1055 and §90.213, the frequency stability shall be measured with variation of ambient temperature from −30°C to +50°C centigrade.
- b). According to FCC Part 2 Section 2.1055(d)(2), for battery powered equipment, the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point, which is specified by the manufacturer.
- c). According to FCC Part 90 Section 90.213, the frequency tolerance must be maintained within 0.00025% for 12.5 KHz channel separation and 0.0001% for 6.25 KHz channel separation.

#### **6.2 MEASUREMENT PROCEDURE**

#### 6.2.1 Frequency stability versus environmental temperature

- 1. Setup the configuration per figure 1 for frequencies measurement inside an environment chamber, Install new battery in the EUT.
- 2. Turn on EUT and set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1KHz and Video Resolution Bandwidth to 1KHz and Frequency Span to 50KHz.Record this frequency as reference frequency.
- 3. Set the temperature of chamber to  $50\,^{\circ}$ C. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
- 4. Repeat step 2 with a 10℃ decreased per stage until the lowest temperature -30℃ is measured, record all measured frequencies on each temperature step.


#### 6.2.2 Frequency stability versus input voltage

- Setup the configuration per figure 1 for frequencies measured at temperature if it is within 15℃ to 25℃.
   Otherwise, an environment chamber set for a temperature of 20℃ shall be used. The EUT shall be powered by DC 3.7V.
- 2. Set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1 KHz and Video Resolution Bandwidth to 1KHz. Record this frequency as reference frequency.
- 3. Supply the EUT primary voltage at the operating end point which is specified by manufacturer and record the frequency.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written exporization of AGC, he test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.



# **6.3 TEST SETUP BLOCK DIAGRAM**

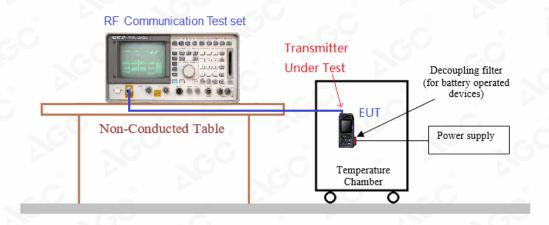

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written appropriation of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



#### **6.4 TEST RESULTS**

(1) Frequency stability versus input voltage (Supply nominal voltage is 3.70V)-2W-12.5KHz

Environment	Power Supply	8	Reference Frequency				
Temperature(°C)	(V)	450.025MHz	453.2125MHz	458.2125MHz	469.975MHz	ppm	
50	DC 3.70	0.866	0.653	0.979	0.830		
40	DC 3.70	0.604	0.857	0.513	0.343		
30	DC 3.70	0.661	0.852	0.980	0.659	(3)	
20	DC 3.70	0.976	0.759	0.504	0.642		
10	DC 3.70	0.930	0.935	0.803	0.693	2.5	
0	DC 3.70	0.852	0.517	0.583	0.643		
-10	DC 3.70	0.861	0.547	0.944	0.332		
-20	DC 3.70	0.969	0.799	0.861	0.766		
-30	DC 3.70	0.956	0.591	0.946	0.846		
Result			Pass	7.0	8		


(2) Frequency stability versus input voltage (Battery endpoint is 3.15V) -2W-12.5KHz

Environment	Power Supply		Reference	Frequency		Limit:
Temperature(°C)	(V)	450.025MHz	453.2125MHz	458.2125MHz	469.975MHz	ppm
50	DC 3.15	0.533	0.960	0.529	0.906	@
40	DC 3.15	0.592	0.779	0.746	0.404	C
30	DC 3.15	0.655	0.904	0.544	0.702	
20	DC 3.15	0.784	1.078	0.984	0.610	
10	DC 3.15	0.896	0.959	0.643	0.747	2.5
0	DC 3.15	0.821	0.620	0.597	0.673	
-10	DC 3.15	0.691	0.714	0.908	0.589	
-20	DC 3.15	0.885	0.595	0.651	0.857	
-30	DC 3.15	0.547	0.548	0.566	0.527	
Result		-6	Pass		20	

Note: 1.Battery terminal voltage is declared and specified by the manufacturer.

2. All test values are in "ppm"

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated restriction. Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter perhorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





#### 7. EMISSION BANDWIDTH

#### 7.1 PROVISIONS APPLICABLE

For FCC Part 90 requirements:

The authorized bandwidth shall be 11.25 KHz for 12.5 KHz channel separation and 6 KHz for 6.25 KHz channel separation.


#### 7.2 MEASUREMENT PROCEDURE


- 1). The EUT was placed on a turn table which is 0.8m above ground plane.
- 2). The EUT was modulated by 2.5 KHz Sine wave audio signal, The level of the audio signal employed is 16 dB greater than that necessary to produce 50% of rated system deviation. Rated system deviation is 2.5 kHz (12.5 kHz channel spacing).
  - 3). Set SPA Center Frequency = fundamental frequency, RBW=100Hz.VBW= 300 Hz, Span =50 KHz.
  - 4). Set SPA Max hold. Mark peak, -26 dB.

#### 7.3 TEST SETUP BLOCK DIAGRAM

#### Radiation method:

#### Radiated Below1GHz

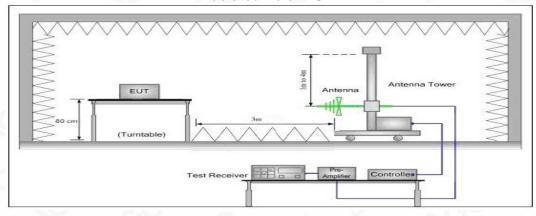


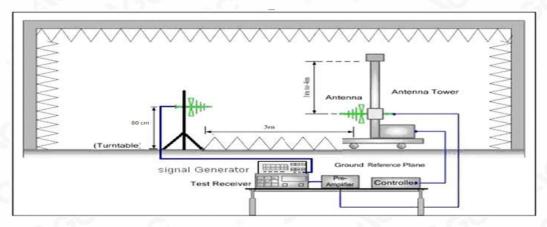


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the condicated restrouting portion of Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



# **Radiated Above 1 GHz**

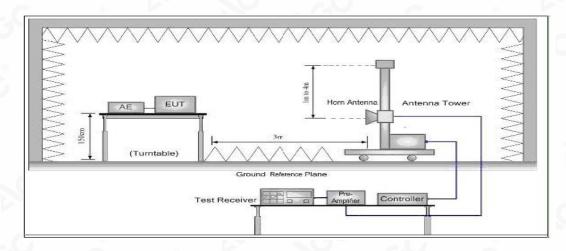

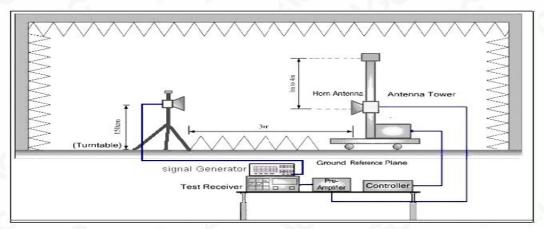

#### Conduction method:




Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Residual Residual



# 7.4 MEASUREMENT RESULT

Emission Bandwidth Measurement Result										
Operating Frequency		12.5 KHz Channel Separation								
Operating Frequency	Occupied Bandwidth	Emission Bandwidth	Limits	Result						
450.025MHz	9.996 KHz	10.18 KHz	11.25 KHz	Pass						
453.2125MHz	9.998 KHz	10.17 KHz	11.25 KHz	Pass						
458.2125MHz	9.999 KHz	10.18 KHz	11.25 KHz	Pass						
469.975MHz	9.998 KHz	10.17 KHz	11.25 KHz	Pass						


# Occupied bandwidth of Bottom Channel (450.025MHz)-2W

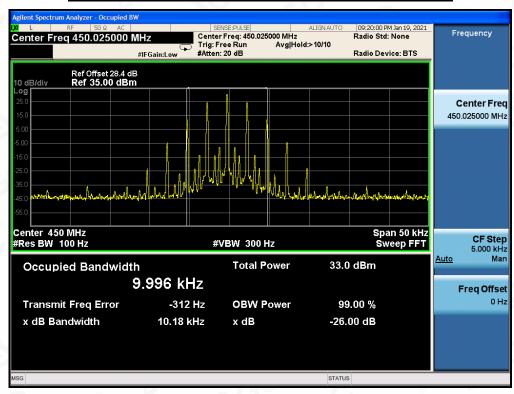


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the content of the report is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



# Occupied bandwidth of Middle Channel (453.2125MHzMHz)-2W

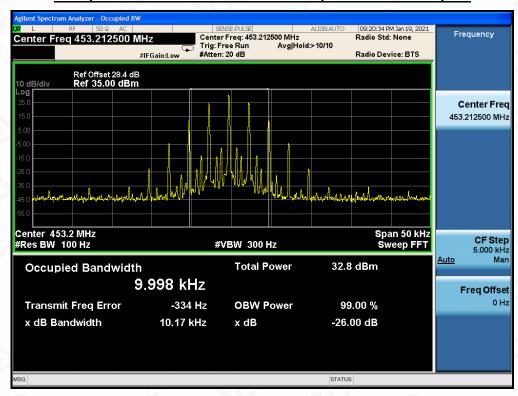


# Occupied bandwidth of Middle Channel (458.2125MHz)-2W

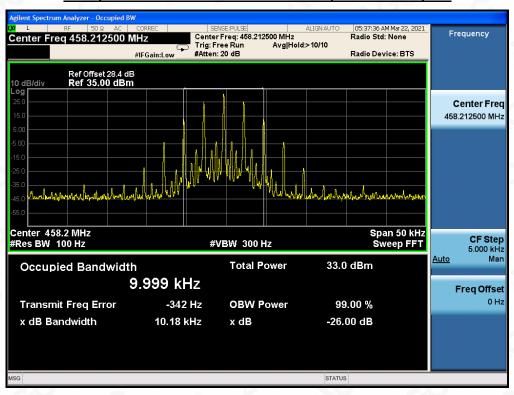

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festivo/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written portorization of AGC the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



# Occupied bandwidth of Top Channel (469.975MHz)-2W

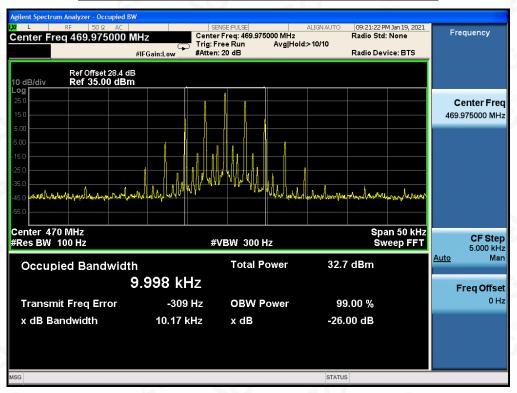

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Pesthod/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written portion of AGC where the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



#### 8. UNWANTED RADIATION

#### **8.1 PROVISIONS APPLICABLE**

According to FCC §2.1049 and §90.210, the power of each unwanted emission shall be less than Transmitted Power as specified below for transmitters designed to operate with each channel separation.


Emission Mask D -for 12.5 KHz Channel Separation:

- (1).On any frequency removed from the center of the authorized bandwidth fo to 5.625 KHz removed from fo: Zero dB.
- (2).On any frequency removed from the center of the authorized bandwidth by a displacement Frequency (fd in KHz) fo of more than 5.625 KHz but no more than 12.5 KHz: At least 7.27(fd-2.88 KHz) dB
- (3).On any frequency removed from the center of the authorized bandwidth by a displacement Frequency (fd in KHz)fo of more than 12.5 KHz: At least 50+10 log(P) dB or 70 dB, whichever is lesser attenuation.

#### **8.2 MEASUREMENT PROCEDURE**

- (1)On a test site, the EUT shall be placed on a turntable, and in the position closest to the normal use as declared by the user.
- (2) The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the transmitter.
- (3)The output of the antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.
- (4) The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
- (5)The test antenna shall be raised and lowered through the specified range of height until the measuring receiver detects a maximum signal level.
- (6)The transmitter shall than be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- (7)The test antenna shall be raised and lowered again through the specified range of height until the measuring receiver detects a maximum signal level.
- (8) The maximum signal level detected by the measuring receiver shall be noted.
- (9) The measurement shall be repeated with the test antenna set to horizontal polarization.
- (10) Replace the antenna with a proper Antenna (substitution antenna).
- (11) The substitution antenna shall be oriented for vertical polarization and, if necessary, the length of the substitution antenna shall be adjusted to correspond to the frequency of transmitting.
- (12) The substitution antenna shall be connected to a calibrated signal generator.
- (13)If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- (14)The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.
- (15)The input signal to substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver.
- (16)The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
- (17)The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC he test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.







# 8.3 TEST SETUP BLOCK DIAGRAM


# SUBSTITUTION METHOD: (Radiated Emissions) Radiation method:

# Radiated Below1GHz

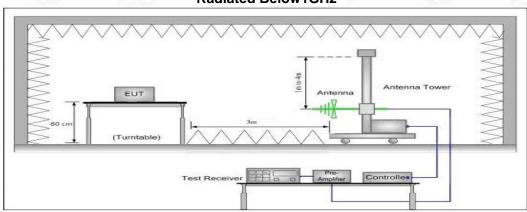

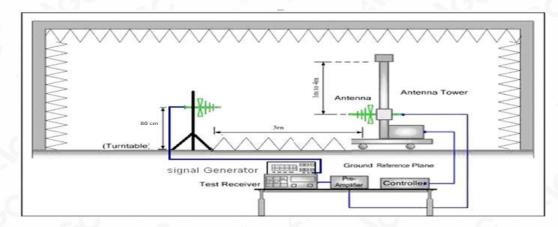


#### **Radiated Above 1 GHz**

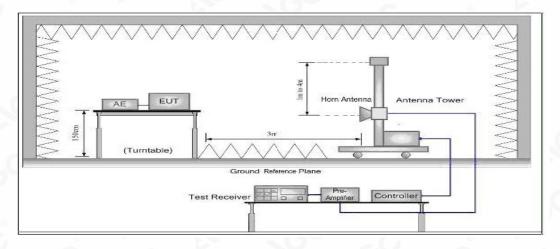

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Residual Residual



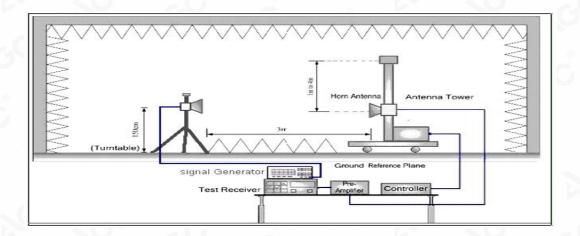

#### **8.4 MEASUREMENT RESULTS:**

#### **Applicable Standard**

FCC §2.1053 and §90.210

On any frequency removed from the center of the authorized bandwidth by a displacement

Frequency (fd in KHz)for of more than 12.5 KHz: at least 50+10 log(P) dB or 70 dB, whichever is lesser attenuation.

#### **Test Procedure**

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz for below 1GHz, and 1MHz for above 1GHz. Sufficient scans were taken to show any out of band emissions up to 10 harmonic.

In the semi-anechoic chamber, setup as illustrated above the DUT placed on the 0.8m height of Turn Table, rotated the table 45 degree each interval to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power for each degree interval. The "Read Value" is the spectrum reading of maximum power value.

The substitution antenna is substituted for DUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the Measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.


EIRP = "Read Value" + Measured substitution value + 2.15.

Limit: At least 50+10 log (P) =50+10log (2) =53.01 (dB)—2W 33.01-53.01=-20dBm

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written exporization of AGE, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.



# Measurement Result for 12.5 KHz Channel Separation @ 450.025MHz-2W-Horizontal

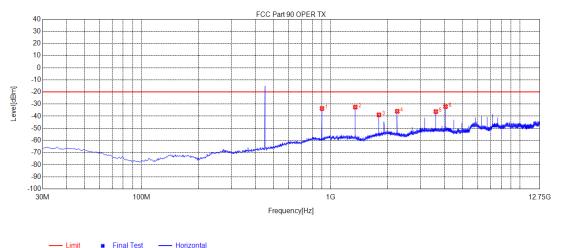


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	900.0900	-76.61	-33.67	-20.00	13.67	42.94	113	Horizontal
2	1350.1850	-28.96	-32.48	-20.00	12.48	-3.52	169	Horizontal
3	1800.2550	-37.92	-38.88	-20.00	18.88	-0.96	169	Horizontal
4	2250.3250	-35.48	-35.94	-20.00	15.94	-0.46	9	Horizontal
5	3600.5351	-40.48	-36.19	-20.00	16.19	4.29	337	Horizontal
6	4050.6051	-36.70	-32.08	-20.00	12.08	4.62	103	Horizontal

# RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Psychological Psycholo



# Measurement Result for 12.5 KHz Channel Separation @ 450.025MHz-2W-Vertical

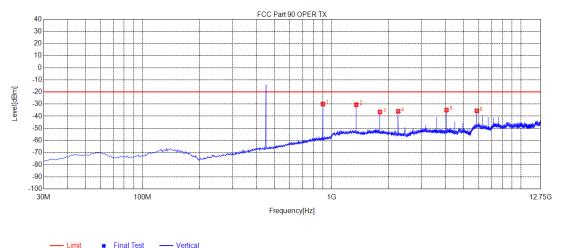


9	NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
	1	900.0900	-73.24	-29.93	-20.00	9.93	43.31	350	Vertical
	2	1350.1850	-31.72	-30.55	-20.00	10.55	1.17	227	Vertical
Ī	3	1800.2550	-37.58	-36.47	-20.00	16.47	1.11	227	Vertical
Ī	4	2250.3250	-35.62	-35.96	-20.00	15.96	-0.34	49	Vertical
	5	4050.6051	-38.24	-34.97	-20.00	14.97	3.27	96	Vertical
	6	5850.8851	-45.05	-35.57	-20.00	15.57	9.48	40	Vertical

RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



# Measurement Result for 12.5 KHz Channel Separation @ 453.2125MHzMHz-2W-Horizontal

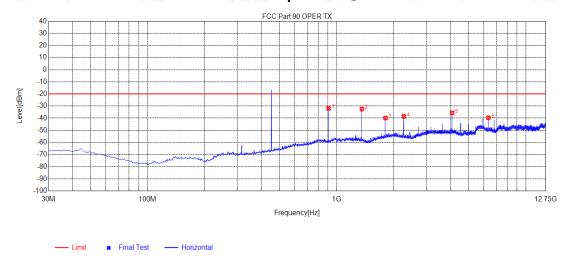


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	906.8800	-74.97	-31.88	-20.00	11.88	43.09	65	Horizontal
2	1359.5860	-28.85	-32.35	-20.00	12.35	-3.50	160	Horizontal
3	1813.1813	-38.96	-39.83	-20.00	19.83	-0.87	150	Horizontal
4	2265.6016	-37.96	-38.48	-20.00	18.48	-0.52	85	Horizontal
5	4078.8079	-40.13	-35.58	-20.00	15.58	4.55	272	Horizontal
6	6344.4344	-50.92	-39.60	-20.00	19.60	11.32	299	Horizontal

# **RESULT: PASS**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



# Measurement Result for 12.5 KHz Channel Separation @ 453.2125MHzMHz-2W-Vertical

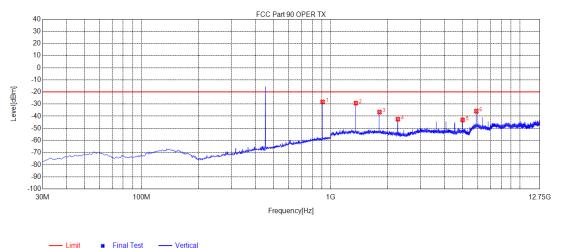


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	906.8800	-71.61	-28.23	-20.00	8.23	43.38	6	Vertical
2	1359.5860	-30.44	-29.21	-20.00	9.21	1.23	173	Vertical
3	1813.1813	-37.69	-36.63	-20.00	16.63	1.06	154	Vertical
4	2266.7767	-42.08	-42.47	-20.00	22.47	-0.39	182	Vertical
5	4985.9986	-46.99	-43.11	-20.00	23.11	3.88	313	Vertical
6	5892.0142	-45.75	-35.87	-20.00	15.87	9.88	275	Vertical

# RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pseudo/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written perhorization of AGC who he test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



# Measurement Result for 12.5 KHz Channel Separation @ 458.2125MHz-2W-Horizontal

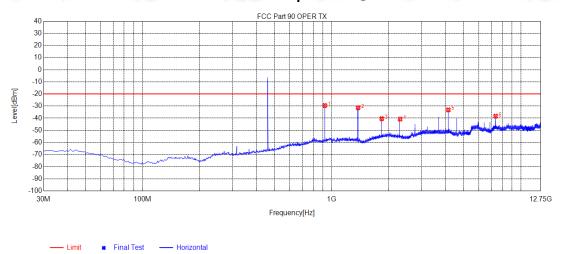


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	920.4600	-72.95	-29.57	-20.00	9.57	43.38	47	Horizontal
2	1380.7381	-27.90	-31.36	-20.00	11.36	-3.46	187	Horizontal
3	1840.2090	-39.76	-40.43	-20.00	20.43	-0.67	150	Horizontal
4	2300.8551	-40.10	-40.76	-20.00	20.76	-0.66	9	Horizontal
5	4139.9140	-37.55	-33.16	-20.00	13.16	4.39	355	Horizontal
6	7360.9111	-51.43	-38.32	-20.00	18.32	13.11	224	Horizontal

# RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pseudo/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written perhorization of AGC who he test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



# Measurement Result for 12.5 KHz Channel Separation @458.2125MHz-2W-Vertical

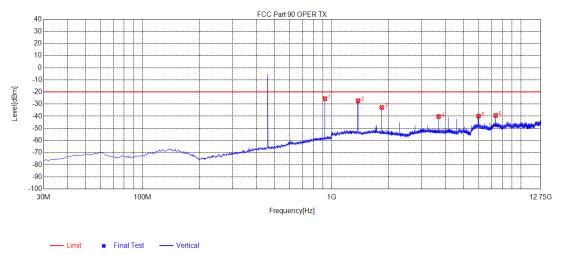


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	920.4600	-69.06	-25.54	-20.00	5.54	43.52	6	Vertical
2	1380.7381	-28.57	-27.20	-20.00	7.20	1.37	174	Vertical
3	1840.2090	-33.75	-32.78	-20.00	12.78	0.97	155	Vertical
4	3680.4430	-43.43	-40.29	-20.00	20.29	3.14	350	Vertical
5	5980.1480	-50.66	-39.92	-20.00	19.92	10.74	276	Vertical
6	7360.9111	-52.74	-39.35	-20.00	19.35	13.39	296	Vertical

# **RESULT: PASS**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



# Measurement Result for 12.5 KHz Channel Separation @ 469.975MHz-2W-Horizontal

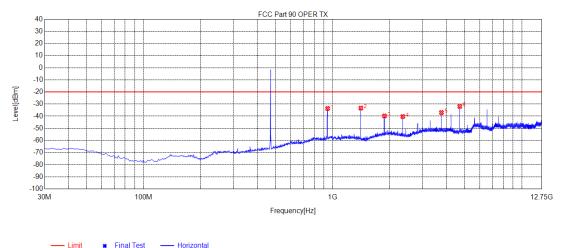

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	940.8300	-77.46	-33.63	-20.00	13.63	43.83	19	Horizontal
2	1410.1160	-29.93	-33.33	-20.00	13.33	-3.40	170	Horizontal
3	1880.1630	-39.45	-39.82	-20.00	19.82	-0.37	114	Horizontal
4	2350.2100	-39.44	-40.29	-20.00	20.29	-0.85	28	Horizontal
5	3760.3510	-41.48	-37.00	-20.00	17.00	4.48	256	Horizontal
6	4700.4450	-35.49	-31.91	-20.00	11.91	3.58	28	Horizontal


# RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.

/Inspection The test results



# Measurement Result for 12.5 KHz Channel Separation @ 469.975MHz-2W-Vertical

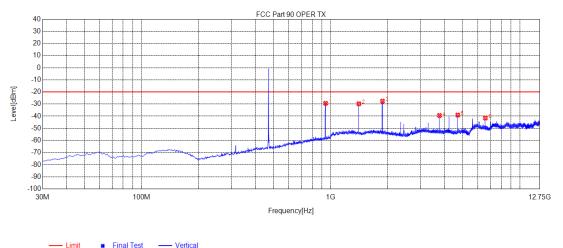


3	NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
Ī	1	940.8300	-73.10	-29.37	-20.00	9.37	43.73	12	Vertical
	2	1410.1160	-31.30	-29.74	-20.00	9.74	1.56	172	Vertical
Ī	3	1880.1630	-28.41	-27.58	-20.00	7.58	0.83	144	Vertical
	4	3760.3510	-42.62	-39.44	-20.00	19.44	3.18	266	Vertical
Ī	5	4700.4450	-42.47	-39.07	-20.00	19.07	3.40	332	Vertical
	6	6579.4579	-53.25	-41.52	-20.00	21.52	11.73	4	Vertical

# RESULT: PASS

#### Note:

- 1. Factor=Antenna Factor + Cable loss. (Below 1GHz)
- 2. Factor=Antenna Factor+ Cable loss-Pre-amplifier.(Above 1 GHz)
- 3. Margin=Limit- Level

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Sedicated Pestal Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuence of Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





#### 8.5 EMISSION MASK PLOT

The detailed procedure employed for Emission Mask measurements are specified as following:


- -Connect the equipment as illustrated.
- -Spectrum set as follow:
- Centre frequency = fundamental frequency, Span=50KHz for 12.5kHz and 25kHz channel spacing, RBW=100Hz, VBW=300Hz for 12.5kHz, RBW=300Hz, VBW=1000Hz for 25kHz,Sweep = auto, Detector function = peak, Trace = max hold
- Key the transmitter, and set the level of the unmodulated carrier to a full scale reference line. This is the 0dB reference for the measurement.
- Modulate the transmitter with a 2500 Hz sine wave at an input level 16 dB greater than that necessary to produce 50% of rated system deviation(Rated system deviation is 2.5 kHz for 12.5kHz channel spacing).
   The input level shall be established at the frequency of maximum response of the audio modulating circuit.
- 4. Transmitters employing digital modulation techniques that bypass the limiter and the audio low-pass filter shall be modulated as specified by the manufacturer
- 5. Measure and record the results in the test report.




Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Residual Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written exporization of AGE, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.



#### The Worst Emission Mask for (450.025MHz) of 12.5 KHz channel Separation (2W)

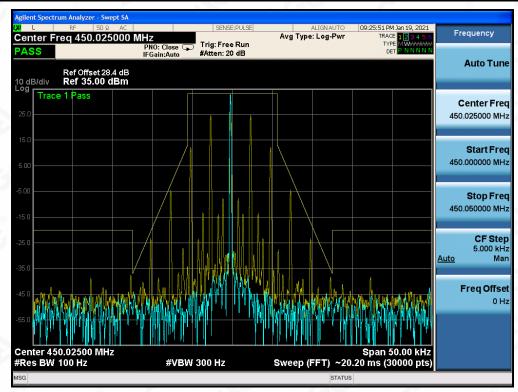


# The Worst Emission Mask for (453.2125MHz MHz) of 12.5 KHz channel Separation (2W)

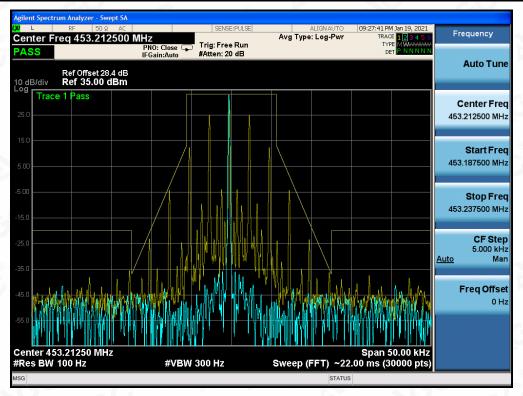


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Festivo/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



### The Worst Emission Mask for (458.2125 MHz) of 12.5 KHz channel Separation (2W)

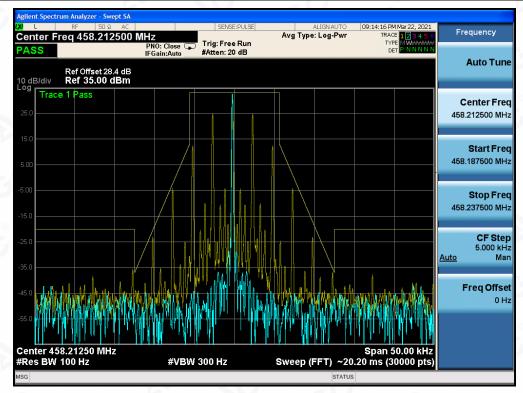

### The Worst Emission Mask for (469.975MHz) of 12.5 KHz channel Separation (2W)

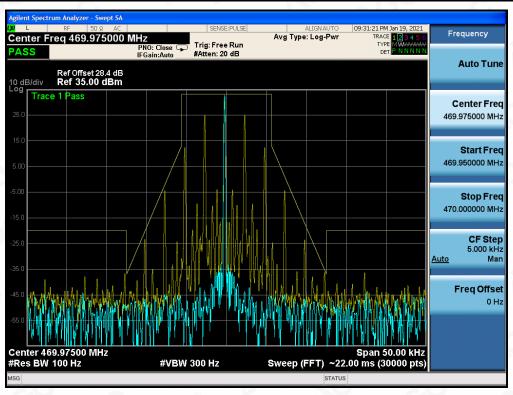

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



### 9.MODULATION CHARACTERISTICS

### 9.1 PROVISIONS APPLICABLE

According to FCC§2.1047 and §90.207, for Voice Modulation Communication Equipment, the frequency response of the audio modulation circuit over a range of 100 to 5000Hz shall be measured.

### 9.2 MEASUREMENT METHOD

#### 9.2.1 Modulation Limit


- (1). Configure the EUT as shown in figure 1, adjust the audio input for 60% of rated system deviation at 1KHz using this level as a reference (0dB) and vary the input level from -20 to +20dB. Record the frequency deviation obtained as a function of the input level.
- (2). Repeat step 1 with input frequency changing to 300, 1000, 1500 and 3000Hz in sequence.

### 9.2.2 Audio Frequency Response

- (1). Configure the EUT as shown in figure 1.
- (2). Adjust the audio input for 20% of rated system deviation at 1 KHz using this level as a reference (0 dB).
- (3). Vary the Audio frequency from 100 Hz to 10 KHz and record the frequency deviation.
- (4). Audio Frequency Response = 20log10 (Deviation of test frequency/Deviation of 1 KHz reference).



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the condicated restrouting portion of Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



/Inspection he test results he test report.




### 9.3 MEASUREMENT RESULT

### **TEST RESULT TS FOR 2W**

### (A). MODULATION LIMIT:

**Bottom Channel @ 12.5 KHz Channel Separations** 

Modulation Level (dB)	Peak Freq. Deviation At 300 Hz	Peak Freq. Deviation At 1000 Hz	Peak Freq. Deviation At 1500 Hz	Peak Freq. Deviation At 3000 Hz
-20	0.13	0.26	0.42	0.59
-15	0.43	0.55	0.63	0.73
-10	0.58	0.69	0.78	0.89
-5	0.66	0.78	0.93	1.03
0	0.74	0.85	1.05	1.22
+5	0.83	1.05	1.13	1.34
+10	0.93	1.10	1.28	1.40
+15	1.11	1.22	1.31	1.53
+20	1.08	1.17	1.29	1.48

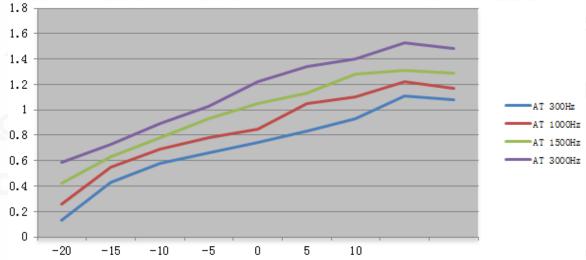

Note: 1. All the modes had been tested, but only the worst data recorded in the report.

2. The data unit evaluated in this report is "KHz"

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AG presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issued further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



### (B). AUDIO FREQUENCY RESPONSE:


**Bottom Channel @ 12.5 KHz Channel Separations** 

Frequency (Hz)	Deviation (KHz)	Audio Frequency
	, ,	Response(dB)
100		
200		
300	0.45	-10.91
400	0.68	-7.32
500	0.84	-5.49
600	1.01	-3.89
700	1.15	-2.76
800	1.33	-1.50
900	1.4	-1.05
1000	1.58	0.00
1200	1.96	1.87
1400	2.03	2.18
1600	2.11	2.51
1800	2.23	2.99
2000	2.41	3.67
2400	2.55	4.16
2500	2.63	4.43
2800	2.73	4.75
3000	2.88	5.21
3200	2.91	5.30
3600	1.79	1.08
4000	1.69	0.58
4500	1.53	-0.28
5000	1.43	-0.87
5500	0.73	-6.71
6000	0.53	-9.49
6500	0.41	-11.72
7000	0.28	-15.03
7500	0.09	-24.89
9000		0
10000	- D-	0
14000		-6
18000	®	
20000		
30000	V 2.0	==

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




# Frequency Response of Bottom Channel 12.5 KHz Channel Separations

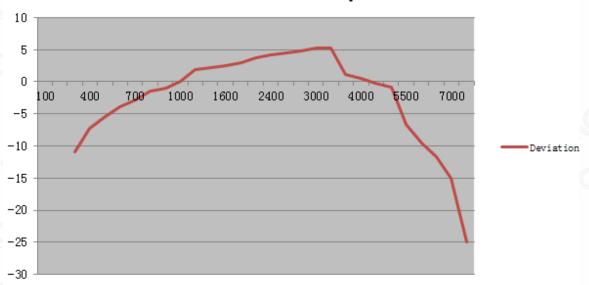

Note: 1. All the modes had been tested, but only the worst data recorded in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





# 10.MAXIMUMN TRANSMITTER POWER (CONDUCTED OUTPUT POWER) PEAK POWER 10.1 PROVISIONS APPLICABLE

Per FCC §2.1046 and §90.205: Maximum ERP is dependent upon the station's antenna HAAT and required service area.

#### **10.2 TEST PROCEDURE**


The RF output of Two-way radiowas conducted to a spectrum analyzer through an appropriate attenuator. In the semi-anechoic chamber, setup as illustrated above the DUT placed on the 0.8m height of Turn Table, rotated the table 45 degree each interval to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power for each degree interval. The "Read Value" is the spectrum reading of maximum power value.

The substitution antenna is substituted for DUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the Measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.

EIRP = "Read Value" + Measured substitution value + 2.15.


### **10.3 TEST CONFIGURATION**

### **Conducted Output Power:**

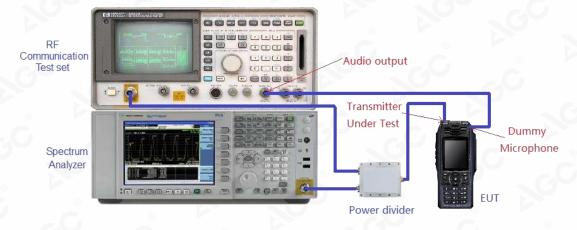

### **Effective Radiated Power**

#### Radiated Below1GHz

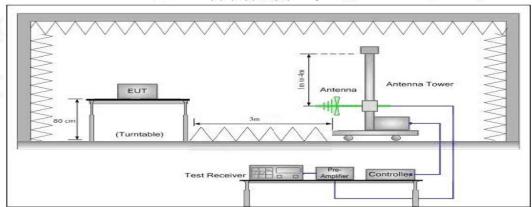


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the condicated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.


Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd


Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



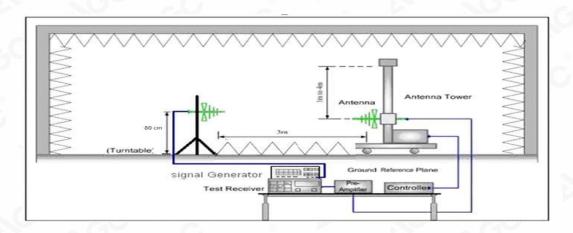

### **Radiated Above 1 GHz**

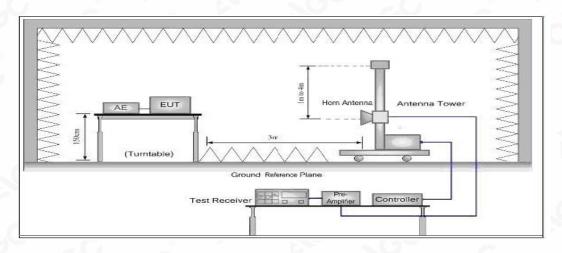

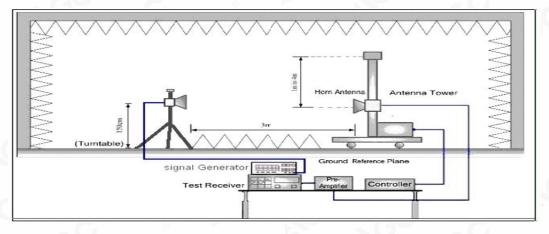

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



### **10.4 TEST RESULT**

The maximum Conducted Power (CP) for UHF is

Analog: 2W for 12.5 KHz Channel Separation UHF

Calculation Formula: CP = R + A + L

Note:

(1) CP: The final Conducted Power

(2) R: The reading value from spectrum analyzer

(3) A: The attenuation value of the used attenuator

(4) L: The loss of all connection cables

(5) Measurement Result=Peak Power(Max)

(6) All polarity modes have been evaluated, and only vertical polarity is recorded as the worst data in the report.

Conducted Power Measurement Results			
Channel Separation	Channel	Measurement Result (dBm)	
	Channel	For 33.01dBm(2W)	
12.5 KHz	Bottom(450.025MHz)	32.70	
	Middle(453.2125MHzMHz)	32.84	
	Middle (458.2125MHz )	32.93	
	Top(469.975MHz)	32.86	

Radiated Power Measurement Results			
Channel Consession	Channel	Measurement Result (dBm)	
Channel Separation	Channel	For 33.01dBm(2W)	
	Bottom(450.025MHz)	32.01	
40 5 1/1  -	Middle(453.2125MHzMHz)	32.24	
12.5 KHz	Middle (458.2125MHz )	32.33	
	Top(469.975MHz)	32.25	

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the condicated restrouting portion of Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



### 11.SPURIOUS EMISSION ON ANTENNA PORT

#### 11.1 PROVISIONS APPLICABLE

Please refer to FCC 47 CFR 2.1051, 2.1057 & 90.210 for specification details. Emissions shall be attenuated below the mean output power of the transmitter as follows:

FCC Rules	Attenuation Limit (dBc)
§ 90.210	At least 50 + 10 log (P) dB

50 +10 log (Pwatts)

Note: In general, the worse case attenuation requirement shown above was applied.

Calculation: Limit (dBm) =EL-50-10log10 (TP)

EL is the emission level of the Output Power expressed in dBm,


In this application, the EL is P(dBm)

Limit (dBm) = P(dBm)-50-10 log (Pwatts) = -20dBm

#### 11.2 TEST PROCEDURE

- 1. The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation.
- 2. The resolution bandwidth of the spectrum analyzer was set to 100 kHz. Sufficient scans were taken to show any out of band emission up to 10th . Harmonic for the lower and the highest frequency range.
- 3. Set RBW 100 kHz, VBW 300 kHz in the frequency band 30MHz to 1GHz, while set RBW=1MHz.VBW=3MHz from the 1GHz to 10th Harmonic.
- 4. The audio input was set the unmodulated carrier, the resulting picture is print out for each channel separation.

### 11.3 TEST CONFIGURATION

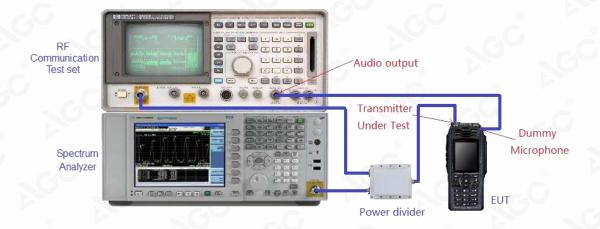


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the continuous process of the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



### 11.4 TEST RESULT

# Conducted Spurious Emission (worst) @ 450.025MHz With 12.5 KHz Channel Separation-2W 30MHz-1GHz

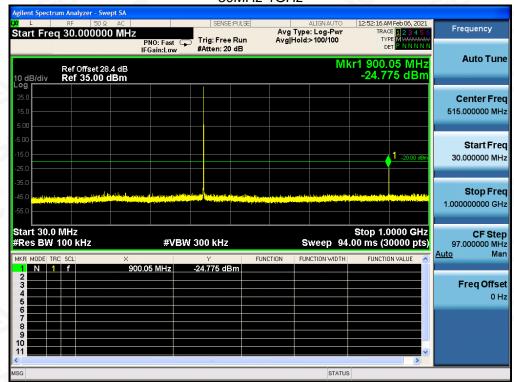


# Conducted Spurious Emission (worst) @ 450.025MHz With 12.5 KHz Channel Separation-2W 1GHz-12.75GHz



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter portionization of AGC where the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



## Conducted Spurious Emission (worst) @ 453.2125MHz MHz With 12.5 KHz Channel Separation-2W 30MHz-1GHz

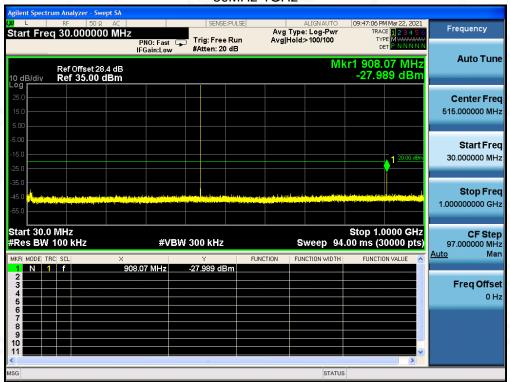


# Conducted Spurious Emission (worst) @ 453.2125MHz MHz With 12.5 KHz Channel Separation-2W 1GHz-12.75GHz



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Pestho/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



## Conducted Spurious Emission (worst) @ 458.2125MHz With 12.5 KHz Channel Separation-2W 30MHz-1GHz

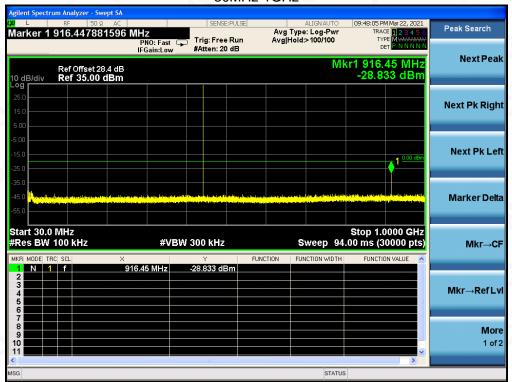


# Conducted Spurious Emission (worst) @ 458.2125 MHz With 12.5 KHz Channel Separation-2W 1GHz-12.75GHz



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Pestho/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



## Conducted Spurious Emission (worst) @ 469.975MHzWith 12.5 KHz Channel Separation-2W 30MHz-1GHz

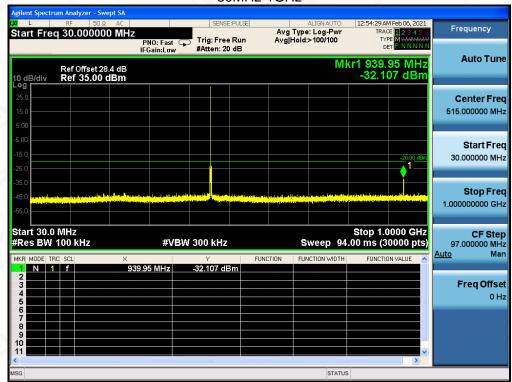

# Conducted Spurious Emission (worst) @ 469.975MHzWith 12.5 KHz Channel Separation-2W 1GHz-12.75GHz



Note: All the test frequencies was tested, but only the worst data be recorded in this part.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festivo/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




### 12.TRANSMITTER FREQUENCY BEHAVIOR

### 12.1PROVISIONS APPLICABLE

FCC §90.214

	Maniana 6	All equipment	
Time intervals 1, 2	Maximum frequency difference <sup>3</sup>	150 to 174 MHz	421 to 512 MHz
Transient Frequency Behavior for Equipm	ent Designed to Operate	on 25 kHz Channels	
t <sub>1</sub> <sup>4</sup>	± 25.0 kHz ± 12.5 kHz ± 25.0 kHz	5.0 ms 20.0 ms 5.0 ms	10.0 ms 25.0 ms 10.0 ms
Transient Frequency Behavior for Equipme	ent Designed to Operate	on 12.5 kHz Channels	
t <sub>1</sub> <sup>4</sup>	± 12.5 kHz ± 6.25 kHz ± 12.5 kHz	5.0 ms 20.0 ms 5.0 ms	10.0 ms 25.0 ms 10.0 ms
Transient Frequency Behavior for Equipme	nt Designed to Operate	on 6.25 kHz Channels	•
t <sub>1</sub> <sup>4</sup>	± 6.25 kHz ± 3.125 kHz ± 6.25 kHz	5.0 ms 20.0 ms 5.0 ms	10.0 ms 25.0 ms 10.0 ms

#### 12.2 TEST CONFIGURATION



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the /Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15d he test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

 $<sup>^{1}</sup>t_{on}$  is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.  $t_{1}$  is the time period immediately following  $t_{on}$ .  $t_{2}$  is the time period immediately following  $t_{1}$ .  $t_{3}$  is the time period from the instant when the transmitter is turned off until  $t_{off}$ .  $t_{off}$  is the instant when the 1 kHz test signal starts to rise.  $t_{1}$  is the instant when the end of  $t_{2}$  to the beginning of  $t_{3}$ , the frequency difference must not exceed the limits specified in  $t_{1}$  in the first specified in  $t_{2}$  is the instant when the end of  $t_{2}$  to the beginning of  $t_{3}$ , the frequency difference must not exceed the limits specified in § 90.213.

 <sup>3</sup> Difference between the actual transmitter frequency and the assigned transmitter frequency.
 4 If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.




#### **12.3 TEST METHOD**

According to TIA/EIA-603 2.2.19 requirement, as for the product different from PTT, we use test steps as follows:

- 1. Connect DUT into Test discriminator and Storage Oscilloscope and keep DUT stats ON;
- 2. Input 1kHz signal into DUT;
- 3. Set the modulation domain analyzer to trigger on the rising edge of the waveform in order to capture a single-shot turn-on of the transmitter signals;
- 4. Keep DUT in OFF state and Key the PTT;
- 5. Observe the stored oscilloscope of modulation domain analyzer. The signal trace shall be maintained within the allowable limits during the periods t1 and t2, and shall also remain within limits following t2;
- 6. Adjust the modulation domain analyzer to trigger on the falling edge of the transmitter waveform in order to capture a single-shot turn-off transmitter of the transmitter signal.
- 7. Keep the digital portable radio in ON state and unkey the PTT;
- 8. Observe the stored oscilloscope of modulation domain analyzer, The signal trace shall be maintained within the allowable limits during the period t3.
- 9. Set the signal generator to the assigned transmitter frequency and modulate it with a 1 kHz tone at  $\pm 12.5$  kHz deviation and set its output level to -100dBm.
- 10. Turn on the transmitter.
- 11. Supply sufficient attenuation via the RF attenuator to provide an input level to the stored oscilloscope
- 12. that is 40 dB below the maximum allowed input power when the transmitter is operating at its rated power level. Note this power level on the stored oscilloscope as P0.
- 13. Turn off the transmitter.
- 14. Adjust the RF level of the signal generator to provide RF power equal to P0. This signal generator RF level shall be maintained throughout the rest of the measurement.
- 15. Remove the attenuation, so the input power to the stored oscilloscope is increased by 30 dB when the transmitter is turned on.
- 16. Adjust the vertical amplitude control of the stored oscilloscope to display the 1000 Hz at ±4 divisions vertically centered on the display. Set trigger mode of the Spectrum Analyzer to "Video", and tune the "trigger level" on suitable level. Then set the "tiger offset" to -10ms for turn on and -15ms for turn off.
- 17. Turn on the transmitter and the transient wave will be captured on the screen of Spectrum Analyzer. Observe the stored display. The instant when the 1 kHz test signal is completely suppressed is considered to be ton. The trace should be maintained within the allowed divisions during the period t1 and t2.
- 18. Then turn off the transmitter, and another transient wave will be captured on the screen of Spectrum
- 19. Analyzer. The trace should be maintained within the allowed divisions during the period t3.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the condicated restrouting portion of Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.





### 12.4 DESCRIBE LIMIT LINE OF RANSMITTER FREQUENCY BEHAVIOR


ton: The switch-on instant ton of a transmitter is defined by the condition when the output power, measured at the antenna terminal, exceeds 0,1 % of the full output power (-30 dBc).

t1: period of time starting at ton and finishing according to above 11.1

t2: period of time starting at the end of t1 and finishing according to above 11.1

toff: switch-off instant defined by the condition when the output power falls below 0,1 % of the full output power (-30 dBc).

t3: period of time that finishing at toff and starting according to above 11.1

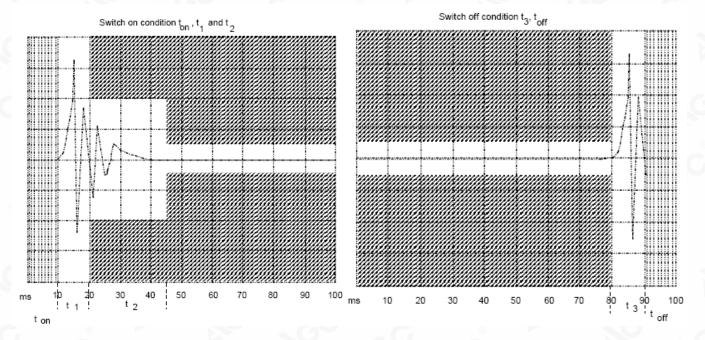


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




#### 12.5 MEASURE RESULT

Transmitter Frequency Behavior @ 12.5 KHz Channel Separation--Off to On

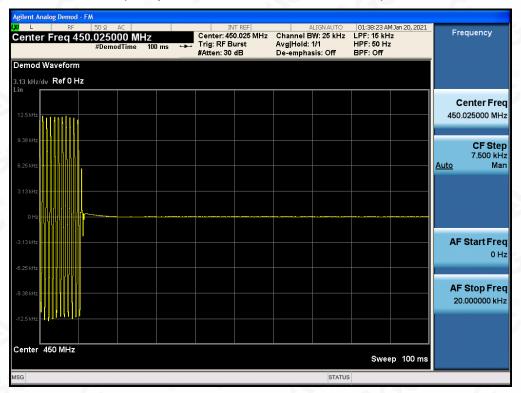

Transmitter Frequency Behavior @ 12.5 KHz Channel Separation--On to Off

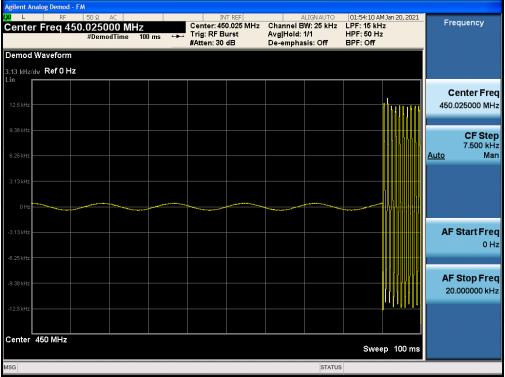

Note: All the test frequencies was tested, but only the worst data be recorded in this part.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Restrou/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



### 13.AUDIO LOW PASS FILTER RESPONSE

### 13.1.TEST LIMITS

**2.1047(a):** Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter or of all circuitry installed between the modulation limits and the modulated stage shall be submitted.

90.242(b)(8): Recommended audio filter attenuation characteristics are given below:

Audio band	Minimum Attenuation Rel. to 1 KHz Attenuation
3 –20 KHz 20 – 30 KHz	60 log <sub>10</sub> (f/3) dB where f is in KHz 50dB


### 13.2. METHOD OF MEASUREMENTS

The rated audio input signal was applied to the input of the audio low-pass filter (or of all modulation stages) using an audio oscillator, this input signal level and its corresponding output signal were then measured and recorded using the FFT Digital Spectrum Analyzer. Tests were repeated at different audio signal frequencies from 0 to 50 KHz.

### 13.3.TEST CONFIGURATION




Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Residual Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE, he test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.





13.4.TEST RESULT
BOTTOM CHANNEL @ 12.5 KHZ CHANNEL SPACING, F3E, FREQUENCY OF ALL MODULATION
STATES (TEST RESULT FOR 2W)

Audio Frequency (kHz)	Response Attenuation (dB)	Limit (dB)
1	0	/
3	-1.98	0.00
4	-7.98	-5.00
5	-12.50	-8.87
6	-15.93	-12.04
7	-18.97	-14.72
8	-22.90	-17.04
9	-25.20	-19.08
10	-27.05	-20.92
15	-34.13	-28.00
20	-34.31	-28.00
30	-34.35	-28.00
50	-34.35	-28.00
70	-34.35	-28.00

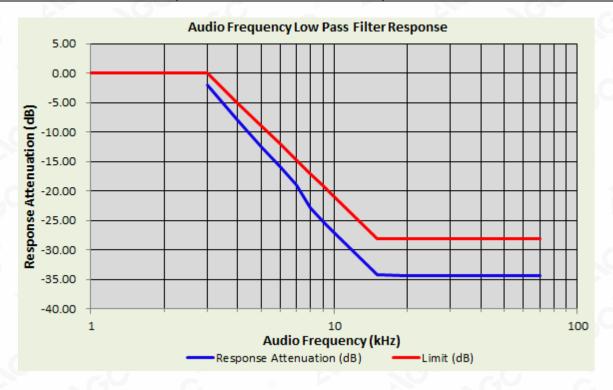


Note: All the test frequencies was tested, but only the worst data be recorded in this part.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated restrou/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



### **APPENDIX I: PHOTOGRAPHS OF SETUP**

RADIATED EMISSION BELOW 1G TEST SETUP

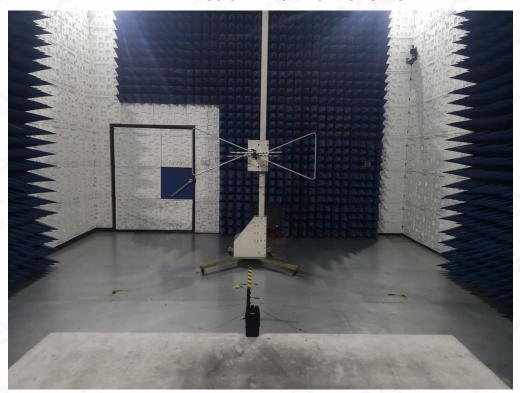


RADIATED EMISSION ABOVE 1G TEST SETUP




Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Declicated Resing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pulnorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



### CONDUCTED TEST SETUP

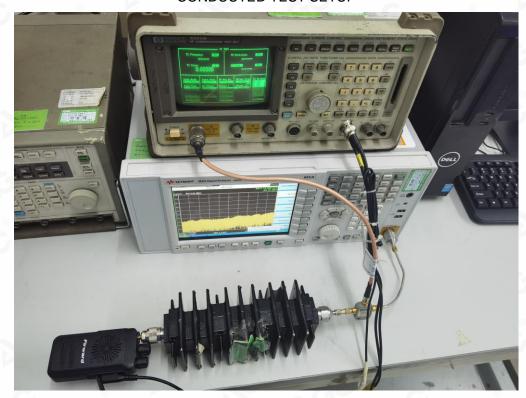

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Restrict/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written exphorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuence of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





### APPENDIX II: PHOTOGRAPHS OF EUT

Refer to the Report No.: AGC11438210101AP01

----END OF REPORT----

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the special pedicated fresh dynaspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter appropriation of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



### Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. The non-CMA report issued by AGC is only permitted to be used by the client as internal reference use and shall not be used for public demonstration purpose.
- 5. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 6. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 7. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 8. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 9. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 10. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the standard restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written explorization of AGE, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.