




## Feature

- ※ High gain
- ※ Omani-directional
- ※ Wide bandwidth

## Application

- ※ BT communication applications

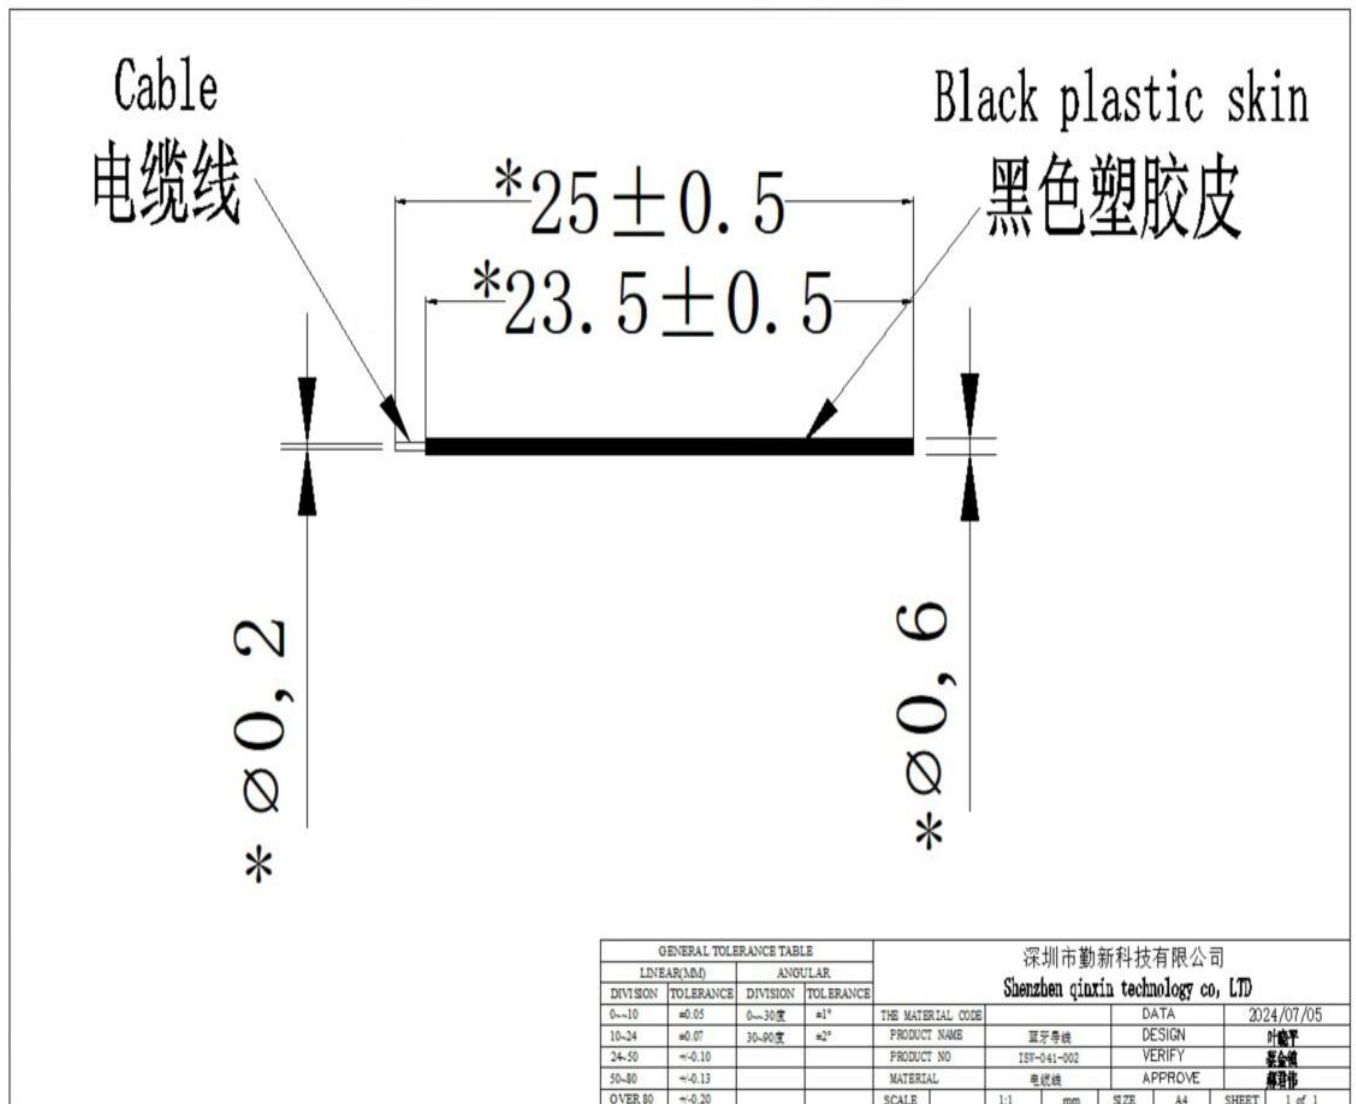



## Dimensions

CUSTOMER' S P/N			DRAWING NO	手表 804
PREPARED BY	CHECKEDBY	APPROVAL BY	S.R.NO	
			DATE:	2024.08.07



## Electric Specifications

TYPE	手表 804
Transmitter Frequency	
	BT: 2400-2500
Receiver Frequency	
	BT: 2400-2500
RF-Output Power (E.I.R.P)	
Antenna Gain	
	BT: 0.63dBi
Type of Modulation	GMSK




Passive Test For WII2.4				
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Gain (dBd)
2400	18.67	-7.36	-1.33	-3.48
2410	19.67	-7.06	-1.13	-3.28
2420	20.15	-6.55	-1.03	-3.14
2430	20.15	-6.55	-1.03	-3.14
2440	21.15	-6.75	-1.09	-3.24
2450	21.05	-6.74	-1.08	-3.23
2460	21.32	-6.21	-1.00	-3.06
2470	20.15	-6.55	-1.03	-3.14
2480	21.15	-6.75	-1.09	-3.24
2490	21.05	-6.74	-1.08	-3.23
2500	21.85	-6.21	-1.23	-3.30

2400.000MHz




2400.000MHz H

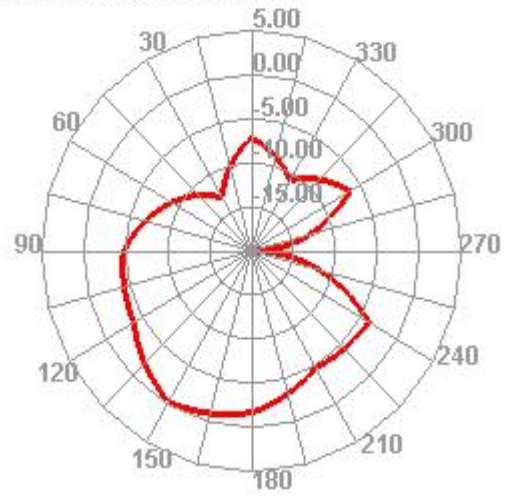






2400.000MHz E1

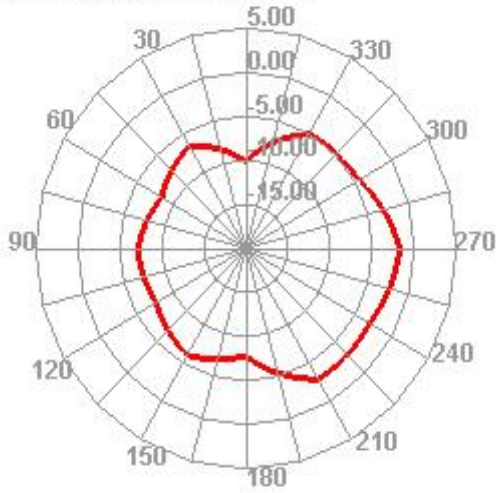


2400.000MHz E2

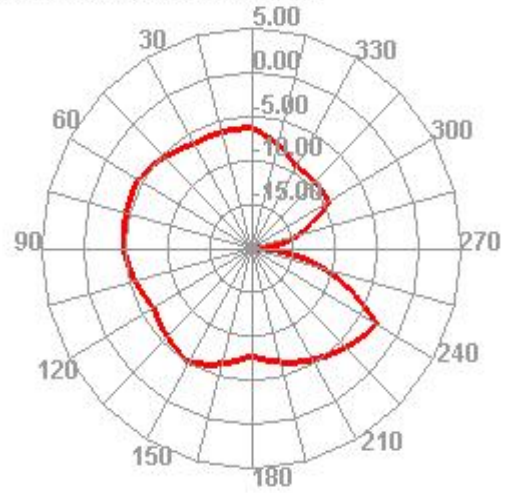


2500.000MHz

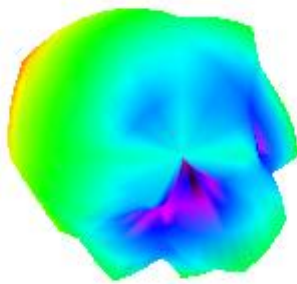


2500.000MHz H

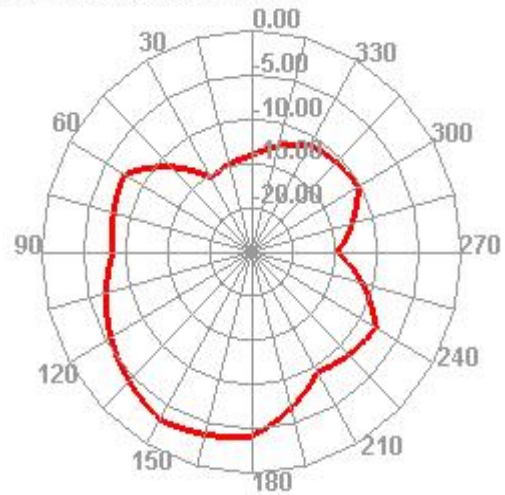

2500.000MHz E1

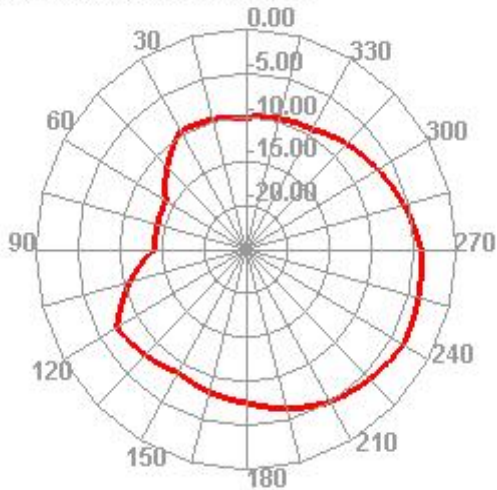


2500.000MHz E2

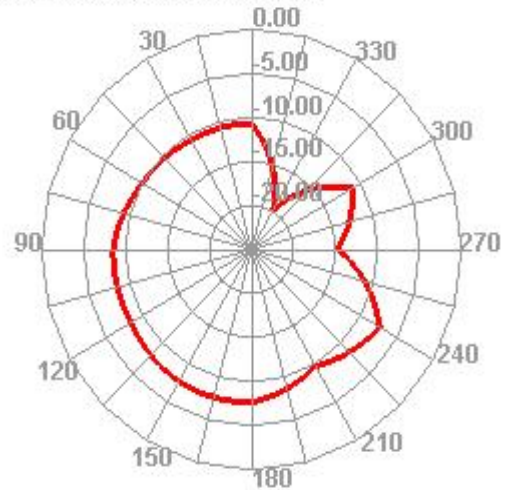



BT: VSWR

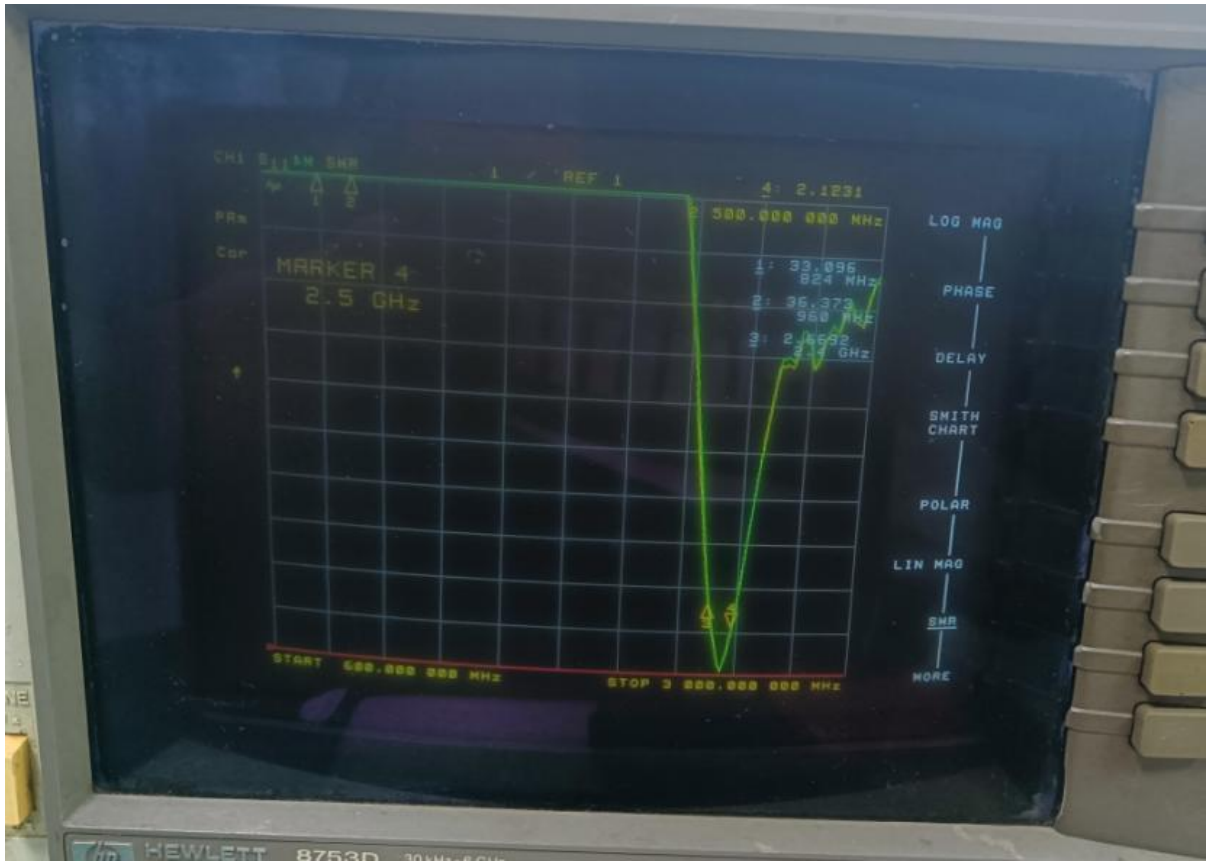

CUSTOMER' S P/N			DRAWING NO	手表 804
PREPARED BY	CHECKEDBY	APPROVAL BY	S.R.NO	
			DATE:	2024.08.07