




3.5. Bandwidth

<u>Limit</u>

N/A

Test Configuration



Test Procedure

- 1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- 2. OCB and 20dB Spectrum Setting:
 - (1) Set RBW = $1\% \sim 5\%$ occupied bandwidth.
 - (2) Set the video bandwidth (VBW) \geq 3 RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.

Note: The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.

Test Mode

Please refer to the clause 2.4.

中国国家认

Test Results


Modulation type	Channel	99% Bandwidth (MHz)	20dB Bandwidth (MHz)	20dB Bandwidth *2/3 (MHz)
	00	0.897	0.948	632.000
GFSK	39	0.880	0.942	628.000
	78	0.888	0.942	628.000
	00	1.168	1.218	812.000
π/4-DQPSK	39	1.166	1.230	820.000
	78	1.173	1.257	838.000
	00	1.172	1.239	826.000
8-DPSK	39	1.152	1.236	824.000
	78	1.156	1.233	822.000









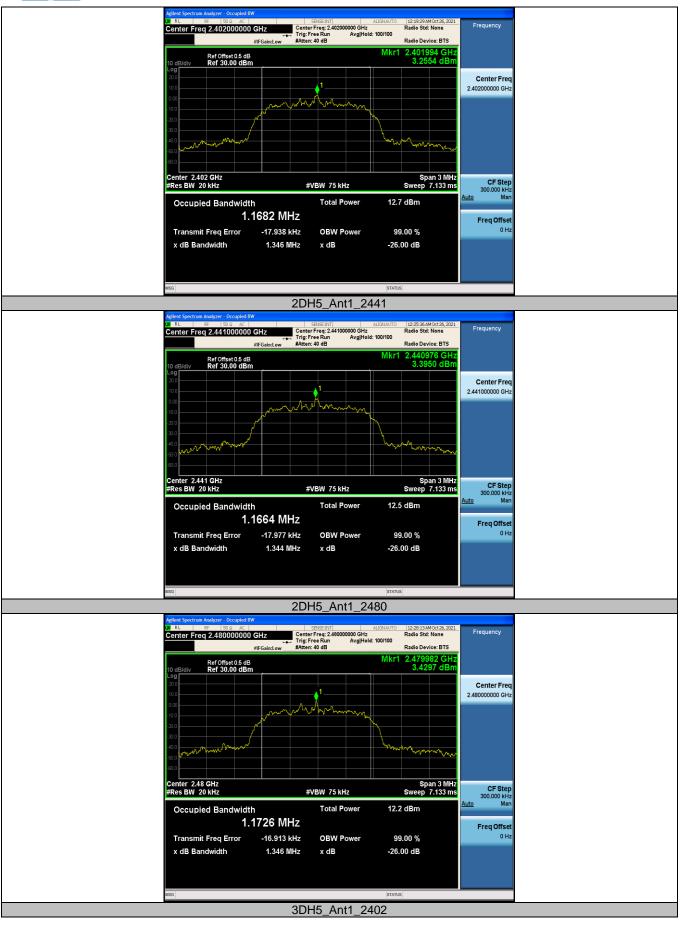












1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-cto.org.cn For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn







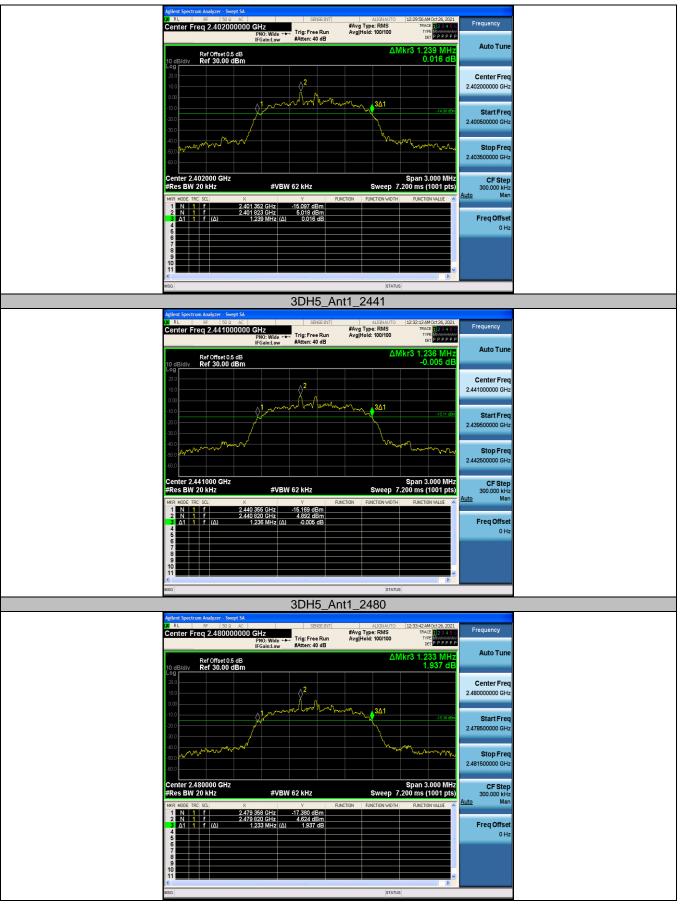

CTC Laboratories, Inc. 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China Tel.: (86)755-27521059 下a: (86)755-27521011 Http://www.sz-ctc.org.cn For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : <u>yz.cnca.cn</u>




3.6. Channel Separation

<u>Limit</u>

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1)/ RSS-247 5.1 b :

Test Item	Limit	Frequency Range(MHz)
Channel Separation	>25KHz or >two-thirds of the 20 dB bandwidth Which is greater	2400~2483.5

Test Configuration



Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.

- 2. Spectrum Setting:
 - (1) Set RBW = 100 kHz.
 - (2) Set the video bandwidth (VBW) \ge 3 RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.

Test Mode

Please refer to the clause 2.4.

Test Results

Modulation type	Channel	Carrier Frequencies Separation (MHz)	Limit (MHz)	Result
GFSK	39	0.996	628.000	Pass
π/4-DQPSK	39	1.004	820.000	Pass
8-DPSK	39	0.982	824.000	Pass









3.7. Number of Hopping Channel

<u>Limit</u>

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(iii)/ RSS-247 5.1 d:

Section	Test Item	Limit	
15.247 (a)(iii)/ RSS-247 5.1 d:	Number of Hopping Channel	>15	

Test Configuration



Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.

- 2. Spectrum Setting:
 - (1) Peak Detector: RBW=100 kHz, VBW ≥RBW, Sweep time= Auto.

Test Mode

Please refer to the clause 2.4.

Test Result

Modulation type	Channel number	Limit	Result
GFSK	79		
π/4-DQPSK	79	≥15.00	Pass
8DPSK	79		



Test plot as follows:	DUE Anti Uon						
DH5_Ant1_Hop Agilent Spectrum Analyzer - Swept SA							
	Image: No. 1 SPREERINT AUSWARTO 12±008 MAC 024, 2021 Freq Center Freq 2.441750000 GHz FM 21 FAG 97 1000 GHz FFreq FM 21 FFreq FM 21 FFreq FM 21 FFreq FM 21 FFreq	uency uto Tune					
	10 dB/div Ref 30.00 dBm	nter Freq					
	200 2.44175	50000 GHz					
		Start Freq 00000 GHz					
		Stop Freq					
	40.0	CF Step 50000 MHz Man					
	.500 Fr	eq Offset 0 Hz					
	Start 2.40000 GHz Stop 2.48350 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 8.000 ms (1001 pts)						
	2DH5_Ant1_Hop						
	Aglent Spectrum Analyze - Swept SA. 2 RL 475 1900 AC Sector Albandor 28, 2021 Freq Center Freq 2.441750000 GHz PN0: Fast →→ Trig: Free Run Avg[Hold: \$14/1000 Tries 1224 3 5 14/1000 Tries 1224 3 5 14/100	luency					
		uto Tune					
		nter Freq 50000 GHz					
		Start Freq 00000 GHz					
		Stop Freq GHz					
	-000 Auto	CF Step 50000 MHz Man					
	500 Fr	eq Offset 0 Hz					
	Start 2.40000 GHz Stop 2.48350 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 8.000 ms (1001 pts)						
	MSG STATUS						
	3DH5_Ant1_Hop Aglient Spectrum Analyzer - Swept SA R L RF SD Q AC SPRSEINT ALISMAUTO 12:46:58 AMORE 26, 2021						
	Center Freq 2.441750000 GHz #Avg Type: RMS True To a set PROF. Fast Trig: Free Run Avg Hold: 73/1000 True To a set IFGainLow #Atten: 40 dB	uuncy uuto Tune					
		nter Freq 5000 GHz					
		Start Freq 00000 GHz					
		Stop Freq 00000 GHz					
		CF Step Sooo MHz Man					
	40.0	eq Offset 0 Hz					
	500 Start 2.40000 GHz Stop 2.48350 GHz						
	Start 2.40000 GHz Stop 2.48350 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 8.000 ms (1001 pts) usc						






3.8. Dwell Time

<u>Limit</u>

Section	Test Item	Limit
15.247(a)(iii)/ RSS-247 5.1 d	Average Time of Occupancy	0.4 sec

Test Configuration



Test Procedure

- 1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- 2. Spectrum Setting:
 - (1) Spectrum Setting: RBW=1MHz, VBW ≥ RBW.
 - (2) Use video trigger with the trigger level set to enable triggering only on full pulses.
 - (3) Sweep Time is more than once pulse time.
- (4) Set the center frequency on any frequency would be measure and set the frequency span to zero.
 - (5) Measure the maximum time duration of one single pulse.
 - (6) Set the EUT for packet transmitting.

Test Mode

Please refer to the clause 2.4.




Test Result

Modulation type	Channel	Channel (MHz)	Pulse Time (ms)	Total of Dwell (ms)	Period Time (ms)	Limit (Second)	Result
	DH1	2441	0.38	121.60	31.60		
GFSK	DH3	2441	1.63	260.80	31.60	≤ 0.40	Pass
	DH5	2441	2.88	307.20	31.60		
	2DH1	2441	0.38	121.60	31.60		
π/4-DQPSK	2DH3	2441	1.64	262.40	31.60	≤ 0.40	Pass
	2DH5	2441	2.88	307.20	31.60		
	3DH1	2441	0.39	124.80	31.60		
8-DPSK	3DH3	2441	1.64	262.40	31.60	≤ 0.40	Pass
	3DH5	2441	2.89	308.27	31.60		


Note: 1DH1/2DH1/3DH1Total of Dwell= Pulse Time*(1600/2)*31.6/79 1DH3/2DH3/3DH3 Total of Dwell= Pulse Time*(1600/4)*31.6/79 1DH5/2DH5/3DH5 Total of Dwell= Pulse Time*(1600/6)*31.6/79



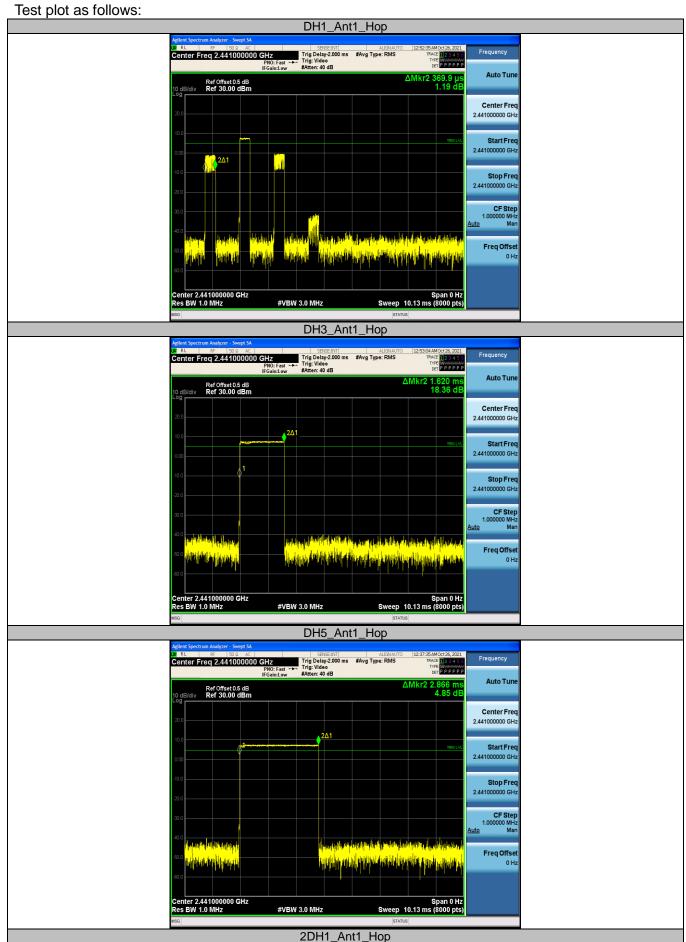






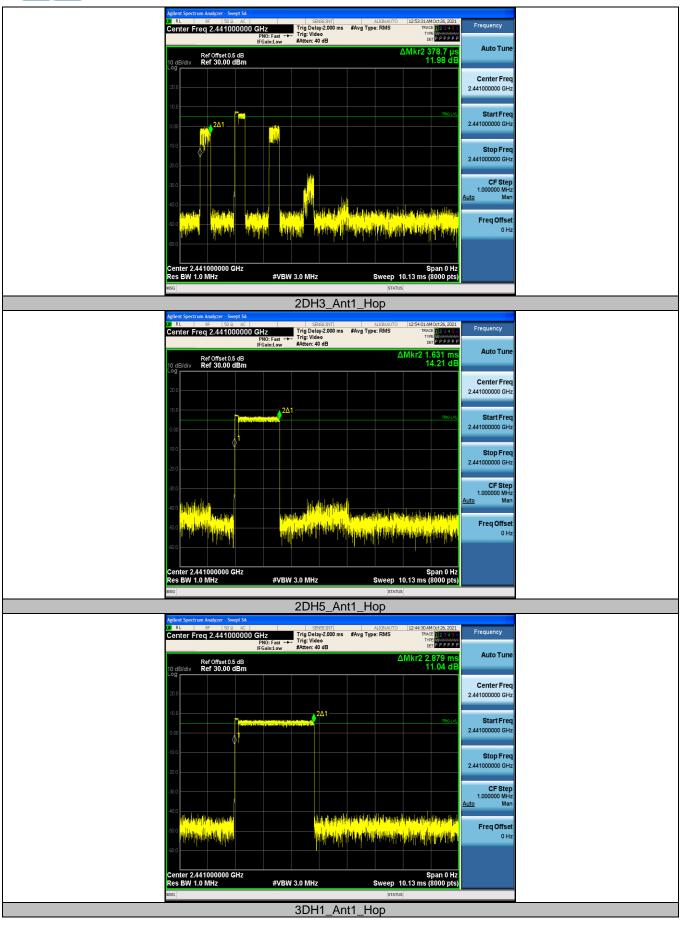



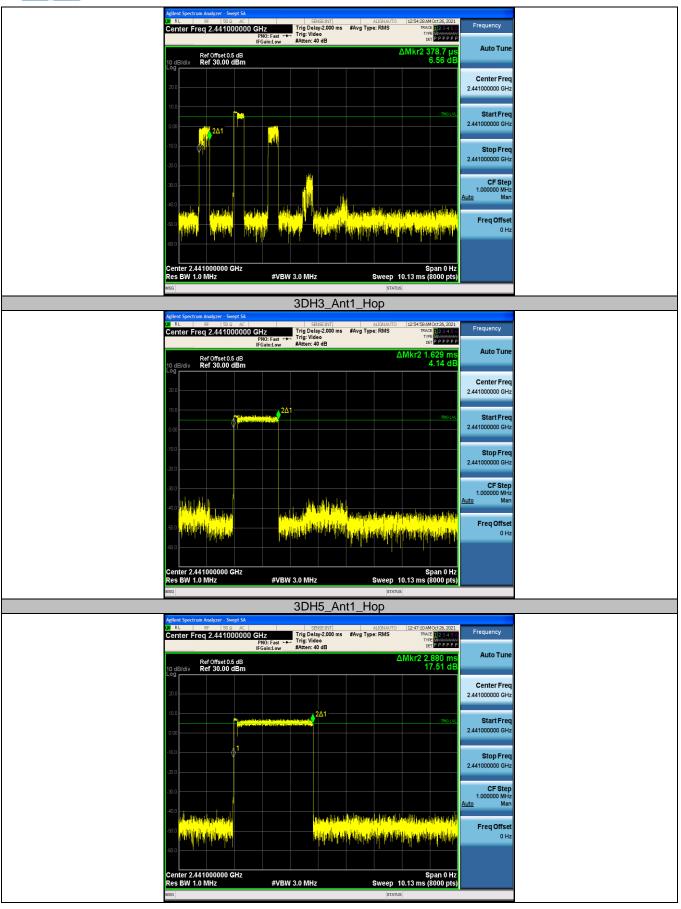




3.9. Peak Output Power

<u>Limit</u>

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(1) / RSS-247 5.4 b:

Test Item	Limit	Frequency Range(MHz)
Peak Output Power	Hopping Channels>75 Pow- er<1W(30dBm) Other <125mW(21dBm)	2400~2483.5

Test Configuration



Test Procedure

- 1. The maximum conducted output power may be measured using a broadband Peak RF power meter.
- 2. Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor.
- 3. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.
- 4. Record the measurement data.

Test Mode

Please refer to the clause 2.4.

Test Result

Modulation type	Channel	Output power (dBm)	Limit (dBm)	Result
	00	8.11		Pass
GFSK	39	7.84	< 21.00	
	78	7.58		
	00	8.14	< 21.00 Pass	Pass
π/4-DQPSK	39	7.88		
	78	7.53		
8-DPSK	00	8.27		
	39	8.07	< 21.00	Pass
	78	7.72		



3.10. Antenna Requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

Test Result

The directional gain of the antenna less than 6dBi, please refer to the EUT internal photographs antenna photo.