

GSM 850 Head

Communication System: UID 0, GPRS 4TS (0); Communication System Band: GSM 850 ;

Frequency: 836.6 MHz;

Medium parameters used: $f = 837$ MHz; $\sigma = 0.913$ S/m; $\epsilon_r = 42.642$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.05, 10.05, 10.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.358 W/kg

Configuration/Head/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm,


$dz=5$ mm

Reference Value = 2.558 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.446 W/kg

SAR(1 g) = 0.304 W/kg; SAR(10 g) = 0.215 W/kg

Maximum value of SAR (measured) = 0.389 W/kg

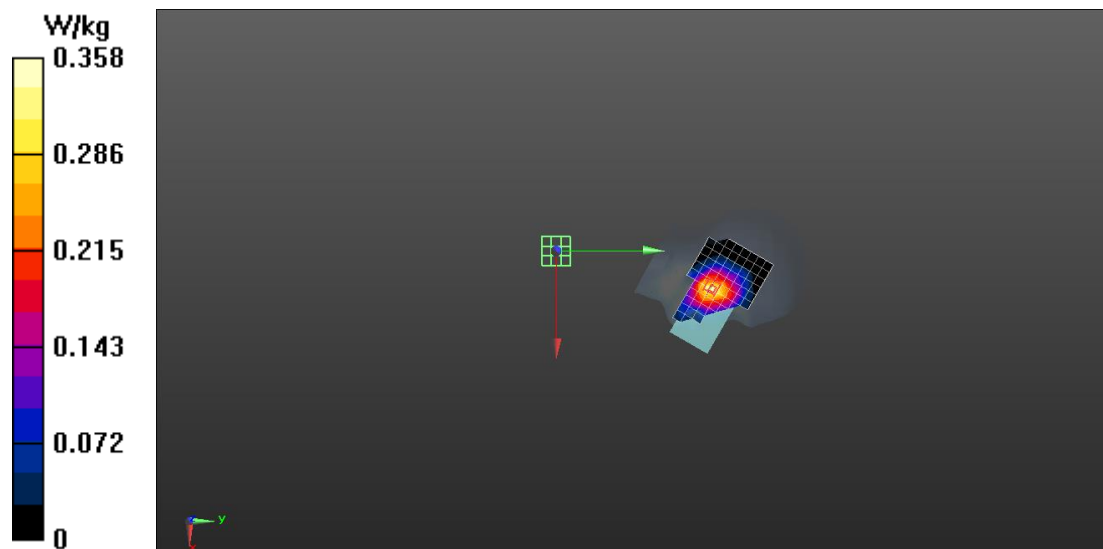

GSM 850 Body

Communication System: UID 0, GPRS 4TS (0); Communication System Band: GSM 850 ;

Frequency: 836.6 MHz;

Medium parameters used: $f = 837$ MHz; $\sigma = 0.913$ S/m; $\epsilon_r = 42.642$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.05, 10.05, 10.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.781 W/kg

Configuration/Body/Zoom Scan (6x6x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm,


$dz=5$ mm

Reference Value = 16.79 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.713 W/kg; SAR(10 g) = 0.372 W/kg

Maximum value of SAR (measured) = 1.16 W/kg

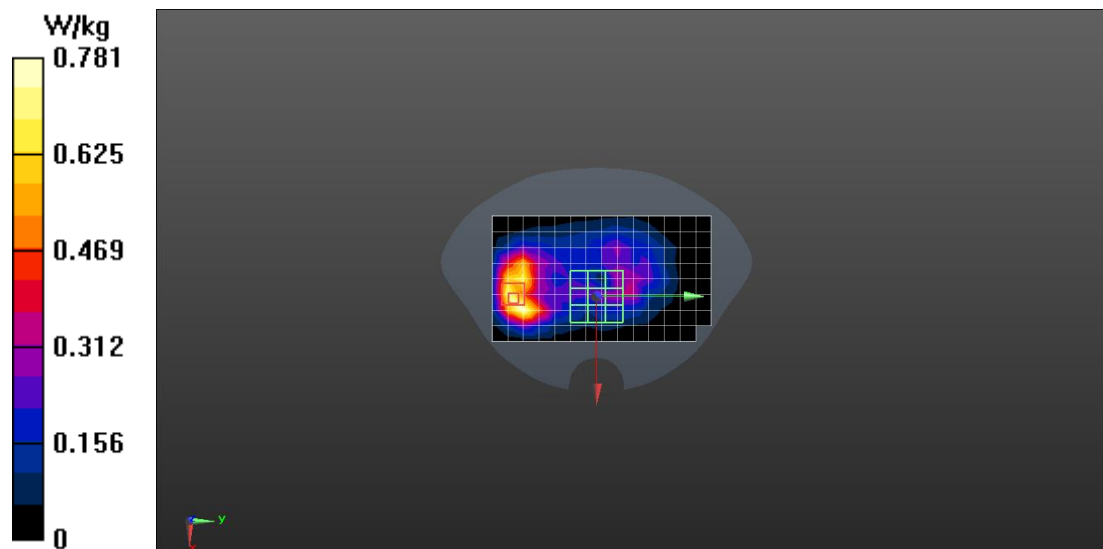

GSM 1900 Head

Communication System: UID 0, GPRS 4TS (0); Communication System Band: GSM 1900;

Frequency: 1880 MHz;

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.406$ S/m; $\epsilon_r = 39.228$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.45, 8.45, 8.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.143 W/kg

Configuration/Head/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm,


$dz=5$ mm

Reference Value = 2.768 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.190 W/kg

SAR(1 g) = 0.123 W/kg; SAR(10 g) = 0.077 W/kg

Maximum value of SAR (measured) = 0.164 W/kg

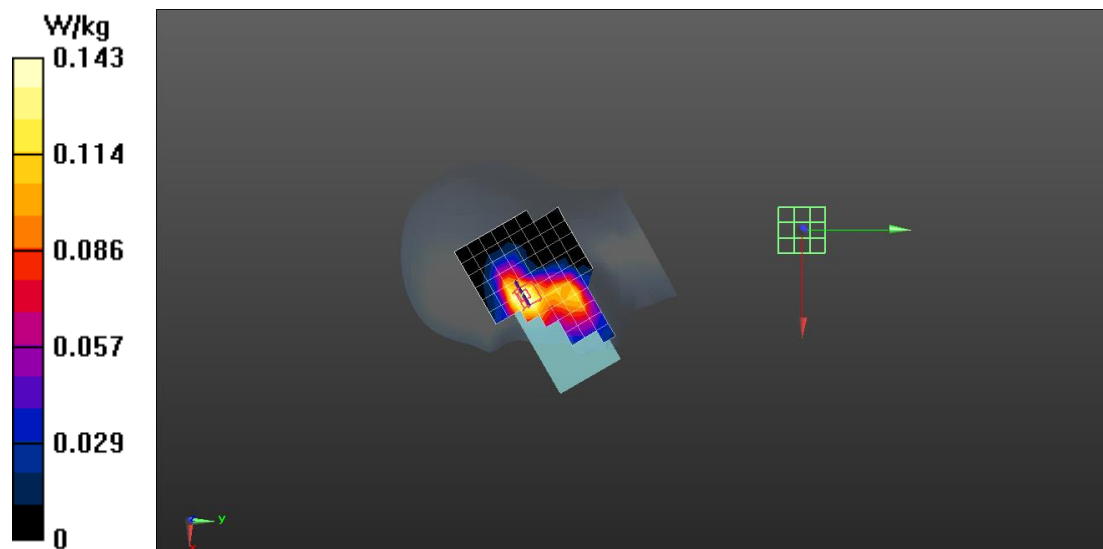

GSM 1900 Body

Communication System: UID 0, GPRS 4TS (0); Communication System Band: GSM 1900;

Frequency: 1880 MHz;

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.406$ S/m; $\epsilon_r = 39.228$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.45, 8.45, 8.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (5x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.418 W/kg

Configuration/Head/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm,


$dz=5$ mm

Reference Value = 17.76 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.964 W/kg

SAR(1 g) = 0.536 W/kg; SAR(10 g) = 0.295 W/kg

Maximum value of SAR (measured) = 0.801 W/kg

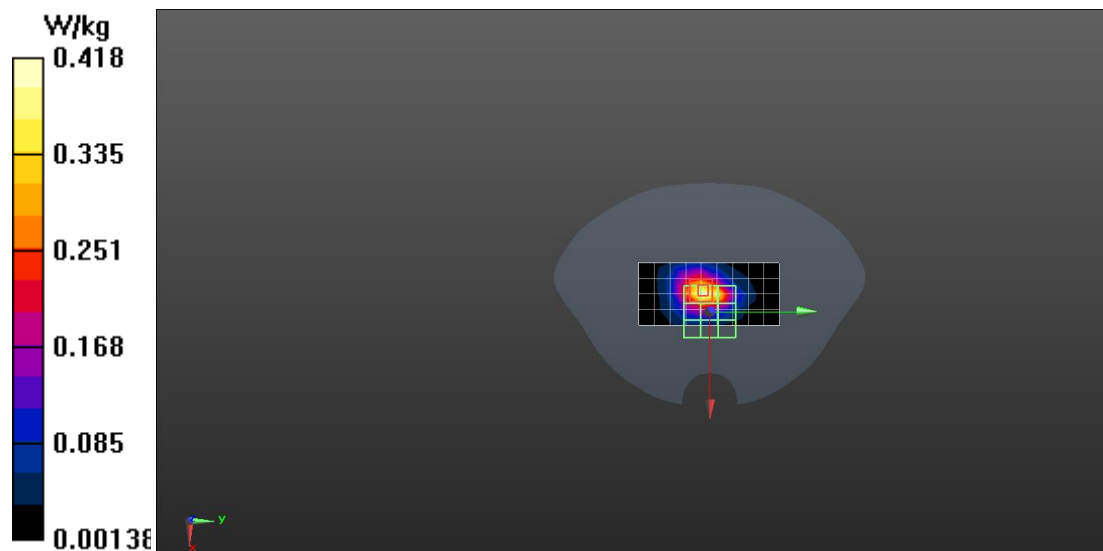

WCDMA B2 Head

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Communication System Band: Band 2; Frequency: 1880 MHz;
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.406$ S/m; $\epsilon_r = 39.228$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.45, 8.45, 8.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.176 W/kg


Configuration/Head/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.289 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.228 W/kg

SAR(1 g) = 0.143 W/kg; SAR(10 g) = 0.090 W/kg

Maximum value of SAR (measured) = 0.198 W/kg

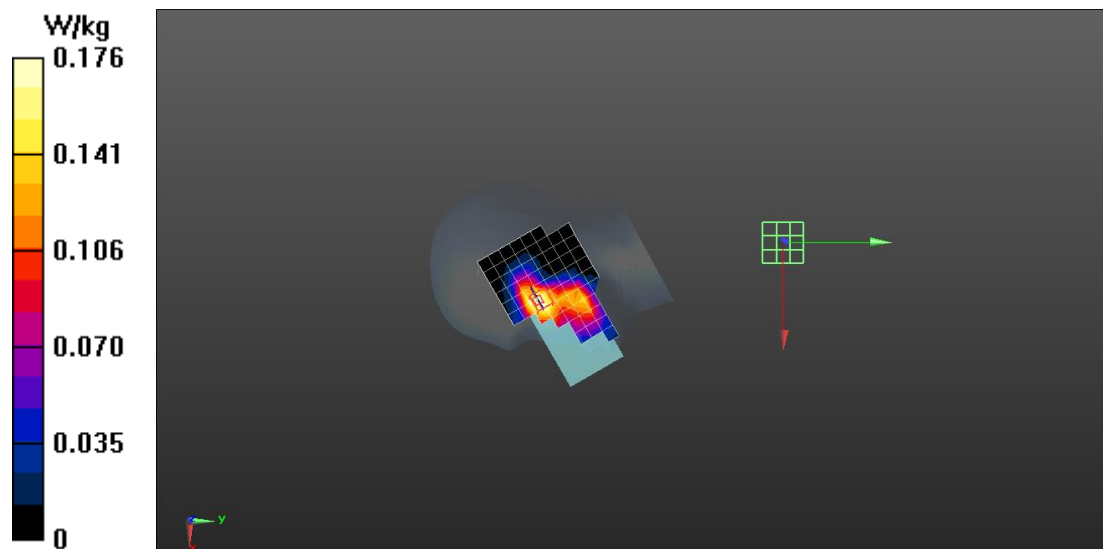

WCDMA B2 Body

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Communication System Band:

Band 2; Frequency: 1880 MHz;

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.406$ S/m; $\epsilon_r = 39.228$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.45, 8.45, 8.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (5x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.867 W/kg

Configuration/Head/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm,


$dz=5$ mm

Reference Value = 25.56 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.622 W/kg; SAR(10 g) = 0.356 W/kg

Maximum value of SAR (measured) = 0.912 W/kg

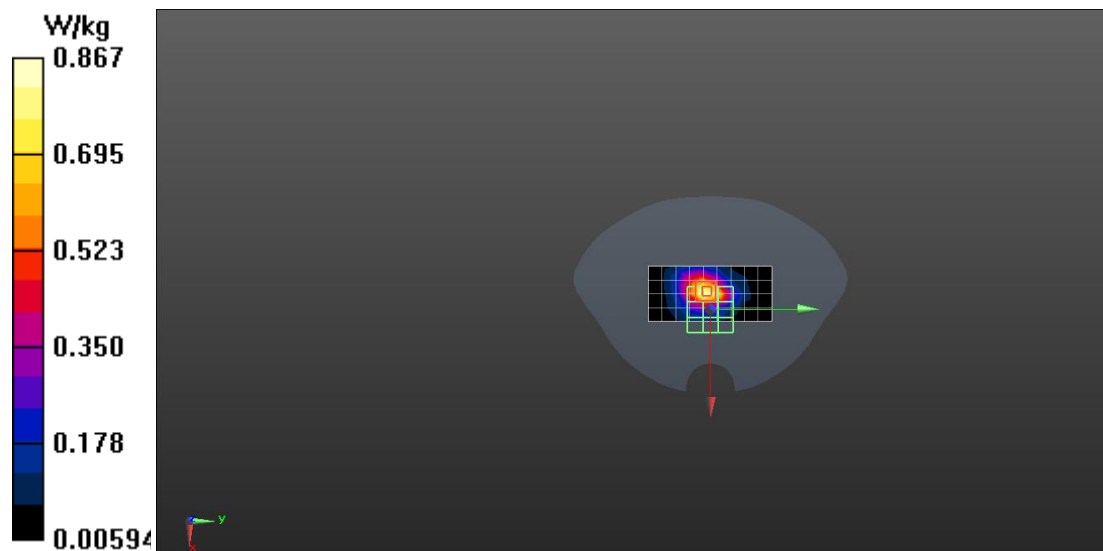

WCDMA B4 Head

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Communication System Band:

Band 4; Frequency: 1752.6 MHz;

Medium parameters used: $f = 1753$ MHz; $\sigma = 1.369$ S/m; $\epsilon_r = 39.899$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.76, 8.76, 8.76); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD00P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.104 W/kg

Configuration/Head/Zoom Scan (6x6x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm,


$dz=5$ mm

Reference Value = 3.953 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.117 W/kg

SAR(1 g) = 0.082 W/kg; SAR(10 g) = 0.054 W/kg

Maximum value of SAR (measured) = 0.105 W/kg

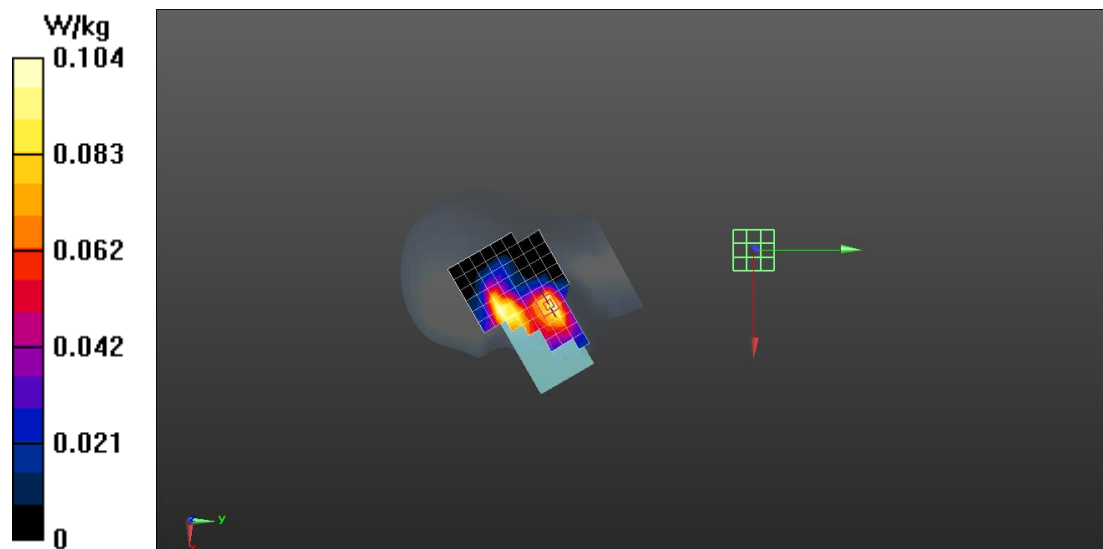

WCDMA B4 Body

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Communication System Band:

Band 4; Frequency: 1752.6 MHz;

Medium parameters used: $f = 1753$ MHz; $\sigma = 1.369$ S/m; $\epsilon_r = 39.899$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.76, 8.76, 8.76); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (5x10x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.951 W/kg

Configuration/Head/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm,


$dz=5$ mm

Reference Value = 28.42 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.729 W/kg; SAR(10 g) = 0.434 W/kg

Maximum value of SAR (measured) = 0.996 W/kg

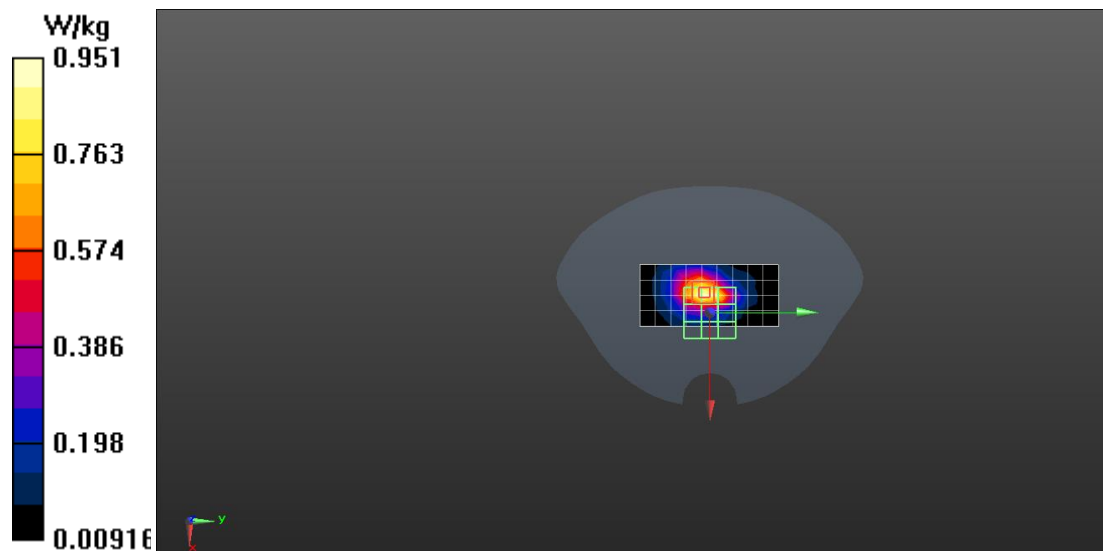

WCDMA B5 Head

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Communication System Band: Band 5; Frequency: 836.6 MHz;

Medium parameters used: $f = 837$ MHz; $\sigma = 0.913$ S/m; $\epsilon_r = 42.642$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.05, 10.05, 10.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.224 W/kg


Configuration/Head/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.298 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.250 W/kg

SAR(1 g) = 0.184 W/kg; SAR(10 g) = 0.140 W/kg

Maximum value of SAR (measured) = 0.227 W/kg

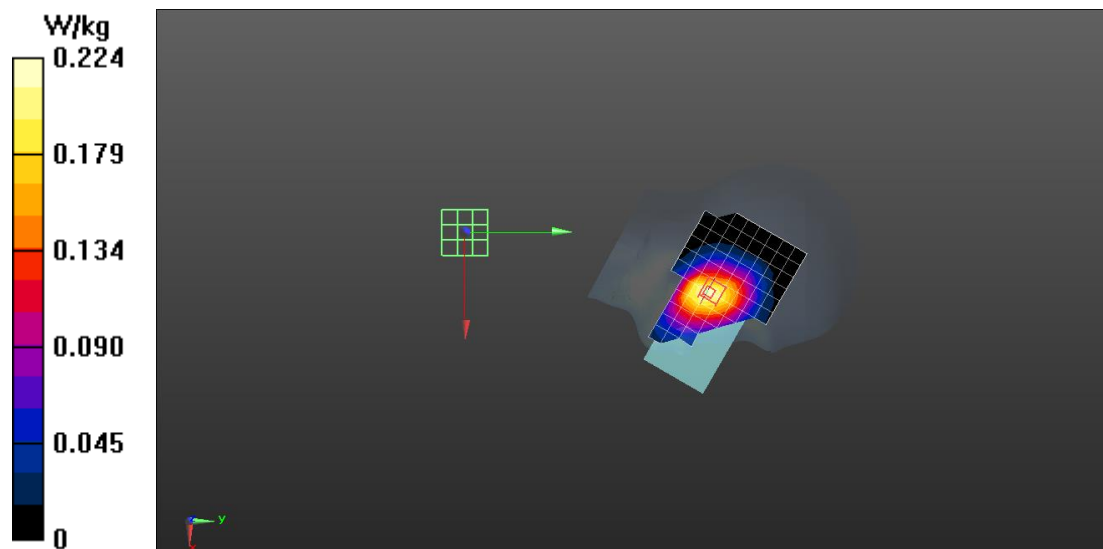

WCDMA B5 Body

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Communication System Band:

Band 5; Frequency: 836.6 MHz;

Medium parameters used: $f = 837$ MHz; $\sigma = 0.913$ S/m; $\epsilon_r = 42.642$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.05, 10.05, 10.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x17x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.694 W/kg

Configuration/Head/Zoom Scan (6x6x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm,


$dz=5$ mm

Reference Value = 12.07 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.520 W/kg; SAR(10 g) = 0.280 W/kg

Maximum value of SAR (measured) = 0.784 W/kg

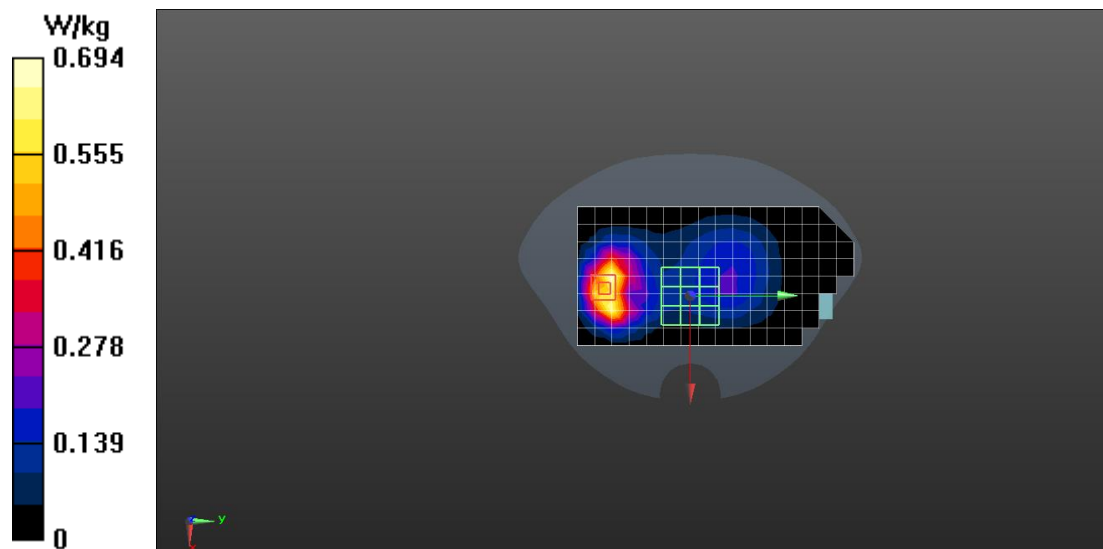

LTE B2 Head

Communication System: UID 0, LTE (0); Communication System Band: Band 2; Frequency: 1880 MHz;

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.406$ S/m; $\epsilon_r = 39.228$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.45, 8.45, 8.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.181 W/kg


Configuration/Head/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 9.018 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.224 W/kg

SAR(1 g) = 0.143 W/kg; SAR(10 g) = 0.086 W/kg

Maximum value of SAR (measured) = 0.192 W/kg

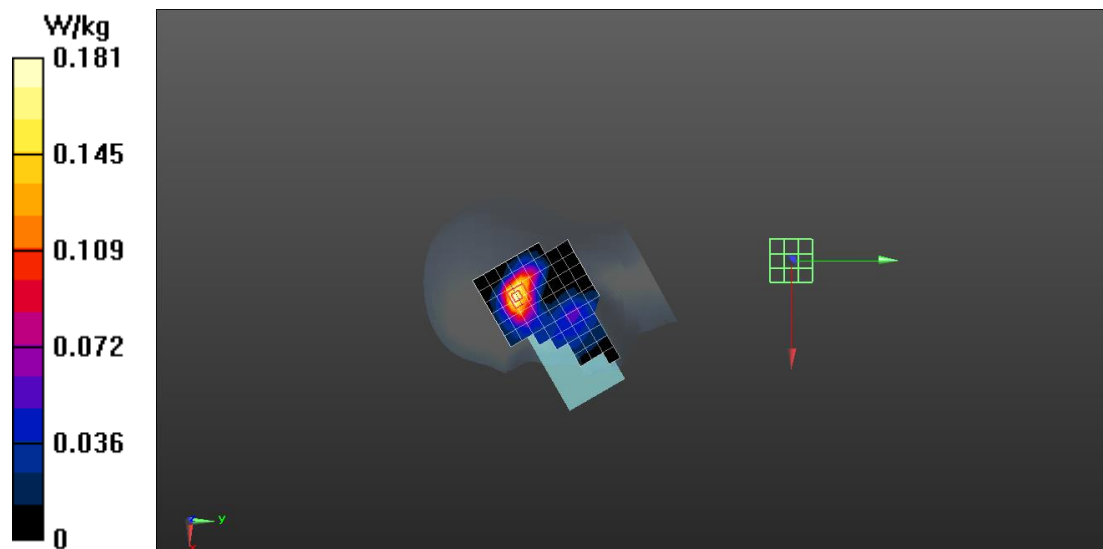

LTE B2 Body

Communication System: UID 0, LTE (0); Communication System Band: Band 2; Frequency: 1880 MHz;

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.406$ S/m; $\epsilon_r = 39.228$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.45, 8.45, 8.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.858 W/kg


Configuration/Head/Zoom Scan (6x6x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 15.75 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.28 W/kg

SAR(1 g) = 0.737 W/kg; SAR(10 g) = 0.432 W/kg

Maximum value of SAR (measured) = 1.06 W/kg

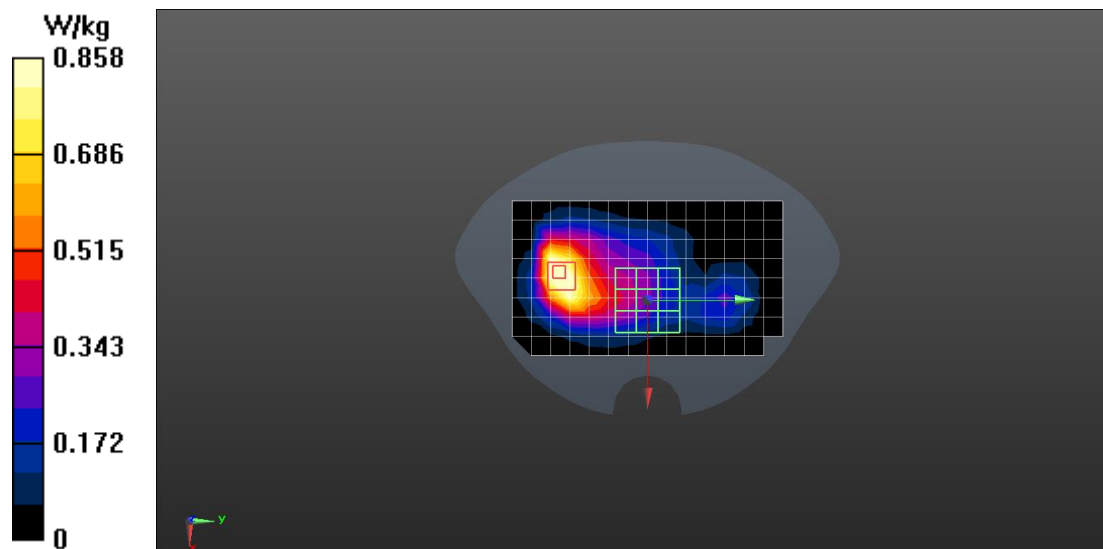

LTE B4 Head

Communication System: UID 0, LTE (0); Communication System Band: Band 4; Frequency: 1745 MHz;

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.346$ S/m; $\epsilon_r = 39.898$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.76, 8.76, 8.76); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.155 W/kg


Configuration/Head/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.531 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.185 W/kg

SAR(1 g) = 0.129 W/kg; SAR(10 g) = 0.082 W/kg

Maximum value of SAR (measured) = 0.167 W/kg

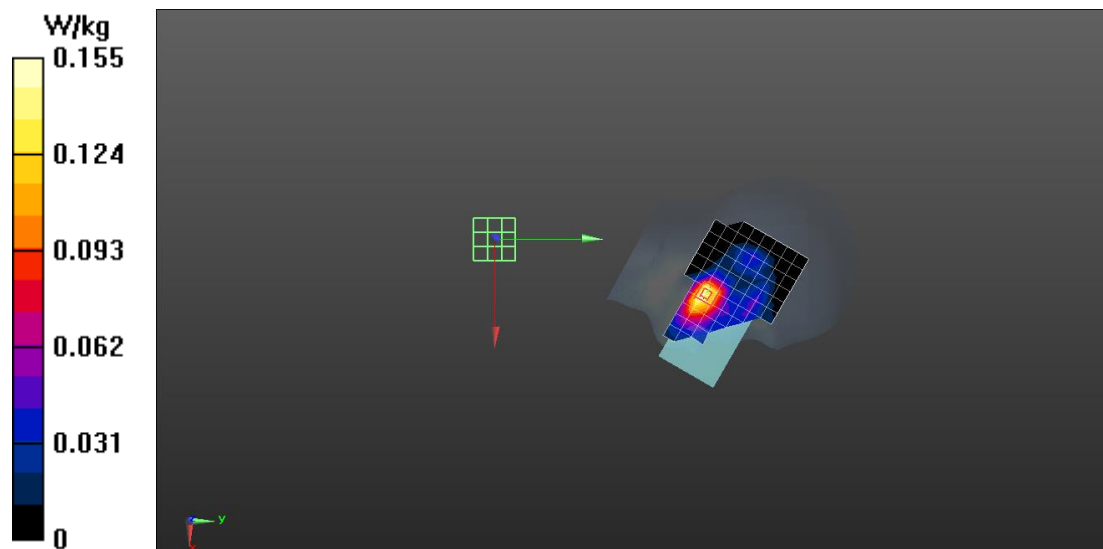

LTE B4 Body

Communication System: UID 0, LTE (0); Communication System Band: Band 4; Frequency: 1745 MHz;

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.346$ S/m; $\epsilon_r = 39.898$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.76, 8.76, 8.76); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.11 W/kg


Configuration/Head/Zoom Scan (6x6x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 13.63 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.851 W/kg; SAR(10 g) = 0.516 W/kg

Maximum value of SAR (measured) = 1.16 W/kg

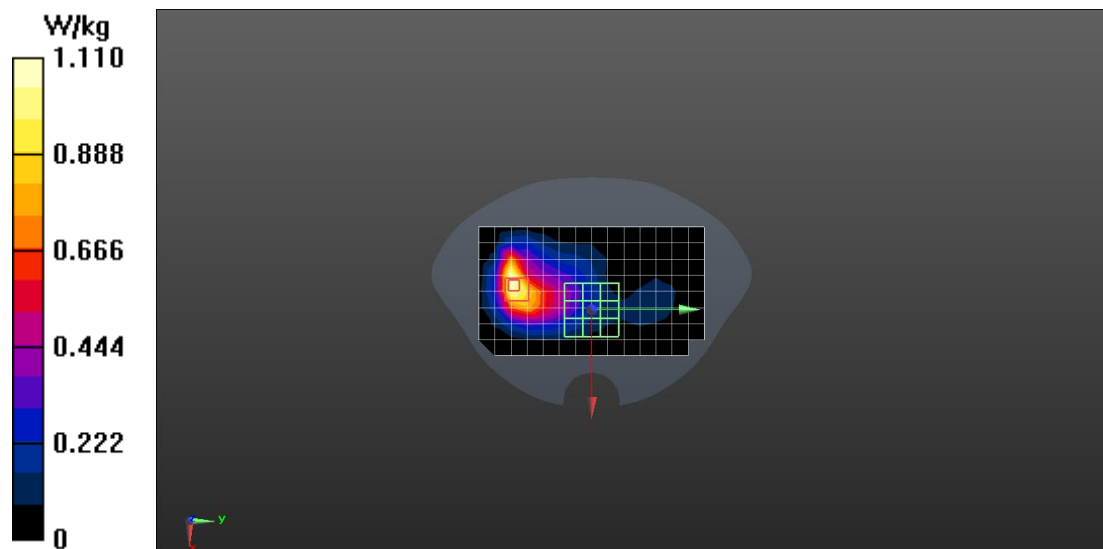

LTE B5 Head

Communication System: UID 0, LTE (0); Communication System Band: Band 5; Frequency: 844 MHz;

Medium parameters used: $f = 844$ MHz; $\sigma = 0.918$ S/m; $\epsilon_r = 42.576$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.05, 10.05, 10.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm


Maximum value of SAR (measured) = 0.194 W/kg

Configuration/Head/Zoom Scan (6x6x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.125 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.220 W/kg

SAR(1 g) = 0.160 W/kg; SAR(10 g) = 0.122 W/kg

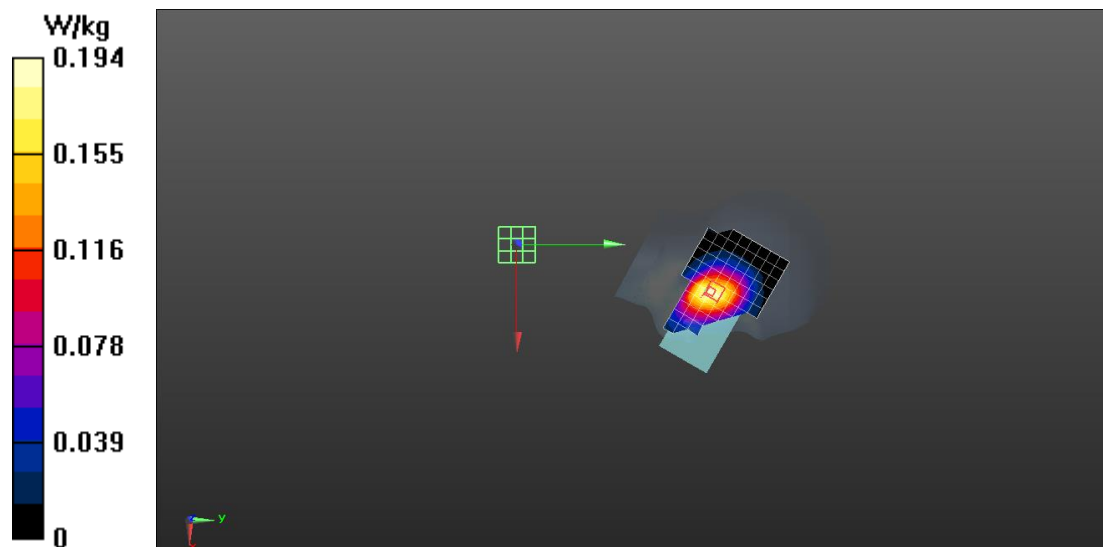

LTE B5 Body

Communication System: UID 0, LTE (0); Communication System Band: Band 5; Frequency: 844 MHz;

Medium parameters used: $f = 844$ MHz; $\sigma = 0.918$ S/m; $\epsilon_r = 42.576$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.05, 10.05, 10.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.723 W/kg


Configuration/Head/Zoom Scan (6x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 11.18 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.958 W/kg

SAR(1 g) = 0.463 W/kg; SAR(10 g) = 0.250 W/kg

Maximum value of SAR (measured) = 0.748 W/kg

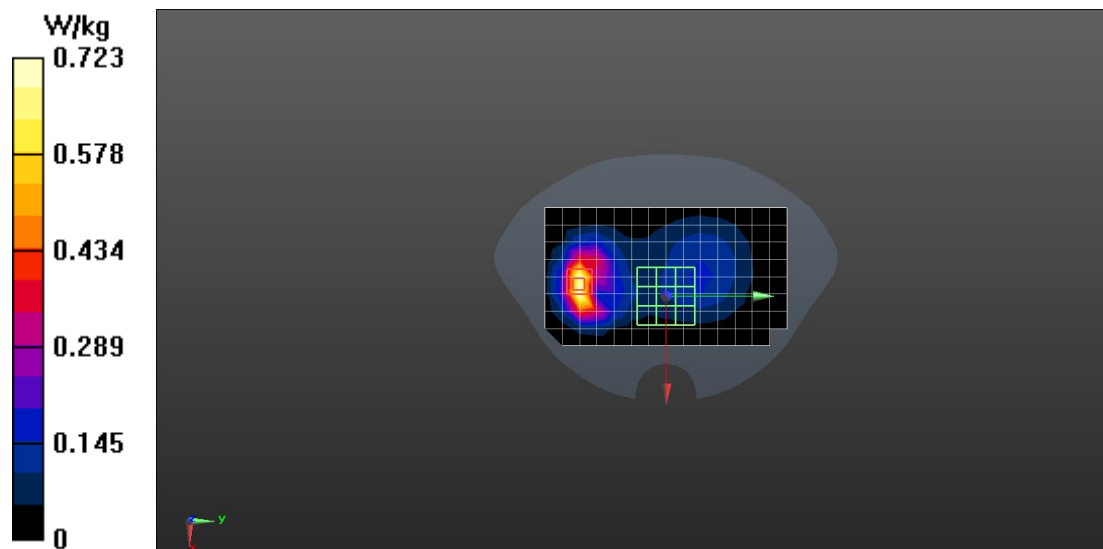

LTE B7 Head

Communication System: UID 0, LTE (0); Communication System Band: Band 7; Frequency: 2510 MHz;

Medium parameters used: $f = 2510$ MHz; $\sigma = 1.918$ S/m; $\epsilon_r = 38.16$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(7.98, 7.98, 7.98); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.12 W/kg


Configuration/Head/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 10.24 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 0.659 W/kg; SAR(10 g) = 0.296 W/kg

Maximum value of SAR (measured) = 1.18 W/kg

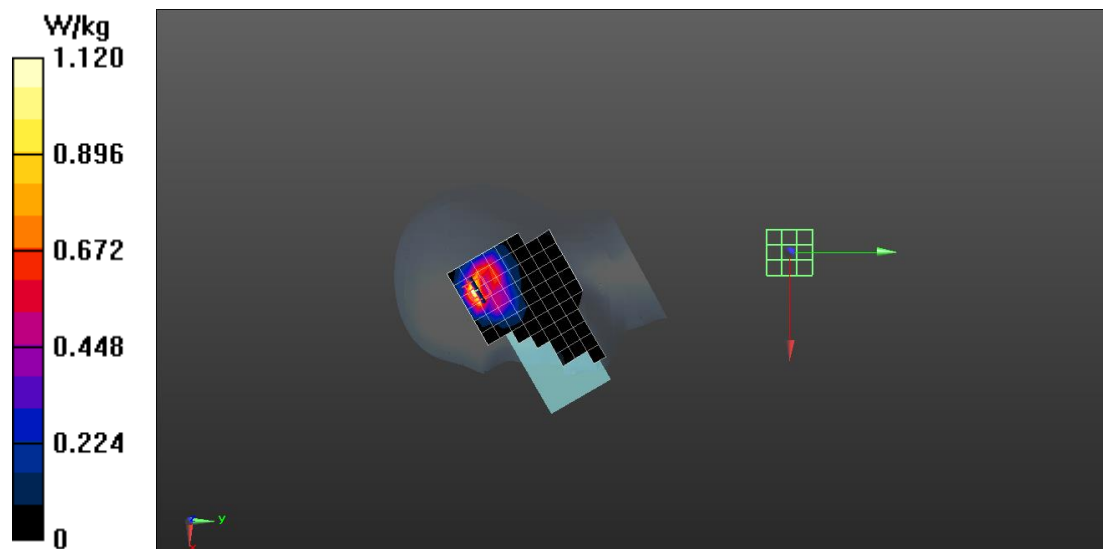

LTE B7 Body

Communication System: UID 0, LTE (0); Communication System Band: Band 7; Frequency: 2510 MHz;

Medium parameters used: $f = 2510$ MHz; $\sigma = 1.918$ S/m; $\epsilon_r = 38.16$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(7.98, 7.98, 7.98); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.37 W/kg


Configuration/Head/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 13.73 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.74 W/kg

SAR(1 g) = 0.858 W/kg; SAR(10 g) = 0.404 W/kg

Maximum value of SAR (measured) = 1.41 W/kg

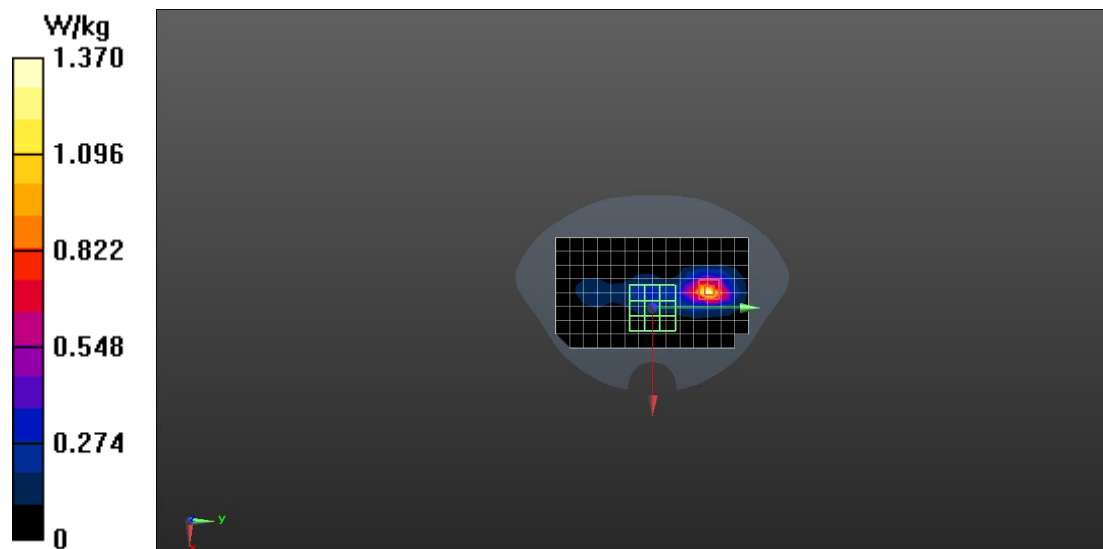

LTE B12 Head

Communication System: UID 0, LTE (0); Communication System Band: Band 12; Frequency: 711 MHz;

Medium parameters used: $f = 711$ MHz; $\sigma = 0.861$ S/m; $\epsilon_r = 42.931$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.45, 10.45, 10.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.117 W/kg


Configuration/Head/Zoom Scan (6x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.061 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.131 W/kg

SAR(1 g) = 0.100 W/kg; SAR(10 g) = 0.078 W/kg

Maximum value of SAR (measured) = 0.121 W/kg

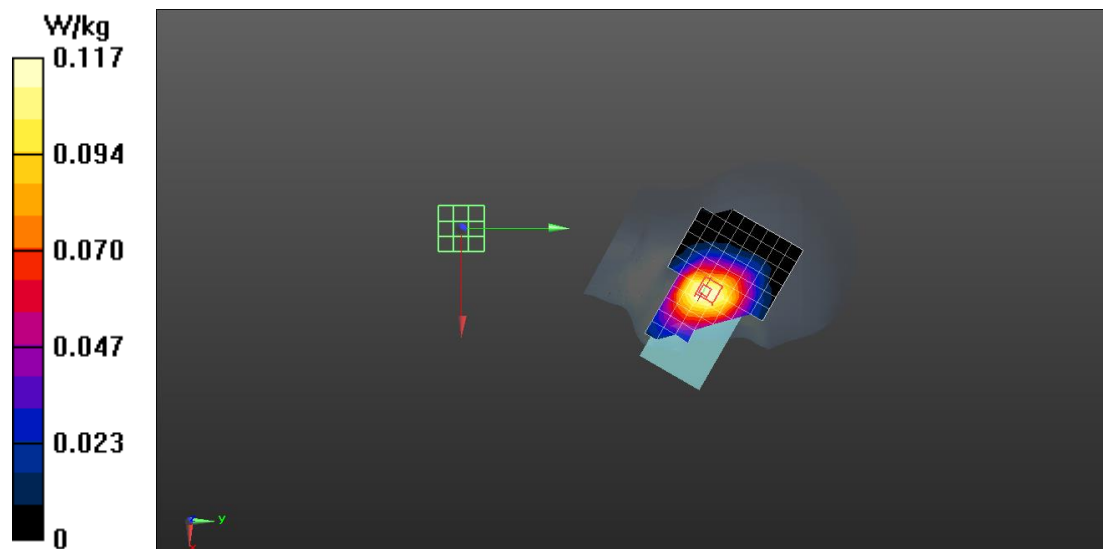

LTE B12 Body

Communication System: UID 0, LTE (0); Communication System Band: Band 12; Frequency: 711 MHz;

Medium parameters used: $f = 711$ MHz; $\sigma = 0.861$ S/m; $\epsilon_r = 42.931$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.45, 10.45, 10.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (5x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.262 W/kg


Configuration/Head/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 17.92 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.316 W/kg

SAR(1 g) = 0.208 W/kg; SAR(10 g) = 0.143 W/kg

Maximum value of SAR (measured) = 0.277 W/kg

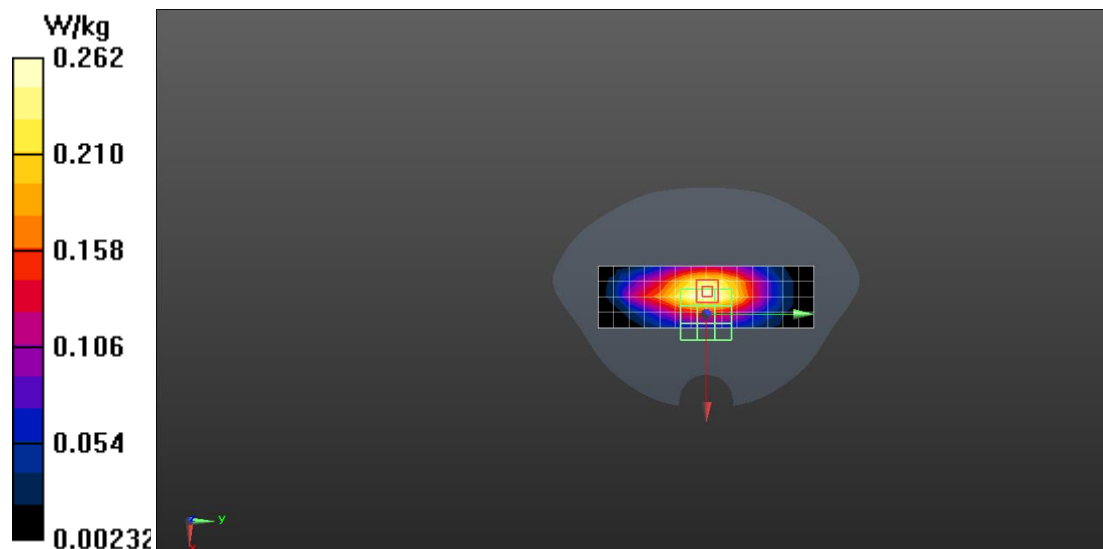

LTE B38 Head

Communication System: UID 0, LTE (0); Communication System Band: Band 38; Frequency: 2580 MHz;

Medium parameters used: $f = 2580$ MHz; $\sigma = 1.999$ S/m; $\epsilon_r = 37.894$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(7.72, 7.72, 7.72); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.669 W/kg


Configuration/Head/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.464 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.471 W/kg; SAR(10 g) = 0.220 W/kg

Maximum value of SAR (measured) = 0.825 W/kg

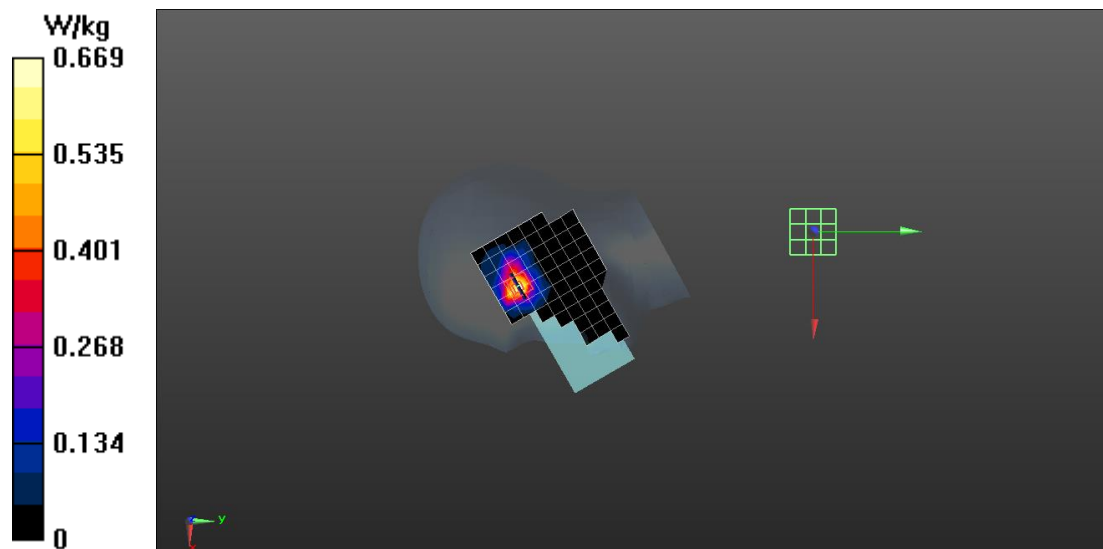

LTE B38 Body

Communication System: UID 0, TDD-LTE (0); Communication System Band: Band 38;

Frequency: 2580 MHz;

Medium parameters used: $f = 2580$ MHz; $\sigma = 1.999$ S/m; $\epsilon_r = 37.894$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(7.72, 7.72, 7.72); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.491 W/kg

Configuration/Head/Zoom Scan (5x6x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm,


$dz=5$ mm

Reference Value = 11.65 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.671 W/kg

SAR(1 g) = 0.325 W/kg; SAR(10 g) = 0.174 W/kg

Maximum value of SAR (measured) = 0.499 W/kg

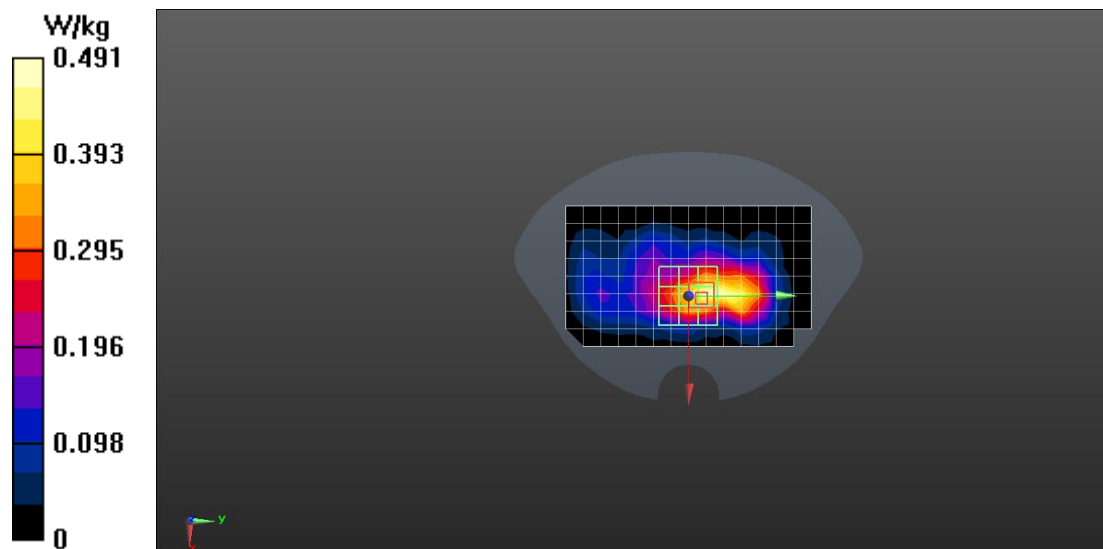

LTE B41 Head

Communication System: UID 0, TDD-LTE (0); Communication System Band: Band 41;

Frequency: 2506 MHz;

Medium parameters used: $f = 2506$ MHz; $\sigma = 1.919$ S/m; $\epsilon_r = 38.19$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(7.98, 7.98, 7.98); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.806 W/kg

Configuration/Head/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm,


$dz=5$ mm

Reference Value = 5.334 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.473 W/kg; SAR(10 g) = 0.218 W/kg

Maximum value of SAR (measured) = 0.798 W/kg

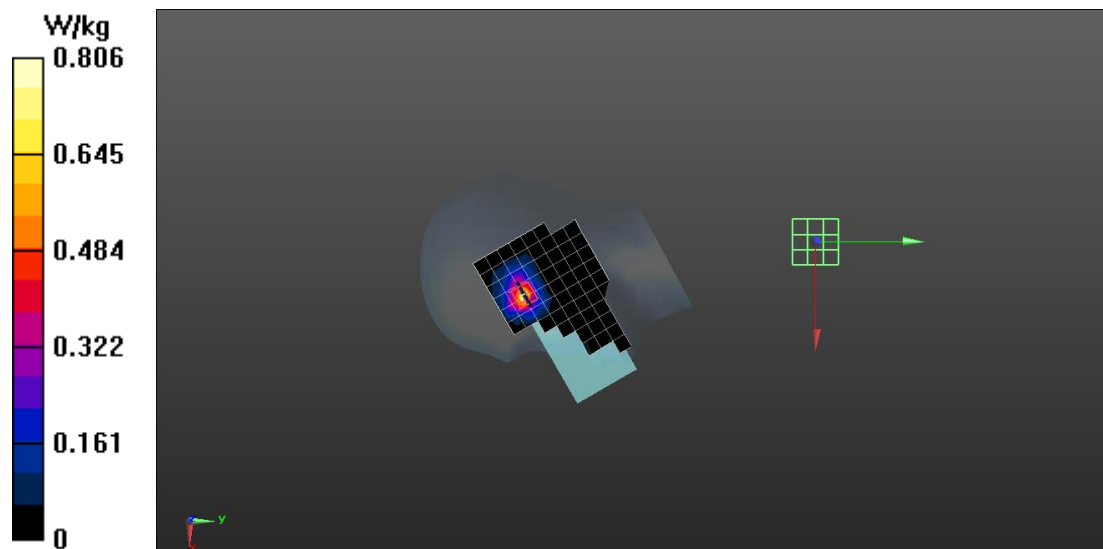

LTE B41 Body

Communication System: UID 0, TDD-LTE (0); Communication System Band: Band 41;

Frequency: 2506 MHz;

Medium parameters used: $f = 2506$ MHz; $\sigma = 1.919$ S/m; $\epsilon_r = 38.19$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(7.98, 7.98, 7.98); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.576 W/kg

Configuration/Head/Zoom Scan (5x6x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=515$ mm,


$dz=5$ mm

Reference Value = 13.00 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.802 W/kg

SAR(1 g) = 0.359 W/kg; SAR(10 g) = 0.194 W/kg

Maximum value of SAR (measured) = 0.581 W/kg

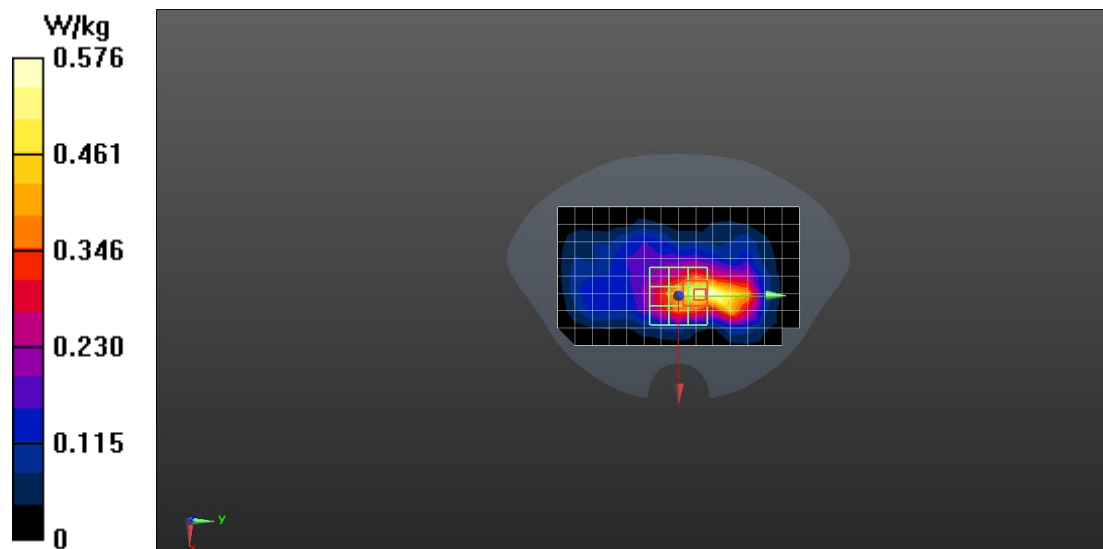

LTE B66 Head

Communication System: UID 0, LTE (0); Communication System Band: Band 66; Frequency: 1720 MHz;

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.314$ S/m; $\epsilon_r = 40.538$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.76, 8.76, 8.76); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.156 W/kg


Configuration/Head/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.716 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.174 W/kg

SAR(1 g) = 0.124 W/kg; SAR(10 g) = 0.078 W/kg

Maximum value of SAR (measured) = 0.159 W/kg

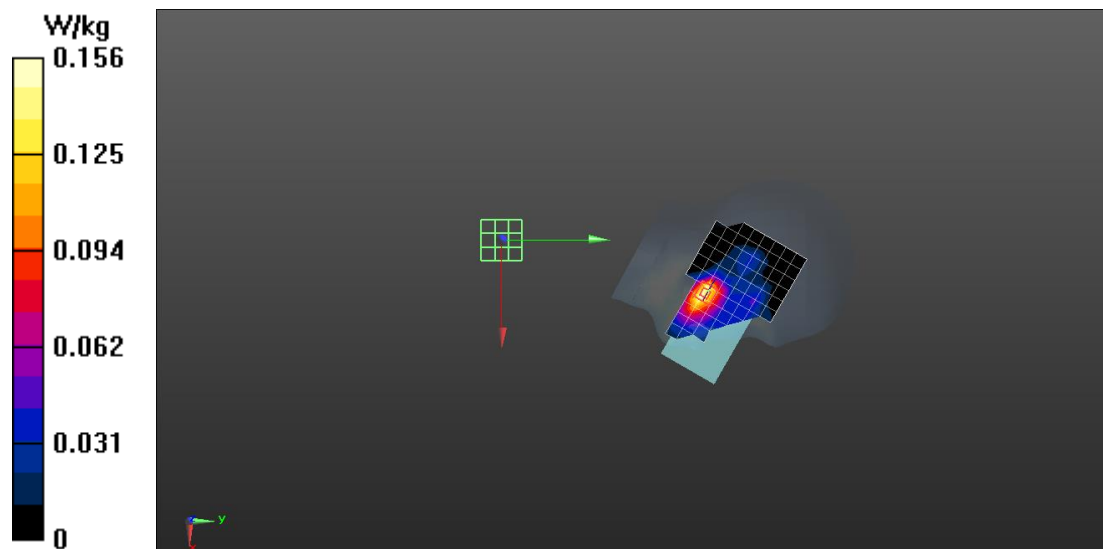

LTE B66 Body

Communication System: UID 0, LTE (0); Communication System Band: Band 66; Frequency: 1720 MHz;

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.314$ S/m; $\epsilon_r = 40.538$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.76, 8.76, 8.76); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.977 W/kg


Configuration/Head/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 10.43 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.747 W/kg; SAR(10 g) = 0.453 W/kg

Maximum value of SAR (measured) = 0.999 W/kg

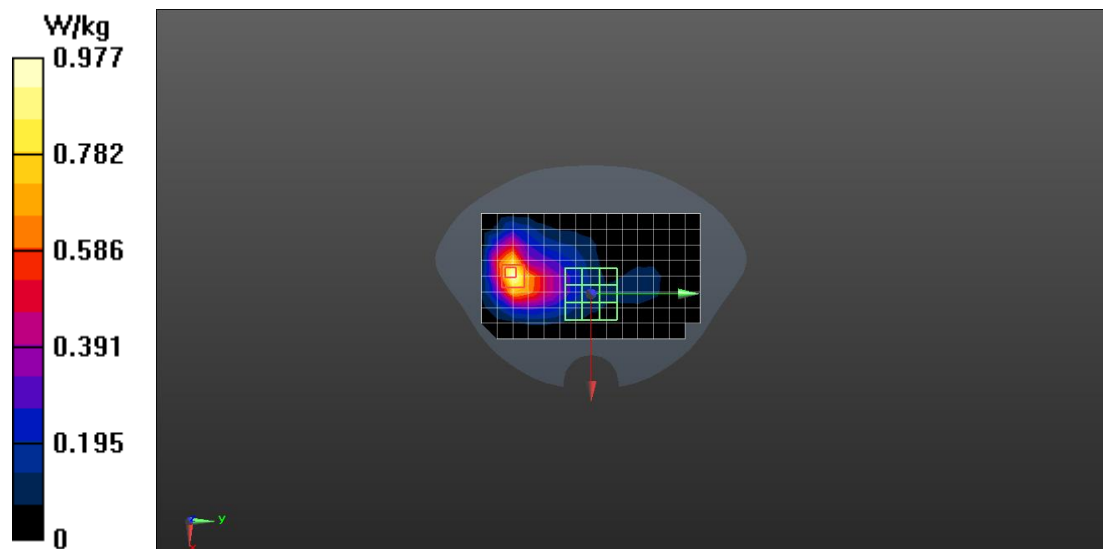

NR N5 Head

Communication System: UID 0, 5G NR (0); Communication System Band: n5; Frequency: 839 MHz;

Medium parameters used (interpolated): $f = 839$ MHz; $\sigma = 0.918$ S/m; $\epsilon_r = 41.703$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.05, 10.05, 10.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.221 W/kg


Configuration/Head/Zoom Scan (6x6x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.619 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.224 W/kg

SAR(1 g) = 0.167 W/kg; SAR(10 g) = 0.127 W/kg

Maximum value of SAR (measured) = 0.204 W/kg

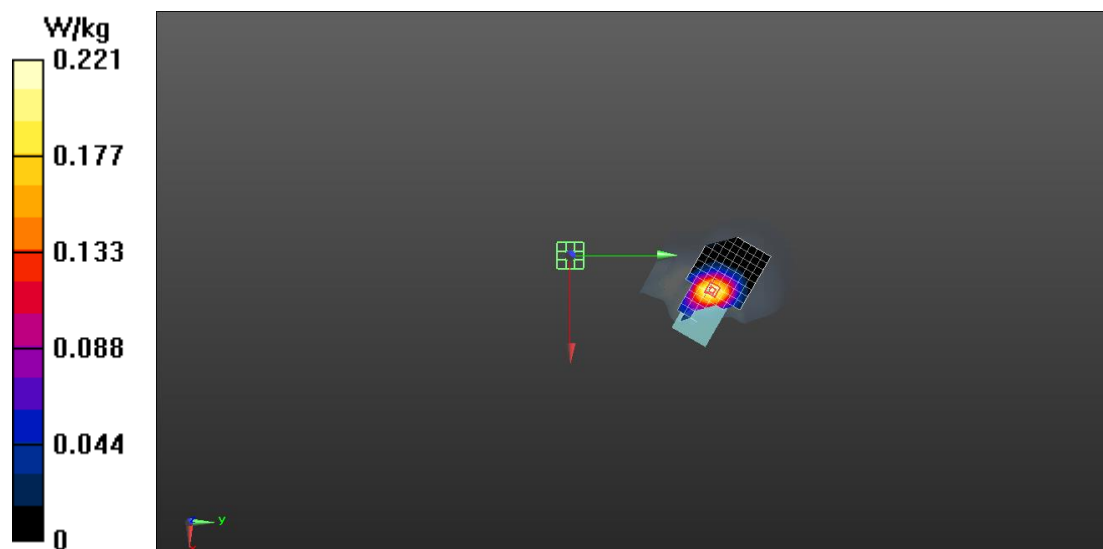

NR N5 Body

Communication System: UID 0, 5G NR (0); Communication System Band: n5; Frequency: 839 MHz;

Medium parameters used: $f = 839$ MHz; $\sigma = 0.915$ S/m; $\epsilon_r = 42.619$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.05, 10.05, 10.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.666 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 10.37 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.845 W/kg

SAR(1 g) = 0.414 W/kg; SAR(10 g) = 0.225 W/kg

Maximum value of SAR (measured) = 0.670 W/kg

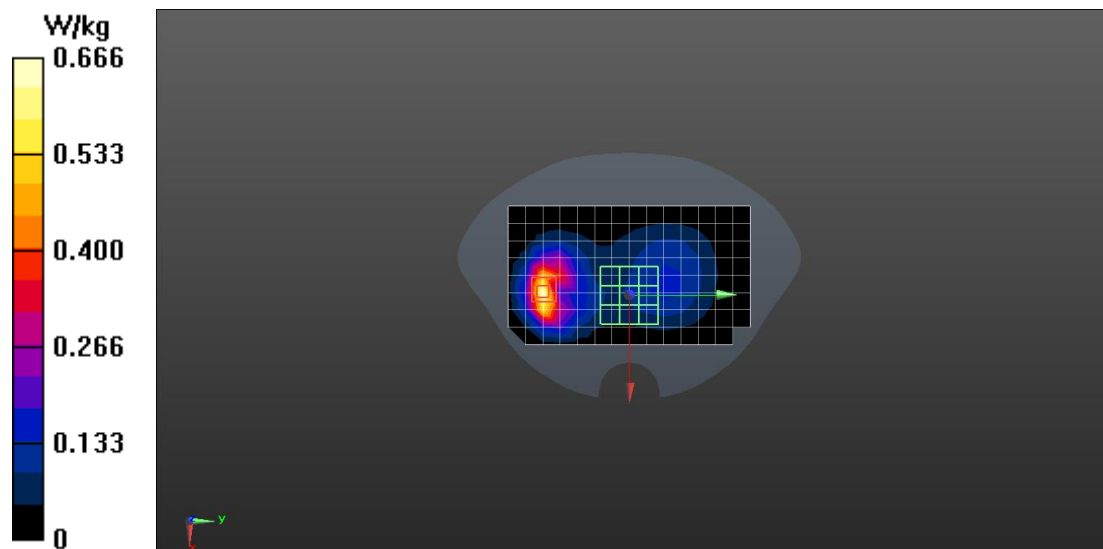

NR N7 Head

Communication System: UID 0, 5G NR (0); Communication System Band: N7; Frequency: 2560 MHz;

Medium parameters used: $f = 2560$ MHz; $\sigma = 1.927$ S/m; $\epsilon_r = 40.315$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(7.72, 7.72, 7.72); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (12x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.766 W/kg


Configuration/Head/Zoom Scan (7x7x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.263 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.467 W/kg; SAR(10 g) = 0.208 W/kg

Maximum value of SAR (measured) = 0.791 W/kg

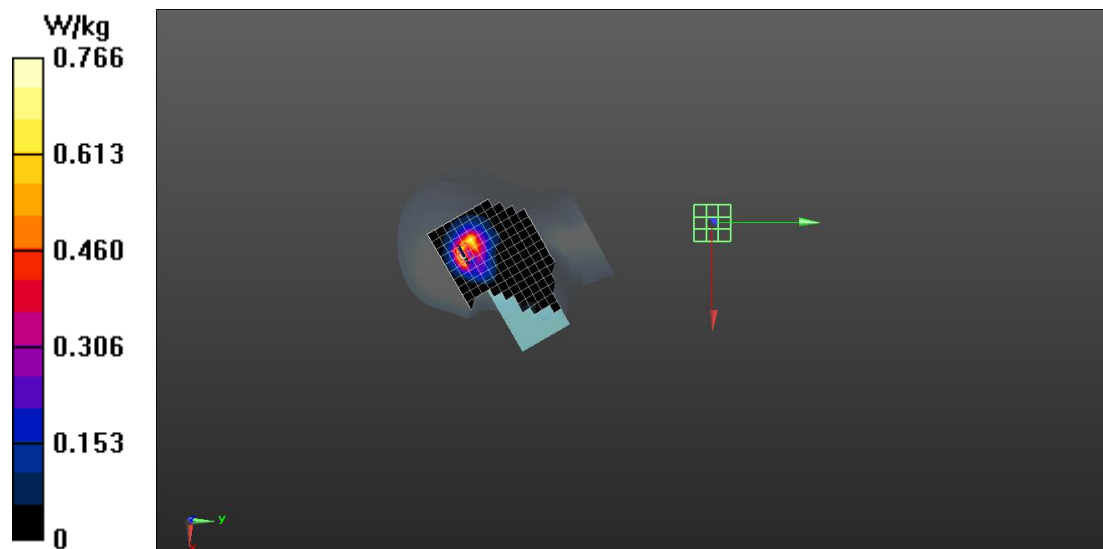

NR N7 Body

Communication System: UID 0, 5G NR (0); Communication System Band: N7; Frequency: 2560 MHz;

Medium parameters used: $f = 2560$ MHz; $\sigma = 1.908$ S/m; $\epsilon_r = 40.185$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(7.72, 7.72, 7.72); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body 2/Area Scan (11x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.46 W/kg


Configuration/Body 2/Zoom Scan (7x7x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.332 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.91 W/kg

SAR(1 g) = 0.837 W/kg; SAR(10 g) = 0.325 W/kg

Maximum value of SAR (measured) = 1.54 W/kg

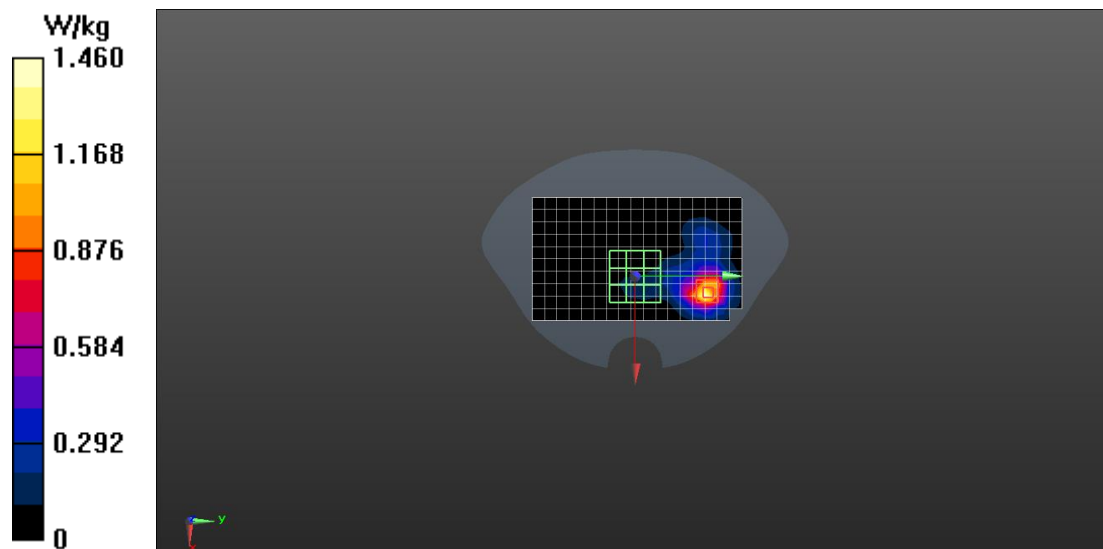

NR N38 Head

Communication System: UID 0, 5G NR (0); Communication System Band: n38; Frequency: 2600 MHz;

Medium parameters used: $f = 2600$ MHz; $\sigma = 1.943$ S/m; $\epsilon_r = 40.268$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(7.72, 7.72, 7.72); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (12x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 2.40 W/kg


Configuration/Head/Zoom Scan (7x7x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 12.07 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 2.15 W/kg

SAR(1 g) = 0.917 W/kg; SAR(10 g) = 0.449 W/kg

Maximum value of SAR (measured) = 1.59 W/kg

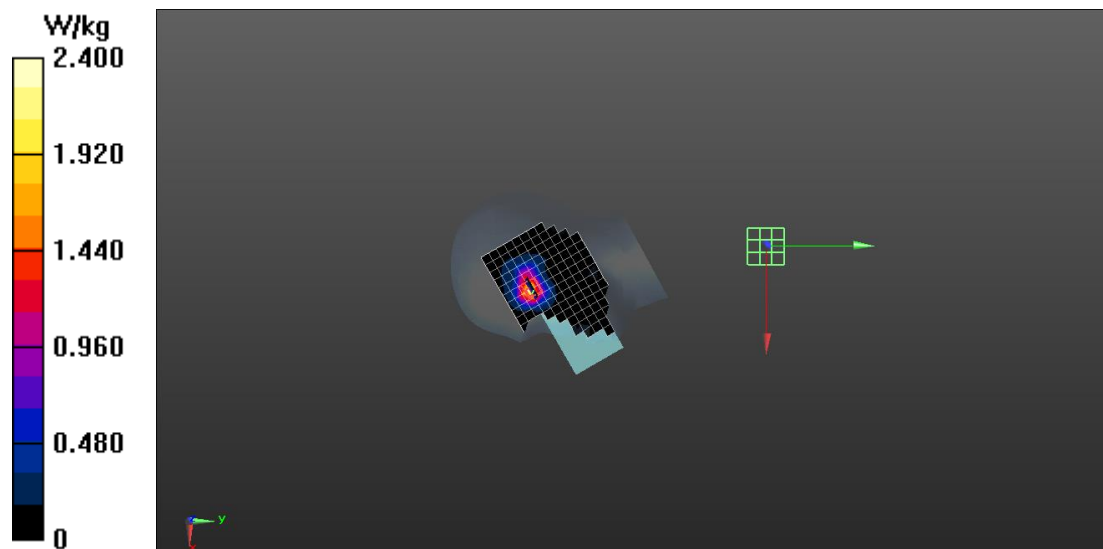

NR N38 Body

Communication System: UID 0, 5G NR (0); Communication System Band: N7; Frequency: 2560 MHz;

Medium parameters used: $f = 2560$ MHz; $\sigma = 1.908$ S/m; $\epsilon_r = 40.185$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(7.72, 7.72, 7.72); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body 2/Area Scan (6x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.32 W/kg


Configuration/Body 2/Zoom Scan (7x7x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 24.20 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.75 W/kg

SAR(1 g) = 0.889 W/kg; SAR(10 g) = 0.453 W/kg

Maximum value of SAR (measured) = 1.40 W/kg

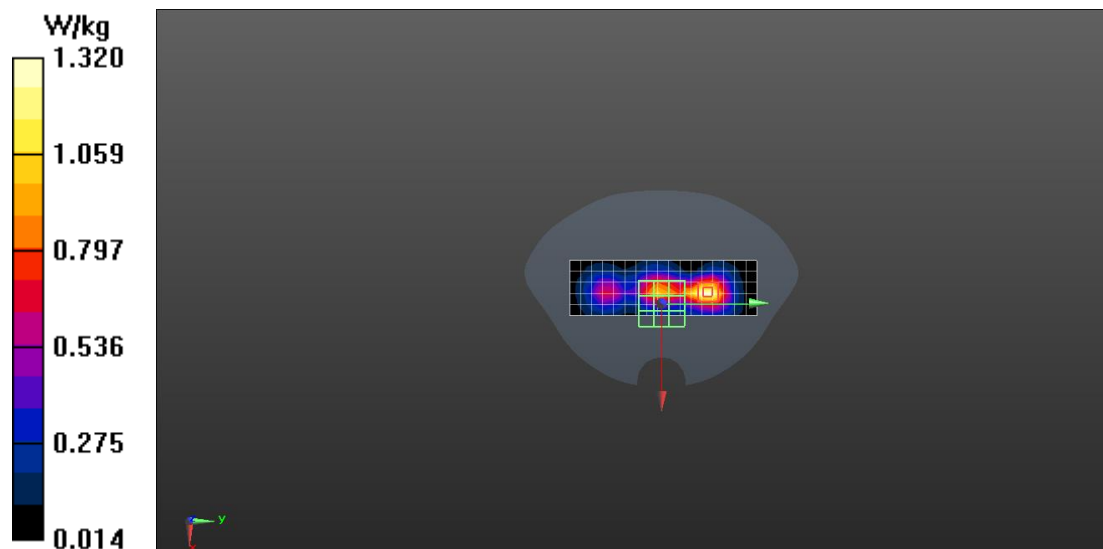

NR N41 Head

Communication System: UID 0, 5G NR (0); Communication System Band: n41; Frequency: 2640 MHz;

Medium parameters used: $f = 2640$ MHz; $\sigma = 2.005$ S/m; $\epsilon_r = 40.094$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(7.72, 7.72, 7.72); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (12x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.94 W/kg


Configuration/Head/Zoom Scan (8x8x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 10.69 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 2.44 W/kg

SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.480 W/kg

Maximum value of SAR (measured) = 1.83 W/kg

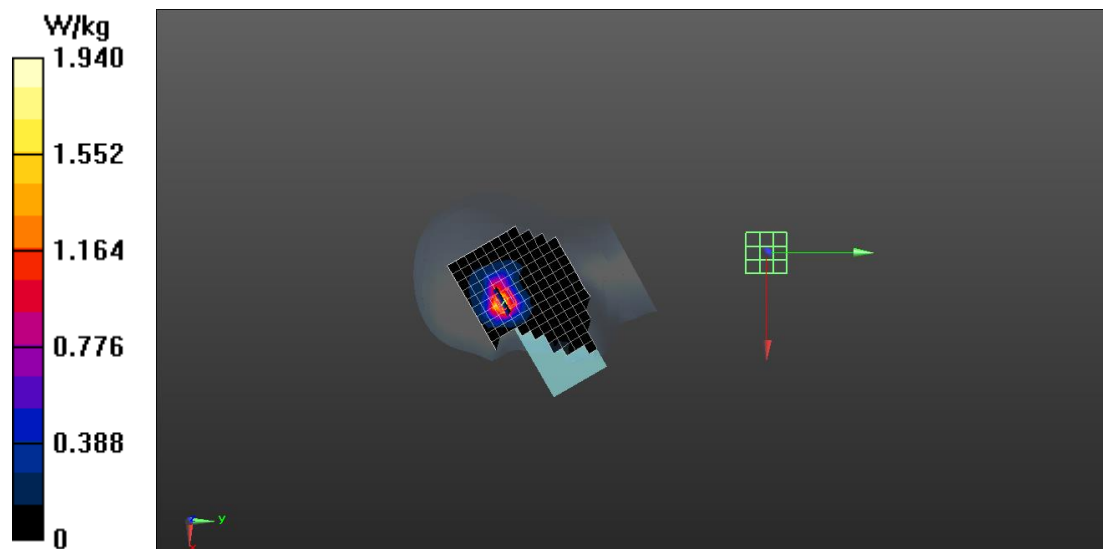

NR N41 Body

Communication System: UID 0, 5G NR (0); Communication System Band: n41; Frequency: 2546 MHz;

Medium parameters used (interpolated): $f = 2546$ MHz; $\sigma = 1.888$ S/m; $\epsilon_r = 40.15$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(7.98, 7.98, 7.98); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (6x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.25 W/kg


Configuration/Body/Zoom Scan (7x7x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 22.21 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.62 W/kg

SAR(1 g) = 0.821 W/kg; SAR(10 g) = 0.416 W/kg

Maximum value of SAR (measured) = 1.30 W/kg

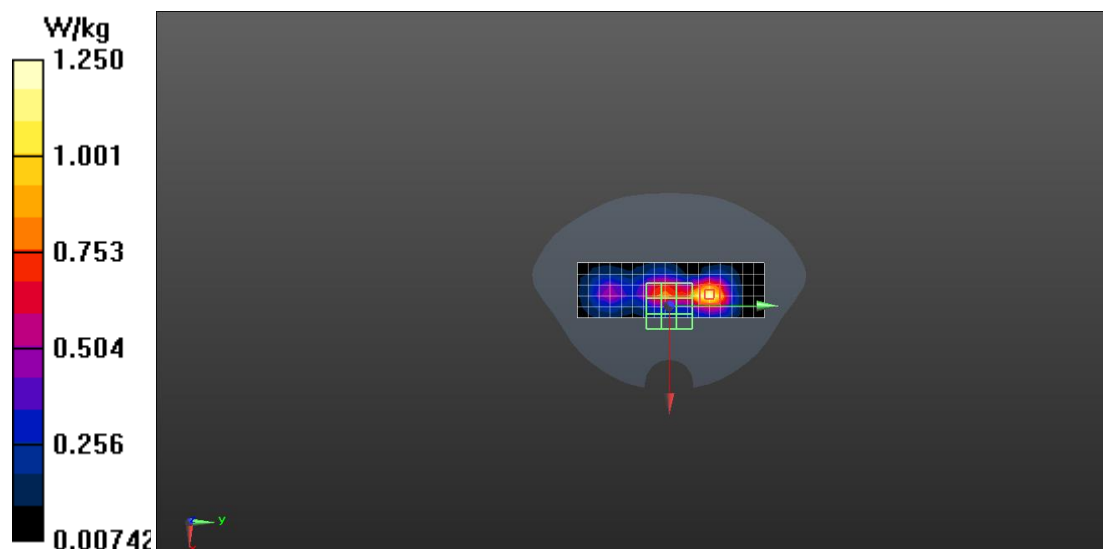

NR N77 Block A

Communication System: UID 0, 5G NR (0); Communication System Band: n77; Frequency: 3500 MHz;

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.802$ S/m; $\epsilon_r = 38.557$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(7.03, 7.03, 7.03); Calibrated: 2023/6/5;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 33.0$
- Electronics: DAE3 Sn427; Calibrated: 2023/5/17
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (11x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.53 W/kg


Configuration/Head/Zoom Scan (7x8x5)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=4$ mm

Reference Value = 9.656 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.46 W/kg

SAR(1 g) = 0.886 W/kg; SAR(10 g) = 0.338 W/kg

Maximum value of SAR (measured) = 1.78 W/kg

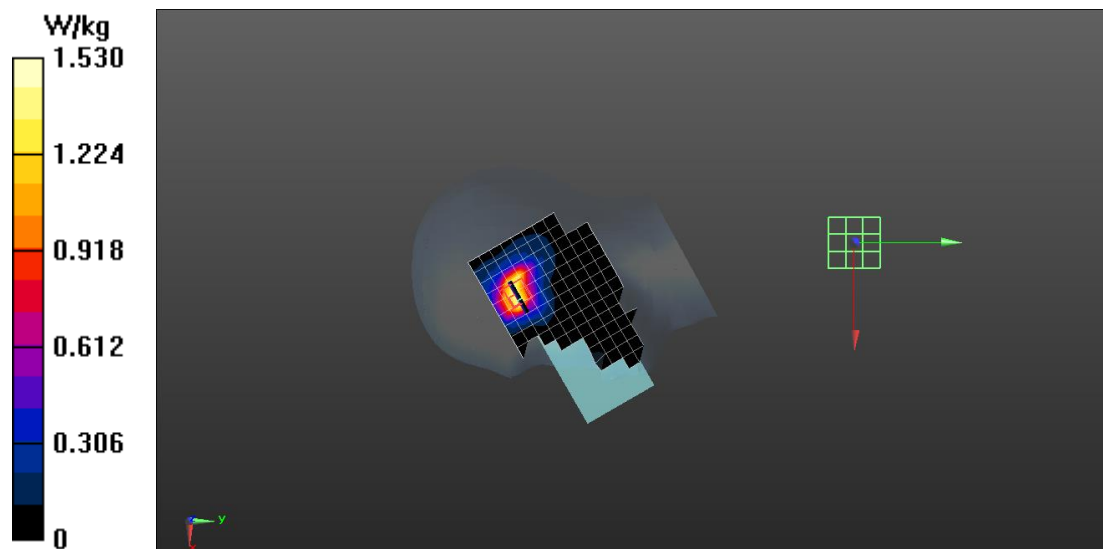

NR N77 Block A Body

Communication System: UID 0, 5G NR (0); Communication System Band: n77; Frequency: 3500 MHz;

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.802$ S/m; $\epsilon_r = 38.557$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(7.12, 7.12, 7.12); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 33.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (6x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.55 W/kg


Configuration/Body/Zoom Scan (9x9x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 11.12 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 2.08 W/kg

SAR(1 g) = 0.843 W/kg; SAR(10 g) = 0.376 W/kg

Maximum value of SAR (measured) = 1.53 W/kg

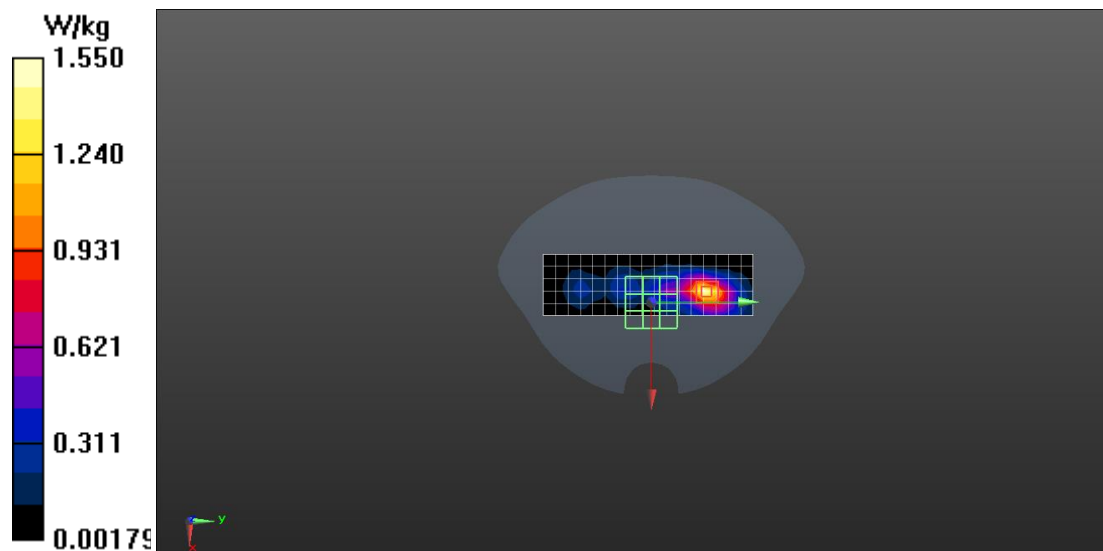

NR N77 Block C

Communication System: UID 0, 5G NR (0); Communication System Band: n77; Frequency: 3840 MHz;

Medium parameters used: $f = 3840$ MHz; $\sigma = 3.14$ S/m; $\epsilon_r = 38.215$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(6.7, 6.7, 6.7); Calibrated: 2023/6/5;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 33.0$
- Electronics: DAE3 Sn427; Calibrated: 2023/5/17
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (11x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.47 W/kg


Configuration/Head/Zoom Scan (7x7x5)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=4$ mm

Reference Value = 11.28 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 2.37 W/kg

SAR(1 g) = 0.912 W/kg; SAR(10 g) = 0.370 W/kg

Maximum value of SAR (measured) = 1.69 W/kg

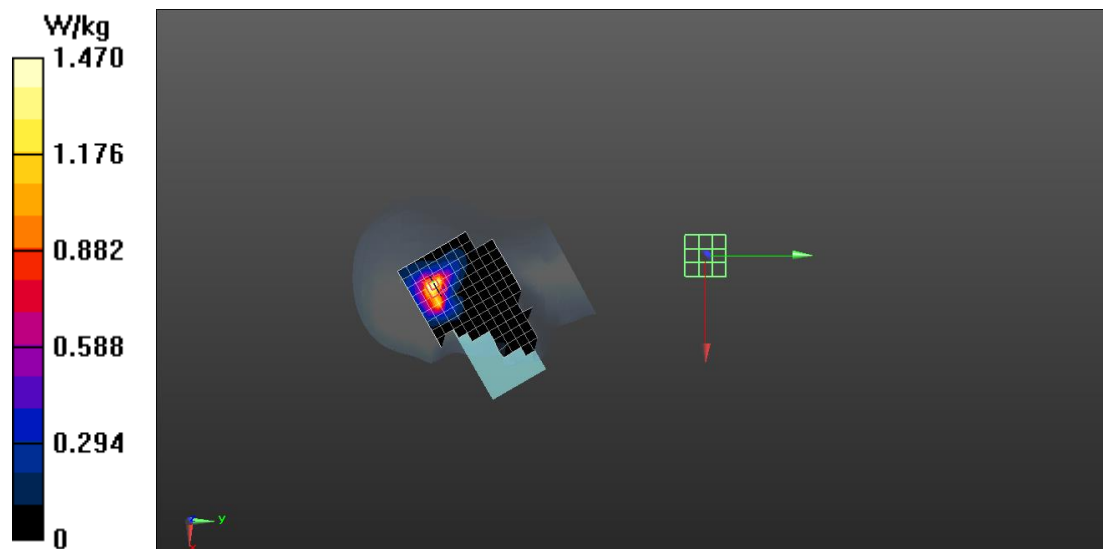

NR N77 Block C Body

Communication System: UID 0, 5G NR (0); Communication System Band: n77; Frequency: 3930 MHz;

Medium parameters used (interpolated): $f = 3930$ MHz; $\sigma = 3.202$ S/m; $\epsilon_r = 38.356$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(6.84, 6.84, 6.84); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 33.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (11x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.68 W/kg


Configuration/Body/Zoom Scan (7x7x5)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=4$ mm

Reference Value = 14.62 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 2.72 W/kg

SAR(1 g) = 0.950 W/kg; SAR(10 g) = 0.401 W/kg

Maximum value of SAR (measured) = 1.97 W/kg

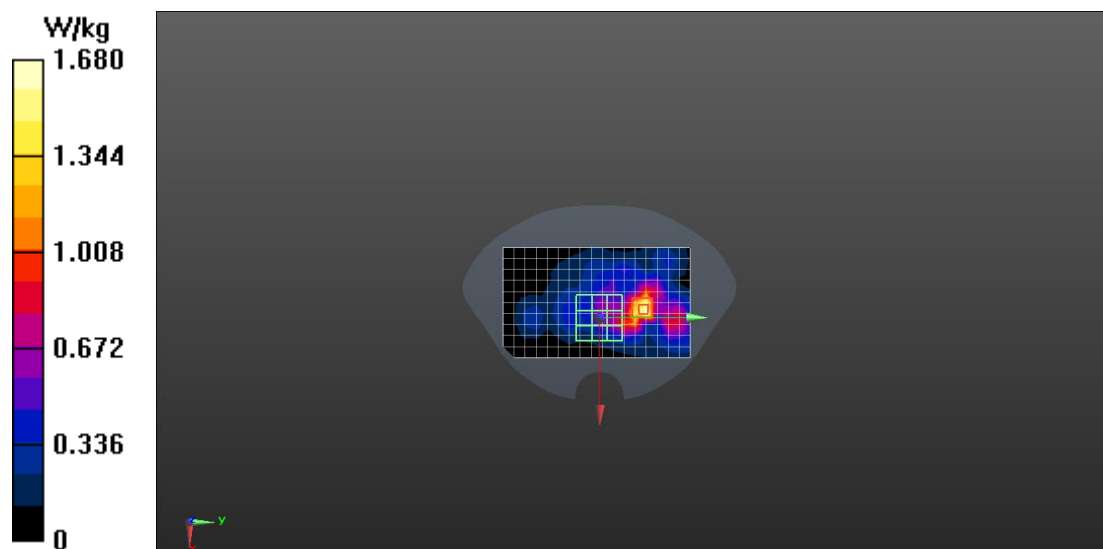

NR N78 Block A Head

Communication System: UID 0, 5G NR (0); Communication System Band: n78; Frequency: 3500.01 MHz;

Medium parameters used (interpolated): $f = 3500.01$ MHz; $\sigma = 2.802$ S/m; $\epsilon_r = 38.557$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(7.12, 7.12, 7.12); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 33.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (11x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.86 W/kg


Configuration/Head/Zoom Scan (7x8x5)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=4$ mm

Reference Value = 9.868 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 2.99 W/kg

SAR(1 g) = 0.956 W/kg; SAR(10 g) = 0.425 W/kg

Maximum value of SAR (measured) = 2.15 W/kg

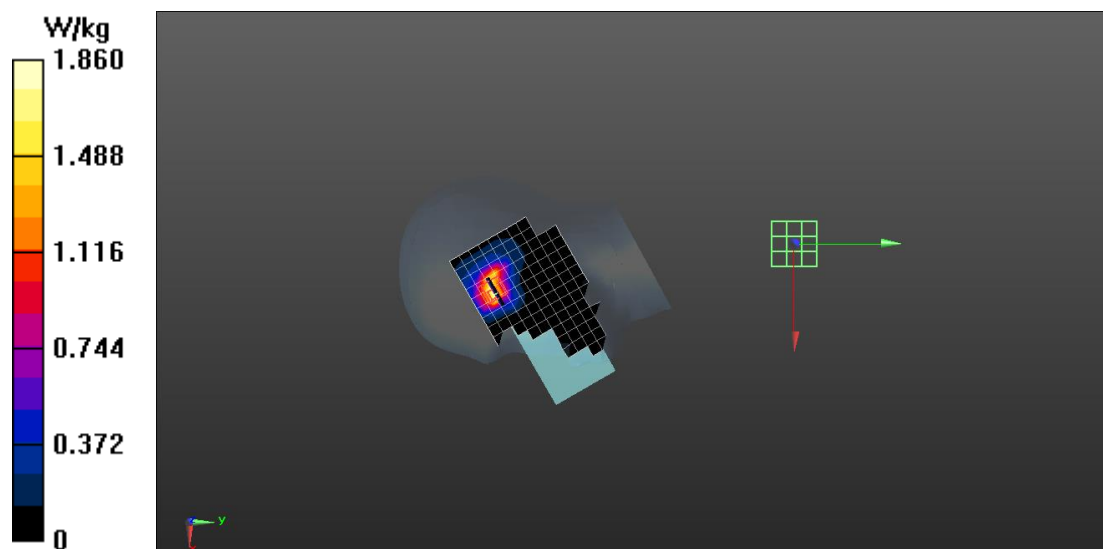

NR N78 Block A Body

Communication System: UID 0, 5G NR (0); Communication System Band: n78; Frequency: 3500.01 MHz;

Medium parameters used (interpolated): $f = 3500.01$ MHz; $\sigma = 2.802$ S/m; $\epsilon_r = 38.557$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(7.12, 7.12, 7.12); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 33.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (6x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm


Maximum value of SAR (measured) = 1.60 W/kg

Configuration/Body/Zoom Scan (7x7x5)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=4$ mm

Reference Value = 11.80 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 2.21 W/kg

SAR(1 g) = 0.881 W/kg; SAR(10 g) = 0.391 W/kg

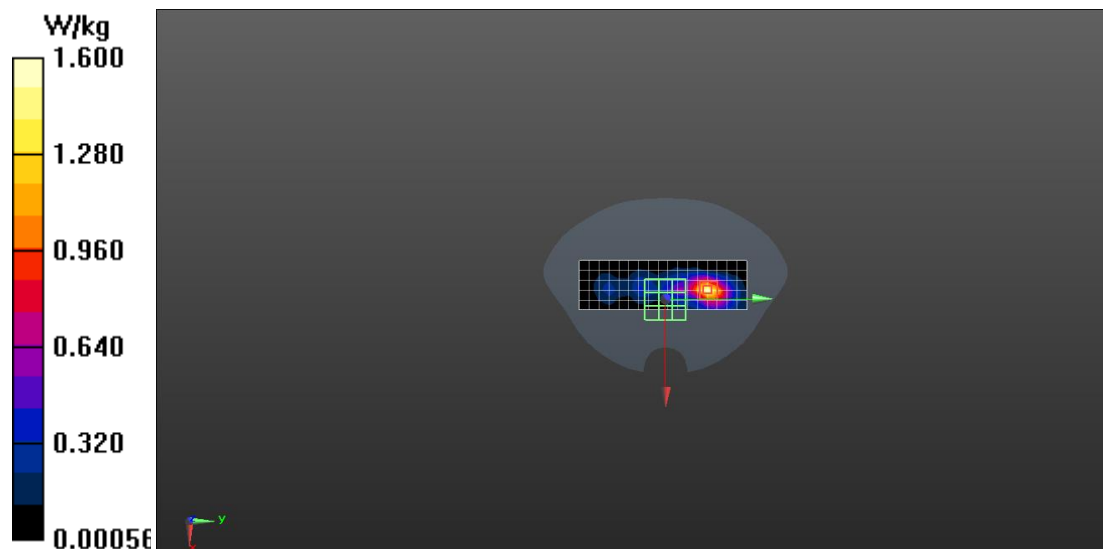

NR N78 Block C Head

Communication System: UID 0, 5G NR (0); Communication System Band: n78; Frequency: 3750 MHz;

Medium parameters used (interpolated): $f = 3750$ MHz; $\sigma = 3.057$ S/m; $\epsilon_r = 38.35$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(6.83, 6.83, 6.83); Calibrated: 2023/6/5;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 33.0$
- Electronics: DAE3 Sn427; Calibrated: 2023/5/17
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (11x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.29 W/kg


Configuration/Head/Zoom Scan (7x7x5)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=4$ mm

Reference Value = 12.03 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 2.36 W/kg

SAR(1 g) = 0.866 W/kg; SAR(10 g) = 0.357 W/kg

Maximum value of SAR (measured) = 1.72 W/kg

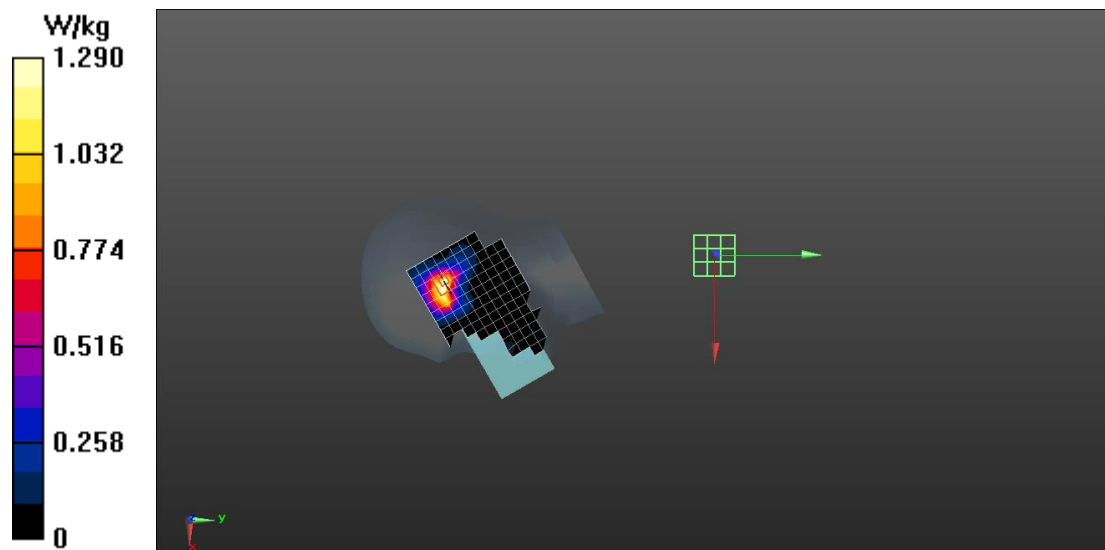

NR N78 Block C Body

Communication System: UID 0, 5G NR (0); Communication System Band: n78; Frequency: 3750 MHz;

Medium parameters used (interpolated): $f = 3750$ MHz; $\sigma = 3.057$ S/m; $\epsilon_r = 38.35$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(7.02, 7.02, 7.02); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 33.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (6x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 2.33 W/kg


Configuration/Body/Zoom Scan (7x7x5)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=4$ mm

Reference Value = 12.57 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.25 W/kg

SAR(1 g) = 0.775 W/kg; SAR(10 g) = 0.296 W/kg

Maximum value of SAR (measured) = 1.48 W/kg

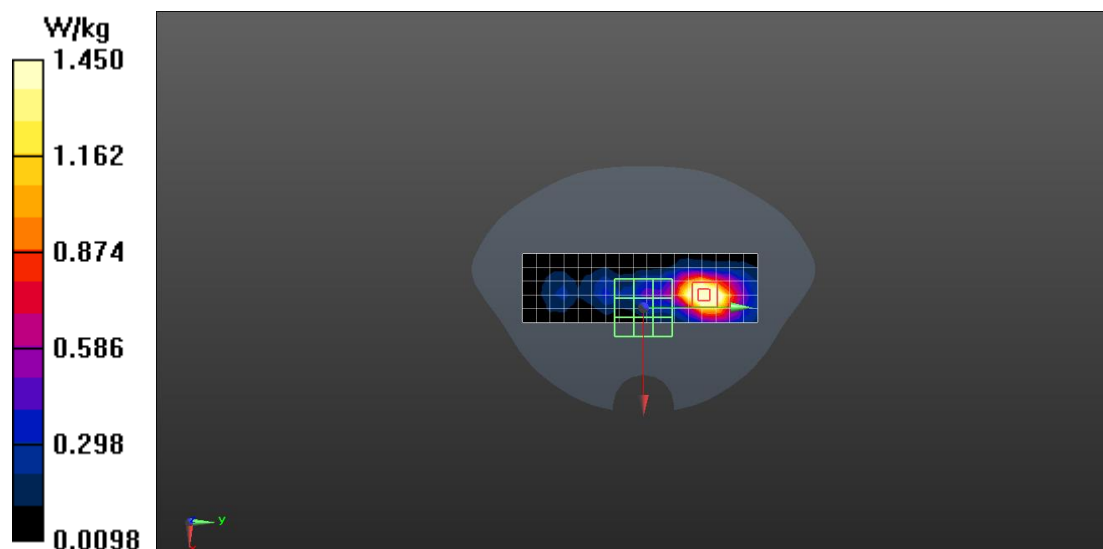

2.4G WIFI Head

Communication System: UID 0, 2.45GHz Wi-Fi (0); Communication System Band: ISM 2.4GHz; Frequency: 2437 MHz;

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.8$ S/m; $\epsilon_r = 40.194$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(7.98, 7.98, 7.98); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (11x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.09 W/kg


Configuration/Head/Zoom Scan (7x7x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 15.05 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 0.702 W/kg; SAR(10 g) = 0.375 W/kg

Maximum value of SAR (measured) = 1.17 W/kg

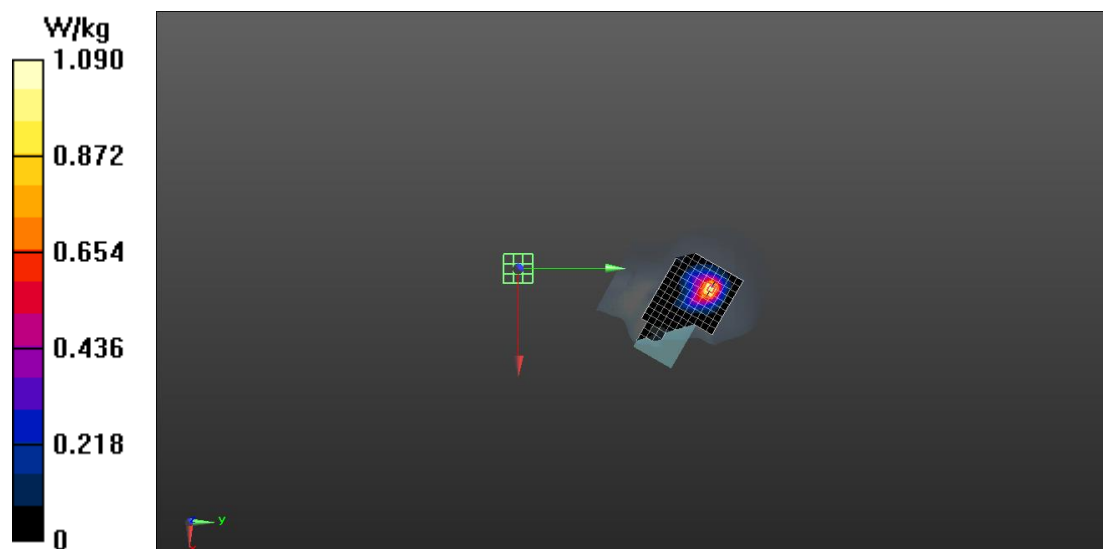

2.4G WIFI Body

Communication System: UID 0, 2.45GHz Wi-Fi (0); Communication System Band: ISM 2.4GHz; Frequency: 2437 MHz;

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.8$ S/m; $\epsilon_r = 40.194$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(7.98, 7.98, 7.98); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body 2/Area Scan (11x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.456 W/kg


Configuration/Body 2/Zoom Scan (7x7x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.930 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.605 W/kg

SAR(1 g) = 0.285 W/kg; SAR(10 g) = 0.157 W/kg

Maximum value of SAR (measured) = 0.468 W/kg

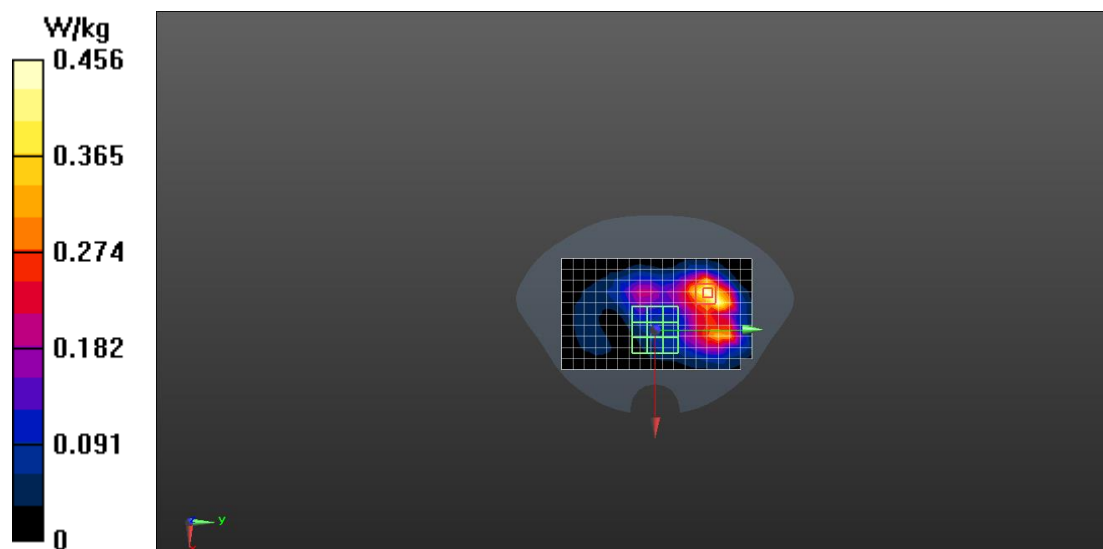

5.2G WIFI Body

Communication System: UID 0, 5GHz Wi-Fi (0); Communication System Band: 5G

Band(5030.0 - 5825.0 MHz); Frequency: 5190 MHz;

Medium parameters used (interpolated): $f = 5190$ MHz; $\sigma = 4.422$ S/m; $\epsilon_r = 36.87$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(5.64, 5.64, 5.64); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 29.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (13x22x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.838 W/kg


Configuration/Body/Zoom Scan (8x9x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 2.260 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.40 W/kg

SAR(1 g) = 0.401 W/kg; SAR(10 g) = 0.157 W/kg

Maximum value of SAR (measured) = 0.883 W/kg

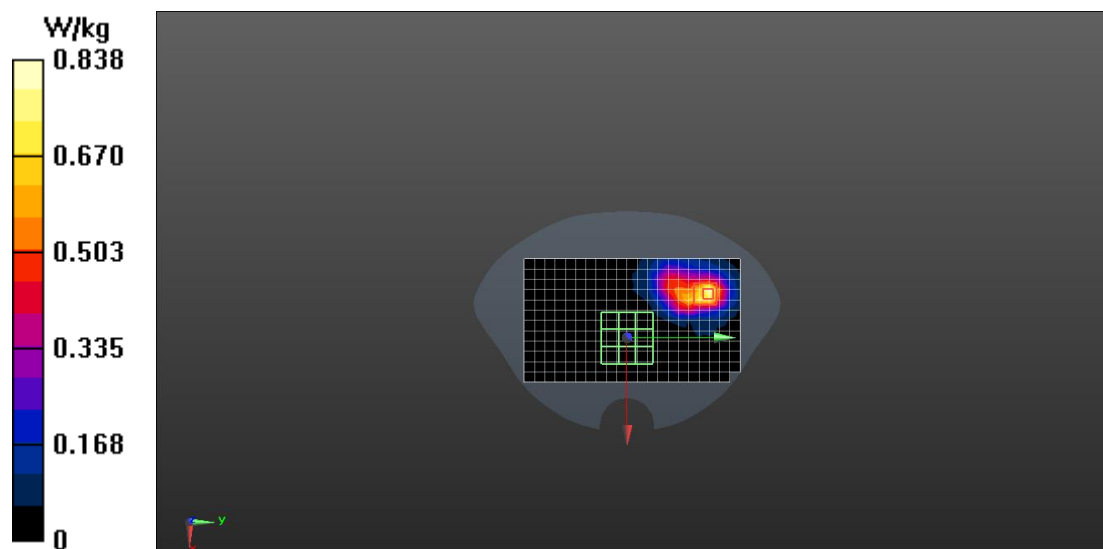

5.3G WIFI Head

Communication System: UID 0, 5GHz Wi-Fi (0); Communication System Band: 5G Band(5030.0 - 5825.0 MHz); Frequency: 5280 MHz;
Medium parameters used: $f = 5280$ MHz; $\sigma = 4.522$ S/m; $\epsilon_r = 36.811$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(5.64, 5.64, 5.64); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 29.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (13x22x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 0.608 W/kg


Configuration/Head/Zoom Scan (9x9x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 2.209 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.256 W/kg; SAR(10 g) = 0.070 W/kg

Maximum value of SAR (measured) = 0.676 W/kg

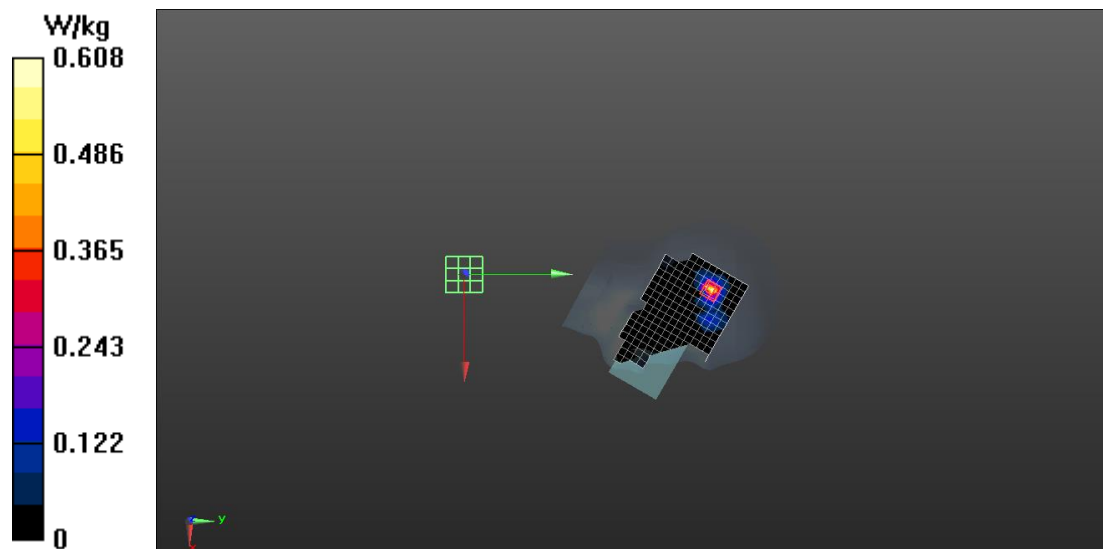

5.3G WIFI Body

Communication System: UID 0, 5GHz Wi-Fi (0); Communication System Band: 5G Band(5030.0 - 5825.0 MHz); Frequency: 5280 MHz;
Medium parameters used: $f = 5280$ MHz; $\sigma = 4.522$ S/m; $\epsilon_r = 36.811$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(5.64, 5.64, 5.64); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 29.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body 2/Area Scan (13x22x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 0.882 W/kg


Configuration/Body 2/Zoom Scan (8x9x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 2.294 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.48 W/kg

SAR(1 g) = 0.422 W/kg; SAR(10 g) = 0.165 W/kg

Maximum value of SAR (measured) = 0.930 W/kg

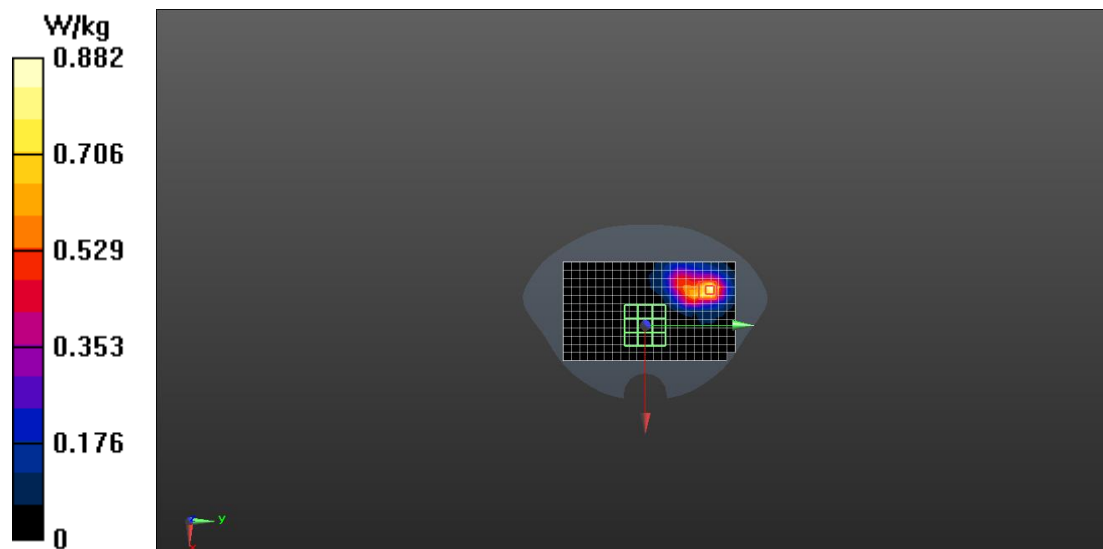

5.3G WIFI Limb

Communication System: UID 0, 5GHz Wi-Fi (0); Communication System Band: 5G Band(5030.0 - 5825.0 MHz); Frequency: 5280 MHz;
Medium parameters used: $f = 5280$ MHz; $\sigma = 4.522$ S/m; $\epsilon_r = 36.811$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(5.64, 5.64, 5.64); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 29.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body 2/Area Scan (13x22x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 4.92 W/kg


Configuration/Body 2/Zoom Scan (8x9x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 2.608 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 15.6 W/kg

SAR(1 g) = 3.11 W/kg; SAR(10 g) = 0.780 W/kg

Maximum value of SAR (measured) = 8.93 W/kg

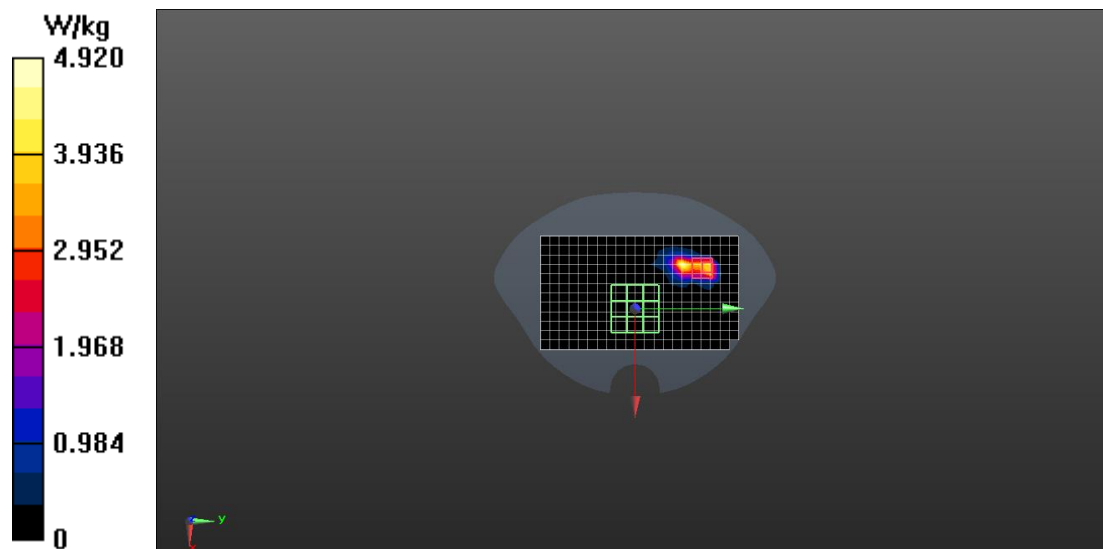

5.6G WIFI Head

Communication System: UID 0, 5GHz Wi-Fi (0); Communication System Band: 5G Band(5030.0 - 5825.0 MHz); Frequency: 5580 MHz;
Medium parameters used: $f = 5580$ MHz; $\sigma = 4.82$ S/m; $\epsilon_r = 36.076$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(5.01, 5.01, 5.01); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 29.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (13x22x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 0.534 W/kg


Configuration/Head/Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 3.469 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.962 W/kg

SAR(1 g) = 0.204 W/kg; SAR(10 g) = 0.057 W/kg

Maximum value of SAR (measured) = 0.604 W/kg

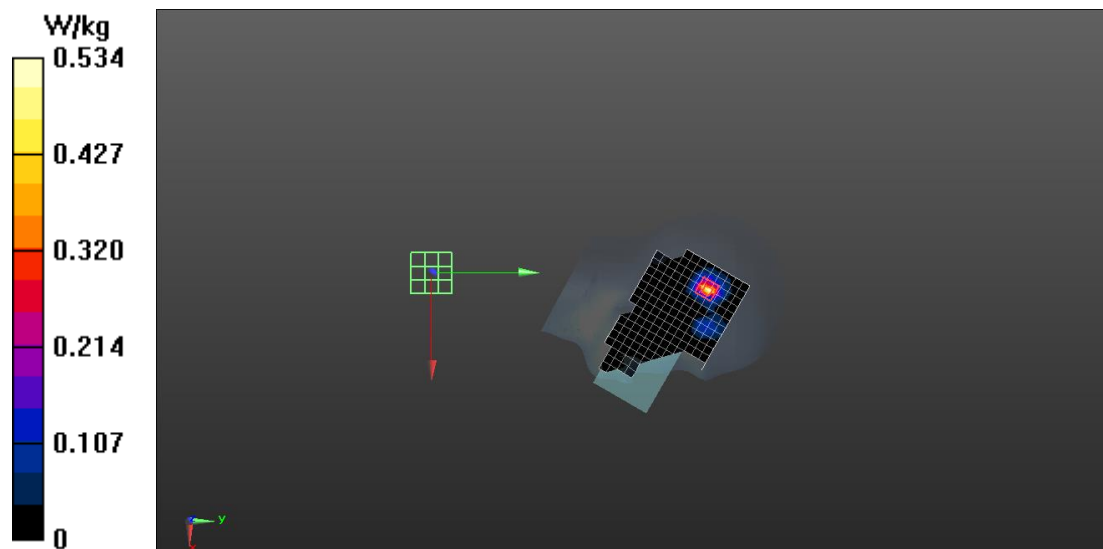

5.6G WIFI Body

Communication System: UID 0, 5GHz Wi-Fi (0); Communication System Band: 5G Band(5030.0 - 5825.0 MHz); Frequency: 5580 MHz;
Medium parameters used: $f = 5580$ MHz; $\sigma = 4.82$ S/m; $\epsilon_r = 36.076$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(5.01, 5.01, 5.01); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 29.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body 2/Area Scan (13x22x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 1.04 W/kg


Configuration/Body 2/Zoom Scan (8x9x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 2.233 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.93 W/kg

SAR(1 g) = 0.509 W/kg; SAR(10 g) = 0.194 W/kg

Maximum value of SAR (measured) = 1.18 W/kg

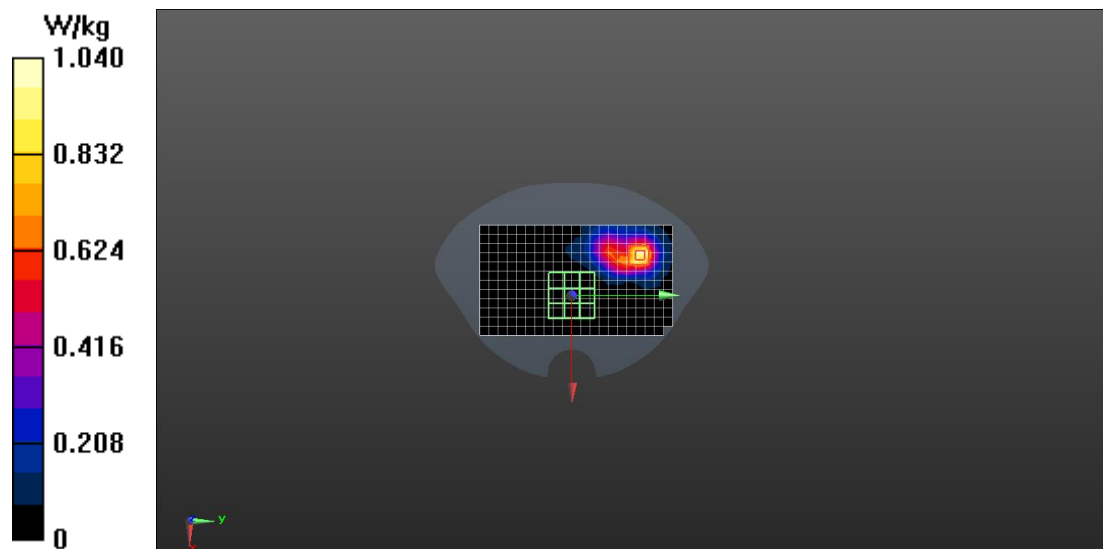

5.6G WIFI Limb

Communication System: UID 0, 5GHz Wi-Fi (0); Communication System Band: 5G Band(5030.0 - 5825.0 MHz); Frequency: 5580 MHz;
Medium parameters used: $f = 5580$ MHz; $\sigma = 4.82$ S/m; $\epsilon_r = 36.076$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(5.01, 5.01, 5.01); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 29.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body 2/Area Scan (13x22x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 6.41 W/kg


Configuration/Body 2/Zoom Scan (9x9x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 1.513 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 15.7 W/kg

SAR(1 g) = 2.87 W/kg; SAR(10 g) = 0.716 W/kg

Maximum value of SAR (measured) = 8.75 W/kg

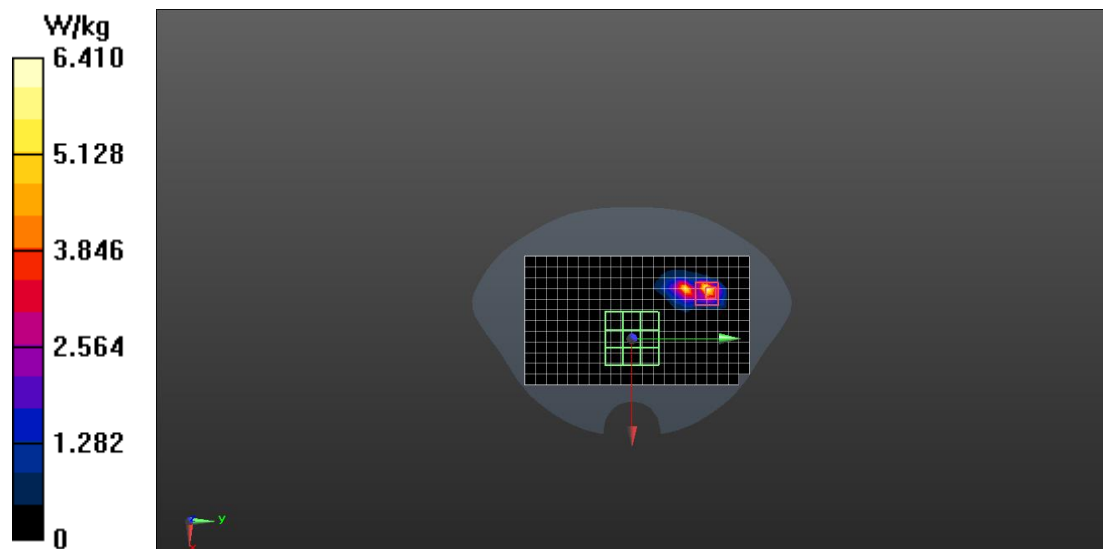

5.8G WIFI Head

Communication System: UID 0, 5GHz Wi-Fi (0); Communication System Band: 5G

Band(5030.0 - 5825.0 MHz); Frequency: 5745 MHz;

Medium parameters used (interpolated): $f = 5745$ MHz; $\sigma = 5.024$ S/m; $\epsilon_r = 35.678$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(5.05, 5.05, 5.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 29.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (13x22x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.764 W/kg


Configuration/Head/Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 4.260 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 3.90 W/kg

SAR(1 g) = 0.285 W/kg; SAR(10 g) = 0.078 W/kg

Maximum value of SAR (measured) = 0.863 W/kg

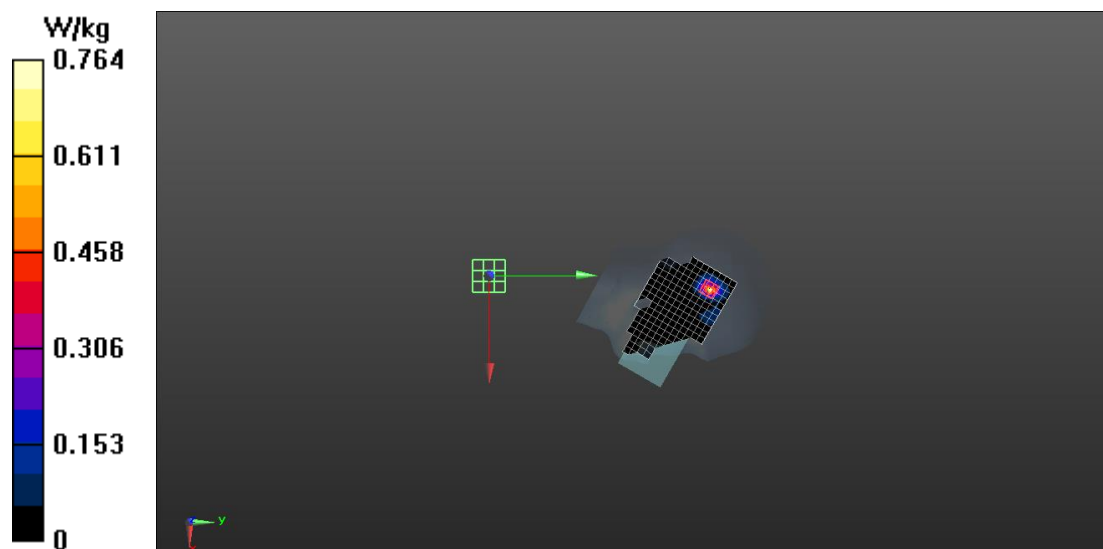

5.8G WIFI Body

Communication System: UID 0, 5GHz Wi-Fi (0); Communication System Band: 5G

Band(5030.0 - 5825.0 MHz); Frequency: 5745 MHz;

Medium parameters used (interpolated): $f = 5745$ MHz; $\sigma = 5.024$ S/m; $\epsilon_r = 35.678$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(5.05, 5.05, 5.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 29.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body 2/Area Scan (13x22x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 1.23 W/kg


Configuration/Body 2/Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 1.894 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.21 W/kg

SAR(1 g) = 0.552 W/kg; SAR(10 g) = 0.212 W/kg

Maximum value of SAR (measured) = 1.29 W/kg

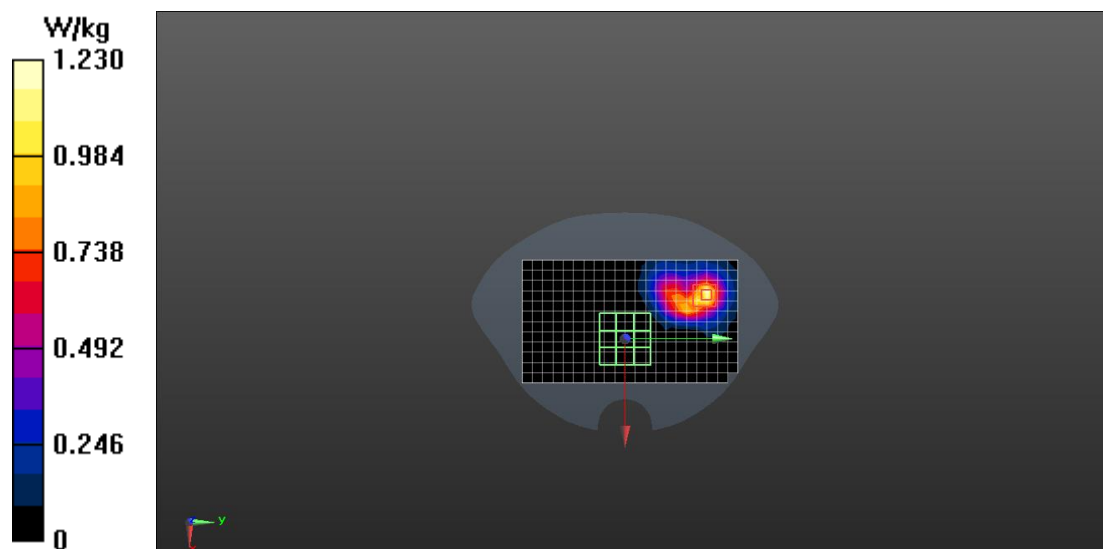

BT Head

Communication System: UID 0, BT(0) (0); Communication System Band: BT; Frequency: 2441 MHz;

Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.803$ S/m; $\epsilon_r = 40.197$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(7.98, 7.98, 7.98); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (11x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0573 W/kg


Configuration/Head/Zoom Scan (8x8x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.470 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.0830 W/kg

SAR(1 g) = 0.037 W/kg; SAR(10 g) = 0.017 W/kg

Maximum value of SAR (measured) = 0.0631 W/kg

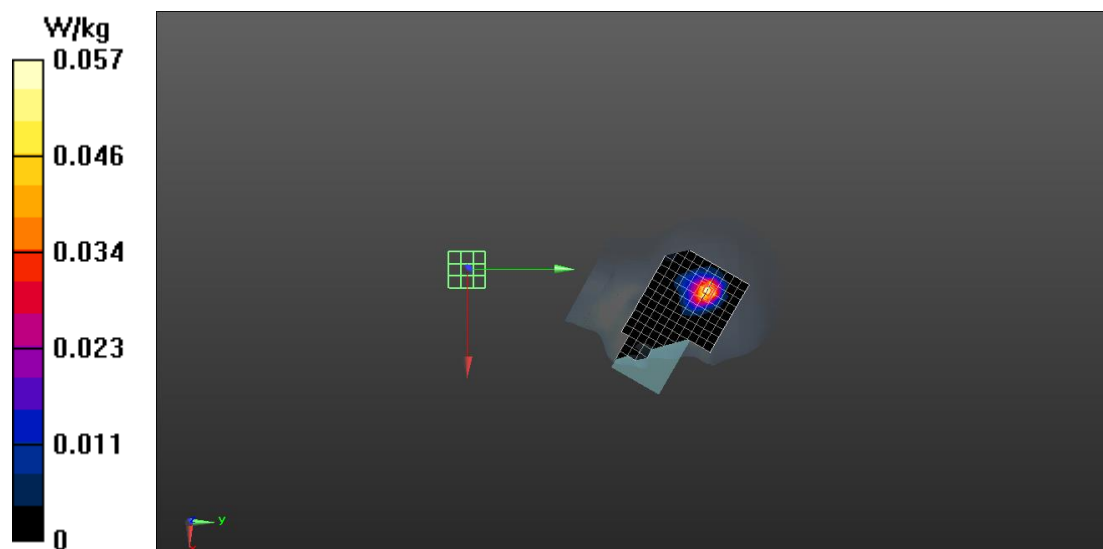

BT Body

Communication System: UID 0, BT(0) (0); Communication System Band: BT; Frequency: 2441 MHz;

Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.803$ S/m; $\epsilon_r = 40.197$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(7.98, 7.98, 7.98); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body 2/Area Scan (11x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0184 W/kg

Configuration/Body 2/Zoom Scan (7x7x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0.8440 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.0300 W/kg

SAR(1 g) = 0.012 W/kg; SAR(10 g) = 0.00418 W/kg

Maximum value of SAR (measured) = 0.0199 W/kg

