


Site no :1# CE Data No :9  
 Dis./Lisn :2022 ENV216-L  
 Limit :FCC PART 15 C  
 Env./Ins. :23.5\*C/52% Engineer :Sucy  
 Power Rating :AC 120V/60Hz  
 Test Mode :WIFI 5G TX Mode

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.154	9.60	0.01	30.30	39.91	65.78	25.87	QP
2	0.162	9.60	0.01	30.00	39.61	65.36	25.75	QP
3	0.174	9.60	0.01	28.90	38.51	64.77	26.26	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.  
 2.If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

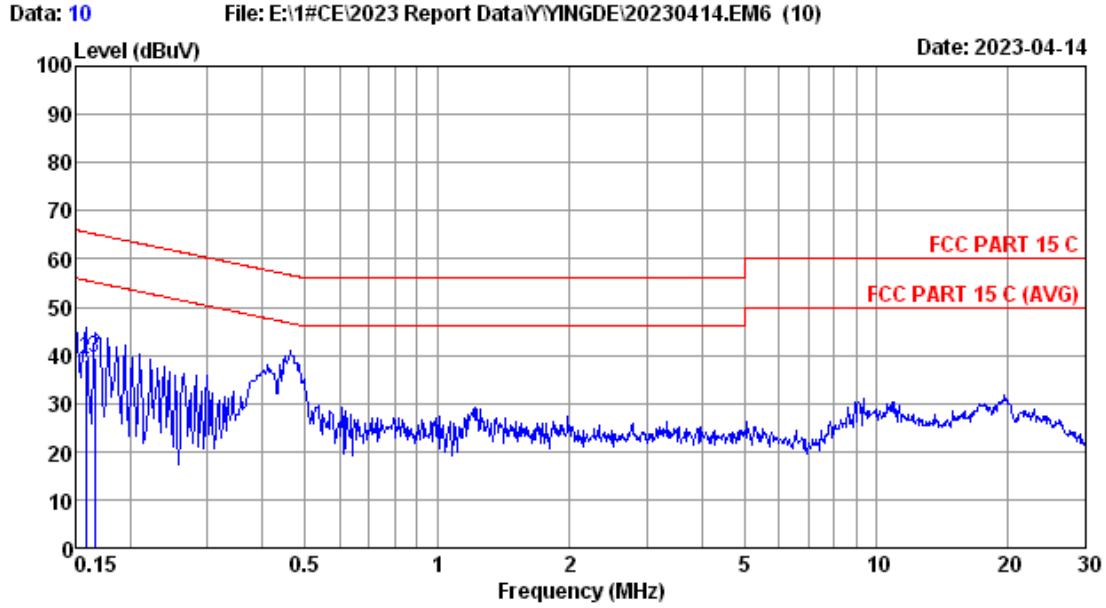


Site no :1# CE Data No :10  
 Dis./Lis :2022 ENV216-N  
 Limit :FCC PART 15 C  
 Env./Ins. :23.5\*C/52% Engineer :Sucy  
 Power Rating :AC 120V/60Hz  
 Test Mode :WIFI 5G TX Mode

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.150	9.60	0.01	33.20	42.81	66.00	23.19	QP
2	0.158	9.60	0.01	29.60	39.21	65.57	26.36	QP
3	0.166	9.60	0.01	29.80	39.41	65.16	25.75	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.  
 2.If the average limit is met when using a quasi-peak detector. the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.


Data for metal appearance:

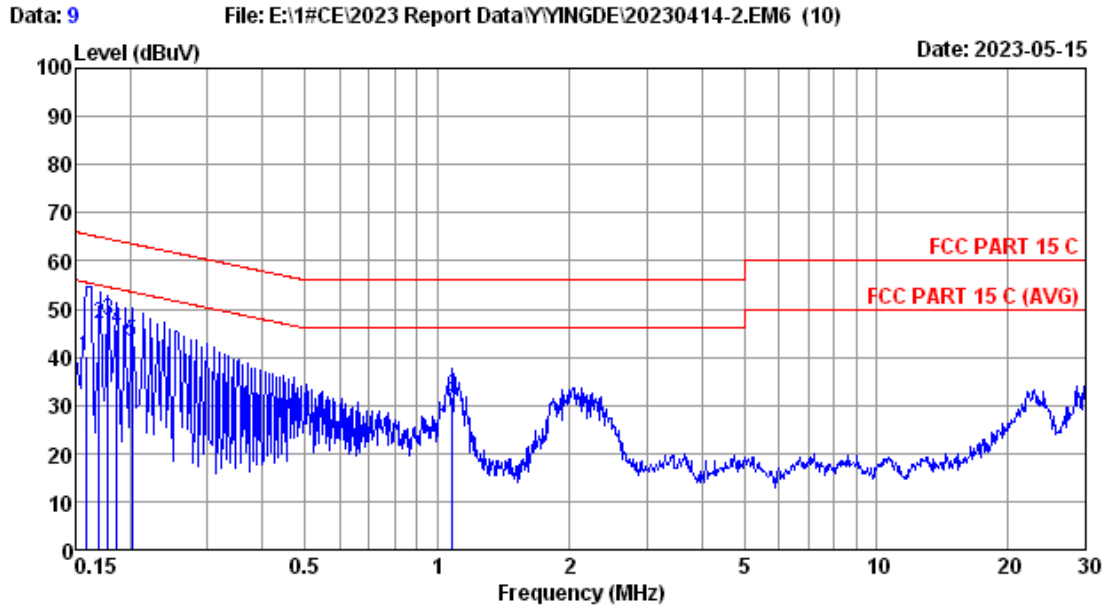

Site no :1# CE Data No :9  
 Dis./Lisn :2022 ENV216-N  
 Limit :FCC PART 15 C  
 Env./Ins. :23.5\*C/52% Engineer :Sucy  
 Power Rating :AC 120V/60Hz  
 Test Mode :WIFI 5G TX Mode

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.158	9.60	0.01	30.50	40.11	65.57	25.46	QP
2	0.170	9.60	0.01	37.40	47.01	64.96	17.95	QP
3	0.178	9.60	0.01	37.90	47.51	64.58	17.07	QP
4	0.186	9.60	0.01	36.10	45.71	64.21	18.50	QP
5	0.202	9.60	0.01	33.40	43.01	63.53	20.52	QP
6	1.082	9.49	0.01	22.10	31.60	56.00	24.40	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.  
 2.If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

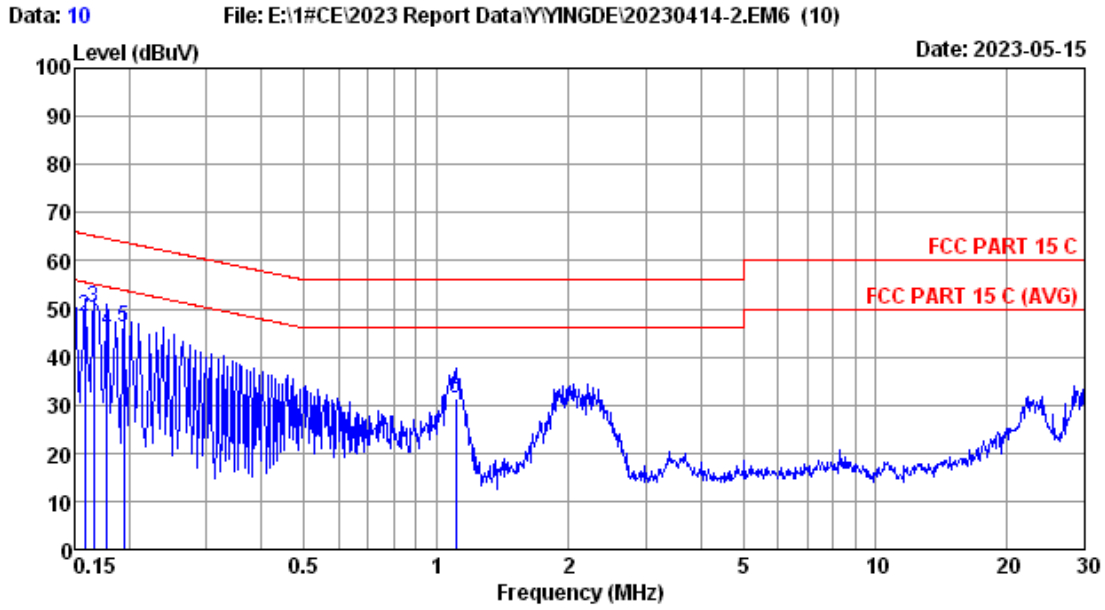

Site no :1# CE Data No :10  
 Dis./Lisn :2022 ENV216-L  
 Limit :FCC PART 15 C  
 Env./Ins. :23.5°C/52% Engineer :Sucy  
 Power Rating :AC 120V/60Hz  
 Test Mode :WIFI 5G TX Mode

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.150	9.60	0.01	38.40	48.01	66.00	17.99	QP
2	0.158	9.60	0.01	38.80	48.41	65.57	17.16	QP
3	0.166	9.60	0.01	40.60	50.21	65.16	14.95	QP
4	0.178	9.60	0.01	35.90	45.51	64.58	19.07	QP
5	0.194	9.60	0.01	36.40	46.01	63.86	17.85	QP
6	1.106	9.39	0.01	21.90	31.30	56.00	24.70	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.  
 2.If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

## 4. RADIATED EMISSION TEST

### 4.1. Test Equipments

#### 4.1.1. For frequency range below 30MHz (In 10m Anechoic Chamber)

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	10m Chamber(NSA)	AUDIX	N/A	N/A	Aug.12,22	5 Year
2.	10m Chamber(SE)	AUDIX	N/A	N/A	Sep.16,22	5 Year
3.	Loop Antenna	Schwarzbeck	FMZB 1513-60B	1513-60B015	Feb.08,23	1 Year
4.	EMI Test Receiver	Rohde & Schwarz	ESR3	102891	Oct.10,22	1 Year
5.	RF Cable	SPUMA	CFD400NL-LW	NO.4	Apr.02,23	1 Year
6.	Amplifier	EMCI	EMC9135	980348	Feb.23,23	1 Year
7.	Signal Analyzer	Rohde & Schwarz	FSV30	103669	Oct.09,22	1 Year
8.	Coaxial Switch	Anritsu	MP59B	6201397221	Apr.02,23	1 Year
9.	Coaxial Switch	Anritsu	MP59B	6201397220	Apr.02,23	1 Year
10.	Test Software	AUDIX	e3	6.100913a	N/A	N/A

Note: N/A means Not applicable.

#### 4.1.2. For frequency range 30 MHz ~1000MHz (In 3m Anechoic Chamber)

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3m Chamber(NSA)	AUDIX	N/A	N/A	Aug.11,22	5 Year
2.	3m Chamber(SE)	AUDIX	N/A	N/A	Sep.16,22	5 Year
3.	Signal Analyzer	Rohde & Schwarz	FSV30	104050	Apr.06,22	1 Year
4.	Signal Analyzer	Rohde & Schwarz	FSV30	103670	Apr.01,23	1 Year
5.	Tri-log-Broadband Antenna	SCHWARZBECK	VULB 9168	01317	Oct.28,22	1 Year
6.	NSA Cable	HUBER+SUHNER	CFD400NL-LW	No.3	Oct.09,22	1 Year
7.	Coaxial Switch	Anritsu	MP59B	6201397223	Apr.06,22	1 Year
8.	EMI Test Receiver	Rohde & Schwarz	ESR3	101931	Apr.06,22	1 Year
9.	Amplifier	HP	8447D	2944A11159	Apr.06,22	1 Year
10.	Coaxial Switch	Anritsu	MP59B	6201397223	Apr.02,23	1 Year
11.	EMI Test Receiver	Rohde & Schwarz	ESR3	101931	Apr.01,23	1 Year
12.	Amplifier	HP	8447D	2944A11159	Apr.02,23	1 Year
13.	Test Software	AUDIX	e3	6.100913a	N/A	N/A

Note: N/A means Not applicable.


4.1.3. For frequency range 1GHz~40GHz (In 3m Anechoic Chamber)

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3mChamber(Svswr)	AUDIX	N/A	N/A	Aug.09,22	5 Year
2.	3mChamber(SE)	AUDIX	N/A	N/A	Sep.16,22	5 Year
3.	Signal Analyzer	Rohde & Schwarz	FSV30	104050	Apr.06,22	1 Year
4.	Signal Analyzer	Rohde & Schwarz	FSV30	104050	Apr.01,23	1 Year
5.	Amplifier	Agilent	83017A	MY53270084	Oct.09,22	1 Year
6.	RF Cable	EMCI	EMC104-SM-S M-15000	190407	Jul.01,22	1 Year
7.	Test Software	AUDIX	e3	6.100913a	N/A	N/A
8.	Horn Antenna	ETC	MCTD 1209	DRH15F03006	Aug.12,22	1 Year


Note: N/A means Not applicable.

4.2. Block Diagram of Test Setup


For frequency range below 30MHz

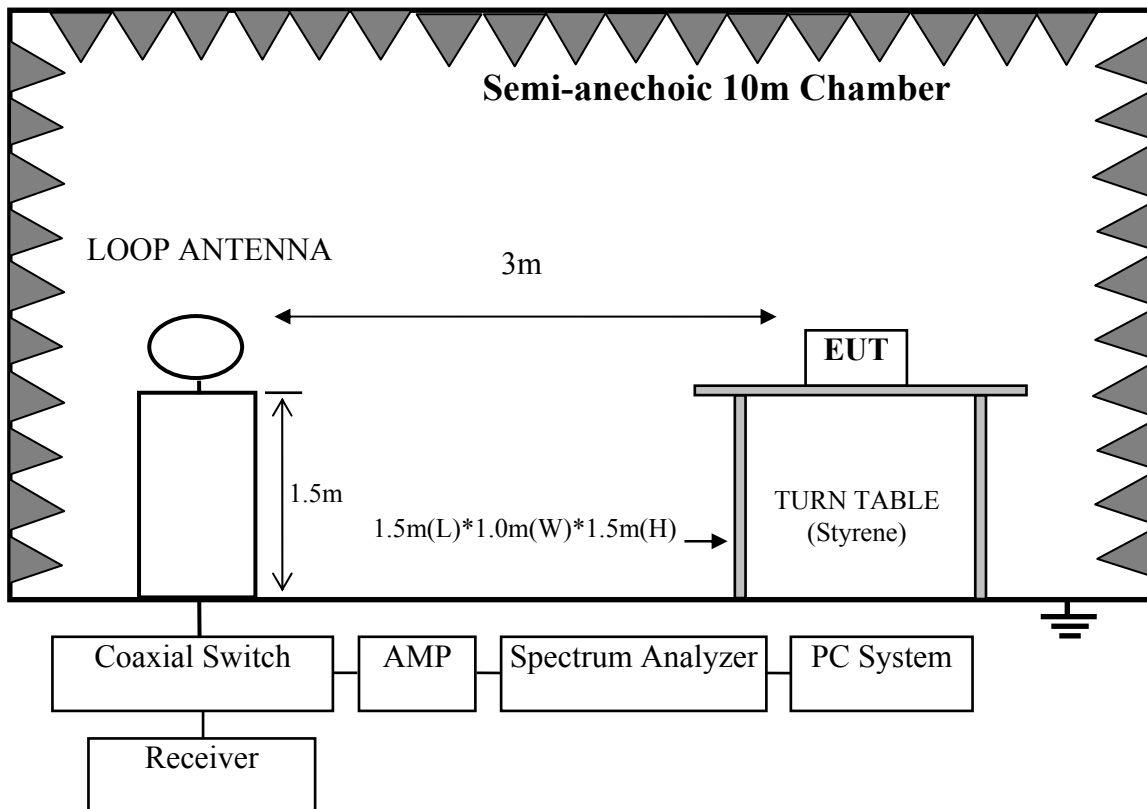

For frequency range 30MHz-1000MHz

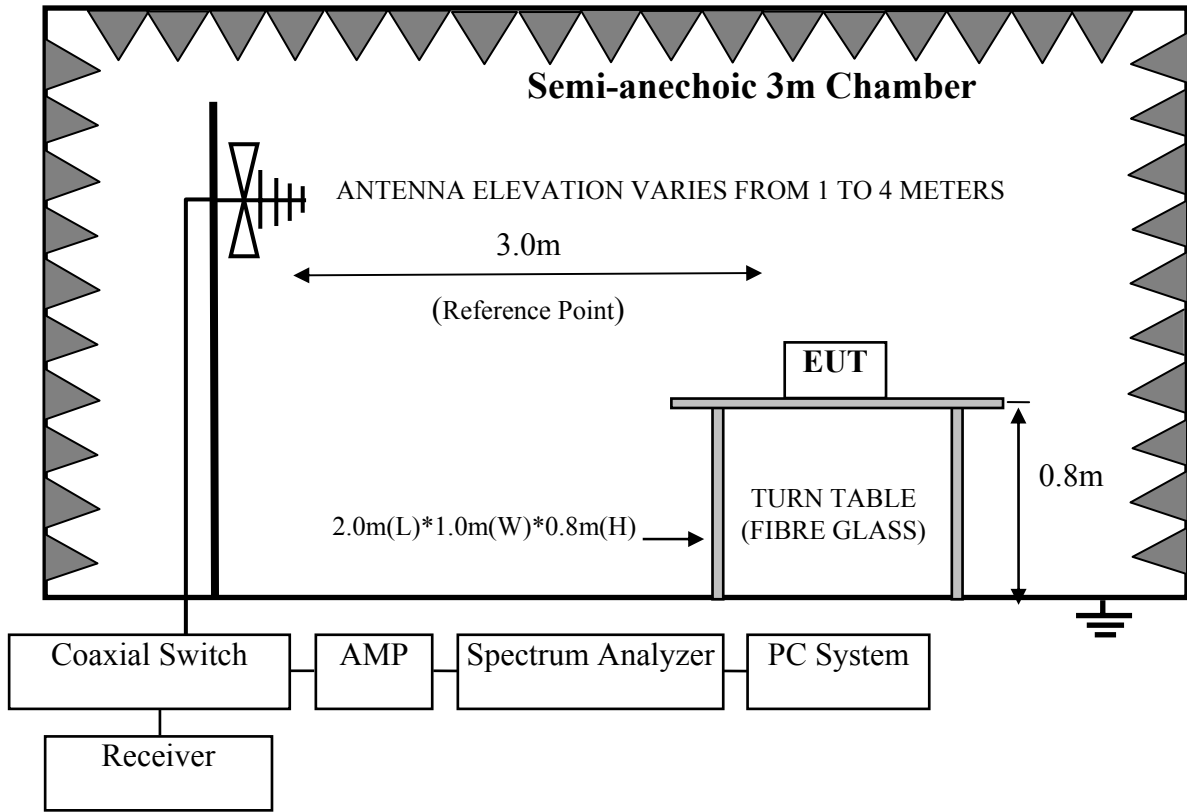

For frequency range 1GHz-40GHz

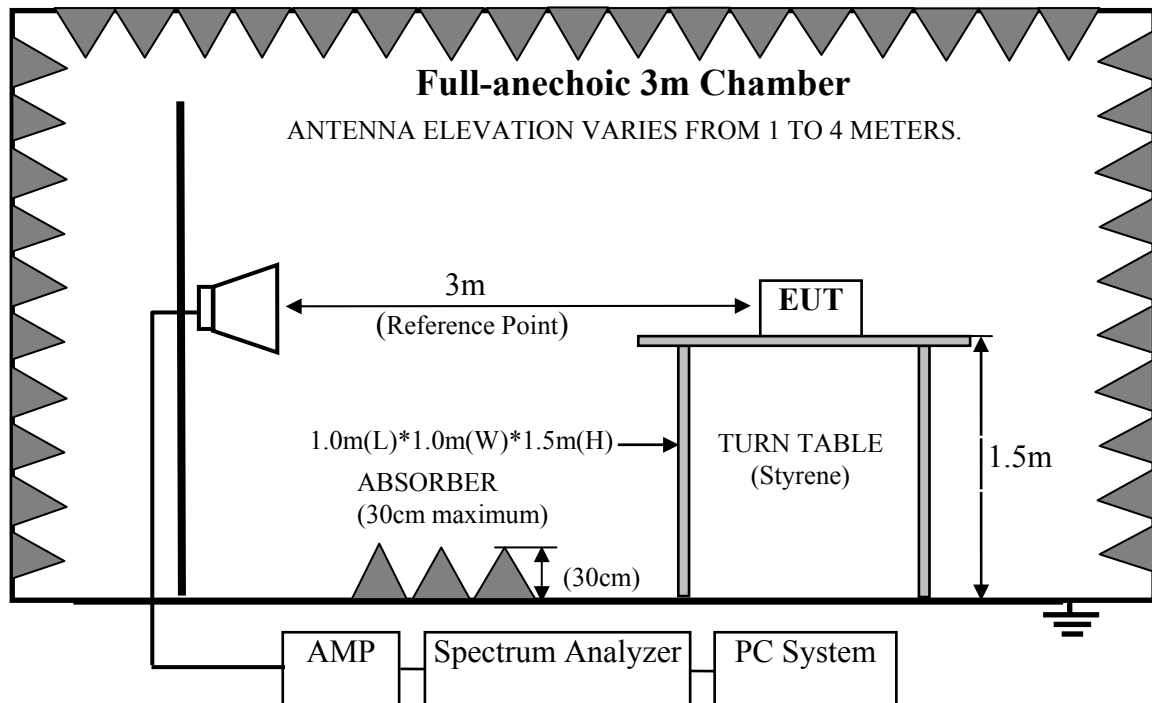

### 4.3. Radiated Emission Limits

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Unwanted emissions below 1 GHz and those emissions appearing within 15.205 restricted frequency bands must comply with the general field strength limits set forth in Section 15.209.

#### 4.3.1. 15.209 limits

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

- Remarks :
- (1) Emission Level (dBμV/m) = Reading (Receiver) (dBμV) + Antenna Factor (dB/m) + Cable Loss (dB)
  - Emission Level (dBμV/m) = Reading (Spectrum) (dBμV) + Antenna Factor (dB/m) - Amp Factor (dB) + Cable Loss (dB)(above 1000MHz)
  - (2) The smaller limit shall apply at the cross point between two frequency bands.
  - (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

#### 4.3.2. 15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )



#### 4.4.EUT Configuration on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

##### 4.4.1. Mini PC (EUT)

Model No. : A Series

Serial No. : N/A

##### 4.4.2. Support Equipment: As Tested Supporting System Details, in Section 2.4.

#### 4.5. Operating Condition of EUT

4.5.1. Setup the EUT and simulator as shown as Section 4.2.

4.5.2. Turn on the power of all equipments.

4.5.3. Let EUT work in Tx mode.

#### 4.6. Test Procedure

##### **Frequency below 30MHz:**

The EUT setup on the turn table which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10 regulation.

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground for frequency 30MHz~1000MHz, 1.5 meter high above ground for frequency above 1GHz and put the absorbing with 2.4m(L)\*2.4m(W)\*0.3m(H) on the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna for frequency 30MHz~1000MHz, and the Horn antenna is used as receiving antenna for frequency above 1GHz. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.10 on radiated emission Test.

For emissions below 1GHz and those emissions appearing within 15.205 restricted frequency bands use below procedure:

This test was performed with EUT in X, Y, Z position, and the worse case was found and reported.

The bandwidth of the EMI test receiver is set at 120kHz for frequency range from 30MHz to 1000 MHz.

Maximum Peak emission levels are measured by setting the analyzer as follows:

- (a) RBW = 1 MHz.
- (b) VBW  $\geq$  3 MHz.
- (c) Detector = Peak.
- (d) Sweep time = auto.
- (e) Trace mode = max hold.
- (f) Allow sweeps to continue until the trace stabilizes. Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately  $1/x$ , where  $x$  is the duty cycle. For example, at 50% duty cycle, the measurement time will increase by a factor of two relative to measurement time for continuous transmission.

Maximum Average emission levels are measured by setting the analyzer as follows:

- (a) RBW = 1 MHz.
- (b) VBW  $\geq$  3 MHz.
- (c) Detector = power averaging (rms), if  $\text{span}/(\# \text{ of points in sweep}) \leq \text{RBW}/2$ . Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, the detector mode shall be set to peak.
- (d) Averaging type = power averaging (rms)  
As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.
- (e) Sweep time = auto.
- (f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, the number of traces shall be increased by a factor of  $1/x$ , where  $x$  is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—rather than turning on and off with the transmit cycle, at least 100 traces shall be averaged.)
- (g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, a correction factor shall be added to the measurement results prior to comparing to the emission limit to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:
  - If power averaging (rms) mode was used in step (iv) above, the correction factor is  $10 \log (1/x)$ , where  $x$  is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB must be added to the measured emission levels.
  - If linear voltage averaging mode was used in step (iv) above, the correction factor is  $20 \log (1/x)$ , where  $x$  is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB must be added to the measured emission levels.
  - If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning on and off with the transmit cycle, no duty cycle correction is required for that emission.

For the emissions above 1GHz and not appearing within 15.205 restricted frequency bands use below procedure:

- (1).The maximum emission at 3m distance was measured and recorded with receive antenna in both vertical and horizontal by rotating the turntable and by lowering the receive antenna.
- (2).The EUT was then removed and replaced with a substitution antenna in the same position and the substitution antenna must have the same polarization with the receive antenna.
- (3). A signal which have the same frequency obtained in step 2 was fed to the substitution, the receive antenna was raised and lowered to obtain a maximum reading at the test receiver, the level of the signal generator was adjusted until the measured field strength level in step 2 was obtained, recorded the level of the signal generator.
- (4).Repeated step 4 with both antenna polarizations
- (5).The spurious emissions is equal to the power supplied by the signal generator and corrections due to the gain of the substitution antenna and the cable loss between the signal generator and the substitution antenna. or use procedure (6).
- (6). Per KDB789033 clause H 2)d.if the test distance is 3m,the  $EIRP(dBm)=E(dB\mu v/m)-95.2$   
Get the result of all unwanted emission outside the restricted band is less than the -27dBm/MHz.  
We had checked frequency range that is 30MHz to 10<sup>th</sup> harmonic (40GHz) and no any emissions were found from 18GHz to 40GHz, so the radiated emission from 18GHz to 40GHz were not record.

#### 4.7.Radiated Emission Test Results

**PASS.**


All the emissions from 30MHz to 1 GHz were comply with 15.209 limits.

All other emission comply with 15.407 (b)(1) requirements.

Note: The emissions (9kHz~30MHz) not reported for there is no emission be found.


Duty cycle

11 a

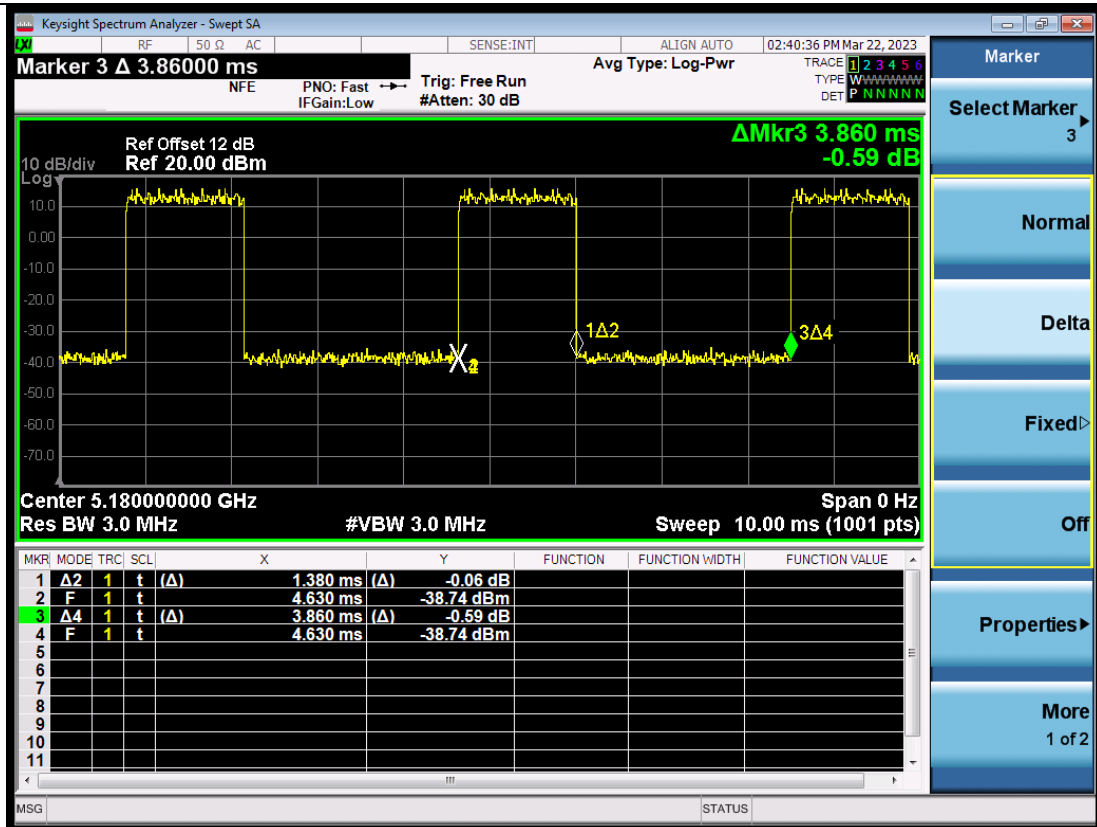


Note: The duty cycle factor is 4.47.

11n HT20

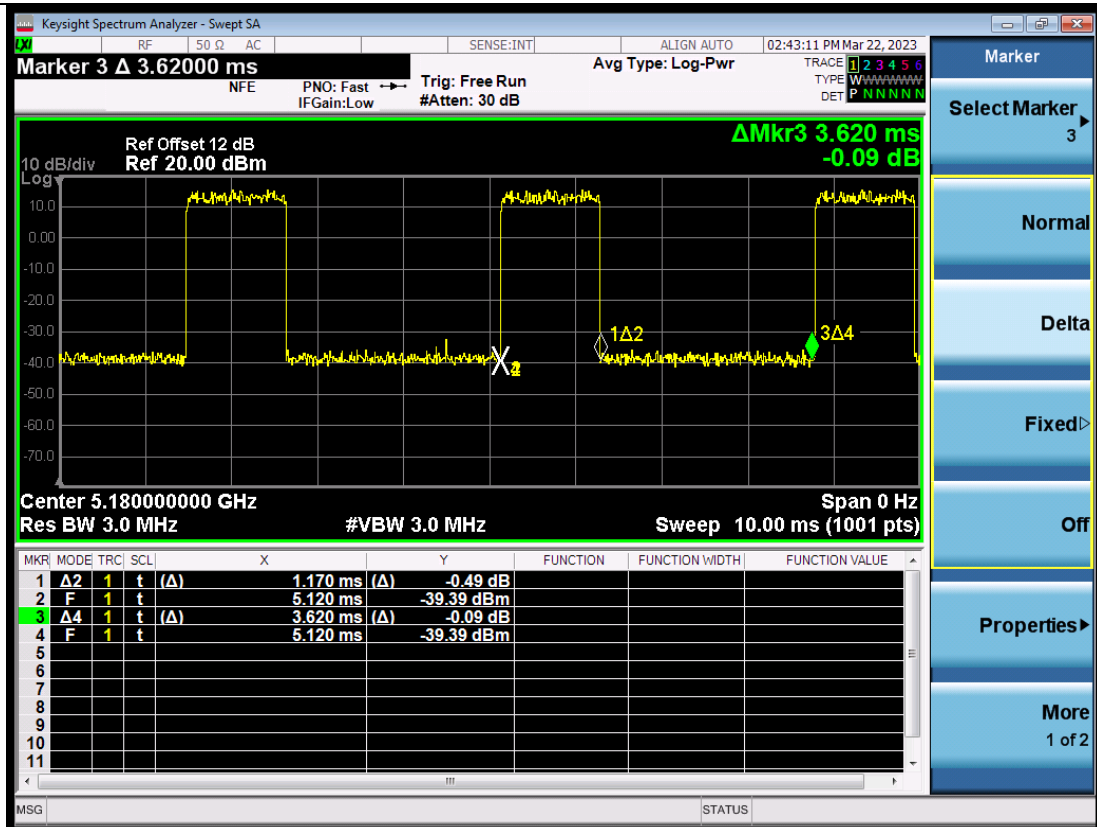


Note: The duty cycle factor is 4.91.

### 11n HT40

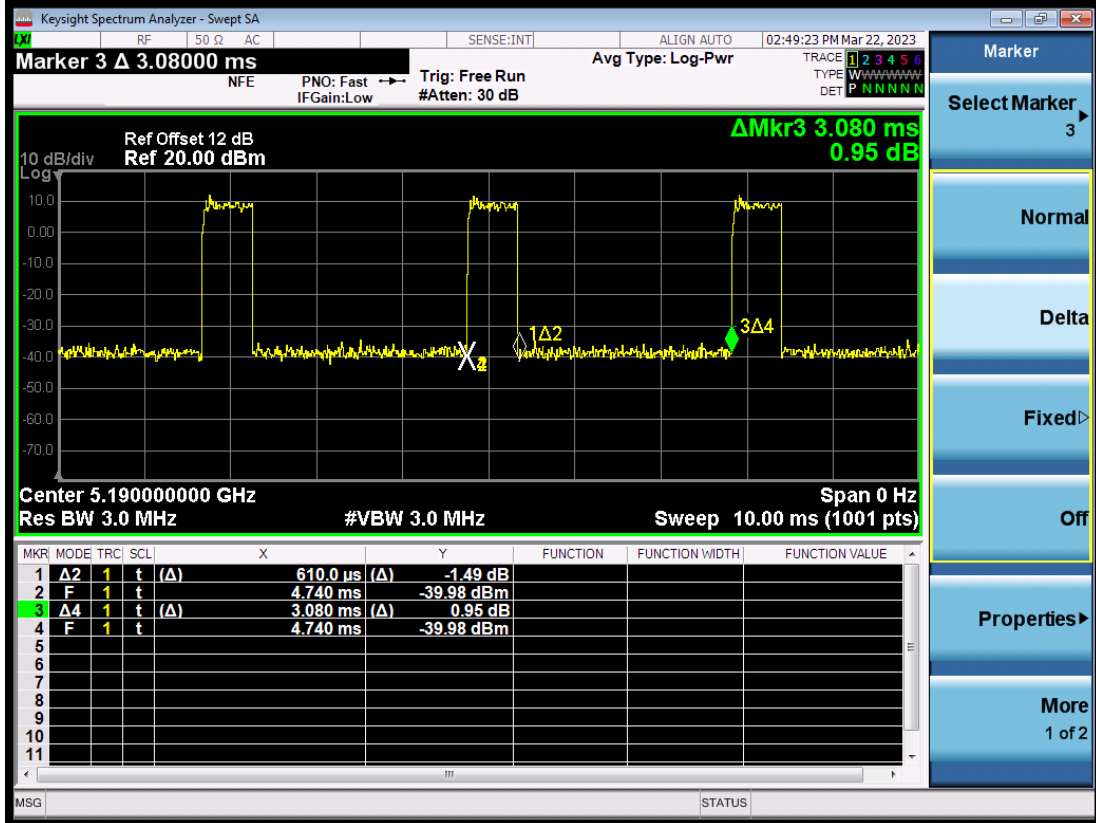


Note: The duty cycle factor is 7.03.

### 11ac VHT20

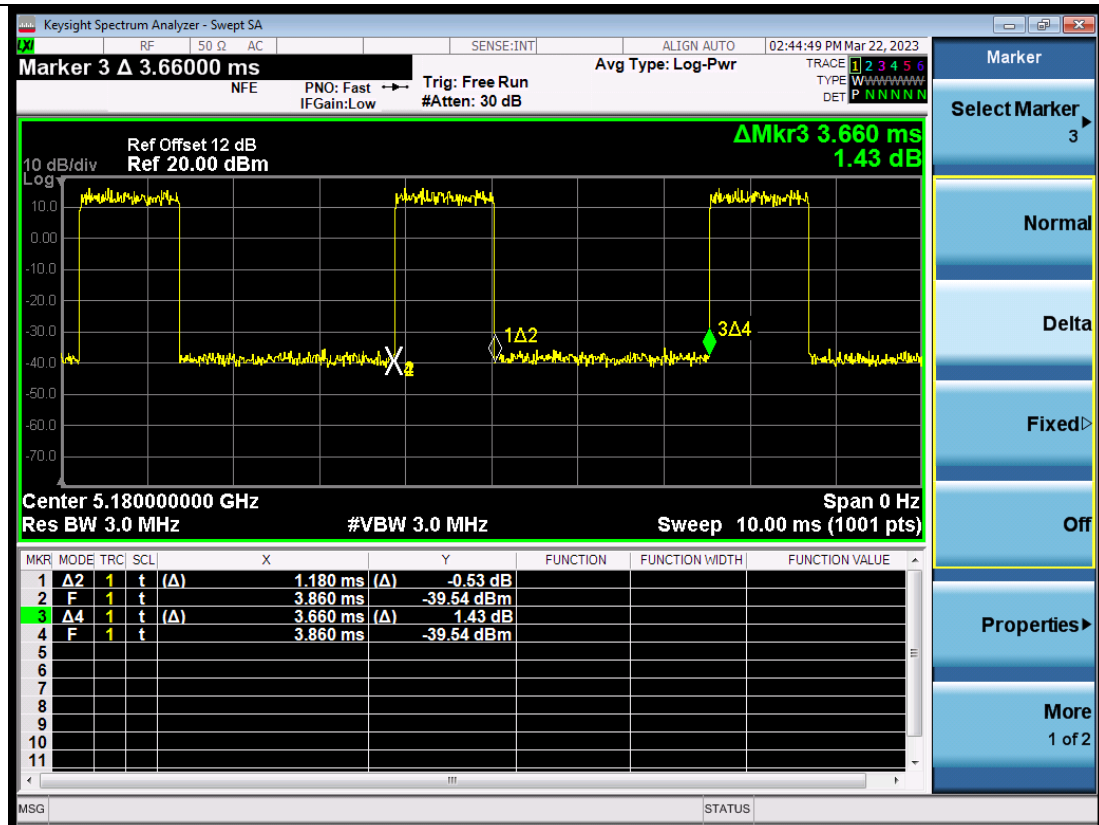


Note: The duty cycle factor is 4.92.

### 11ac VHT40

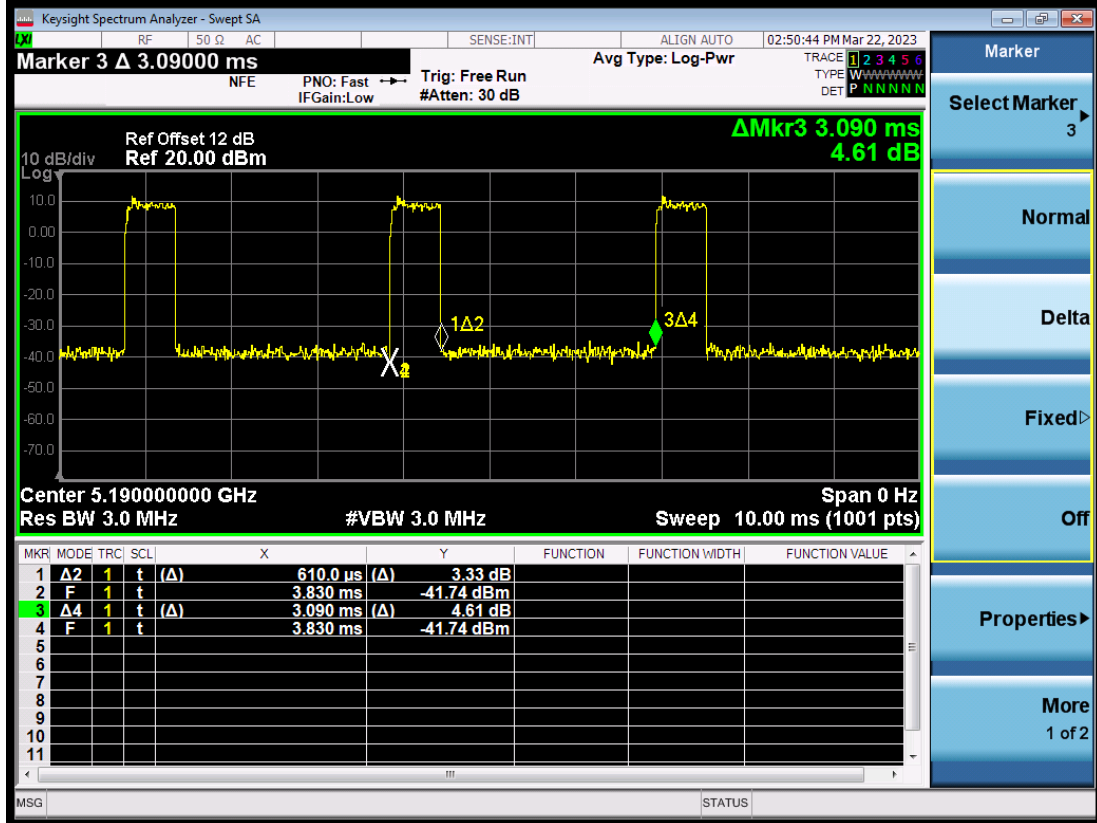


Note: The duty cycle factor is 7.05.

### 11ac VHT80

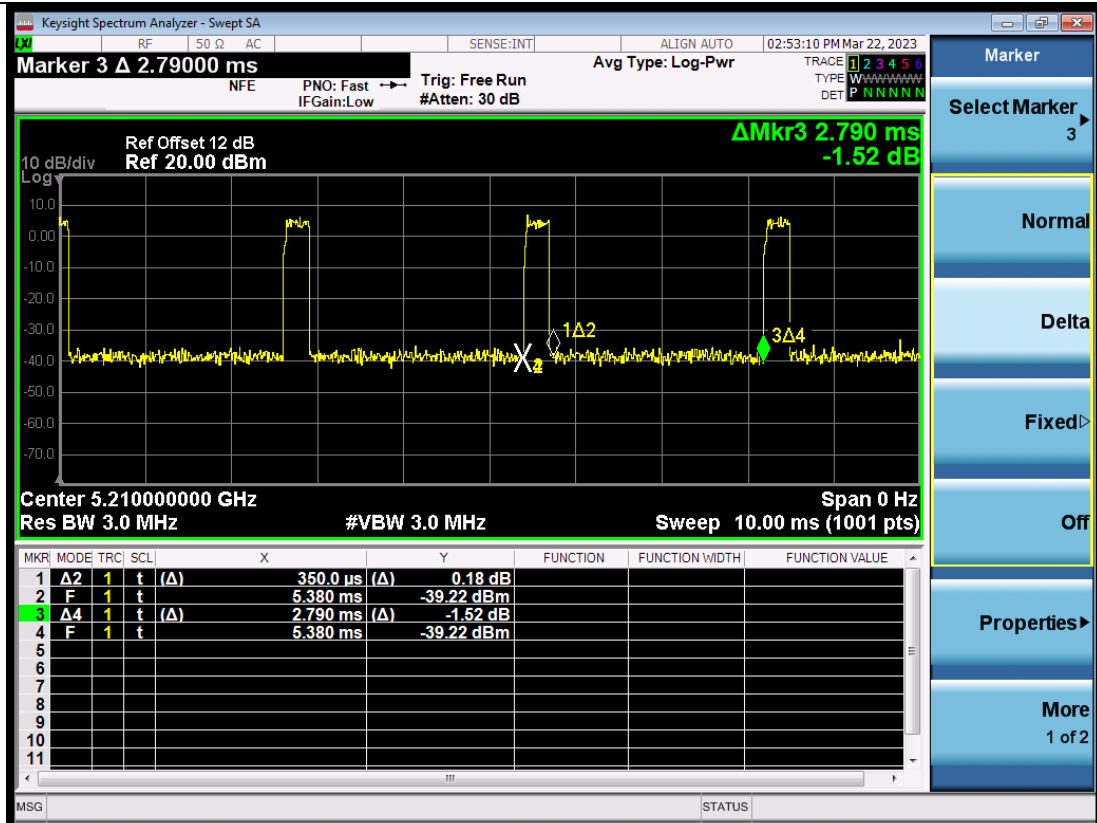


Note: The duty cycle factor is 9.02.

### 11ax HE20

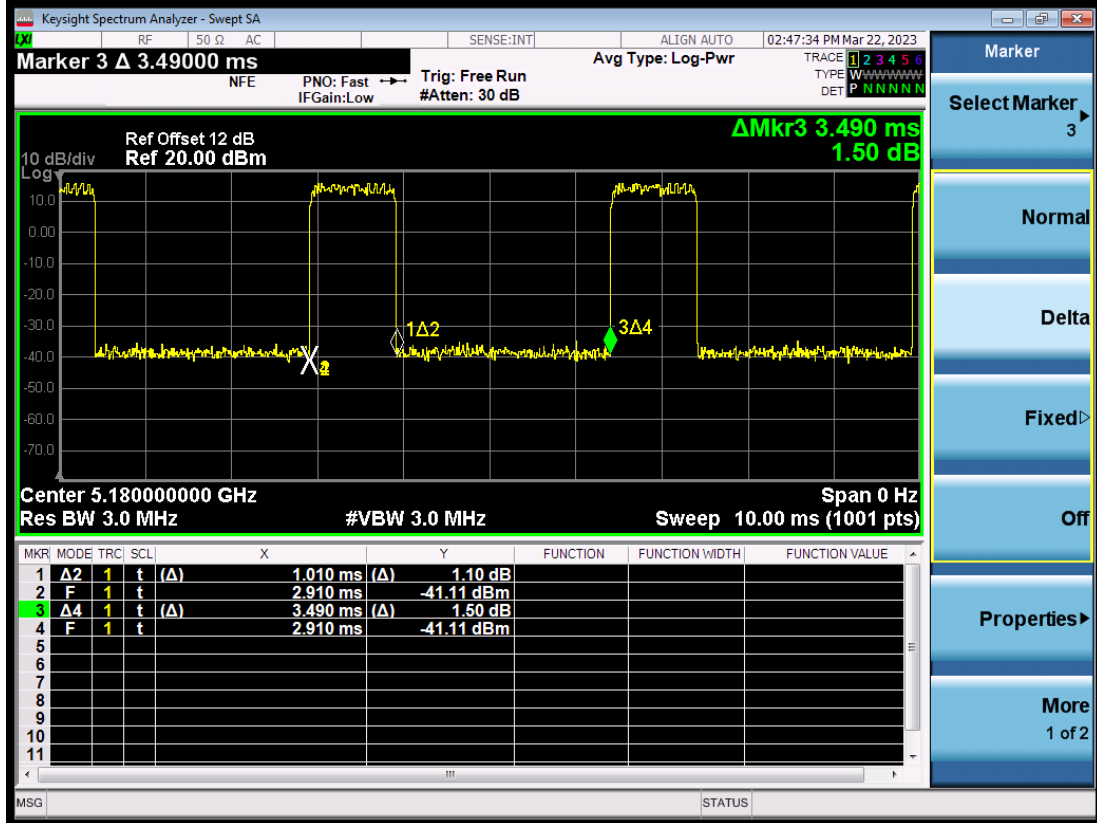


Note: The duty cycle factor is 5.39.

### 11ax HE40

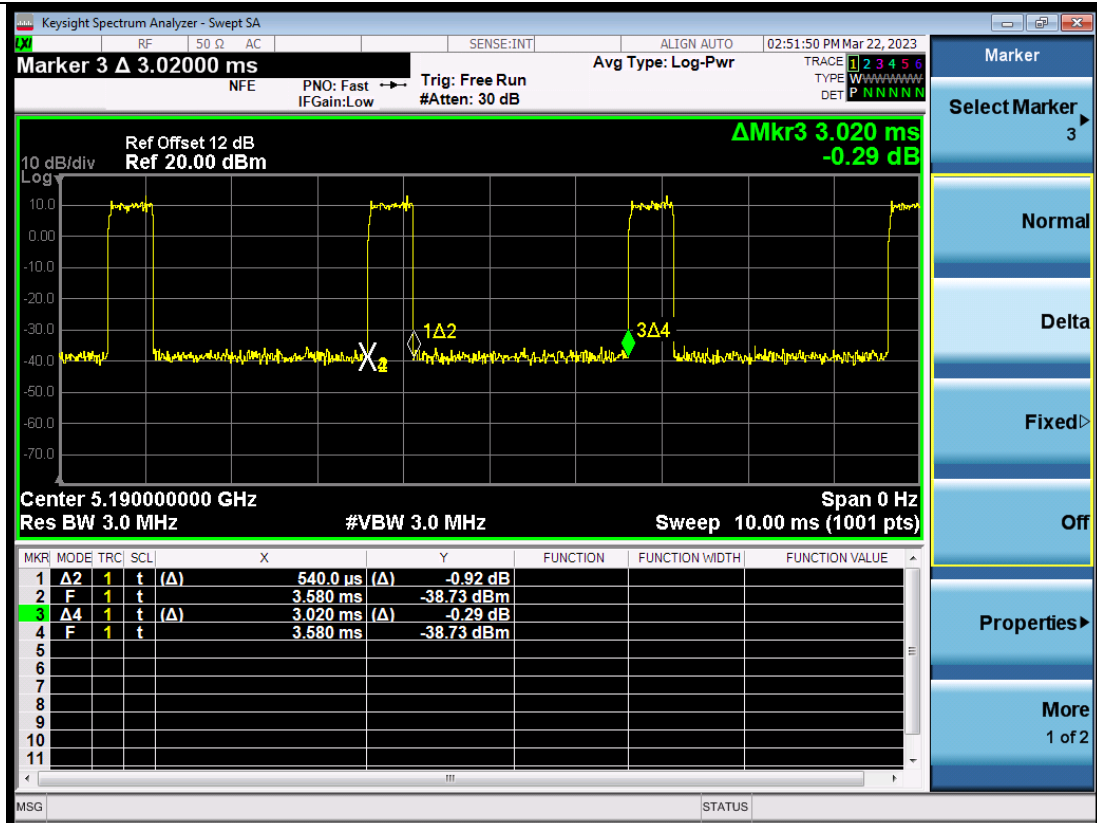


Note: The duty cycle factor is 7.48.

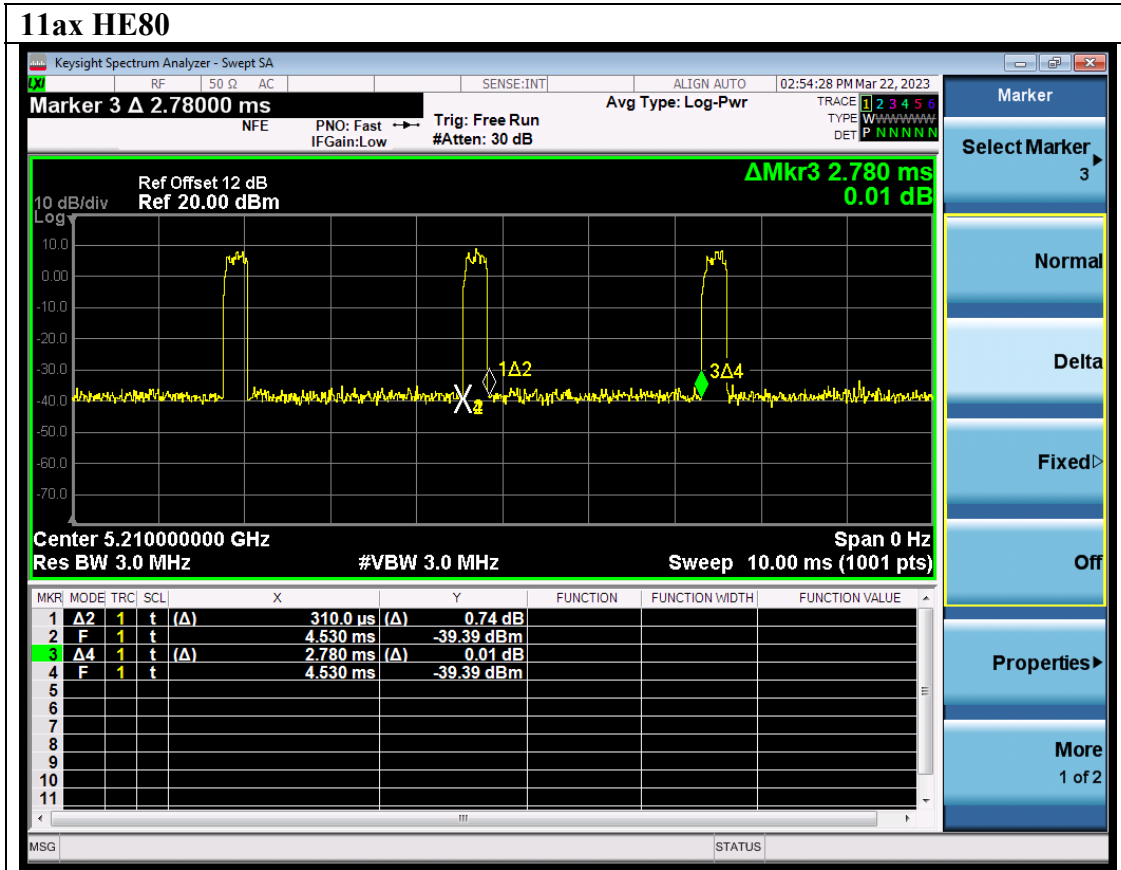

**Note: The duty cycle factor is 9.53.**




Frequency: 30MHz~1GHz

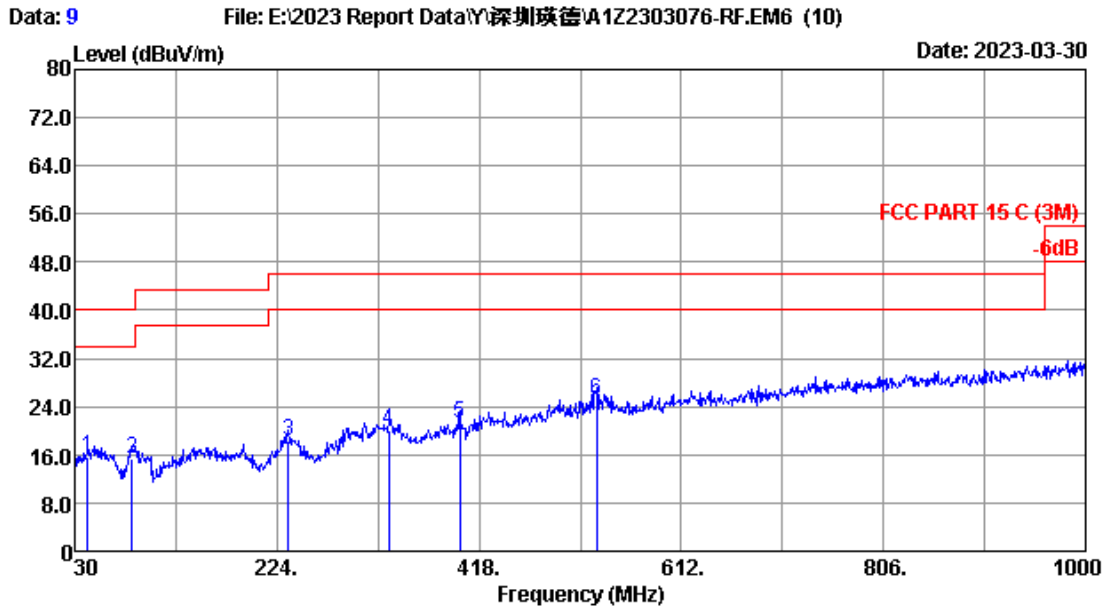

Site no. : 3m Chamber Data no. : 9  
 Dis. / Ant. : 3m 2022 VULB 9168-01317 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 C (3M)  
 Env. / Ins. : 23.4\*C/53% Engineer : Abel  
 Test Mode : 5G TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	42.610	19.70	0.65	-4.82	15.53	40.00	24.47	QP
2	85.290	13.90	0.94	0.60	15.44	40.00	24.56	QP
3	234.670	17.10	1.54	-0.46	18.18	46.00	27.82	QP
4	331.670	20.20	1.88	-2.09	19.99	46.00	26.01	QP
5	399.570	21.50	2.06	-2.27	21.29	46.00	24.71	QP
6	530.520	24.00	2.46	-1.25	25.21	46.00	20.79	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

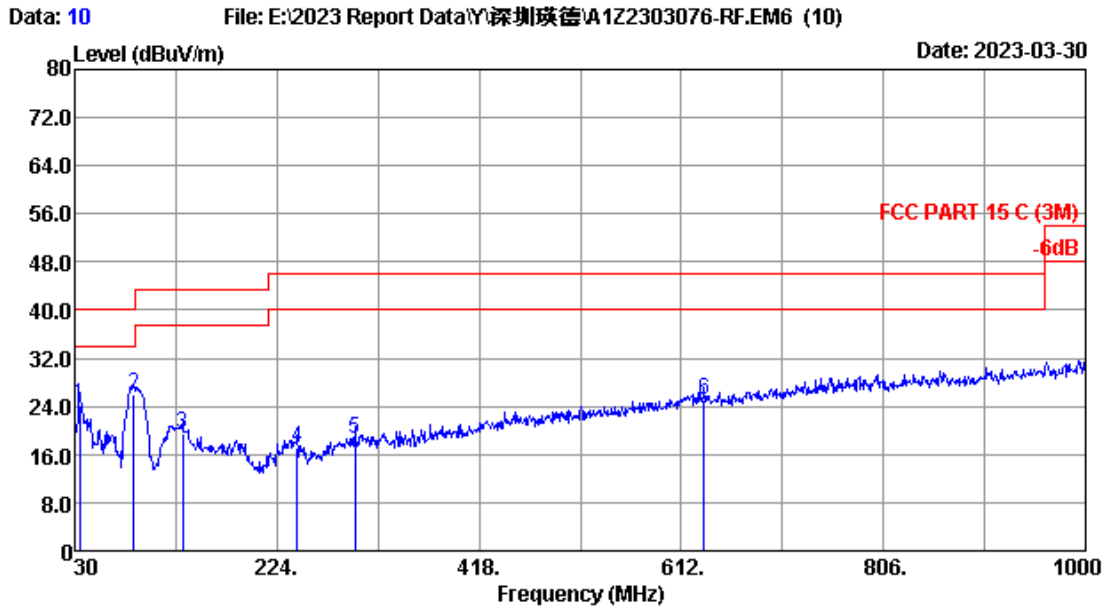


Site no. : 3m Chamber Data no. : 10  
 Dis. / Ant. : 3m 2022 VULB 9168-01317 Ant. pol. : VERTICAL  
 Limit : FCC PART 15 C (3M)  
 Env. / Ins. : 23.4\*C/53% Engineer : Abel  
 Test Mode : 5G TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	34.850	18.80	0.59	4.82	24.21	40.00	15.79	QP
2	86.260	13.80	0.95	11.11	25.86	40.00	14.14	QP
3	133.790	18.30	1.16	0.01	19.47	43.50	24.03	QP
4	243.400	17.67	1.57	-2.15	17.09	46.00	28.91	QP
5	298.690	19.36	1.79	-2.49	18.66	46.00	27.34	QP
6	634.310	26.16	2.73	-3.81	25.08	46.00	20.92	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.


Data for metal appearance:

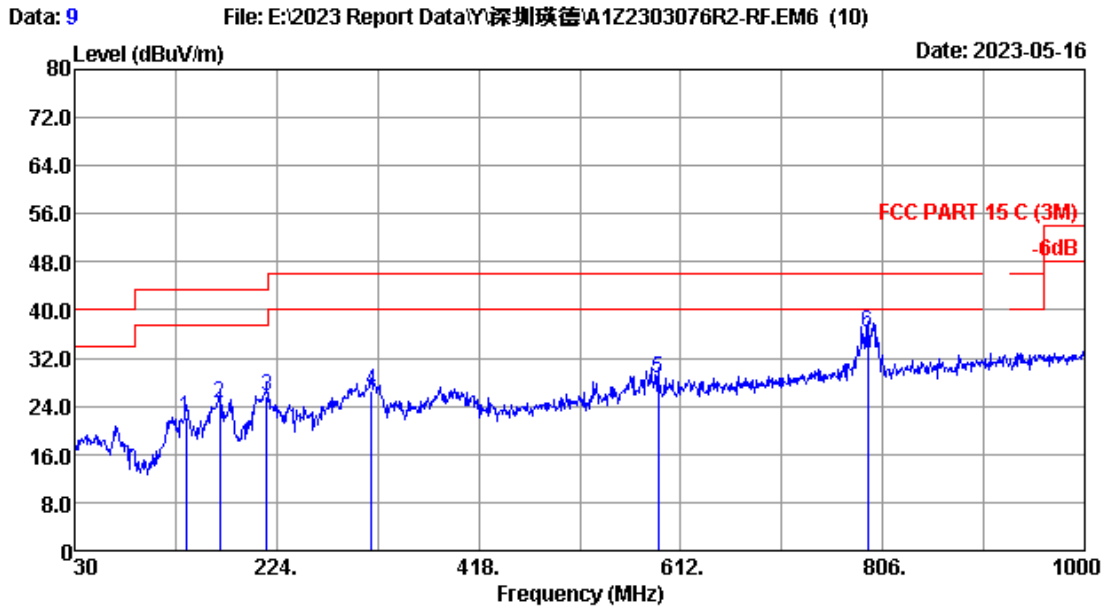

Site no.	: 3m Chamber	Data no.	: 9
Dis. / Ant.	: 3m 2022 VULB 9168-01317	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15 C (3M)		
Env. / Ins.	: 26.4*C/58%	Engineer	: Abel
Test Mode	: 5G TX Mode		

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	136.700	18.60	1.17	2.37	22.14	43.50	21.36	QP
2	169.680	18.70	1.30	4.47	24.47	43.50	19.03	QP
3	214.300	15.78	1.47	8.45	25.70	43.50	17.80	QP
4	315.180	19.90	1.83	4.98	26.71	46.00	19.29	QP
5	590.660	25.22	2.63	0.64	28.49	46.00	17.51	QP
6	791.450	28.02	3.17	5.01	36.20	46.00	9.80	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

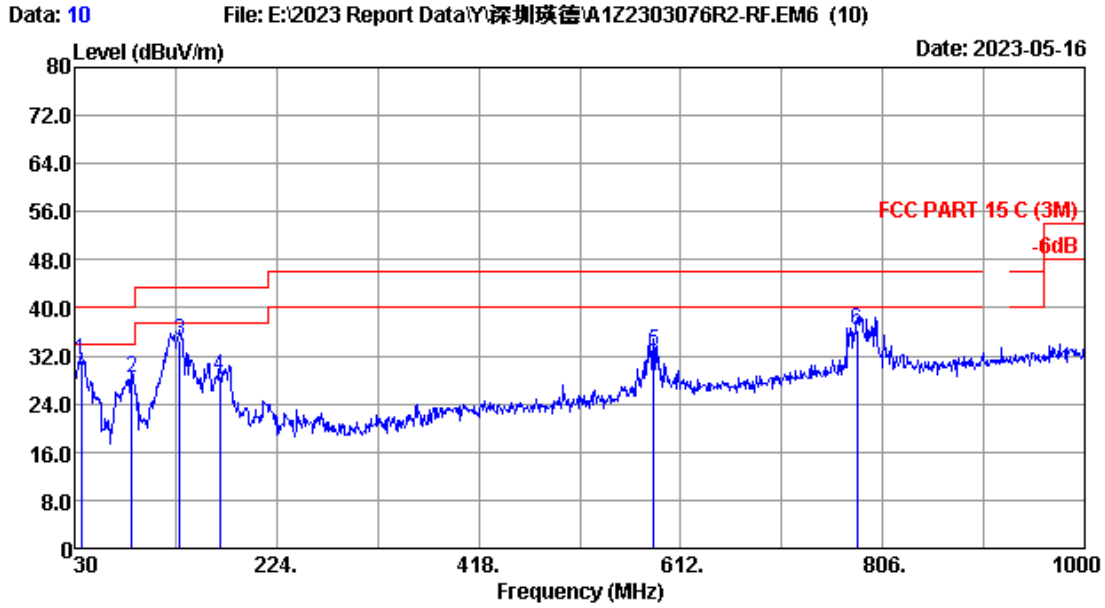


Site no. : 3m Chamber Data no. : 10  
 Dis. / Ant. : 3m 2022 VULB 9168-01317 Ant. pol. : VERTICAL  
 Limit : FCC PART 15 C (3M)  
 Env. / Ins. : 26.4\*C/58% Engineer : Abel  
 Test Mode : 5G TX Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	36.790	19.00	0.60	11.81	31.41	40.00	8.59	QP
2	85.290	13.90	0.94	13.41	28.25	40.00	11.75	QP
3	130.880	17.90	1.15	15.39	34.44	43.50	9.06	QP
4	169.680	18.70	1.30	8.63	28.63	43.50	14.87	QP
5	585.810	25.04	2.62	5.23	32.89	46.00	13.11	QP
6	781.750	27.94	3.14	5.36	36.44	46.00	9.56	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Frequency: 1GHz~18GHz  
U-NII-1 Band:

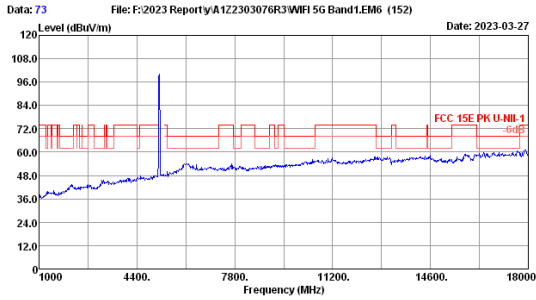


Site no. : 3m Chamber Data no. : 73  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC 15E PK U-NII-1  
 Env. / Ins. : 23.2°C/52.5% Engineer : nier  
 Test Mode : 5G 11a 5180 MHz TX

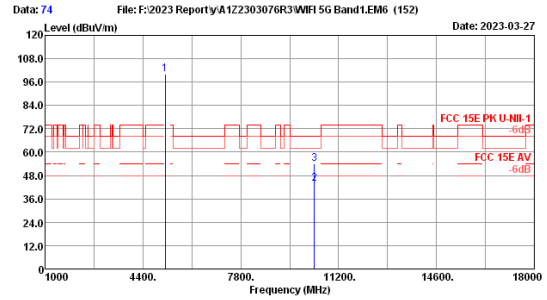


Site no. : 3m Chamber Data no. : 74  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC 15E PK U-NII-1  
 Env. / Ins. : 23.2°C/52.5% Engineer : nier  
 Test Mode : 5G 11a 5180 MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5180.00	33.27	3.47	96.78	33.66	99.86	-----	-----	Peak
2	10360.00	38.27	4.91	34.50	33.95	43.73	-----	-----	Average
3	10360.00	38.27	4.91	44.86	33.95	54.09	68.20	14.11	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

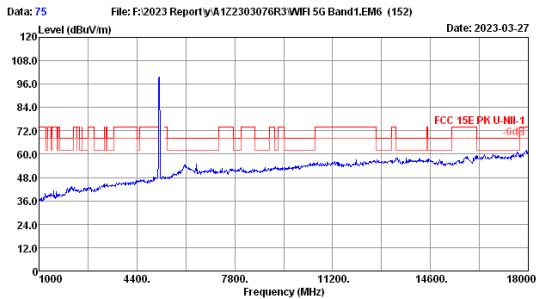



Site no. : 3m Chamber Data no. : 75  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC 15E PK U-NII-1  
 Env. / Ins. : 23.2°C/52.5% Engineer : nier  
 Test Mode : 5G 11a 5180 MHz TX

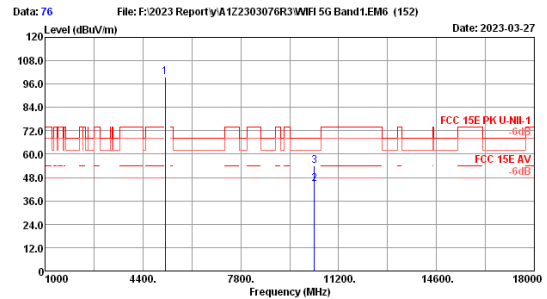

Site no. : 3m Chamber Data no. : 76  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC 15E PK U-NII-1  
 Env. / Ins. : 23.2°C/52.5% Engineer : nier  
 Test Mode : 5G 11a 5180 MHz TX



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5180.00	33.27	3.47	96.39	33.66	99.47	-----	-----	Peak
2	10360.00	38.27	4.91	35.61	33.95	44.84	-----	-----	Average
3	10360.00	38.27	4.91	44.80	33.95	54.03	68.20	14.17	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

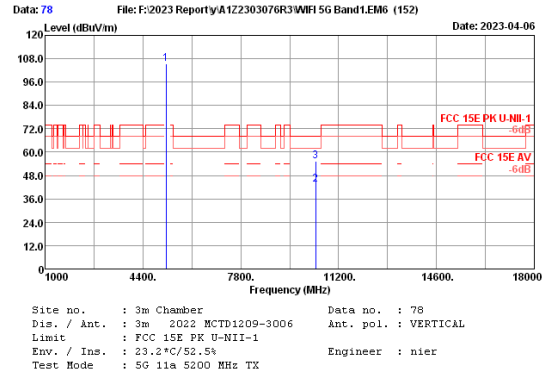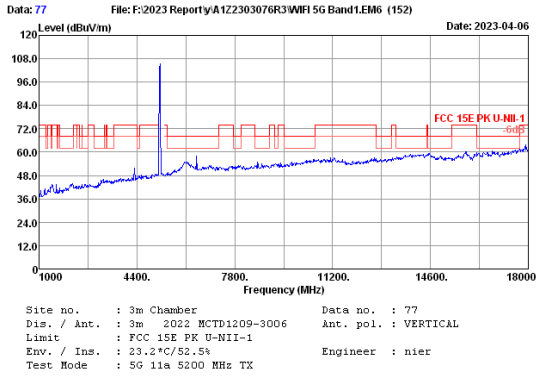



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5200.00	33.30	3.48	102.13	33.66	105.25	-----	-----	Peak
2	10400.00	38.30	4.92	33.97	33.91	43.28	-----	-----	Average
3	10400.00	38.30	4.92	45.82	33.91	55.13	68.20	13.07	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

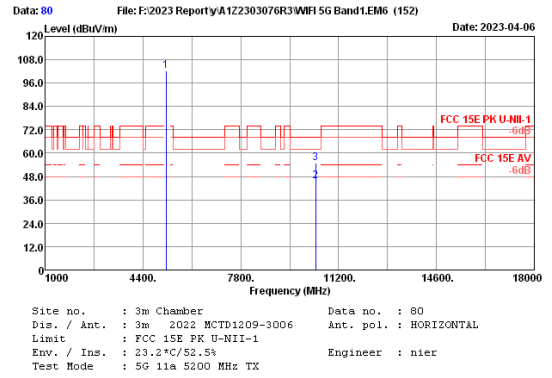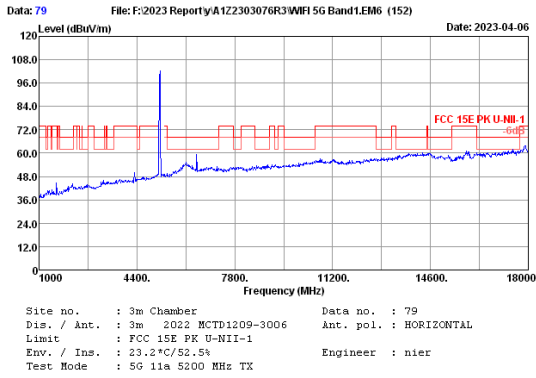



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5200.00	33.30	3.48	99.04	33.66	102.16	-----	-----	Peak
2	10400.00	38.30	4.92	36.19	33.91	45.50	-----	-----	Average
3	10400.00	38.30	4.92	45.60	33.91	54.91	68.20	13.29	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

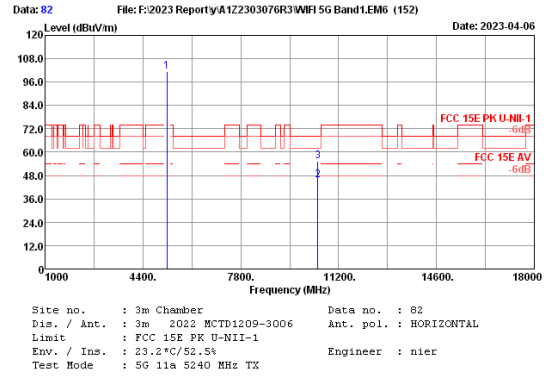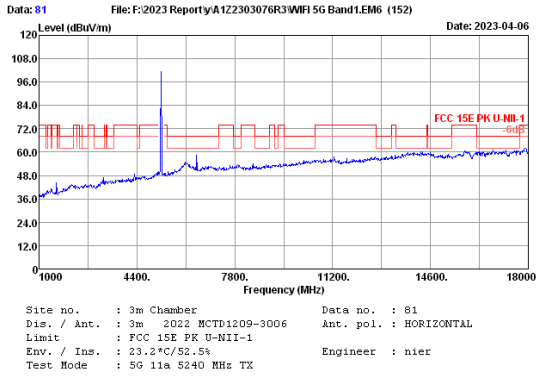



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5240.00	33.17	3.49	98.18	33.65	101.19	-----	-----	Peak
2	10480.00	38.30	4.95	36.15	33.86	45.54	-----	-----	Average
3	10480.00	38.30	4.95	46.02	33.86	55.41	68.20	12.79	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

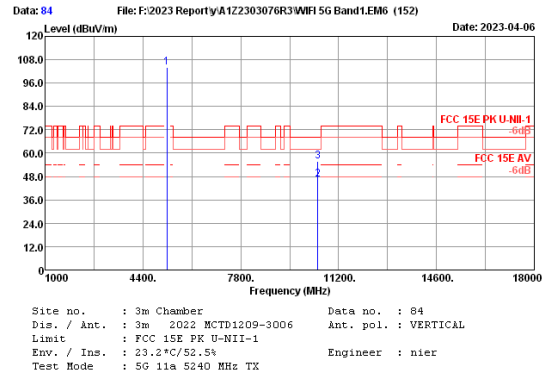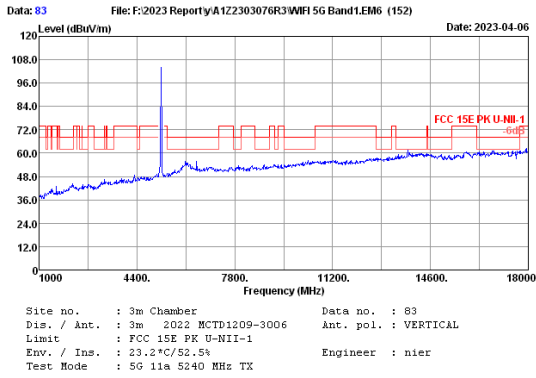



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5240.00	33.17	3.49	101.03	33.65	104.04	-----	-----	Peak
2	10480.00	38.30	4.95	37.19	33.86	46.58	-----	-----	Average
3	10480.00	38.30	4.95	46.36	33.86	55.75	68.20	12.45	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

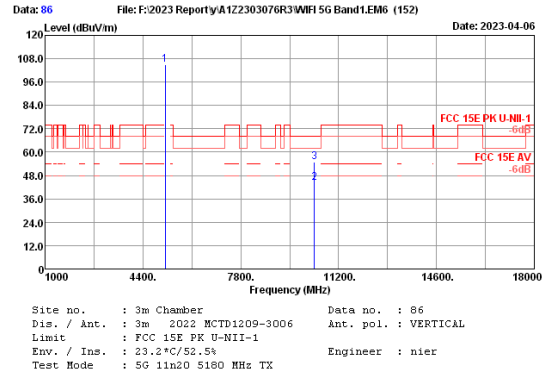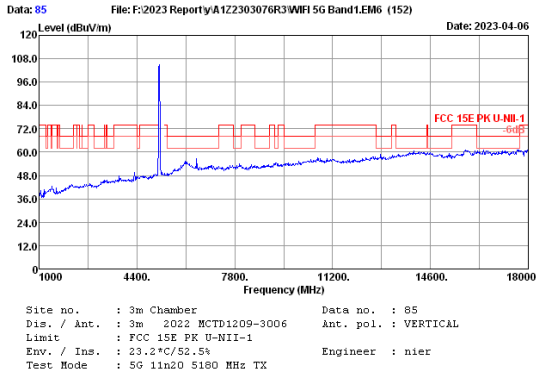

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5180.00	33.27	3.47	101.75	33.66	104.83	-----	-----	Peak
2	10360.00	38.27	4.91	35.19	33.95	44.42	-----	-----	Average
3	10360.00	38.27	4.91	45.82	33.95	55.05	68.20	13.15	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

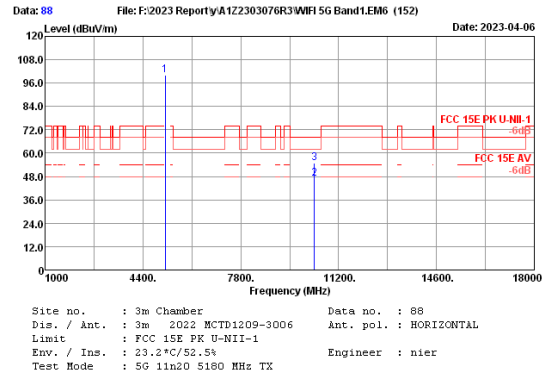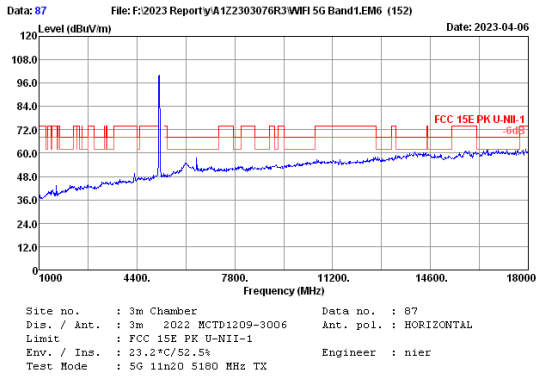

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5180.00	33.27	3.47	96.78	33.66	99.86	-----	-----	Peak
2	10360.00	38.27	4.91	37.63	33.95	46.86	-----	-----	Average
3	10360.00	38.27	4.91	45.69	33.95	54.92	68.20	13.28	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.



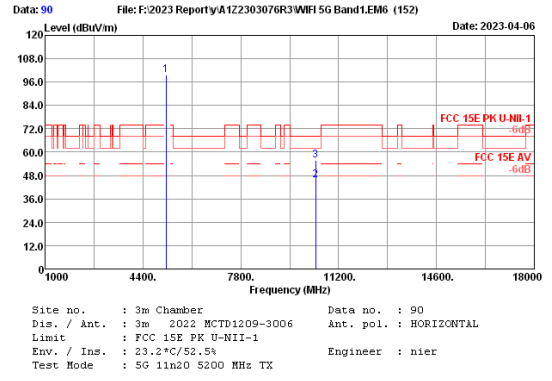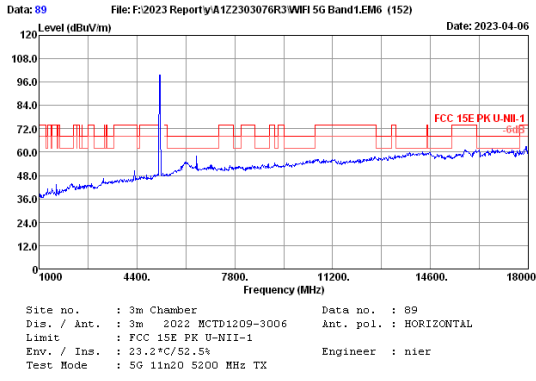



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5200.00	33.30	3.48	96.66	33.66	99.78	72.00	27.78	Peak
2	10400.00	38.30	4.92	36.18	33.91	45.49	60.00	14.51	Average
3	10400.00	38.30	4.92	46.38	33.91	55.69	68.20	12.51	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

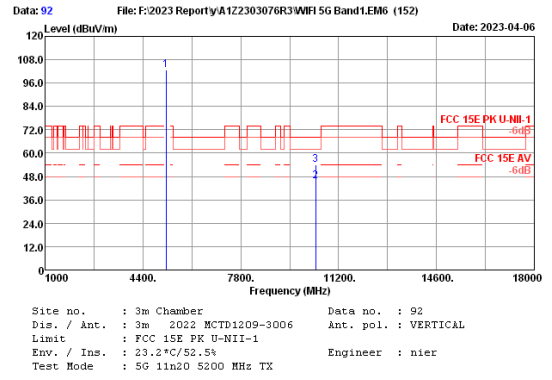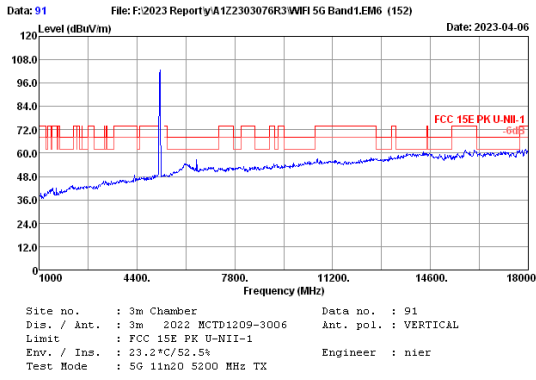



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5200.00	33.30	3.48	99.71	33.66	102.83	72.00	30.83	Peak
2	10400.00	38.30	4.92	36.49	33.91	45.80	60.00	14.80	Average
3	10400.00	38.30	4.92	44.50	33.91	53.51	68.20	14.39	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

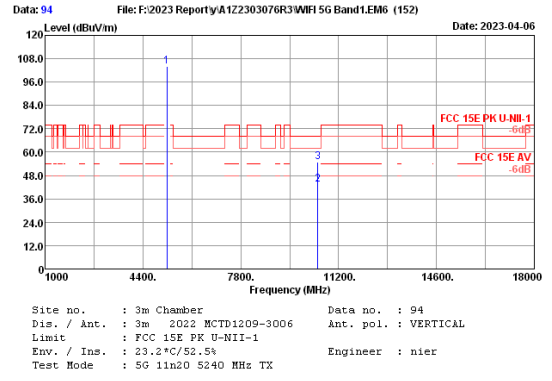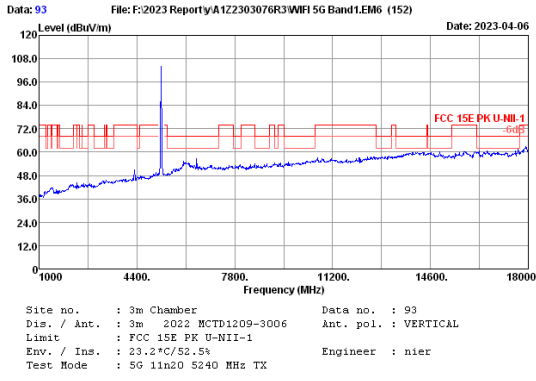



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5240.00	33.17	3.49	100.97	33.65	103.98	-----	-----	Peak
2	10480.00	38.30	4.95	34.16	33.86	43.55	-----	-----	Average
3	10480.00	38.30	4.95	45.67	33.86	55.06	68.20	13.14	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

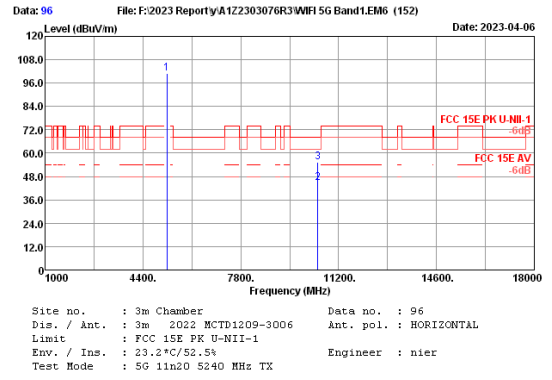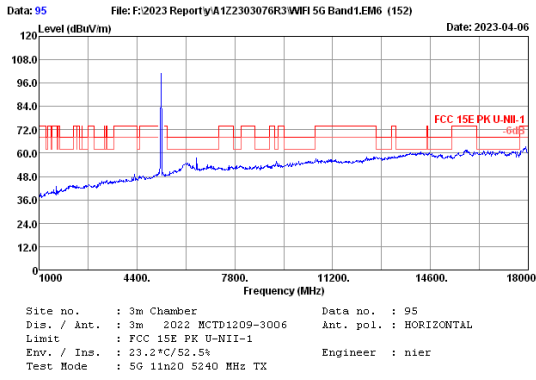



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5240.00	33.17	3.49	97.88	33.65	100.89	-----	-----	Peak
2	10480.00	38.30	4.95	35.36	33.86	44.75	-----	-----	Average
3	10480.00	38.30	4.95	46.04	33.86	55.43	68.20	12.77	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

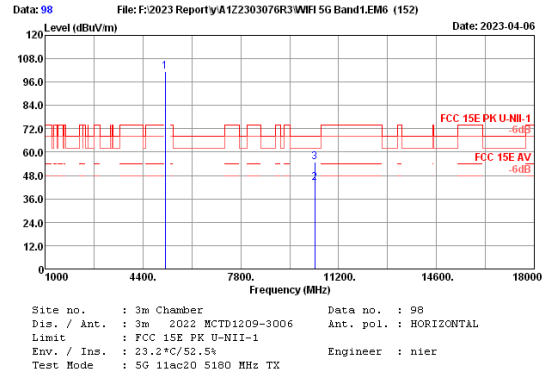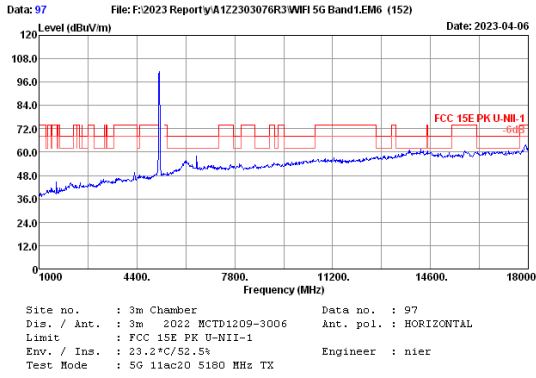



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5182.00	33.27	3.47	98.41	33.66	101.49	-----	-----	Peak
2	10367.00	38.27	4.91	34.95	33.95	44.18	-----	-----	Average
3	10367.00	38.27	4.91	45.79	33.95	55.02	68.20	13.18	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

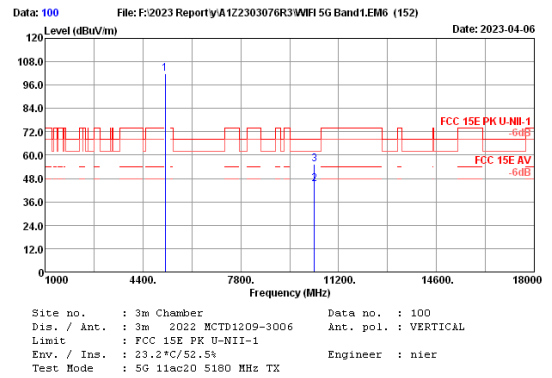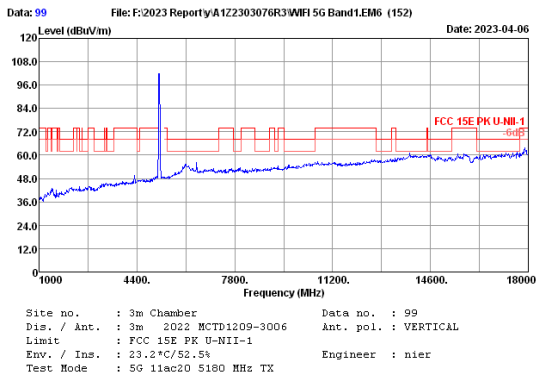



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5180.00	33.27	3.47	98.98	33.66	102.06	-----	-----	Peak
2	10360.00	38.27	4.91	35.86	33.95	45.09	-----	-----	Average
3	10360.00	38.27	4.91	46.09	33.95	55.32	68.20	12.88	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

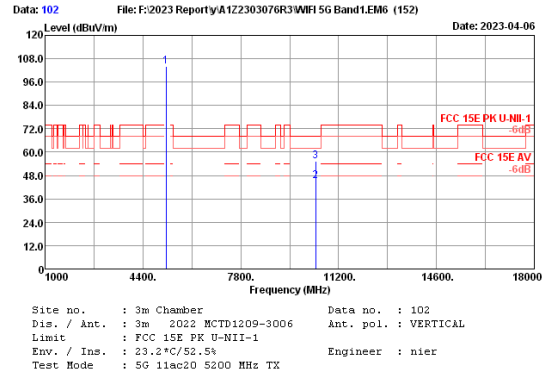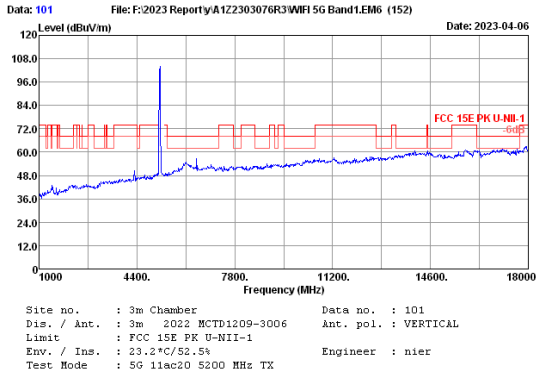



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5200.00	33.30	3.48	100.88	33.66	104.00	-----	-----	Peak
2	10400.00	38.30	4.92	35.68	33.91	44.99	-----	-----	Average
3	10400.00	38.30	4.92	46.00	33.91	55.31	68.20	12.89	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

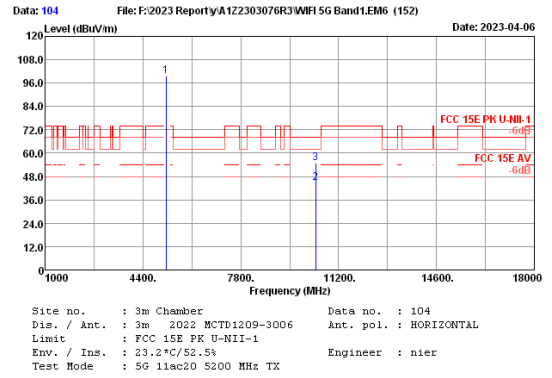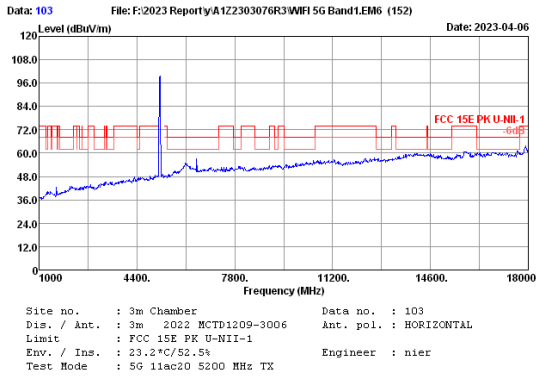



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5200.00	33.30	3.48	96.71	33.66	99.83	-----	-----	Peak
2	10400.00	38.30	4.92	35.55	33.91	44.86	-----	-----	Average
3	10400.00	38.30	4.92	45.60	33.91	54.91	68.20	13.29	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

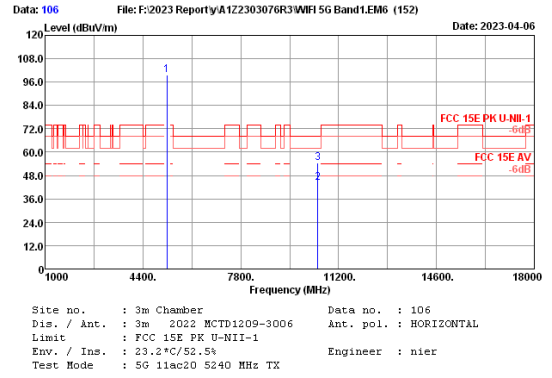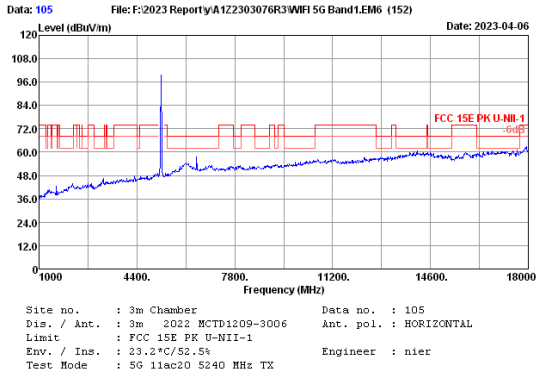



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5240.00	33.17	3.49	96.82	33.65	99.83	-----	-----	Peak
2	10480.00	38.30	4.95	34.83	33.86	44.22	-----	-----	Average
3	10480.00	38.30	4.95	44.89	33.86	54.28	68.20	13.92	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

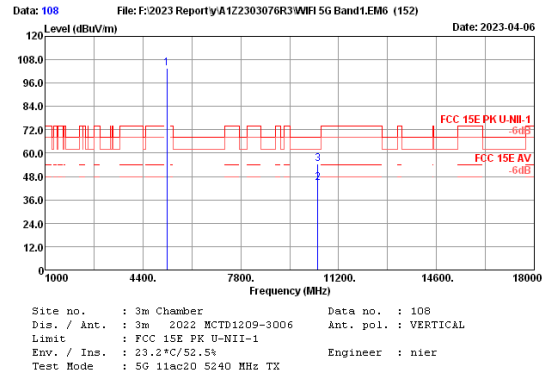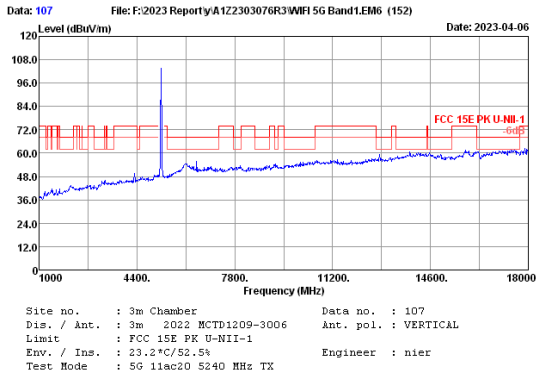



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5240.00	33.17	3.49	100.55	33.65	103.56	-----	-----	Peak
2	10480.00	38.30	4.95	35.18	33.86	44.57	-----	-----	Average
3	10480.00	38.30	4.95	45.25	33.86	54.64	68.20	13.56	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

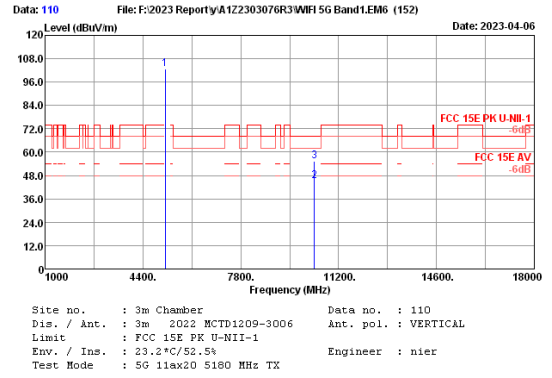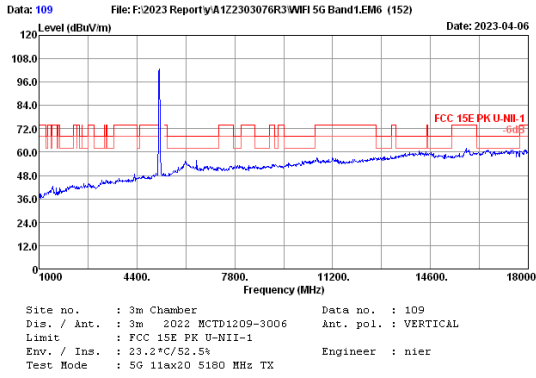



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5180.00	33.27	3.47	99.81	33.66	102.89	72.00	30.89	Peak
2	10360.00	38.27	4.91	36.11	33.95	45.34	60.00	15.34	Average
3	10360.00	38.27	4.91	46.26	33.95	55.49	68.20	12.71	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

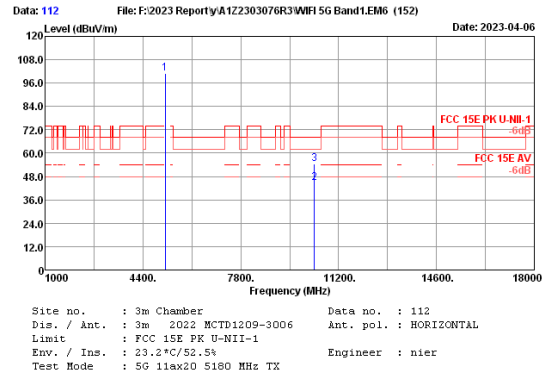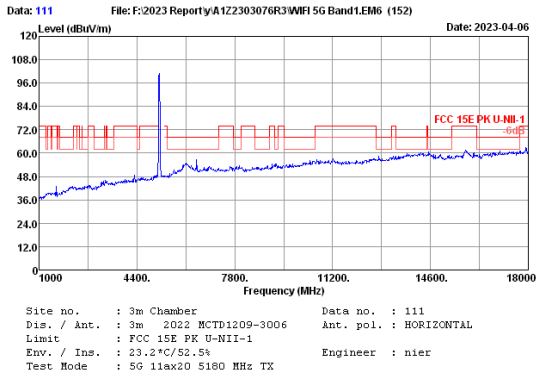



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5180.00	33.27	3.47	98.10	33.66	101.18	72.00	29.18	Peak
2	10360.00	38.27	4.91	35.61	33.95	44.84	60.00	15.84	Average
3	10360.00	38.27	4.91	45.31	33.95	54.54	68.20	13.66	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

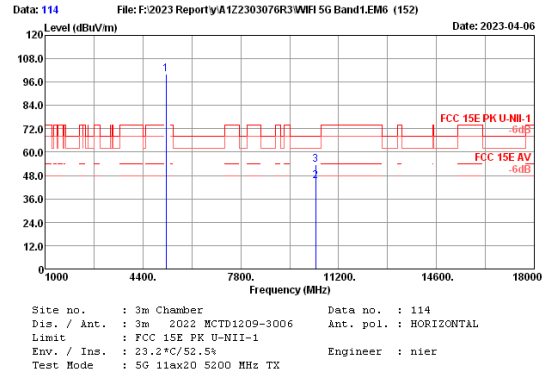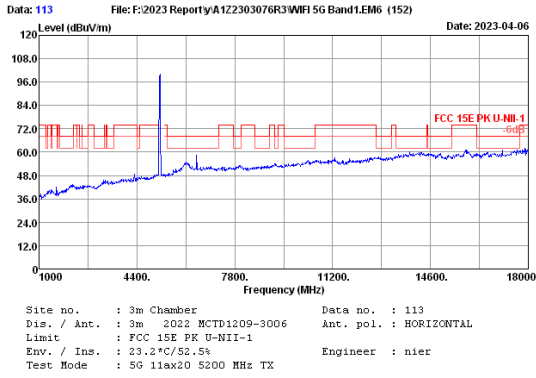



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5200.00	33.30	3.48	97.08	33.66	100.20	-----	-----	Peak
2	10400.00	38.30	4.92	35.97	33.91	45.28	-----	-----	Average
3	10400.00	38.30	4.92	44.26	33.91	53.57	68.20	14.63	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

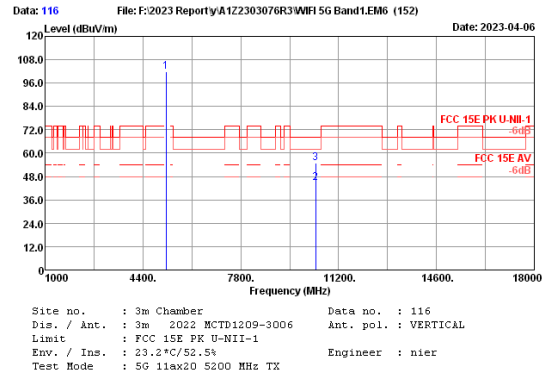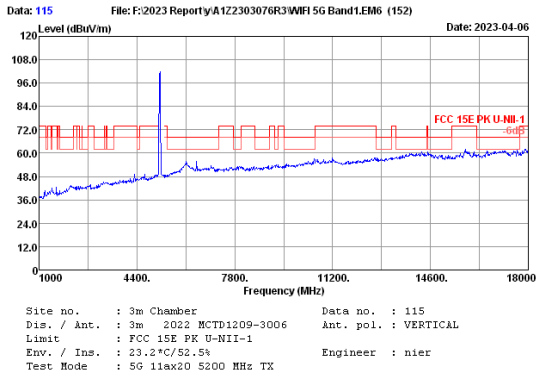



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5200.00	33.30	3.48	98.83	33.66	101.95	-----	-----	Peak
2	10400.00	38.30	4.92	35.24	33.91	44.55	-----	-----	Average
3	10400.00	38.30	4.92	45.42	33.91	54.73	68.20	13.47	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

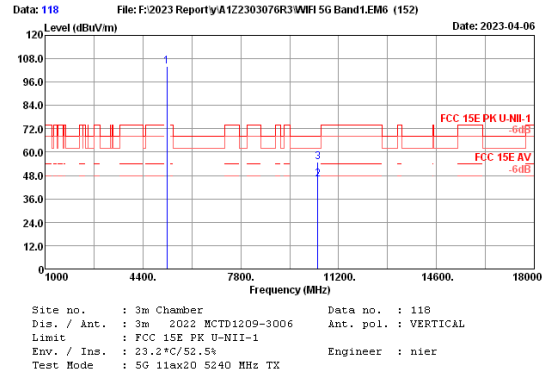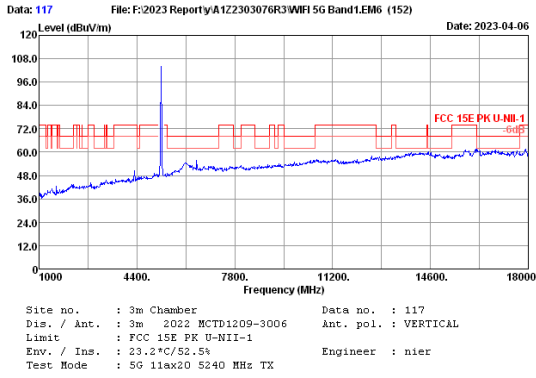

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5240.00	33.17	3.49	100.98	33.65	103.99	72.00	31.99	Peak
2	10480.00	38.30	4.95	36.83	33.86	46.22	60.00	13.41	Average
3	10480.00	38.30	4.95	45.40	33.86	54.79	60.00	13.41	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

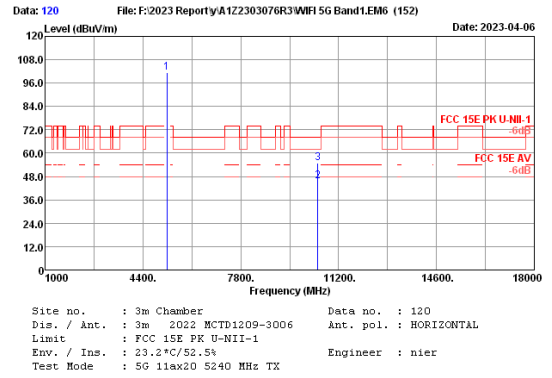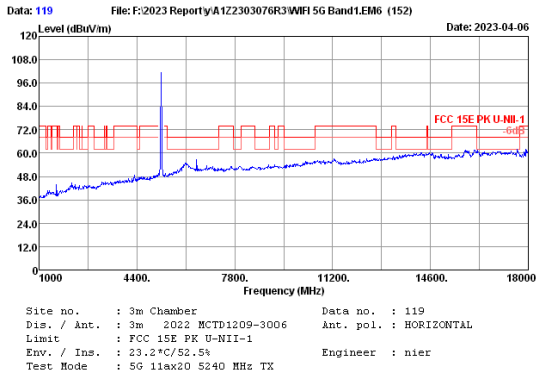

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5240.00	33.17	3.49	98.26	33.65	101.27	72.00	29.27	Peak
2	10480.00	38.30	4.95	36.33	33.86	45.72	60.00	13.41	Average
3	10480.00	38.30	4.95	45.67	33.86	55.06	60.00	13.14	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.



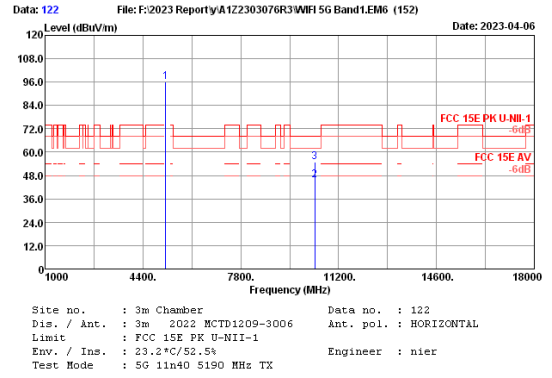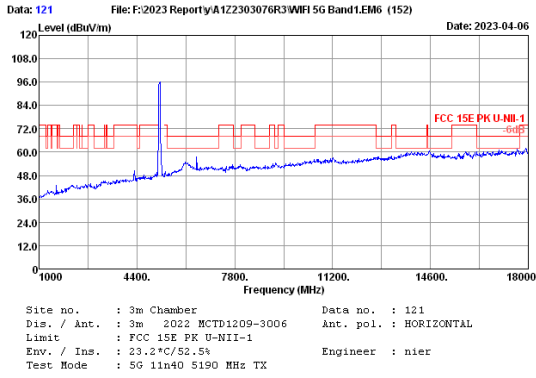



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5190.00	33.27	3.47	93.18	33.66	96.26	-----	-----	Peak
2	10380.00	38.28	4.92	36.48	33.93	45.75	-----	-----	Average
3	10380.00	38.28	4.92	45.57	33.93	54.84	68.20	13.36	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

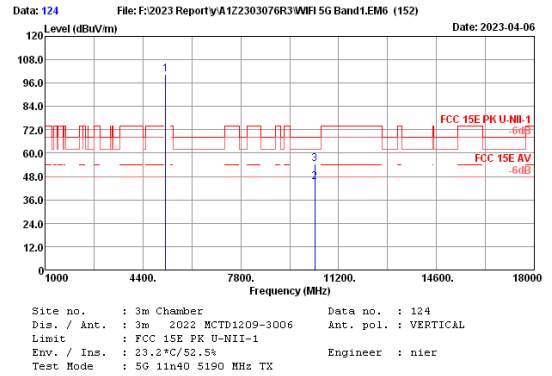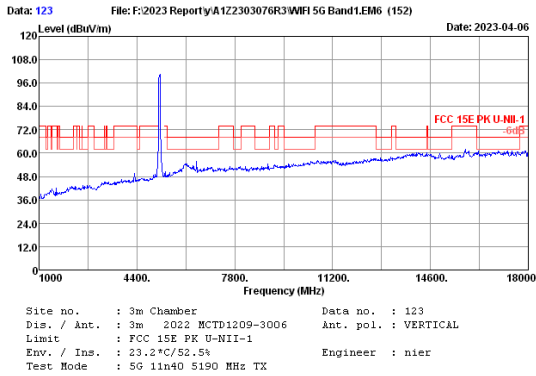



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5190.00	33.27	3.47	97.28	33.66	100.36	-----	-----	Peak
2	10380.00	38.28	4.92	36.11	33.93	45.38	-----	-----	Average
3	10380.00	38.28	4.92	45.01	33.93	54.28	68.20	13.92	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

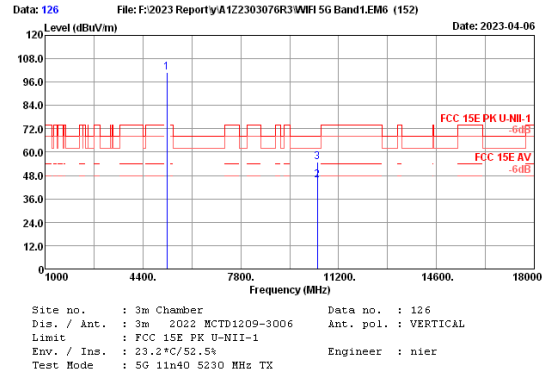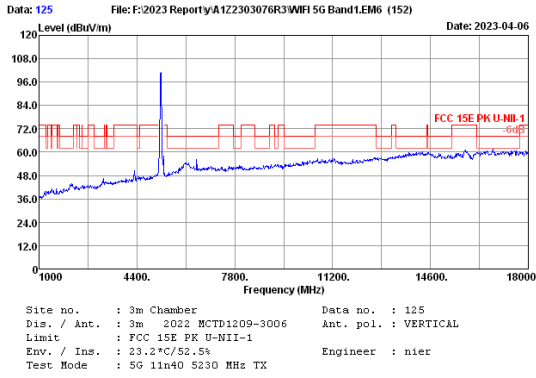



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5230.00	33.17	3.49	97.77	33.65	100.78	-----	-----	Peak
2	10460.00	38.30	4.94	36.11	33.88	45.47	-----	-----	Average
3	10460.00	38.30	4.94	45.66	33.88	55.02	68.20	13.18	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

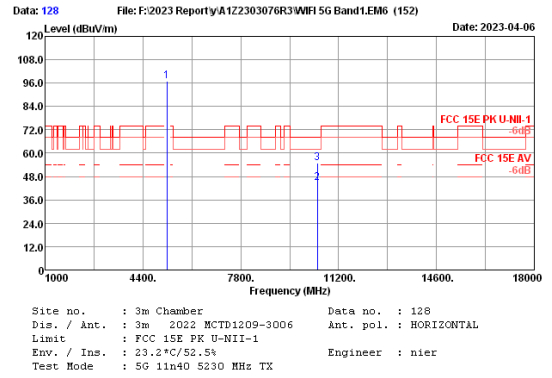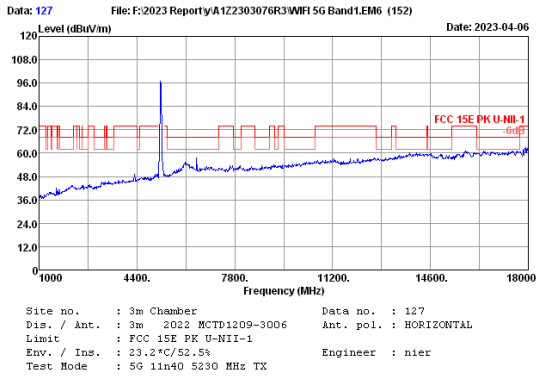



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5230.00	33.17	3.49	94.05	33.65	97.06	-----	-----	Peak
2	10460.00	38.30	4.94	35.52	33.88	44.88	-----	-----	Average
3	10460.00	38.30	4.94	45.46	33.88	54.82	68.20	13.38	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

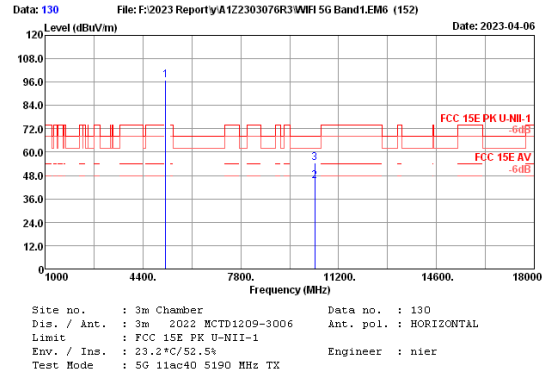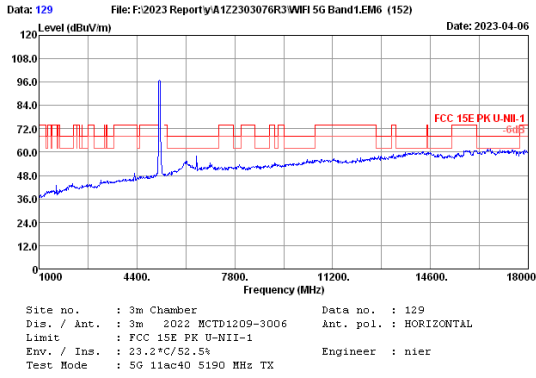



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5190.00	33.27	3.47	93.70	33.66	96.78	68.20	13.87	Peak
2	10380.00	38.28	4.92	35.73	33.93	45.00	68.20		Average
3	10380.00	38.28	4.92	45.06	33.93	54.33	68.20	13.87	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

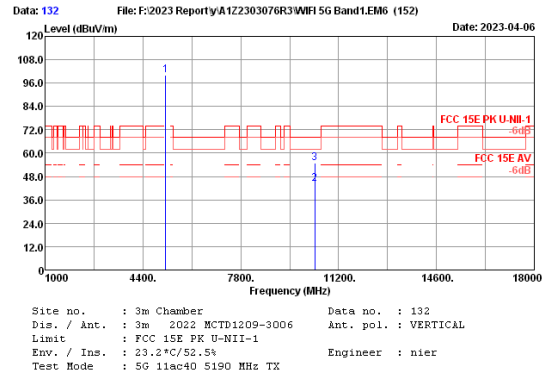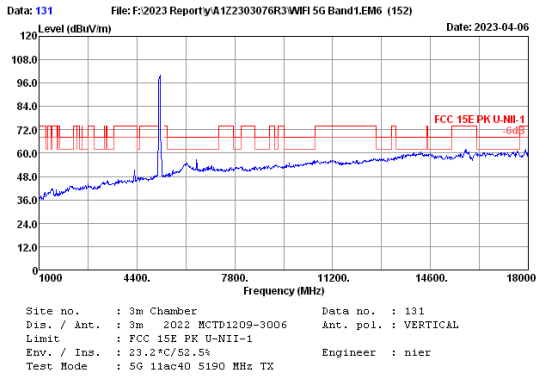



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5190.00	33.27	3.47	96.85	33.66	99.93	68.20	13.30	Peak
2	10380.00	38.28	4.92	35.17	33.93	44.44	68.20		Average
3	10380.00	38.28	4.92	45.63	33.93	54.90	68.20	13.30	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

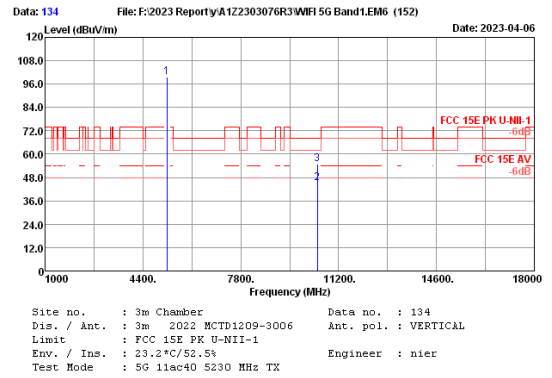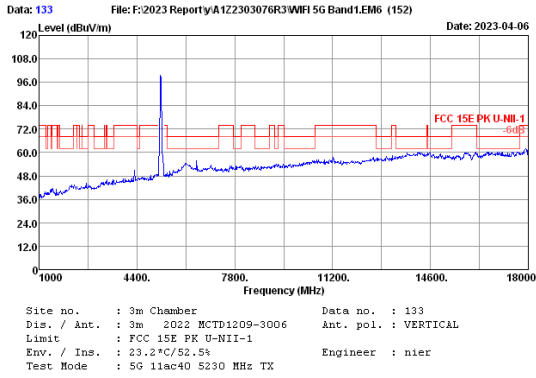



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5230.00	33.17	3.49	96.75	33.65	99.76	-----	-----	Peak
2	10460.00	38.30	4.94	35.62	33.88	44.98	-----	-----	Average
3	10460.00	38.30	4.94	45.46	33.88	54.82	68.20	13.38	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

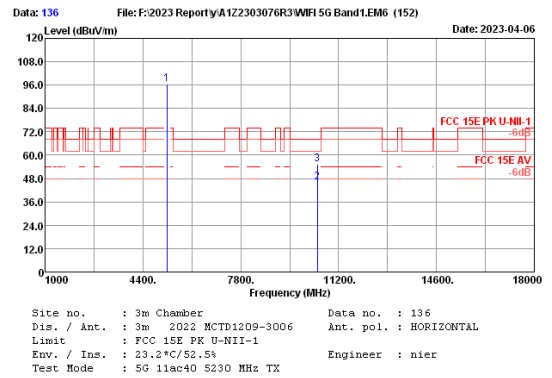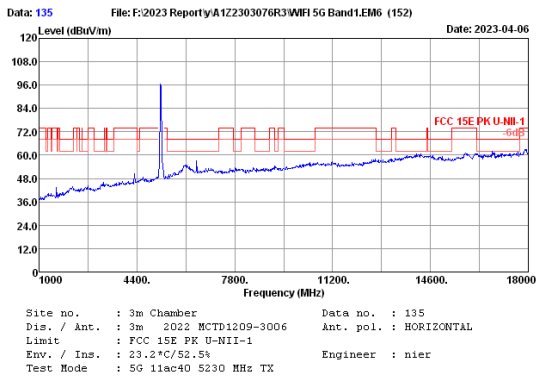



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5230.00	33.17	3.49	93.46	33.65	96.47	-----	-----	Peak
2	10460.00	38.30	4.94	36.75	33.88	46.11	-----	-----	Average
3	10460.00	38.30	4.94	45.79	33.88	55.15	68.20	13.05	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

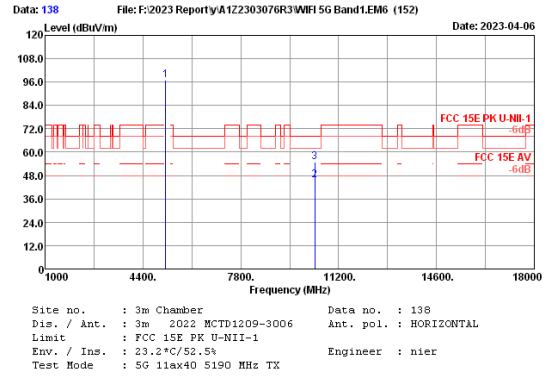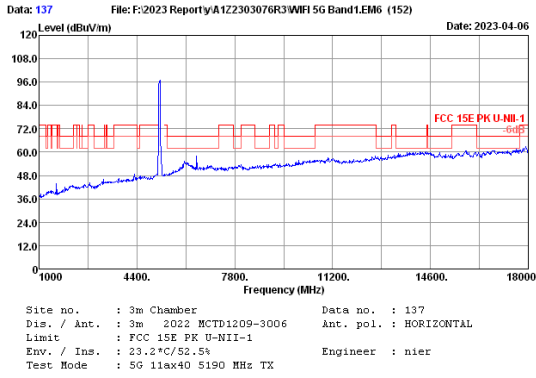



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5190.00	33.27	3.47	93.88	33.66	96.96	-----	-----	Peak
2	10380.00	38.28	4.92	36.18	33.93	45.45	-----	-----	Average
3	10380.00	38.28	4.92	45.79	33.93	55.06	68.20	13.14	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

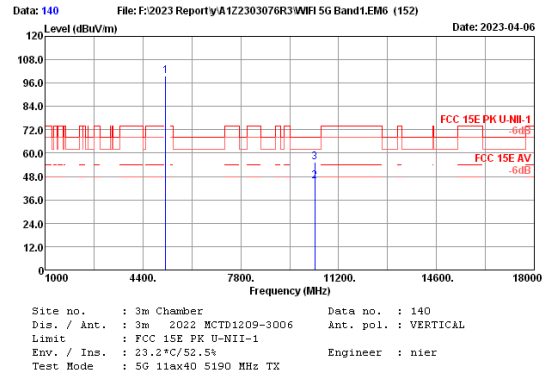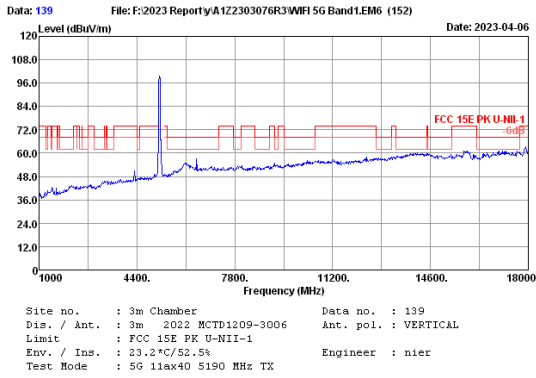



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5190.00	33.27	3.47	96.70	33.66	99.78	-----	-----	Peak
2	10380.00	38.28	4.92	36.17	33.93	45.44	-----	-----	Average
3	10380.00	38.28	4.92	46.10	33.93	55.37	68.20	12.83	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

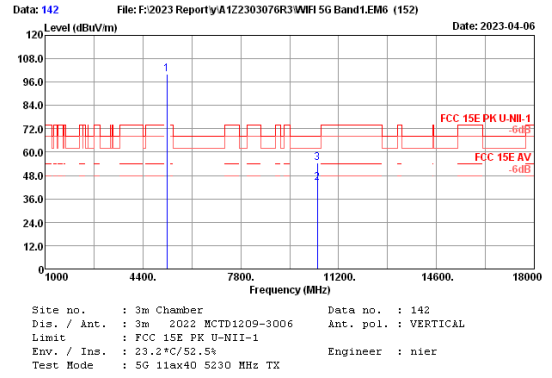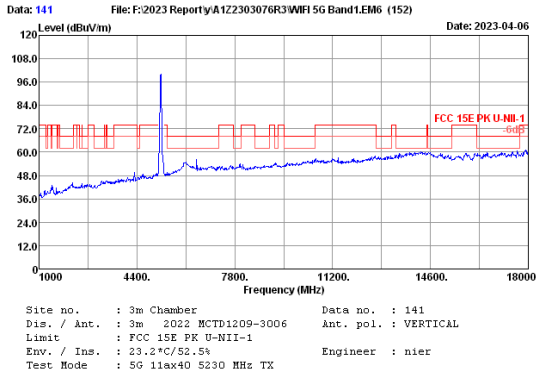



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5230.00	33.17	3.49	97.18	33.65	100.19	-----	-----	Peak
2	10460.00	38.30	4.94	35.12	33.88	44.48	-----	-----	Average
3	10460.00	38.30	4.94	45.14	33.88	54.50	68.20	13.70	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

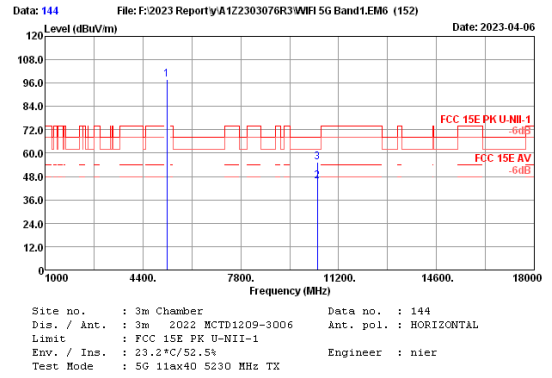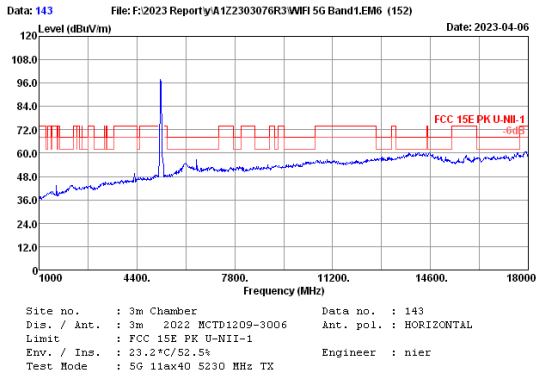



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5230.00	33.17	3.49	94.70	33.65	97.71	-----	-----	Peak
2	10460.00	38.30	4.94	36.13	33.88	45.49	-----	-----	Average
3	10460.00	38.30	4.94	45.78	33.88	55.14	68.20	13.06	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

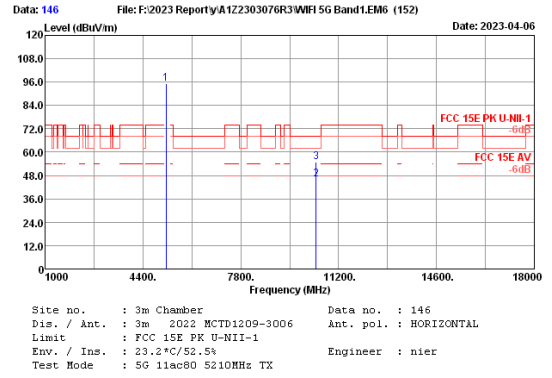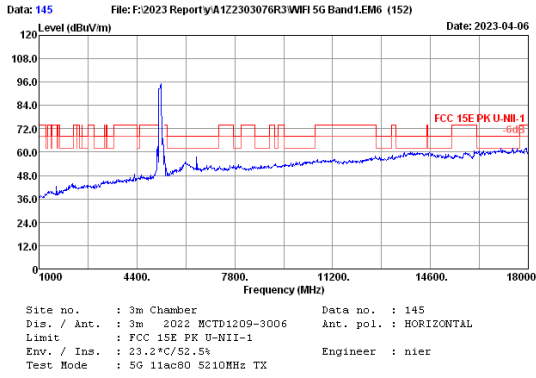



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5210.00	33.23	3.49	91.94	33.66	95.00	-----	-----	Peak
2	10420.00	38.30	4.93	36.52	33.91	45.84	-----	-----	Average
3	10420.00	38.30	4.93	45.62	33.91	54.94	68.20	13.26	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

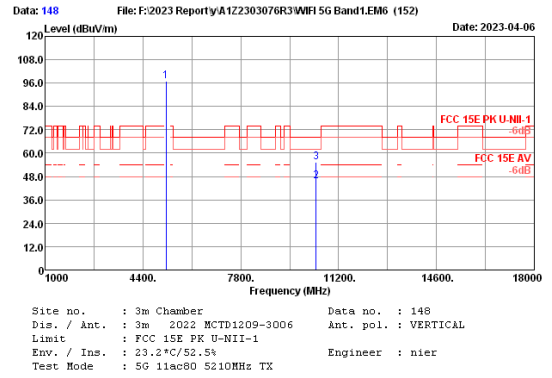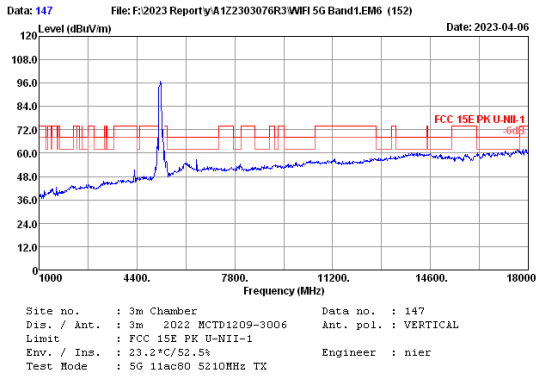



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5210.00	33.23	3.49	94.10	33.66	97.16	-----	-----	Peak
2	10420.00	38.30	4.93	36.36	33.91	45.68	-----	-----	Average
3	10420.00	38.30	4.93	46.03	33.91	55.35	68.20	12.85	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

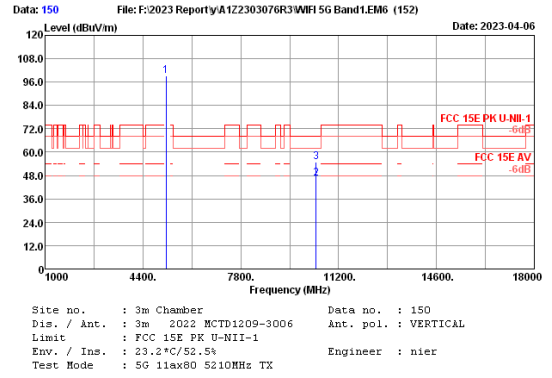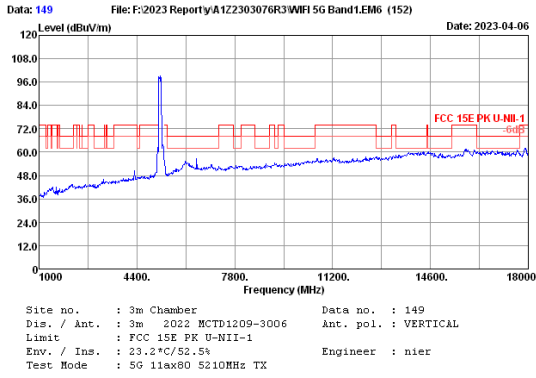

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5210.00	33.23	3.49	96.31	33.66	99.37	-----	-----	Peak
2	10420.00	38.30	4.93	37.18	33.91	46.50	-----	-----	Average
3	10420.00	38.30	4.93	45.66	33.91	54.98	68.20	13.22	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

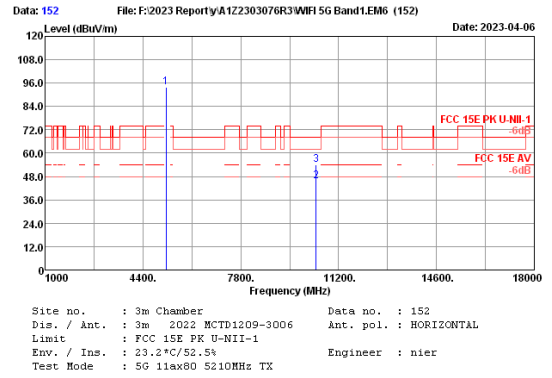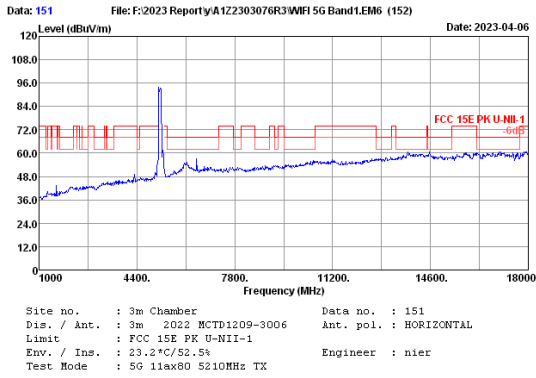


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5210.00	33.23	3.49	90.87	33.66	93.93	-----	-----	Peak
2	10420.00	38.30	4.93	36.35	33.91	45.67	-----	-----	Average
3	10420.00	38.30	4.93	44.59	33.91	53.91	68.20	14.29	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.




U-NII-3 Band:

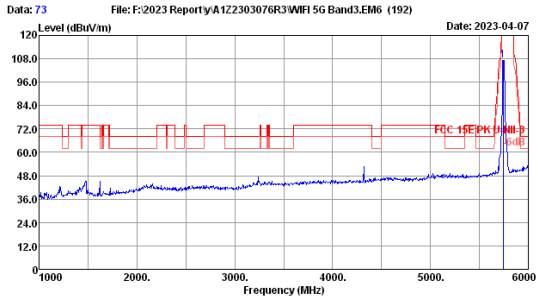

Site no. : 3m Chamber Data no. : 73  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC 15E PK U-NII-3  
 Env. / Ins. : 23.2°C/52.5% Engineer : nier  
 Test Mode : 11a 5745MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5745.00	34.00	3.70	103.23	33.55	107.38			Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

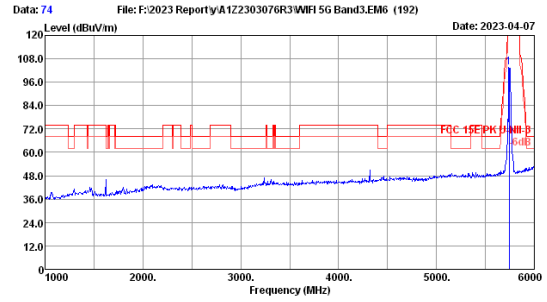

Site no. : 3m Chamber Data no. : 74  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC 15E PK U-NII-3  
 Env. / Ins. : 23.2°C/52.5% Engineer : nier  
 Test Mode : 11a 5745MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5745.00	34.00	3.70	99.57	33.55	103.72			Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

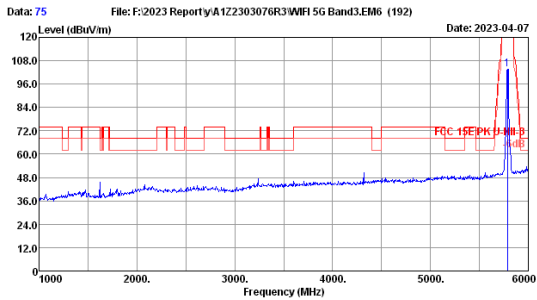

Site no. : 3m Chamber Data no. : 75  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC 15E PK U-NII-3  
 Env. / Ins. : 23.2°C/52.5% Engineer : nier  
 Test Mode : 11a 5785MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5785.00	33.93	3.71	99.67	33.54	103.77			Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

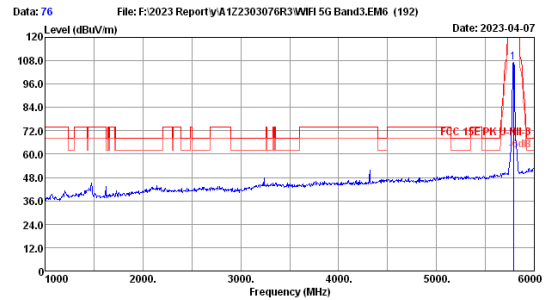

Site no. : 3m Chamber Data no. : 76  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC 15E PK U-NII-3  
 Env. / Ins. : 23.2°C/52.5% Engineer : nier  
 Test Mode : 11a 5785MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5785.00	33.93	3.71	103.16	33.54	107.26			Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

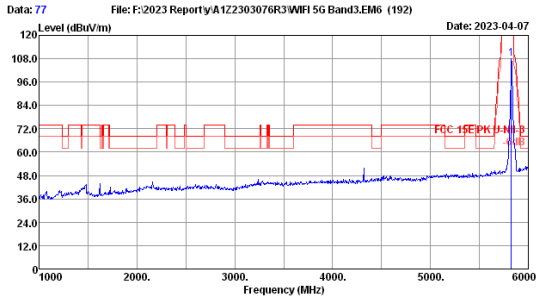

Site no. : 3m Chamber Data no. : 77  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC 15E PK U-NII-3  
 Env. / Ins. : 23.2°C/52.5% Engineer : nier  
 Test Mode : 11a 5825MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.00	34.10	3.73	103.96	33.54	108.25	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

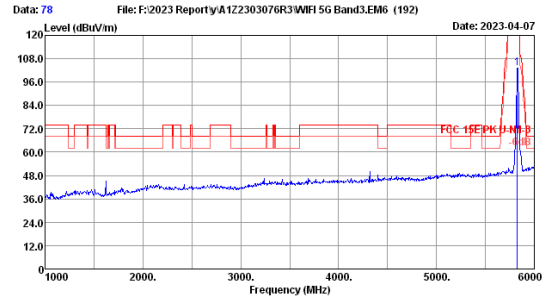

Site no. : 3m Chamber Data no. : 78  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC 15E PK U-NII-3  
 Env. / Ins. : 23.2°C/52.5% Engineer : nier  
 Test Mode : 11a 5825MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.00	34.10	3.73	98.97	33.54	103.26	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

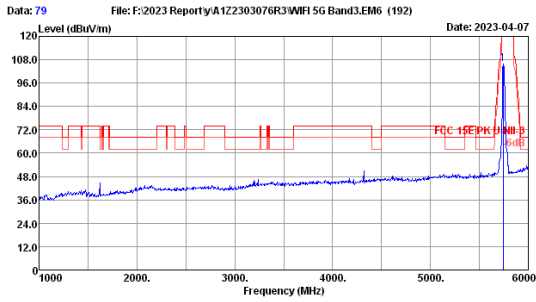

Site no. : 3m Chamber Data no. : 79  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC 15E PK U-NII-3  
 Env. / Ins. : 23.2°C/52.5% Engineer : nier  
 Test Mode : 11n20 5745MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5745.00	34.00	3.70	101.58	33.55	105.73	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

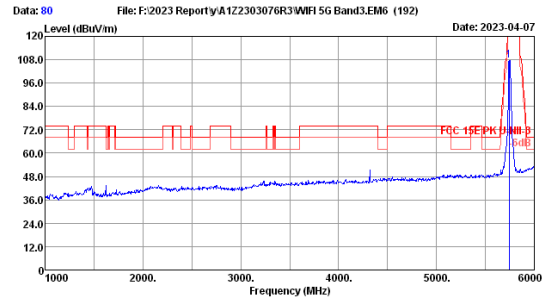

Site no. : 3m Chamber Data no. : 80  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC 15E PK U-NII-3  
 Env. / Ins. : 23.2°C/52.5% Engineer : nier  
 Test Mode : 11n20 5745MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5745.00	34.00	3.70	103.59	33.55	107.74	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

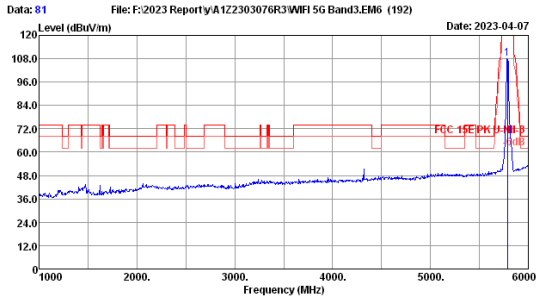

Site no. : 3m Chamber Data no. : 81  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC 15E PK U-NII-3  
 Env. / Ins. : 23.2°C/52.5% Engineer : nier  
 Test Mode : 11n20 5785MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5785.00	33.93	3.71	103.98	33.54	108.08	72.00	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

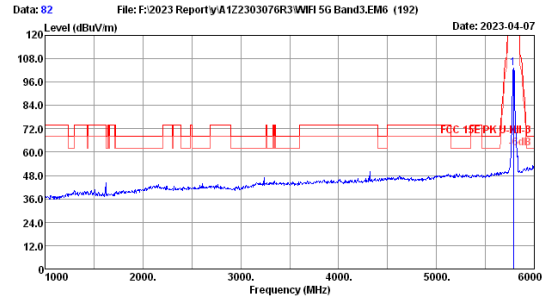

Site no. : 3m Chamber Data no. : 82  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC 15E PK U-NII-3  
 Env. / Ins. : 23.2°C/52.5% Engineer : nier  
 Test Mode : 11n20 5785MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5785.00	33.93	3.71	99.08	33.54	103.18	72.00	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

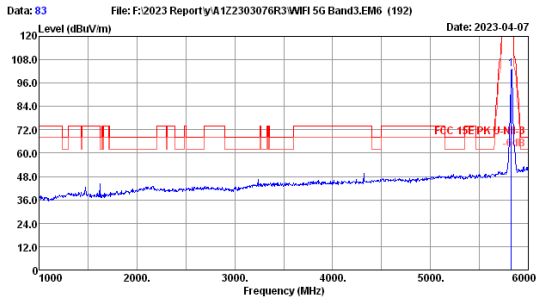

Site no. : 3m Chamber Data no. : 83  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC 15E PK U-NII-3  
 Env. / Ins. : 23.2°C/52.5% Engineer : nier  
 Test Mode : 11n20 5825MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.00	34.10	3.73	98.82	33.54	103.11	72.00	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

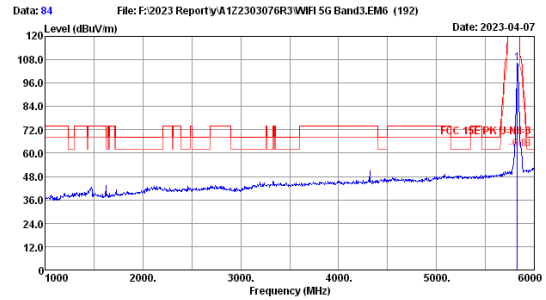

Site no. : 3m Chamber Data no. : 84  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC 15E PK U-NII-3  
 Env. / Ins. : 23.2°C/52.5% Engineer : nier  
 Test Mode : 11n20 5825MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.00	34.10	3.73	101.82	33.54	106.11	72.00	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

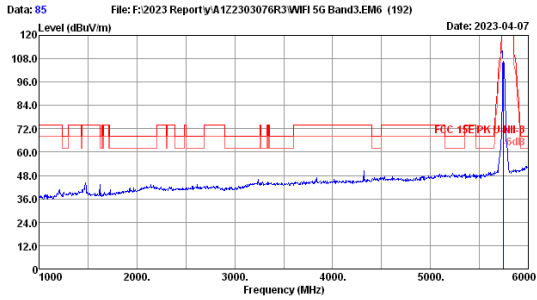

Site no. : 3m Chamber Data no. : 85  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC 15E PK U-NII-3  
 Env. / Ins. : 23.2°C/52.5% Engineer : nier  
 Test Mode : 11ac20 5745MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5745.00	34.00	3.70	102.43	33.55	106.58	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

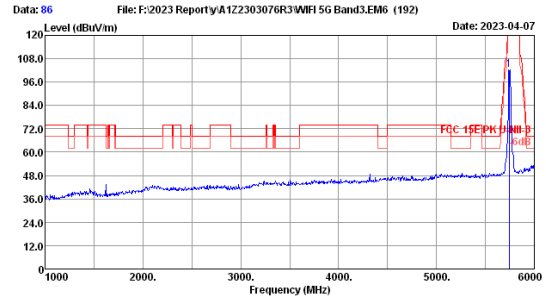

Site no. : 3m Chamber Data no. : 86  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC 15E PK U-NII-3  
 Env. / Ins. : 23.2°C/52.5% Engineer : nier  
 Test Mode : 11ac20 5745MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5745.00	34.00	3.70	98.31	33.55	102.46	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

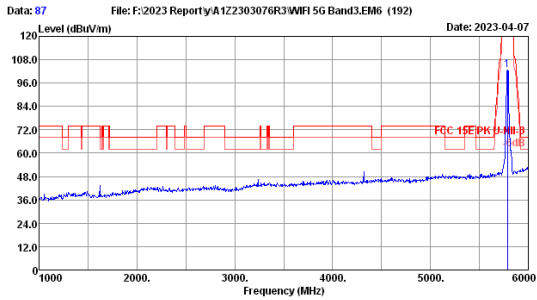

Site no. : 3m Chamber Data no. : 87  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC 15E PK U-NII-3  
 Env. / Ins. : 23.2°C/52.5% Engineer : nier  
 Test Mode : 11ac20 5785MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5785.00	33.93	3.71	98.51	33.54	102.61	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

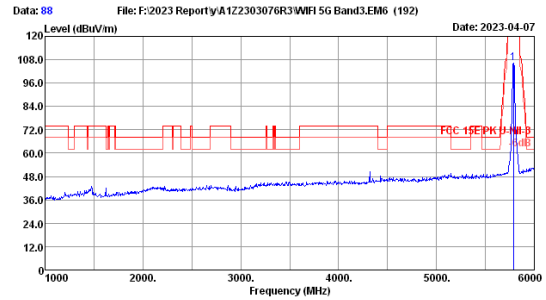

Site no. : 3m Chamber Data no. : 88  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC 15E PK U-NII-3  
 Env. / Ins. : 23.2°C/52.5% Engineer : nier  
 Test Mode : 11ac20 5785MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5785.00	33.93	3.71	102.08	33.54	106.18	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

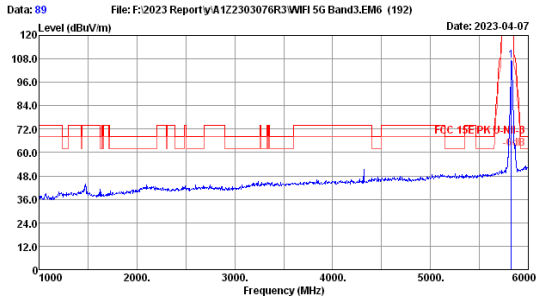

Data: 89 File: F:\2023 Report\A122303076R3\WiFi 5G Band3.EM6 (192) Date: 2023-04-07  
 Site no. : 3m Chamber Data no. : 89  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC 15E PK U-NII-3  
 Env. / Ins. : 23.2°C/52.5% Engineer : nier  
 Test Mode : 11ac20 5825MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.00	34.10	3.73	102.69	33.54	106.98	72.00	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

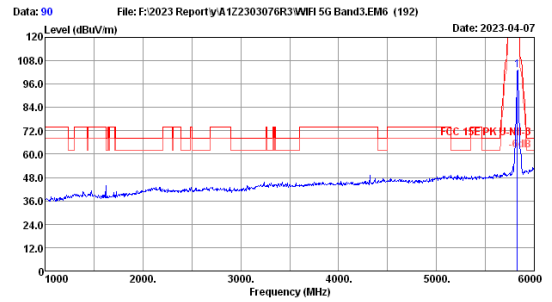

Data: 90 File: F:\2023 Report\A122303076R3\WiFi 5G Band3.EM6 (192) Date: 2023-04-07  
 Site no. : 3m Chamber Data no. : 90  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC 15E PK U-NII-3  
 Env. / Ins. : 23.2°C/52.5% Engineer : nier  
 Test Mode : 11ac20 5825MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.00	34.10	3.73	98.74	33.54	103.03	72.00	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

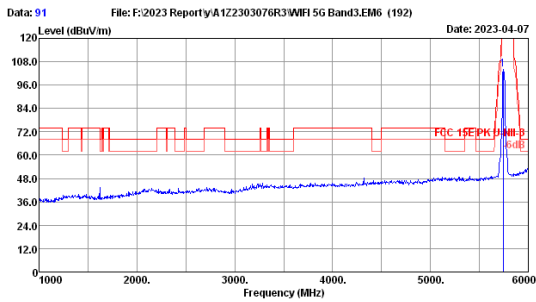

Data: 91 File: F:\2023 Report\A122303076R3\WiFi 5G Band3.EM6 (192) Date: 2023-04-07  
 Site no. : 3m Chamber Data no. : 91  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC 15E PK U-NII-3  
 Env. / Ins. : 23.2°C/52.5% Engineer : nier  
 Test Mode : 11ax20 5745MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5745.00	34.00	3.70	99.71	33.55	103.86	72.00	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

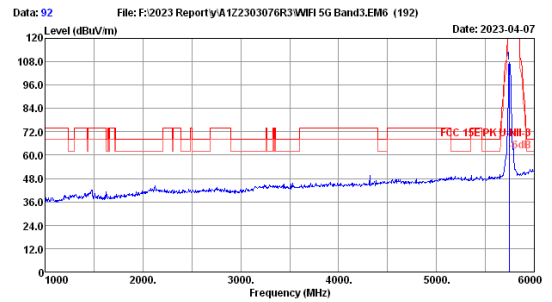

Data: 92 File: F:\2023 Report\A122303076R3\WiFi 5G Band3.EM6 (192) Date: 2023-04-07  
 Site no. : 3m Chamber Data no. : 92  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC 15E PK U-NII-3  
 Env. / Ins. : 23.2°C/52.5% Engineer : nier  
 Test Mode : 11ax20 5745MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5745.00	34.00	3.70	103.41	33.55	107.56	72.00	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

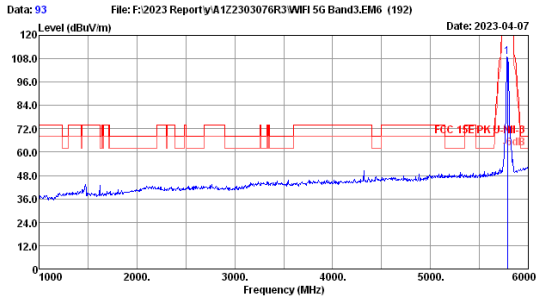

Site no. : 3m Chamber Data no. : 93  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC 15E PK U-NII-3  
 Env. / Ins. : 23.2°C/52.5% Engineer : nier  
 Test Mode : 11ax20 5785MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5785.00	33.93	3.71	105.01	33.54	109.11	72	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

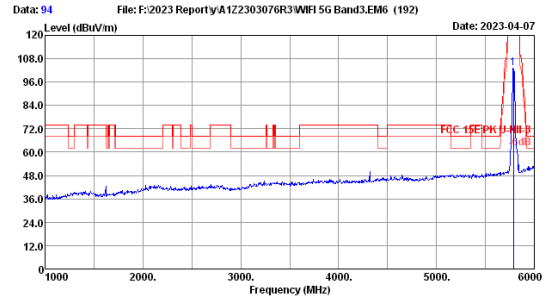

Site no. : 3m Chamber Data no. : 94  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC 15E PK U-NII-3  
 Env. / Ins. : 23.2°C/52.5% Engineer : nier  
 Test Mode : 11ax20 5785MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5785.00	33.93	3.71	99.06	33.54	103.16	72	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

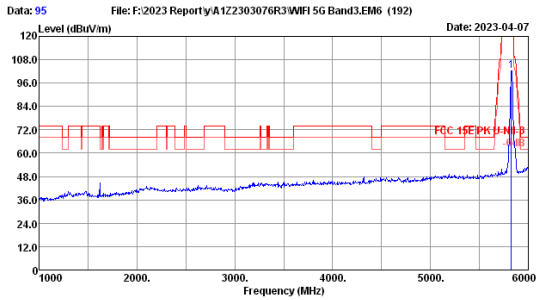

Site no. : 3m Chamber Data no. : 95  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC 15E PK U-NII-3  
 Env. / Ins. : 23.2°C/52.5% Engineer : nier  
 Test Mode : 11ax20 5825MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.00	34.10	3.73	98.17	33.54	102.46	72	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

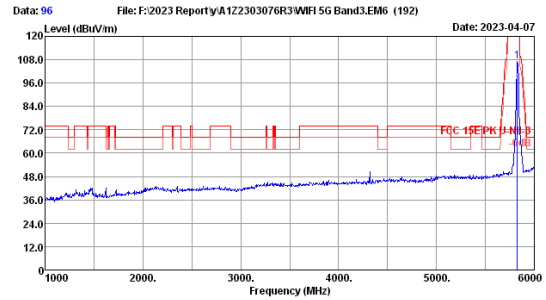

Site no. : 3m Chamber Data no. : 96  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC 15E PK U-NII-3  
 Env. / Ins. : 23.2°C/52.5% Engineer : nier  
 Test Mode : 11ax20 5825MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.00	34.10	3.73	102.75	33.54	107.04	72	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

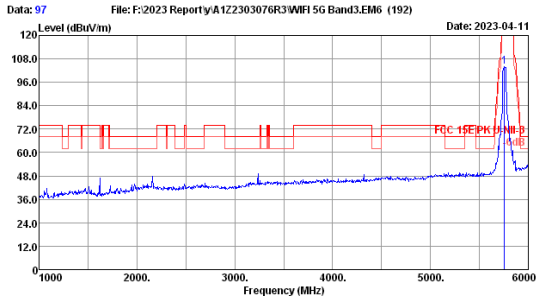

Date: 2023-04-11  
 File: F:\2023 Report\A122303076R3\WiFi 5G Band3.EM6 (192)  
 Site no. : 3m Chamber Data no. : 97  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC 15E PK U-NII-3  
 Env. / Ins. : 23.2°C/52.5% Engineer : nier  
 Test Mode : 11n40 5755MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5755.00	33.97	3.71	99.72	33.55	103.85	72	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

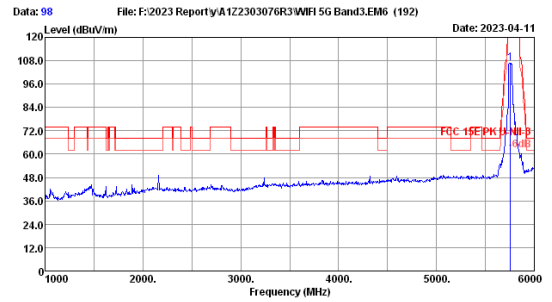

Date: 2023-04-11  
 File: F:\2023 Report\A122303076R3\WiFi 5G Band3.EM6 (192)  
 Site no. : 3m Chamber Data no. : 98  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC 15E PK U-NII-3  
 Env. / Ins. : 23.2°C/52.5% Engineer : nier  
 Test Mode : 11n40 5755MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5755.00	33.97	3.71	102.44	33.55	106.57	72	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

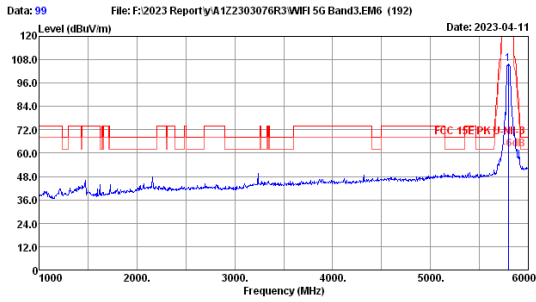

Date: 2023-04-11  
 File: F:\2023 Report\A122303076R3\WiFi 5G Band3.EM6 (192)  
 Site no. : 3m Chamber Data no. : 99  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC 15E PK U-NII-3  
 Env. / Ins. : 23.2°C/52.5% Engineer : nier  
 Test Mode : 11n40 5795MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5795.00	33.90	3.72	101.57	33.54	105.65	72	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

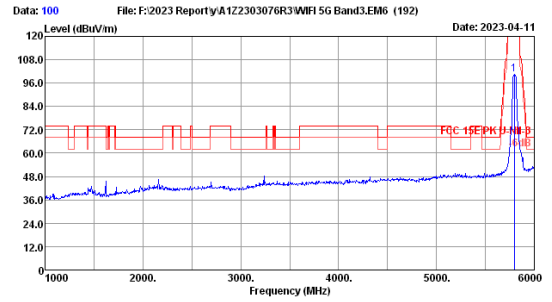

Date: 2023-04-11  
 File: F:\2023 Report\A122303076R3\WiFi 5G Band3.EM6 (192)  
 Site no. : 3m Chamber Data no. : 100  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC 15E PK U-NII-3  
 Env. / Ins. : 23.2°C/52.5% Engineer : nier  
 Test Mode : 11n40 5795MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5795.00	33.90	3.72	96.39	33.54	100.47	72	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

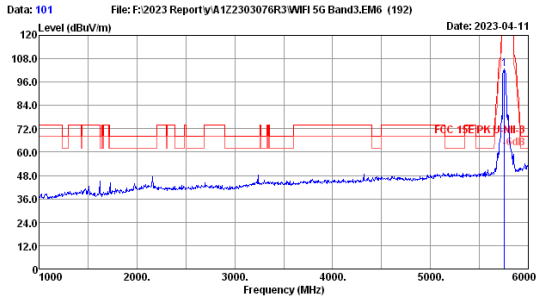

Data: 101 File: F:\2023 Reporty\A122303076R3\WiFi 5G Band3.EM6 (192) Date: 2023-04-11  
 Site no. : 3m Chamber Data no. : 101  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC 15E PK U-NII-3  
 Env. / Ins. : 23.2°C/52.5% Engineer : nier  
 Test Mode : 11ac40 5755MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5755.00	33.97	3.71	98.79	33.55	102.92	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

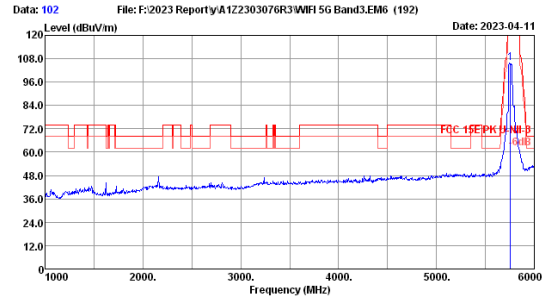

Data: 102 File: F:\2023 Reporty\A122303076R3\WiFi 5G Band3.EM6 (192) Date: 2023-04-11  
 Site no. : 3m Chamber Data no. : 102  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC 15E PK U-NII-3  
 Env. / Ins. : 23.2°C/52.5% Engineer : nier  
 Test Mode : 11ac40 5755MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5755.00	33.97	3.71	101.49	33.55	105.62	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

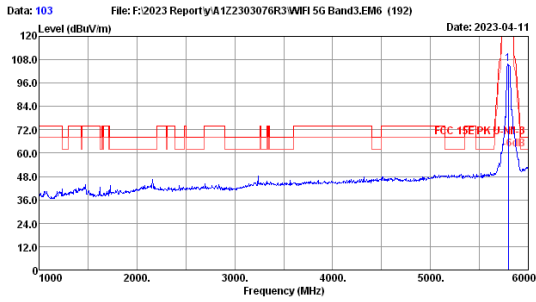

Data: 103 File: F:\2023 Reporty\A122303076R3\WiFi 5G Band3.EM6 (192) Date: 2023-04-11  
 Site no. : 3m Chamber Data no. : 103  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC 15E PK U-NII-3  
 Env. / Ins. : 23.2°C/52.5% Engineer : nier  
 Test Mode : 11ac40 5795MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5795.00	33.90	3.72	101.77	33.54	105.85	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

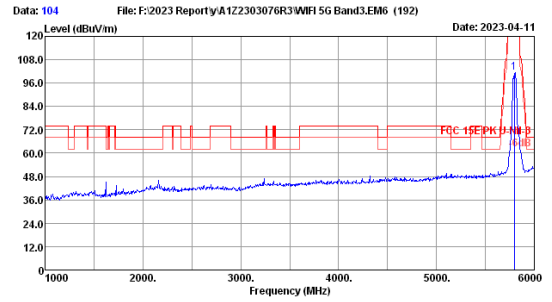


Data: 104 File: F:\2023 Reporty\A122303076R3\WiFi 5G Band3.EM6 (192) Date: 2023-04-11  
 Site no. : 3m Chamber Data no. : 104  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC 15E PK U-NII-3  
 Env. / Ins. : 23.2°C/52.5% Engineer : nier  
 Test Mode : 11ac40 5795MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5795.00	33.90	3.72	97.11	33.54	101.19	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.




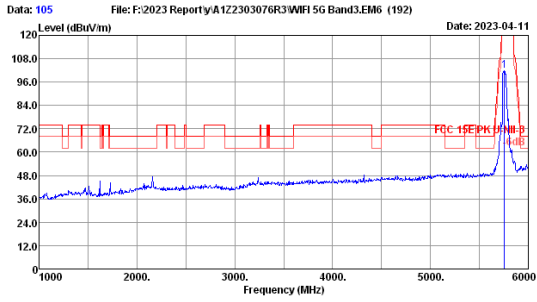

Site no. : 3m Chamber Data no. : 105  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC 15E PK U-NII-3  
 Env. / Ins. : 23.2°C/52.5% Engineer : nier  
 Test Mode : 11ax40 5755MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5755.00	33.97	3.71	97.82	33.55	101.95	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

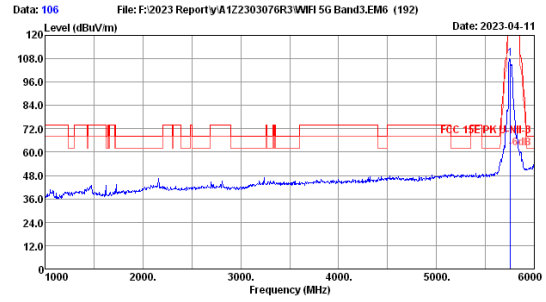

Site no. : 3m Chamber Data no. : 106  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC 15E PK U-NII-3  
 Env. / Ins. : 23.2°C/52.5% Engineer : nier  
 Test Mode : 11ax40 5755MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5755.00	33.97	3.71	104.11	33.55	108.24	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

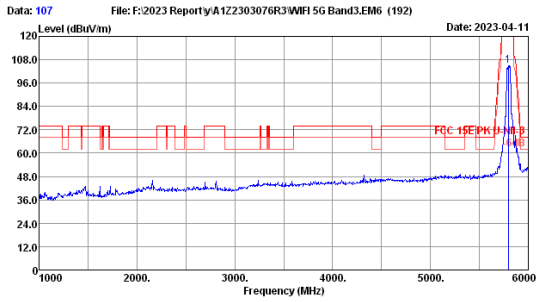

Site no. : 3m Chamber Data no. : 107  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC 15E PK U-NII-3  
 Env. / Ins. : 23.2°C/52.5% Engineer : nier  
 Test Mode : 11ax40 5795MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5795.00	33.90	3.72	100.95	33.54	105.03	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

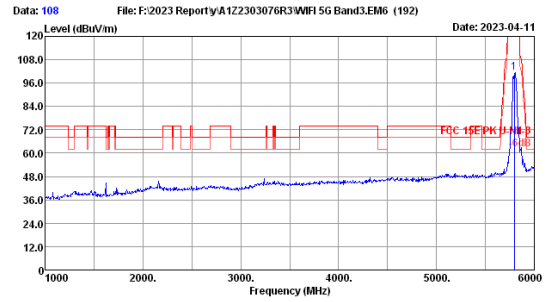

Site no. : 3m Chamber Data no. : 108  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC 15E PK U-NII-3  
 Env. / Ins. : 23.2°C/52.5% Engineer : nier  
 Test Mode : 11ax40 5795MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5795.00	33.90	3.72	97.46	33.54	101.54	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

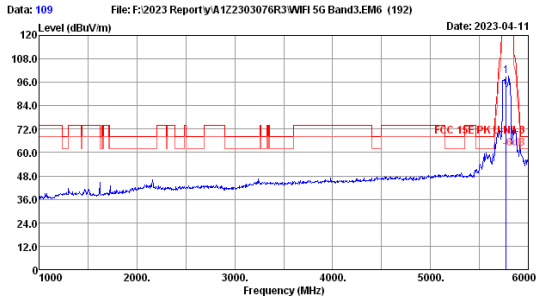

Site no. : 3m Chamber Data no. : 109  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC 15E PK U-NII-3  
 Env. / Ins. : 23.2°C/52.5% Engineer : nier  
 Test Mode : 11ax80 5775MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5775.00	33.93	3.71	95.01	33.55	99.10	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

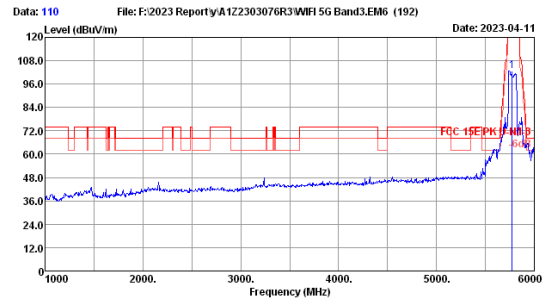

Site no. : 3m Chamber Data no. : 110  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC 15E PK U-NII-3  
 Env. / Ins. : 23.2°C/52.5% Engineer : nier  
 Test Mode : 11ax80 5775MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5775.00	33.93	3.71	98.67	33.55	102.76	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

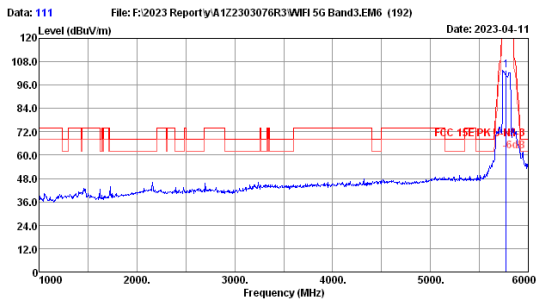

Site no. : 3m Chamber Data no. : 111  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC 15E PK U-NII-3  
 Env. / Ins. : 23.2°C/52.5% Engineer : nier  
 Test Mode : 11ax80 5775MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5775.00	33.93	3.71	99.57	33.55	103.66	-----	-----	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

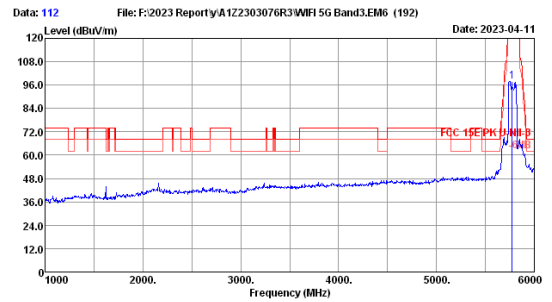

Site no. : 3m Chamber Data no. : 112  
 Dis. / Ant. : 3m 2022 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC 15E PK U-NII-3  
 Env. / Ins. : 23.2°C/52.5% Engineer : nier  
 Test Mode : 11ax80 5775MHz TX



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5775.00	33.93	3.71	93.91	33.55	98.00	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

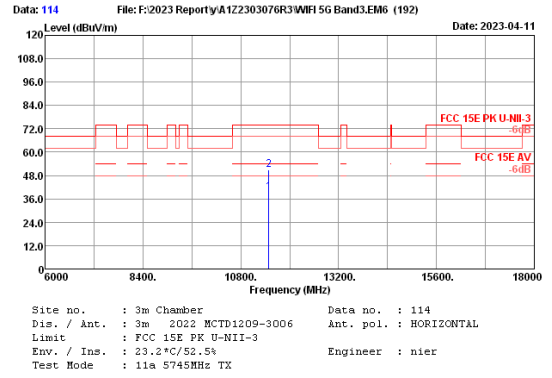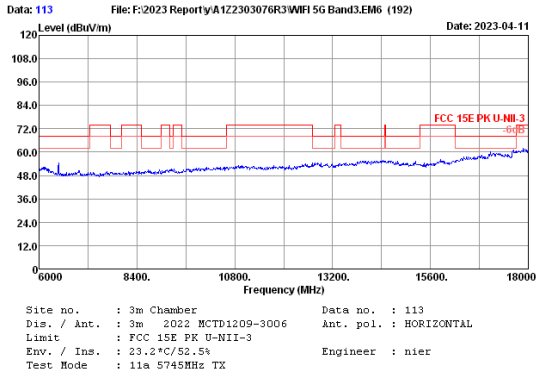



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11490.00	38.12	5.20	29.66	33.60	39.38	74.00	34.62	Average
2	11490.00	38.12	5.20	41.06	33.60	50.78	74.00	23.22	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

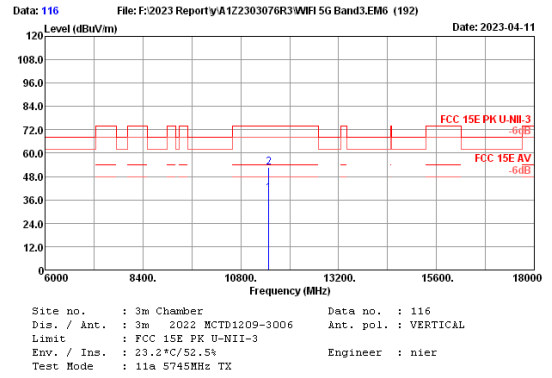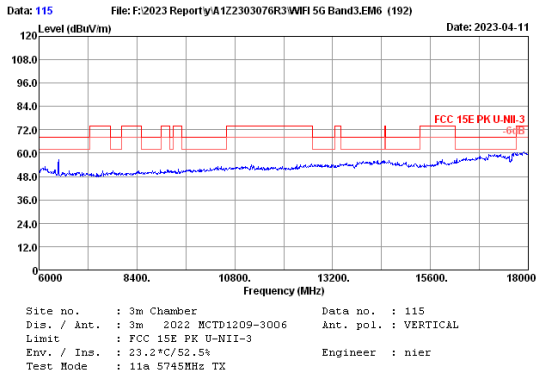



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11490.00	38.12	5.20	29.56	33.60	39.28	54.00	14.72	Average
2	11490.00	38.12	5.20	42.86	33.60	52.58	74.00	21.42	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

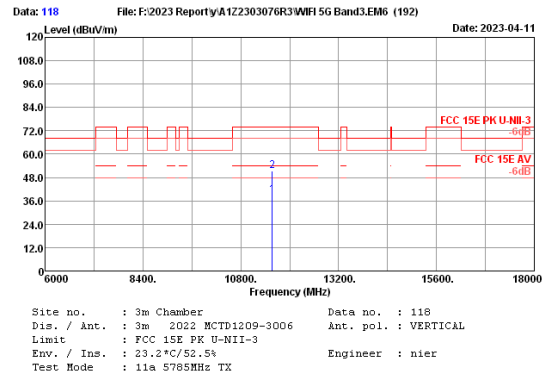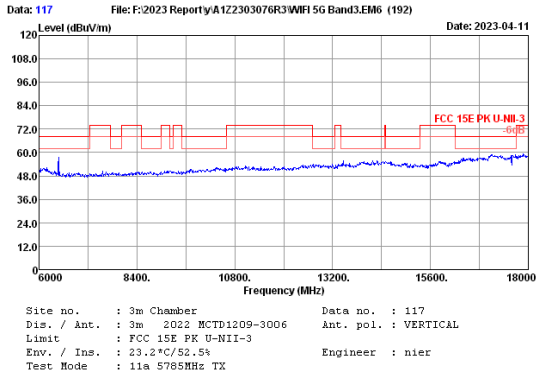



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11570.00	38.10	5.22	29.39	33.62	39.09	54.00	14.91	Average
2	11570.00	38.10	5.22	41.56	33.62	51.26	74.00	22.74	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

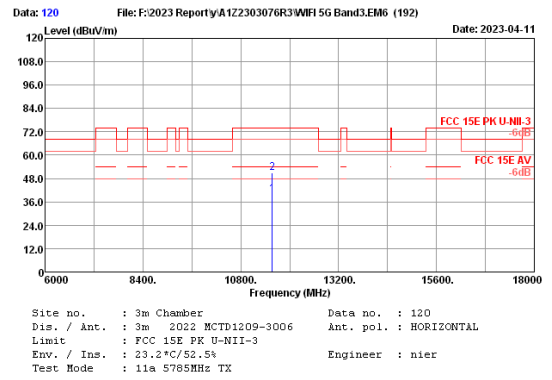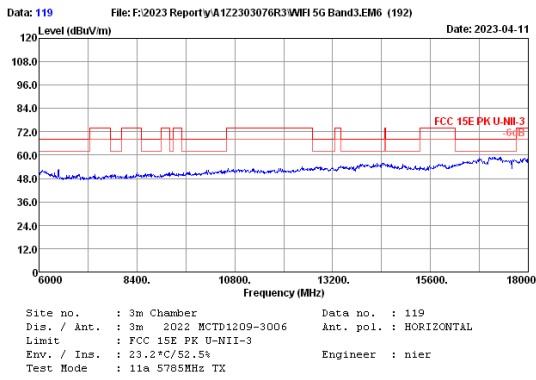



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11570.00	38.10	5.22	30.18	33.62	39.88	54.00	14.12	Average
2	11570.00	38.10	5.22	41.26	33.62	50.96	74.00	23.04	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

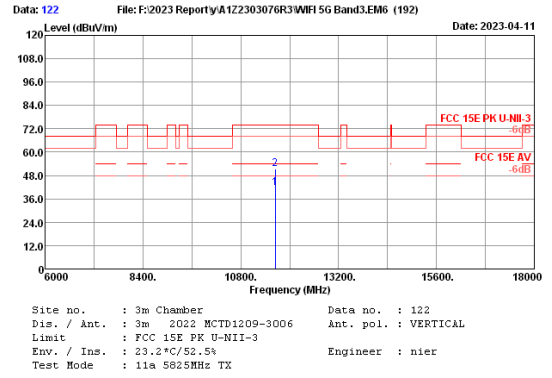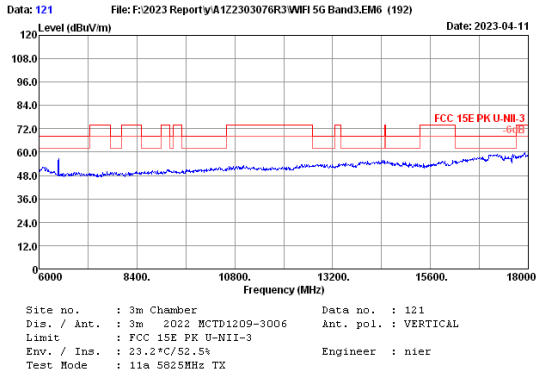



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11650.00	38.10	5.23	31.93	33.63	41.63	54.00	12.37	Average
2	11650.00	38.10	5.23	41.72	33.63	51.42	74.00	22.58	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

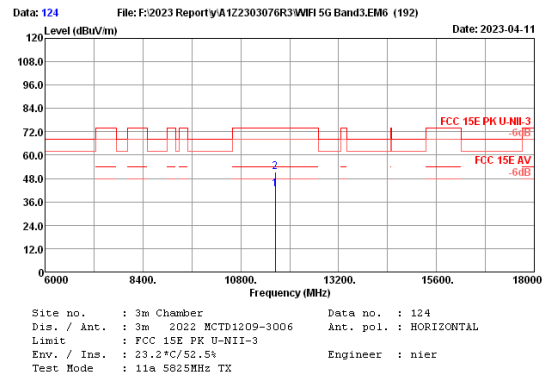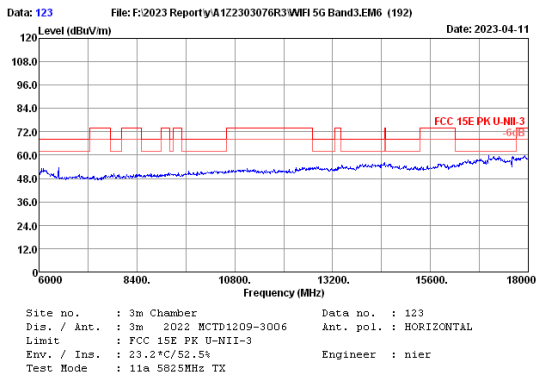



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11650.00	38.10	5.23	32.94	33.63	42.64	54.00	11.36	Average
2	11650.00	38.10	5.23	41.79	33.63	51.49	74.00	22.51	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

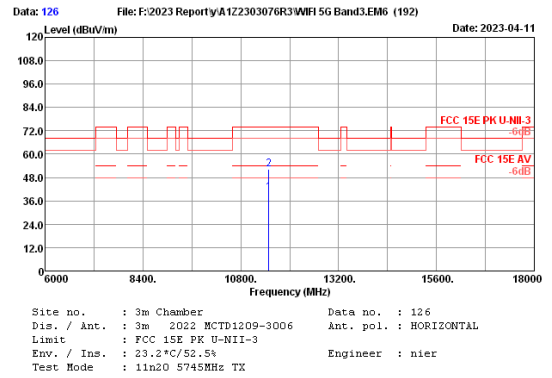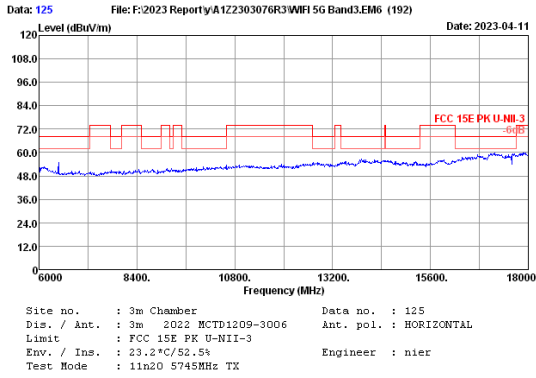



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11490.00	38.12	5.20	30.53	33.60	40.25	54.00	13.75	Average
2	11490.00	38.12	5.20	42.65	33.60	52.37	74.00	21.63	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

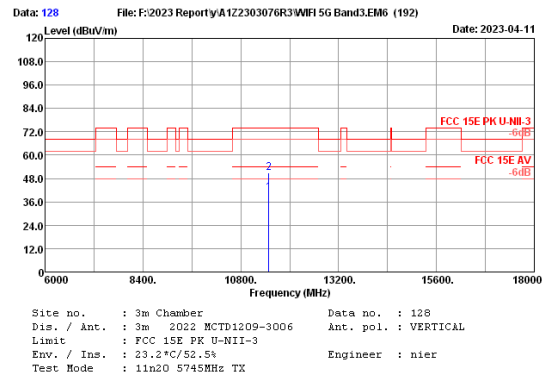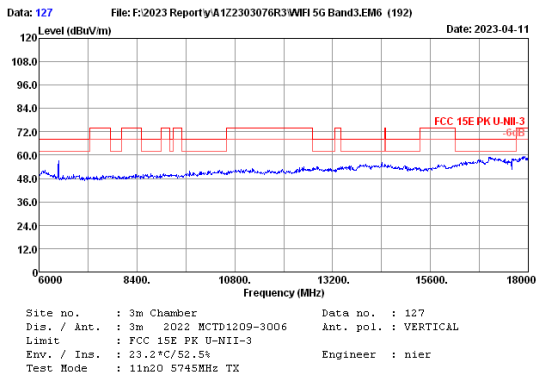



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11490.00	38.12	5.20	31.19	33.60	40.91	54.00	13.09	Average
2	11490.00	38.12	5.20	41.30	33.60	51.02	74.00	22.98	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

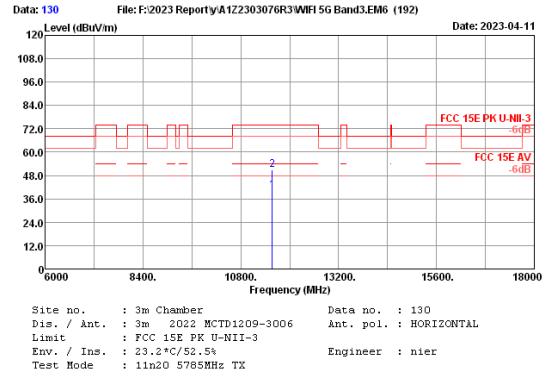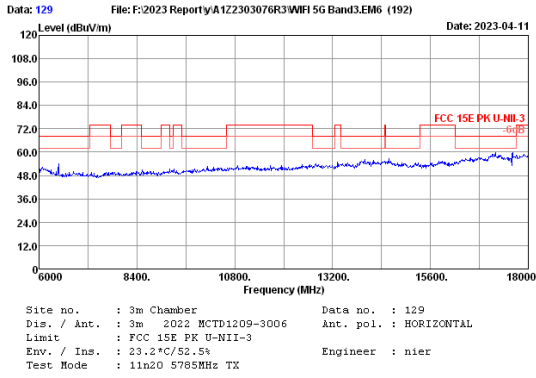



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11570.00	38.10	5.22	30.43	33.62	40.13	54.00	13.87	Average
2	11570.00	38.10	5.22	41.09	33.62	50.79	74.00	23.21	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

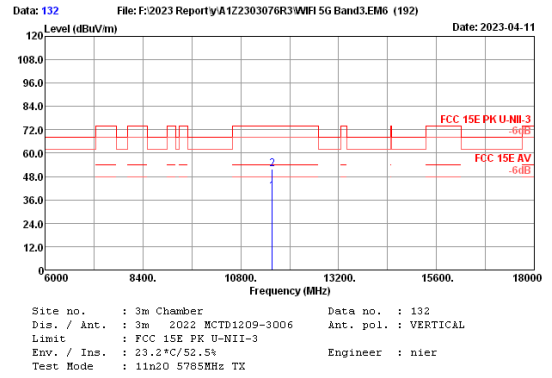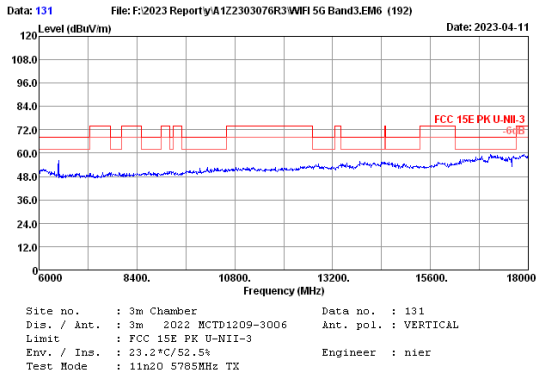



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11570.00	38.10	5.22	30.39	33.62	40.09	54.00	13.91	Average
2	11570.00	38.10	5.22	41.92	33.62	51.62	74.00	22.38	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

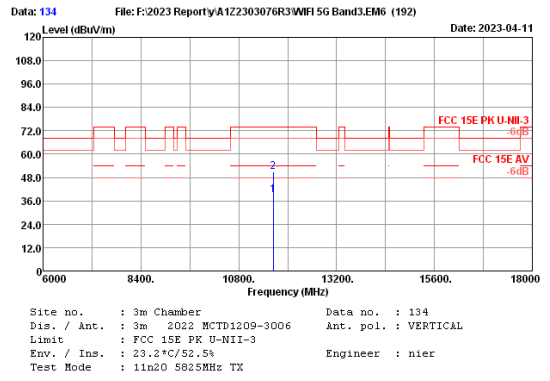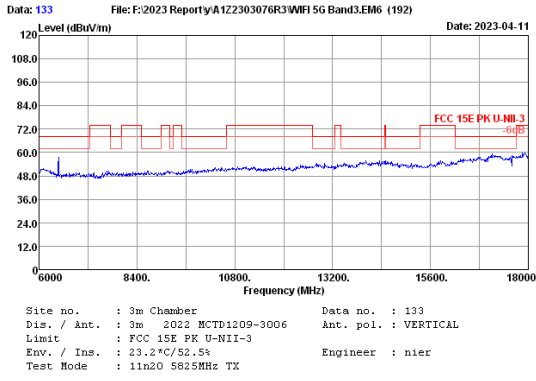

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11650.00	38.10	5.23	29.44	33.63	39.14	54.00	14.86	Average
2	11650.00	38.10	5.23	41.35	33.63	51.05	74.00	22.95	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

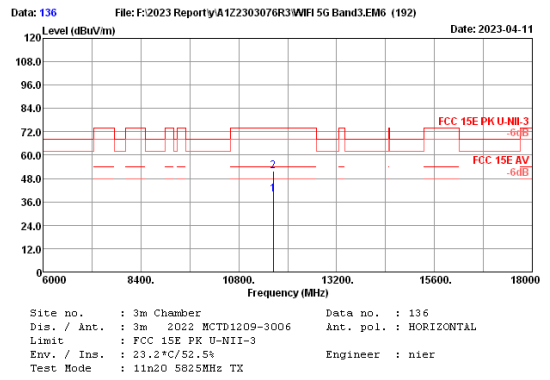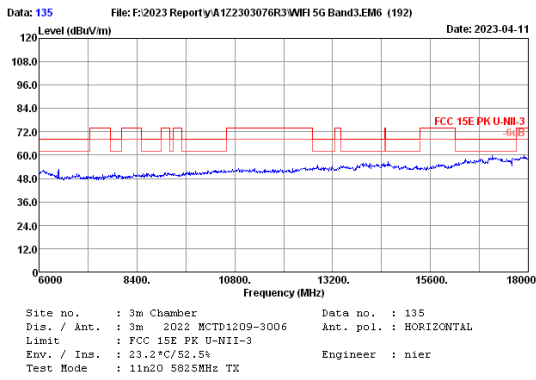

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11650.00	38.10	5.23	30.16	33.63	39.86	54.00	14.14	Average
2	11650.00	38.10	5.23	41.90	33.63	51.60	74.00	22.40	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.



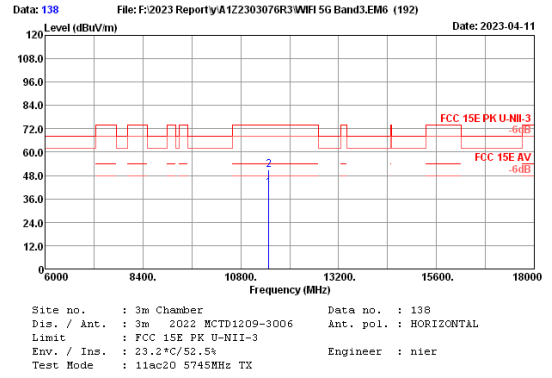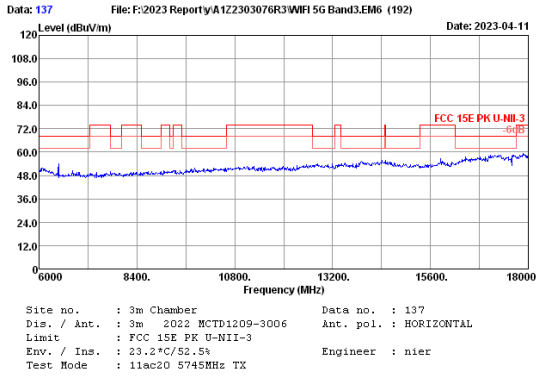



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11490.00	38.12	5.20	31.82	33.60	41.54	54.00	12.46	Average
2	11490.00	38.12	5.20	41.42	33.60	51.14	74.00	22.86	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

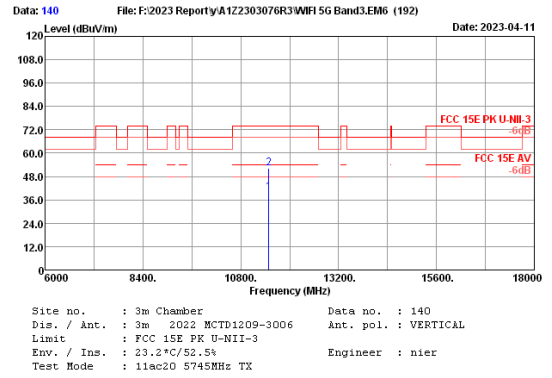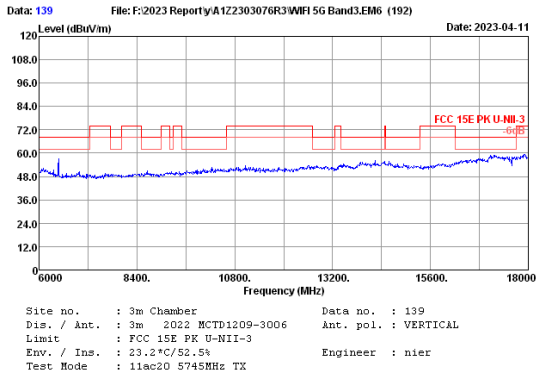



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11490.00	38.12	5.20	30.19	33.60	39.91	54.00	14.09	Average
2	11490.00	38.12	5.20	42.58	33.60	52.30	74.00	21.70	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

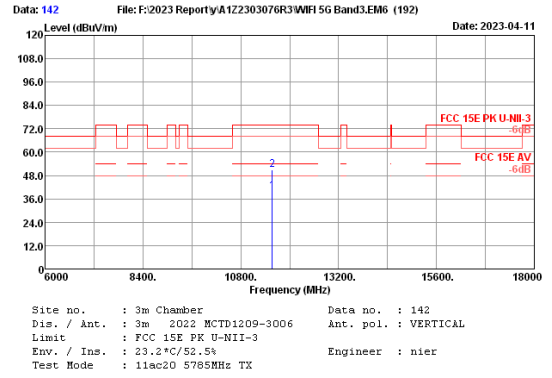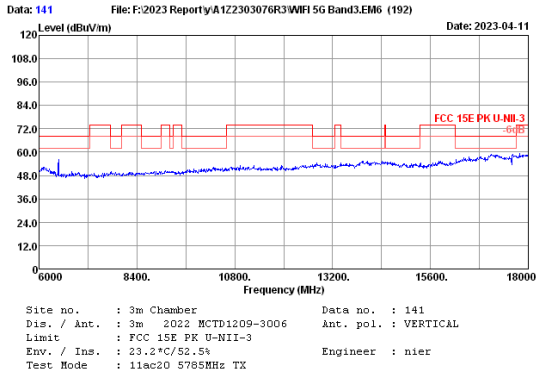



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11570.00	38.10	5.22	30.17	33.62	39.87	54.00	14.13	Average
2	11570.00	38.10	5.22	41.29	33.62	50.99	74.00	23.01	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

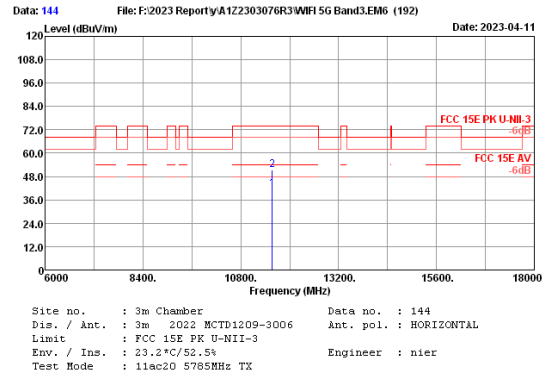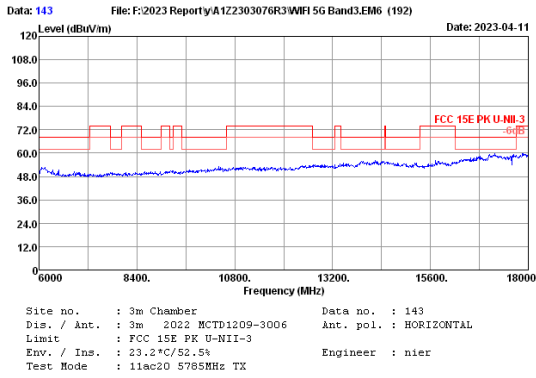



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11570.00	38.10	5.22	31.84	33.62	41.54	54.00	12.46	Average
2	11570.00	38.10	5.22	41.73	33.62	51.43	74.00	22.57	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

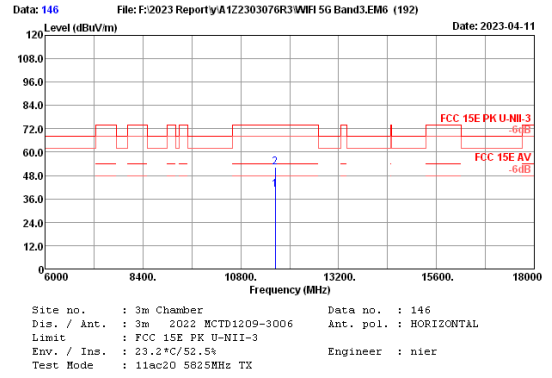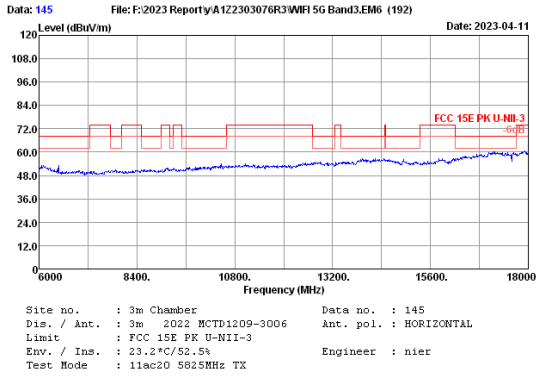



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11650.00	38.10	5.23	30.88	33.63	40.58	54.00	13.42	Average
2	11650.00	38.10	5.23	42.48	33.63	52.18	74.00	21.82	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

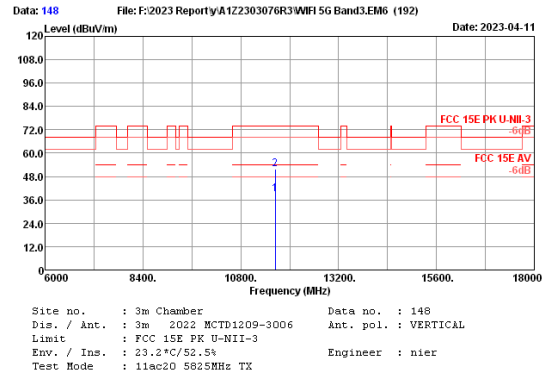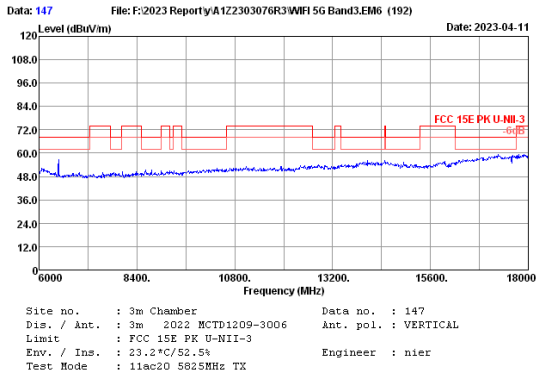



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11650.00	38.10	5.23	29.36	33.63	39.06	54.00	14.94	Average
2	11650.00	38.10	5.23	42.22	33.63	51.92	74.00	22.08	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

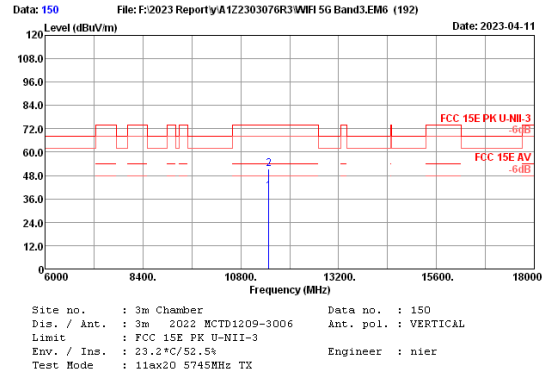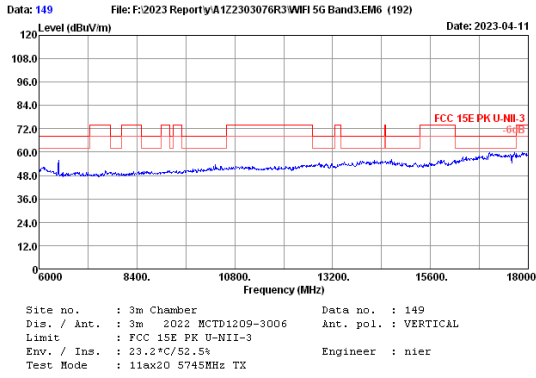



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11490.00	38.12	5.20	30.11	33.60	39.83	54.00	14.17	Average
2	11490.00	38.12	5.20	41.46	33.60	51.18	74.00	22.82	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

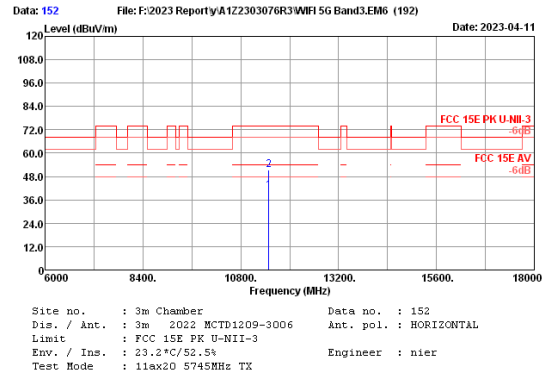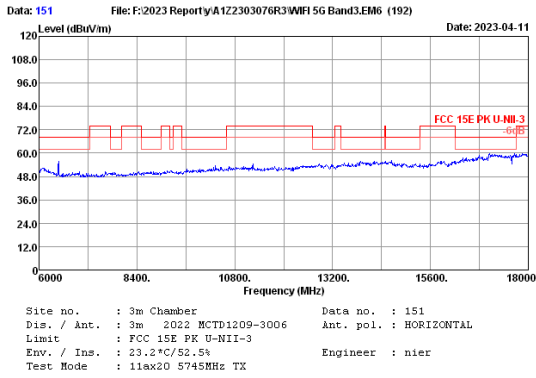



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11490.00	38.12	5.20	30.86	33.60	40.58	54.00	13.42	Average
2	11490.00	38.12	5.20	41.46	33.60	51.18	74.00	22.82	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

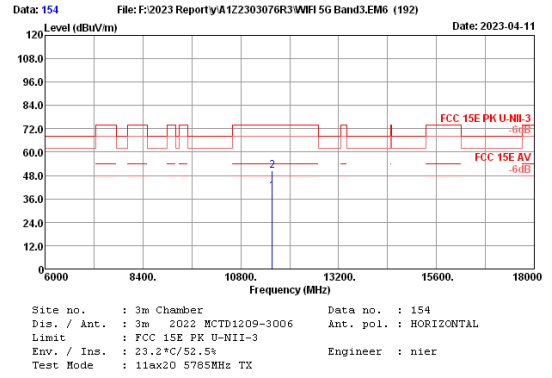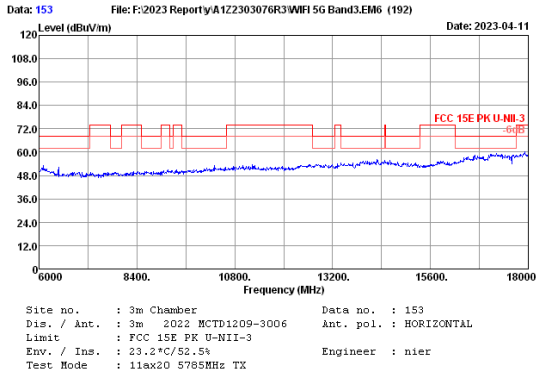



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11570.00	38.10	5.22	30.18	33.62	39.88	54.00	14.12	Average
2	11570.00	38.10	5.22	40.94	33.62	50.64	74.00	23.36	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

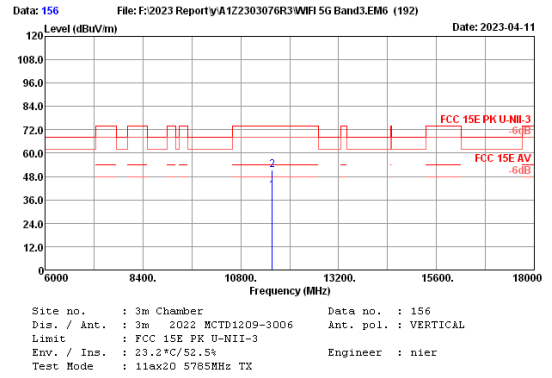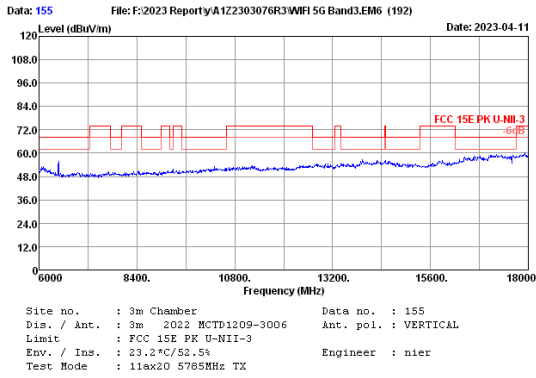



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11570.00	38.10	5.22	31.18	33.62	40.88	54.00	13.12	Average
2	11570.00	38.10	5.22	41.57	33.62	51.27	74.00	22.73	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

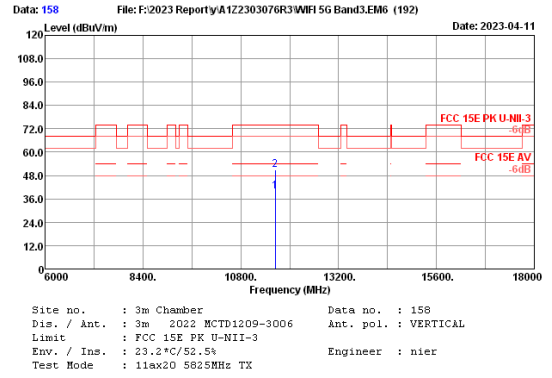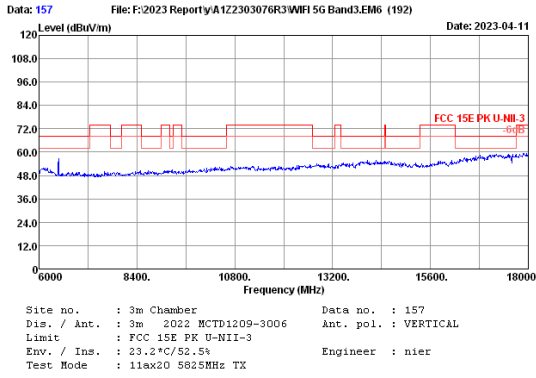

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11650.00	38.10	5.23	30.24	33.63	39.94	54.00	14.06	Average
2	11650.00	38.10	5.23	41.19	33.63	50.89	74.00	23.11	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

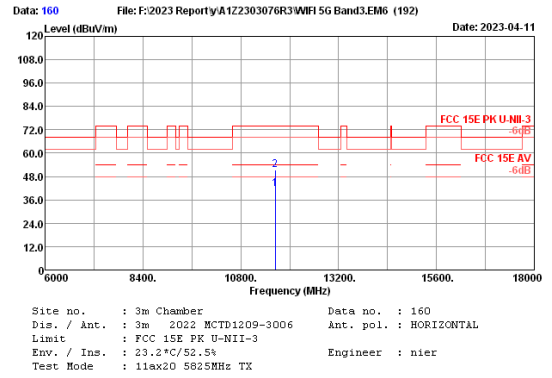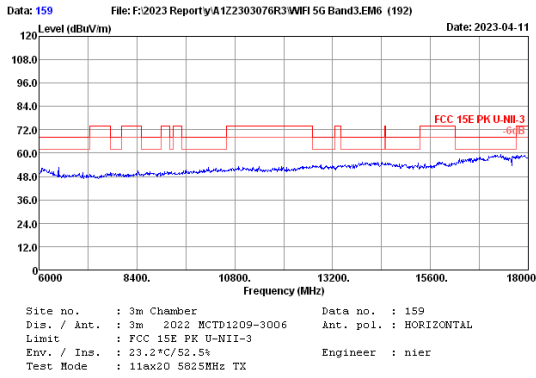

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11650.00	38.10	5.23	32.11	33.63	41.81	54.00	12.19	Average
2	11650.00	38.10	5.23	41.52	33.63	51.22	74.00	22.78	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.