



**中认信通**  
CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



## TEST REPORT

**Applicant:** Shenzhen Jiteng Network Technology Co.,Ltd

Address: No.1202,Bitian Pavilion, Bizhong Garden, No.10 Bibo First Street, Bibo Community Huangbei Street, Luohu District, Shenzhen City China

**FCC ID:** 2AY4C-GM07

**Product Name:** Mini PC

**Standard(s):** 47 CFR Part 15, Subpart E(15.407)  
ANSI C63.10-2013  
KDB 789033 D02 General U-NII Test Procedures New Rules v02r01

The above equipment has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

**Report Number:** CR230527778-00E

**Date Of Issue:** 2023/6/14

**Reviewed By:** Sun Zhong

*Sun Zhong*

Title: Manager

**Test Laboratory:** China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,  
Guangdong, China  
Tel: +86-769-82016888

## Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

## Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

## CONTENTS

<b>TEST FACILITY .....</b>	<b>2</b>
<b>DECLARATIONS.....</b>	<b>2</b>
<b>DOCUMENT REVISION HISTORY .....</b>	<b>5</b>
<b>1. GENERAL INFORMATION.....</b>	<b>6</b>
<b>1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....</b>	<b>6</b>
<b>1.2 DESCRIPTION OF TEST CONFIGURATION.....</b>	<b>8</b>
1.2.1 EUT Operation Condition:.....	8
1.2.2 Support Equipment List and Details .....	9
1.2.3 Support Cable List and Details .....	9
1.2.4 Block Diagram of Test Setup.....	10
<b>1.3 MEASUREMENT UNCERTAINTY .....</b>	<b>11</b>
<b>2. SUMMARY OF TEST RESULTS.....</b>	<b>12</b>
<b>3. REQUIREMENTS AND TEST PROCEDURES .....</b>	<b>13</b>
<b>3.1 AC LINE CONDUCTED EMISSIONS.....</b>	<b>13</b>
3.1.1 Applicable Standard.....	13
3.1.2 EUT Setup.....	14
3.1.3 EMI Test Receiver Setup .....	14
3.1.4 Test Procedure .....	15
3.1.5 Corrected Amplitude & Margin Calculation.....	15
<b>3.2 RADIATION SPURIOUS EMISSIONS.....</b>	<b>16</b>
3.2.1 Applicable Standard.....	16
3.2.2 EUT Setup.....	17
3.2.3 EMI Test Receiver & Spectrum Analyzer Setup .....	17
3.2.4 Test Procedure .....	18
3.2.5 Corrected Amplitude & Margin Calculation.....	18
<b>3.3 EMISSION BANDWIDTH: .....</b>	<b>19</b>
3.3.1 Applicable Standard.....	19
3.3.2 EUT Setup.....	19
3.3.3 Test Procedure .....	19
<b>3.4 MAXIMUM CONDUCTED OUTPUT POWER: .....</b>	<b>21</b>
3.4.1 Applicable Standard.....	21
3.4.2 EUT Setup.....	21
3.4.3 Test Procedure .....	21
<b>3.5 MAXIMUM POWER SPECTRAL DENSITY: .....</b>	<b>22</b>
3.5.1 Applicable Standard.....	22
3.5.2 EUT Setup.....	22
3.5.3 Test Procedure .....	23
<b>3.7 DUTY CYCLE:.....</b>	<b>24</b>
3.7.1 EUT Setup.....	24
3.7.2 Test Procedure .....	24
<b>3.8 ANTENNA REQUIREMENT.....</b>	<b>25</b>

3.8.1 Applicable Standard.....25  
3.8.2 Judgment.....25  
**4. Test DATA AND RESULTS..... 26**  
**4.1 AC LINE CONDUCTED EMISSIONS..... 26**  
**4.2 RADIATION SPURIOUS EMISSIONS..... 29**  
**4.3 EMISSION BANDWIDTH..... 42**  
**4.4 MAXIMUM CONDUCTED OUTPUT POWER..... 56**  
**4.5 MAXIMUM POWER SPECTRAL DENSITY..... 58**  
**4.6 DUTY CYCLE ..... 66**  
**5. MPE Based Exemption..... 68**  
**5.1 MPE-BASED EXEMPTION..... 68**  
5.1.1 Applicable Standard..... 68  
5.1.2 Measurement Result..... 68

## DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	CR230527778-00E	Original Report	2023/6/14

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment under Test (EUT)

#### 1.1.1 General:

<b>EUT Name:</b>	Mini PC
<b>EUT Model:</b>	GoLite 11
<b>Operation Frequency:</b>	5180-5240 MHz (802.11a/n ht20/ac vht20) 5190-5230 MHz(802.11n ht40/ac vht40) 5210MHz(802.11ac vht80) 5745-5825 MHz (802.11a/n ht20/ac vht20) 5755-5795 MHz(802.11n ht40/ac vht40) 5775MHz(802.11ac vht80)
<b>Maximum Average Output Power (Conducted):</b>	14.59dBm (5150-5250 MHz) 14.19dBm (5725-5850 MHz)
<b>Modulation Type:</b>	OFDM-BPSK, QPSK, 16QAM, 64QAM,256QAM
<b>Rated Input Voltage:</b>	12Vdc from adapter
<b>Serial Number:</b>	2606-6
<b>EUT Received Date:</b>	2023/5/23
<b>EUT Received Status:</b>	Good

#### 1.1.2 Operation Frequency Detail:

For 802.11a/n ht20/ac vht20:

5150-5250MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	149	5745
40	5200	153	5765
44	5220	157	5785
48	5240	161	5805
/	/	165	5825
Per section 15.31(m), the below frequencies were performed the test as below:			
36	5180	149	5745
40	5200	157	5785
48	5240	165	5825

For 802.11n ht40/ac vht40:

5150-5250MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	151	5755
46	5230	159	5795
Per section 15.31(m), the below frequencies were performed the test as below:			
38	5190	151	5755
46	5230	159	5795

**For 802.11ac vht80:**

5150-5250MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	155	5775
Per section 15.31(m), the below frequencies were performed the test as below:			
42	5210	155	5775

**1.1.3 Antenna Information Detail▲:**

Antenna Type	input impedance (Ohm)	Frequency Range	Antenna Gain
FPC	50	5.15~5.25GHz	2.95 dBi
		5.725~5.85GHz	2.75 dBi

The Method of §15.203 Compliance:

- Antenna must be permanently attached to the unit.
- Antenna must use a unique type of connector to attach to the EUT.
- Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

**1.1.4 Accessory Information:**

Accessory Description	Manufacturer	Model
Adapter	Shenzhen Xinspower Technology Co.,Ltd	A364-1203000U

## 1.2 Description of Test Configuration

### 1.2.1 EUT Operation Condition:

<b>EUT Operation Mode:</b>	The system was configured for testing in Engineering Mode, which was provided by the manufacturer.
<b>Equipment Modifications:</b>	No
<b>EUT Exercise Software:</b>	REALTEK 11ac 8821CEPCIE WLAN NIC Massproduction Kit.exe

The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer ▲:

#### 5150-5250 MHz Band:

Test Modes	Test Channels	Test Frequency (MHz)	Data rate	Power Level Setting
802.11a	Lowest	5180	6Mbps	52
	Middle	5200	6Mbps	52
	Highest	5240	6Mbps	52
802.11n ht20	Lowest	5180	MCS0	51
	Middle	5200	MCS0	51
	Highest	5240	MCS0	51
802.11n ht40	Lowest	5190	MCS0	50
	Highest	5230	MCS0	50
802.11ac vht80	Middle	5210	MCS0	50

#### 5725-5850 MHz Band:

Test Modes	Test Channels	Test Frequency (MHz)	Data rate	Power Level Setting
802.11a	Lowest	5745	6Mbps	48
	Middle	5785	6Mbps	48
	Highest	5825	6Mbps	46
802.11n ht20	Lowest	5745	MCS0	47
	Middle	5785	MCS0	46
	Highest	5825	MCS0	46
802.11n ht40	Lowest	5755	MCS0	46
	Highest	5795	MCS0	46
802.11ac vht80	Middle	5775	MCS0	45

Note:

The system support 802.11a/n ht20/n ht40/ac vht20/vht40/vht80, the vht20/vht40 were reduced since the identical parameters with 802.11n ht20 and ht40.

The above are the worst-case data rates, which are determined for each mode based upon investigations by measuring the average power and PSD across all data rates, bandwidths, and modulations.



**1.2.2 Support Equipment List and Details**


Manufacturer	Description	Model	Serial Number
PHILIPS	Monitor	24PFF5595/T3	XM2A2124000343
AOC	Monitor	24M2	OHWL5YA000130 H7
SanDisk	TF Card	32 GB	521005904013
HP	USB Disk	HPFD206W-32	PAA6918477
HP	USB Disk	HPFD206W-32	PAA6902271
ZIONCOM	Wireless Router	MB-R210-00	EMZBWR21103001
IPRO	Earphone	Phonenix 5.0s	EP221126001
PHILIPS	Mouse	SPK7214	M214BQ210411115
PHILIPS	Keyboard	SPK6234	K234210510743

**1.2.3 Support Cable List and Details**


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
RJ45 Cable	No	No	3	EUT	Router
HDMI Cable	No	No	1	EUT	Monitor
HDMI Cable	No	No	1	EUT	Monitor
Earphone Cable	No	No	0.8	EUT	Earphone
Mouse Cable	No	No	0.8	EUT	Mouse
Keyboard Cable	No	No	0.8	EUT	Keyboard

### 1.2.4 Block Diagram of Test Setup

AC line conducted emissions:

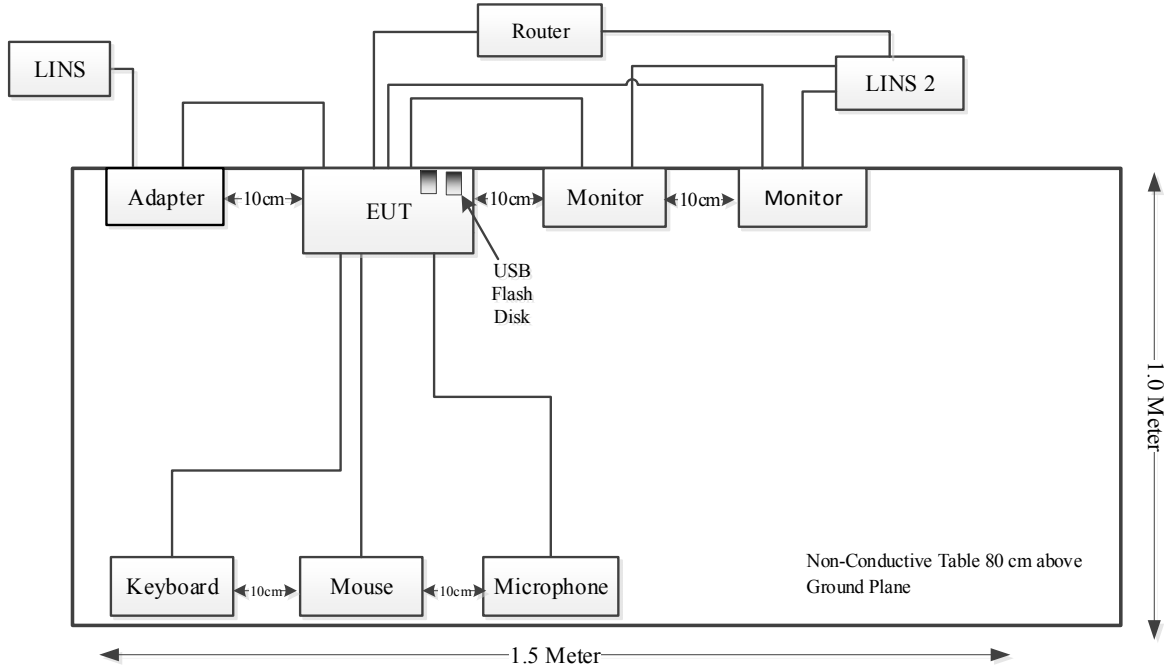

Spurious Emissions:

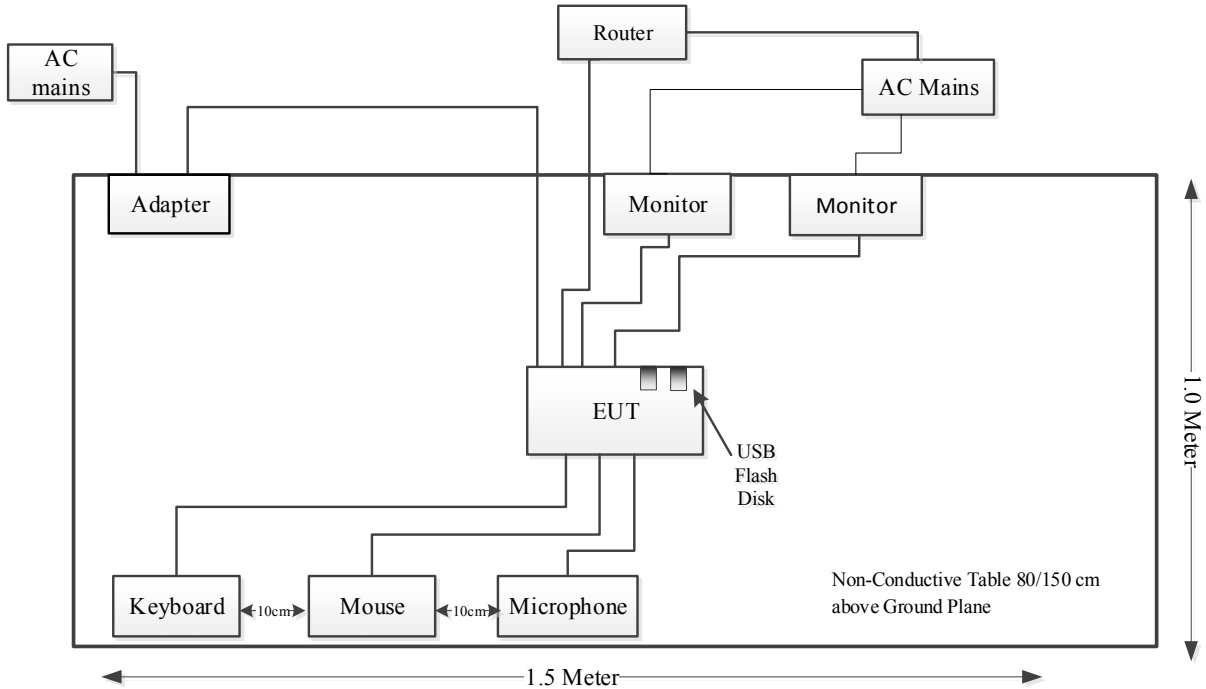

### 1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB, 200M~1GHz: 5.61 dB, 1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Unwanted Emissions, conducted	±1.26 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)

## 2. SUMMARY OF TEST RESULTS

Standard(s) Section	Test Items	Result
§15.207(a)	AC line conducted emissions	Compliant
FCC§15.205& §15.209 &§15.407(b)	Radiated Spurious Emissions	Compliant
FCC§15.407(a) (e)	Emission Bandwidth	Compliant
FCC§15.407(a)	Maximum Conducted Output Power	Compliant
FCC§15.407 (a)	Power Spectral Density	Compliant
§15.203	Antenna Requirement	Compliant
§1.1307 & §2.1091	MPE Based Exemption	Compliant

### 3. REQUIREMENTS AND TEST PROCEDURES

#### 3.1 AC Line Conducted Emissions

##### 3.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:


(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000  $\mu$ V within the frequency band 535-1705 kHz, as measured using a 50  $\mu$ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

### 3.1.2 EUT Setup

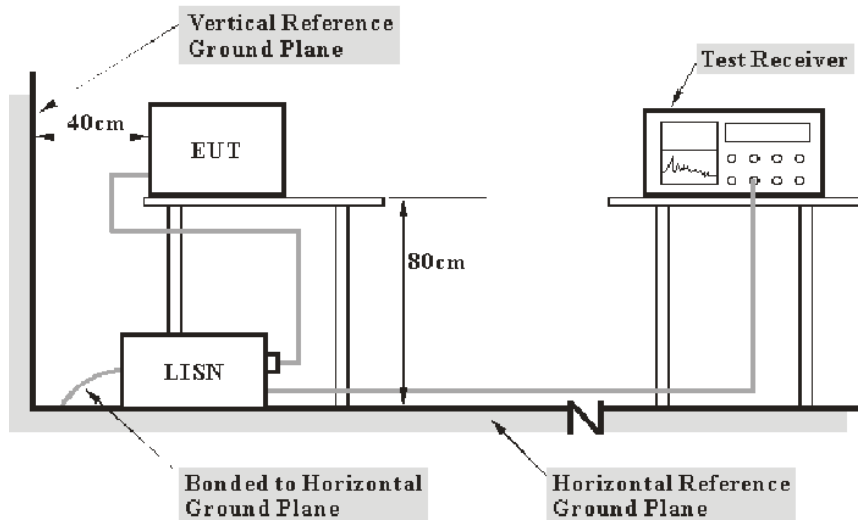

- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

### 3.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### 3.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

### 3.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

## 3.2 Radiation Spurious Emissions

### 3.2.1 Applicable Standard

FCC §15.407 (b);

*Undesirable emission limits.* Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.

(4) For transmitters operating solely in the 5.725-5.850 GHz band:

(i) All emissions shall be limited to a level of - 27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

(8) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(9) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in § 15.207.

(10) The provisions of § 15.205 apply to intentional radiators operating under this section.


(11) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

(c) The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.




### 3.2.2 EUT Setup

#### Below 1GHz:

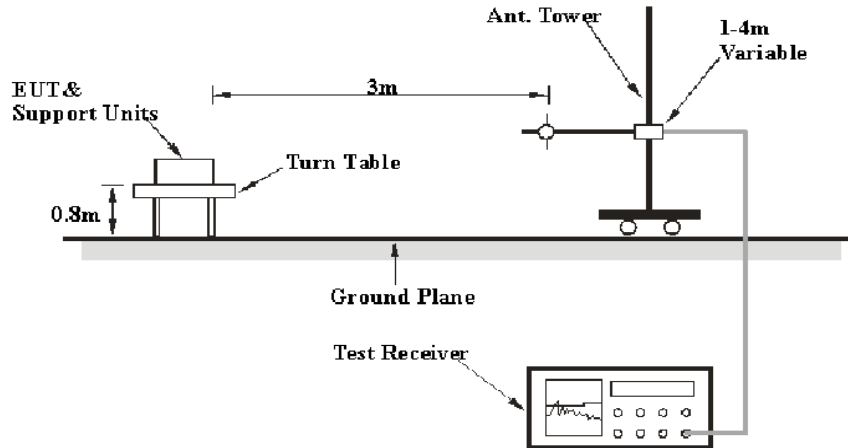

#### 1-40 GHz:

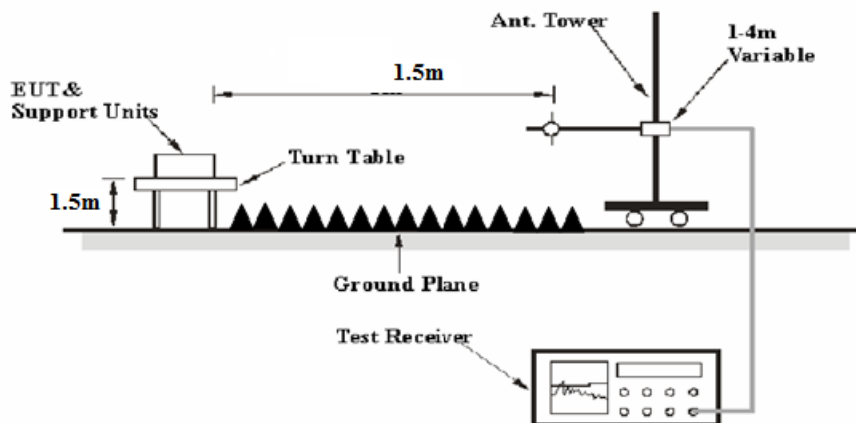

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was FCC 15.209, FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

### 3.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30MHz-1000MHz:

Measurement	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 40GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98%	1MHz	10 Hz
	<98%	1MHz	1/T

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

### 3.2.4 Test Procedure

During the radiated emission test, the adapter was connected to the first AC floor outlet.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as:  $E [dB\mu V/m] = EIRP[dBm] + 95.2$ , for  $d = 3$  meters.

According to C63.10, the above 1G test result shall be extrapolated to the specified distance using an extrapolation Factor of 20dB/decade from 3m to 1.5m

Distance extrapolation Factor =  $20 \log (\text{specific distance } [3m] / \text{test distance } [1.5m])$  dB = 6.02 dB

All emissions under the average limit and under the noise floor have not recorded in the report.

### 3.2.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Factor = Antenna Factor + Cable Loss - Amplifier Gain

For 30MHz-1GHz:

Result = Reading + Factor

For 1GHz-40GHz

Result = Reading + Factor - Distance extrapolation Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

### 3.3 Emission Bandwidth:

#### 3.3.1 Applicable Standard


FCC §15.407 (a),(h)

(h)(2) Radar Detection Function of Dynamic Frequency Selection (DFS). U-NII devices operating with any part of its 26 dB emission bandwidth in the 5.25-5.35 GHz and 5.47-5.725 GHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems.

FCC §15.407 (e)

Within the 5.725-5.850 GHz and 5.850-5.895 GHz bands, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

#### 3.3.2 EUT Setup

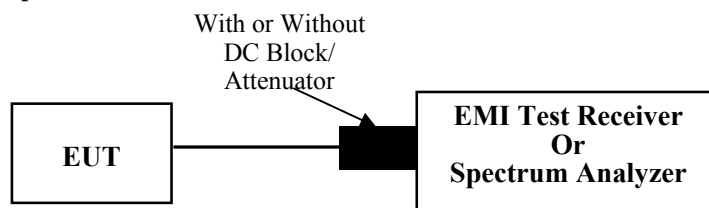

#### 3.3.3 Test Procedure

##### 26dB Emission Bandwidth:

According to ANSI C63.10-2013 Section 12.4.1

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = peak.
- d) Trace mode = max hold
- e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

##### 6 dB emission bandwidth:

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described in this section. For devices that use channel aggregation refer to III.A and III.C for determining emission bandwidth.

**99% Occupied Bandwidth:**

According to ANSI C63.10-2013 Section 12.4.2&6.9.3

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than  $[10 \log (OBW/RBW)]$  below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

### 3.4 Maximum Conducted Output Power:

#### 3.4.1 Applicable Standard

##### FCC §15.407(a) (1)(iv)

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


##### FCC §15.407(a) (2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

##### FCC §15.407(a) (3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

#### 3.4.2 EUT Setup

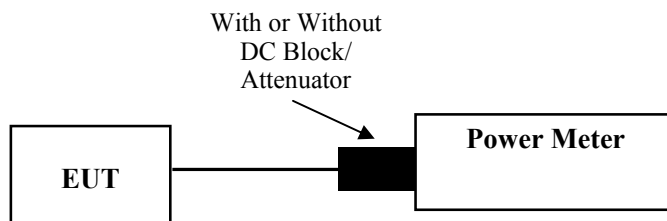

#### 3.4.3 Test Procedure

According to ANSI C63.10-2013 Section 12.3.3.2

Method PM-G is measurement using a gated RF average power meter. Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

### 3.5 Maximum Power Spectral Density:

#### 3.5.1 Applicable Standard

##### FCC §15.407(a) (1)(iv)

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


##### FCC §15.407(a) (2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

##### FCC §15.407(a) (3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

#### 3.5.2 EUT Setup

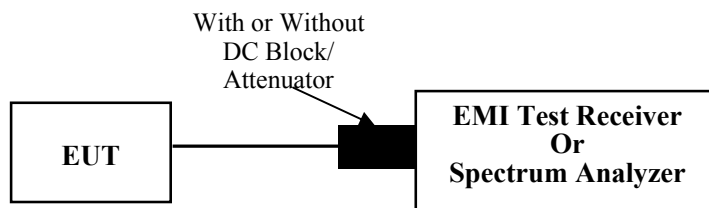

### 3.5.3 Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

**Duty cycle  $\geq 98\%$**

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-1 should be applied.

**Duty cycle  $< 98\%$ , duty cycle variations are less than  $\pm 2\%$**


KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-2 should be applied.

**Duty cycle  $< 98\%$ , duty cycle variations exceed  $\pm 2\%$**

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-3 should be applied.

### 3.7 Duty Cycle:

#### 3.7.1 EUT Setup

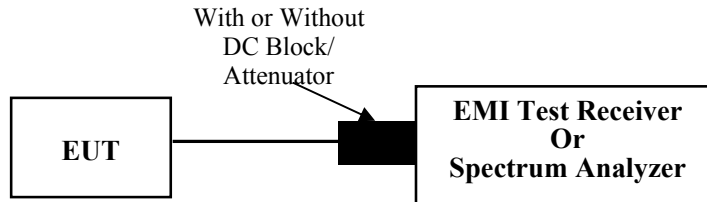

#### 3.7.2 Test Procedure

According to ANSI C63.10-2013 Section 12.2

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set  $RBW \geq OBW$  if possible; otherwise, set RBW to the largest available value.
- 3) Set  $VBW \geq RBW$ . Set detector = peak or average.
- 4) The zero-span measurement method shall not be used unless both RBW and VBW are  $> 50/T$  and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if  $T \leq 16.7 \mu s$ .)



## **3.8 Antenna Requirement**

### **3.8.1 Applicable Standard**

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

### **3.8.2 Judgment**

**Result: Compliant.** Please refer to the Antenna Information detail in Section 1.

## 4. Test DATA AND RESULTS

### 4.1 AC Line Conducted Emissions

Serial Number:	2606-6	Test Date:	2023/6/2
Test Site:	CE	Test Mode:	Transmitting (802.11a 5240MHz was worst case)
Tester:	David Huang	Test Result:	Pass

Environmental Conditions:					
Temperature: (°C)	24.8	Relative Humidity: (%)	61	ATM Pressure: (kPa)	100.5


### Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101134	2023/03/31	2024/03/30
R&S	EMI Test Receiver	ESR3	102726	2022/07/15	2023/07/14
MICRO-COAX	Coaxial Cable	UTIFLEX	C-0200-01	2022/08/07	2023/08/06
Audix	Test Software	E3	190306 (V9)	N/A	N/A

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Mode: Transmitting  
 Port: Line  
 Note:


Date: 2023-06-02

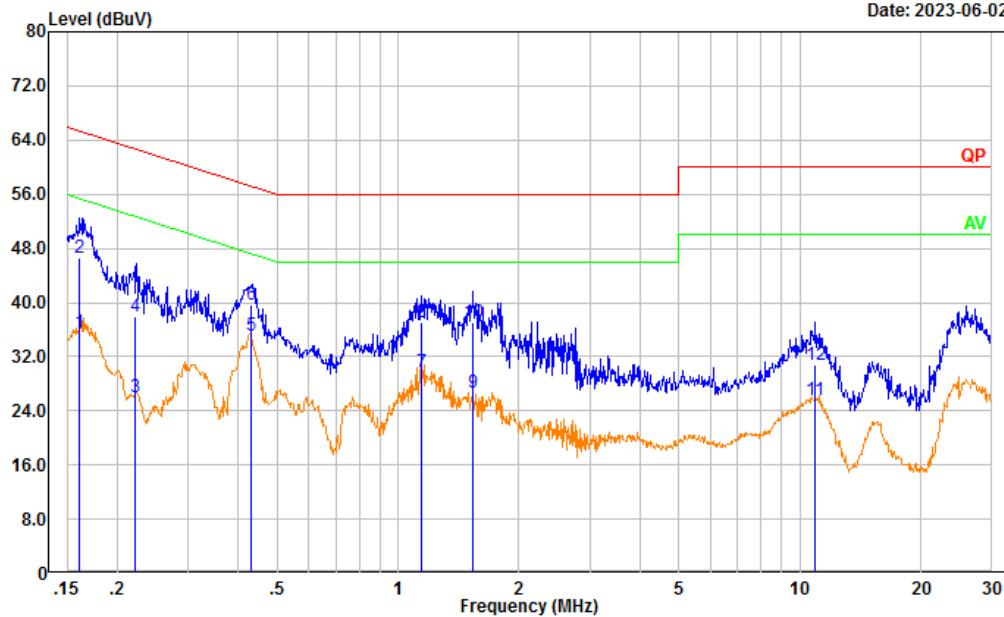

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.161	26.01	9.61	35.62	55.43	19.81	Average
2	0.161	36.98	9.61	46.59	65.43	18.84	QP
3	0.222	16.51	9.61	26.12	52.73	26.61	Average
4	0.222	28.28	9.61	37.89	62.73	24.84	QP
5	0.430	25.43	9.61	35.04	47.26	12.22	Average
6	0.430	30.13	9.61	39.74	57.26	17.52	QP
7	1.144	20.07	9.62	29.69	46.00	16.31	Average
8	1.144	27.49	9.62	37.11	56.00	18.89	QP
9	1.539	16.97	9.63	26.60	46.00	19.40	Average
10	1.539	27.41	9.63	37.04	56.00	18.96	QP
11	10.871	15.81	9.67	25.48	50.00	24.52	Average
12	10.871	21.18	9.67	30.85	60.00	29.15	QP

Test Mode: Transmitting  
 Port: neutral  
 Note:

Date: 2023-06-02

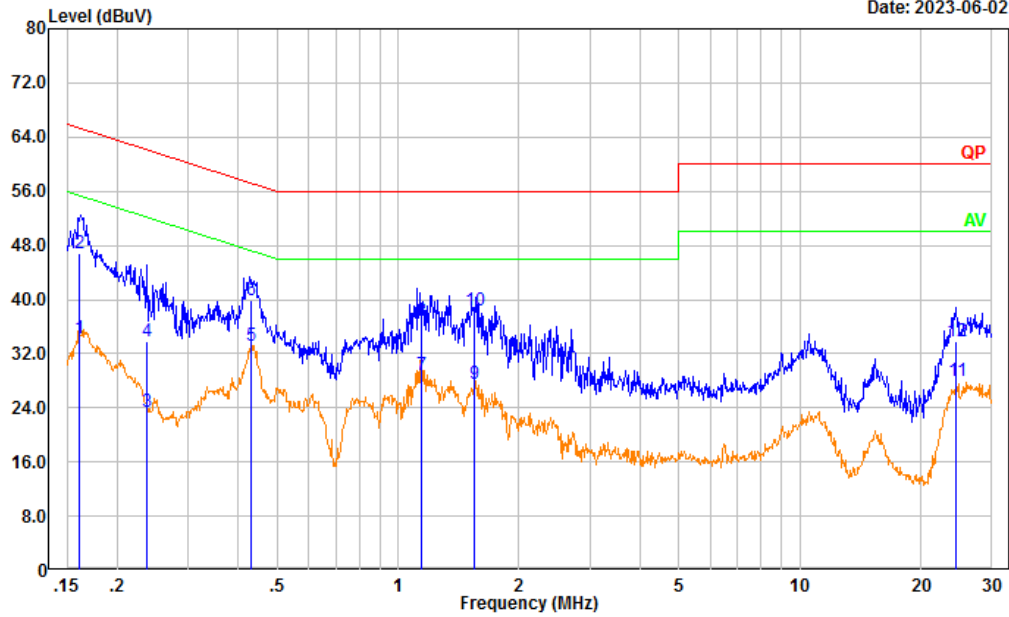

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.162	24.75	9.61	34.36	55.38	21.02	Average
2	0.162	37.18	9.61	46.79	65.38	18.59	QP
3	0.238	13.78	9.61	23.39	52.18	28.79	Average
4	0.238	24.14	9.61	33.75	62.18	28.43	QP
5	0.432	23.48	9.61	33.09	47.21	14.12	Average
6	0.432	30.23	9.61	39.84	57.21	17.37	QP
7	1.146	19.25	9.62	28.87	46.00	17.13	Average
8	1.146	27.21	9.62	36.83	56.00	19.17	QP
9	1.554	17.94	9.63	27.57	46.00	18.43	Average
10	1.554	28.74	9.63	38.37	56.00	17.63	QP
11	24.497	18.12	9.75	27.87	50.00	22.13	Average
12	24.497	24.13	9.75	33.88	60.00	26.12	QP

## 4.2 Radiation Spurious Emissions

Serial Number:	2606-6	Test Date:	2023/5/31
Test Site:	966-1,966-2	Test Mode:	Transmitting
Tester:	coco Tian, Vic Du	Test Result:	Pass

### Environmental Conditions:

Temperature: (°C)	21.1~26.1	Relative Humidity: (%)	61	ATM Pressure: (kPa)	99.6
----------------------	-----------	------------------------------	----	------------------------	------

### Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-5	2020/10/19	2023/10/18
R&S	EMI Test Receiver	ESR3	102724	2022/07/15	2023/07/14
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2022/07/17	2023/07/16
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2022/07/17	2023/07/16
Sonoma	Amplifier	310N	186165	2022/07/17	2023/07/16
Audix	Test Software	E3	201021 (V9)	N/A	N/A
ETS-Lindgren	Horn Antenna	3115	9912-5985	2020/10/13	2023/10/12
R&S	Spectrum Analyzer	FSV40	101591	2022/07/15	2023/07/14
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2022/08/07	2023/08/06
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2022/08/07	2023/08/06
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2022/11/09	2023/11/08
PASTERNAK	Horn Antenna	PE9852/2F-20	112002	2021/02/05	2024/02/04
Quinstar	Preamplifier	QLW-18405536-JO	15964001005	2022/09/16	2023/09/15
MICRO-COAX	Coaxial Cable	UFB142A-1-2362-200200	235772-001	2022/08/07	2023/08/06
E-Microwave	Band Rejection Filter	5150-5850MHz	OE01902423	2022/08/07	2023/08/06
Mini Circuits	High Pass Filter	VHF-6010+	31119	2022/08/07	2023/08/06
PASTERNAK	Horn Antenna	PE9850/2F-20	072001	2021/02/05	2024/02/04

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


### Test Data:

Please refer to the below table and plots.

1) 30MHz-1GHz (802.11a low channel was the worst)

Test Mode: Transmitting  
 Polarization: horizontal  
 Note:


Date: 2023-05-31

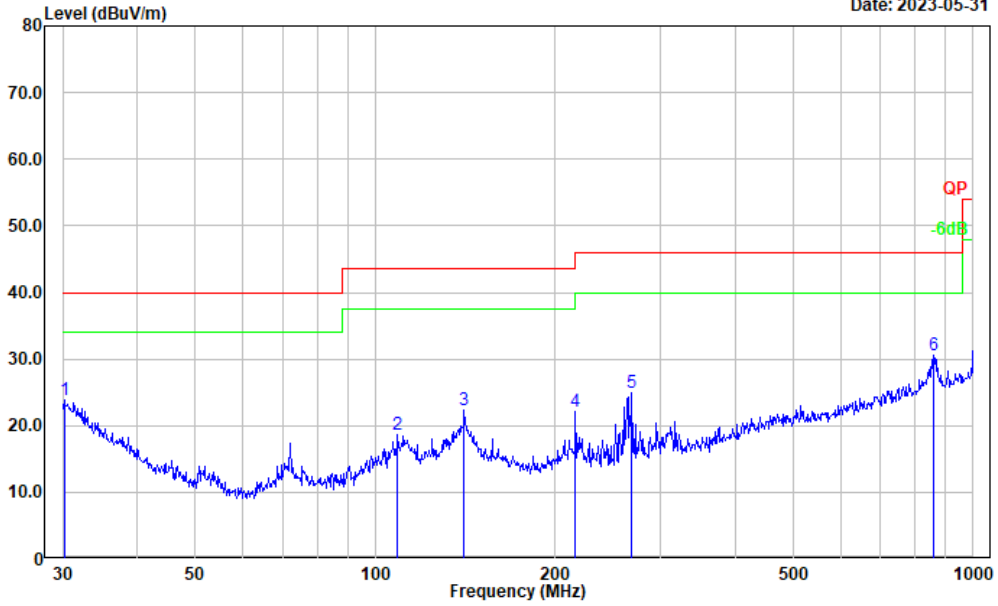

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.211	27.54	-3.76	23.78	40.00	16.22	Peak
2	109.029	31.11	-12.45	18.66	43.50	24.84	Peak
3	140.835	34.25	-11.93	22.32	43.50	21.18	Peak
4	216.024	34.81	-12.65	22.16	46.00	23.84	Peak
5	268.485	37.09	-12.15	24.94	46.00	21.06	Peak
6	857.025	31.90	-1.33	30.57	46.00	15.43	Peak

Test Mode: Transmitting  
 Polarization: vertical  
 Note:

Date: 2023-05-31

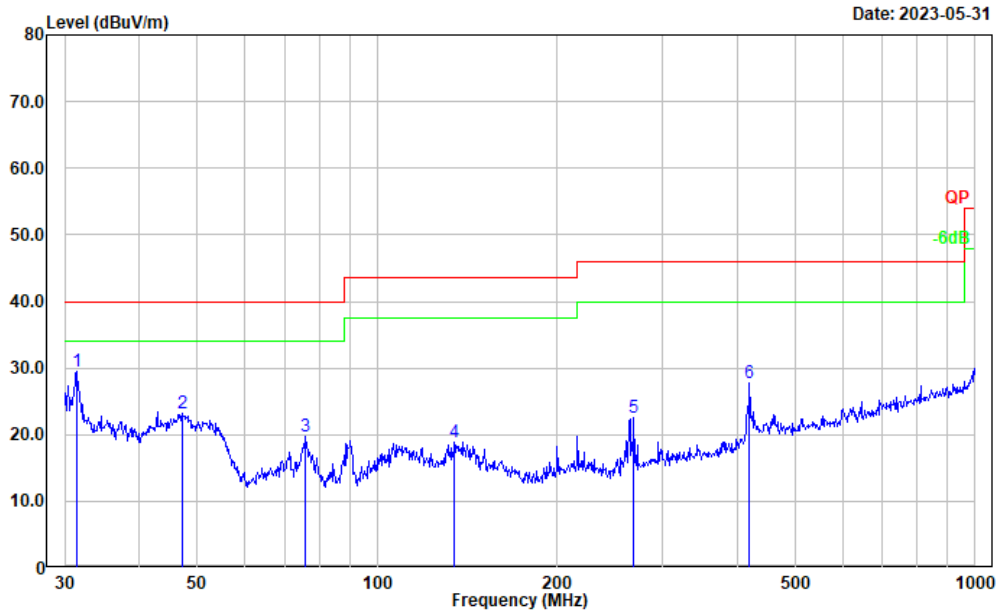

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	31.510	34.29	-4.75	29.54	40.00	10.46	Peak
2	47.160	38.61	-15.52	23.09	40.00	16.91	Peak
3	75.977	36.79	-17.02	19.77	40.00	20.23	Peak
4	134.559	30.42	-11.57	18.85	43.50	24.65	Peak
5	268.485	34.61	-12.15	22.46	46.00	23.54	Peak
6	419.108	35.66	-7.96	27.70	46.00	18.30	Peak

**2) 1GHz-40GHz:****5150-5250MHz****802.11a:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Low Channel: 5180MHz							
5180.000	70.35	PK	H	38.68	103.01	N/A	N/A
5180.000	66.21	AV	H	38.68	98.87	N/A	N/A
5180.000	67.20	PK	V	38.68	99.86	N/A	N/A
5180.000	53.36	AV	V	38.68	86.02	N/A	N/A
5150.000	32.83	PK	H	38.64	65.45	74.00	8.55
5150.000	18.08	AV	H	38.64	50.70	54.00	3.30
10360.000	32.45	PK	H	19.18	45.61	68.20	22.59
15540.000	36.23	PK	H	22.44	52.65	74.00	21.35
15540.000	23.42	AV	H	22.44	39.84	54.00	14.16
Middle Channel: 5200 MHz							
5200.000	71.05	PK	H	38.70	103.73	N/A	N/A
5200.000	57.12	AV	H	38.70	89.80	N/A	N/A
5200.000	68.08	PK	V	38.70	100.76	N/A	N/A
5200.000	54.16	AV	V	38.70	86.84	N/A	N/A
10400.000	32.63	PK	H	19.16	45.77	68.20	22.43
15600.000	36.49	PK	H	22.41	52.88	74.00	21.12
15600.000	23.57	AV	H	22.41	39.96	54.00	14.04
High Channel: 5240 MHz							
5240.000	71.63	PK	H	38.85	104.46	N/A	N/A
5240.000	57.73	AV	H	38.85	90.56	N/A	N/A
5240.000	68.49	PK	V	38.85	101.32	N/A	N/A
5240.000	54.35	AV	V	38.85	87.18	N/A	N/A
5350.000	28.35	PK	H	39.03	61.36	74.00	12.64
5350.000	15.64	AV	H	39.03	48.65	54.00	5.35
10480.000	32.74	PK	H	18.86	45.58	68.20	22.62
15720.000	36.79	PK	H	22.28	53.05	74.00	20.95
15720.000	23.86	AV	H	22.28	40.12	54.00	13.88



**802.11n ht20:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Low Channel: 5180MHz							
5180.000	67.75	PK	H	38.68	100.41	N/A	N/A
5180.000	54.34	AV	H	38.68	87.00	N/A	N/A
5180.000	64.65	PK	V	38.68	97.31	N/A	N/A
5180.000	51.37	AV	V	38.68	84.03	N/A	N/A
5150.000	32.45	PK	H	38.64	65.07	74.00	8.93
5150.000	17.64	AV	H	38.64	50.26	54.00	3.74
10360.000	32.58	PK	H	19.18	45.74	68.20	22.46
15540.000	35.38	PK	H	22.44	51.80	74.00	22.20
15540.000	22.47	AV	H	22.44	38.89	54.00	15.11
Middle Channel: 5200 MHz							
5200.000	68.57	PK	H	38.70	101.25	N/A	N/A
5200.000	55.64	AV	H	38.70	88.32	N/A	N/A
5200.000	65.37	PK	V	38.70	98.05	N/A	N/A
5200.000	42.72	AV	V	38.70	75.40	N/A	N/A
10400.000	32.64	PK	H	19.16	45.78	68.20	22.42
15600.000	35.67	PK	H	22.41	52.06	74.00	21.94
15600.000	22.49	AV	H	22.41	38.88	54.00	15.12
High Channel: 5240 MHz							
5240.000	69.84	PK	H	38.85	102.67	N/A	N/A
5240.000	55.47	AV	H	38.85	88.30	N/A	N/A
5240.000	66.76	PK	V	38.85	99.59	N/A	N/A
5240.000	42.93	AV	V	38.85	75.76	N/A	N/A
5350.000	28.67	PK	H	39.03	61.68	74.00	12.32
5350.000	15.35	AV	H	39.03	48.36	54.00	5.64
10480.000	32.46	PK	H	18.86	45.30	68.20	22.90
15720.000	35.27	PK	H	22.28	51.53	74.00	22.47
15720.000	22.34	AV	H	22.28	38.60	54.00	15.40

**802.11n ht40:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Low Channel: 5190 MHz							
5190.000	66.71	PK	H	38.69	99.38	N/A	N/A
5190.000	52.64	AV	H	38.69	85.31	N/A	N/A
5190.000	64.35	PK	V	38.69	97.02	N/A	N/A
5190.000	50.31	AV	V	38.69	82.98	N/A	N/A
5150.000	37.76	PK	H	38.64	70.38	74.00	3.62
5150.000	20.49	AV	H	38.64	53.11	54.00	0.89
10380.000	32.53	PK	H	19.17	45.68	68.20	22.52
15570.000	35.37	PK	H	22.43	51.78	74.00	22.22
15570.000	22.56	AV	H	22.43	38.97	54.00	15.03
High Channel: 5230 MHz							
5230.000	67.69	PK	H	38.81	100.48	N/A	N/A
5230.000	53.45	AV	H	38.81	86.24	N/A	N/A
5230.000	65.47	PK	V	38.81	98.26	N/A	N/A
5230.000	51.64	AV	V	38.81	84.43	N/A	N/A
5350.000	28.64	PK	H	39.03	61.65	74.00	12.35
5350.000	15.13	AV	H	39.03	48.14	54.00	5.86
10460.000	32.41	PK	H	18.94	45.33	68.20	22.87
15690.000	35.72	PK	H	22.29	51.99	74.00	22.01
15690.000	22.59	AV	H	22.29	38.86	54.00	15.14

**802.11ac vht80:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
5210.000	62.74	PK	H	38.74	95.46	N/A	N/A
5210.000	49.57	AV	H	38.74	82.29	N/A	N/A
5210.000	60.15	PK	V	38.74	92.87	N/A	N/A
5210.000	47.53	AV	V	38.74	80.25	N/A	N/A
5150.000	33.91	PK	H	38.64	66.53	74.00	7.47
5150.000	18.16	AV	H	38.64	50.78	54.00	3.22
5350.000	27.47	PK	H	39.03	60.48	74.00	13.52
5350.000	16.44	AV	H	39.03	49.45	54.00	4.55
10420.000	32.47	PK	H	19.09	45.54	68.20	22.66
15630.000	35.94	PK	H	22.37	52.29	74.00	21.71
15630.000	23.02	AV	H	22.37	39.37	54.00	14.63

**5725-5850MHz:****802.11a:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Low Channel:				5745	MHz		
5745.000	67.36	PK	H	39.46	100.80	N/A	N/A
5745.000	53.58	AV	H	39.46	87.02	N/A	N/A
5745.000	63.07	PK	V	39.46	96.51	N/A	N/A
5745.000	49.35	AV	V	39.46	82.79	N/A	N/A
5725.000	30.15	PK	H	39.48	63.61	122.20	58.59
5720.000	29.25	PK	H	39.49	62.72	110.80	48.08
5700.000	30.07	PK	H	39.51	63.56	105.20	41.64
5650.000	30.01	PK	H	39.49	63.48	68.20	4.72
11490.000	33.76	PK	H	20.67	48.41	74.00	25.59
11490.000	20.54	AV	H	20.67	35.19	54.00	18.81
17235.000	32.15	PK	H	26.76	52.89	68.20	15.31
Middle Channel:				5785	MHz		
5785.000	67.49	PK	H	39.44	100.91	N/A	N/A
5785.000	53.66	AV	H	39.44	87.08	N/A	N/A
5785.000	63.34	PK	V	39.44	96.76	N/A	N/A
5785.000	50.20	AV	V	39.44	83.62	N/A	N/A
11570.000	33.15	PK	H	20.83	47.96	74.00	26.04
11570.000	20.12	AV	H	20.83	34.93	54.00	19.07
17355.000	32.42	PK	H	27.74	54.14	68.20	14.06
High Channel:				5825	MHz		
5825.000	66.32	PK	H	39.46	99.76	N/A	N/A
5825.000	52.29	AV	H	39.46	85.73	N/A	N/A
5825.000	62.43	PK	V	39.46	95.87	N/A	N/A
5825.000	49.38	AV	V	39.46	82.82	N/A	N/A
5850.000	30.12	PK	H	39.49	63.59	122.20	58.61
5855.000	29.98	PK	H	39.51	63.47	110.80	47.33
5875.000	30.08	PK	H	39.60	63.66	105.20	41.54
5925.000	29.76	PK	H	39.68	63.42	68.20	4.78
11650.000	33.64	PK	H	21.07	48.69	74.00	25.31
11650.000	20.57	AV	H	21.07	35.62	54.00	18.38
17475.000	32.31	PK	H	28.61	54.90	68.20	13.30

**802.11n ht20:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Low Channel:				5745	MHz		
5745.000	67.48	PK	H	39.46	100.92	N/A	N/A
5745.000	53.99	AV	H	39.46	87.43	N/A	N/A
5745.000	64.30	PK	V	39.46	97.74	N/A	N/A
5745.000	51.02	AV	V	39.46	84.46	N/A	N/A
5725.000	30.15	PK	H	39.48	63.61	122.20	58.59
5720.000	30.08	PK	H	39.49	63.55	110.80	47.25
5700.000	30.15	PK	H	39.51	63.64	105.20	41.56
5650.000	29.98	PK	H	39.49	63.45	68.20	4.75
11490.000	33.45	PK	H	20.67	48.10	74.00	25.90
11490.000	20.62	AV	H	20.67	35.27	54.00	18.73
17235.000	32.15	PK	H	26.76	52.89	68.20	15.31
Middle Channel:				5785	MHz		
5785.000	68.14	PK	H	39.44	101.56	N/A	N/A
5785.000	55.25	AV	H	39.44	88.67	N/A	N/A
5785.000	64.94	PK	V	39.44	98.36	N/A	N/A
5785.000	42.26	AV	V	39.44	75.68	N/A	N/A
11570.000	33.43	PK	H	20.83	48.24	74.00	25.76
11570.000	20.39	AV	H	20.83	35.20	54.00	18.80
17355.000	32.58	PK	H	27.74	54.30	68.20	13.90
High Channel:				5825	MHz		
5825.000	69.31	PK	H	39.46	102.75	N/A	N/A
5825.000	54.72	AV	H	39.46	88.16	N/A	N/A
5825.000	66.43	PK	V	39.46	99.87	N/A	N/A
5825.000	42.20	AV	V	39.46	75.64	N/A	N/A
5850.000	32.05	PK	H	39.49	65.52	122.20	56.68
5855.000	30.64	PK	H	39.51	64.13	110.80	46.67
5875.000	31.86	PK	H	39.60	65.44	105.20	39.76
5925.000	31.02	PK	H	39.68	64.68	68.20	3.52
11650.000	33.44	PK	H	21.07	48.49	74.00	25.51
11650.000	20.53	AV	H	21.07	35.58	54.00	18.42
17475.000	32.65	PK	H	28.61	55.24	68.20	12.96

**802.11n ht40:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Low Channel:				5755	MHz		
5755.000	66.44	PK	H	39.45	99.87	N/A	N/A
5755.000	52.47	AV	H	39.45	85.90	N/A	N/A
5755.000	64.18	PK	V	39.45	97.61	N/A	N/A
5755.000	50.54	AV	V	39.45	83.97	N/A	N/A
5725.000	30.12	PK	H	39.48	63.58	122.20	58.62
5720.000	30.15	PK	H	39.49	63.62	110.80	47.18
5700.000	29.89	PK	H	39.51	63.38	105.20	41.82
5650.000	30.56	PK	H	39.49	64.03	68.20	4.17
11510.000	33.46	PK	H	20.67	48.11	74.00	25.89
11510.000	20.35	AV	H	20.67	35.00	54.00	19.00
17265.000	32.76	PK	H	26.94	53.68	68.20	14.52
High Channel:				5795	MHz		
5795.000	67.51	PK	H	39.43	100.92	N/A	N/A
5795.000	53.47	AV	H	39.43	86.88	N/A	N/A
5795.000	65.60	PK	V	39.43	99.01	N/A	N/A
5795.000	51.56	AV	V	39.43	84.97	N/A	N/A
5850.000	29.64	PK	H	39.49	63.11	122.20	59.09
5855.000	31.08	PK	H	39.51	64.57	110.80	46.23
5875.000	30.47	PK	H	39.60	64.05	105.20	41.15
5925.000	30.25	PK	H	39.68	63.91	68.20	4.29
11590.000	33.72	PK	H	20.88	48.58	74.00	25.42
11590.000	20.84	AV	H	20.88	35.70	54.00	18.30
17385.000	32.34	PK	H	28.07	54.39	68.20	13.81

**802.11ac80 Mode:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Middle Channel:				5775	MHz		
5775.000	62.39	PK	H	39.44	95.81	N/A	N/A
5775.000	49.22	AV	H	39.44	82.64	N/A	N/A
5775.000	59.80	PK	V	39.44	93.22	N/A	N/A
5775.000	47.18	AV	V	39.44	80.60	N/A	N/A
5725.000	29.87	PK	H	39.48	63.33	122.20	58.87
5720.000	29.57	PK	H	39.49	63.04	110.80	47.76
5700.000	30.17	PK	H	39.51	63.66	105.20	41.54
5650.000	29.20	PK	H	39.49	62.67	68.20	5.53
5850.000	31.68	PK	H	39.49	65.15	122.20	57.05
5855.000	31.81	PK	H	39.51	65.30	110.80	45.50
5875.000	31.55	PK	H	39.60	65.13	105.20	40.07
5925.000	30.38	PK	H	39.68	64.04	68.20	4.16
11550.000	33.60	PK	H	20.78	48.36	74.00	25.64
11550.000	20.54	AV	H	20.78	35.30	54.00	18.70
17325.000	32.42	PK	H	27.41	53.81	68.20	14.39

Note:

Result = Reading + Factor- Distance extrapolation Factor

Distance extrapolation Factor =  $20 \log (\text{specific distance [3m]}/\text{test distance [1.5m]})$  dB= 6.02 dB


Note:

Result = Reading + Factor- Distance extrapolation Factor



Distance extrapolation Factor =  $20 \log (\text{specific distance [3m]}/\text{test distance [1.5m]})$  dB= 6.02 dB

**Worst Test plots (802.11n20 5825 MHz was the worst)**


<b>Horizontal</b>	
1-6GHz	
6-18GHz	
18-26.5GHz	

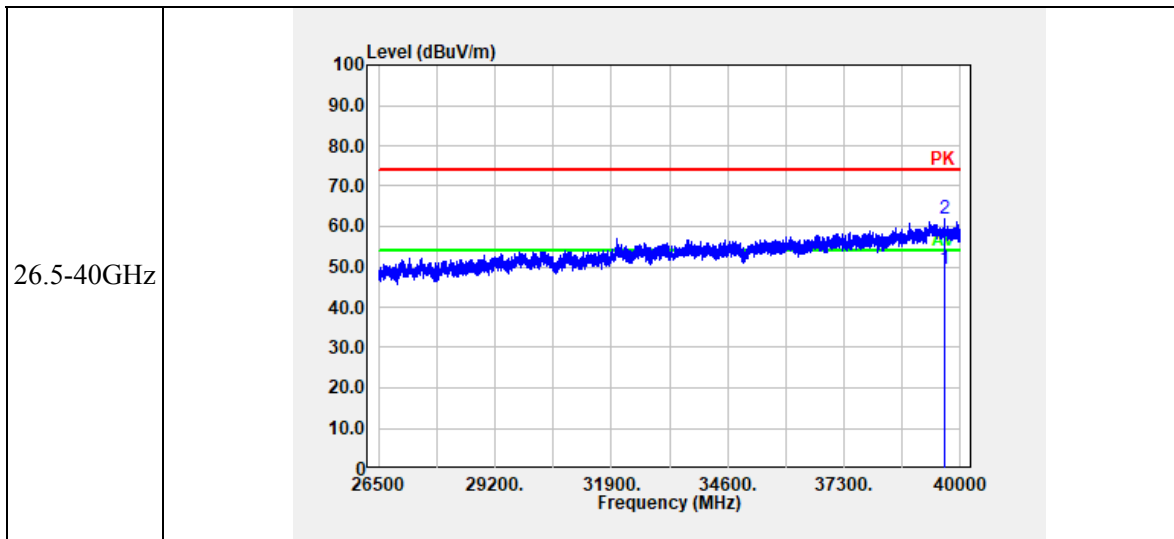

Vertical

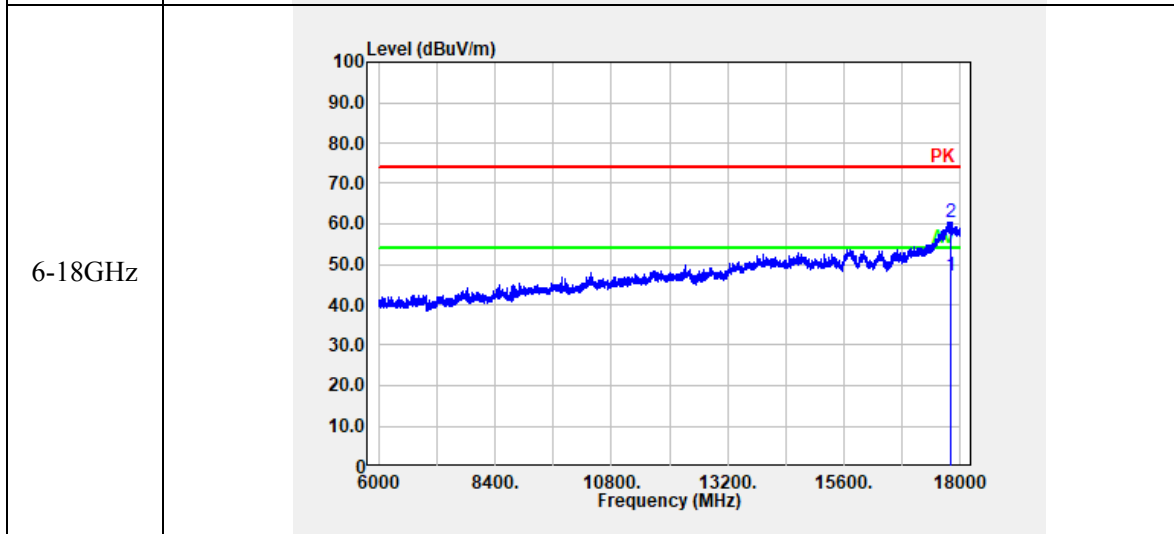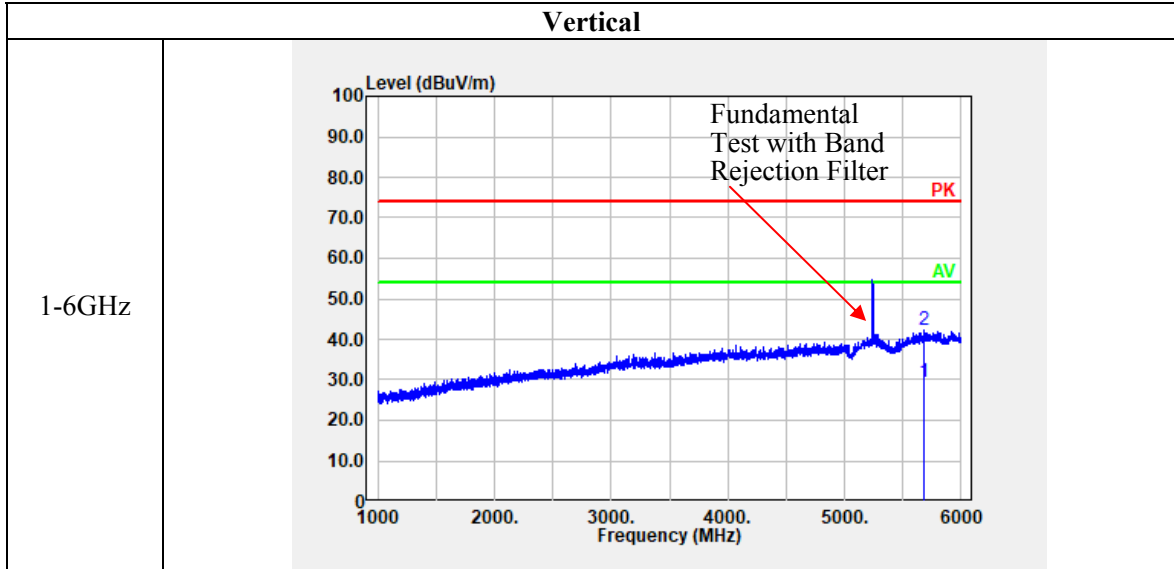



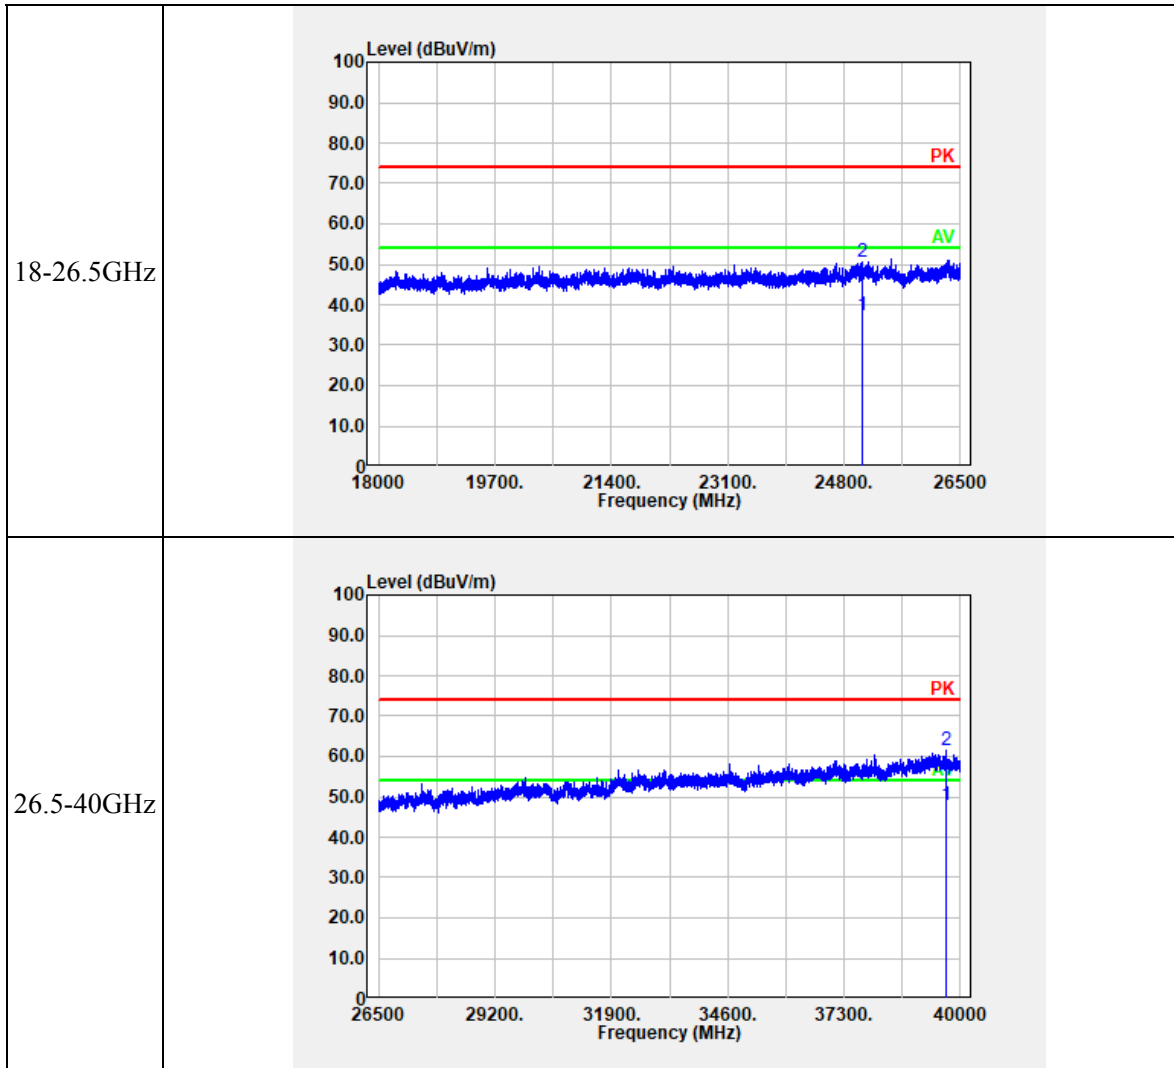

### 4.3 Emission Bandwidth

Serial Number:	2606-6	Test Date:	2023/6/13
Test Site:	RF	Test Mode:	Transmitting
Tester:	Claire Liu	Test Result:	Pass

#### Environmental Conditions:

Temperature: (°C)	24.7	Relative Humidity: (%)	52	ATM Pressure: (kPa)	99.5
----------------------	------	------------------------------	----	------------------------	------

#### Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2022/7/15	2023/7/14
zhuoxiang	Coaxial Cable	SMA-178	211003	Each time	N/A

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

#### Test Data:

5150-5250 MHz:


Test Modes	Test Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5180	34.69	17.52
	5200	35.82	17.68
	5240	35.75	17.76
802.11n ht20	5180	36.54	18.16
	5200	39.46	18.24
	5240	39.14	18.4
802.11n ht40	5190	69.36	36.96
	5230	68.46	37.12
802.11ac vht80	5210	123.08	76.8

Note: the 99% Occupied Bandwidth have not fall into the band 5250-5350MHz, please refer to the test plots of 99% Occupied Bandwidth.

5725-5850 MHz:

Test Modes	Test Frequency (MHz)	6 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5745	16.61	18
	5785	16.67	18.88
	5825	16.64	18.64
802.11n ht20	5745	17.89	18.4
	5785	17.89	18.4
	5825	17.86	19.28
802.11n ht40	5755	36.65	37.28
	5795	36.54	37.76
802.11ac vht80	5775	76.62	76.8
Note: 6dB Emission Bandwidth Limit: $\geq 0.5$ MHz the 99% Occupied Bandwidth have not fall into the band 5470-5725MHz, please refer to the test plots of 99% Occupied Bandwidth.			

5150-5250MHz:

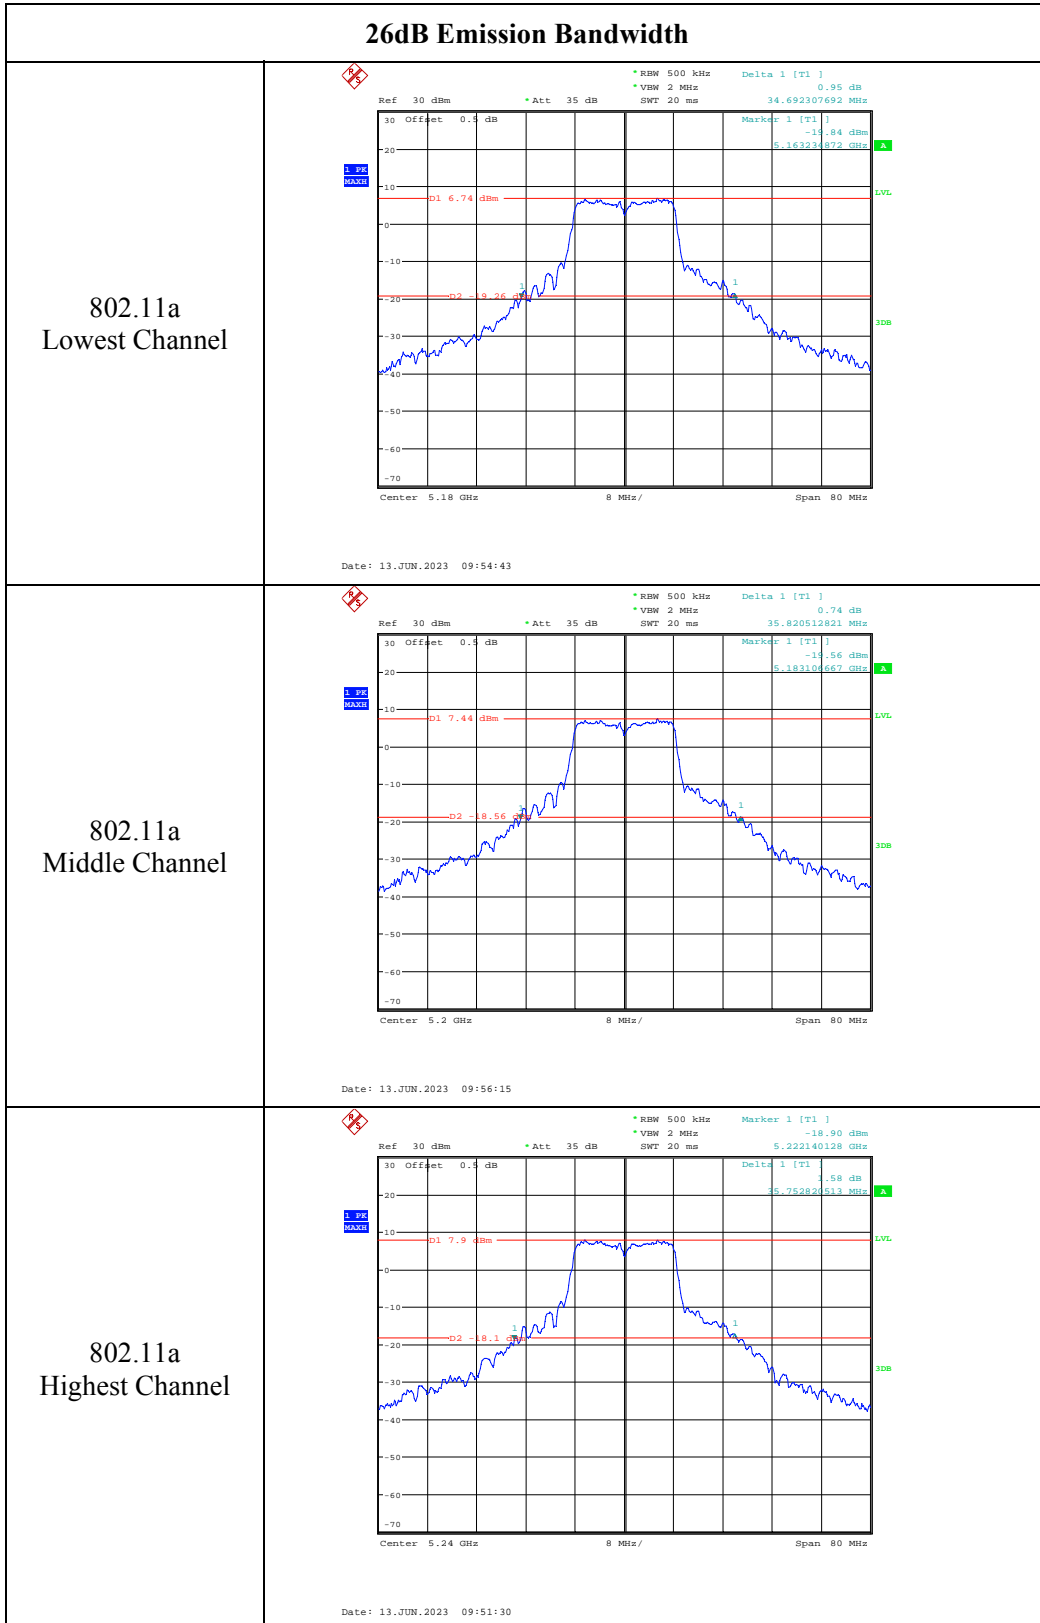


### 26dB Emission Bandwidth

<p>802.11n ht20 Lowest Channel</p>	<p>Ref 30 dBm * Att 35 dB * RBW 500 kHz Delta 1 [T1] 0.03 dB * VBW 2 MHz 36.528461539 MHz SWT 20 ms</p> <p>30 Offset 0.4 dB Marker 1 [T1] -24.44 dBm 5.16445282 GHz</p> <p>D1 5.94 dBm</p> <p>Center 5.18 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 13.JUN.2023 10:05:23</p>
<p>802.11n ht20 Middle Channel</p>	<p>Ref 30 dBm * Att 35 dB * RBW 500 kHz Delta 1 [T1] -0.38 dB * VBW 2 MHz 39.461538462 MHz SWT 20 ms</p> <p>30 Offset 0.4 dB Marker 1 [T1] -15.28 dBm 5.182450000 GHz</p> <p>D1 6.65 dBm</p> <p>Center 5.2 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 13.JUN.2023 10:07:48</p>
<p>802.11n ht20 Highest Channel</p>	<p>Ref 30 dBm * Att 35 dB * RBW 500 kHz Marker 1 [T1] -18.40 dBm * VBW 2 MHz 5.221948718 GHz SWT 20 ms</p> <p>30 Offset 0.4 dB Delta 1 [T1] -4.18 dB 5.143580744 MHz</p> <p>D1 6.95 dBm</p> <p>Center 5.24 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 13.JUN.2023 10:11:31</p>


### 26dB Emission Bandwidth

802.11n ht40  
Lowest Channel

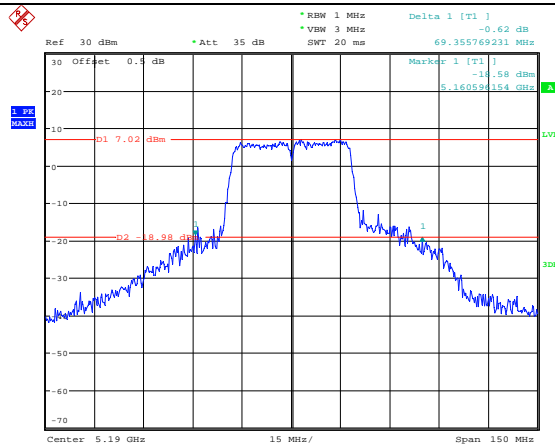


Date: 13.JUN.2023 10:22:12

802.11n ht40  
Highest Channel

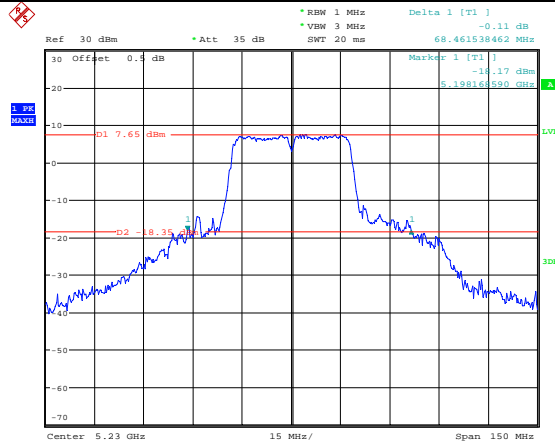




Date: 13.JUN.2023 10:19:55

802.11ac vht80  
Middle Channel

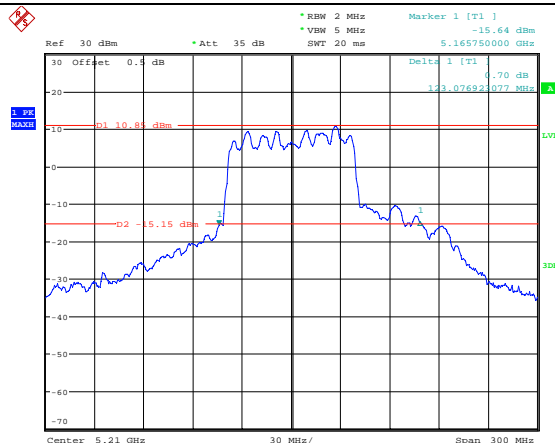

Date: 13.JUN.2023 10:32:23

### 99% Emission Bandwidth
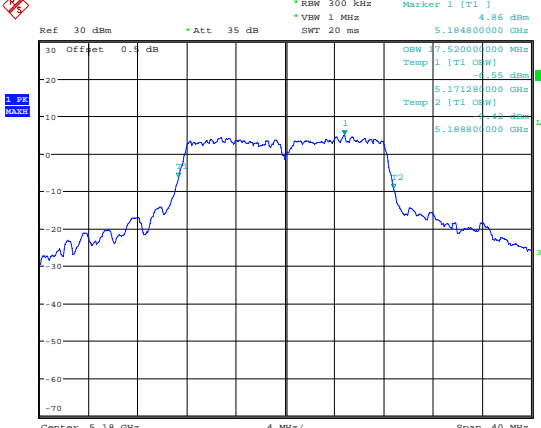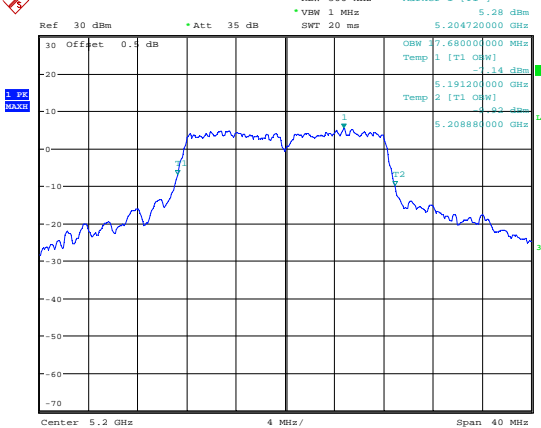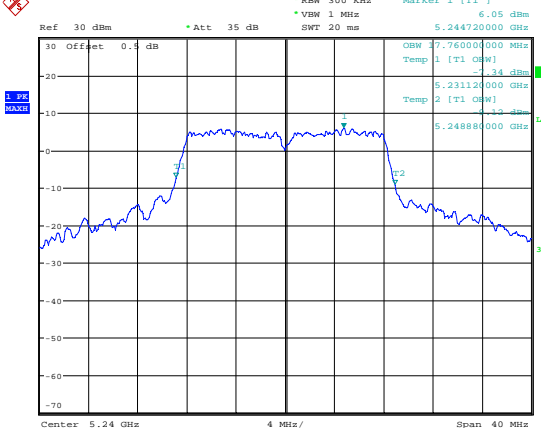
<p>802.11a Lowest Channel</p>	 <p>Ref 30 dBm * Att 35 dB * RBW 300 kHz Marker 1 [T1] 4.86 dBm          * VBW 1 MHz 5.194900000 GHz          * SWT 20 ms</p> <p>30 Offset 0.4 dB</p> <p>OSW 7.520000000 MHz          Temp 1 [T1] OSW] -1.55 dBm          5.171280000 GHz          Temp 2 [T1] OSW] -1.48 dBm          5.188800000 GHz</p> <p>Center 5.18 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 13.JUN.2023 09:34:23</p>
<p>802.11a Middle Channel</p>	 <p>Ref 30 dBm * Att 35 dB * RBW 300 kHz Marker 1 [T1] 5.28 dBm          * VBW 1 MHz 5.204720000 GHz          * SWT 20 ms</p> <p>30 Offset 0.4 dB</p> <p>OSW 7.680000000 MHz          Temp 1 [T1] OSW] -1.14 dBm          5.191200000 GHz          Temp 2 [T1] OSW] -1.83 dBm          5.208880000 GHz</p> <p>Center 5.2 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 13.JUN.2023 09:57:20</p>
<p>802.11a Highest Channel</p>	 <p>Ref 30 dBm * Att 35 dB * RBW 300 kHz Marker 1 [T1] 6.05 dBm          * VBW 1 MHz 5.244720000 GHz          * SWT 20 ms</p> <p>30 Offset 0.4 dB</p> <p>OSW 7.760000000 MHz          Temp 1 [T1] OSW] -1.34 dBm          5.231120000 GHz          Temp 2 [T1] OSW] -1.13 dBm          5.248880000 GHz</p> <p>Center 5.24 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 13.JUN.2023 09:58:08</p>







**99% Emission Bandwidth**

<p>802.11n ht40 Lowest Channel</p>	<p>Date: 13.JUN.2023 10:13:42</p>
<p>802.11n ht40 Highest Channel</p>	<p>Date: 13.JUN.2023 10:14:34</p>
<p>802.11ac vht80 Middle Channel</p>	<p>Date: 13.JUN.2023 10:25:26</p>

5725-5850MHz:

<b>6dB Emission Bandwidth</b>	
802.11a Lowest Channel	<p style="text-align: center;">Date: 13.JUN.2023 10:51:17</p>
802.11a Middle Channel	<p style="text-align: center;">Date: 13.JUN.2023 10:50:03</p>
802.11a Highest Channel	<p style="text-align: center;">Date: 13.JUN.2023 10:47:09</p>

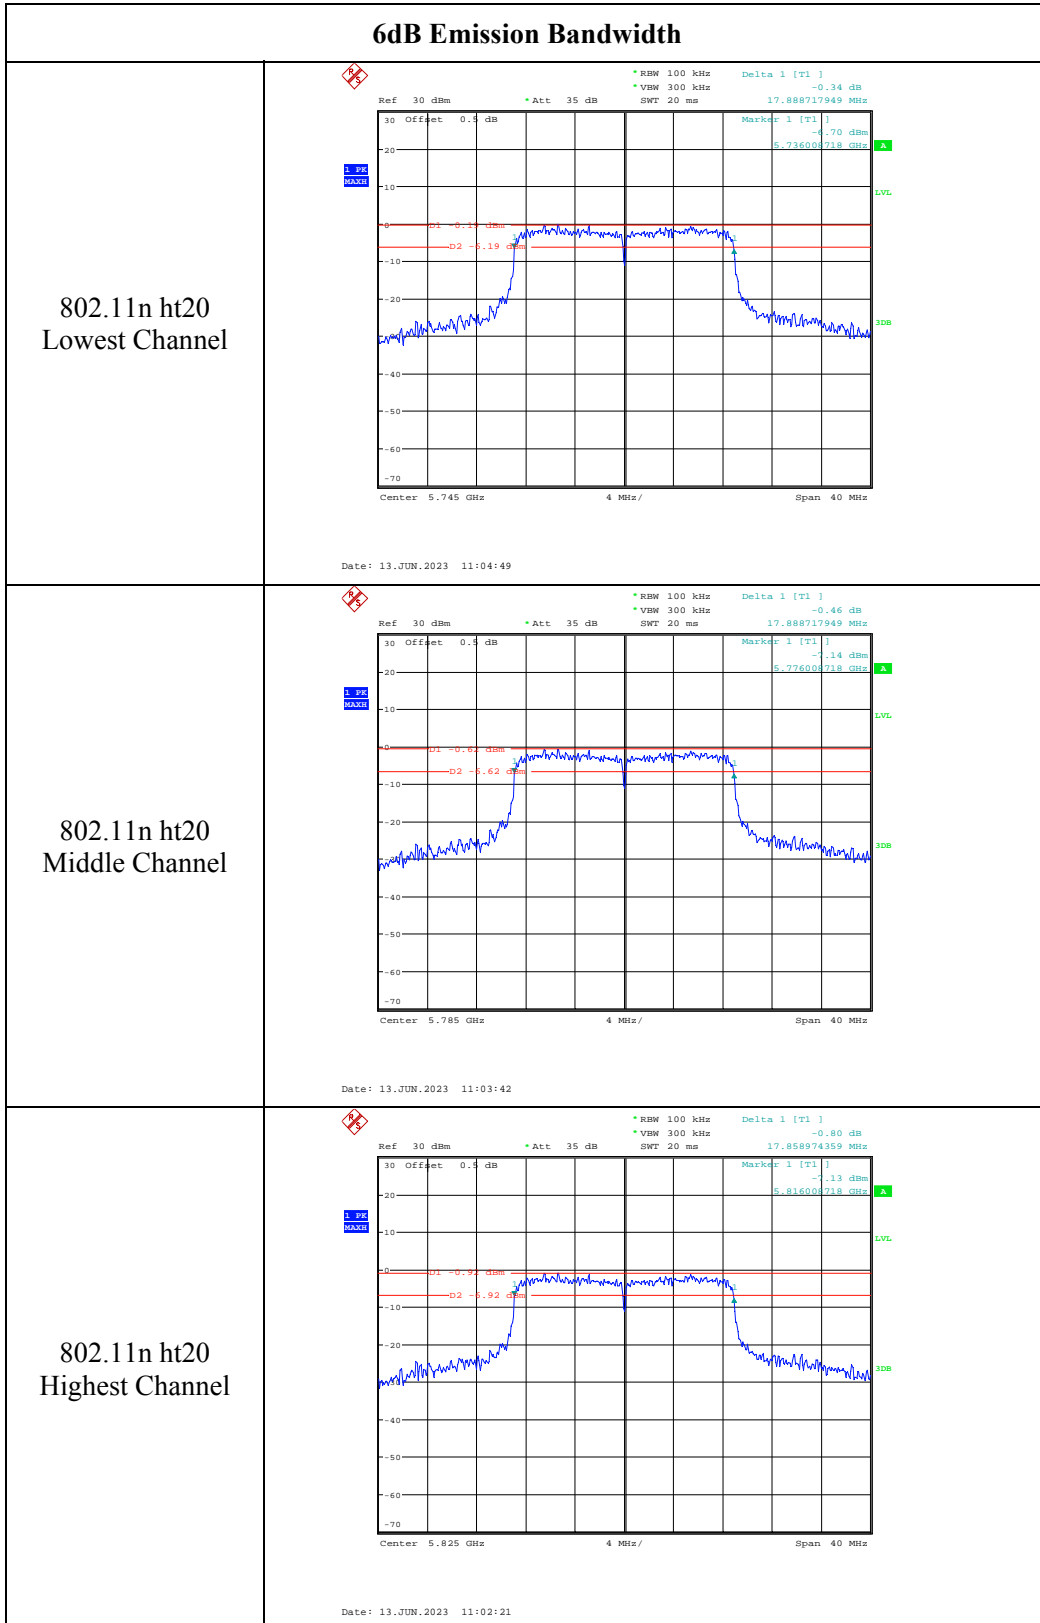

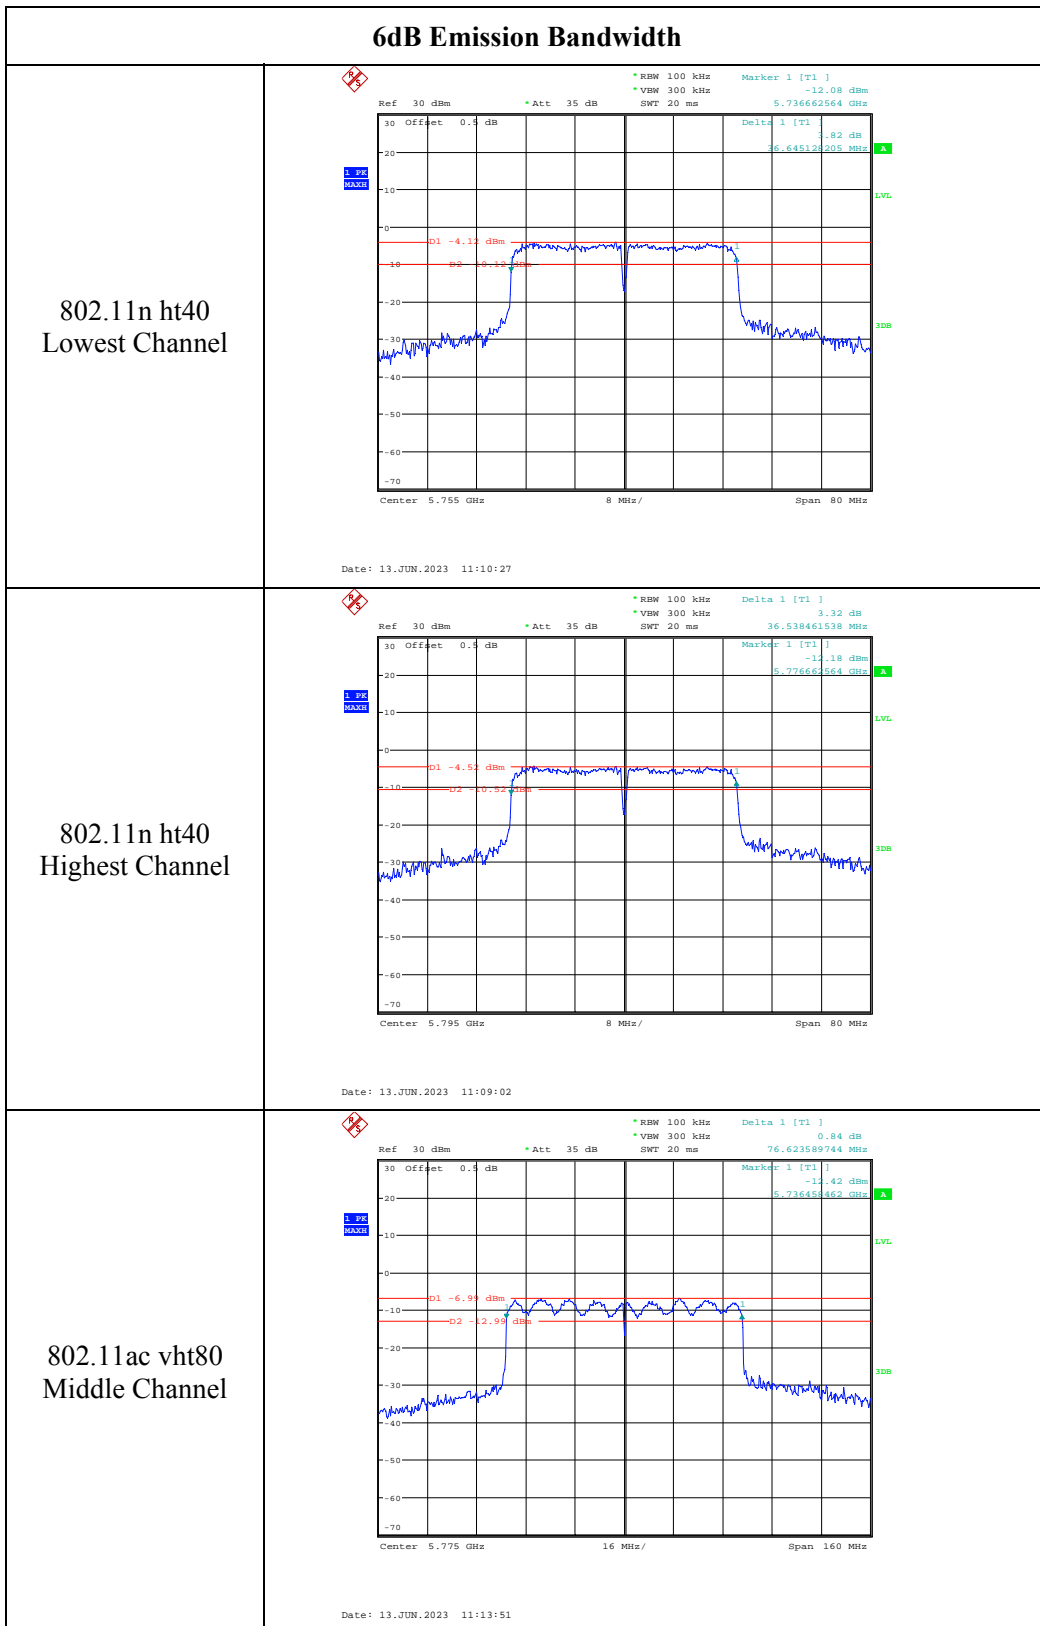

### 99% Emission Bandwidth

<p>802.11a Lowest Channel</p>	<p>Ref 30 dBm * Att 35 dB * RBW 300 kHz Marker 1 [T1] 5.44 dBm          * VBW 1 MHz 5.749720000 GHz          * SWT 20 ms</p> <p>30 Offset 0.4 dB</p> <p>OSW 0.00000000 MHz          Temp 1 [T1] OSW] -51.51 dBm          5.735960000 GHz          Temp 2 [T1] OSW] -55.55 dBm          5.753960000 GHz</p> <p>Center 5.745 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 13.JUN.2023 10:38:56</p>
<p>802.11a Middle Channel</p>	<p>Ref 30 dBm * Att 35 dB * RBW 300 kHz Marker 1 [T1] 5.38 dBm          * VBW 1 MHz 5.789720000 GHz          * SWT 20 ms</p> <p>30 Offset 0.4 dB</p> <p>OSW 0.88000000 MHz          Temp 1 [T1] OSW] -11.06 dBm          5.775720000 GHz          Temp 2 [T1] OSW] -13.83 dBm          5.794600000 GHz</p> <p>Center 5.785 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 13.JUN.2023 10:39:58</p>
<p>802.11a Highest Channel</p>	<p>Ref 30 dBm * Att 35 dB * RBW 300 kHz Marker 1 [T1] 4.49 dBm          * VBW 1 MHz 5.829720000 GHz          * SWT 20 ms</p> <p>30 Offset 0.4 dB</p> <p>OSW 0.64000000 MHz          Temp 1 [T1] OSW] -14.16 dBm          5.815800000 GHz          Temp 2 [T1] OSW] -17.84 dBm          5.834440000 GHz</p> <p>Center 5.825 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 13.JUN.2023 10:42:19</p>

### 99% Emission Bandwidth

<p>802.11n ht20 Lowest Channel</p>	<p>Ref 30 dBm * Att 35 dB * RBW 300 kHz Marker 1 [T1] 4.86 dBm          * VBW 1 MHz 5.749080000 GHz          * SWT 20 ms</p> <p>30 Offset 0.4 dB</p> <p>OSW 8.40000000 MHz          Temp 1 [T1] OSW] -23.23 dBm          5.735800000 GHz          Temp 2 [T1] OSW] -23.23 dBm          5.754200000 GHz</p> <p>Center 5.745 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 13.JUN.2023 10:58:34</p>
<p>802.11n ht20 Middle Channel</p>	<p>Ref 30 dBm * Att 35 dB * RBW 300 kHz Marker 1 [T1] 4.35 dBm          * VBW 1 MHz 5.789160000 GHz          * SWT 20 ms</p> <p>30 Offset 0.4 dB</p> <p>OSW 8.40000000 MHz          Temp 1 [T1] OSW] -23.81 dBm          5.775800000 GHz          Temp 2 [T1] OSW] -23.81 dBm          5.794200000 GHz</p> <p>Center 5.785 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 13.JUN.2023 11:00:03</p>
<p>802.11n ht20 Highest Channel</p>	<p>Ref 30 dBm * Att 35 dB * RBW 300 kHz Marker 1 [T1] 4.17 dBm          * VBW 1 MHz 5.817800000 GHz          * SWT 20 ms</p> <p>30 Offset 0.4 dB</p> <p>OSW 8.28000000 MHz          Temp 1 [T1] OSW] -24.56 dBm          5.815480000 GHz          Temp 2 [T1] OSW] -24.56 dBm          5.834760000 GHz</p> <p>Center 5.825 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 13.JUN.2023 11:00:56</p>

### 99% Emission Bandwidth

<p>802.11n ht40 Lowest Channel</p>	<p>Ref 30 dBm * Att 35 dB * RBW 500 kHz Marker 1 [T1] 3.73 dBm * VBW 2 MHz 5.765240000 GHz * SWT 20 ms</p> <p>OSW 5.728000000 MHz Temp 1 [T1] OSW -1.88 dBm 5.736440000 GHz Temp 2 [T1] OSW -5.56 dBm 5.773720000 GHz</p> <p>Center 5.755 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 13.JUN.2023 11:06:50</p>
<p>802.11n ht40 Highest Channel</p>	<p>Ref 30 dBm * Att 35 dB * RBW 500 kHz Marker 1 [T1] 3.63 dBm * VBW 2 MHz 5.805240000 GHz * SWT 20 ms</p> <p>OSW 5.760000000 MHz Temp 1 [T1] OSW -1.57 dBm 5.776280000 GHz Temp 2 [T1] OSW -1.43 dBm 5.814040000 GHz</p> <p>Center 5.795 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 13.JUN.2023 11:07:33</p>
<p>802.11ac vht80 Middle Channel</p>	<p>Ref 30 dBm * Att 35 dB * RBW 1 MHz Marker 1 [T1] 5.15 dBm * VBW 3 MHz 5.802200000 GHz * SWT 20 ms</p> <p>OSW 5.800000000 MHz Temp 1 [T1] OSW -1.86 dBm 5.736600000 GHz Temp 2 [T1] OSW -1.73 dBm 5.813400000 GHz</p> <p>Center 5.775 GHz 16 MHz/ Span 160 MHz</p> <p>Date: 13.JUN.2023 11:12:17</p>

**4.4 Maximum Conducted Output Power**

Serial Number:	2606-6	Test Date:	2023/6/13
Test Site:	RF	Test Mode:	Transmitting
Tester:	Claire Liu	Test Result:	Pass

**Environmental Conditions:**

Temperature: (°C)	24.7	Relative Humidity: (%)	52	ATM Pressure: (kPa)	99.5
----------------------	------	------------------------------	----	------------------------	------

**Test Equipment List and Details:**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	USB Wideband Power Sensor	U2021XA	MY54080015	2022/7/15	2023/7/14
zhuoxiang	Coaxial Cable	SMA-178	211003	Each time	N/A

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data:**

5150-5250 MHz:

Test Modes	Test Frequency (MHz)	Max. Conducted Average Output Power(dBm)	
		Result	Limit
802.11a	5180	13.45	24
	5200	13.86	24
	5240	14.59	24
802.11n ht20	5180	13.04	24
	5200	13.37	24
	5240	14.28	24
802.11n ht40	5190	13.12	24
	5230	13.97	24
802.11ac vht80	5210	13.49	24

Note: The device is a client device.



5725-5850 MHz:

Test Modes	Test Frequency (MHz)	Max. Conducted Average Output Power(dBm)	
		Result	Limit
802.11a	5745	14.19	30
	5785	14.12	30
	5825	13.34	30
802.11n ht20	5745	13.78	30
	5785	13.29	30
	5825	13.37	30
802.11n ht40	5755	13.52	30
	5795	13.61	30
802.11ac vht80	5775	12.98	30

**4.5 Maximum power spectral density**

Serial Number:	2606-6	Test Date:	2023/6/13
Test Site:	RF	Test Mode:	Transmitting
Tester:	Claire Liu	Test Result:	Pass

**Environmental Conditions:**

Temperature: (°C)	24.7	Relative Humidity: (%)	52	ATM Pressure: (kPa)	99.5
----------------------	------	------------------------------	----	------------------------	------

**Test Equipment List and Details:**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2022-07-15	2023-07-14
zhuoxiang	Coaxial Cable	SMA-178	211003	Each time	N/A

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data:**

5150-5250 MHz:

Test Modes	Test Frequency (MHz)	Reading (dBm/MHz)	Duty Cycle Factor (dB)	Maximum Power Spectral Density (dBm/MHz)	
				Result	Limit
802.11a	5180	2.08	/	2.08	11
	5200	2.75	/	2.75	11
	5240	3.36	/	3.36	11
802.11n ht20	5180	1.42	/	1.42	11
	5200	1.96	/	1.96	11
	5240	2.73	/	2.73	11
802.11n ht40	5190	-1.30	/	-1.30	11
	5230	-0.76	/	-0.76	11
802.11ac vht80	5210	-2.83	/	-2.83	11


Note: The duty cycle is 100%, so KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-1 should be applied.

## 5725-5850 MHz:

Test Modes	Test Frequency (MHz)	Reading (dBm/500kHz)	Duty Cycle Factor (dB)	Maximum Power Spectral Density(dBm/500kHz)	
				Result	Limit
802.11a	5745	-0.26	/	-0.26	30
	5785	-0.44	/	-0.44	30
	5825	-1.43	/	-1.43	30
802.11n ht20	5745	-1.05	/	-1.05	30
	5785	-1.42	/	-1.42	30
	5825	-1.65	/	-1.65	30
802.11n ht40	5755	-4.40	/	-4.40	30
	5795	-4.51	/	-4.51	30
802.11ac vht80	5775	-6.90	/	-6.90	30

Note: The duty cycle is 100%, so KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-1 should be applied.

5150-5250MHz:

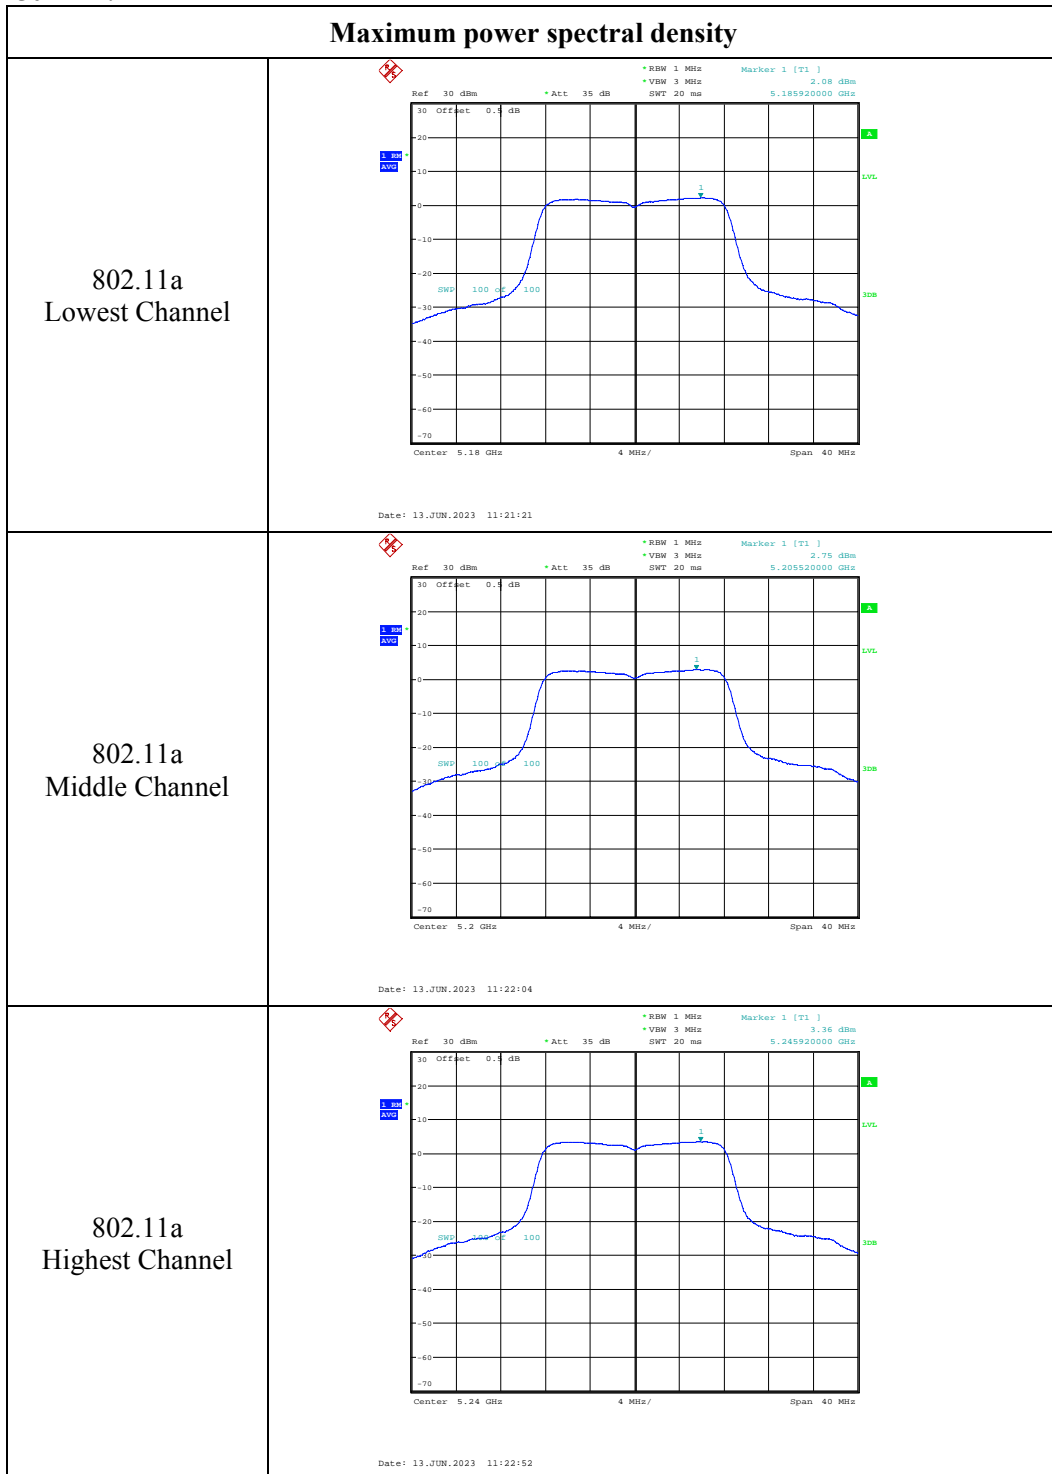

### Maximum power spectral density




<p>802.11n ht20 Lowest Channel</p>	<p>Ref: 30 dBm    *Att: 35 dB    *RBW: 1 MHz    Marker 1 [T1] 1.42 dBm          *VBW: 3 MHz          *SWT: 20 ms    5.195120000 GHz</p> <p>Center: 5.18 GHz    4 MHz/    Span: 40 MHz</p> <p>Date: 13.JUN.2023 11:26:37</p>
<p>802.11n ht20 Middle Channel</p>	<p>Ref: 30 dBm    *Att: 35 dB    *RBW: 1 MHz    Marker 1 [T1] 1.96 dBm          *VBW: 3 MHz          *SWT: 20 ms    5.205520000 GHz</p> <p>Center: 5.2 GHz    4 MHz/    Span: 40 MHz</p> <p>Date: 13.JUN.2023 11:25:47</p>
<p>802.11n ht20 Highest Channel</p>	<p>Ref: 30 dBm    *Att: 35 dB    *RBW: 1 MHz    Marker 1 [T1] 2.73 dBm          *VBW: 3 MHz          *SWT: 20 ms    5.245440000 GHz</p> <p>Center: 5.24 GHz    4 MHz/    Span: 40 MHz</p> <p>Date: 13.JUN.2023 11:24:32</p>

### Maximum power spectral density

<p>802.11n ht40 Lowest Channel</p>	<p>Ref: 30 dBm, Att: 35 dB, RBW: 1 MHz, VBW: 3 MHz, SWT: 20 ms, Marker 1 [T1]: -1.30 dBm, 5.204560000 GHz</p> <p>Center: 5.19 GHz, 8 MHz/, Span: 80 MHz</p> <p>Date: 13.JUN.2023 11:28:47</p>
<p>802.11n ht40 Highest Channel</p>	<p>Ref: 30 dBm, Att: 35 dB, RBW: 1 MHz, VBW: 3 MHz, SWT: 20 ms, Marker 1 [T1]: -0.76 dBm, 5.244560000 GHz</p> <p>Center: 5.23 GHz, 8 MHz/, Span: 80 MHz</p> <p>Date: 13.JUN.2023 11:29:58</p>
<p>802.11ac vht80 Middle Channel</p>	<p>Ref: 30 dBm, Att: 35 dB, RBW: 1 MHz, VBW: 3 MHz, SWT: 20 ms, Marker 1 [T1]: -2.83 dBm, 5.237200000 GHz</p> <p>Center: 5.21 GHz, 16 MHz/, Span: 160 MHz</p> <p>Date: 13.JUN.2023 11:31:16</p>

5725-5850MHz

Maximum power spectral density
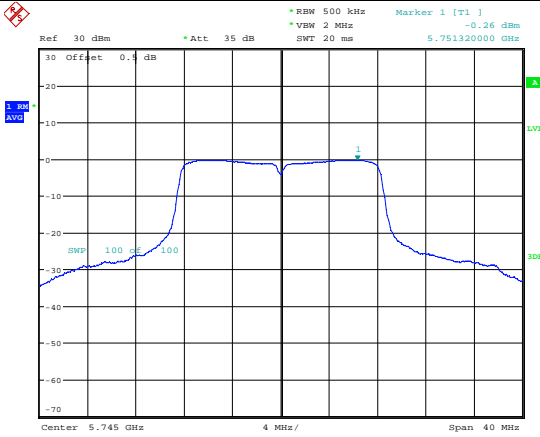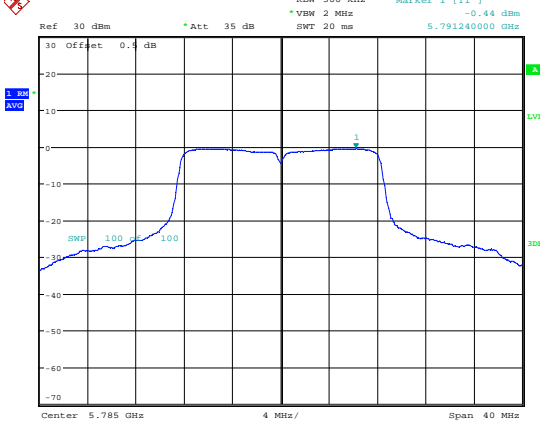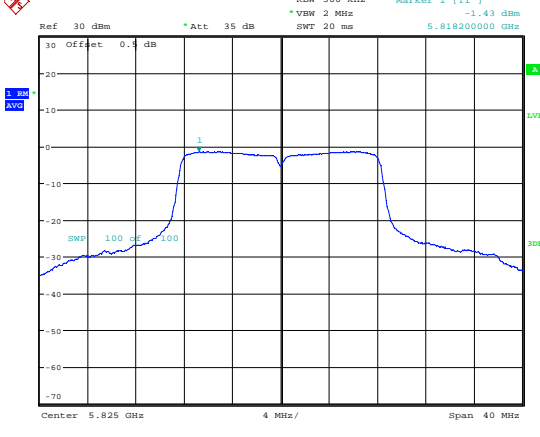
<p>802.11a Lowest Channel</p>	 <p>Ref 30 dBm * Att 35 dB * RBW 500 kHz Marker 1 [F1] -0.26 dBm * VBW 2 MHz SWT 20 ms 5.75120000 GHz</p> <p>30 Offset 0.4 dB</p> <p>1. SWR AVG</p> <p>SWP 100 dB 100</p> <p>Center 5.745 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 13.JUN.2023 11:43:15</p>
<p>802.11a Middle Channel</p>	 <p>Ref 30 dBm * Att 35 dB * RBW 500 kHz Marker 1 [F1] -0.44 dBm * VBW 2 MHz SWT 20 ms 5.791240000 GHz</p> <p>30 Offset 0.4 dB</p> <p>1. SWR AVG</p> <p>SWP 100 dB 100</p> <p>Center 5.785 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 13.JUN.2023 11:43:58</p>
<p>802.11a Highest Channel</p>	 <p>Ref 30 dBm * Att 35 dB * RBW 500 kHz Marker 1 [F1] -1.43 dBm * VBW 2 MHz SWT 20 ms 5.818200000 GHz</p> <p>30 Offset 0.4 dB</p> <p>1. SWR AVG</p> <p>SWP 100 dB 100</p> <p>Center 5.825 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 13.JUN.2023 11:44:47</p>

**Maximum power spectral density**

<p>802.11n ht20 Lowest Channel</p>	<p>Ref: 30 dBm    *Att: 35 dB    *RBW: 500 kHz    Marker 1 [T1]    -1.05 dBm          *VBW: 2 MHz          *SWT: 20 ms    5.750360000 GHz</p> <p>Center: 5.745 GHz    4 MHz/    Span: 40 MHz</p> <p>Date: 13.JUN.2023 11:39:58</p>
<p>802.11n ht20 Middle Channel</p>	<p>Ref: 30 dBm    *Att: 35 dB    *RBW: 500 kHz    Marker 1 [T1]    -1.42 dBm          *VBW: 2 MHz          *SWT: 20 ms    5.790280000 GHz</p> <p>Center: 5.785 GHz    4 MHz/    Span: 40 MHz</p> <p>Date: 13.JUN.2023 11:37:20</p>
<p>802.11n ht20 Highest Channel</p>	<p>Ref: 30 dBm    *Att: 35 dB    *RBW: 500 kHz    Marker 1 [T1]    -1.65 dBm          *VBW: 2 MHz          *SWT: 20 ms    5.830360000 GHz</p> <p>Center: 5.825 GHz    4 MHz/    Span: 40 MHz</p> <p>Date: 13.JUN.2023 11:36:37</p>



### Maximum power spectral density

<p>802.11n ht40 Lowest Channel</p>	<p>Ref 30 dBm * Att 35 dB * RBW 500 kHz Marker 1 [T1] -4.40 dBm * VBW 2 MHz SWT 20 ms 5.740760000 GHz</p> <p>30 Offset 0.4 dB</p> <p>1. PM AVG</p> <p>SWP 100 dB 100</p> <p>Center 5.755 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 13.JUN.2023 11:34:57</p>
<p>802.11n ht40 Highest Channel</p>	<p>Ref 30 dBm * Att 35 dB * RBW 500 kHz Marker 1 [T1] -4.51 dBm * VBW 2 MHz SWT 20 ms 5.779960000 GHz</p> <p>30 Offset 0.4 dB</p> <p>1. PM AVG</p> <p>SWP 100 dB 100</p> <p>Center 5.795 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 13.JUN.2023 11:34:08</p>
<p>802.11ac vht80 Middle Channel</p>	<p>Ref 30 dBm * Att 35 dB * RBW 500 kHz Marker 1 [T1] -6.90 dBm * VBW 2 MHz SWT 20 ms 5.792920000 GHz</p> <p>30 Offset 0.4 dB</p> <p>1. PM AVG</p> <p>SWP 100 dB 100</p> <p>Center 5.775 GHz 16 MHz/ Span 160 MHz</p> <p>Date: 13.JUN.2023 11:32:59</p>

**4.6 Duty Cycle**

Serial Number:	2606-6	Test Date:	2023/6/13
Test Site:	RF	Test Mode:	Transmitting
Tester:	Claire Liu	Test Result:	N/A

Environmental Conditions:					
Temperature: (°C)	24.7	Relative Humidity: (%)	52	ATM Pressure: (kPa)	99.5


**Test Equipment List and Details:**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2022-07-15	2023-07-14
zhuoxiang	Coaxial Cable	SMA-178	211003	Each time	N/A

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data:**

Test Modes	Ton (ms)	Ton+off (ms)	Duty cycle (%)	1/T (Hz)
802.11a	100	100	100.00	10
802.11n ht20	100	100	100.00	10
802.11n ht40	100	100	100.00	10
802.11ac vht80	100	100	100.00	10

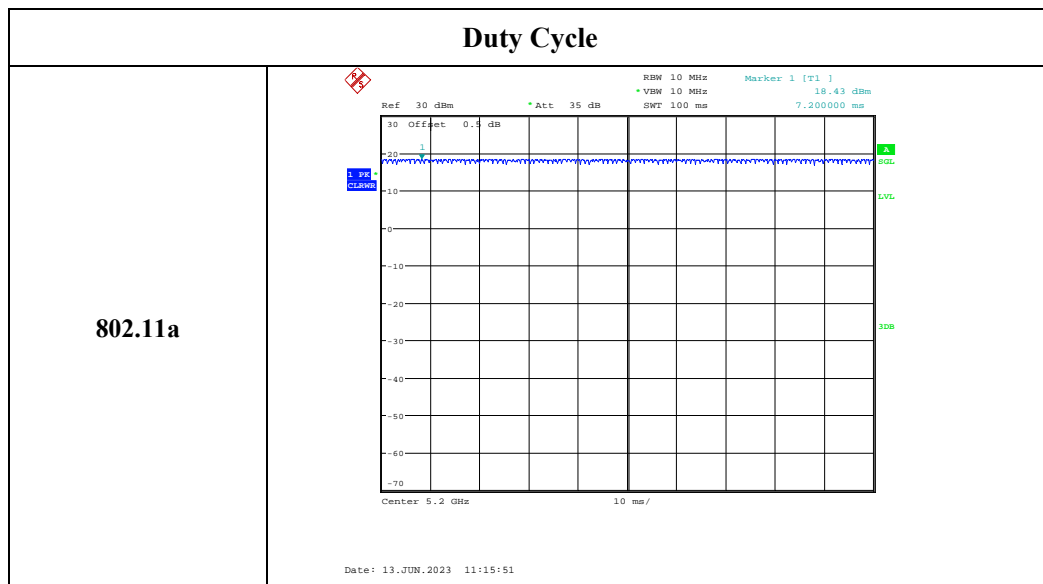

**Duty Cycle**

<p style="text-align: center;"><b>802.11n ht20</b></p>	<p>Ref 30 dBm *Att 35 dB RBW 10 MHz Marker 1 [T1] 18.43 dBm          *VSW 10 MHz          *SWT 100 ms 78.200000 ms</p> <p>30 Offset 0.4 dB</p> <p>Center 5.2 GHz 10 ms/</p> <p>Date: 13.JUN.2023 11:16:29</p>
<p style="text-align: center;"><b>802.11n ht40</b></p>	<p>Ref 30 dBm *Att 35 dB RBW 10 MHz Marker 1 [T1] 14.85 dBm          *VSW 10 MHz          *SWT 100 ms 33.800000 ms</p> <p>30 Offset 0.4 dB</p> <p>Center 5.19 GHz 10 ms/</p> <p>Date: 13.JUN.2023 11:17:13</p>
<p style="text-align: center;"><b>802.11ac vht80</b></p>	<p>Ref 30 dBm *Att 35 dB RBW 10 MHz Marker 1 [T1] 12.59 dBm          *VSW 10 MHz          *SWT 100 ms 28.200000 ms</p> <p>30 Offset 0.4 dB</p> <p>Center 5.21 GHz 10 ms/</p> <p>Date: 13.JUN.2023 11:17:51</p>

## 5. MPE Based Exemption

### 5.1 MPE-Based Exemption

#### 5.1.1 Applicable Standard

According to §1.1307(b)(3)(i)

(C) Or using Table 1 and the minimum separation distance (R in meters) from the body of a nearby person for the frequency (f in MHz) at which the source operates, the ERP (watts) is no more than the calculated value prescribed for that frequency. For the exemption in Table 1 to apply, R must be at least  $\lambda/2\pi$ , where  $\lambda$  is the free-space operating wavelength in meters. If the ERP of a single RF source is not easily obtained, then the available maximum time-averaged power may be used in lieu of ERP if the physical dimensions of the radiating structure(s) do not exceed the electrical length of  $\lambda/4$  or if the antenna gain is less than that of a half-wave dipole (1.64 linear value).

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$ .
1.34-30	$3,450 R^2/f^2$ .
30-300	$3.83 R^2$ .
300-1,500	$0.0128 R^2 f$ .
1,500-100,000	$19.2R^2$ .

#### 5.1.2 Measurement Result

Radio	Frequency (MHz)	$\lambda/2\pi$ (mm)	Distance (mm)	Exemption ERP (mW)	Maximum Conducted Power including Tune-up Tolerance (dBm)	Antenna Gain (dBi)	ERP		MPE-Based Exemption
							dBm	mW	
WLAN 2.4G	2412-2462	19.81	200	768	17	2.28	17.13	51.64	Compliant
Bluetooth	2402-2480	19.89	200	768	7	2.28	7.13	5.16	Compliant
5.2GHz WLAN	5180-5240	9.22	200	768	15	2.95	15.80	38.02	Compliant
5.8GHz WLAN	5745-5825	8.32	200	768	15	2.75	15.60	36.31	Compliant

Note:

1. The Maximum Conducted Power including Tune-up Tolerance was declared by manufacturer.
2. WLAN and Bluetooth can't simultaneous transmit.
3. 0dBd=2.15dBi

**Result: The device compliant the MPE-Based Exemption at 20cm distances.**

==== END OF REPORT ====