


Test Mode :	802.11n HT40 CH134 5670MHz	Temperature :	21~23°C
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.685GHz~5.765GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23°C / 61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT40 CH134(5670MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

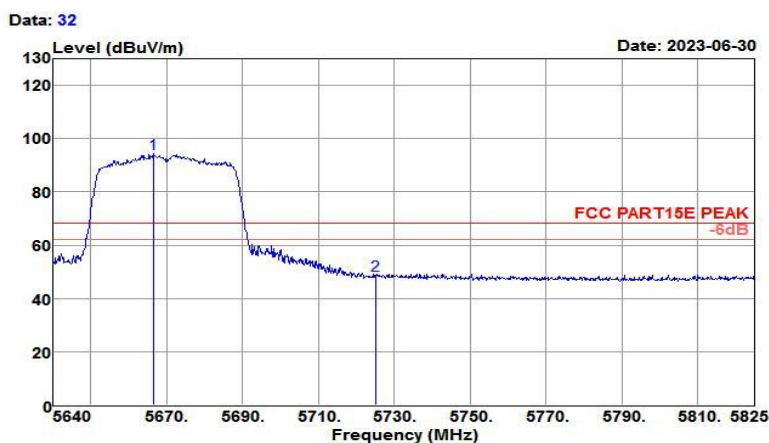

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5666.455	89.93	31.87	7.76	35.23	94.33	68.20	26.13	Peak
5725.000	44.49	31.96	7.29	35.18	48.56	68.20	-19.64	Peak

Test Mode :	802.11n HT40 CH134 5670MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.685GHz~5.765GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT40 CH134(5670MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

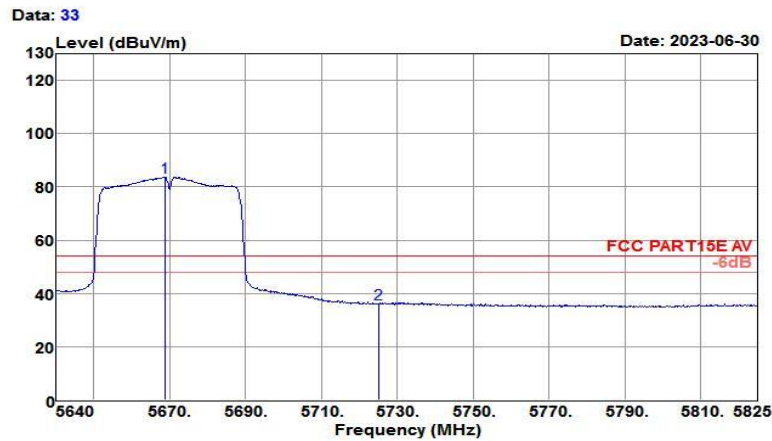


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5668.675	79.30	31.87	7.74	35.23	83.68	54.00	29.68	Average
5725.000	32.07	31.96	7.29	35.18	36.14	54.00	-17.86	Average

Test Mode :	802.11n HT40 CH142 5710MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.685GHz~5.765GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT40 CH142 (5710MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

Data: 24

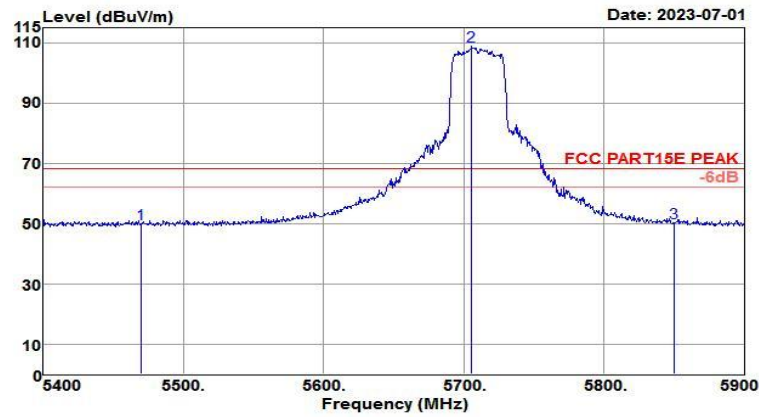


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5470.000	44.97	31.58	8.67	35.43	49.79	68.20	-18.41	Peak
5705.500	104.63	31.93	7.45	35.19	108.82	68.20	40.62	Peak
5850.000	46.06	32.16	7.10	35.05	50.27	68.20	-17.93	Peak

Test Mode :	802.11n HT40 CH142 5710MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.685GHz~5.765GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT40 CH142 (5710MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

Data: 25

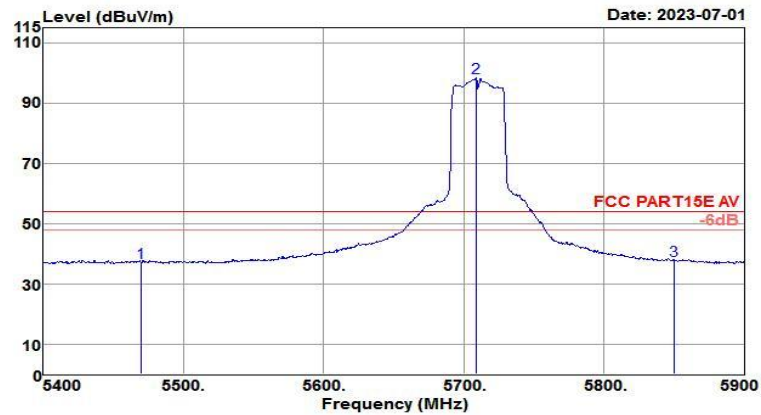


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5470.000	32.31	31.58	8.67	35.43	37.13	54.00	-16.87	Average
5708.500	94.07	31.93	7.42	35.19	98.23	54.00	44.23	Average
5850.000	33.51	32.16	7.10	35.05	37.72	54.00	-16.28	Average

Test Mode :	802.11n HT40 CH142 5710MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.685GHz~5.765GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT40 CH142 (5710MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		


Data: 21

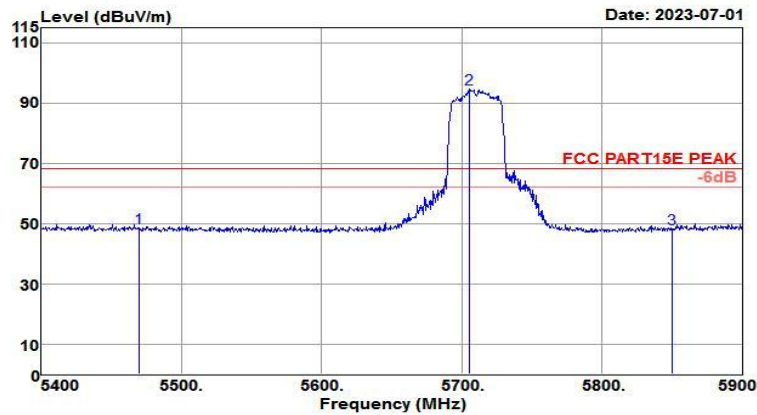

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5470.000	43.56	31.58	8.67	35.43	48.38	68.20	-19.82	Peak
5705.000	90.37	31.93	7.45	35.19	94.56	68.20	26.36	Peak
5850.000	43.92	32.16	7.10	35.05	48.13	68.20	-20.07	Peak

Test Mode :	802.11n HT40 CH142 5710MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.685GHz~5.765GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT40 CH142 (5710MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

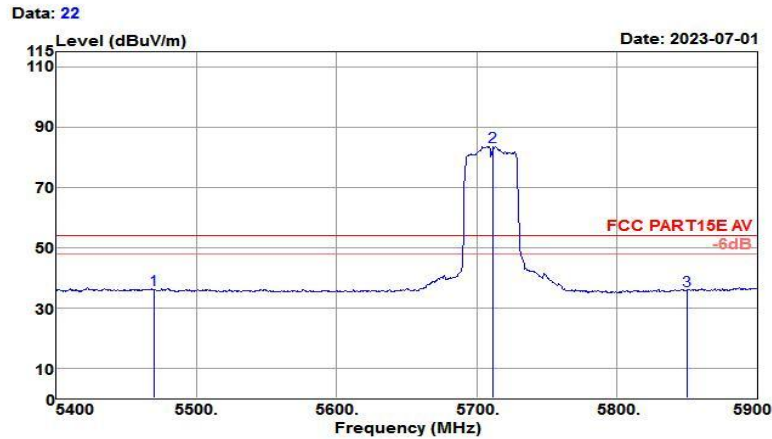

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5470.000	31.12	31.58	8.67	35.43	35.94	54.00	-18.06	Average
5711.500	79.46	31.94	7.40	35.19	83.61	54.00	29.61	Average
5850.000	31.59	32.16	7.10	35.05	35.80	54.00	-18.20	Average

Test Mode :	802.11n HT40 CH151 5755MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.6GHz~5.85GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT40 CH151 (5755MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

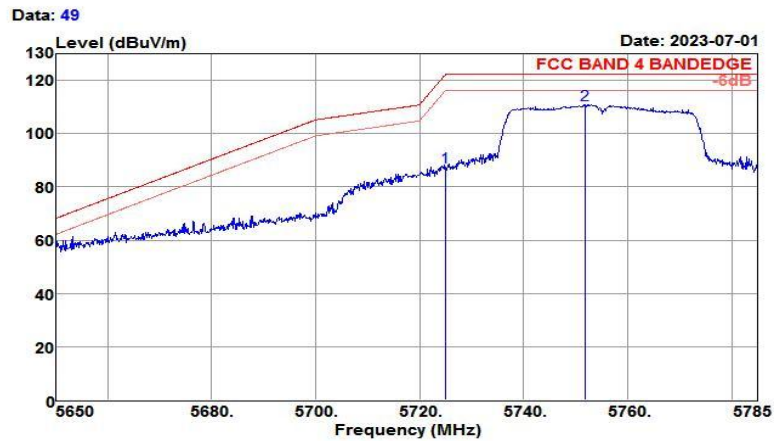

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5725.000	83.53	31.96	7.29	35.18	87.60	122.20	-34.60	Peak
5751.790	106.89	32.00	7.08	35.15	110.82	122.20	-11.38	Peak

Test Mode :	802.11n HT40 CH151 5755MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.6GHz~5.85GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT40 CH151 (5755MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

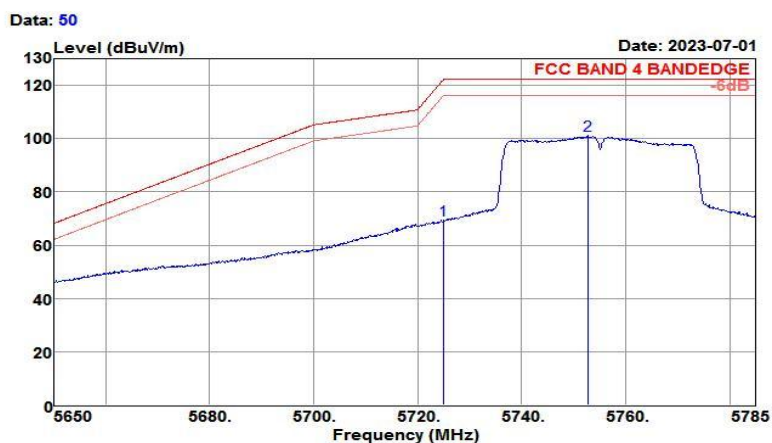

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5725.000	65.24	31.96	7.29	35.18	69.31	122.20	-52.89	Average
5752.735	97.25	32.00	7.07	35.15	101.17	122.20	-21.03	Average

Test Mode :	802.11n HT40 CH151 5755MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.6GHz~5.85GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT40 CH151 (5755MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

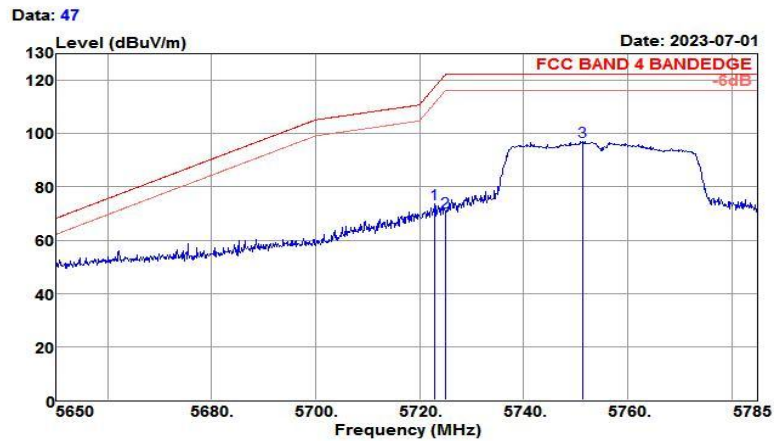

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5722.900	69.58	31.96	7.31	35.18	73.67	117.41	-43.74	Peak
5725.000	66.50	31.96	7.29	35.18	70.57	122.20	-51.63	Peak
5751.385	93.25	32.00	7.08	35.15	97.18	122.20	-25.02	Peak

Test Mode :	802.11n HT40 CH151 5755MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.6GHz~5.85GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT40 CH151 (5755MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

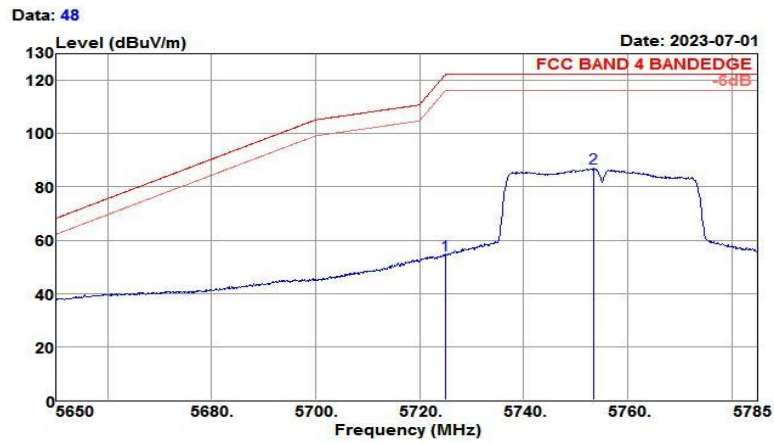

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5725.000	50.53	31.96	7.29	35.18	54.60	122.20	-67.60	Average
5753.410	82.96	32.01	7.07	35.15	86.89	122.20	-35.31	Average

Test Mode :	802.11n HT40 CH159 5795MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.75GHz~5.95GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT40 CH159 (5795MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

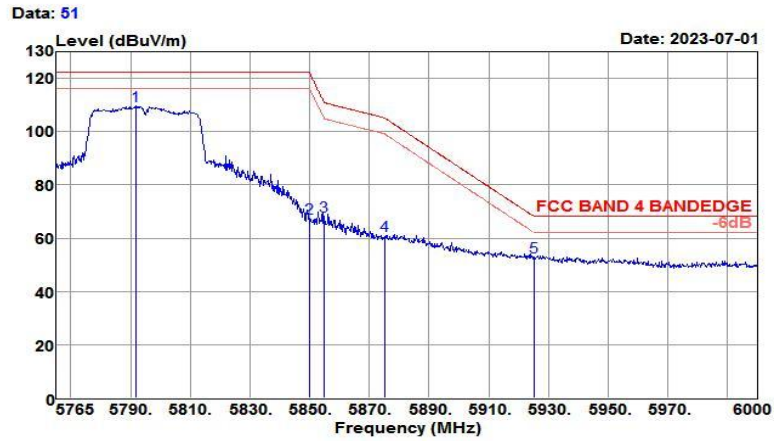

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5791.790	106.03	32.07	6.76	35.11	109.75	122.20	-12.45	Peak
5850.000	63.18	32.16	7.10	35.05	67.39	122.20	-54.81	Peak
5855.000	64.02	32.17	7.14	35.05	68.28	110.80	-42.52	Peak
5875.000	56.68	32.20	7.30	35.03	61.15	105.20	-44.05	Peak
5925.000	47.79	32.28	7.70	34.98	52.79	68.20	-15.41	Peak

Test Mode :	802.11n HT40 CH159 5795MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.75GHz~5.95GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT40 CH159 (5795MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

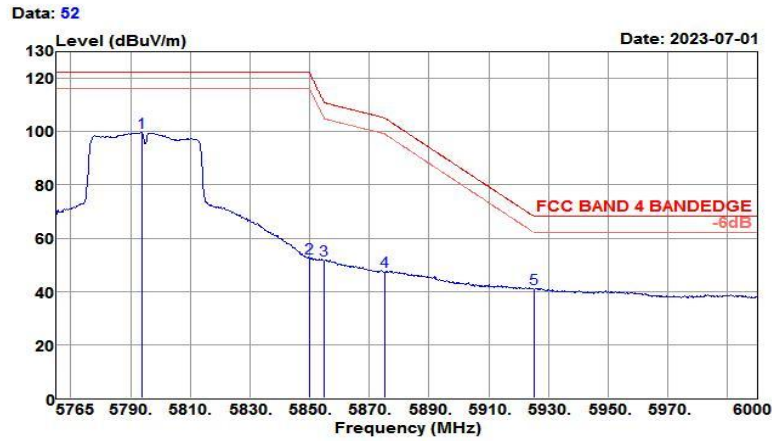

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5793.670	95.87	32.07	6.75	35.11	99.58	122.20	-22.62	Average
5850.000	48.19	32.16	7.10	35.05	52.40	122.20	-69.80	Average
5855.000	47.47	32.17	7.14	35.05	51.73	110.80	-59.07	Average
5875.000	42.92	32.20	7.30	35.03	47.39	105.20	-57.81	Average
5925.000	36.14	32.28	7.70	34.98	41.14	68.20	-27.06	Average

Test Mode :	802.11n HT40 CH159 5795MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.75GHz~5.95GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT40 CH159 (5795MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

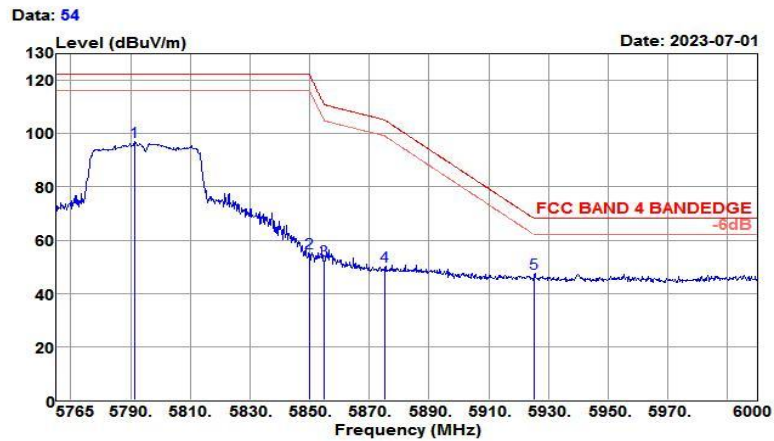

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5791.320	93.13	32.07	6.77	35.11	96.86	122.20	-25.34	Peak
5850.000	50.98	32.16	7.10	35.05	55.19	122.20	-67.01	Peak
5855.000	48.37	32.17	7.14	35.05	52.63	110.80	-58.17	Peak
5875.000	45.66	32.20	7.30	35.03	50.13	105.20	-55.07	Peak
5925.000	42.42	32.28	7.70	34.98	47.42	68.20	-20.78	Peak

Test Mode :	802.11n HT40 CH159 5795MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.75GHz~5.95GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11n HT40 CH159 (5795MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

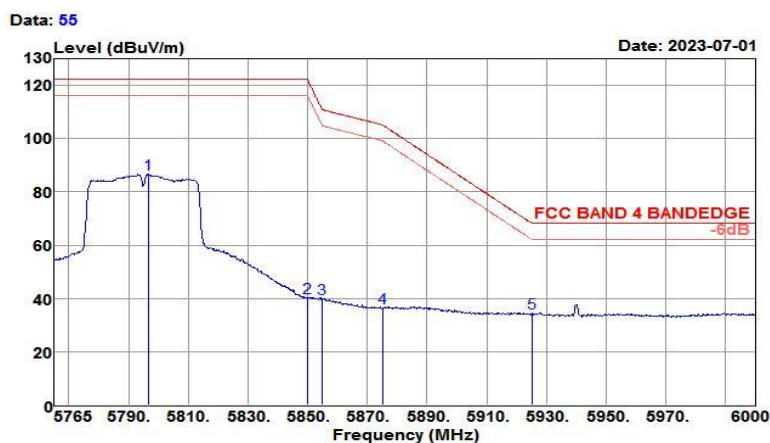

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5796.725	82.89	32.07	6.73	35.10	86.59	122.20	-35.61	Average
5850.000	36.23	32.16	7.10	35.05	40.44	122.20	-81.76	Average
5855.000	35.67	32.17	7.14	35.05	39.93	110.80	-70.87	Average
5875.000	32.08	32.20	7.30	35.03	36.55	105.20	-68.65	Average
5925.000	29.71	32.28	7.70	34.98	34.71	68.20	-33.49	Average

Test Mode :	802.11ac VHT80 CH42 5210MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.0GHz~5.28GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11ac VHT80 CH42(5210MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

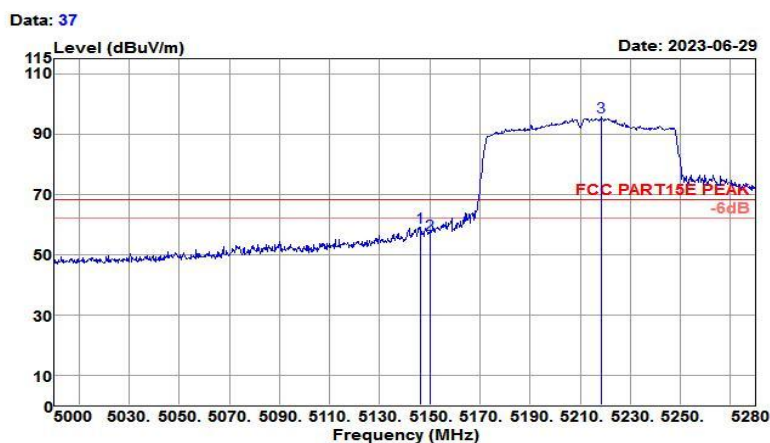

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5146.160	55.96	31.32	7.60	35.75	59.13	68.20	-9.07	Peak
5150.000	53.34	31.32	7.59	35.75	56.50	68.20	-11.70	Peak
5218.680	92.45	31.37	7.62	35.68	95.76	68.20	27.56	Peak

Test Mode :	802.11ac VHT80 CH42 5210MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.0GHz~5.28GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11ac VHT80 CH42(5210MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

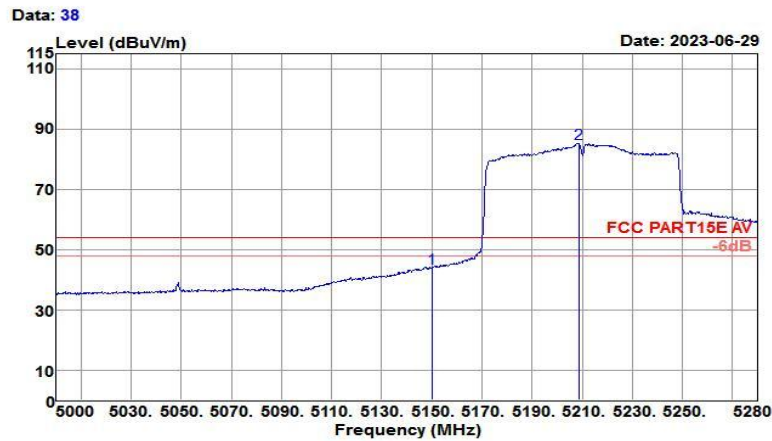

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5150.000	40.48	31.32	7.59	35.75	43.64	54.00	-10.36	Average
5208.600	81.96	31.37	7.55	35.69	85.19	54.00	31.19	Average

Test Mode :	802.11ac VHT80 CH42 5210MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.0GHz~5.26GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11ac VHT80 CH42(5210MHz)	Power rating:	DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

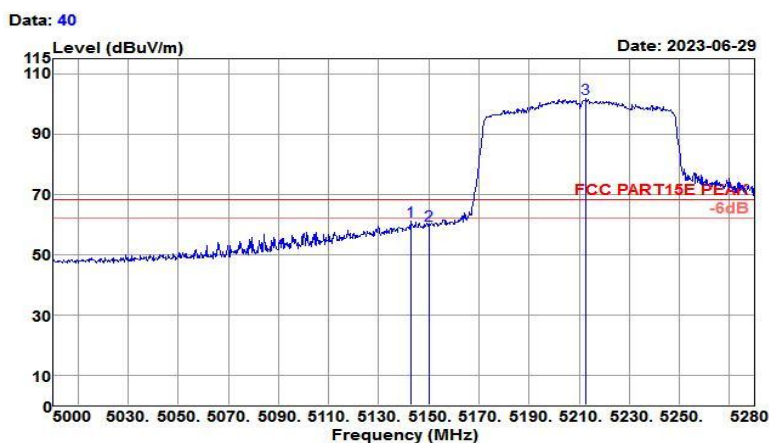

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5142.800	57.80	31.31	7.60	35.76	60.95	68.20	-7.25	Peak
5150.000	56.40	31.32	7.59	35.75	59.56	68.20	-8.64	Peak
5212.800	98.60	31.37	7.58	35.69	101.86	68.20	33.66	Peak

Test Mode :	802.11ac VHT80 CH42 5210MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.0GHz~5.26GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11ac VHT80 CH42(5210MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

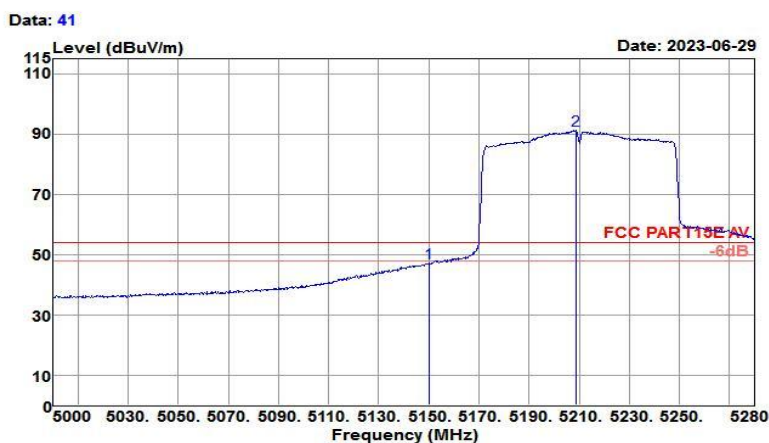

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5150.000	43.85	31.32	7.59	35.75	47.01	54.00	-6.99	Average
5208.600	88.01	31.37	7.55	35.69	91.24	54.00	37.24	Average

Test Mode :	802.11ac VHT80 CH58 5290MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.0GHz~5.26GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11ac VHT80 CH58(5290MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

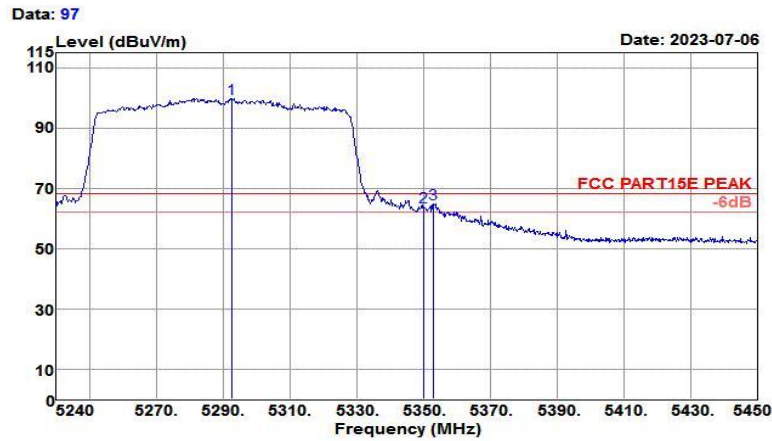

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5292.710	95.96	31.43	8.13	35.61	99.91	68.20	31.71	Peak
5350.040	59.32	31.48	8.53	35.55	63.78	68.20	-4.42	Peak
5352.980	60.47	31.48	8.55	35.55	64.95	68.20	-3.25	Peak

Test Mode :	802.11ac VHT80 CH58 5290MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.0GHz~5.26GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11ac VHT80 CH58(5290MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

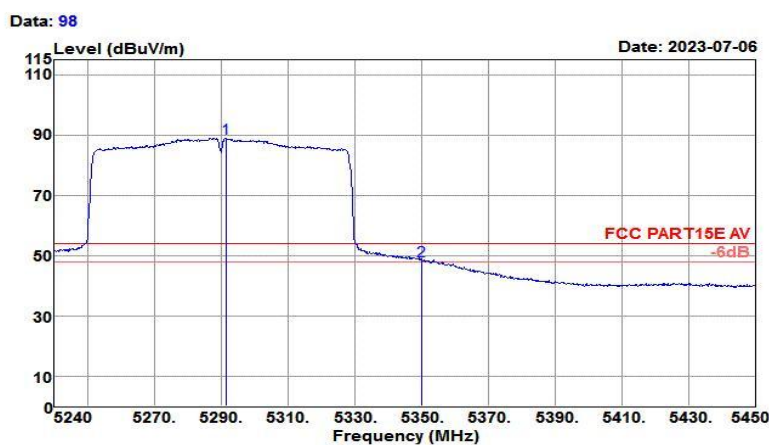

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5291.450	85.04	31.43	8.13	35.61	88.99	54.00	34.99	Average
5350.000	43.87	31.48	8.53	35.55	48.33	54.00	-5.67	Average

Test Mode :	802.11ac VHT80 CH58 5290MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.0GHz~5.26GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11ac VHT80 CH58(5290MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

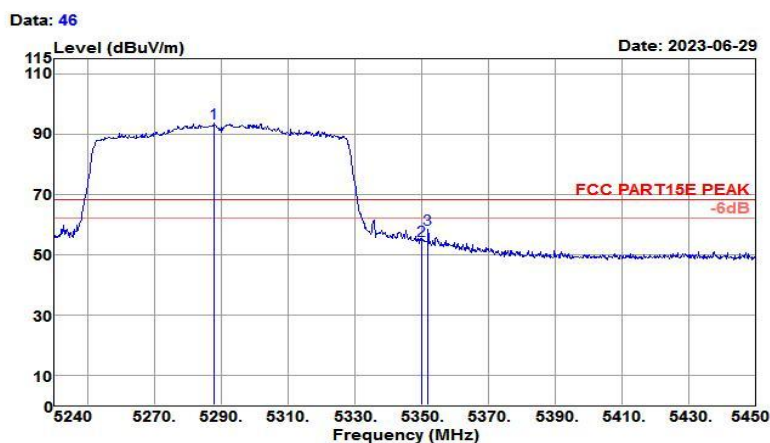

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5288.090	89.68	31.43	8.10	35.61	93.60	68.20	25.40	Peak
5350.000	50.08	31.48	8.53	35.55	54.54	68.20	-13.66	Peak
5351.930	53.78	31.48	8.55	35.55	58.26	68.20	-9.94	Peak

Test Mode :	802.11ac VHT80 CH58 5290MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.0GHz~5.26GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11ac VHT80 CH58(5290MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

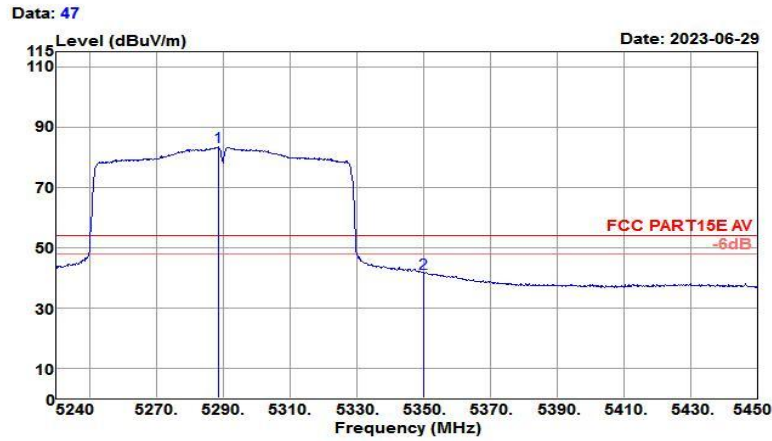

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5288.720	79.42	31.43	8.11	35.61	83.35	54.00	29.35	Average
5350.000	37.11	31.48	8.53	35.55	41.57	54.00	-12.43	Average

Test Mode :	802.11ac VHT80 CH106 5530MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.35GHz~5.59GHz	Polarization :	Horizontal


Test Site : 3m Chamber
 Temp/Humi : 23℃/61%
 Tested by : Jack
 Pol/Phase : HORIZONTAL
 Test Mode : 802.11ac VHT80 CH106(5530MHz) Power rating: DC 15V
 EUT : Digital Video Monitor
 Comment :
 Model No. : DVM-D1

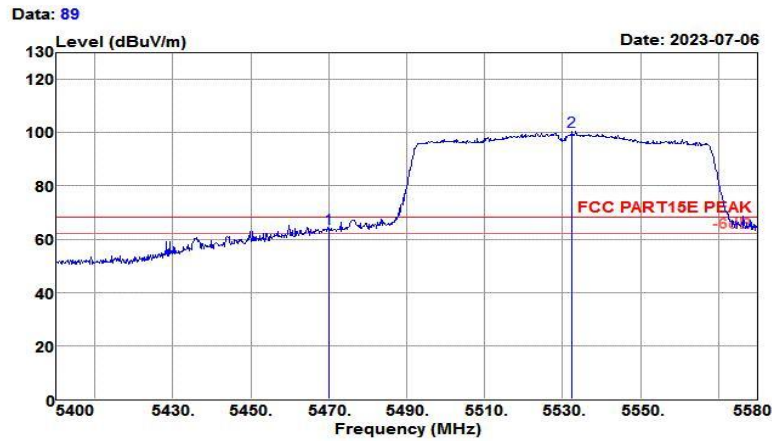

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5470.000	59.09	31.58	8.67	35.43	63.91	68.20	-4.29	Peak
5532.480	95.75	31.65	8.48	35.37	100.51	68.20	32.31	Peak

Test Mode :	802.11ac VHT80 CH106 5530MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.35GHz~5.59GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11ac VHT80 CH106(5530MHz)	Power rating:	DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

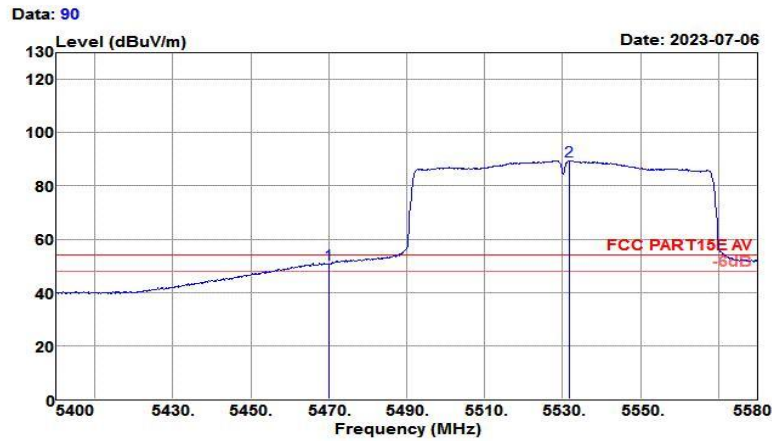

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5470.000	45.95	31.58	8.67	35.43	50.77	54.00	-3.23	Average
5531.580	84.70	31.65	8.49	35.37	89.47	54.00	35.47	Average

Test Mode :	802.11ac VHT80 CH106 5530MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.35GHz~5.59GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11ac VHT80 CH106(5530MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

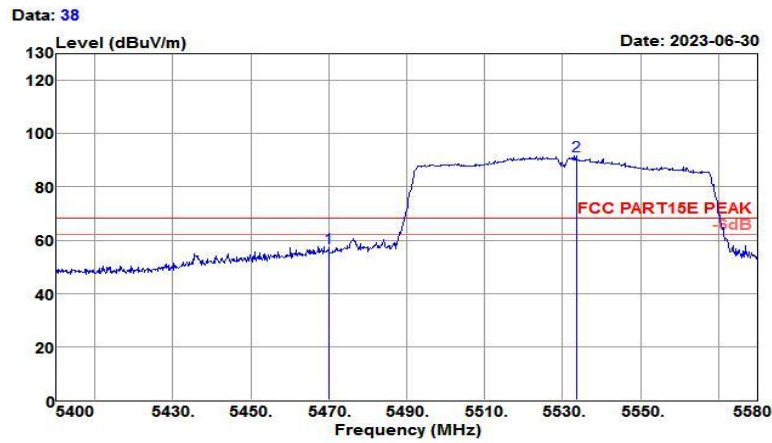

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5470.000	52.49	31.58	8.67	35.43	57.31	68.20	-10.89	Peak
5533.560	86.76	31.65	8.48	35.37	91.52	68.20	23.32	Peak

Test Mode :	802.11ac VHT80 CH106 5530MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.35GHz~5.59GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11ac VHT80 CH106(5530MHz)	Power rating:	DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

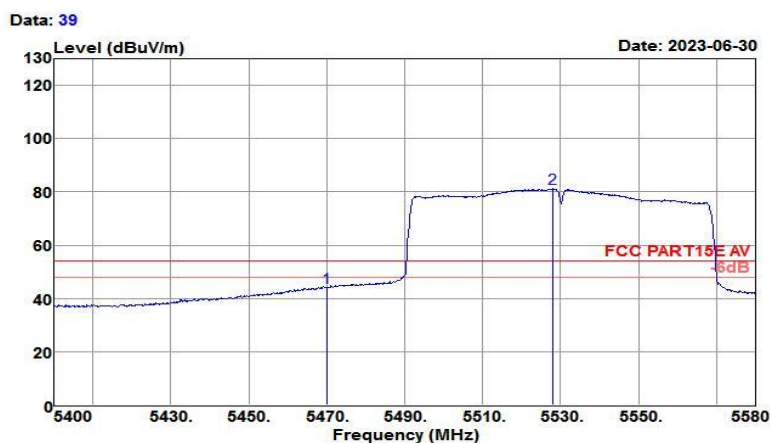


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5470.000	39.18	31.58	8.67	35.43	44.00	54.00	-10.00	Average
5527.980	76.40	31.64	8.50	35.37	81.17	54.00	27.17	Average

Test Mode :	802.11ac VHT80 CH122 5610MHz	Temperature :	21~23°C
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.35GHz~5.765GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23°C/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11ac VHT80 CH122(5610MHz)	Power rating:	DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		


Data: 41

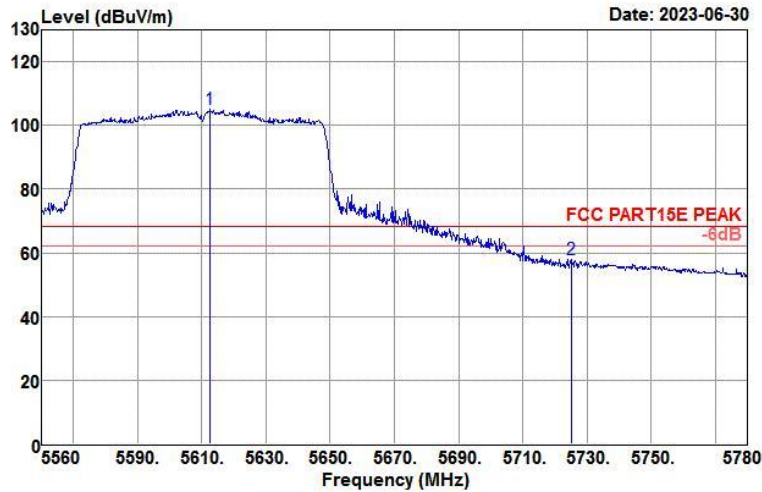

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5612.580	100.43	31.78	8.18	35.29	105.10	68.20	36.90	Peak
5725.000	53.82	31.96	7.29	35.18	57.89	68.20	-10.31	Peak

Test Mode :	802.11ac VHT80 CH122 5610MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.35GHz~5.765GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11ac VHT80 CH122(5610MHz)	Power rating:	DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

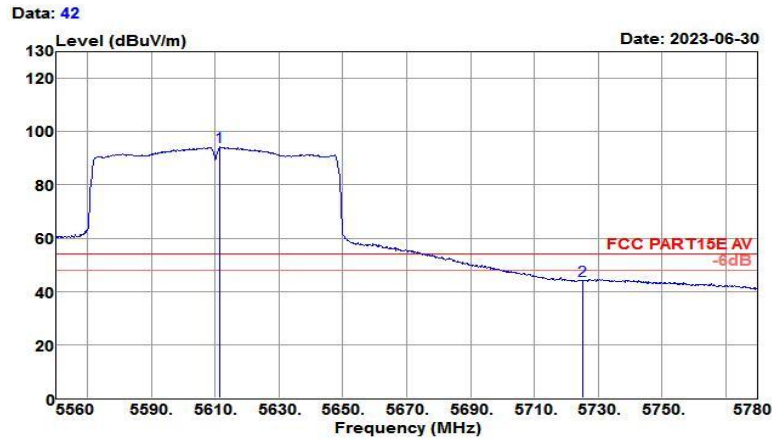

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5611.480	89.49	31.78	8.19	35.29	94.17	54.00	40.17	Average
5725.000	40.18	31.96	7.29	35.18	44.25	54.00	-9.75	Average

Test Mode :	802.11ac VHT80 CH122 5610MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.35GHz~5.765GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11ac VHT80 CH122(5610MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

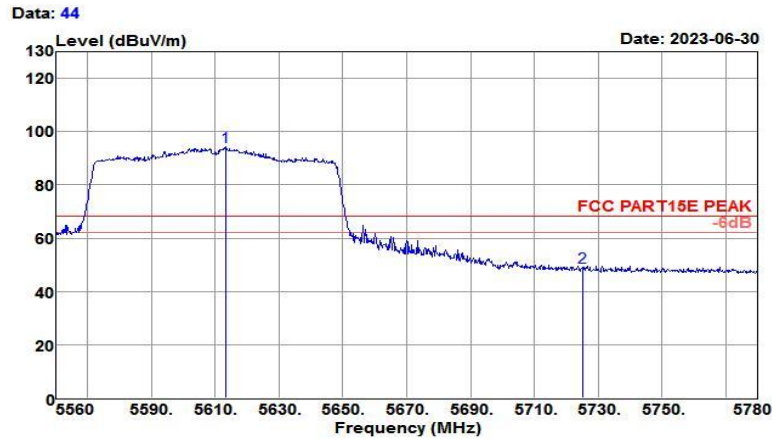

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5613.460	89.50	31.78	8.17	35.29	94.16	68.20	25.96	Peak
5725.000	44.99	31.96	7.29	35.18	49.06	68.20	-19.14	Peak

Test Mode :	802.11ac VHT80 CH122 5610MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.35GHz~5.765GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11ac VHT80 CH122(5610MHz)	Power rating:	DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

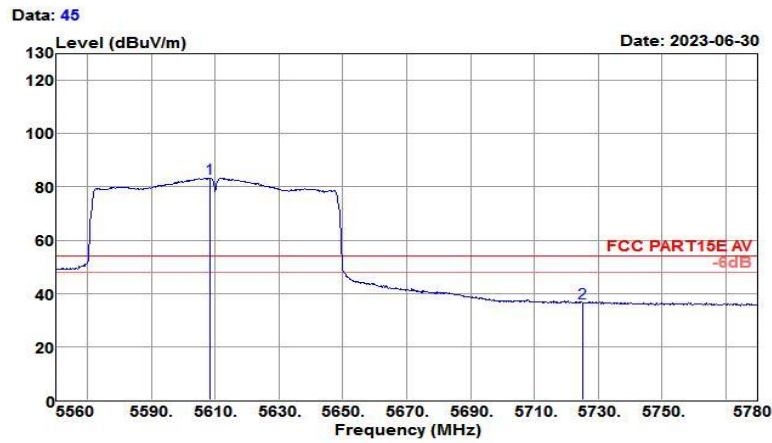


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5608.180	78.64	31.77	8.22	35.29	83.34	54.00	29.34	Average
5725.000	32.53	31.96	7.29	35.18	36.60	54.00	-17.40	Average

Test Mode :	802.11ac VHT80 CH138 5690MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.35GHz~5.765GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11ac VHT80 CH138(5690MHz)	Power rating:	DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

Data: 27

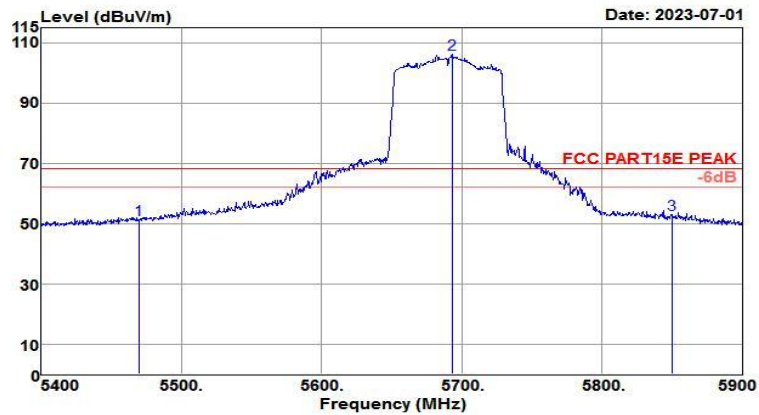


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5470.000	46.45	31.58	8.67	35.43	51.27	68.20	-16.93	Peak
5693.500	101.97	31.91	7.54	35.21	106.21	68.20	38.01	Peak
5850.000	48.69	32.16	7.10	35.05	52.90	68.20	-15.30	Peak

Test Mode :	802.11ac VHT80 CH138 5690MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.35GHz~5.765GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11ac VHT80 CH138(5690MHz)	Power rating:	DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		


Data: 28

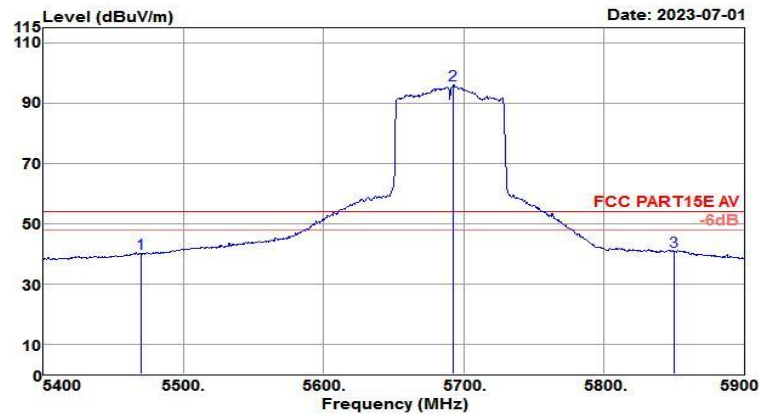

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5470.000	35.18	31.58	8.67	35.43	40.00	54.00	-14.00	Average
5692.500	91.85	31.91	7.55	35.21	96.10	54.00	42.10	Average
5850.000	36.39	32.16	7.10	35.05	40.60	54.00	-13.40	Average

Test Mode :	802.11ac VHT80 CH138 5690MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.35GHz~5.765GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11ac VHT80 CH138(5690MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

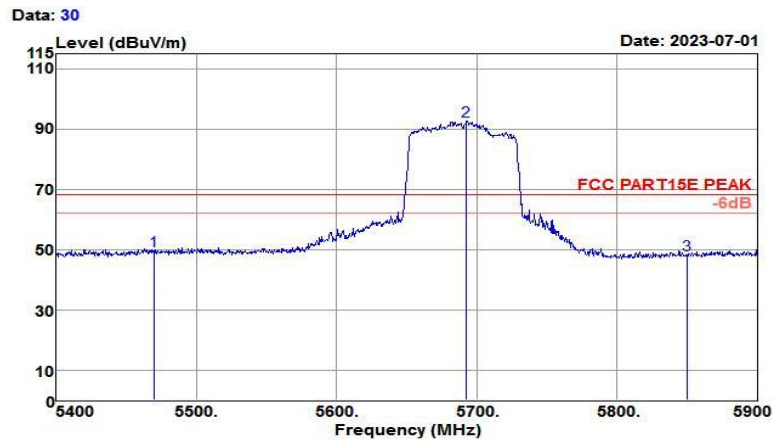

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5470.000	44.68	31.58	8.67	35.43	49.50	68.20	-18.70	Peak
5692.500	88.31	31.91	7.55	35.21	92.56	68.20	24.36	Peak
5850.000	44.13	32.16	7.10	35.05	48.34	68.20	-19.86	Peak

Test Mode :	802.11ac VHT80 CH138 5690MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.35GHz~5.765GHz	Polarization :	Vertical


Test Site : 3m Chamber
 Temp/Humi : 23℃/61%
 Tested by : Jack
 Pol/Phase : VERTICAL
 Test Mode : 802.11ac VHT80 CH138(5690MHz) Power rating: DC 15V
 EUT : Digital Video Monitor
 Comment :
 Model No. : DVM-D1

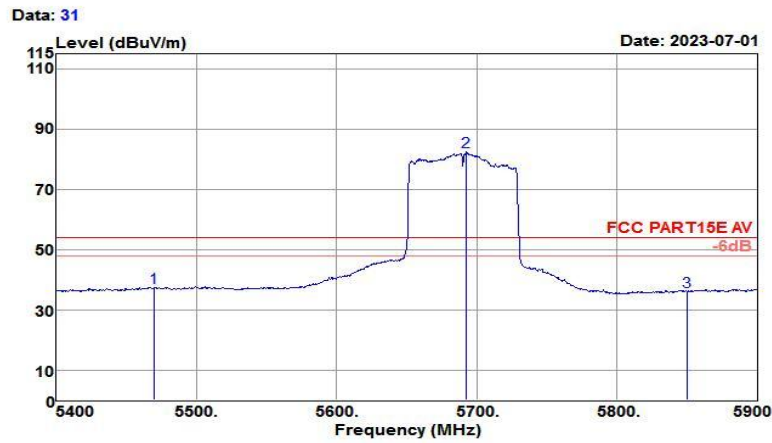

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5470.000	32.50	31.58	8.67	35.43	37.32	54.00	-16.68	Average
5692.500	78.11	31.91	7.55	35.21	82.36	54.00	28.36	Average
5850.000	31.91	32.16	7.10	35.05	36.12	54.00	-17.88	Average

Test Mode :	802.11ac VHT80 CH155 5775MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.6GHz~5.80GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11ac VHT80 CH155(5775MHz)	Power rating:	DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

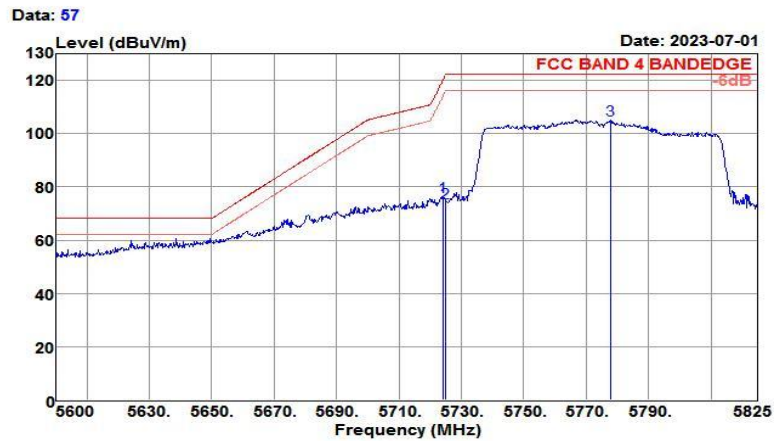

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5723.975	72.39	31.96	7.30	35.18	76.47	119.86	-43.39	Peak
5725.000	69.94	31.96	7.29	35.18	74.01	122.20	-48.19	Peak
5777.750	101.31	32.04	6.88	35.12	105.11	122.20	-17.09	Peak

Test Mode :	802.11ac VHT80 CH155 5775MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.6GHz~5.80GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11ac VHT80 CH155(5775MHz)	Power rating:	DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

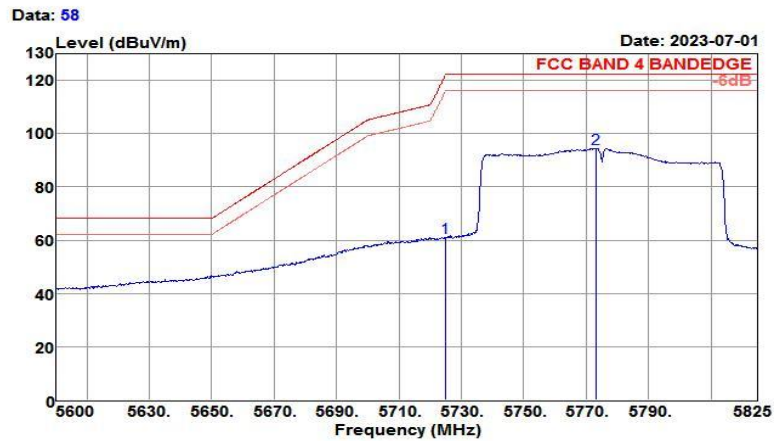

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5725.000	56.73	31.96	7.29	35.18	60.80	122.20	-61.40	Average
5773.025	90.65	32.04	6.91	35.13	94.47	122.20	-27.73	Average

Test Mode :	802.11ac VHT80 CH155 5775MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.6GHz~5.80GHz	Polarization :	Vertical


Test Site : 3m Chamber
 Temp/Humi : 23℃/61%
 Tested by : Jack
 Pol/Phase : VERTICAL
 Test Mode : 802.11ac VHT80 CH155(5775MHz) Power rating: DC 15V
 EUT : Digital Video Monitor
 Comment :
 Model No. : DVM-D1

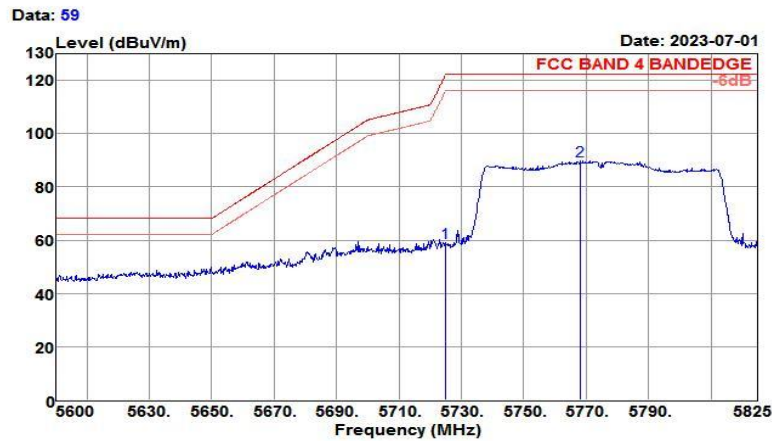

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5725.000	54.89	31.96	7.29	35.18	58.96	122.20	-63.24	Peak
5768.300	86.09	32.03	6.95	35.13	89.94	122.20	-32.26	Peak

Test Mode :	802.11ac VHT80 CH155 5775MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.6GHz~5.80GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11ac VHT80 CH155(5775MHz)	Power rating:	DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

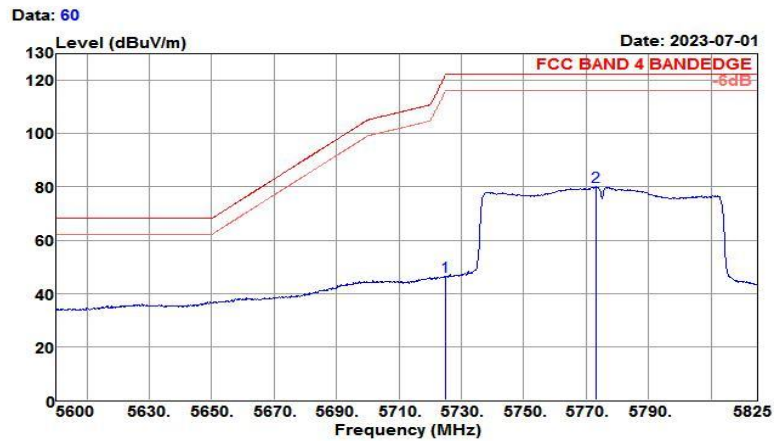

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5725.000	42.20	31.96	7.29	35.18	46.27	122.20	-75.93	Average
5773.025	76.19	32.04	6.91	35.13	80.01	122.20	-42.19	Average

Test Mode :	802.11ac VHT80 CH155 5775MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.75GHz~5.95GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11ac VHT80 CH155(5775MHz)	Power rating:	DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

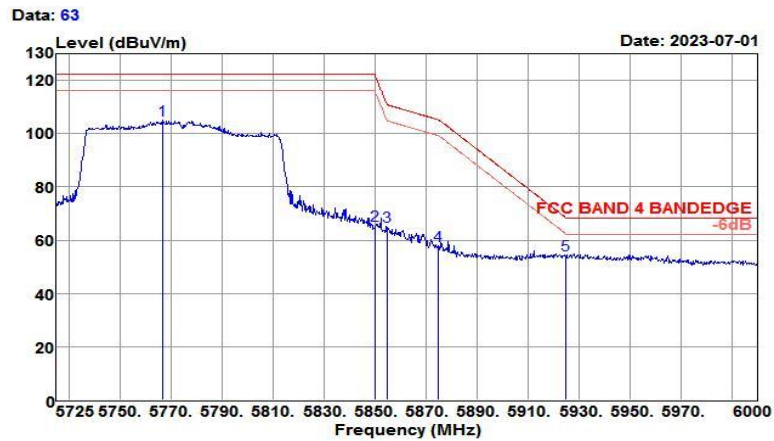

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5767.075	101.13	32.03	6.96	35.13	104.99	122.20	-17.21	Peak
5850.000	61.56	32.16	7.10	35.05	65.77	122.20	-56.43	Peak
5855.000	61.03	32.17	7.14	35.05	65.29	110.80	-45.51	Peak
5875.000	53.60	32.20	7.30	35.03	58.07	105.20	-47.13	Peak
5925.000	49.49	32.28	7.70	34.98	54.49	68.20	-13.71	Peak

Test Mode :	802.11ac VHT80 CH155 5775MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.75GHz~5.95GHz	Polarization :	Horizontal


Test Site : 3m Chamber
 Temp/Humi : 23℃/61%
 Tested by : Jack
 Pol/Phase : HORIZONTAL
 Test Mode : 802.11ac VHT80 CH155(5775MHz) Power rating: DC 15V
 EUT : Digital Video Monitor
 Comment :
 Model No. : DVM-D1

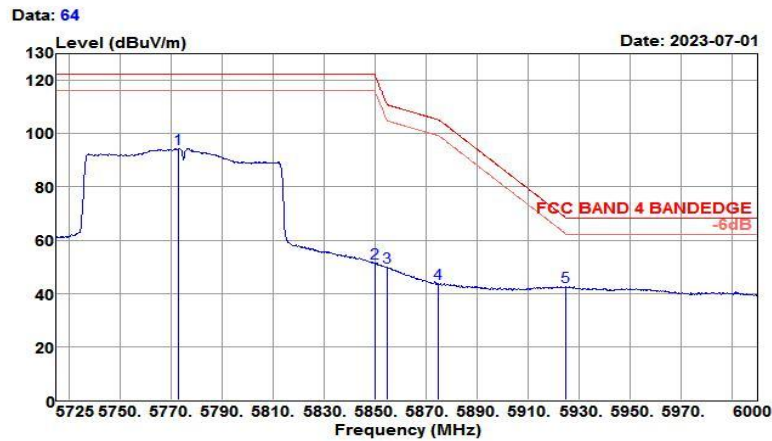

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5773.125	90.70	32.04	6.91	35.13	94.52	122.20	-27.68	Average
5850.000	47.28	32.16	7.10	35.05	51.49	122.20	-70.71	Average
5855.000	45.69	32.17	7.14	35.05	49.95	110.80	-60.85	Average
5875.000	39.34	32.20	7.30	35.03	43.81	105.20	-61.39	Average
5925.000	37.69	32.28	7.70	34.98	42.69	68.20	-25.51	Average

Test Mode :	802.11ac VHT80 CH155 5775MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.75GHz~5.95GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11ac VHT80 CH155(5775MHz)	Power rating:	DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

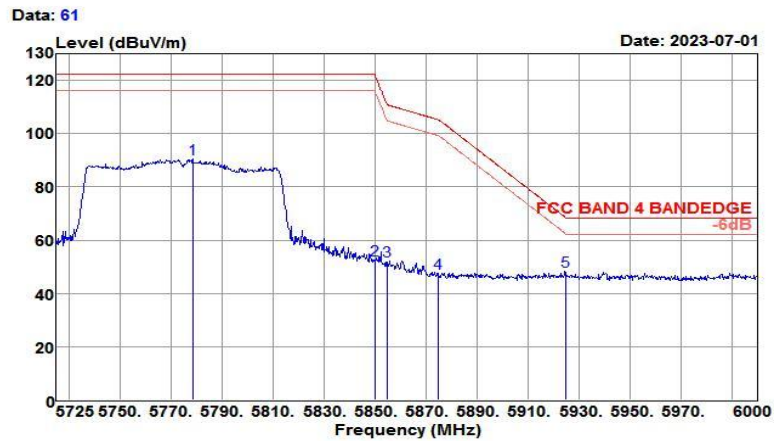

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5778.625	86.55	32.05	6.87	35.12	90.35	122.20	-31.85	Peak
5850.000	48.42	32.16	7.10	35.05	52.63	122.20	-69.57	Peak
5855.000	47.84	32.17	7.14	35.05	52.10	110.80	-58.70	Peak
5875.000	42.95	32.20	7.30	35.03	47.42	105.20	-57.78	Peak
5925.000	43.18	32.28	7.70	34.98	48.18	68.20	-20.02	Peak

Test Mode :	802.11ac VHT80 CH155 5775MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	5.75GHz~5.95GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11ac VHT80 CH155(5775MHz)	Power rating:	DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

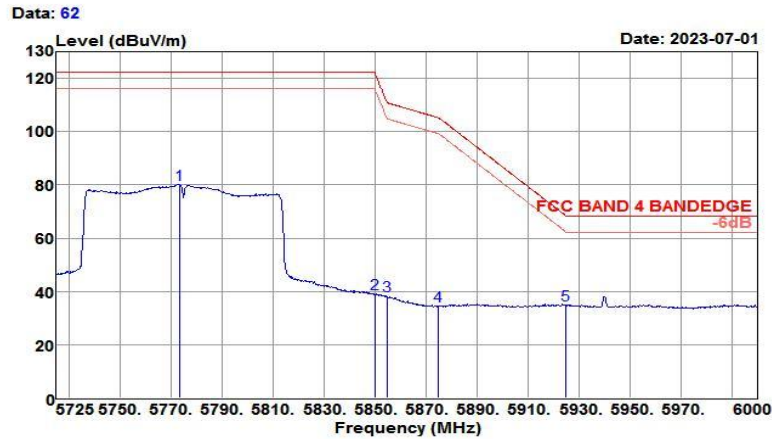


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5773.400	76.31	32.04	6.91	35.13	80.13	122.20	-42.07	Average
5850.000	35.10	32.16	7.10	35.05	39.31	122.20	-82.89	Average
5855.000	33.94	32.17	7.14	35.05	38.20	110.80	-72.60	Average
5875.000	30.17	32.20	7.30	35.03	34.64	105.20	-70.56	Average
5925.000	29.82	32.28	7.70	34.98	34.82	68.20	-33.38	Average

3.4.5 Test Result of Radiated Spurious Emission (1GHz ~ 10th Harmonic)


Test Mode :	802.11a CH36 5180MHz	Temperature :	21~23°C
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 24°C/62%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11a CH36 (5180MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

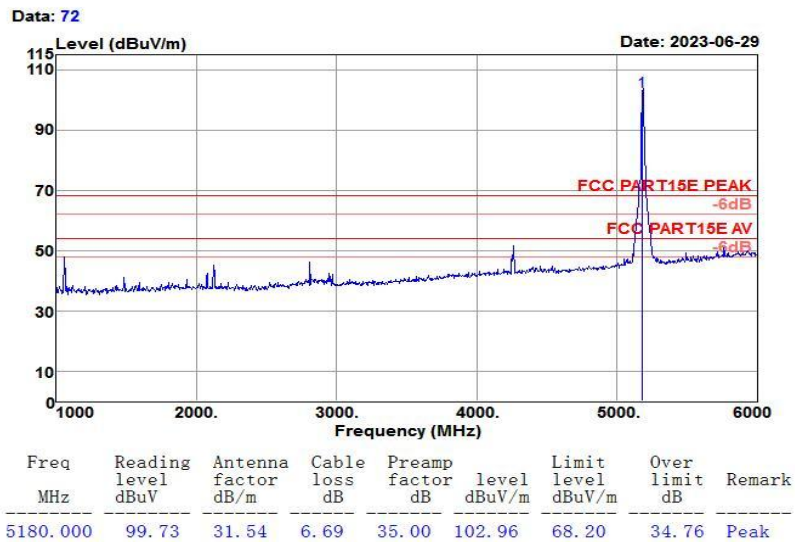

Test Mode :	802.11a CH36 5180MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11a CH36 (5180MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

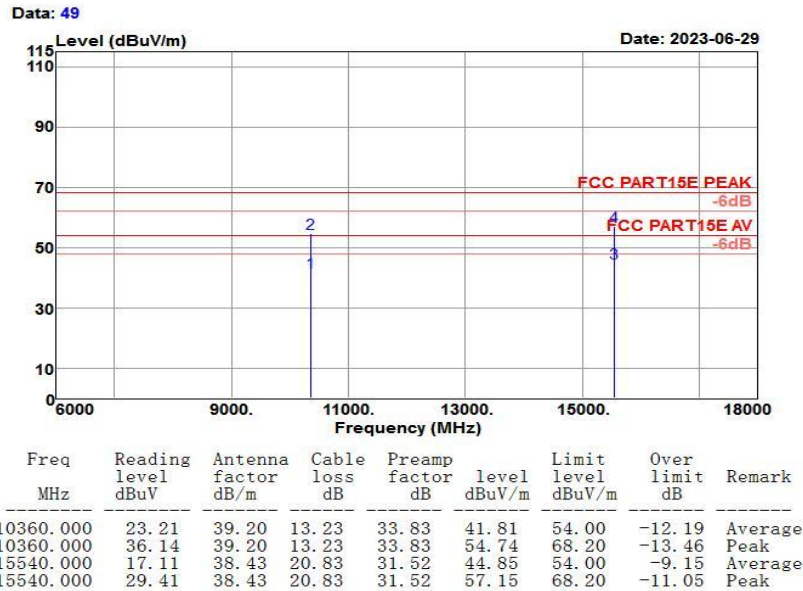


Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11a CH36 5180MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 24℃/62%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11a CH36 (5180MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		


Data: 71

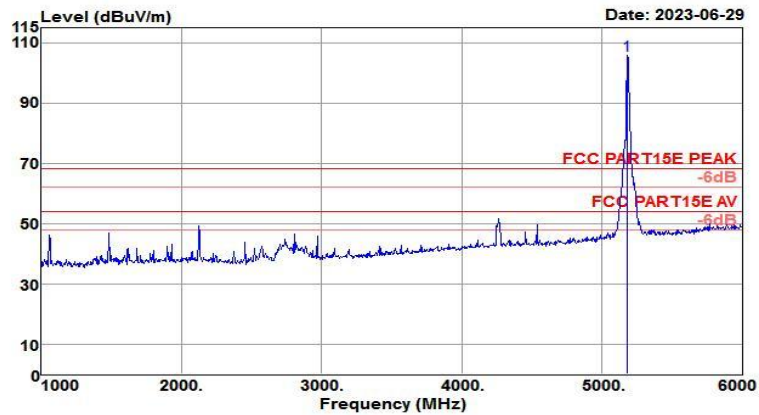

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5180.000	102.51	31.54	6.69	35.00	105.74	68.20	37.54	Peak

Test Mode :	802.11a CH36 5180MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11a CH36 (5180MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

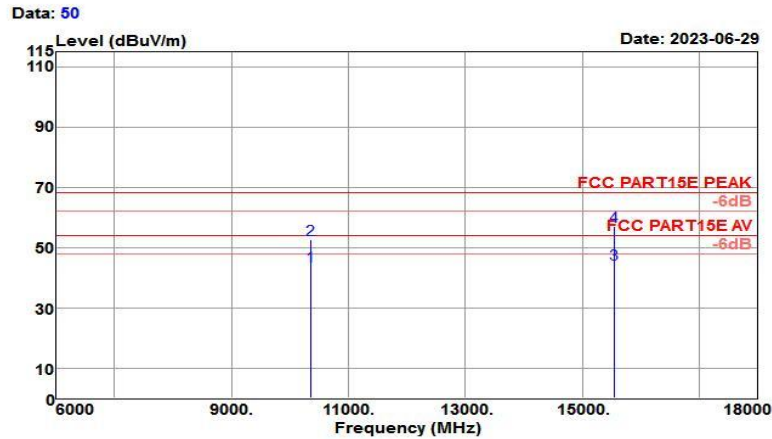


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
10360.000	25.05	39.20	13.23	33.83	43.65	54.00	-10.35	Average
10360.000	34.02	39.20	13.23	33.83	52.62	68.20	-15.58	Peak
15540.000	16.78	38.43	20.83	31.52	44.52	54.00	-9.48	Average
15540.000	29.39	38.43	20.83	31.52	57.13	68.20	-11.07	Peak

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11a CH48 5240MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 24℃/62%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11a CH48 (5240MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

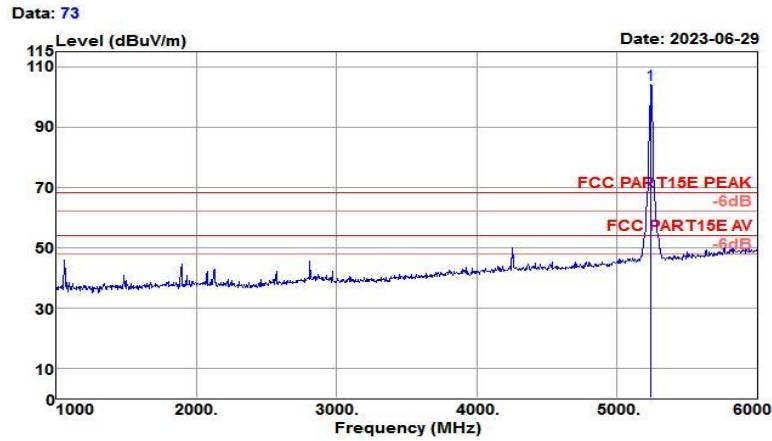


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5240.000	100.67	31.55	6.69	34.83	104.08	68.20	35.88	Peak

Test Mode :	802.11a CH48 5240MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11a CH48 (5240MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

Data: 52

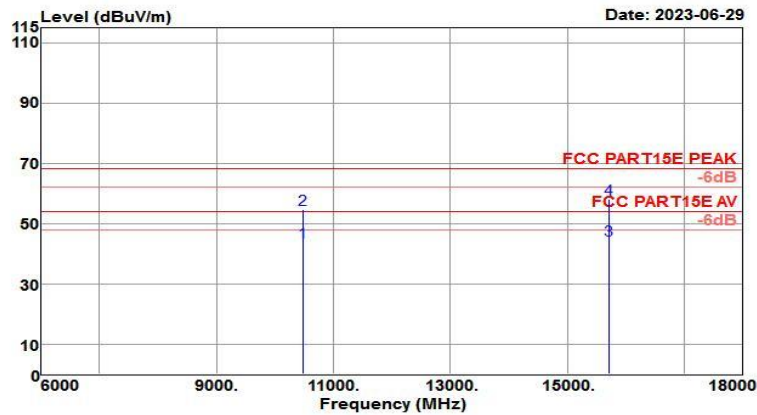


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
10480.000	24.71	39.37	13.32	33.68	43.72	54.00	-10.28	Average
10480.000	35.79	39.37	13.32	33.68	54.80	68.20	-13.40	Peak
15720.000	17.65	38.10	20.24	31.40	44.59	54.00	-9.41	Average
15720.000	31.22	38.10	20.24	31.40	58.16	68.20	-10.04	Peak

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11a CH48 5240MHz	Temperature :	21~23°C
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 24°C/62%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11a CH48 (5240MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

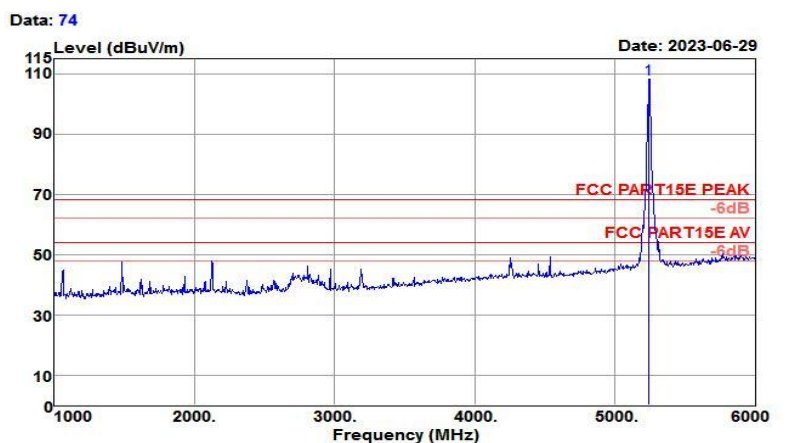

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5240.000	104.77	31.55	6.69	34.83	108.18	68.20	39.98	Peak

Test Mode :	802.11a CH48 5240MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11a CH48 (5240MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

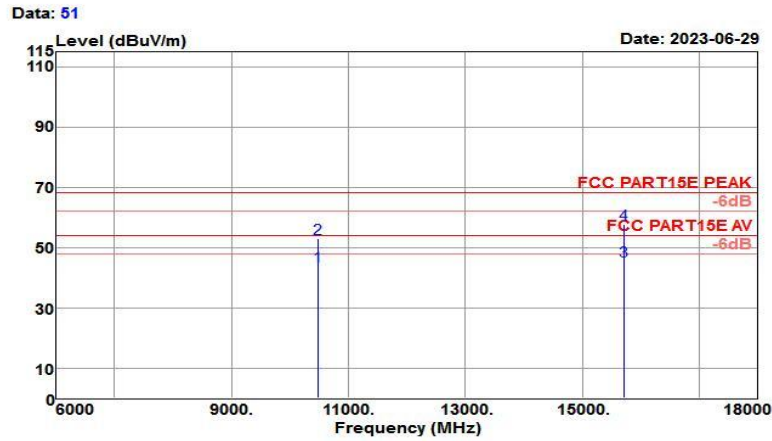


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
10480.000	24.73	39.37	13.32	33.68	43.74	54.00	-10.26	Average
10480.000	33.84	39.37	13.32	33.68	52.85	68.20	-15.35	Peak
15720.000	18.53	38.10	20.24	31.40	45.47	54.00	-8.53	Average
15720.000	30.80	38.10	20.24	31.40	57.74	68.20	-10.46	Peak

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11a CH64 5320MHz	Temperature :	21~23°C
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 24°C /62%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11a CH64 (5320MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

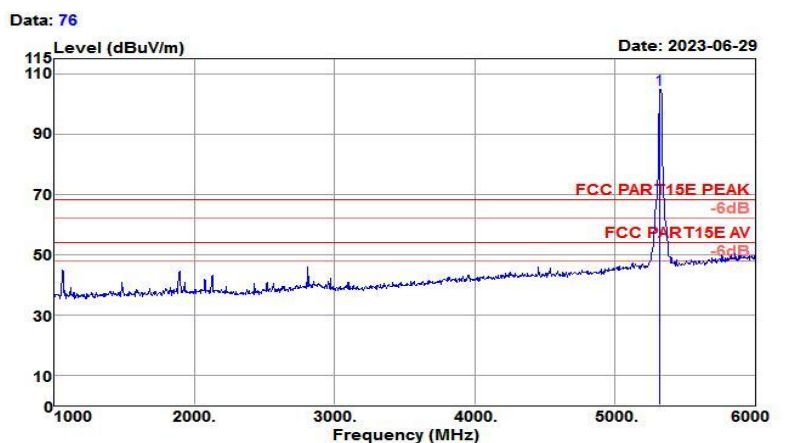

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5320.000	101.37	31.56	6.56	34.60	104.89	68.20	36.69	Peak

Test Mode :	802.11a CH64 5320MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11a CH64 (5320MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

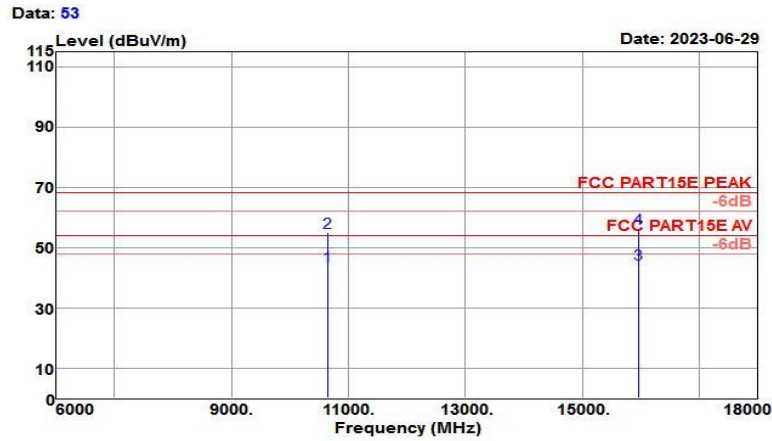


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
10640.000	23.78	39.54	13.86	33.47	43.71	54.00	-10.29	Average
10640.000	34.91	39.54	13.86	33.47	54.84	68.20	-13.36	Peak
15960.000	18.45	37.67	19.46	31.23	44.35	54.00	-9.65	Average
15960.000	30.38	37.67	19.46	31.23	56.28	68.20	-11.92	Peak

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11a CH64 5320MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 24℃/62%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11a CH64 (5320MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

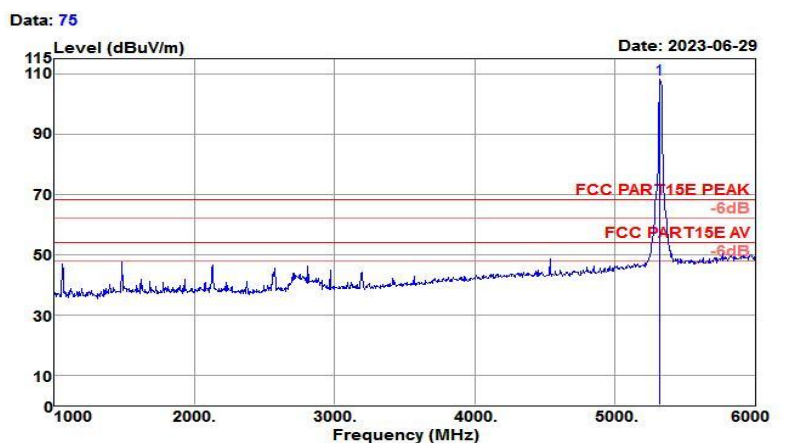

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5320.000	104.55	31.56	6.56	34.60	108.07	68.20	39.87	Peak

Test Mode :	802.11a CH64 5320MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11a CH64 (5320MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

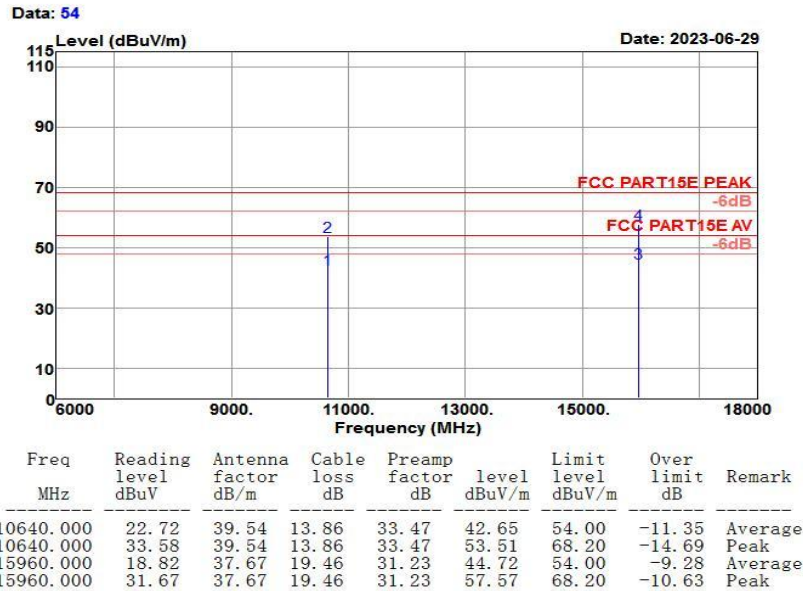

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11a CH100 5500MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11a CH100 (5500MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

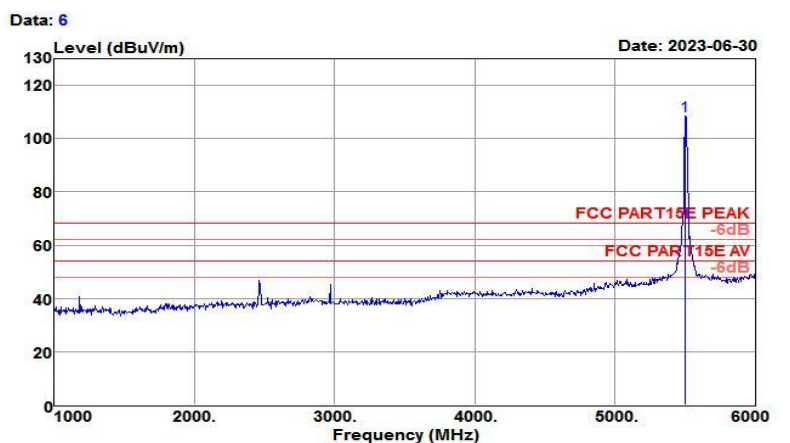

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5500.000	103.68	31.60	8.58	35.40	108.46	68.20	40.26	Peak

Test Mode :	802.11a CH100 5500MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11a CH100 (5500MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

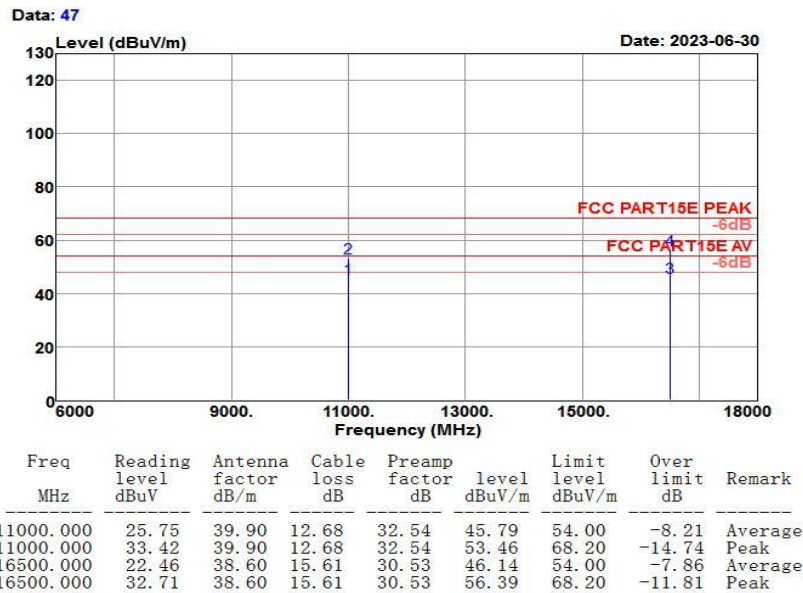

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11a CH100 5500MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11a CH100 (5500MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

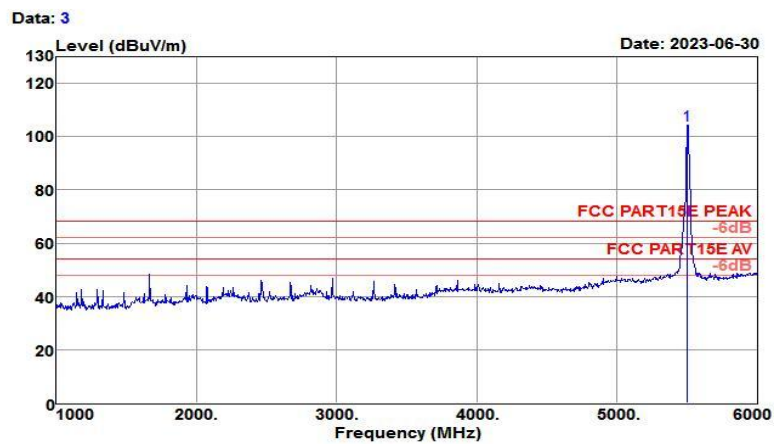

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5500.000	99.61	31.60	8.58	35.40	104.39	68.20	36.19	Peak

Test Mode :	802.11a CH100 5500MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11a CH100 (5500MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

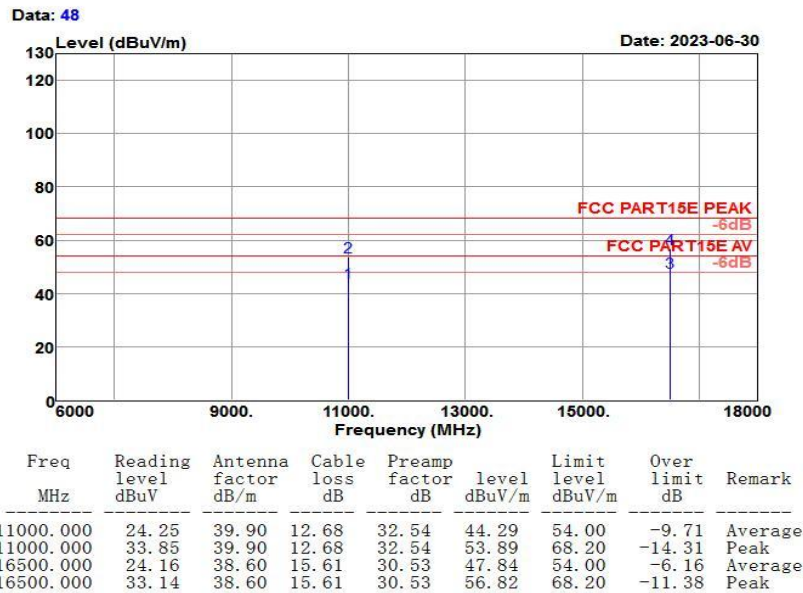

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11a CH116 5580MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11a CH100 (5500MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

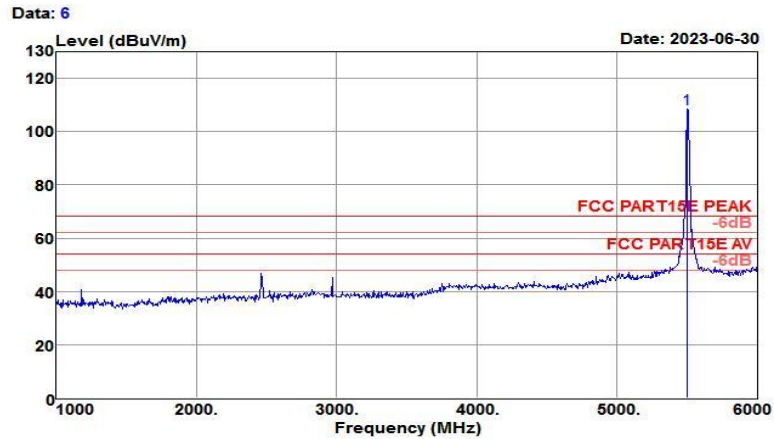

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5500.000	103.68	31.60	8.58	35.40	108.46	68.20	40.26	Peak

Test Mode :	802.11a CH116 5580MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11a CH116 (5580MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

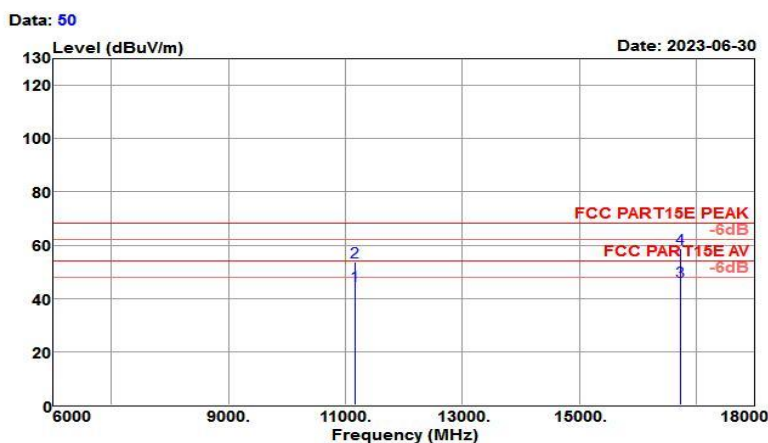


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
11160.000	24.84	39.84	12.90	32.67	44.91	54.00	-9.09	Average
11160.000	33.71	39.84	12.90	32.67	53.78	68.20	-14.42	Peak
16740.000	19.91	39.32	17.34	30.31	46.26	54.00	-7.74	Average
16740.000	32.17	39.32	17.34	30.31	58.52	68.20	-9.68	Peak

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11a CH116 5580MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11a CH116 (5580MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

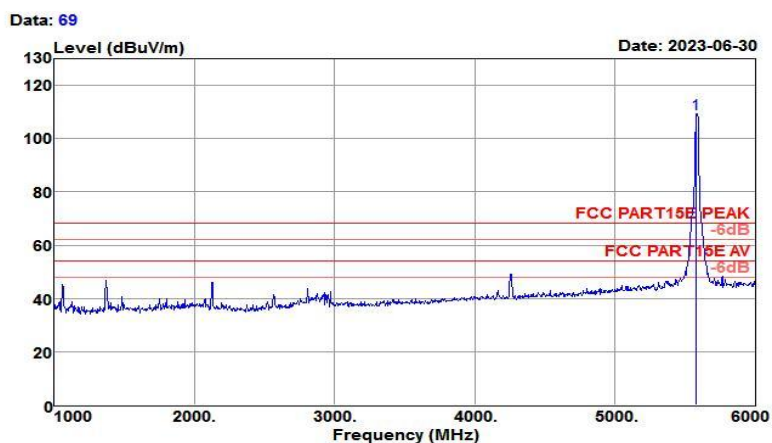

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5580.000	104.55	31.73	6.83	33.88	109.23	68.20	41.03	Peak

Test Mode :	802.11a CH116 5580MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11a CH116 (5580MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

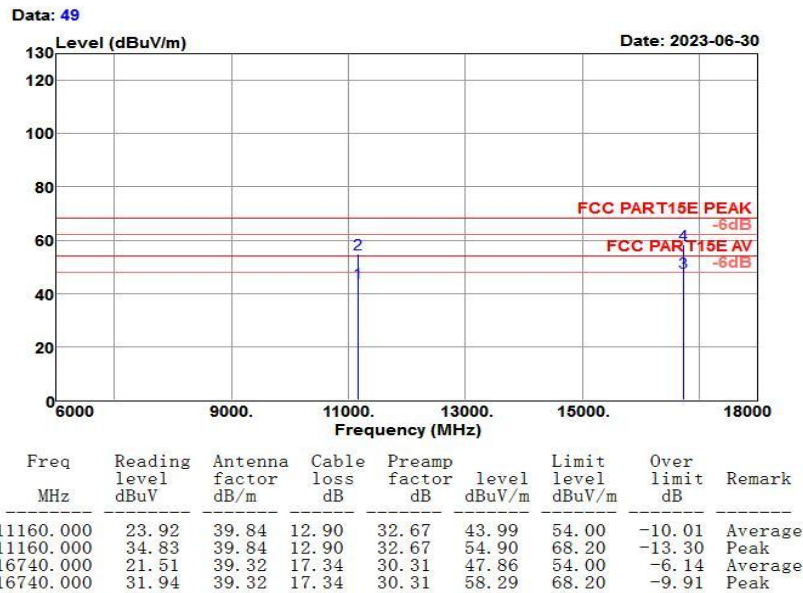

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11a CH140 5700MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11a CH140 (5700MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

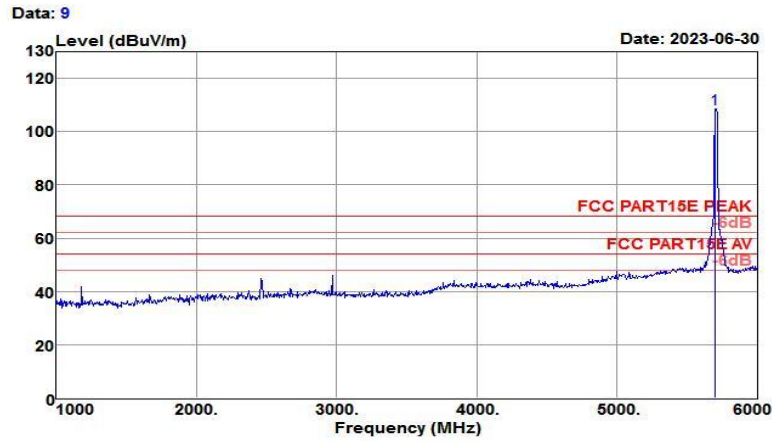

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5700.000	104.21	31.92	7.49	35.20	108.42	68.20	40.22	Peak

Test Mode :	802.11a CH140 5700MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11a CH140 (5700MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

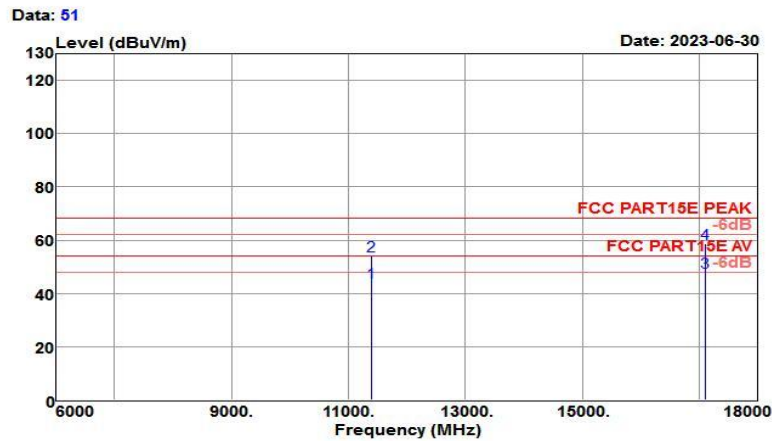


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
11400.000	23.86	39.74	13.22	32.85	43.97	54.00	-10.03	Average
11400.000	33.93	39.74	13.22	32.85	54.04	68.20	-14.16	Peak
17100.000	18.92	40.44	18.59	30.08	47.87	54.00	-6.13	Average
17100.000	29.84	40.44	18.59	30.08	58.79	68.20	-9.41	Peak

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11a CH140 5700MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11a CH140 (5700MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

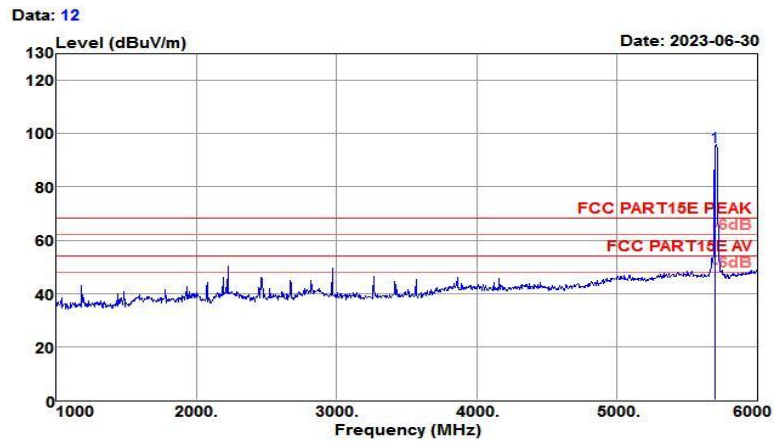

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5700.000	91.09	31.92	7.49	35.20	95.30	68.20	27.10	Peak

Test Mode :	802.11a CH140 5700MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11a CH140 (5700MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

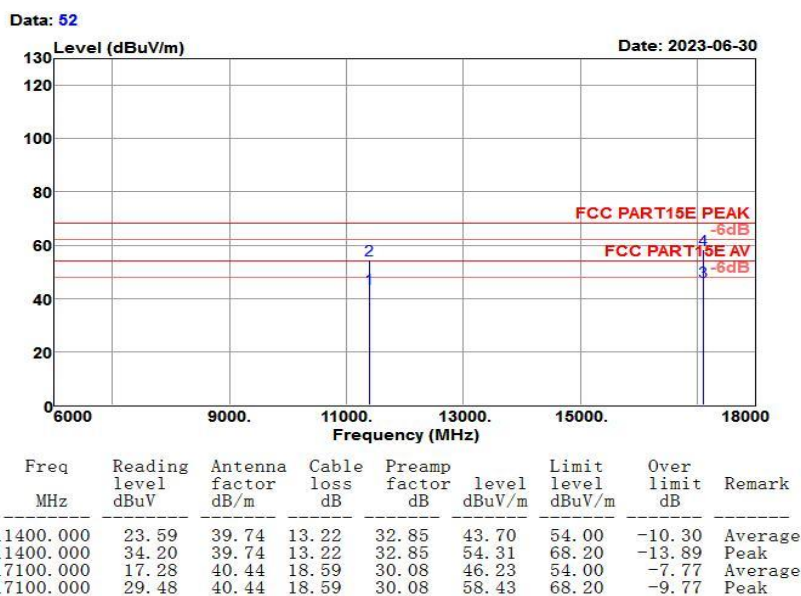

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11a CH140 5700MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11a CH140 (5700MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

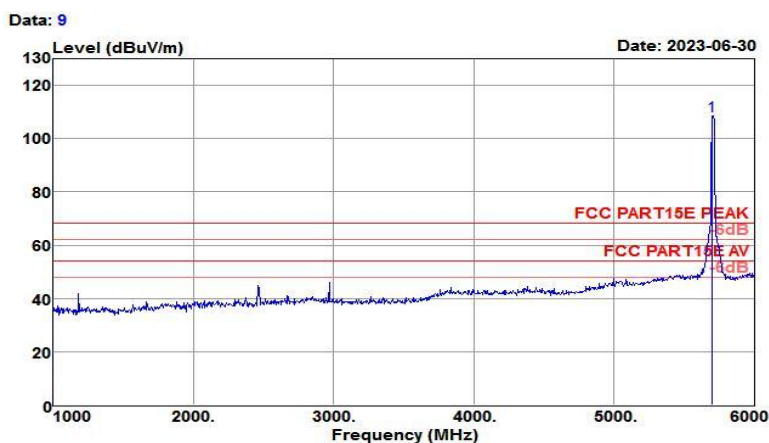

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5700.000	104.21	31.92	7.49	35.20	108.42	68.20	40.22	Peak

Test Mode :	802.11a CH144 5720MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11a CH144 (5720MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

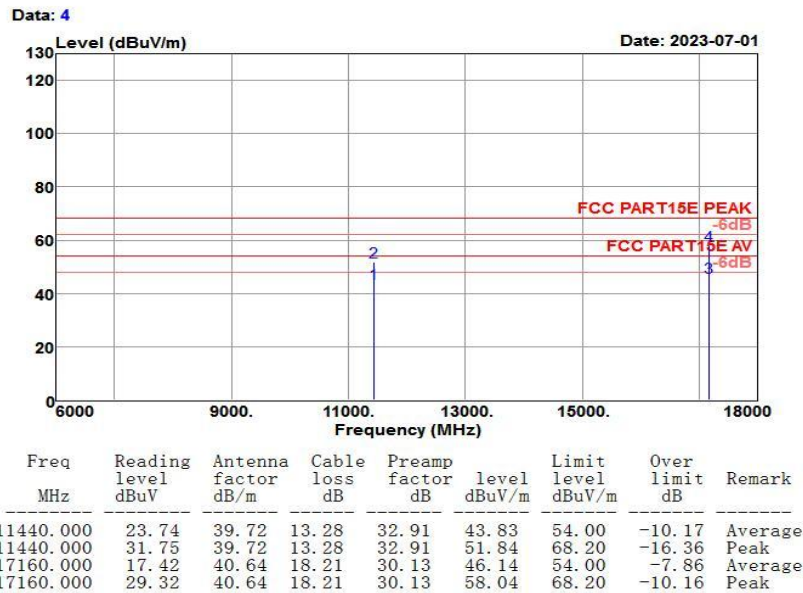

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11a CH144 5720MHz	Temperature :	21~23°C
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23°C/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11a CH144 (5720MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

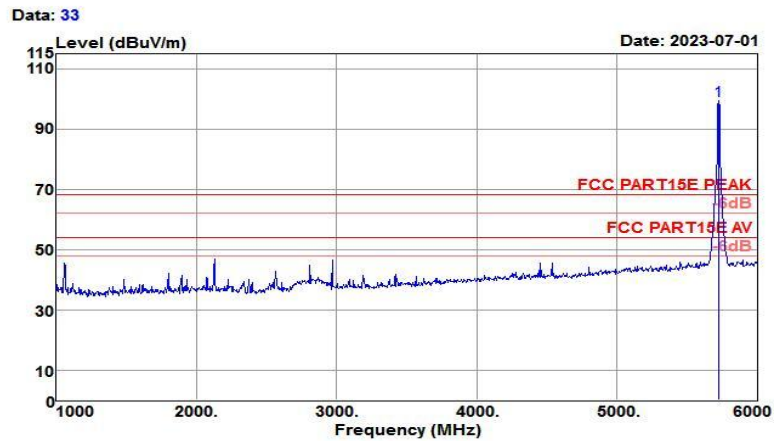

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5720.000	94.39	31.95	6.53	33.48	99.39	68.20	31.19	Peak

Test Mode :	802.11a CH144 5720MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11a CH144 (5720MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

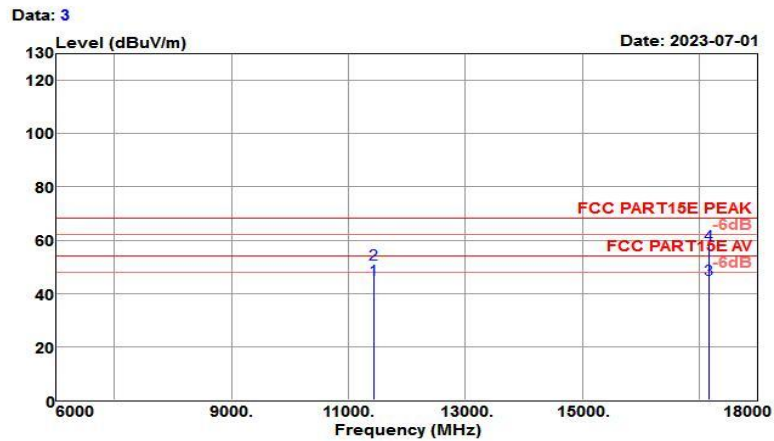


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
11440.000	25.27	39.72	13.28	32.91	45.36	54.00	-8.64	Average
11440.000	31.09	39.72	13.28	32.91	51.18	68.20	-17.02	Peak
17160.000	16.62	40.64	18.21	30.13	45.34	54.00	-8.66	Average
17160.000	29.41	40.64	18.21	30.13	58.13	68.20	-10.07	Peak

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11a CH149 5745MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11a CH149 (5745MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

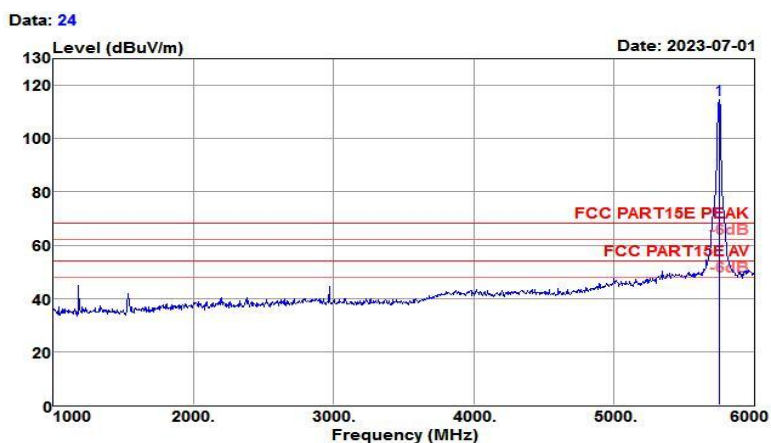

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5745.000	110.60	31.99	7.13	35.16	114.56	68.20	46.36	Peak

Test Mode :	802.11a CH149 5745MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11a CH149 (5745MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

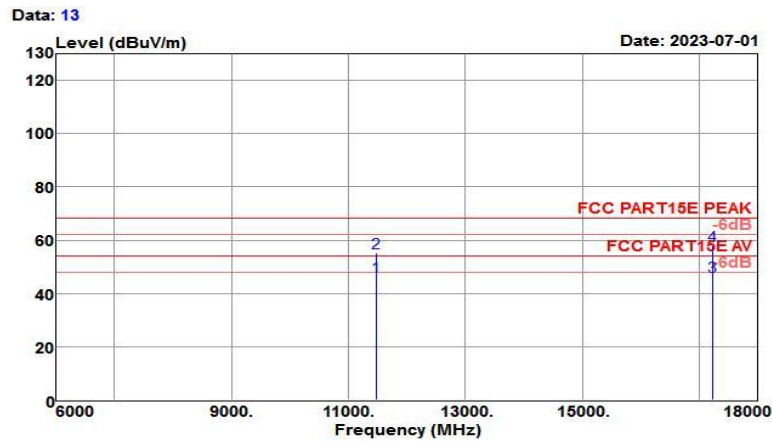


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
11490.000	26.37	39.70	13.35	32.91	46.51	54.00	-7.49	Average
11490.000	35.15	39.70	13.35	32.91	55.29	68.20	-12.91	Peak
17235.000	17.92	40.90	17.74	30.08	46.48	54.00	-7.52	Average
17235.000	29.41	40.90	17.74	30.08	57.97	68.20	-10.23	Peak

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11a CH149 5745MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11a CH149 (5745MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

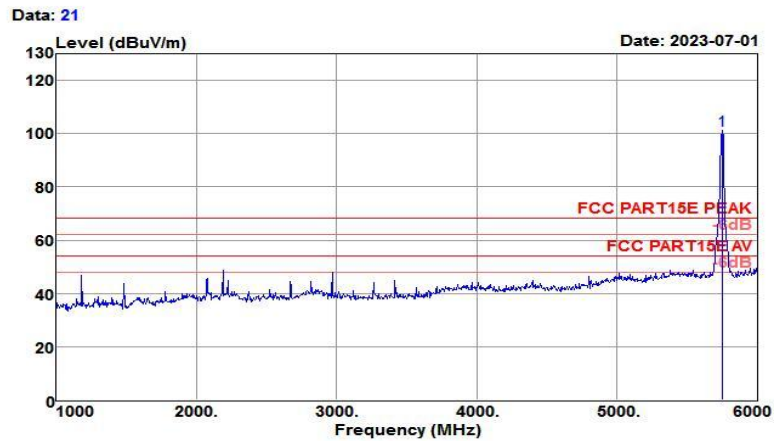

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5745.000	97.25	31.99	7.13	35.16	101.21	68.20	33.01	Peak

Test Mode :	802.11a CH149 5745MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11a CH149 (5745MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

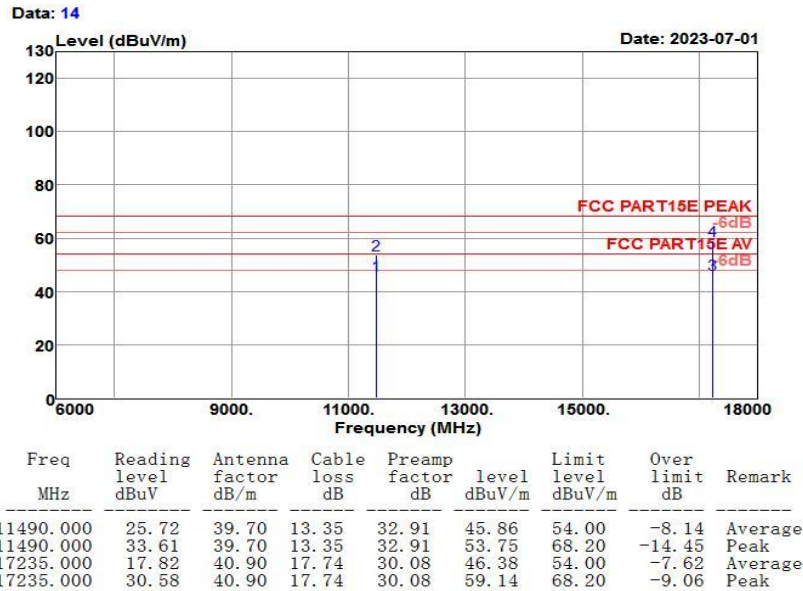

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11a CH157 5785MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11a CH157 (5785MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

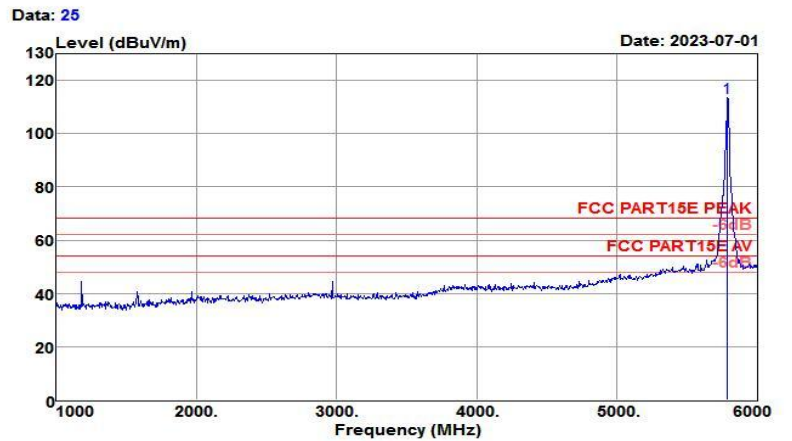

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5785.000	109.65	32.06	6.82	35.12	113.41	68.20	45.21	Peak

Test Mode :	802.11a CH157 5785MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11a CH157 (5785MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

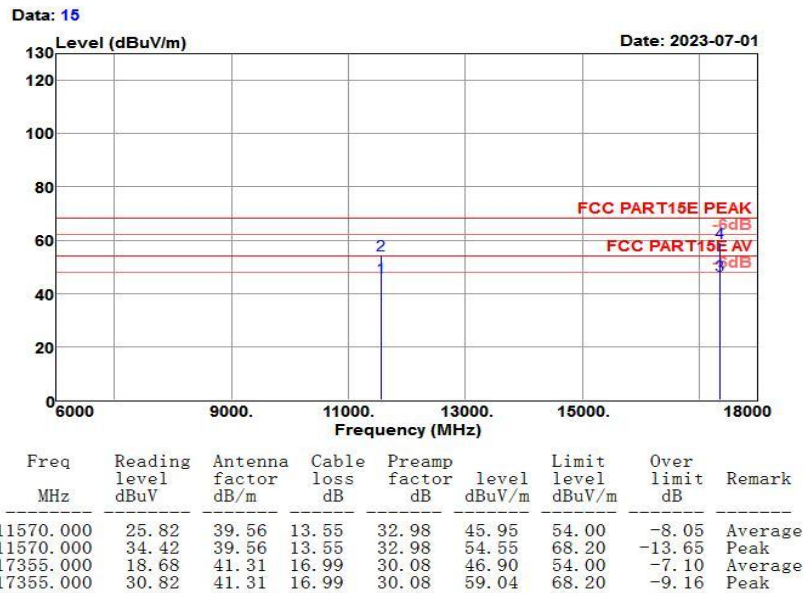

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11a CH157 5785MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11a CH157 (5785MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

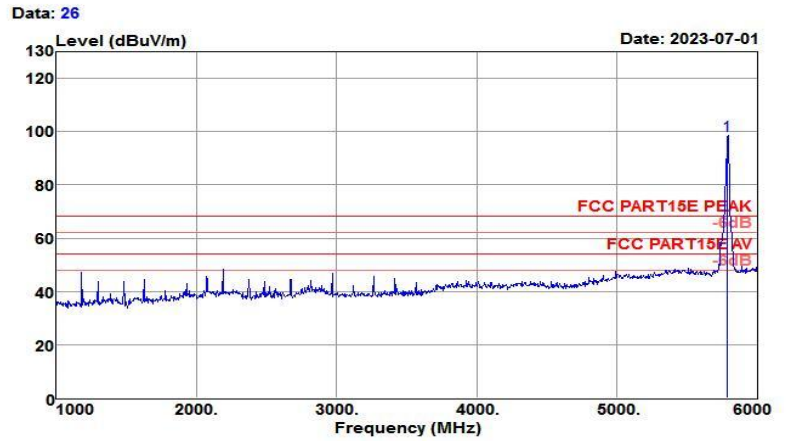

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5785.000	94.80	32.06	6.82	35.12	98.56	68.20	30.36	Peak

Test Mode :	802.11a CH157 5785MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11a CH157 (5785MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

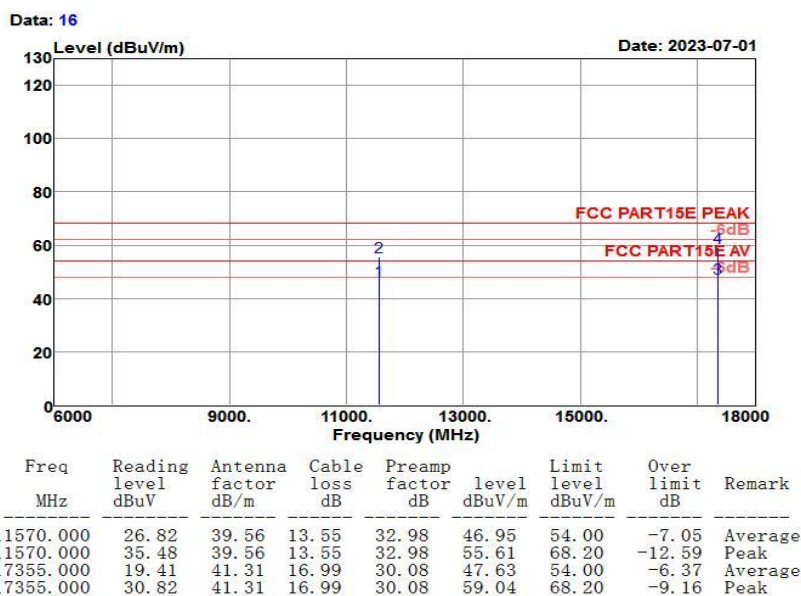

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11a CH165 5825MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11a CH165 (5825MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

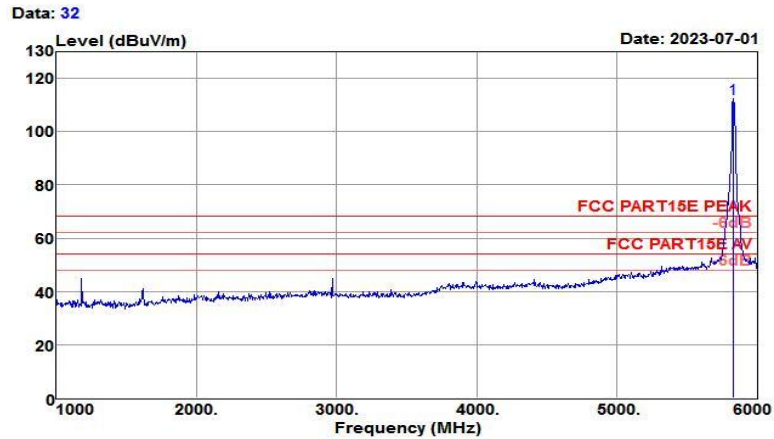

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5825.000	108.36	32.12	6.90	35.08	112.30	68.20	44.10	Peak

Test Mode :	802.11a CH165 5825MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11a CH165 (5825MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

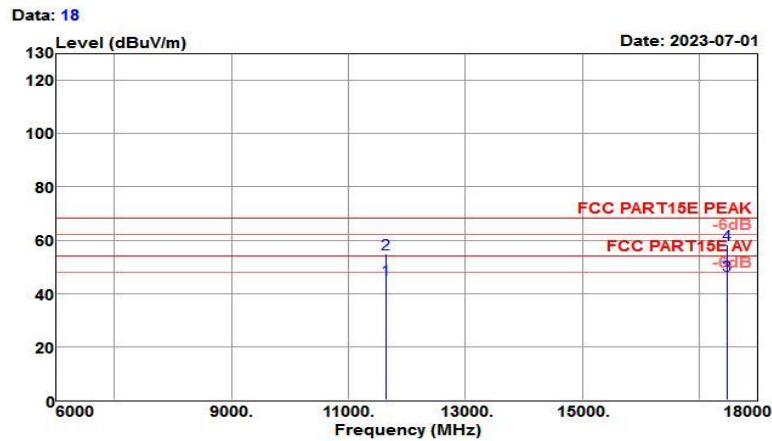


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
11650.000	25.13	39.40	13.76	33.04	45.25	54.00	-8.75	Average
11650.000	34.72	39.40	13.76	33.04	54.84	68.20	-13.36	Peak
17475.000	18.81	41.72	16.25	30.08	46.70	54.00	-7.30	Average
17475.000	30.57	41.72	16.25	30.08	58.46	68.20	-9.74	Peak

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11a CH165 5825MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11a CH165 (5825MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

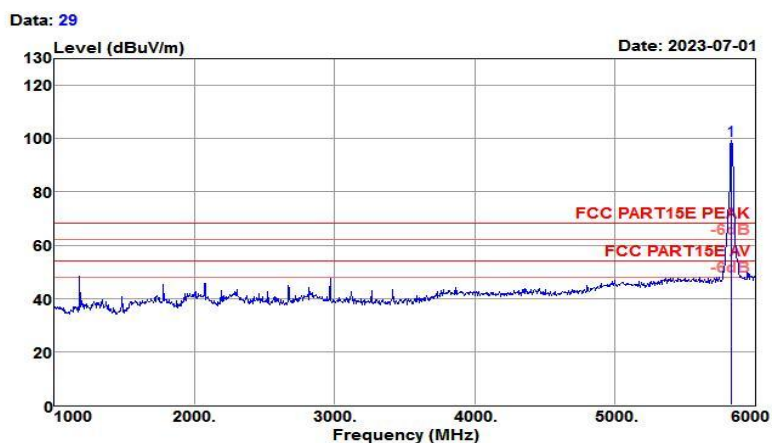

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5825.000	95.44	32.12	6.90	35.08	99.38	68.20	31.18	Peak

Test Mode :	802.11a CH165 5825MHz	Temperature :	21~23℃
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	6GHz~18GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/61%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11a CH165 (5825MHz)	Power rating	: DC 15W
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

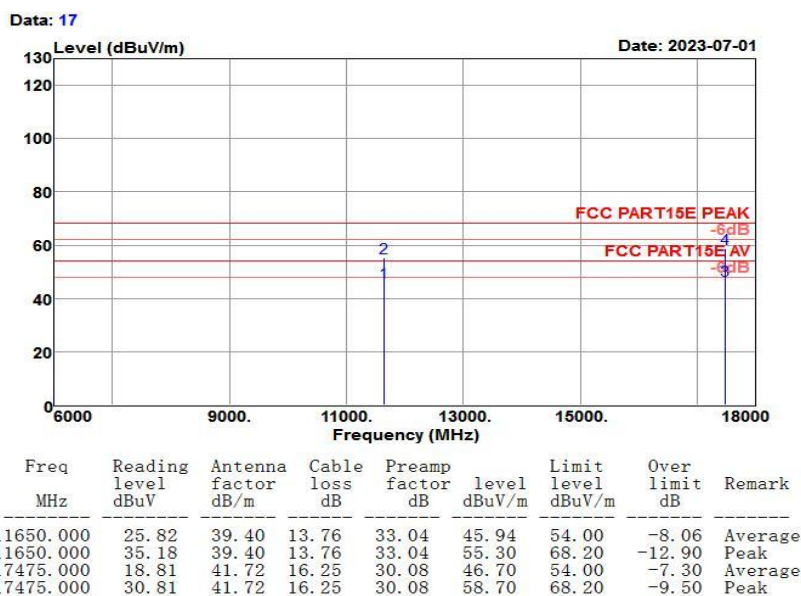

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	802.11n HT20 CH36 5180MHz	Temperature :	21~23°C
Test Engineer :	Jack Liu	Relative Humidity :	61~64%
Frequency Range	1GHz~6GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23°C/61%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11n HT20 CH36 (5180MHz)	Power rating	: DC 15V
EUT	: Digital Video Monitor	Comment	:
Model No.	: DVM-D1		

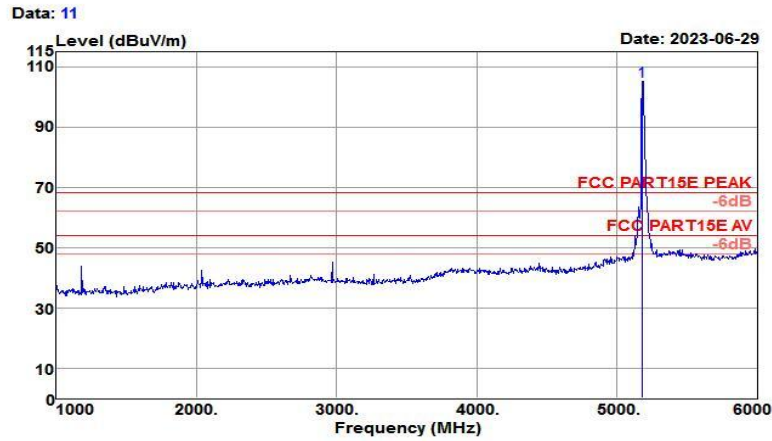

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
5180.000	102.02	31.34	7.53	35.72	105.17	68.20	36.97	Peak