


| | | | |
|------------------------|----------------------------|----------------------------|------------|
| Test Mode : | 802.11 n HT20 CH36 5180MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 6GHz~18GHz | Polarization : | Horizontal |

| | | | |
|-----------|-------------------------------|--------------|--------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : HORIZONTAL |
| Test Mode | : 802.11n HT20 CH36 (5180MHz) | Power rating | : DC 15W |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

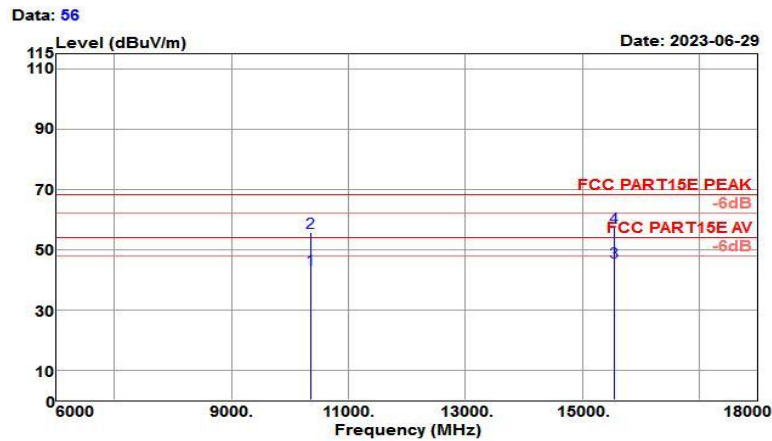


| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|---------|
| 10360.000 | 24.81 | 39.20 | 13.23 | 33.83 | 43.41 | 54.00 | -10.59 | Average |
| 10360.000 | 36.98 | 39.20 | 13.23 | 33.83 | 55.58 | 68.20 | -12.62 | Peak |
| 15540.000 | 18.01 | 38.43 | 20.83 | 31.52 | 45.75 | 54.00 | -8.25 | Average |
| 15540.000 | 29.67 | 38.43 | 20.83 | 31.52 | 57.41 | 68.20 | -10.79 | Peak |

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

| | | | |
|------------------------|----------------------------|----------------------------|----------|
| Test Mode : | 802.11 n HT20 CH36 5180MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 1GHz~6GHz | Polarization : | Vertical |


| | | | |
|-----------|-------------------------------|--------------|------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : VERTICAL |
| Test Mode | : 802.11n HT20 CH36 (5180MHz) | Power rating | : DC 15V |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

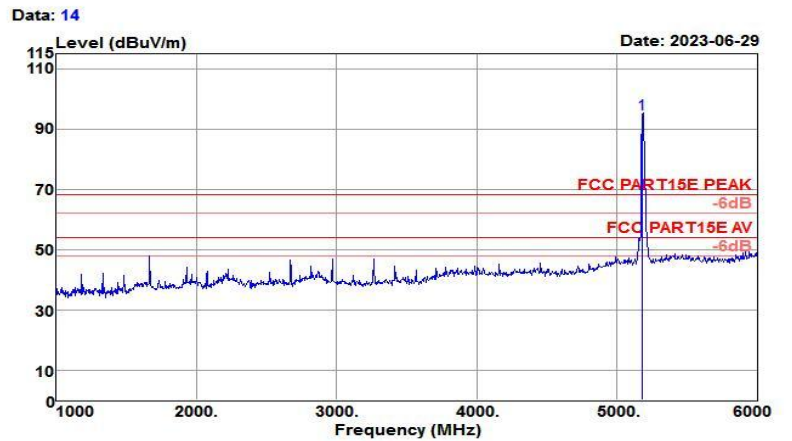

| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 5180.000 | 91.73 | 31.34 | 7.53 | 35.72 | 94.88 | 68.20 | 26.68 | Peak |

| | | | |
|------------------------|----------------------------|----------------------------|----------|
| Test Mode : | 802.11 n HT20 CH36 5180MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 6GHz~18GHz | Polarization : | Vertical |


| | | | |
|-----------|-------------------------------|--------------|------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : VERTICAL |
| Test Mode | : 802.11n HT20 CH36 (5180MHz) | Power rating | : DC 15W |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

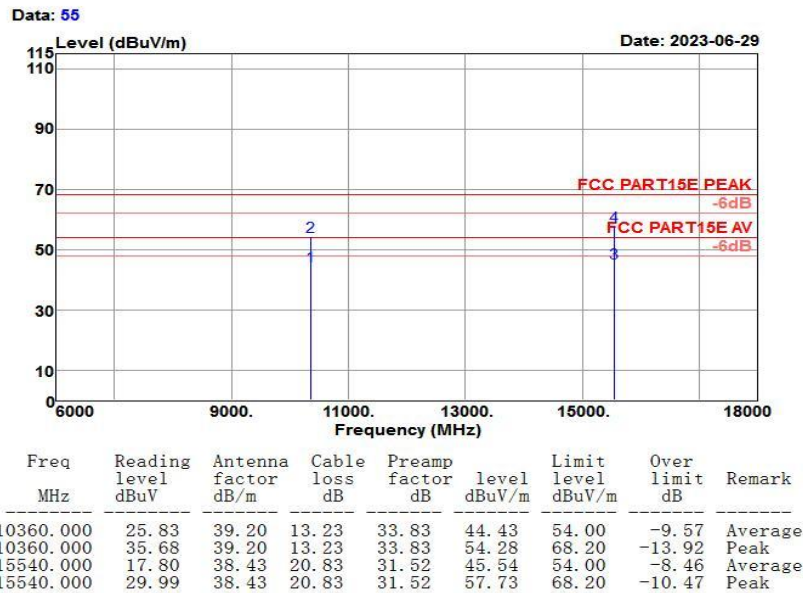

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

| | | | |
|------------------------|----------------------------|----------------------------|------------|
| Test Mode : | 802.11 n HT20 CH48 5240MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 1GHz~6GHz | Polarization : | Horizontal |


| | | | |
|-----------|-------------------------------|--------------|--------------|
| Test Site | : 3m Chamber | Temp/Humi | : 24℃/62% |
| Tested by | : Jack | Pol/Phase | : HORIZONTAL |
| Test Mode | : 802.11n HT20 CH48 (5240MHz) | Power rating | : DC 15V |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

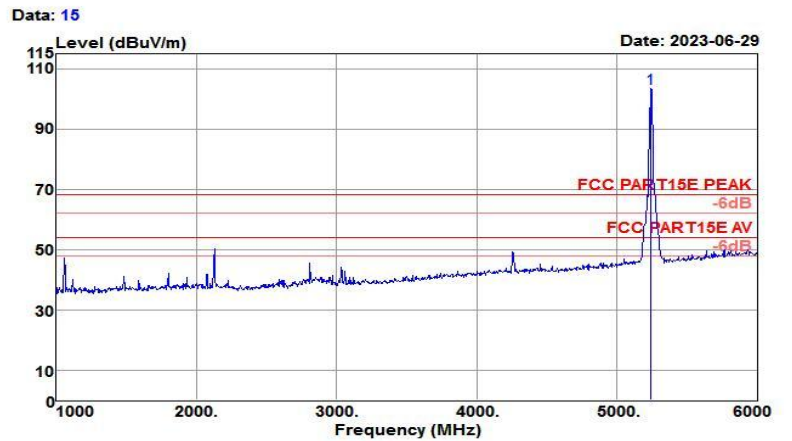

| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 5240.000 | 100.03 | 31.55 | 6.69 | 34.83 | 103.44 | 68.20 | 35.24 | Peak |

| | | | |
|------------------------|----------------------------|----------------------------|------------|
| Test Mode : | 802.11 n HT20 CH48 5240MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 6GHz~18GHz | Polarization : | Horizontal |

| | | | |
|-----------|-------------------------------|--------------|--------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : HORIZONTAL |
| Test Mode | : 802.11n HT20 CH48 (5240MHz) | Power rating | : DC 15V |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

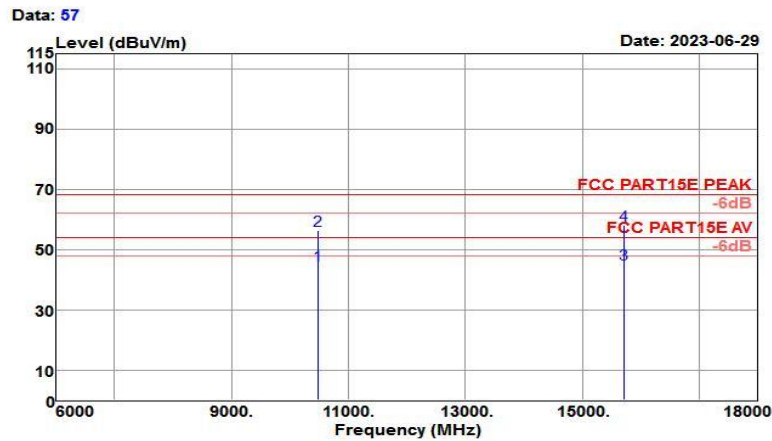


| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|---------|
| 10480.000 | 25.75 | 39.37 | 13.32 | 33.68 | 44.76 | 54.00 | -9.24 | Average |
| 10480.000 | 37.40 | 39.37 | 13.32 | 33.68 | 56.41 | 68.20 | -11.79 | Peak |
| 15720.000 | 18.31 | 38.10 | 20.24 | 31.40 | 45.25 | 54.00 | -8.75 | Average |
| 15720.000 | 31.00 | 38.10 | 20.24 | 31.40 | 57.94 | 68.20 | -10.26 | Peak |

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

| | | | |
|------------------------|----------------------------|----------------------------|----------|
| Test Mode : | 802.11 n HT20 CH48 5240MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 1GHz~6GHz | Polarization : | Vertical |


| | | | |
|-----------|-------------------------------|--------------|------------|
| Test Site | : 3m Chamber | Temp/Humi | : 24℃/62% |
| Tested by | : Jack | Pol/Phase | : VERTICAL |
| Test Mode | : 802.11n HT20 CH48 (5240MHz) | Power rating | : DC 15V |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

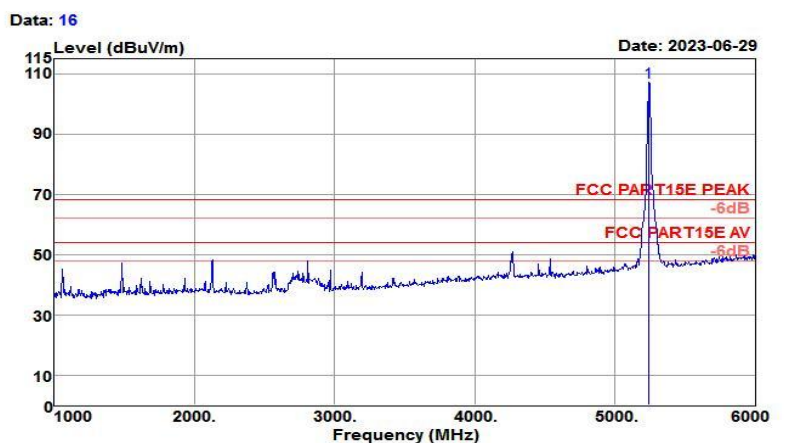

| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 5240.000 | 103.79 | 31.55 | 6.69 | 34.83 | 107.20 | 68.20 | 39.00 | Peak |

| | | | |
|------------------------|----------------------------|----------------------------|----------|
| Test Mode : | 802.11 n HT20 CH48 5240MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 6GHz~18GHz | Polarization : | Vertical |

| | | | |
|-----------|-------------------------------|--------------|------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : VERTICAL |
| Test Mode | : 802.11n HT20 CH48 (5240MHz) | Power rating | : DC 15W |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

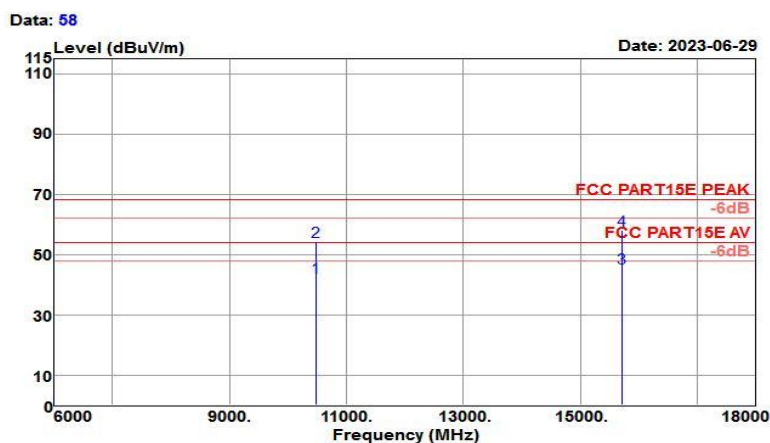


| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|---------|
| 10480.000 | 23.51 | 39.37 | 13.32 | 33.68 | 42.52 | 54.00 | -11.48 | Average |
| 10480.000 | 35.44 | 39.37 | 13.32 | 33.68 | 54.45 | 68.20 | -13.75 | Peak |
| 15720.000 | 18.70 | 38.10 | 20.24 | 31.40 | 45.64 | 54.00 | -8.36 | Average |
| 15720.000 | 31.20 | 38.10 | 20.24 | 31.40 | 58.14 | 68.20 | -10.06 | Peak |

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

| | | | |
|------------------------|----------------------------|----------------------------|------------|
| Test Mode : | 802.11 n HT20 CH64 5320MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 1GHz~6GHz | Polarization : | Horizontal |


| | | | |
|-----------|-------------------------------|--------------|--------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : HORIZONTAL |
| Test Mode | : 802.11n HT20 CH64 (5320MHz) | Power rating | : DC 15V |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

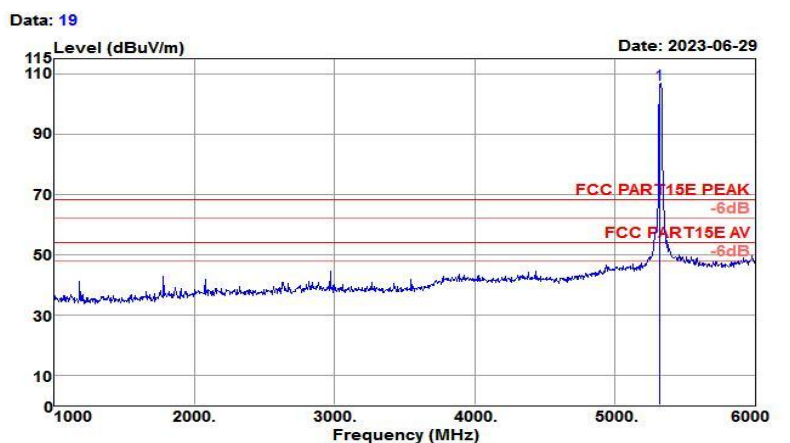

| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 5320.000 | 102.43 | 31.46 | 8.32 | 35.58 | 106.63 | 68.20 | 38.43 | Peak |

| | | | |
|------------------------|----------------------------|----------------------------|------------|
| Test Mode : | 802.11 n HT20 CH64 5320MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 6GHz~18GHz | Polarization : | Horizontal |


| | | | |
|-----------|-------------------------------|--------------|--------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : HORIZONTAL |
| Test Mode | : 802.11n HT20 CH64 (5320MHz) | Power rating | : DC 15W |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

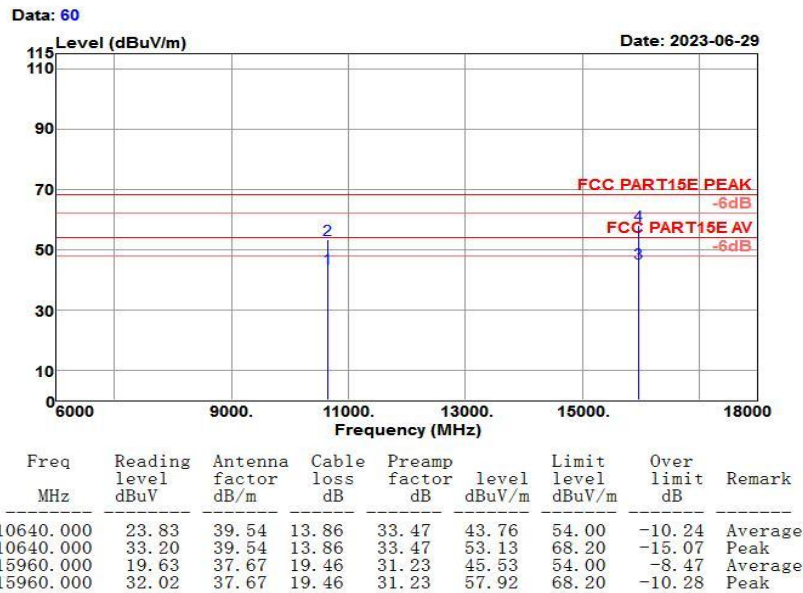

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

| | | | |
|------------------------|----------------------------|----------------------------|----------|
| Test Mode : | 802.11 n HT20 CH64 5320MHz | Temperature : | 21~23°C |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 1GHz~6GHz | Polarization : | Vertical |


| | | | |
|-----------|-------------------------------|--------------|------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23°C/61% |
| Tested by | : Jack | Pol/Phase | : VERTICAL |
| Test Mode | : 802.11n HT20 CH64 (5320MHz) | Power rating | : DC 15V |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

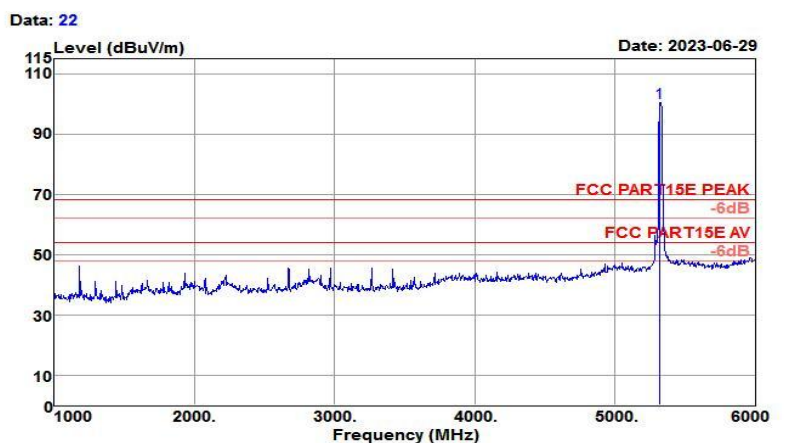

| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 5320.000 | 96.11 | 31.46 | 8.32 | 35.58 | 100.31 | 68.20 | 32.11 | Peak |

| | | | |
|------------------------|----------------------------|----------------------------|----------|
| Test Mode : | 802.11 n HT20 CH64 5320MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 6GHz~18GHz | Polarization : | Vertical |

| | | | |
|-----------|-------------------------------|--------------|------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : VERTICAL |
| Test Mode | : 802.11n HT20 CH64 (5320MHz) | Power rating | : DC 15W |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

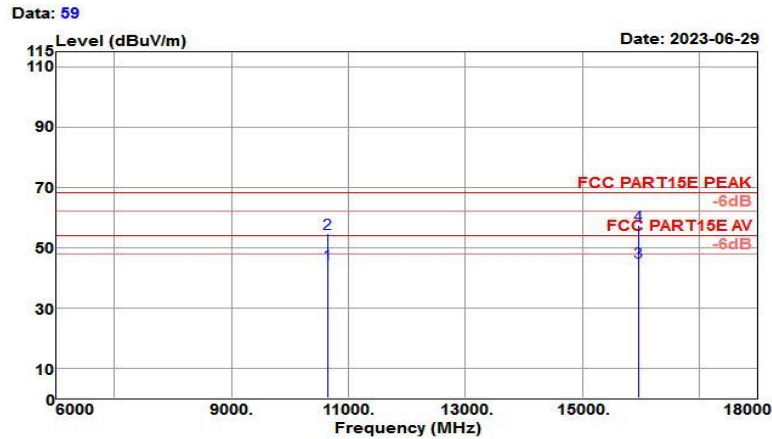


| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|---------|
| 10640.000 | 24.64 | 39.54 | 13.86 | 33.47 | 44.57 | 54.00 | -9.43 | Average |
| 10640.000 | 34.74 | 39.54 | 13.86 | 33.47 | 54.67 | 68.20 | -13.53 | Peak |
| 15960.000 | 19.28 | 37.67 | 19.46 | 31.23 | 45.18 | 54.00 | -8.82 | Average |
| 15960.000 | 31.35 | 37.67 | 19.46 | 31.23 | 57.25 | 68.20 | -10.95 | Peak |

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

| | | | |
|------------------------|-----------------------------|----------------------------|------------|
| Test Mode : | 802.11 n HT20 CH100 5500MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 1GHz~6GHz | Polarization : | Horizontal |


| | | | |
|-----------|--------------------------------|--------------|--------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : HORIZONTAL |
| Test Mode | : 802.11n HT20 CH100 (5500MHz) | Power rating | : DC 15V |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

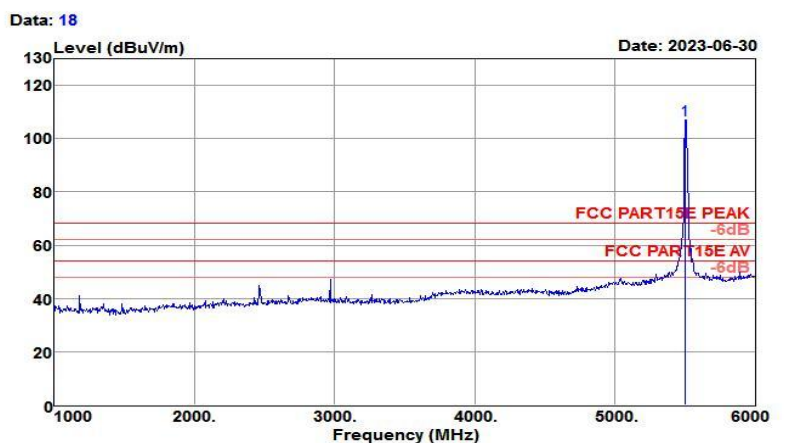

| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 5500.000 | 102.22 | 31.60 | 8.58 | 35.40 | 107.00 | 68.20 | 38.80 | Peak |

| | | | |
|------------------------|-----------------------------|----------------------------|------------|
| Test Mode : | 802.11 n HT20 CH100 5500MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 6GHz~18GHz | Polarization : | Horizontal |


| | | | |
|-----------|--------------------------------|--------------|--------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : HORIZONTAL |
| Test Mode | : 802.11n HT20 CH100 (5500MHz) | Power rating | : DC 15W |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

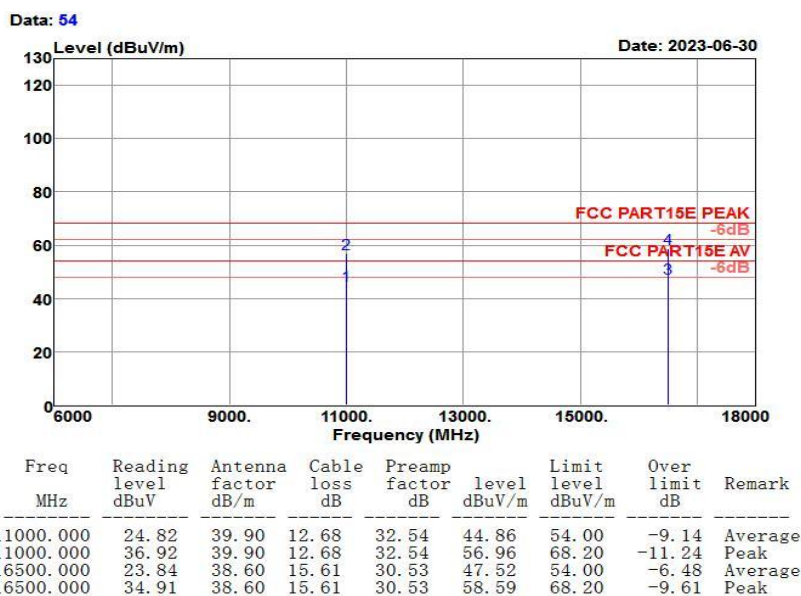

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

| | | | |
|------------------------|-----------------------------|----------------------------|----------|
| Test Mode : | 802.11 n HT20 CH100 5500MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 1GHz~6GHz | Polarization : | Vertical |


| | | | |
|-----------|--------------------------------|--------------|------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : VERTICAL |
| Test Mode | : 802.11n HT20 CH100 (5500MHz) | Power rating | : DC 15W |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

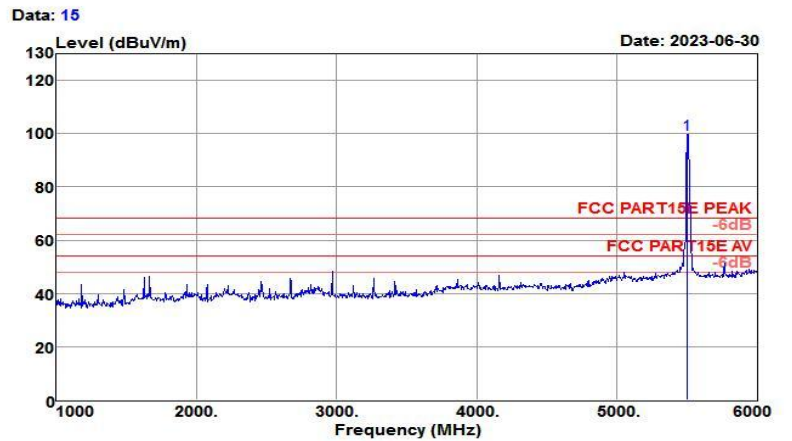

| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 5500.000 | 94.87 | 31.60 | 8.58 | 35.40 | 99.65 | 68.20 | 31.45 | Peak |

| | | | |
|------------------------|-----------------------------|----------------------------|----------|
| Test Mode : | 802.11 n HT20 CH100 5500MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 6GHz~18GHz | Polarization : | Vertical |

| | | | |
|-----------|--------------------------------|--------------|------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : VERTICAL |
| Test Mode | : 802.11n HT20 CH100 (5500MHz) | Power rating | : DC 15W |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

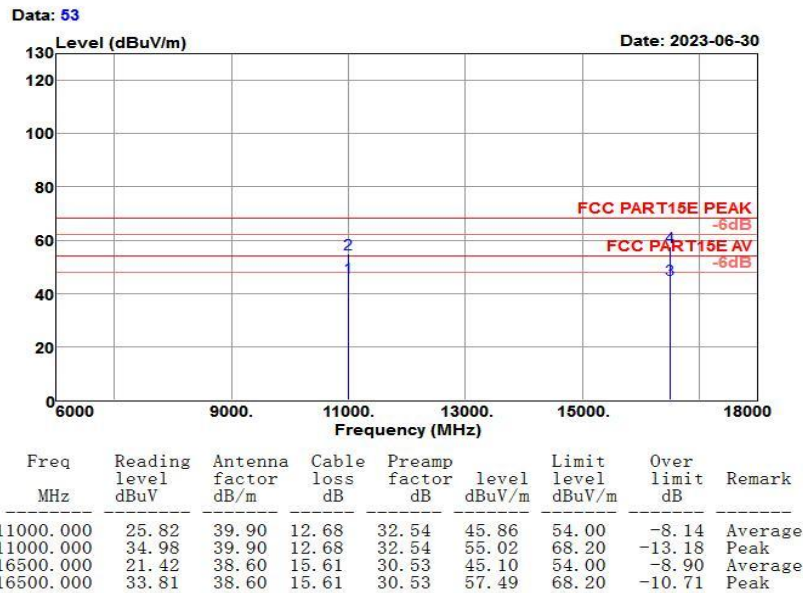


Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

| | | | |
|------------------------|-----------------------------|----------------------------|------------|
| Test Mode : | 802.11 n HT20 CH116 5580MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 1GHz~6GHz | Polarization : | Horizontal |

| | | | |
|-----------|--------------------------------|--------------|--------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : HORIZONTAL |
| Test Mode | : 802.11n HT20 CH116 (5580MHz) | Power rating | : DC 15V |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |


Data: 72

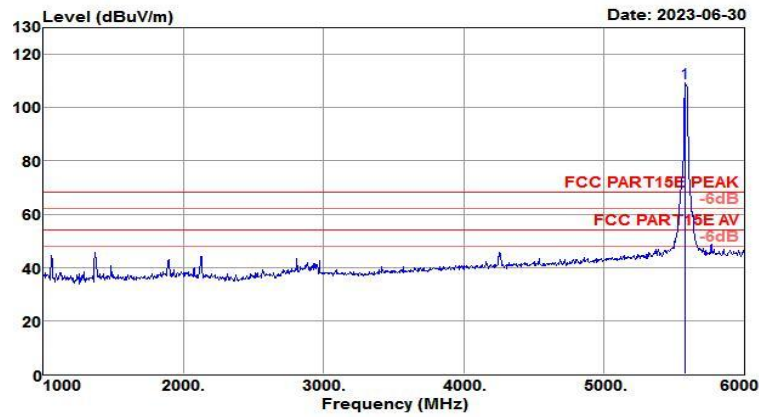

| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 5580.000 | 104.53 | 31.73 | 6.83 | 33.88 | 109.21 | 68.20 | 41.01 | Peak |

| | | | |
|------------------------|-----------------------------|----------------------------|------------|
| Test Mode : | 802.11 n HT20 CH116 5580MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 6GHz~18GHz | Polarization : | Horizontal |

| | | | |
|-----------|--------------------------------|--------------|--------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : HORIZONTAL |
| Test Mode | : 802.11n HT20 CH116 (5580MHz) | Power rating | : DC 15W |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

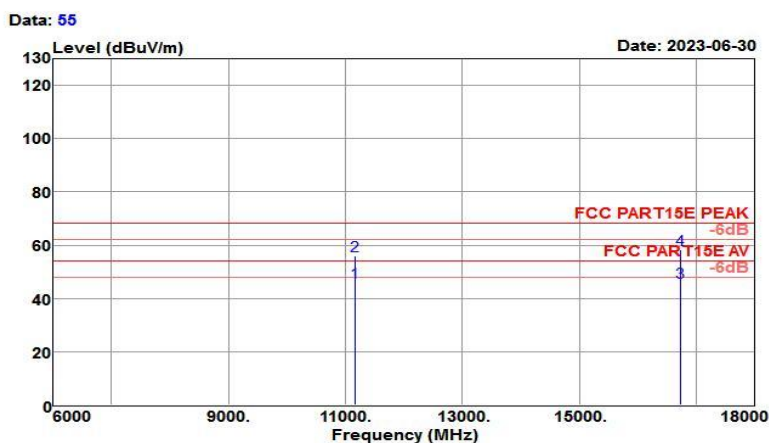


| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|---------|
| 11160.000 | 25.82 | 39.84 | 12.90 | 32.67 | 45.89 | 54.00 | -8.11 | Average |
| 11160.000 | 35.91 | 39.84 | 12.90 | 32.67 | 55.98 | 68.20 | -12.22 | Peak |
| 16740.000 | 19.82 | 39.32 | 17.34 | 30.31 | 46.17 | 54.00 | -7.83 | Average |
| 16740.000 | 31.92 | 39.32 | 17.34 | 30.31 | 58.27 | 68.20 | -9.93 | Peak |

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

| | | | |
|------------------------|-----------------------------|----------------------------|----------|
| Test Mode : | 802.11 n HT20 CH116 5580MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 1GHz~6GHz | Polarization : | Vertical |


| | | | |
|-----------|--------------------------------|--------------|------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : VERTICAL |
| Test Mode | : 802.11n HT20 CH116 (5580MHz) | Power rating | : DC 15V |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

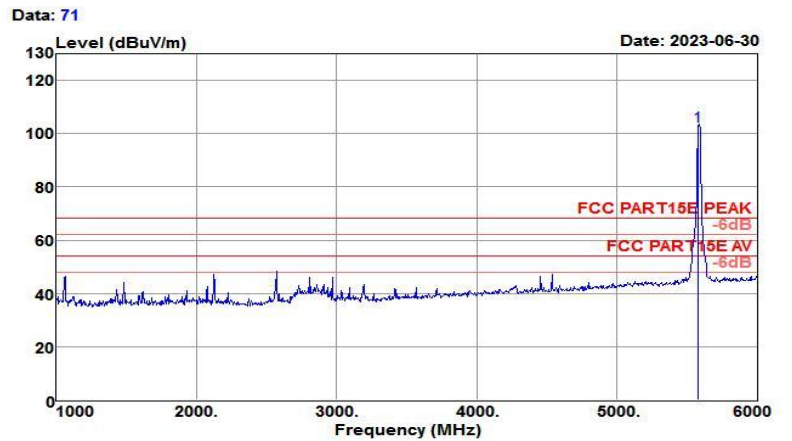

| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 5580.000 | 98.13 | 31.73 | 6.83 | 33.88 | 102.81 | 68.20 | 34.61 | Peak |

| | | | |
|------------------------|-----------------------------|----------------------------|----------|
| Test Mode : | 802.11 n HT20 CH116 5580MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 6GHz~18GHz | Polarization : | Vertical |

| | | | |
|-----------|--------------------------------|--------------|------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : VERTICAL |
| Test Mode | : 802.11n HT20 CH116 (5580MHz) | Power rating | : DC 15W |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

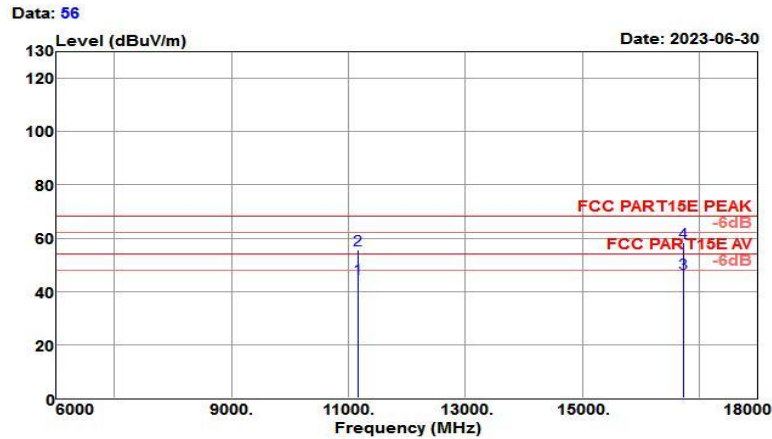


| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-----------|--------------------|---------------------|---------------|------------------|--------------|--------------------|---------------|---------|
| 11160.000 | 24.92 | 39.84 | 12.90 | 32.67 | 44.99 | 54.00 | -9.01 | Average |
| 11160.000 | 35.41 | 39.84 | 12.90 | 32.67 | 55.48 | 68.20 | -12.72 | Peak |
| 16740.000 | 20.42 | 39.32 | 17.34 | 30.31 | 46.77 | 54.00 | -7.23 | Average |
| 16740.000 | 31.90 | 39.32 | 17.34 | 30.31 | 58.25 | 68.20 | -9.95 | Peak |

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

| | | | |
|------------------------|-----------------------------|----------------------------|------------|
| Test Mode : | 802.11 n HT20 CH140 5700MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 1GHz~6GHz | Polarization : | Horizontal |


| | | | |
|-----------|-------------------------------|--------------|--------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : HORIZONTAL |
| Test Mode | : 802.11n HT20 CH140(5700MHz) | Power rating | : DC 15V |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

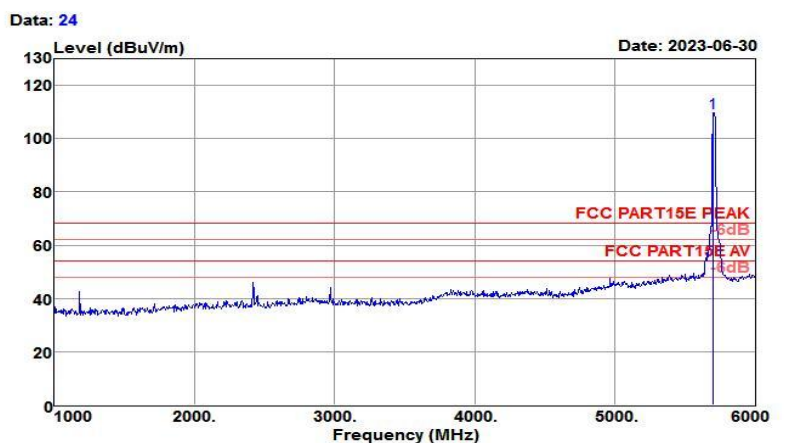

| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 5700.000 | 105.50 | 31.92 | 7.49 | 35.20 | 109.71 | 68.20 | 41.51 | Peak |

| | | | |
|------------------------|-----------------------------|----------------------------|------------|
| Test Mode : | 802.11 n HT20 CH140 5700MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 6GHz~18GHz | Polarization : | Horizontal |


| | | | |
|-----------|--------------------------------|--------------|------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : VERTICAL |
| Test Mode | : 802.11n HT20 CH140 (5700MHz) | Power rating | : DC 15W |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

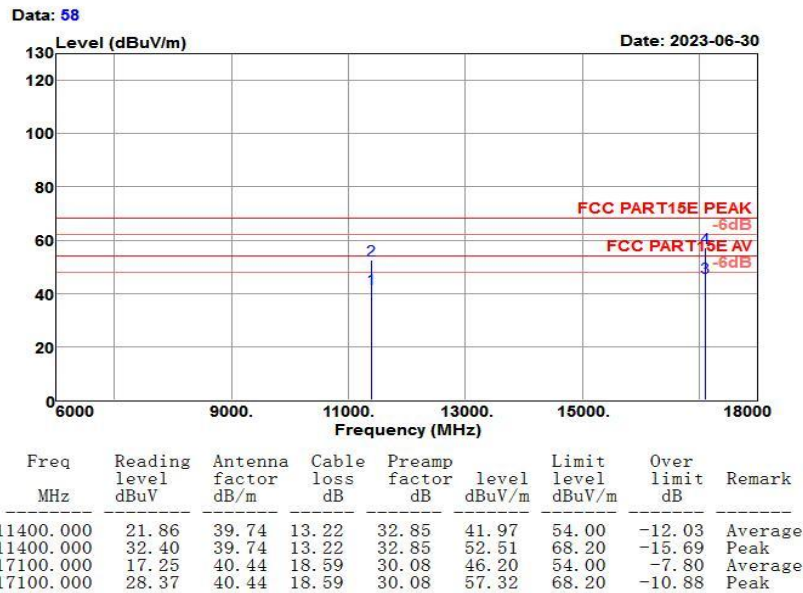

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

| | | | |
|------------------------|-----------------------------|----------------------------|----------|
| Test Mode : | 802.11 n HT20 CH140 5700MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 1GHz~6GHz | Polarization : | Vertical |


| | | | |
|-----------|-------------------------------|--------------|------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : VERTICAL |
| Test Mode | : 802.11n HT20 CH140(5700MHz) | Power rating | : DC 15V |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

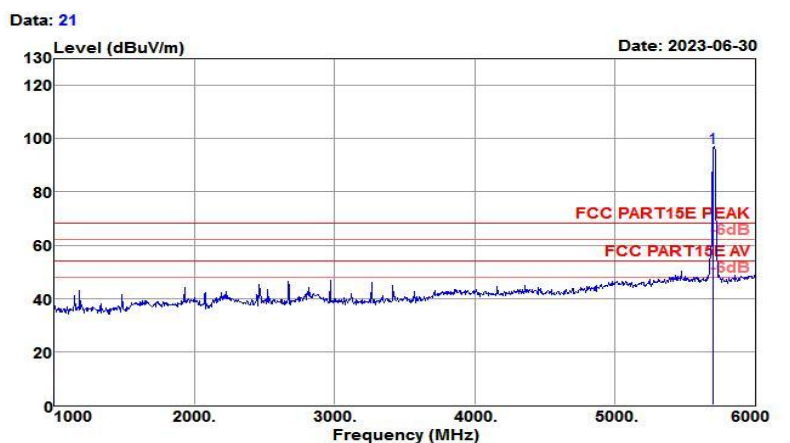

| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 5700.000 | 92.41 | 31.92 | 7.49 | 35.20 | 96.62 | 68.20 | 28.42 | Peak |

| | | | |
|------------------------|-----------------------------|----------------------------|----------|
| Test Mode : | 802.11 n HT20 CH140 5700MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 6GHz~18GHz | Polarization : | Vertical |


| | | | |
|-----------|--------------------------------|--------------|------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : VERTICAL |
| Test Mode | : 802.11n HT20 CH140 (5700MHz) | Power rating | : DC 15W |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

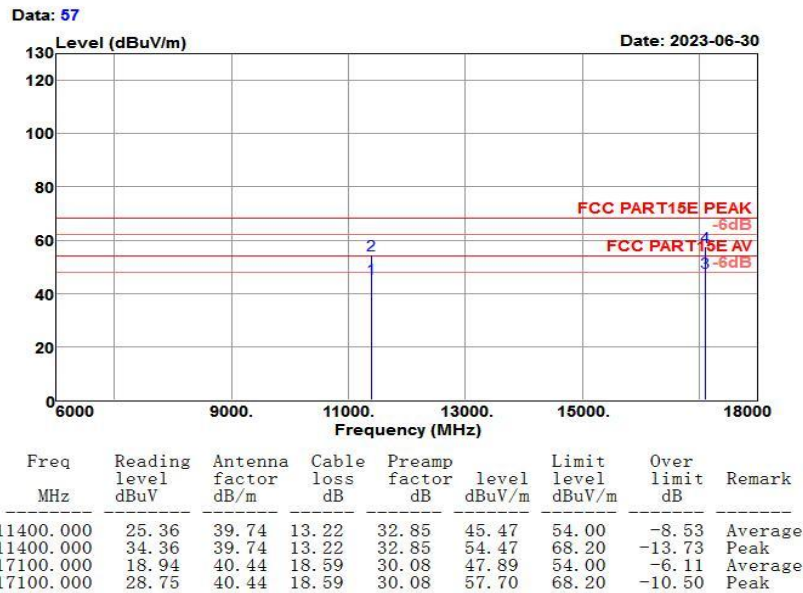

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


| | | | |
|------------------------|-----------------------------|----------------------------|------------|
| Test Mode : | 802.11 n HT20 CH144 5720MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 1GHz~6GHz | Polarization : | Horizontal |

| | | | |
|-----------|--------------------------------|---------------|--------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : HORIZONTAL |
| Test Mode | : 802.11n HT20 CH144 (5720MHz) | Power rating: | DC 15V |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

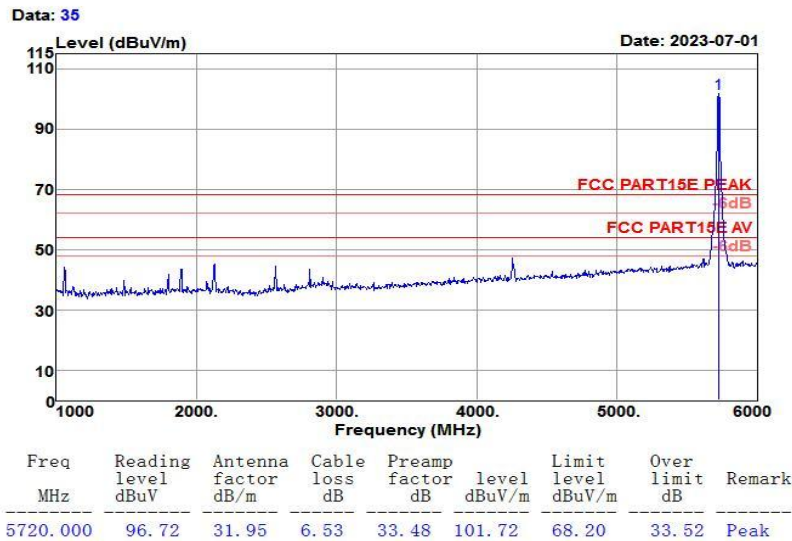

| | | | |
|------------------------|-----------------------------|----------------------------|------------|
| Test Mode : | 802.11 n HT20 CH144 5720MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 6GHz~18GHz | Polarization : | Horizontal |

| | | | |
|-----------|--------------------------------|--------------|--------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : HORIZONTAL |
| Test Mode | : 802.11n HT20 CH144 (5720MHz) | Power rating | : DC 15W |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

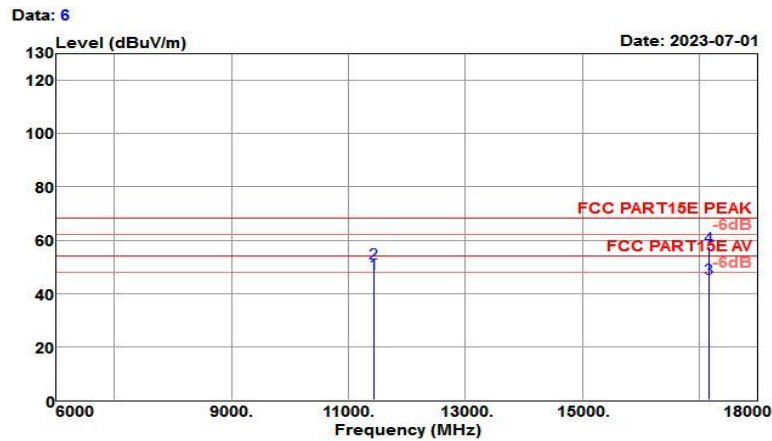


| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|---------|
| 11440.000 | 27.65 | 39.72 | 13.28 | 32.91 | 47.74 | 54.00 | -6.26 | Average |
| 11440.000 | 31.29 | 39.72 | 13.28 | 32.91 | 51.38 | 68.20 | -16.82 | Peak |
| 17160.000 | 16.75 | 40.64 | 18.21 | 30.13 | 45.47 | 54.00 | -8.53 | Average |
| 17160.000 | 28.65 | 40.64 | 18.21 | 30.13 | 57.37 | 68.20 | -10.83 | Peak |

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

| | | | |
|------------------------|-----------------------------|----------------------------|----------|
| Test Mode : | 802.11 n HT20 CH144 5720MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 1GHz~6GHz | Polarization : | Vertical |


| | | | |
|-----------|--------------------------------|---------------|------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : VERTICAL |
| Test Mode | : 802.11n HT20 CH144 (5720MHz) | Power rating: | DC 15V |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

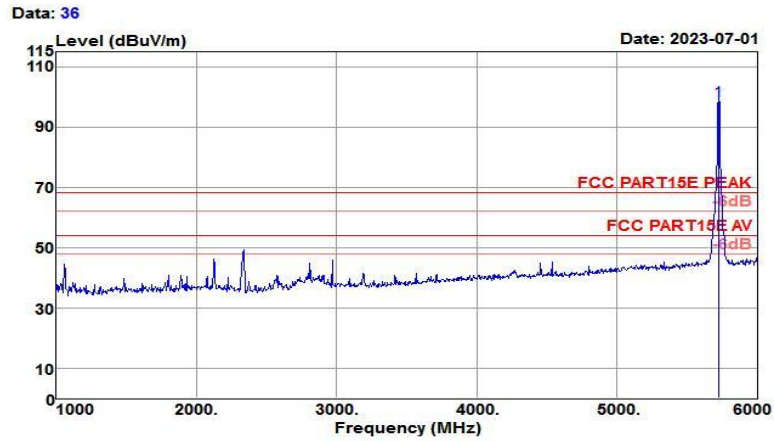

| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 5720.000 | 93.80 | 31.95 | 6.53 | 33.48 | 98.80 | 68.20 | 30.60 | Peak |

| | | | |
|------------------------|-----------------------------|----------------------------|----------|
| Test Mode : | 802.11 n HT20 CH144 5720MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 6GHz~18GHz | Polarization : | Vertical |


| | | | |
|-----------|--------------------------------|--------------|------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : VERTICAL |
| Test Mode | : 802.11n HT20 CH144 (5720MHz) | Power rating | : DC 15W |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

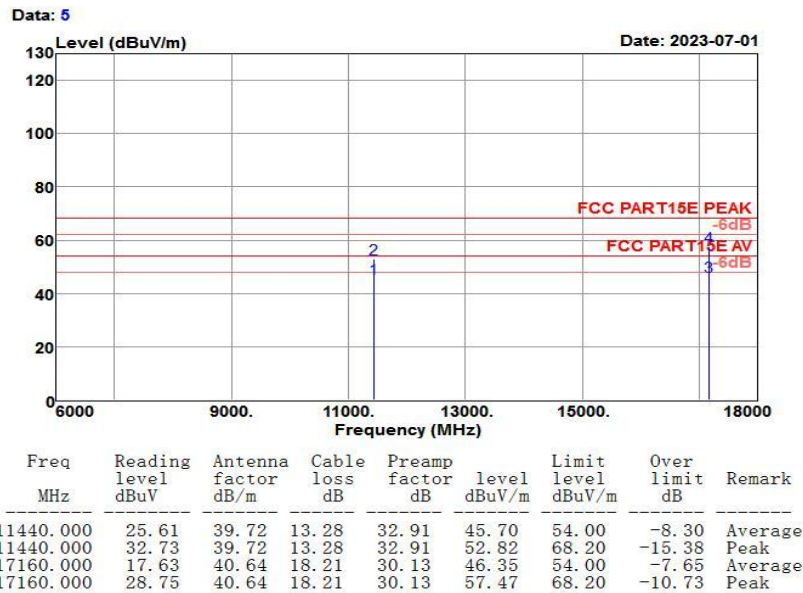

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

| | | | |
|------------------------|-----------------------------|----------------------------|------------|
| Test Mode : | 802.11 n HT20 CH149 5745MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 1GHz~6GHz | Polarization : | Horizontal |


| | | | |
|-----------|--------------------------------|--------------|--------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : HORIZONTAL |
| Test Mode | : 802.11n HT20 CH149 (5745MHz) | Power rating | : DC 15W |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

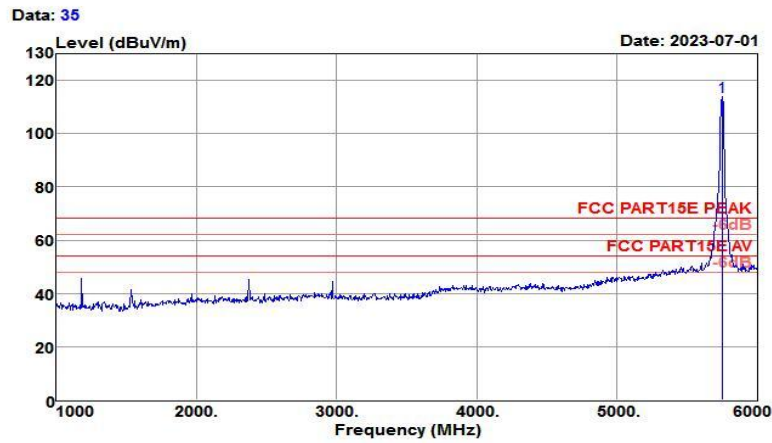

| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 5745.000 | 110.08 | 31.99 | 7.13 | 35.16 | 114.04 | 68.20 | 45.84 | Peak |

| | | | |
|------------------------|-----------------------------|----------------------------|------------|
| Test Mode : | 802.11 n HT20 CH149 5745MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 6GHz~18GHz | Polarization : | Horizontal |


| | | | |
|-----------|--------------------------------|--------------|--------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : HORIZONTAL |
| Test Mode | : 802.11n HT20 CH149 (5745MHz) | Power rating | : DC 15W |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

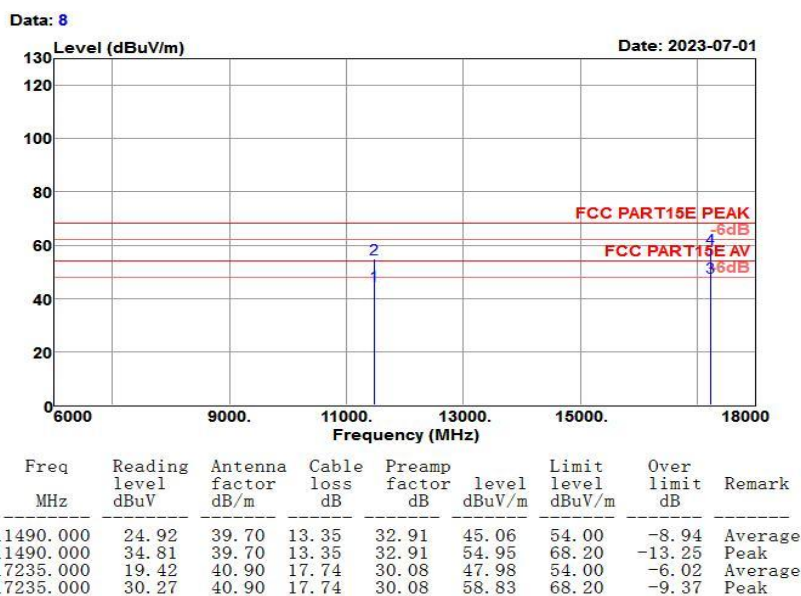

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

| | | | |
|------------------------|-----------------------------|----------------------------|----------|
| Test Mode : | 802.11 n HT20 CH149 5745MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 1GHz~6GHz | Polarization : | Vertical |


| | | | |
|-----------|--------------------------------|--------------|------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : VERTICAL |
| Test Mode | : 802.11n HT20 CH149 (5745MHz) | Power rating | : DC 15W |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

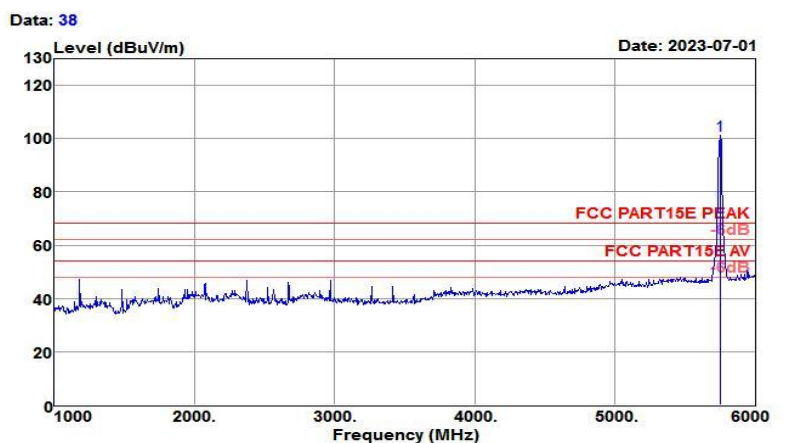

| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 5745.000 | 97.14 | 31.99 | 7.13 | 35.16 | 101.10 | 68.20 | 32.90 | Peak |

| | | | |
|------------------------|-----------------------------|----------------------------|----------|
| Test Mode : | 802.11 n HT20 CH149 5745MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 6GHz~18GHz | Polarization : | Vertical |

| | | | |
|-----------|--------------------------------|--------------|------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : VERTICAL |
| Test Mode | : 802.11n HT20 CH149 (5745MHz) | Power rating | : DC 15W |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

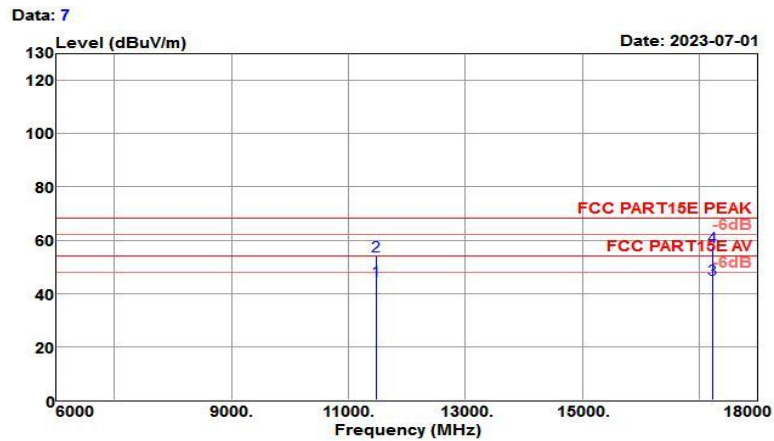


| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|---------|
| 11490.000 | 24.59 | 39.70 | 13.35 | 32.91 | 44.73 | 54.00 | -9.27 | Average |
| 11490.000 | 33.81 | 39.70 | 13.35 | 32.91 | 53.95 | 68.20 | -14.25 | Peak |
| 17235.000 | 16.63 | 40.90 | 17.74 | 30.08 | 45.19 | 54.00 | -8.81 | Average |
| 17235.000 | 28.82 | 40.90 | 17.74 | 30.08 | 57.38 | 68.20 | -10.82 | Peak |

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

| | | | |
|------------------------|-----------------------------|----------------------------|------------|
| Test Mode : | 802.11 n HT20 CH157 5785MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 1GHz~6GHz | Polarization : | Horizontal |


| | | | |
|-----------|--------------------------------|--------------|--------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : HORIZONTAL |
| Test Mode | : 802.11n HT20 CH157 (5785MHz) | Power rating | : DC 15V |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

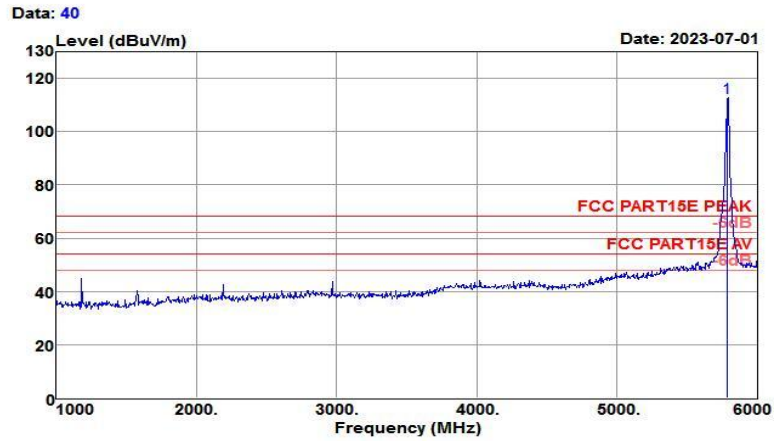

| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 5785.000 | 109.13 | 32.06 | 6.82 | 35.12 | 112.89 | 68.20 | 44.69 | Peak |

| | | | |
|------------------------|-----------------------------|----------------------------|------------|
| Test Mode : | 802.11 n HT20 CH157 5785MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 6GHz~18GHz | Polarization : | Horizontal |

| | | | |
|-----------|--------------------------------|--------------|--------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : HORIZONTAL |
| Test Mode | : 802.11n HT20 CH157 (5785MHz) | Power rating | : DC 15W |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

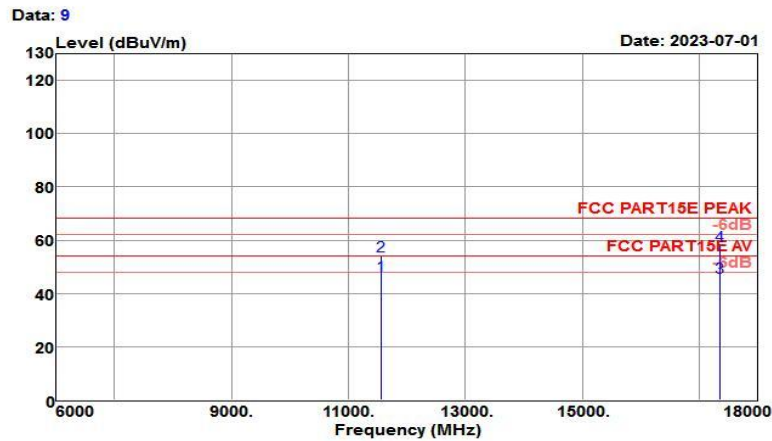


| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|---------|
| 11570.000 | 26.58 | 39.56 | 13.55 | 32.98 | 46.71 | 54.00 | -7.29 | Average |
| 11570.000 | 33.82 | 39.56 | 13.55 | 32.98 | 53.95 | 68.20 | -14.25 | Peak |
| 17355.000 | 17.72 | 41.31 | 16.99 | 30.08 | 45.94 | 54.00 | -8.06 | Average |
| 17355.000 | 29.81 | 41.31 | 16.99 | 30.08 | 58.03 | 68.20 | -10.17 | Peak |

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

| | | | |
|------------------------|-----------------------------|----------------------------|----------|
| Test Mode : | 802.11 n HT20 CH157 5785MHz | Temperature : | 21~23°C |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 1GHz~6GHz | Polarization : | Vertical |


| | | | |
|-----------|--------------------------------|--------------|--------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23°C/61% |
| Tested by | : Jack | Pol/Phase | : HORIZONTAL |
| Test Mode | : 802.11n HT20 CH157 (5785MHz) | Power rating | : DC 15V |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

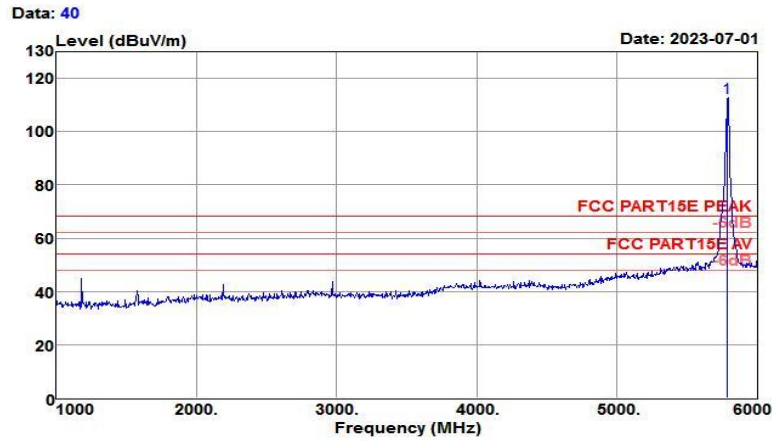

| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 5785.000 | 109.13 | 32.06 | 6.82 | 35.12 | 112.89 | 68.20 | 44.69 | Peak |

| | | | |
|------------------------|-----------------------------|----------------------------|----------|
| Test Mode : | 802.11 n HT20 CH157 5785MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 6GHz~18GHz | Polarization : | Vertical |

| | | | |
|-----------|--------------------------------|--------------|------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : VERTICAL |
| Test Mode | : 802.11n HT20 CH157 (5785MHz) | Power rating | : DC 15W |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

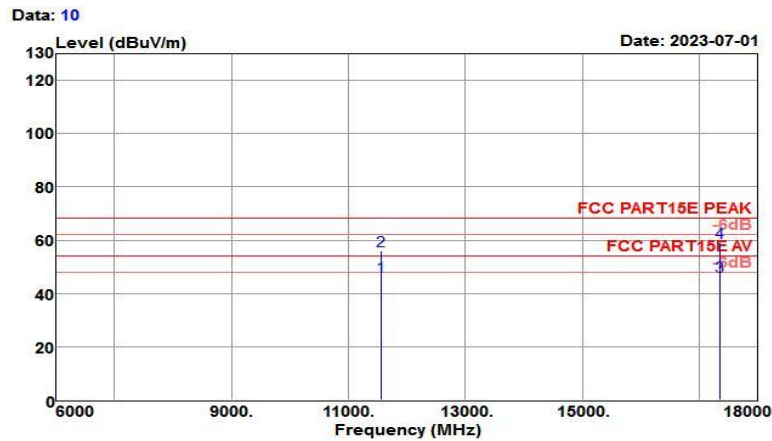


| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|---------|
| 11570.000 | 26.47 | 39.56 | 13.55 | 32.98 | 46.60 | 54.00 | -7.40 | Average |
| 11570.000 | 35.81 | 39.56 | 13.55 | 32.98 | 55.94 | 68.20 | -12.26 | Peak |
| 17355.000 | 18.38 | 41.31 | 16.99 | 30.08 | 46.60 | 54.00 | -7.40 | Average |
| 17355.000 | 30.82 | 41.31 | 16.99 | 30.08 | 59.04 | 68.20 | -9.16 | Peak |

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

| | | | |
|------------------------|-----------------------------|----------------------------|------------|
| Test Mode : | 802.11 n HT20 CH165 5825MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 1GHz~6GHz | Polarization : | Horizontal |


| | | | |
|-----------|--------------------------------|---------------|--------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : HORIZONTAL |
| Test Mode | : 802.11n HT20 CH165 (5825MHz) | Power rating: | DC 15V |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

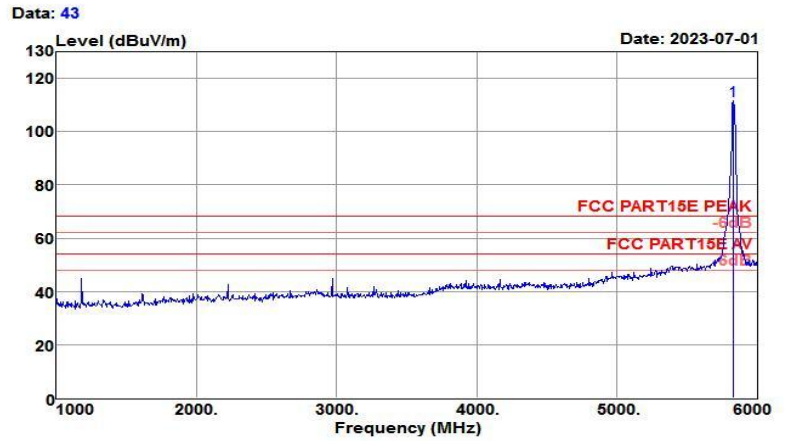

| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 5825.000 | 107.60 | 32.12 | 6.90 | 35.08 | 111.54 | 68.20 | 43.34 | Peak |

| | | | |
|------------------------|-----------------------------|----------------------------|------------|
| Test Mode : | 802.11 n HT20 CH165 5825MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 6GHz~18GHz | Polarization : | Horizontal |


| | | | |
|-----------|--------------------------------|--------------|--------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : HORIZONTAL |
| Test Mode | : 802.11n HT20 CH165 (5825MHz) | Power rating | : DC 15W |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

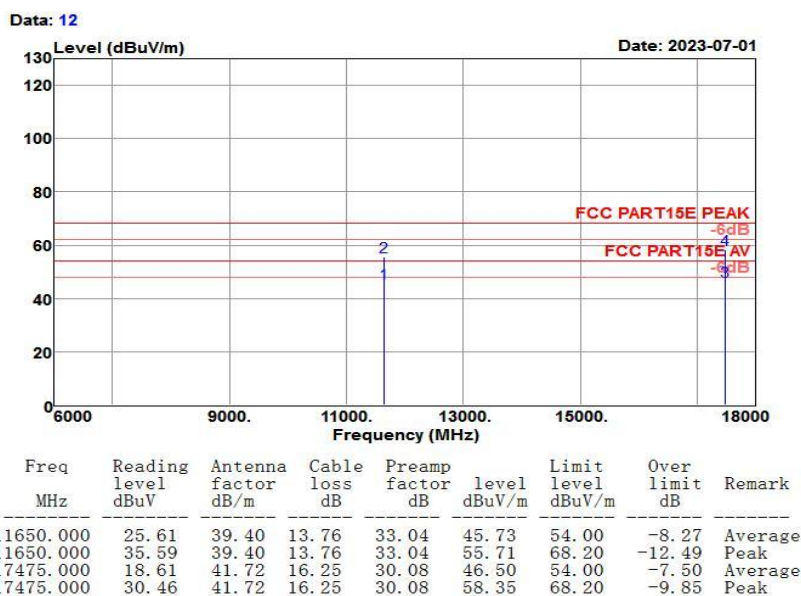

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

| | | | |
|------------------------|-----------------------------|----------------------------|----------|
| Test Mode : | 802.11 n HT20 CH165 5825MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 1GHz~6GHz | Polarization : | Vertical |


| | | | |
|-----------|--------------------------------|--------------|------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : VERTICAL |
| Test Mode | : 802.11n HT20 CH165 (5825MHz) | Power rating | : DC 15W |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

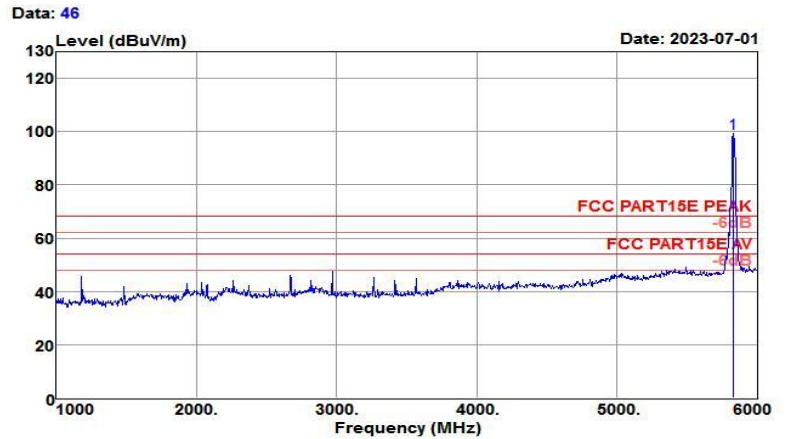

| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 5825.000 | 95.26 | 32.12 | 6.90 | 35.08 | 99.20 | 68.20 | 31.00 | Peak |

| | | | |
|------------------------|-----------------------------|----------------------------|----------|
| Test Mode : | 802.11 n HT20 CH165 5825MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 6GHz~18GHz | Polarization : | Vertical |

| | | | |
|-----------|--------------------------------|--------------|------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : VERTICAL |
| Test Mode | : 802.11n HT20 CH165 (5825MHz) | Power rating | : DC 15W |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

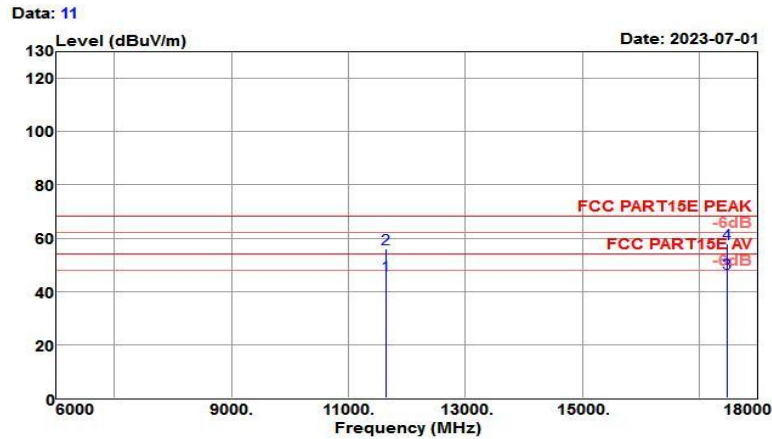


| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|---------|
| 11650.000 | 25.82 | 39.40 | 13.76 | 33.04 | 45.94 | 54.00 | -8.06 | Average |
| 11650.000 | 35.81 | 39.40 | 13.76 | 33.04 | 55.93 | 68.20 | -12.27 | Peak |
| 17475.000 | 18.80 | 41.72 | 16.25 | 30.08 | 46.69 | 54.00 | -7.31 | Average |
| 17475.000 | 29.93 | 41.72 | 16.25 | 30.08 | 57.82 | 68.20 | -10.38 | Peak |

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

| | | | |
|------------------------|---------------------------|----------------------------|------------|
| Test Mode : | 802.11n HT40 CH38 5190MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 1GHz~6GHz | Polarization : | Horizontal |


| | | | |
|-----------|-------------------------------|--------------|--------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : HORIZONTAL |
| Test Mode | : 802.11n HT40 CH38 (5190MHz) | Power rating | : DC 15V |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

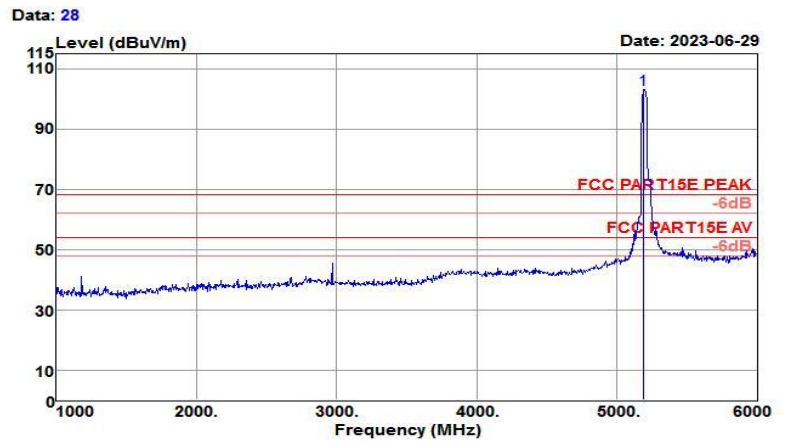

| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 5190.000 | 100.15 | 31.35 | 7.51 | 35.71 | 103.30 | 68.20 | 35.10 | Peak |

| | | | |
|------------------------|---------------------------|----------------------------|------------|
| Test Mode : | 802.11n HT40 CH38 5190MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 6GHz~18GHz | Polarization : | Horizontal |

| | | | |
|-----------|-------------------------------|--------------|--------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : HORIZONTAL |
| Test Mode | : 802.11n HT40 CH38 (5190MHz) | Power rating | : DC 15W |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

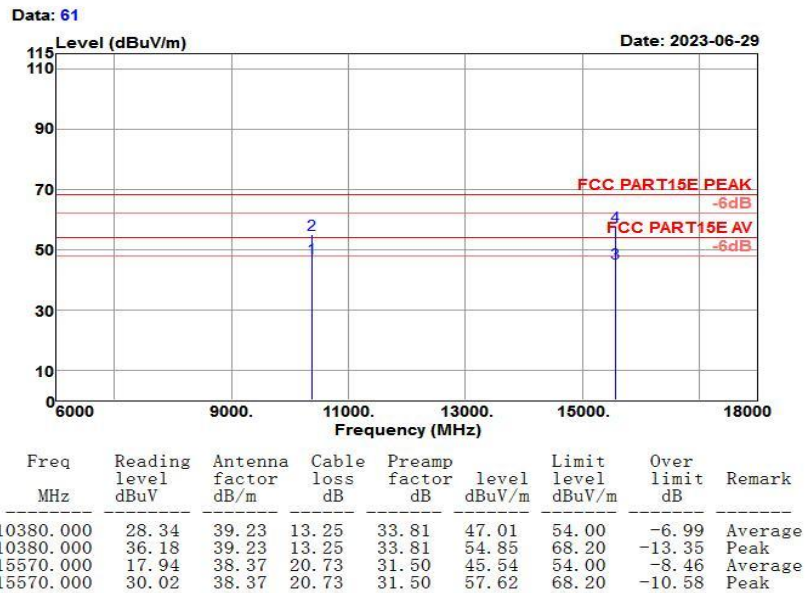


Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

| | | | |
|------------------------|---------------------------|----------------------------|----------|
| Test Mode : | 802.11n HT40 CH38 5190MHz | Temperature : | 21~23°C |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 1GHz~6GHz | Polarization : | Vertical |

| | | | |
|-----------|-------------------------------|--------------|------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23°C/61% |
| Tested by | : Jack | Pol/Phase | : VERTICAL |
| Test Mode | : 802.11n HT40 CH38 (5190MHz) | Power rating | : DC 15V |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

Data: 25

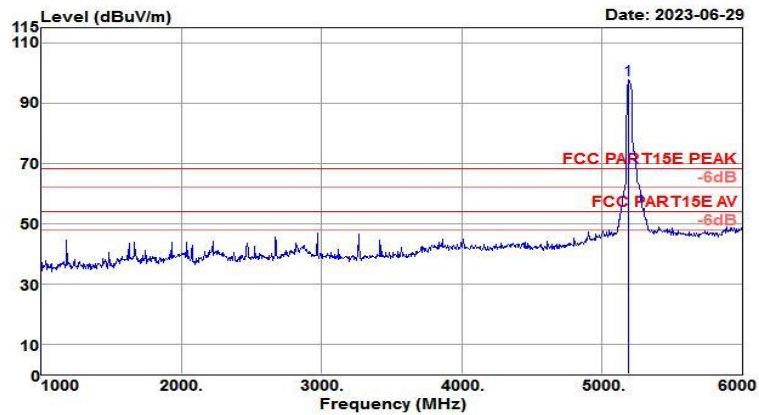


| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 5190.000 | 94.65 | 31.35 | 7.51 | 35.71 | 97.80 | 68.20 | 29.60 | Peak |

| | | | |
|------------------------|---------------------------|----------------------------|----------|
| Test Mode : | 802.11n HT40 CH38 5190MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 6GHz~18GHz | Polarization : | Vertical |

| | | | |
|-----------|-------------------------------|--------------|------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : VERTICAL |
| Test Mode | : 802.11n HT40 CH38 (5190MHz) | Power rating | : DC 15W |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

Data: 62

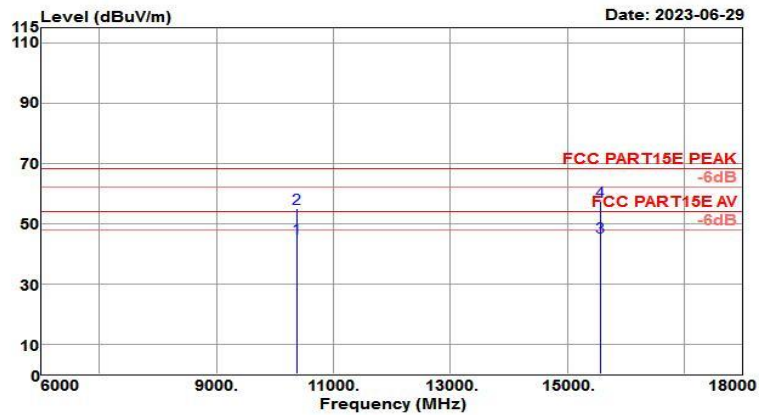


| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|---------|
| 10380.000 | 26.52 | 39.23 | 13.25 | 33.81 | 45.19 | 54.00 | -8.81 | Average |
| 10380.000 | 36.16 | 39.23 | 13.25 | 33.81 | 54.83 | 68.20 | -13.37 | Peak |
| 15570.000 | 18.02 | 38.37 | 20.73 | 31.50 | 45.62 | 54.00 | -8.38 | Average |
| 15570.000 | 29.72 | 38.37 | 20.73 | 31.50 | 57.32 | 68.20 | -10.88 | Peak |

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

| | | | |
|------------------------|----------------------------|----------------------------|------------|
| Test Mode : | 802.11 n HT40 CH46 5230MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 1GHz~6GHz | Polarization : | Horizontal |


| | | | |
|-----------|-------------------------------|--------------|--------------|
| Test Site | : 3m Chamber | Temp/Humi | : 24℃/62% |
| Tested by | : Jack | Pol/Phase | : HORIZONTAL |
| Test Mode | : 802.11n HT40 CH46 (5230MHz) | Power rating | : DC 15V |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

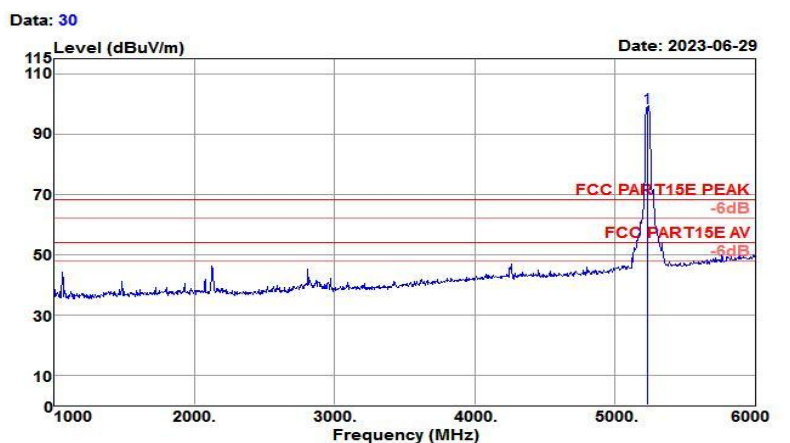

| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 5230.000 | 95.43 | 31.55 | 6.71 | 34.86 | 98.83 | 68.20 | 30.63 | Peak |

| | | | |
|------------------------|----------------------------|----------------------------|------------|
| Test Mode : | 802.11 n HT40 CH46 5230MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 6GHz~18GHz | Polarization : | Horizontal |


| | | | |
|-----------|-------------------------------|--------------|--------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : HORIZONTAL |
| Test Mode | : 802.11n HT40 CH46 (5230MHz) | Power rating | : DC 15W |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

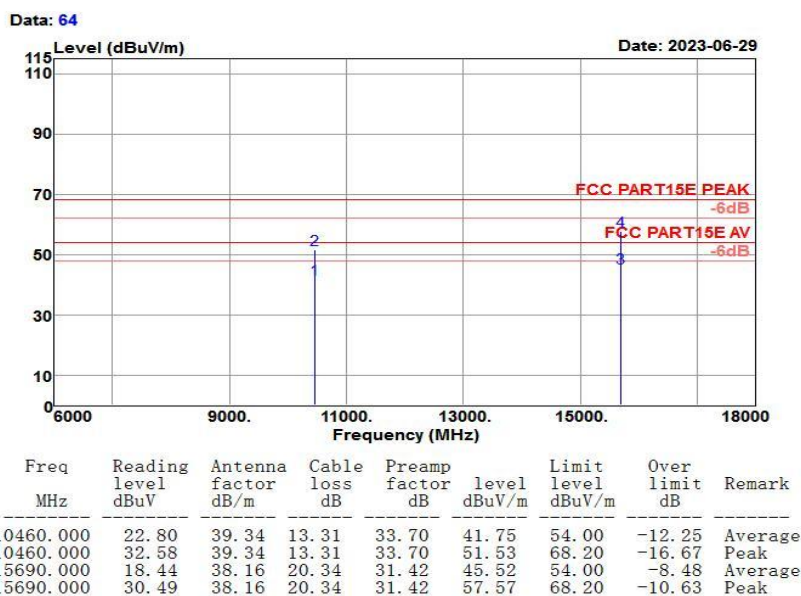

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

| | | | |
|------------------------|----------------------------|----------------------------|----------|
| Test Mode : | 802.11 n HT40 CH46 5230MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 1GHz~6GHz | Polarization : | Vertical |


| | | | |
|-----------|-------------------------------|--------------|------------|
| Test Site | : 3m Chamber | Temp/Humi | : 24℃/62% |
| Tested by | : Jack | Pol/Phase | : VERTICAL |
| Test Mode | : 802.11n HT40 CH46 (5230MHz) | Power rating | : DC 15V |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

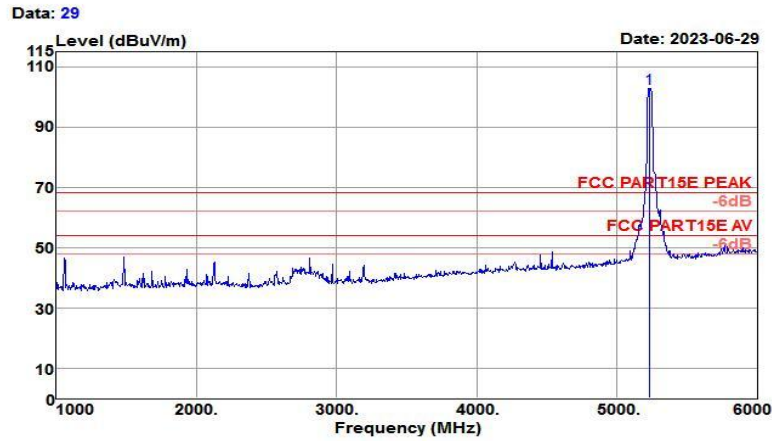

| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 5230.000 | 99.47 | 31.55 | 6.71 | 34.86 | 102.87 | 68.20 | 34.67 | Peak |

| | | | |
|------------------------|----------------------------|----------------------------|----------|
| Test Mode : | 802.11 n HT40 CH46 5230MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 6GHz~18GHz | Polarization : | Vertical |

| | | | |
|-----------|-------------------------------|--------------|------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : VERTICAL |
| Test Mode | : 802.11n HT40 CH46 (5230MHz) | Power rating | : DC 15W |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

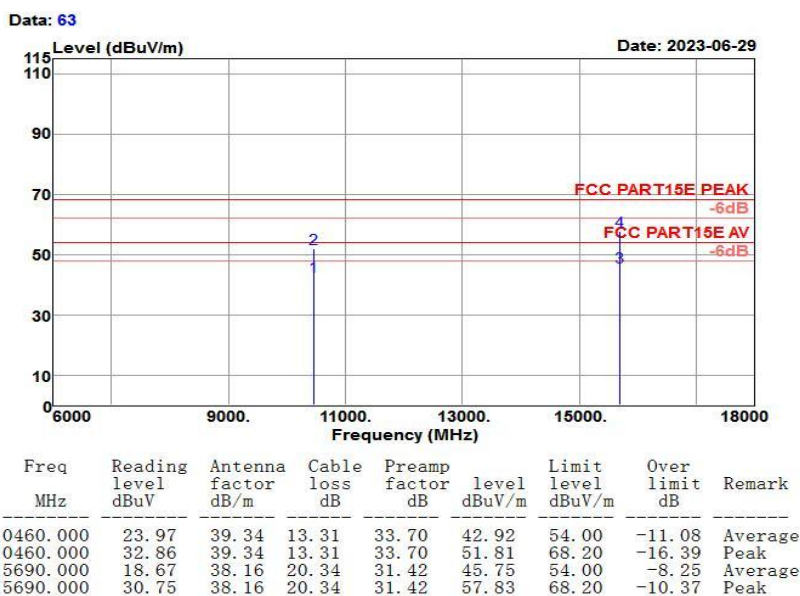


Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

| | | | |
|------------------------|----------------------------|----------------------------|------------|
| Test Mode : | 802.11 n HT40 CH62 5310MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 1GHz~6GHz | Polarization : | Horizontal |

| | | | |
|-----------|-------------------------------|--------------|--------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : HORIZONTAL |
| Test Mode | : 802.11n HT40 CH62 (5310MHz) | Power rating | : DC 15V |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |


Data: 33

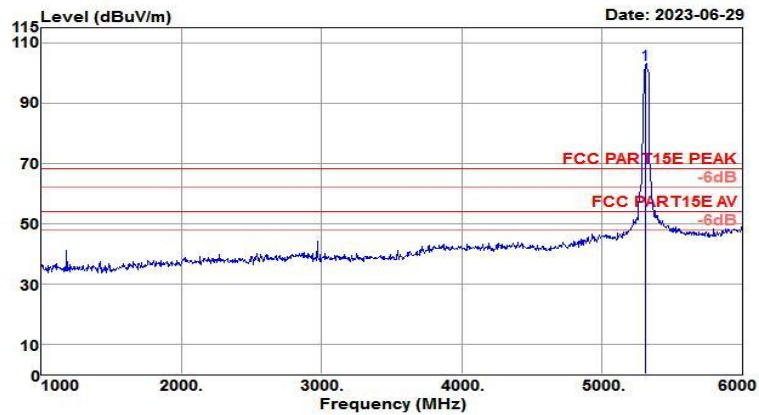

| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 5310.000 | 98.63 | 31.45 | 8.25 | 35.59 | 102.74 | 68.20 | 34.54 | Peak |

| | | | |
|------------------------|----------------------------|----------------------------|------------|
| Test Mode : | 802.11 n HT40 CH62 5310MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 6GHz~18GHz | Polarization : | Horizontal |

| | | | |
|-----------|-------------------------------|--------------|--------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : HORIZONTAL |
| Test Mode | : 802.11n HT40 CH62 (5310MHz) | Power rating | : DC 15W |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

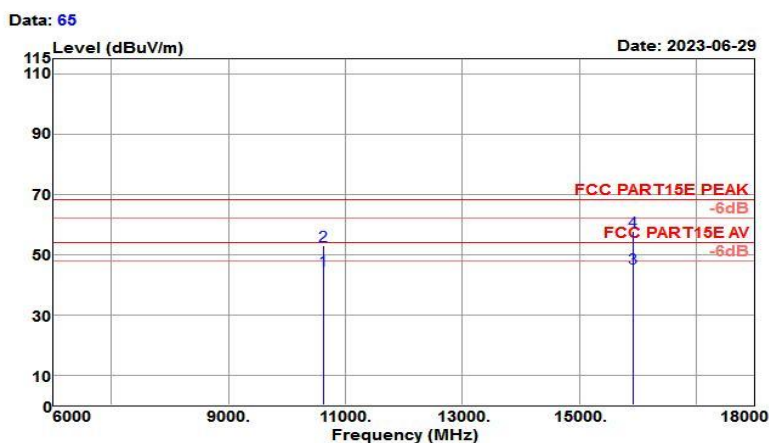


| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|---------|
| 10620.000 | 24.94 | 39.52 | 13.78 | 33.49 | 44.75 | 54.00 | -9.25 | Average |
| 10620.000 | 33.15 | 39.52 | 13.78 | 33.49 | 52.96 | 68.20 | -15.24 | Peak |
| 15930.000 | 19.45 | 37.73 | 19.56 | 31.25 | 45.49 | 54.00 | -8.51 | Average |
| 15930.000 | 31.67 | 37.73 | 19.56 | 31.25 | 57.71 | 68.20 | -10.49 | Peak |

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

| | | | |
|------------------------|----------------------------|----------------------------|----------|
| Test Mode : | 802.11 n HT40 CH62 5310MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 1GHz~6GHz | Polarization : | Vertical |


| | | | |
|-----------|-------------------------------|--------------|------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : VERTICAL |
| Test Mode | : 802.11n HT40 CH62 (5310MHz) | Power rating | : DC 15V |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

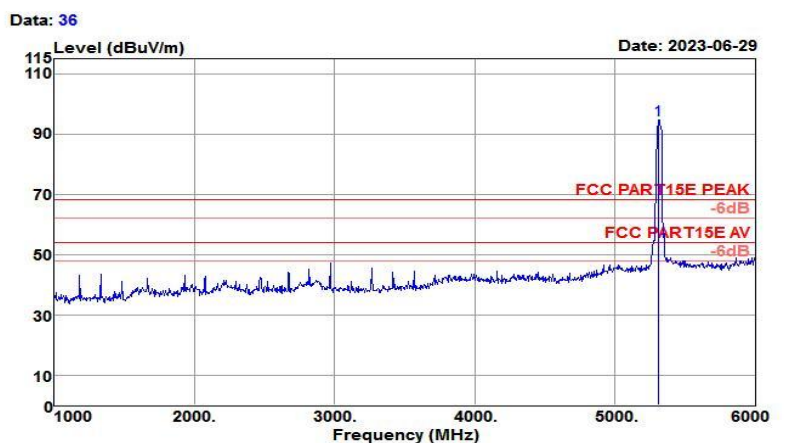

| Freq | Reading level | Antenna factor | Cable loss | Preamp factor | level | Limit level | Over limit | Remark |
|----------|---------------|----------------|------------|---------------|--------|-------------|------------|--------|
| MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | |
| 5310.000 | 90.57 | 31.45 | 8.25 | 35.59 | 94.68 | 68.20 | 26.48 | Peak |

| | | | |
|------------------------|----------------------------|----------------------------|----------|
| Test Mode : | 802.11 n HT40 CH62 5310MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 6GHz~18GHz | Polarization : | Vertical |

| | | | |
|-----------|-------------------------------|--------------|------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : VERTICAL |
| Test Mode | : 802.11n HT40 CH62 (5310MHz) | Power rating | : DC 15W |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

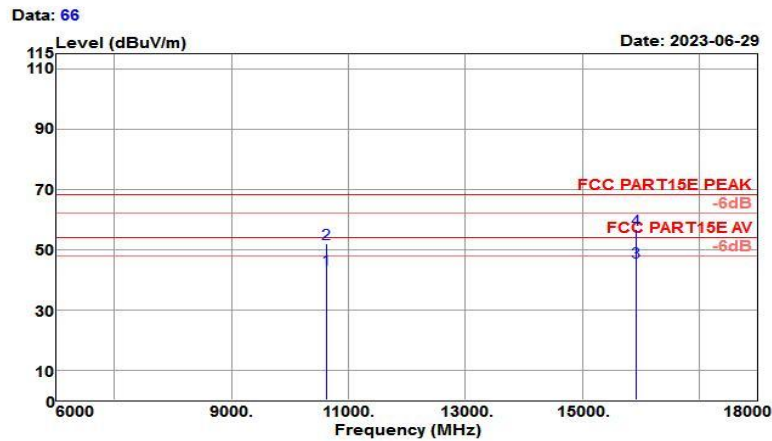


| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-----------|--------------------|---------------------|---------------|------------------|--------------|--------------------|---------------|---------|
| 10620.000 | 23.72 | 39.52 | 13.78 | 33.49 | 43.53 | 54.00 | -10.47 | Average |
| 10620.000 | 32.03 | 39.52 | 13.78 | 33.49 | 51.84 | 68.20 | -16.36 | Peak |
| 15930.000 | 19.79 | 37.73 | 19.56 | 31.25 | 45.83 | 54.00 | -8.17 | Average |
| 15930.000 | 30.67 | 37.73 | 19.56 | 31.25 | 56.71 | 68.20 | -11.49 | Peak |

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

| | | | |
|------------------------|-----------------------------|----------------------------|------------|
| Test Mode : | 802.11 n HT40 CH102 5510MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 1GHz~6GHz | Polarization : | Horizontal |


| | | | |
|-----------|-------------------------------|--------------|--------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : HORIZONTAL |
| Test Mode | : 802.11n HT40 CH102(5510MHz) | Power rating | : DC 15V |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

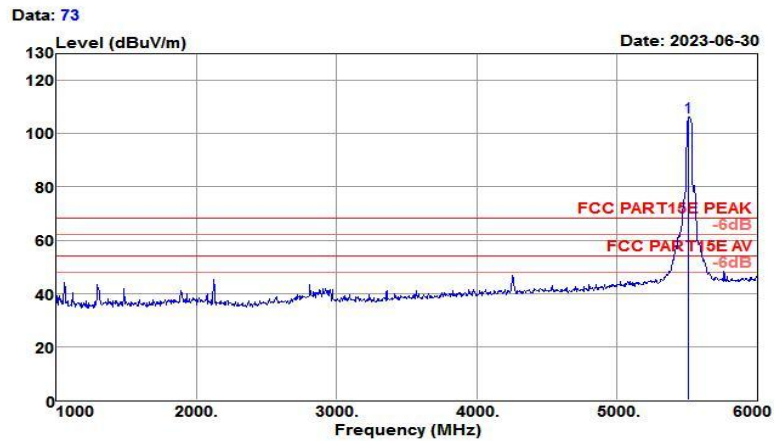

| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 5510.000 | 102.16 | 31.62 | 6.67 | 34.07 | 106.38 | 68.20 | 38.18 | Peak |

| | | | |
|------------------------|-----------------------------|----------------------------|------------|
| Test Mode : | 802.11 n HT40 CH102 5510MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 6GHz~18GHz | Polarization : | Horizontal |

| | | | |
|-----------|-------------------------------|--------------|--------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : HORIZONTAL |
| Test Mode | : 802.11n HT40 CH102(5510MHz) | Power rating | : DC 15W |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

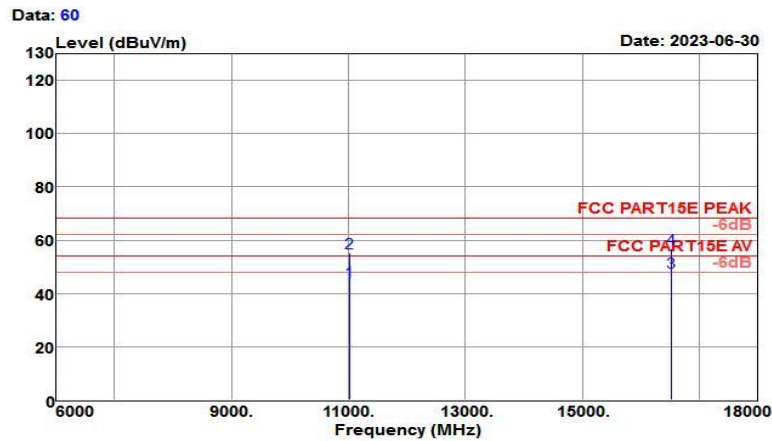


| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|---------|
| 11020.000 | 24.63 | 39.89 | 12.71 | 32.56 | 44.67 | 54.00 | -9.33 | Average |
| 11020.000 | 35.35 | 39.89 | 12.71 | 32.56 | 55.39 | 68.20 | -12.81 | Peak |
| 16530.000 | 23.81 | 38.69 | 15.83 | 30.50 | 47.83 | 54.00 | -6.17 | Average |
| 16530.000 | 32.70 | 38.69 | 15.83 | 30.50 | 56.72 | 68.20 | -11.48 | Peak |

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

| | | | |
|------------------------|-----------------------------|----------------------------|----------|
| Test Mode : | 802.11 n HT40 CH102 5510MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 1GHz~6GHz | Polarization : | Vertical |


| | | | |
|-----------|-------------------------------|--------------|------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : VERTICAL |
| Test Mode | : 802.11n HT40 CH102(5510MHz) | Power rating | : DC 15V |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

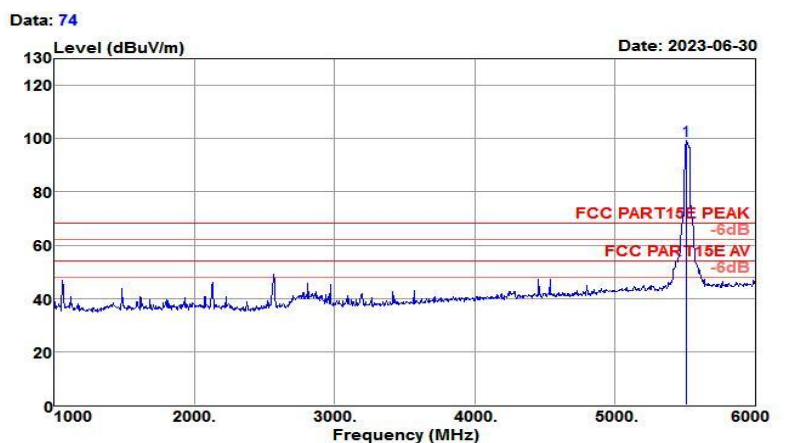

| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 5510.000 | 95.07 | 31.62 | 6.67 | 34.07 | 99.29 | 68.20 | 31.09 | Peak |

| | | | |
|------------------------|-----------------------------|----------------------------|----------|
| Test Mode : | 802.11 n HT40 CH102 5510MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 6GHz~18GHz | Polarization : | Vertical |


| | | | |
|-----------|-------------------------------|--------------|------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : VERTICAL |
| Test Mode | : 802.11n HT40 CH102(5510MHz) | Power rating | : DC 15W |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

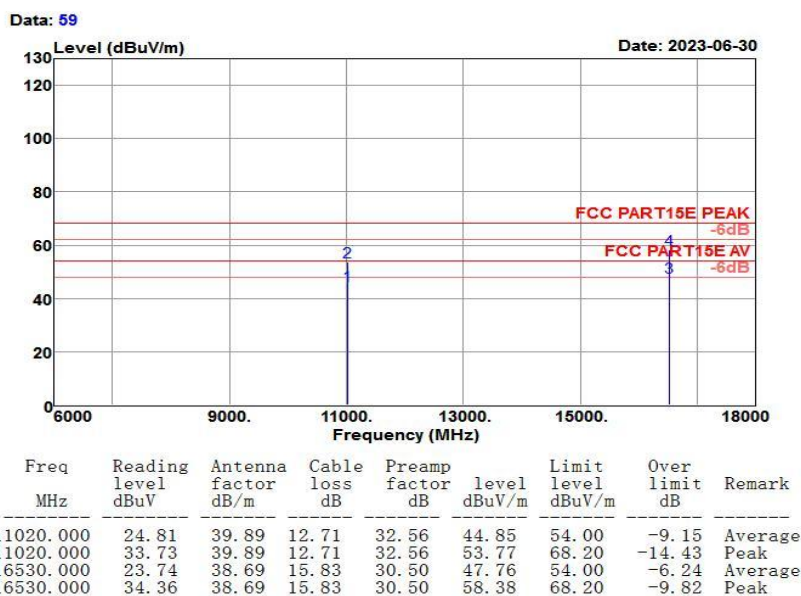

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

| | | | |
|------------------------|-----------------------------|----------------------------|------------|
| Test Mode : | 802.11 n HT40 CH110 5550MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 1GHz~6GHz | Polarization : | Horizontal |


| | | | |
|-----------|-------------------------------|--------------|--------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : HORIZONTAL |
| Test Mode | : 802.11n HT40 CH110(5550MHz) | Power rating | : DC 15V |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

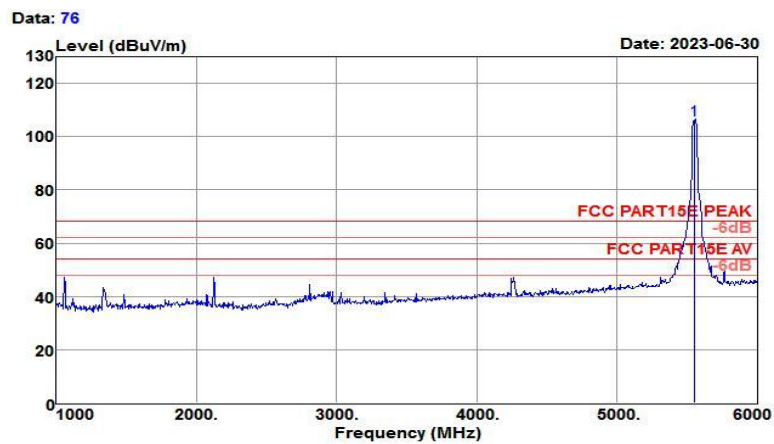

| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 5550.000 | 101.61 | 31.68 | 6.77 | 33.96 | 106.10 | 68.20 | 37.90 | Peak |

| | | | |
|------------------------|-----------------------------|----------------------------|------------|
| Test Mode : | 802.11 n HT40 CH110 5550MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 6GHz~18GHz | Polarization : | Horizontal |

| | | | |
|-----------|-------------------------------|--------------|--------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : HORIZONTAL |
| Test Mode | : 802.11n HT40 CH110(5550MHz) | Power rating | : DC 15W |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

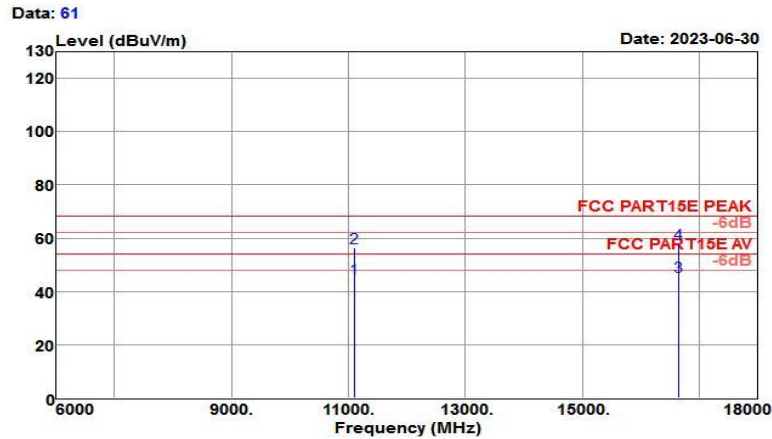


| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|---------|
| 11100.000 | 24.82 | 39.86 | 12.82 | 32.62 | 44.88 | 54.00 | -9.12 | Average |
| 11100.000 | 36.51 | 39.86 | 12.82 | 32.62 | 56.57 | 68.20 | -11.63 | Peak |
| 16650.000 | 20.36 | 39.05 | 16.69 | 30.40 | 45.70 | 54.00 | -8.30 | Average |
| 16650.000 | 32.58 | 39.05 | 16.69 | 30.40 | 57.92 | 68.20 | -10.28 | Peak |

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

| | | | |
|------------------------|-----------------------------|----------------------------|----------|
| Test Mode : | 802.11 n HT40 CH110 5550MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 1GHz~6GHz | Polarization : | Vertical |


| | | | |
|-----------|-------------------------------|--------------|------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : VERTICAL |
| Test Mode | : 802.11n HT40 CH110(5550MHz) | Power rating | : DC 15V |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

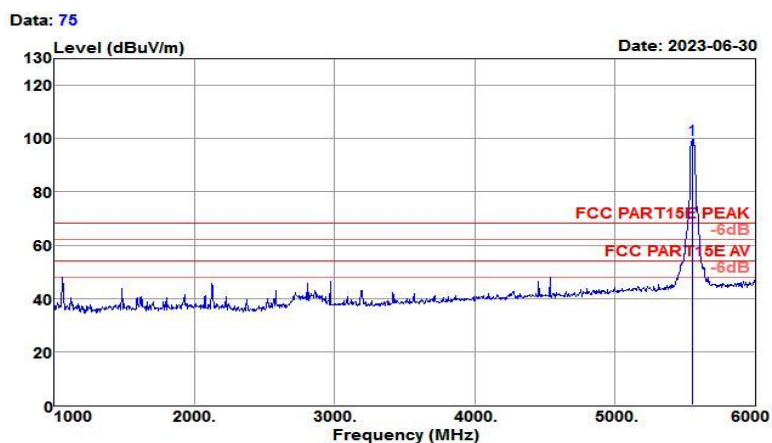

| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 5550.000 | 95.19 | 31.68 | 6.77 | 33.96 | 99.68 | 68.20 | 31.48 | Peak |

| | | | |
|------------------------|-----------------------------|----------------------------|----------|
| Test Mode : | 802.11 n HT40 CH110 5550MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 6GHz~18GHz | Polarization : | Vertical |

| | | | |
|-----------|-------------------------------|--------------|------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : VERTICAL |
| Test Mode | : 802.11n HT40 CH110(5550MHz) | Power rating | : DC 15W |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

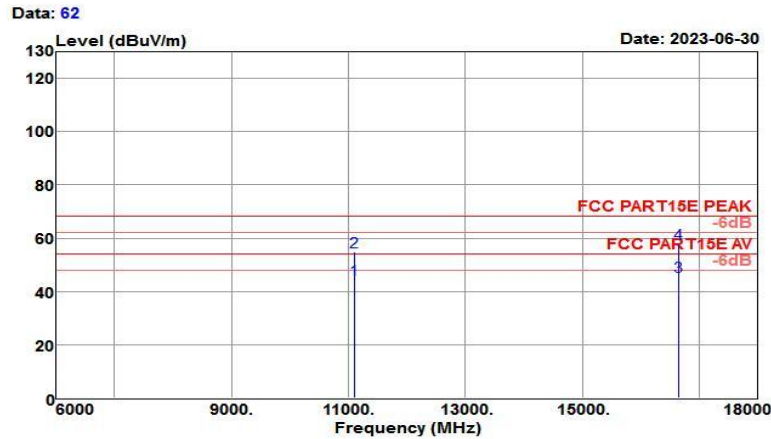


| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|---------|
| 11100.000 | 24.51 | 39.86 | 12.82 | 32.62 | 44.57 | 54.00 | -9.43 | Average |
| 11100.000 | 34.75 | 39.86 | 12.82 | 32.62 | 54.81 | 68.20 | -13.39 | Peak |
| 16650.000 | 20.32 | 39.05 | 16.69 | 30.40 | 45.66 | 54.00 | -8.34 | Average |
| 16650.000 | 32.67 | 39.05 | 16.69 | 30.40 | 58.01 | 68.20 | -10.19 | Peak |

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

| | | | |
|------------------------|-----------------------------|----------------------------|------------|
| Test Mode : | 802.11 n HT40 CH134 5670MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 1GHz~6GHz | Polarization : | Horizontal |


| | | | |
|-----------|-------------------------------|--------------|--------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : HORIZONTAL |
| Test Mode | : 802.11n HT40 CH134(5670MHz) | Power rating | : DC 15V |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

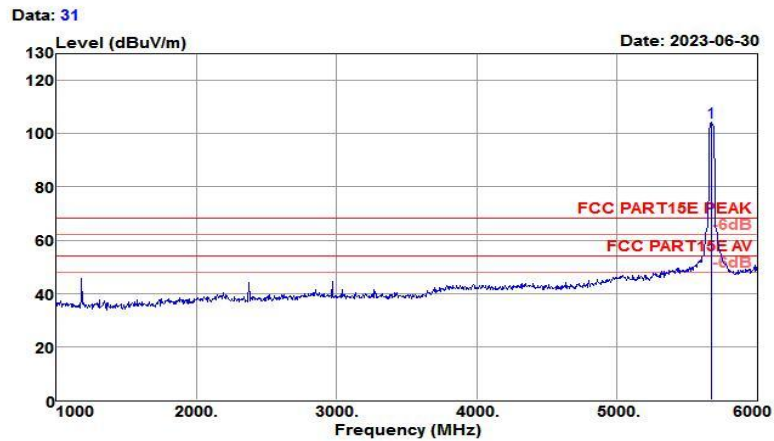

| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 5670.000 | 100.14 | 31.87 | 7.73 | 35.23 | 104.51 | 68.20 | 36.31 | Peak |

| | | | |
|------------------------|-----------------------------|----------------------------|------------|
| Test Mode : | 802.11 n HT40 CH134 5670MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 6GHz~18GHz | Polarization : | Horizontal |

| | | | |
|-----------|-------------------------------|--------------|--------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : HORIZONTAL |
| Test Mode | : 802.11n HT40 CH134(5670MHz) | Power rating | : DC 15W |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

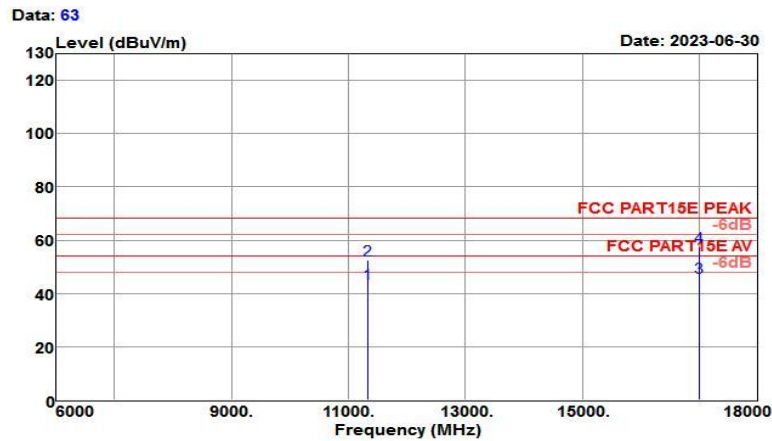


| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|---------|
| 11340.000 | 23.53 | 39.76 | 13.14 | 32.80 | 43.63 | 54.00 | -10.37 | Average |
| 11340.000 | 32.48 | 39.76 | 13.14 | 32.80 | 52.58 | 68.20 | -15.62 | Peak |
| 17010.000 | 16.85 | 40.13 | 19.15 | 30.08 | 46.05 | 54.00 | -7.95 | Average |
| 17010.000 | 28.52 | 40.13 | 19.15 | 30.08 | 57.72 | 68.20 | -10.48 | Peak |

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

| | | | |
|------------------------|-----------------------------|----------------------------|----------|
| Test Mode : | 802.11 n HT40 CH134 5670MHz | Temperature : | 21~23°C |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 1GHz~6GHz | Polarization : | Vertical |


| | | | |
|-----------|-------------------------------|--------------|------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23°C/61% |
| Tested by | : Jack | Pol/Phase | : VERTICAL |
| Test Mode | : 802.11n HT40 CH134(5670MHz) | Power rating | : DC 15V |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

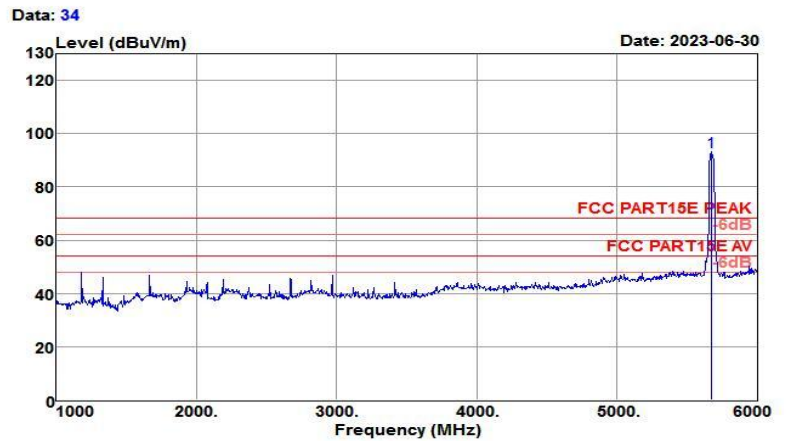

| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 5670.000 | 88.70 | 31.87 | 7.73 | 35.23 | 93.07 | 68.20 | 24.87 | Peak |

| | | | |
|------------------------|-----------------------------|----------------------------|----------|
| Test Mode : | 802.11 n HT40 CH134 5670MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 6GHz~18GHz | Polarization : | Vertical |

| | | | |
|-----------|-------------------------------|--------------|------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : VERTICAL |
| Test Mode | : 802.11n HT40 CH134(5670MHz) | Power rating | : DC 15W |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

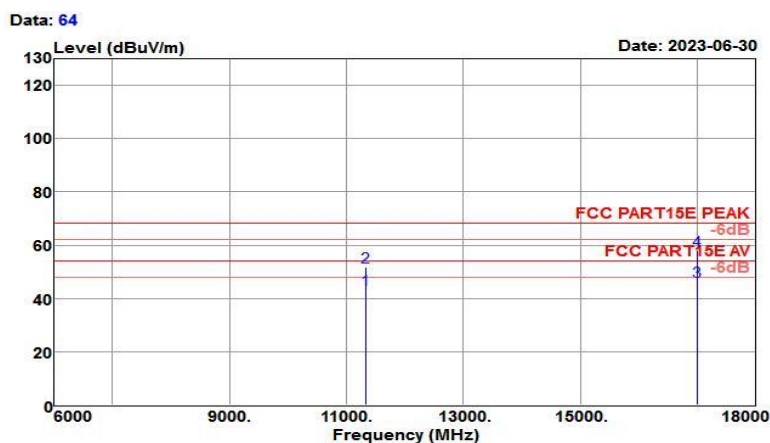


| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|---------|
| 11340.000 | 23.16 | 39.76 | 13.14 | 32.80 | 43.26 | 54.00 | -10.74 | Average |
| 11340.000 | 31.84 | 39.76 | 13.14 | 32.80 | 51.94 | 68.20 | -16.26 | Peak |
| 17010.000 | 17.35 | 40.13 | 19.15 | 30.08 | 46.55 | 54.00 | -7.45 | Average |
| 17010.000 | 28.57 | 40.13 | 19.15 | 30.08 | 57.77 | 68.20 | -10.43 | Peak |

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

| | | | |
|------------------------|-----------------------------|----------------------------|------------|
| Test Mode : | 802.11 n HT40 CH142 5710MHz | Temperature : | 21~23°C |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 1GHz~6GHz | Polarization : | Horizontal |


| | | | |
|-----------|--------------------------------|---------------|--------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23°C/61% |
| Tested by | : Jack | Pol/Phase | : HORIZONTAL |
| Test Mode | : 802.11n HT40 CH142 (5710MHz) | Power rating: | DC 15V |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

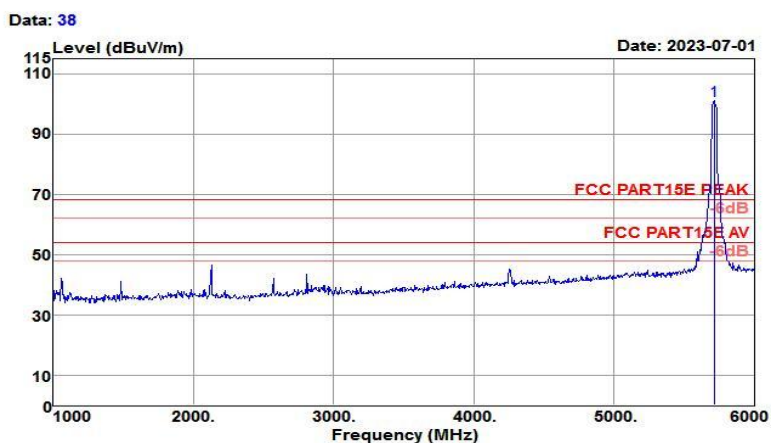

| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 5710.000 | 96.05 | 31.94 | 6.56 | 33.51 | 101.04 | 68.20 | 32.84 | Peak |

| | | | |
|------------------------|-----------------------------|----------------------------|------------|
| Test Mode : | 802.11 n HT40 CH142 5710MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 6GHz~18GHz | Polarization : | Horizontal |

| | | | |
|-----------|-------------------------------|--------------|--------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : HORIZONTAL |
| Test Mode | : 802.11n HT40 CH142(5710MHz) | Power rating | : DC 15W |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

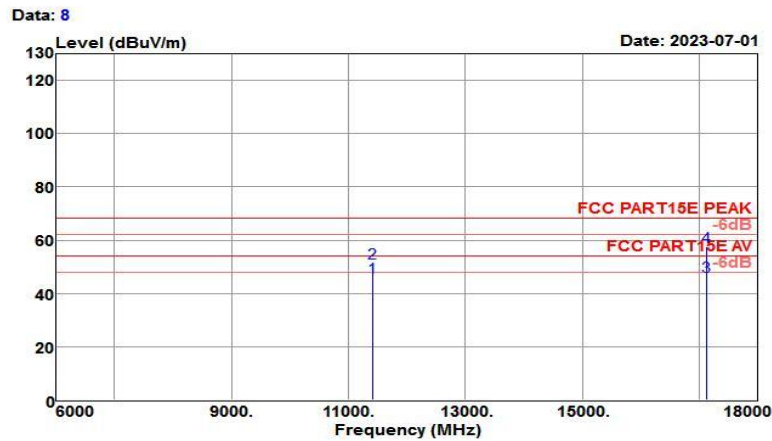


| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-----------|--------------------|---------------------|---------------|------------------|--------------|--------------------|---------------|---------|
| 11424.000 | 26.14 | 39.73 | 13.26 | 32.92 | 46.21 | 54.00 | -7.79 | Average |
| 11424.000 | 31.21 | 39.73 | 13.26 | 32.92 | 51.28 | 68.20 | -16.92 | Peak |
| 17130.000 | 17.59 | 40.54 | 18.40 | 30.10 | 46.43 | 54.00 | -7.57 | Average |
| 17130.000 | 28.65 | 40.54 | 18.40 | 30.10 | 57.49 | 68.20 | -10.71 | Peak |

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

| | | | |
|------------------------|-----------------------------|----------------------------|----------|
| Test Mode : | 802.11 n HT40 CH142 5710MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 1GHz~6GHz | Polarization : | Vertical |

| | | | |
|-----------|--------------------------------|---------------|------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : VERTICAL |
| Test Mode | : 802.11n HT40 CH142 (5710MHz) | Power rating: | DC 15V |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |


Data: 37

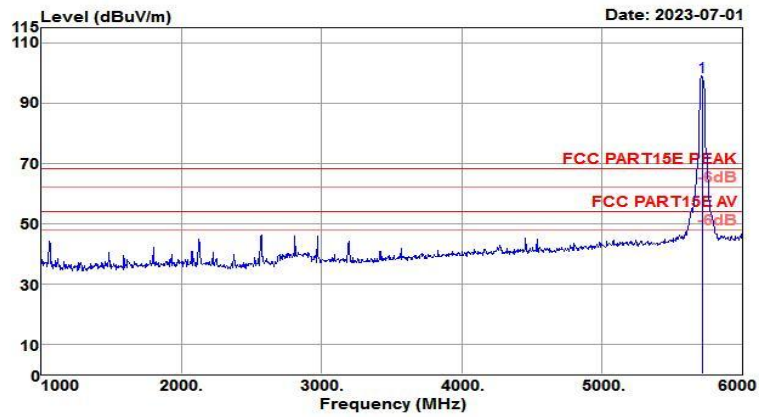

| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 5710.000 | 93.76 | 31.94 | 6.56 | 33.51 | 98.75 | 68.20 | 30.55 | Peak |

| | | | |
|------------------------|-----------------------------|----------------------------|----------|
| Test Mode : | 802.11 n HT40 CH142 5710MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 6GHz~18GHz | Polarization : | Vertical |

| | | | |
|-----------|-------------------------------|--------------|------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : VERTICAL |
| Test Mode | : 802.11n HT40 CH142(5710MHz) | Power rating | : DC 15W |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

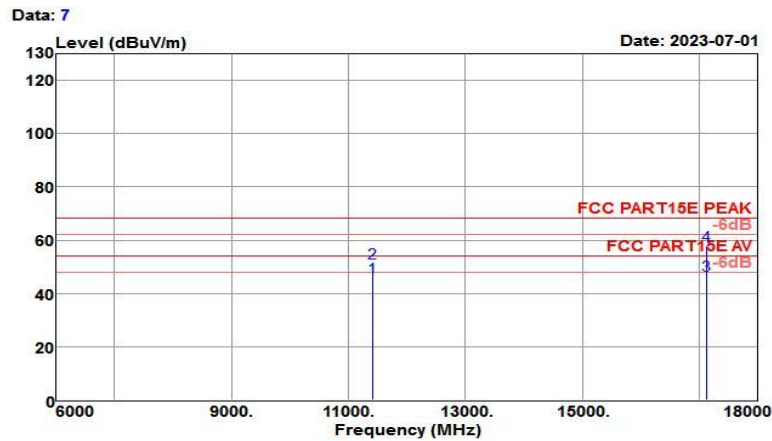


| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|---------|
| 11420.000 | 26.13 | 39.73 | 13.25 | 32.92 | 46.19 | 54.00 | -7.81 | Average |
| 11420.000 | 31.29 | 39.73 | 13.25 | 32.92 | 51.35 | 68.20 | -16.85 | Peak |
| 17130.000 | 17.81 | 40.54 | 18.40 | 30.10 | 46.65 | 54.00 | -7.35 | Average |
| 17130.000 | 28.91 | 40.54 | 18.40 | 30.10 | 57.75 | 68.20 | -10.45 | Peak |

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

| | | | |
|------------------------|-----------------------------|----------------------------|------------|
| Test Mode : | 802.11 n HT40 CH151 5755MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 1GHz~6GHz | Polarization : | Horizontal |


| | | | |
|-----------|--------------------------------|--------------|--------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : HORIZONTAL |
| Test Mode | : 802.11n HT40 CH151 (5755MHz) | Power rating | : DC 15W |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

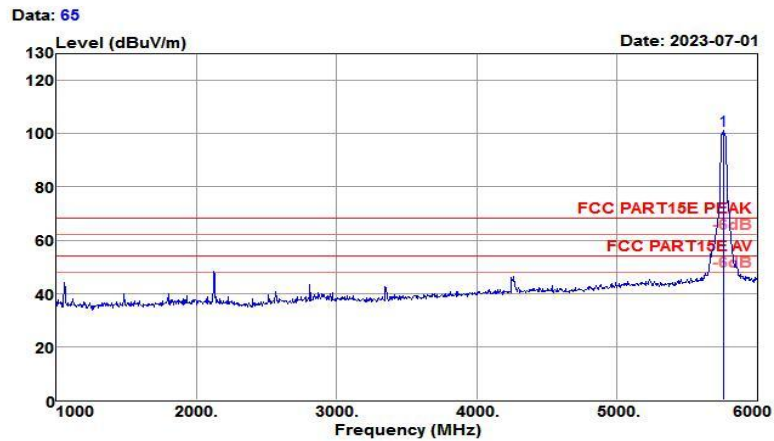

| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 5755.000 | 96.24 | 32.01 | 6.43 | 33.39 | 101.29 | 68.20 | 33.09 | Peak |

| | | | |
|------------------------|-----------------------------|----------------------------|------------|
| Test Mode : | 802.11 n HT40 CH151 5755MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 6GHz~18GHz | Polarization : | Horizontal |


| | | | |
|-----------|--------------------------------|--------------|--------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : HORIZONTAL |
| Test Mode | : 802.11n HT40 CH151 (5755MHz) | Power rating | : DC 15V |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

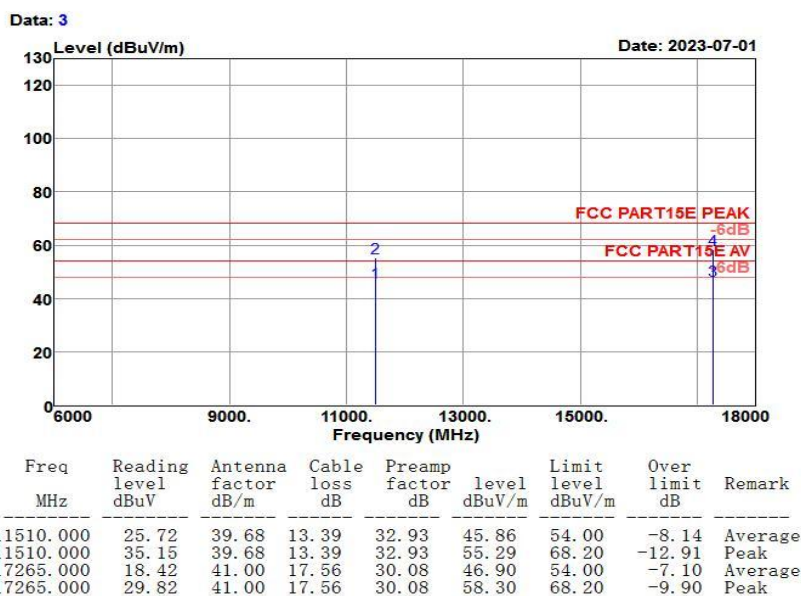

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

| | | | |
|------------------------|-----------------------------|----------------------------|----------|
| Test Mode : | 802.11 n HT40 CH151 5755MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 1GHz~6GHz | Polarization : | Vertical |


| | | | |
|-----------|--------------------------------|--------------|------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : VERTICAL |
| Test Mode | : 802.11n HT40 CH151 (5755MHz) | Power rating | : DC 15W |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

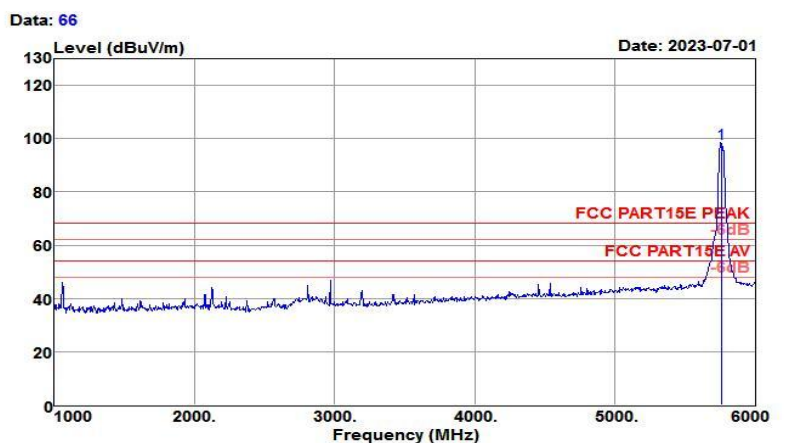

| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 5755.000 | 93.24 | 32.01 | 6.43 | 33.39 | 98.29 | 68.20 | 30.09 | Peak |

| | | | |
|------------------------|-----------------------------|----------------------------|----------|
| Test Mode : | 802.11 n HT40 CH151 5755MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 6GHz~18GHz | Polarization : | Vertical |

| | | | |
|-----------|--------------------------------|--------------|------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : VERTICAL |
| Test Mode | : 802.11n HT40 CH151 (5755MHz) | Power rating | : DC 15V |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

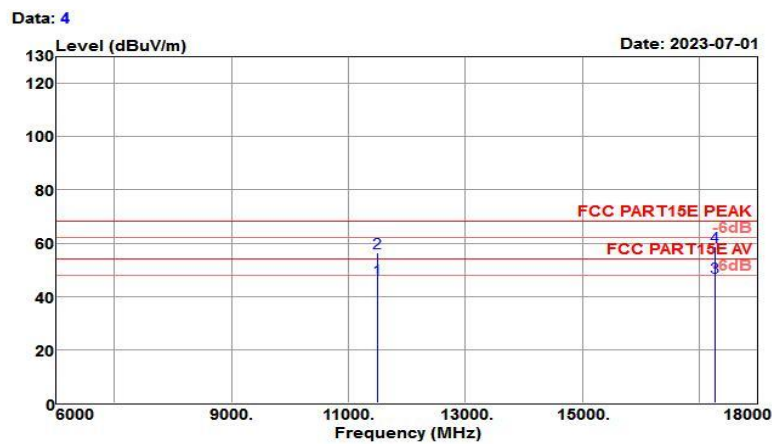


| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|---------|
| 11510.000 | 26.19 | 39.68 | 13.39 | 32.93 | 46.33 | 54.00 | -7.67 | Average |
| 11510.000 | 36.43 | 39.68 | 13.39 | 32.93 | 56.57 | 68.20 | -11.63 | Peak |
| 17265.000 | 18.52 | 41.00 | 17.56 | 30.08 | 47.00 | 54.00 | -7.00 | Average |
| 17265.000 | 30.18 | 41.00 | 17.56 | 30.08 | 58.66 | 68.20 | -9.54 | Peak |

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

| | | | |
|------------------------|-----------------------------|----------------------------|------------|
| Test Mode : | 802.11 n HT40 CH159 5795MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 1GHz~6GHz | Polarization : | Horizontal |


| | | | |
|-----------|--------------------------------|---------------|--------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : HORIZONTAL |
| Test Mode | : 802.11n HT40 CH159 (5795MHz) | Power rating: | DC 15V |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

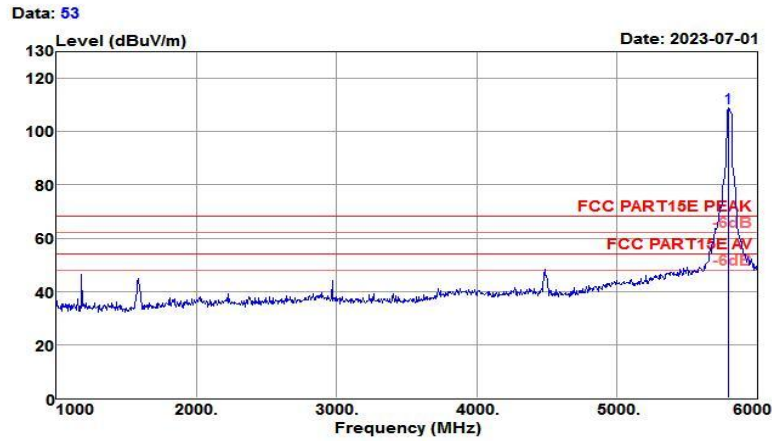

| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 5795.000 | 105.18 | 32.07 | 6.74 | 35.11 | 108.88 | 68.20 | 40.68 | Peak |

| | | | |
|------------------------|-----------------------------|----------------------------|------------|
| Test Mode : | 802.11 n HT40 CH159 5795MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 6GHz~18GHz | Polarization : | Horizontal |

| | | | |
|-----------|--------------------------------|--------------|--------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : HORIZONTAL |
| Test Mode | : 802.11n HT40 CH159 (5795MHz) | Power rating | : DC 15V |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

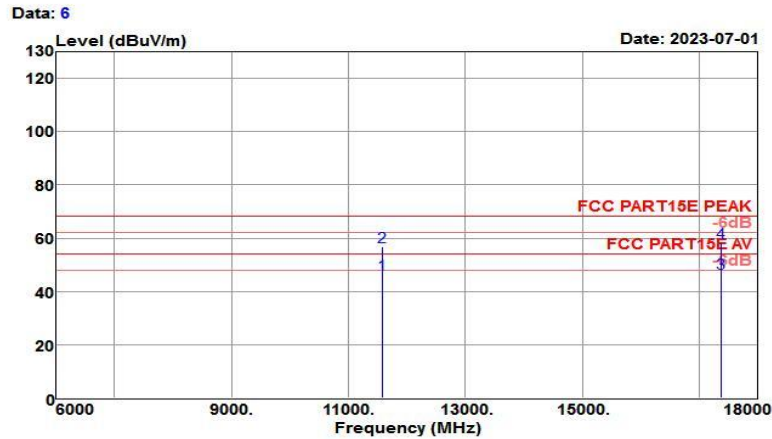


| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|---------|
| 11590.000 | 26.17 | 39.52 | 13.60 | 32.99 | 46.30 | 54.00 | -7.70 | Average |
| 11590.000 | 36.64 | 39.52 | 13.60 | 32.99 | 56.77 | 68.20 | -11.43 | Peak |
| 17385.000 | 18.84 | 41.41 | 16.81 | 30.08 | 46.98 | 54.00 | -7.02 | Average |
| 17385.000 | 30.25 | 41.41 | 16.81 | 30.08 | 58.39 | 68.20 | -9.81 | Peak |

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

| | | | |
|------------------------|-----------------------------|----------------------------|----------|
| Test Mode : | 802.11 n HT40 CH159 5795MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 1GHz~6GHz | Polarization : | Vertical |


| | | | |
|-----------|--------------------------------|--------------|------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : VERTICAL |
| Test Mode | : 802.11n HT40 CH159 (5795MHz) | Power rating | : DC 15W |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

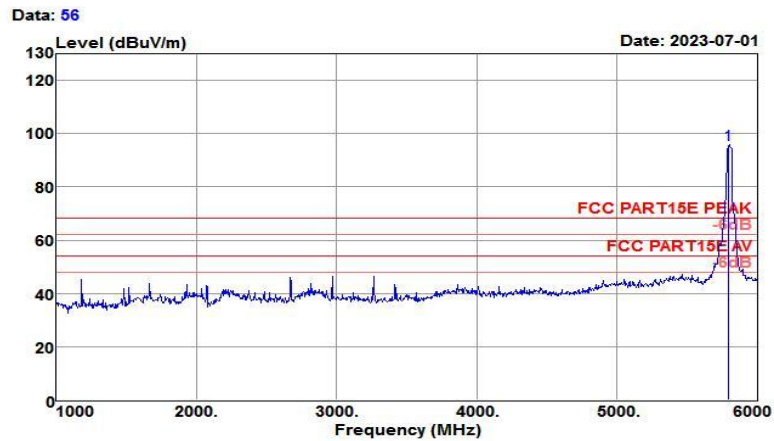

| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 5795.000 | 92.22 | 32.07 | 6.74 | 35.11 | 95.92 | 68.20 | 27.72 | Peak |

| | | | |
|------------------------|-----------------------------|----------------------------|----------|
| Test Mode : | 802.11 n HT40 CH159 5795MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 6GHz~18GHz | Polarization : | Vertical |


| | | | |
|-----------|--------------------------------|--------------|------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : VERTICAL |
| Test Mode | : 802.11n HT40 CH159 (5795MHz) | Power rating | : DC 15W |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

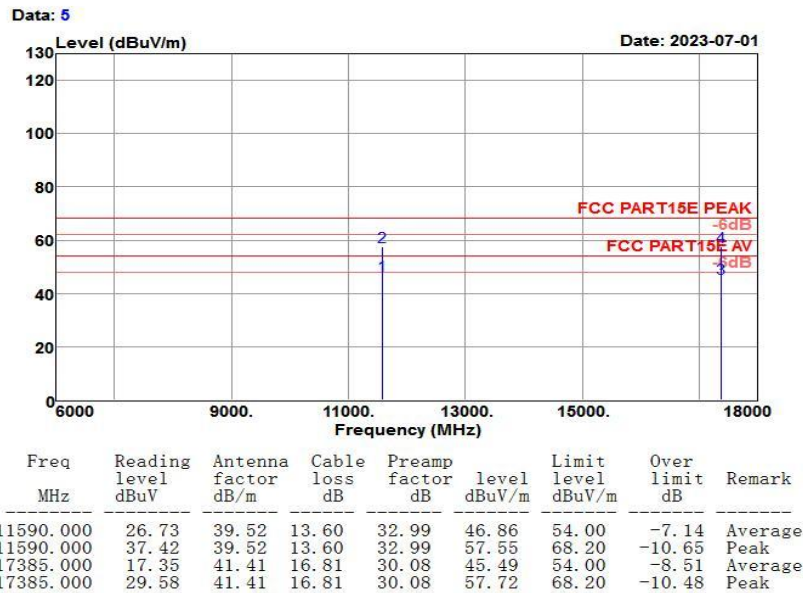

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

| | | | |
|------------------------|------------------------------|----------------------------|------------|
| Test Mode : | 802.11 ac VHT80 CH42 5210MHz | Temperature : | 21~23°C |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 1GHz~6GHz | Polarization : | Horizontal |


| | | | |
|-----------|--------------------------------|--------------|--------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23°C / 61% |
| Tested by | : Jack | Pol/Phase | : HORIZONTAL |
| Test Mode | : 802.11ac VHT80 CH42(5210MHz) | Power rating | : DC 15V |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

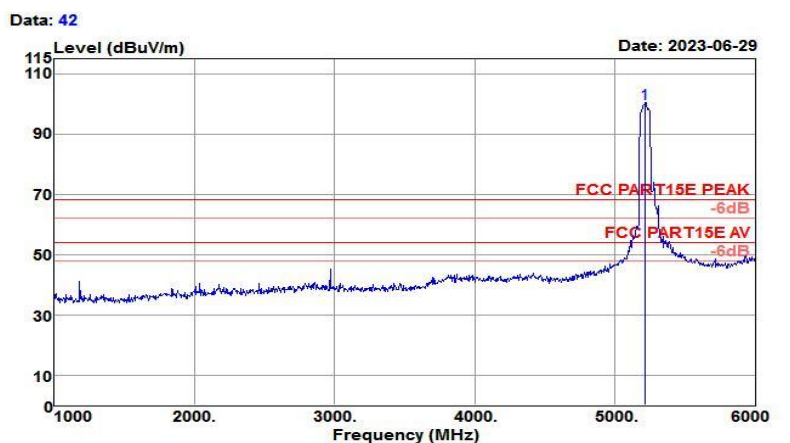

| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 5210.000 | 97.01 | 31.37 | 7.56 | 35.69 | 100.25 | 68.20 | 32.05 | Peak |

| | | | |
|------------------------|------------------------------|----------------------------|------------|
| Test Mode : | 802.11 ac VHT80 CH42 5210MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 6GHz~18GHz | Polarization : | Horizontal |


| | | | |
|-----------|--------------------------------|--------------|--------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : HORIZONTAL |
| Test Mode | : 802.11ac VHT80 CH42(5210MHz) | Power rating | : DC 15V |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

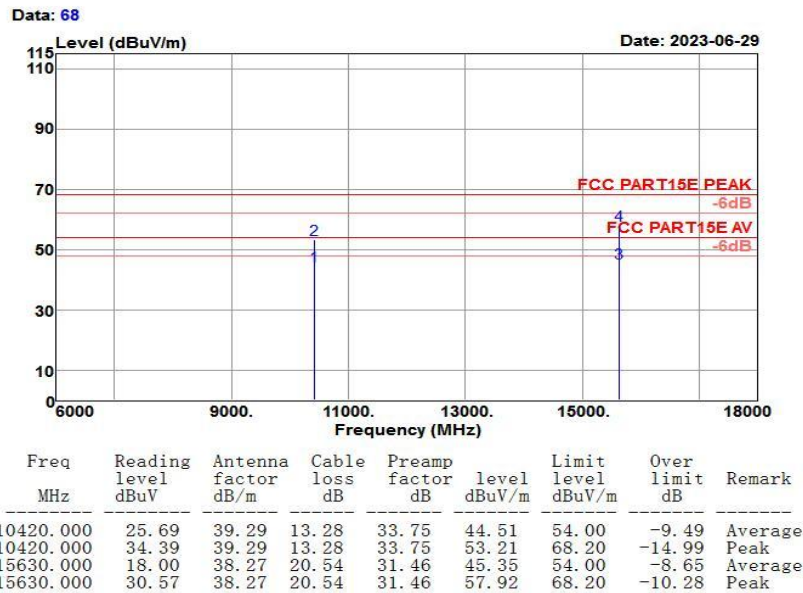

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

| | | | |
|------------------------|------------------------------|----------------------------|----------|
| Test Mode : | 802.11 ac VHT80 CH42 5210MHz | Temperature : | 21~23°C |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 1GHz~6GHz | Polarization : | Vertical |


| | | | |
|-----------|--------------------------------|--------------|------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23°C/61% |
| Tested by | : Jack | Pol/Phase | : VERTICAL |
| Test Mode | : 802.11ac VHT80 CH42(5210MHz) | Power rating | : DC 15V |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

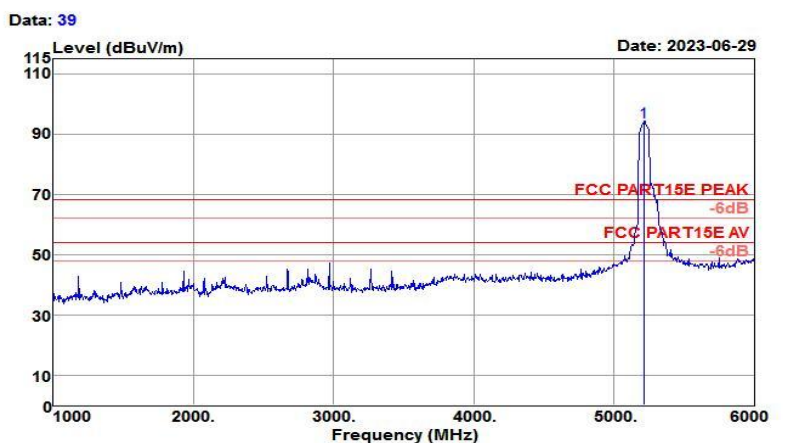

| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 5210.000 | 90.70 | 31.37 | 7.56 | 35.69 | 93.94 | 68.20 | 25.74 | Peak |

| | | | |
|------------------------|------------------------------|----------------------------|----------|
| Test Mode : | 802.11 ac VHT80 CH42 5210MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 6GHz~18GHz | Polarization : | Vertical |

| | | | |
|-----------|--------------------------------|--------------|------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : VERTICAL |
| Test Mode | : 802.11ac VHT80 CH42(5210MHz) | Power rating | : DC 15V |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

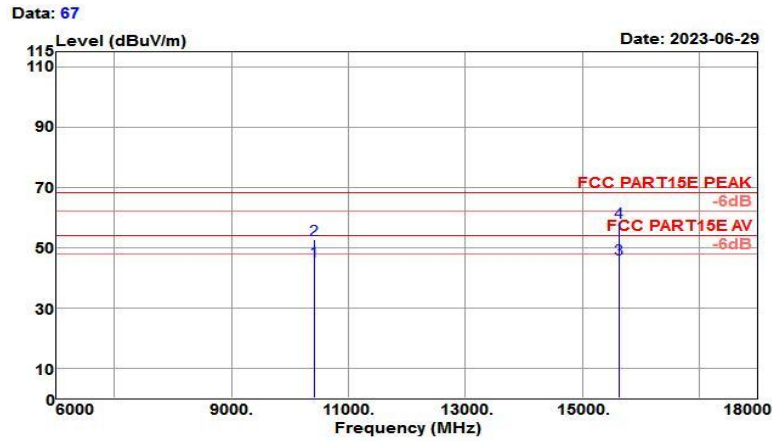


| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|---------|
| 10420.000 | 26.59 | 39.29 | 13.28 | 33.75 | 45.41 | 54.00 | -8.59 | Average |
| 10420.000 | 33.82 | 39.29 | 13.28 | 33.75 | 52.64 | 68.20 | -15.56 | Peak |
| 15630.000 | 18.83 | 38.27 | 20.54 | 31.46 | 46.18 | 54.00 | -7.82 | Average |
| 15630.000 | 31.17 | 38.27 | 20.54 | 31.46 | 58.52 | 68.20 | -9.68 | Peak |

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

| | | | |
|------------------------|------------------------------|----------------------------|------------|
| Test Mode : | 802.11 ac VHT80 CH58 5290MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 1GHz~6GHz | Polarization : | Horizontal |


| | | | |
|-----------|--------------------------------|--------------|--------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : HORIZONTAL |
| Test Mode | : 802.11ac VHT80 CH58(5290MHz) | Power rating | : DC 15V |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

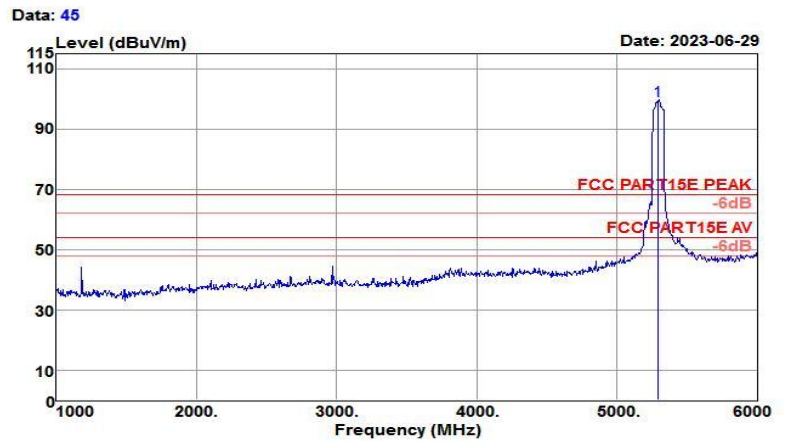

| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 5290.000 | 95.39 | 31.43 | 8.12 | 35.61 | 99.33 | 68.20 | 31.13 | Peak |

| | | | |
|------------------------|------------------------------|----------------------------|------------|
| Test Mode : | 802.11 ac VHT80 CH58 5290MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 6GHz~18GHz | Polarization : | Horizontal |

| | | | |
|-----------|--------------------------------|--------------|--------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : HORIZONTAL |
| Test Mode | : 802.11ac VHT80 CH58(5290MHz) | Power rating | : DC 15V |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

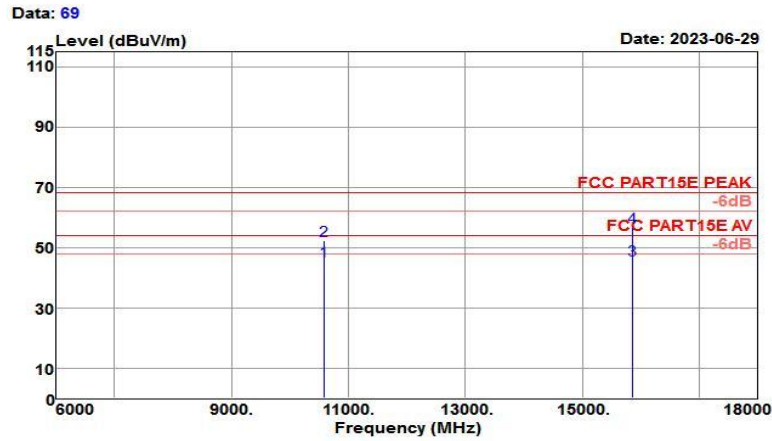


| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|---------|
| 10580.000 | 25.85 | 39.48 | 13.64 | 33.55 | 45.42 | 54.00 | -8.58 | Average |
| 10580.000 | 32.78 | 39.48 | 13.64 | 33.55 | 52.35 | 68.20 | -15.85 | Peak |
| 15870.000 | 19.46 | 37.83 | 19.75 | 31.29 | 45.75 | 54.00 | -8.25 | Average |
| 15870.000 | 30.23 | 37.83 | 19.75 | 31.29 | 56.52 | 68.20 | -11.68 | Peak |

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

| | | | |
|------------------------|------------------------------|----------------------------|----------|
| Test Mode : | 802.11 ac VHT80 CH58 5290MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 1GHz~6GHz | Polarization : | Vertical |


| | | | |
|-----------|--------------------------------|--------------|--------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : HORIZONTAL |
| Test Mode | : 802.11ac VHT80 CH58(5290MHz) | Power rating | : DC 15V |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

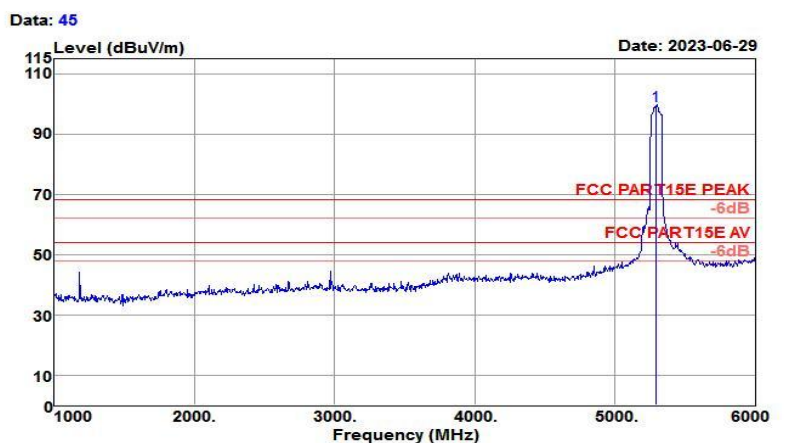

| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 5290.000 | 95.39 | 31.43 | 8.12 | 35.61 | 99.33 | 68.20 | 31.13 | Peak |

| | | | |
|------------------------|------------------------------|----------------------------|----------|
| Test Mode : | 802.11 ac VHT80 CH58 5290MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 6GHz~18GHz | Polarization : | Vertical |

| | | | |
|-----------|--------------------------------|--------------|------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : VERTICAL |
| Test Mode | : 802.11ac VHT80 CH58(5290MHz) | Power rating | : DC 15V |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

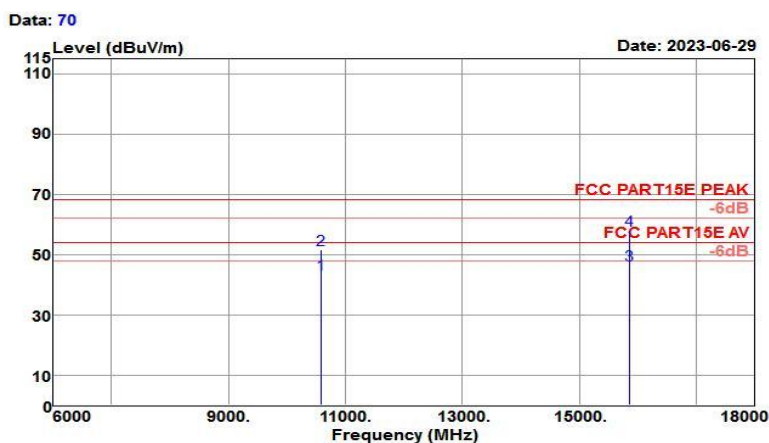


| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|---------|
| 10580.000 | 23.79 | 39.48 | 13.64 | 33.55 | 43.36 | 54.00 | -10.64 | Average |
| 10580.000 | 32.00 | 39.48 | 13.64 | 33.55 | 51.57 | 68.20 | -16.63 | Peak |
| 15870.000 | 20.06 | 37.83 | 19.75 | 31.29 | 46.35 | 54.00 | -7.65 | Average |
| 15870.000 | 31.65 | 37.83 | 19.75 | 31.29 | 57.94 | 68.20 | -10.26 | Peak |

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

| | | | |
|------------------------|-------------------------------|----------------------------|------------|
| Test Mode : | 802.11 ac VHT80 CH106 5530MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 1GHz~6GHz | Polarization : | Horizontal |


| | | | |
|-----------|---------------------------------|---------------|--------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : HORIZONTAL |
| Test Mode | : 802.11ac VHT80 CH106(5530MHz) | Power rating: | DC 15V |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

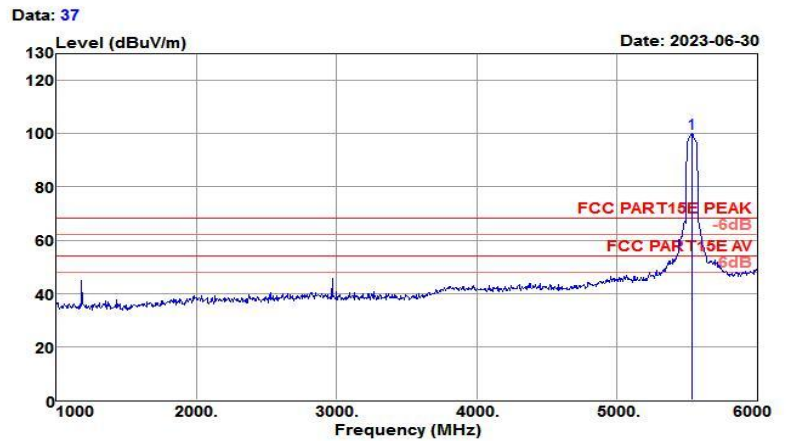

| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 5530.000 | 95.48 | 31.65 | 8.49 | 35.37 | 100.25 | 68.20 | 32.05 | Peak |

| | | | |
|------------------------|-------------------------------|----------------------------|------------|
| Test Mode : | 802.11 ac VHT80 CH106 5530MHz | Temperature : | 21~23℃ |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 6GHz~18GHz | Polarization : | Horizontal |


| | | | |
|-----------|---------------------------------|---------------|--------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23℃/61% |
| Tested by | : Jack | Pol/Phase | : HORIZONTAL |
| Test Mode | : 802.11ac VHT80 CH106(5530MHz) | Power rating: | DC 15W |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

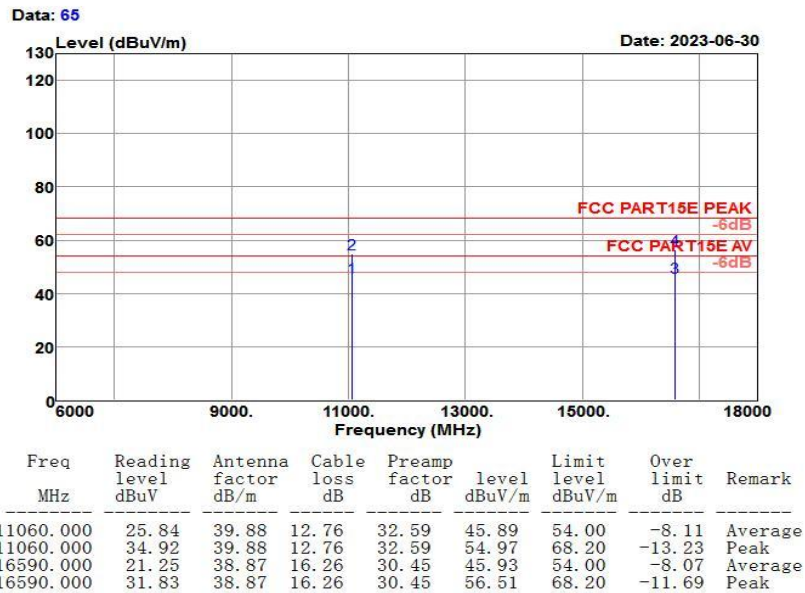

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

| | | | |
|------------------------|-------------------------------|----------------------------|----------|
| Test Mode : | 802.11 ac VHT80 CH106 5530MHz | Temperature : | 21~23°C |
| Test Engineer : | Jack Liu | Relative Humidity : | 61~64% |
| Frequency Range | 1GHz~6GHz | Polarization : | Vertical |

| | | | |
|-----------|---------------------------------|---------------|------------|
| Test Site | : 3m Chamber | Temp/Humi | : 23°C/61% |
| Tested by | : Jack | Pol/Phase | : VERTICAL |
| Test Mode | : 802.11ac VHT80 CH106(5530MHz) | Power rating: | DC 15V |
| EUT | : Digital Video Monitor | Comment | : |
| Model No. | : DVM-D1 | | |

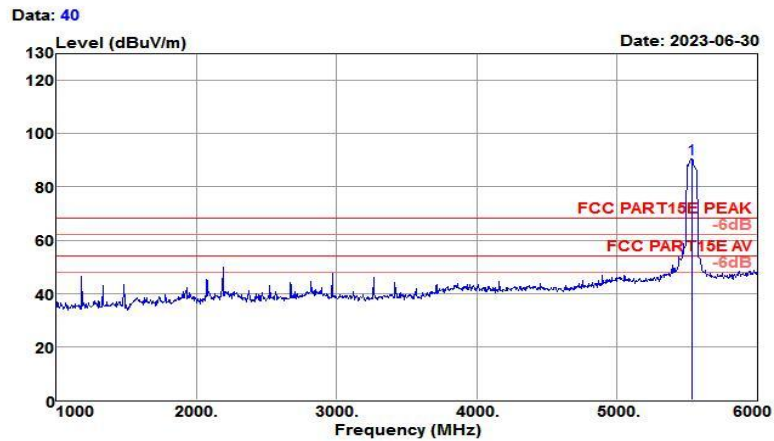

| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 5530.000 | 85.75 | 31.65 | 8.49 | 35.37 | 90.52 | 68.20 | 22.32 | Peak |