

# TEST REPORT

## Client Information:

Applicant: Prime Brands Group Inc.  
Applicant add.: 68 35th Street Suite B634 Mailbox 38, Brooklyn, New York, United States  
Manufacturer: HONG KONG ETECH GROUPS LIMITED  
Manufacturer add.: 16/F, Block C, 2nd Phase of Central Avenue, Haihong Industrial Area, Xixiang Road, Baoan District, Shenzhen, China

## Product Information:

Product Name: True wireless earbuds  
Model No.: TWS6, EBT1-22903-230606  
Brand Name: N/A  
FCC ID: 2AY4Z-TWS6

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247

## Prepared By:

### Dongguan Yaxu (AiT) Technology Limited

No.22, Jinqianling 3rd Street, Jitigang, Huangjiang, Dongguan,  
Guangdong, China

Tel.: +86-769-8202 0499 Fax.: +86-769-8202 0495

Date of Receipt: Sep. 23, 2023

Date of Test: Sep. 23, 2023 – Oct. 09, 2023

Date of Issue: Oct. 19, 2023

Test Result: Pass

This device described above has been tested by Dongguan Yaxu (AiT) Technology Limited and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

Note: This report shall not be reproduced except in full, without the written approval of Dongguan Yaxu (AiT) Technology Limited, this document may be altered or revised by Dongguan Yaxu (AiT) Technology Limited, personal only, and shall be noted in the revision of the document. This test report must not be used by the client to claim product endorsement.

Reviewed by: Simba Huang  
Simba Huang

Approved by: Seal-Chen  
Seal.chen

# 1 Contents

	Page
COVER PAGE	
<b>1 CONTENTS .....</b>	<b>2</b>
<b>2 TEST SUMMARY .....</b>	<b>4</b>
2.1 Statement of the Measurement Uncertainty.....	4
2.2 Measurement Uncertainty.....	4
<b>3 TEST FACILITY .....</b>	<b>5</b>
3.1 Deviation from standard.....	5
3.2 Abnormalities from standard conditions .....	5
3.3 Test Location.....	5
<b>4 GENERAL INFORMATION .....</b>	<b>6</b>
4.1 Test frequencies.....	7
4.2 EUT Peripheral List.....	8
4.3 Test Peripheral List .....	8
4.4 TEST METHODOLOGY.....	9
4.5 Description of Test Modes.....	10
<b>5 EQUIPMENT USED DURING TEST .....</b>	<b>11</b>
<b>6 TEST RESULTS AND MEASUREMENT DATA.....</b>	<b>11</b>
6.1 Antenna requirement .....	12
6.2 Peak Power Measurement.....	13
6.3 Frequency Separation and 20 dB Bandwidth.....	15
6.4 Number of Hopping Frequency .....	17
6.5 Time of Occupancy (Dwell Time) .....	18
6.6 Conducted Spurious Emissions and Band Edges Test .....	20
6.7 Restrict-band Band-edge Measurements .....	22
6.8 Radiated Emissions Measurement .....	24
6.9 Conducted Emissions .....	35
6.10 Pseudorandom frequency hopping sequence.....	38
<b>7 TEST SETUP PHOTOGRAPHS OF EUT .....</b>	<b>39</b>
<b>8 EXTERNAL PHOTOGRAPHS OF EUT .....</b>	<b>39</b>
<b>9 INTERNAL PHOTOGRAPHS OF EUT .....</b>	<b>39</b>



**Revision History**

Revision	Issue Date	Revisions	Revised By
000	Oct. 19, 2023	Initial Issue	Seal Chen

## 2 Test Summary

Test Item	Section in CFR 47	Result
Maximum Conducted Output Power	§15.247(b)	Pass
20dB Bandwidth	§15.247(a)	Pass
Frequency Separation	§15.247(a)	Pass
Number Of Hopping Frequency	§15.247(a)	Pass
Time Of Occupancy (Dwell Time)	§15.247(a)	Pass
Conducted Spurious Emissions and Band Edges Emissions	§15.205, §15.247(d)	Pass
Radiated Spurious Emissions	§15.209, §15.247(d)	Pass
Emissions at Restricted Band	§15.205	PASS
AC Mains Conducted Emissions	§15.207(a)	Pass
Antenna Requirements	§15.203	Pass

**Note**

1. Test according to ANSI C63.10:2013 and RSS-Gen.
2. The measurement uncertainty is not included in the test result.
3. Test results in other test report (RF Exposure Evaluation Report)

### 2.1 Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the AiT quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

### 2.2 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	0.009MHz-30MHz	3.10dB	(1)
Radiated Emission	30MHz-1GHz	3.75dB	(1)
Radiated Emission	1GHz-18GHz	3.88dB	(1)
Radiated Emission	18GHz-40GHz	3.88dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	1.20dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

### 3 Test Facility

**The test facility is recognized, certified or accredited by the following organizations:**

**.CNAS- Registration No: L6177**

Dongguan Yaxu (AiT) technology Limited is accredited to ISO/IEC 17025:2017 general Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the competence of testing and calibration laboratories) on April 18, 2022

**FCC-Registration No.: 703111 Designation Number: CN1313**

Dongguan Yaxu (AiT) technology Limited has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

**IC —Registration No.: 6819A CAB identifier: CN0122**

The 3m Semi-anechoic chamber of Dongguan Yaxu (AiT) technology Limited has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 6819A

**A2LA-Lab Cert. No.: 6317.01**

Dongguan Yaxu (AiT) technology Limited has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

#### 3.1 Deviation from standard

None

#### 3.2 Abnormalities from standard conditions

None

#### 3.3 Test Location

**Dongguan Yaxu (AiT) Technology Limited**

Address: No.22, Jinqianling 3rd Street, Jitigang, Huangjiang, Dongguan, Guangdong, China

Tel.: +86-769-8202 0499

Fax.: +86-769-8202 0495

## 4 General Information

EUT Name:	True wireless earbuds
Model No:	TWS6
Serial Model:	EBT1-22903-230606
Test sample(s) ID:	S01, S02
Sample(s) Status:	Engineer sample
Serial No.:	N/A
Operation frequency:	2402MHz-2480MHz
Channel Number:	79 Channels
Channel separation:	1MHz
Modulation Technology:	GFSK, $\pi/4$ -DQPSK
Antenna Type:	PCB Antenna
Antenna gain:	2.21 dBi
Hardware version.:	N/A
Software version.:	N/A
Power supply:	AC 120V/AC 240V from adapter DC 3.7V from battery
Model different:	Only the model name is different.
Note:	<ol style="list-style-type: none"> <li>1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.</li> <li>2. The EUT is a TWS bluetooth symmetrical headset, and since the internal structure of the left and right headphones are the same, so only the worst case is recorded in the report (left ear).</li> </ol>

### 4.1 Test frequencies

EUT channels and frequencies list:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454	--	--
26	2428	53	2455	--	--

## 4.2 EUT Peripheral List

No.	Equipment	Manufacturer	EMC Compliance	Model No.	Serial No.	Power cord	Signal cord
1	N/A	N/A	N/A	N/A	N/A	N/A	N/A

## 4.3 Test Peripheral List

No.	Equipment	Manufacturer	EMC Compliance	Model No.	Serial No.	Power cord	Signal cord
1	Adapter	HUAWEI	CE/FCC	HW-100400 C00	N/A	N/A	N/A



## 4.4 TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2013, FCC CFR PART 15C 15.207, 15.209, 15.247 and DA 00-705.

### EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### EUT Exercise

The EUT was operated in the normal operating mode for Hopping Numbers and Dwell Time test and a continuous transmits mode for other tests.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.205, 15.207, 15.209, 15.247, ANSI C63.10-2013 under the FCC Rules Part 15 Subpart C

### General Test Procedures

#### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

#### Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10-2013.

#### 4.5 Description of Test Modes

The EUT has been tested under operating condition.

AC main conducted emission pre-test voltage at both AC 120V/60Hz and AC 240V/50Hz, recorded worst case;

AC main conducted emission pre-test at charge from power adapter modes, recorded worst case;

Worst-case mode and channel used for 150 KHz-30 MHz power line conducted emissions was the mode and channel with the highest output power that was determined to be TX (1Mbps).

Worst-case mode and channel used for 9 KHz-1000 MHz radiated emissions was the mode and channel with the highest output power, that was determined to be TX(1Mbps-Low Channel).

This test was performed with EUT in X, Y, Z position and the worst case was found when EUT in X position.

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Transmitting mode	Keep the EUT in continuously transmitting mode.		
Test software:	FCC		
Frequency	2402 MHz	2441 MHz	2480 MHz
Parameters(1Mbps)	1	1	1
Parameters(2Mbps)	0	0	0
Parameters(3Mbps)	0	0	0

## 5 Equipment Used during Test

No	Test Equipment	Manufacturer	Model No	Serial No	Cal. Date	Cal. Due Date
1	Spectrum Analyzer	R&S	FSV40	101470	2023.09.01	2024.08.31
2	EMI Measuring Receiver	R&S	ESR	101660	2023.09.01	2024.08.31
3	Low Noise Pre Amplifier	HP	HP8447E	1937A01855	2023.09.01	2024.08.31
4	Low Noise Pre Amplifier	Tsj	MLA-0120-A02-34	2648A04738	2023.09.01	2024.08.31
5	Passive Loop	ETS	6512	00165355	2022.09.04	2024.09.03
6	TRILOG Super Broadband test Antenna	SCHWARZBECK	VULB9160	9160-3206	2021.08.29	2024.08.28
7	Broadband Horn Antenna	SCHWARZBECK	BBHA9120D	452	2021.08.29	2024.08.28
8	SHF-EHF Horn Antenna 15-40GHz	SCHWARZBECK	BBHA9170	BBHA9170367d	2020.11.24	2023.11.23
9	EMI Test Receiver	R&S	ESCI	100124	2023.09.01	2024.08.31
10	LISN	Kyoritsu	KNW-242	8-837-4	2023.09.01	2024.08.31
11	LISN	R&S	ESH3-Z2	0357.8810.54-101161-S2	2023.09.01	2024.08.31
12	Pro.Temp&Humi.chamber	MENTEK	MHP-150-1C	MAA08112501	2023.09.01	2024.08.31
13	RF Automatic Test system	MW	MW100-RFCB	21033016	2023.09.01	2024.08.31
14	Signal Generator	Agilent	N5182A	MY50143009	2023.09.01	2024.08.31
15	Wideband Radio communication tester	R&S	CMW500	1201.0002K50	2023.09.01	2024.08.31
16	RF Automatic Test system	MW	MW100-RFCB	21033016	2023.09.01	2024.08.31
17	DC power supply	ZHAOXIN	RXN-305D-2	28070002559	N/A	N/A
18	RE Software	EZ	EZ-EMC_RE	Ver.AIT-03A	N/A	N/A
19	CE Software	EZ	EZ-EMC_CE	Ver.AIT-03A	N/A	N/A
20	RF Software	MW	MTS 8310	2.0.0.0	N/A	N/A
21	temporary antenna connector(Note)	NTS	R001	N/A	N/A	N/A

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

## 6 Test results and Measurement Data

### 6.1 Antenna requirement

#### 6.1.1 Standard requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

#### 6.1.2 EUT Antenna:

The antenna is PCB antenna, the best case gain of the antenna is 2.21dBi reference to the Internal photos for details

## 6.2 Peak Power Measurement

### 6.2.1 Standard requirement:

According to §15.247(b)(1), For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

### 6.2.2 Measuring Instruments:


Please refer to equipment’s list in this report.

### 6.2.3 Test Procedures:

The transmitter output (antenna port) was connected to the spectrum analyzer. According to ANSI C63.10:2013 Output power test procedure for frequency-hopping spread-spectrum (FHSS) devices; this is an RF-conducted test to evaluate maximum peak output power. Use a direct connection between the antenna port of the unlicensed wireless device and the spectrum analyzer, through suitable attenuation. The hopping shall be disabled for this test:

- a) Use the following spectrum analyzer settings:
  - 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
  - 2) RBW > 20 dB bandwidth of the emission being measured.
  - 3) VBW ≥ RBW.
  - 4) Sweep: Auto.
  - 5) Detector function: Peak.
  - 6) Trace: Max hold.
- b) Allow trace to stabilize.
- c) Use the marker-to-peak function to set the marker to the peak of the emission.
- d) The indicated level is the peak output power, after any corrections for external attenuators and cables.

### 6.2.4 Test Setup Layout

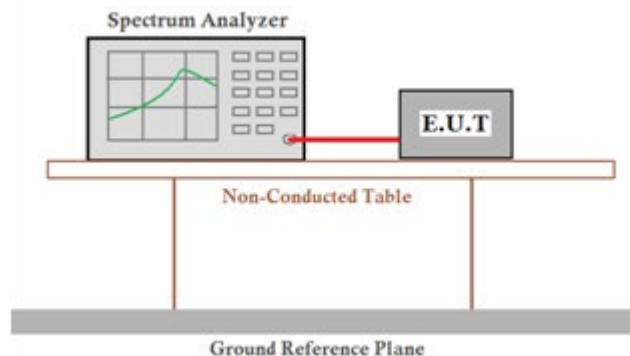

### 6.2.5 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

## 6.2.6 Test result

*Please refer to Appendix A.1*

*Remark:*

- 1. Test results including cable loss;*
- 2. Measured output power at difference Packet Type for each mode and recorded worst case for each mode.*

### 6.3 Frequency Separation and 20 dB Bandwidth

#### 6.3.1 Standard requirement:

According to §15.247(a) (1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

#### 6.3.2 Measuring Instruments:

Please refer to equipment’s list in this report.

#### 6.3.3 Test Procedures


Frequency separation test procedure :

- 1). Place the EUT on the table and set it in transmitting mode.
- 2). Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer.
- 3). Set center frequency of Spectrum Analyzer = middle of hopping channel.
- 4). Set the Spectrum Analyzer as RBW = 30 kHz, VBW =100 kHz, Span = wide enough to capture the peaks of two adjacent channels, Sweep = auto.
- 5). Max hold, mark 2 peaks of hopping channel and record the 2 peaks frequency.

20dB bandwidth test procedure :

- 1). Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel.
- 2). RBW  $\geq$ 1% of the 20 dB bandwidth, VBW  $\geq$ RBW.
- 3). Detector function = peak.
- 4). Trace = max hold.

#### 6.3.4 Test Setup Layout

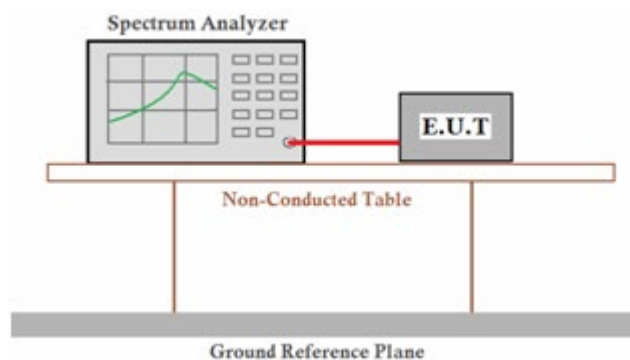

#### 6.3.5 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

### 6.3.6 Test result

*PASS*

*Please refer to Appendix A.2 for 20 dB bandwidth*

*Please refer to Appendix A.3 for Frequency separation*

*Remark:*

- 1). Test results including cable loss;*
- 2). Measured at difference Packet Type for each mode and recorded worst case for each mode.*



## 6.4 Number of Hopping Frequency

### 6.4.1 Standard requirement:

According to §15.247(a)(1)(ii), Frequency hopping systems operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels.


### 6.4.2 Measuring Instruments and Setting:

Please refer to equipment's list in this report.

### 6.4.3 Test Procedures

- 1). Place the EUT on the table and set it in transmitting mode.
- 2). Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer.
- 3). Set Spectrum Analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = auto.
- 4). Set the Spectrum Analyzer as RBW/VBW=100KHz/300KHz.
- 5). Max hold, view and count how many channel in the band.

### 6.4.4 Test Setup Layout

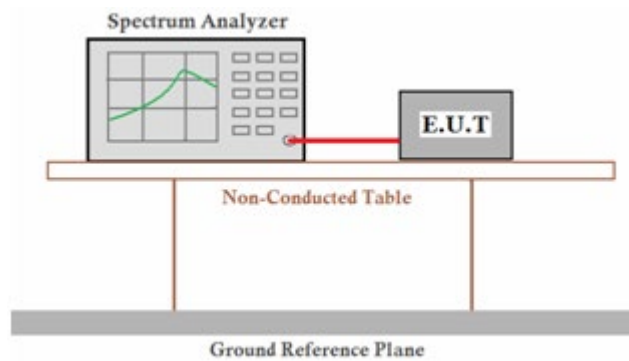

### 6.4.5 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

### 6.4.6 Test result

PASS

Please refer to Appendix A.4

Remark:

- 1). Test results including cable loss;
- 2). Measured at difference Packet Type for each mode and recorded worst case for each mode.

## 6.5 Time of Occupancy (Dwell Time)

### 6.5.1 Standard requirement:

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz- 2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.


### 6.5.2 Measuring Instruments and Setting:

Please refer to equipment’s list in this report. The following table is the setting of Spectrum Analyzer.

### 6.5.3 Test Procedures

- 1). Place the EUT on the table and set it in transmitting mode.
- 2). Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer.
- 3). Set center frequency of Spectrum Analyzer = operating frequency.
- 4). Set the Spectrum Analyzer as RBW=1MHz, VBW=3MHz, Span = 0Hz, Sweep = auto.
- 5). Repeat above procedures until all frequency measured was complete.

### 6.5.4 Test Setup Layout

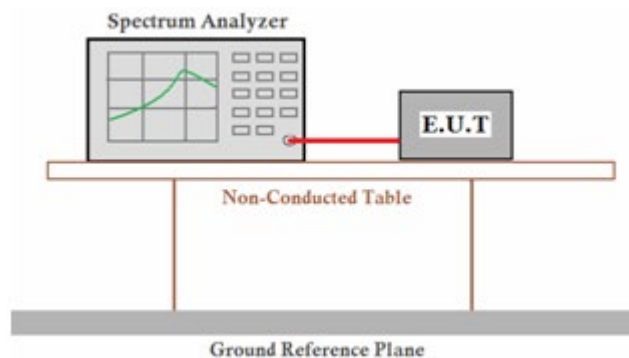

### 6.5.5 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

### 6.5.6 Test result

PASS

Please refer to Appendix A.5

Remark:

- 1). Test results including cable loss;
- 2). Measured at difference Packet Type for each mode and recorded worst case for each mode.
- 3). The Dwell Time=Burst Width\*Total Hops. The detailed calculations are showed as follows:

The duration for dwell time calculation:  $0.4[s] * \text{hopping number} = 0.4[s] * 79[\text{ch}] = 31.6[s * \text{ch}]$ ;

The burst width [ms/hop/ch], which is directly measured, refers to the duration on one channel hop.

The hops per second for all channels: The selected EUT Conf uses a slot type of 5-Tx&1-Rx and a hopping rate of 1600 [ch\*hop/s] for all channels. So the final hopping rate for all channels is  $1600/6 = 266.67 [\text{ch} * \text{hop}/\text{s}]$

*The hops per second on one channel:  $266.67 [ch \cdot hops/s] / 79 [ch] = 3.38 [hop/s]$ ;*

*The total hops for all channels within the dwell time calculation duration:  $3.38 [hop/s] \cdot 31.6 [s] = 106.67 [hop \cdot ch]$ ;*

*The dwell time for all channels hopping:  $106.67 [hop \cdot ch] \cdot Burst Width [ms/hop/ch]$ .*

*Dwell Time Calculate formula:*

*DH1: Dwell time = Pulse time (ms)  $\times (1600 \div 2 \div 79) \times 31.6$  Second*

*DH3: Dwell time = Pulse time (ms)  $\times (1600 \div 4 \div 79) \times 31.6$  Second*

*DH5: Dwell time = Pulse Time (ms)  $\times (1600 \div 6 \div 79) \times 31.6$  Second*

*4). Measured at low, middle and high channel, recorded the worst case.*

*5). Only Recorded DH5.*

## 6.6 Conducted Spurious Emissions and Band Edges Test

### 6.6.1 Standard requirement:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

### 6.6.2 Measuring Instruments and Setting:

Please refer to equipment list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Detector	Peak
Attenuation	Auto
RB / VB (Emission in restricted band)	100KHz/300KHz
RB / VB (Emission in non-restricted band)	100KHz/300KHz


### 6.6.3 Test Procedures

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 KHz. The video bandwidth is set to 300 KHz.

Measurements are made over the 9kHz to 25GHz range with the transmitter set to the lowest, middle, and highest channels.

### 6.6.4 Test Setup Layout

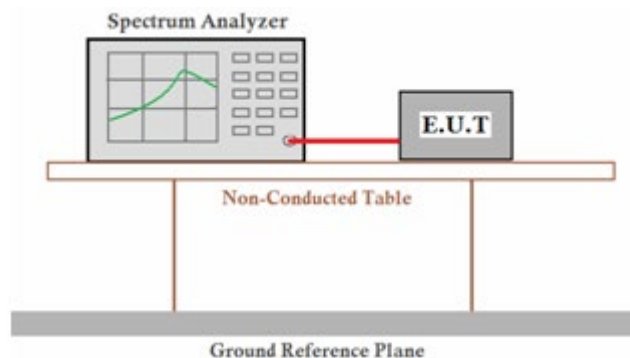

### 6.6.5 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

### 6.6.6 Test result

*PASS*

No non-compliance noted. Only record the worst test result in this report. The test data refer to the following page.

*PASS*

*Please refer to Appendix A.6.3 for conducted spurious emission.*

*Please refer to Appendix A.6.1 for conducted band edge.*

*Remark:*

- 1. Test results including cable loss;*
- 2. Measured at difference Packet Type for each mode and recorded worst case for each mode. Worst case data at DH5 for GFSK, 2DH5 for  $\pi/4$ -DQPSK modulation type;*
- 3. “---“means that the fundamental frequency not for 15.209 limits requirement.*

*Not recorded emission from 9 KHz to 30 MHz as emission level at least 20dBc lower than emission limit.*

## 6.7 Restrict-band Band-edge Measurements

### 6.7.1 Standard requirement:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 6.7.2 Measuring Instruments:

Please refer to equipment list in this report.

### 6.7.3 Test Procedures

According to KDB 412172 section 1.1 Field Strength Approach (linear terms):

$$\text{eirp} = p_t \times g_t = (E \times d)^2/30$$

Where:

$p_t$  = transmitter output power in watts, □

$g_t$  = numeric gain of the transmitting antenna (unitless), □

$E$  = electric field strength in V/m, □

$d$  = measurement distance in meters (m).

$$\text{erp} = \text{eirp}/1.64 = (E \times d)^2/(30 \times 1.64)$$


Where all terms are as previously defined.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1MHz, VBW=3MHz for peak detector and RBW=1MHz, VBW=1/T for AV detector.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.
6. Measure the conducted output power (in dBm) using the detector specified by the appropriate regulatory agency for guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
7. Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see 12.2.5 for guidance on determining the applicable antenna gain)
8. Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤

30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).

9. For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
10. Compare the resultant electric field strength level to the applicable regulatory limit.
11. Perform radiated spurious emission test duress until all measured frequencies were complete.

#### 6.7.4 Test Setup Layout

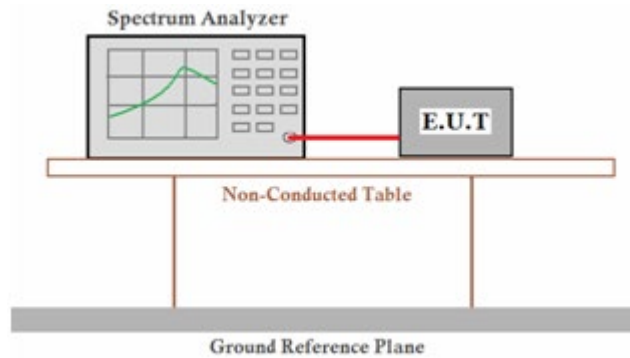

#### 6.7.5 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 6.7.6 Test result

PASS

Please refer to Appendix A.7

Remark:

1. Measured at difference Packet Type for each mode and recorded worst case for each mode.
2. Worst case data at DH5 for GFSK, 2DH5 for  $\pi/4$ DQPSK modulation type;
3. Measured at Hopping and Non-Hopping mode, recorded worst at Non-Hopping mode.
4. The other emission levels were very low against the limit.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. Detector AV is setting spectrum/receiver. RBW=1MHz/VBW=330Hz/Sweep time=Auto/Detector=Peak;

Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.

## 6.8 Radiated Emissions Measurement

### 6.8.1 Standard requirement:

According to §15.247 (d): 20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 6.8.2 Measuring Instruments and Setting:

Please refer to equipment list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10 <sup>th</sup> carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB/VB 200Hz/1KHz for QP/AVG
Start ~ Stop Frequency	150kHz~30MHz / RB/VB 9kHz/30KHz for QP/AVG
Start ~ Stop Frequency	30MHz~1000MHz / RB/VB 120kHz/1MHz for QP



### 6.8.3 Test Procedures

#### 1) Sequence of testing 9 kHz to 30 MHz

##### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

##### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1.5 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

##### Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

## 2) Sequence of testing 30 MHz to 1 GHz

### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

### Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

### 3) Sequence of testing 1 GHz to 18 GHz

#### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

#### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

#### Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

#### 4) Sequence of testing above 18 GHz

##### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.


##### Premeasurement:

- The antenna is moved spherical over the EUT in different polarisations of the antenna.


##### Final measurement:

- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.


#### 6.8.4 Test Setup Layout

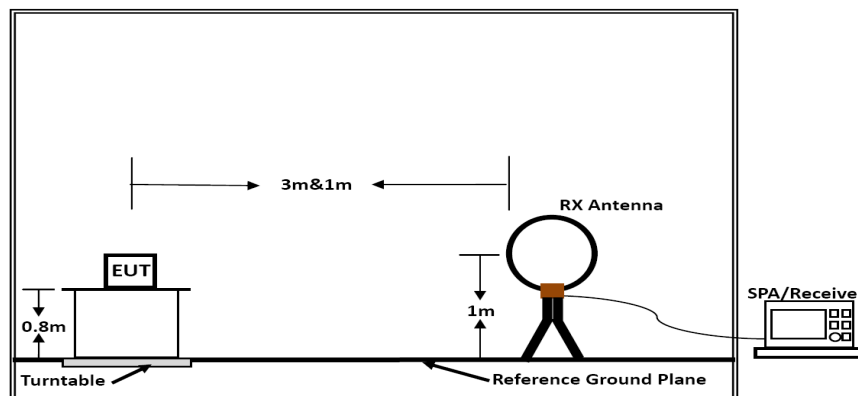

Below 30MHz

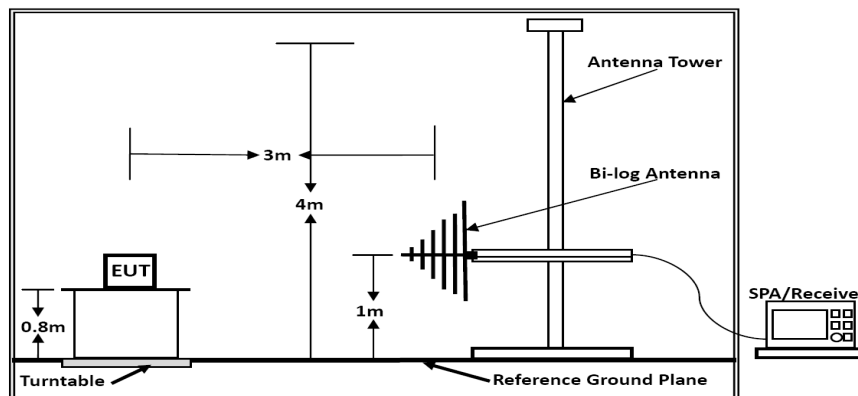

Below 1GHz

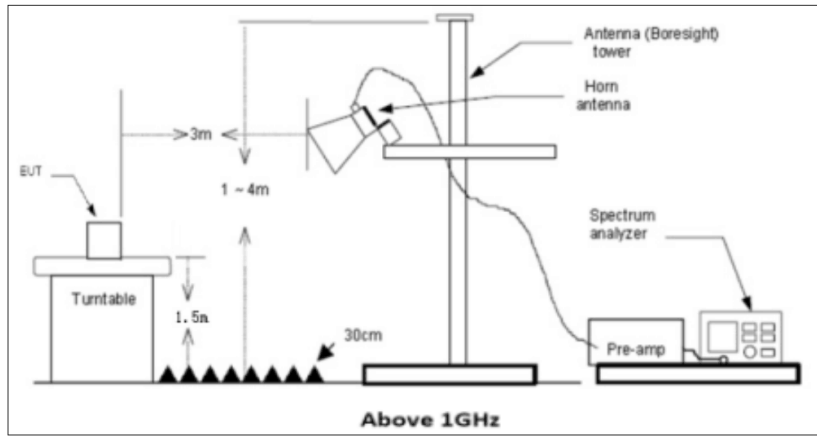

Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor =  $20 \log(\text{specific distance [3m]} / \text{test distance [1m]})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

### 6.8.5 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

### 6.8.6 Test result

Temperature	21.6°C	Humidity	52.0%
Test Engineer	Simba Huang	Configurations	BT

Remarks:

1. Only the worst case Main Antenna test data.
2. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

### ■ Results of Radiated Emissions (9 KHz~30MHz)

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Over Limit (dBuV)	Remark
-	-	-	-	See Note

Note:

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);


Limit line = specific limits (dBuV) + distance extrapolation factor.

During the test, pre-scan the GFSK,  $\pi/4$ QPSK modulation, and found the GFSK modulation Middle channel(TX Only) which is the worst case, only the worst case is recorded in the report

■ Results of Radiated Emissions (30MHz~1GHz)

Pre-scan all test modes, found worst case at GFSK (LCH), and so only show the test result of GFSK (LCH).


Model name:	TWS6	Test Date :	2023-09-25
Polarization :	Vertical	Test Result:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

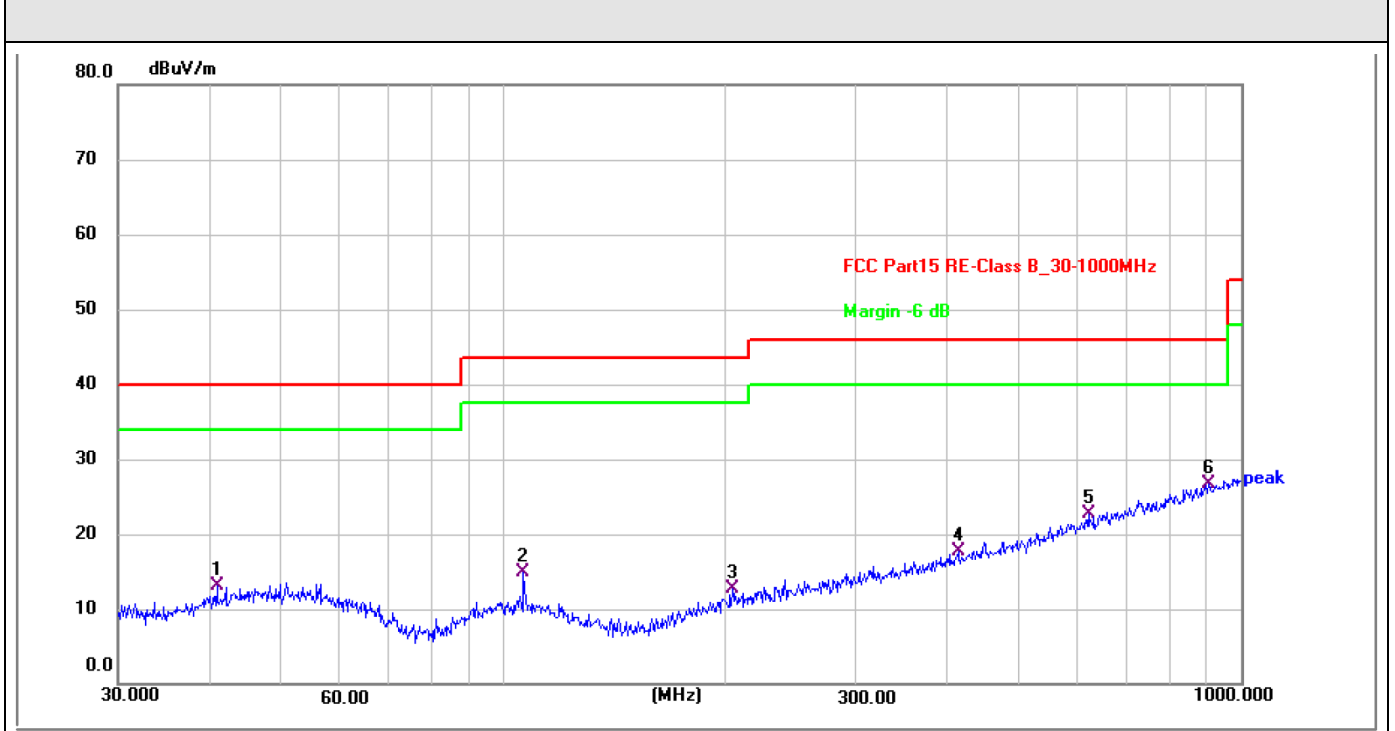

No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	P/F
1	40.8446	27.64	-14.51	13.13	40.00	-26.87	QP	P
2	106.3850	30.45	-15.61	14.84	43.50	-28.66	QP	P
3	204.2377	27.21	-14.53	12.68	43.50	-30.82	QP	P
4	413.2706	27.19	-9.53	17.66	46.00	-28.34	QP	P
5	620.7096	28.19	-5.45	22.74	46.00	-23.26	QP	P
6 *	903.3094	27.49	-0.70	26.79	46.00	-19.21	QP	P

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.  
 Level = Reading + Factor      Margin = Level - Limit

Model name:	TWS6	Test Date :	2023-09-25
Polarization :	Horizontal	Test Result:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

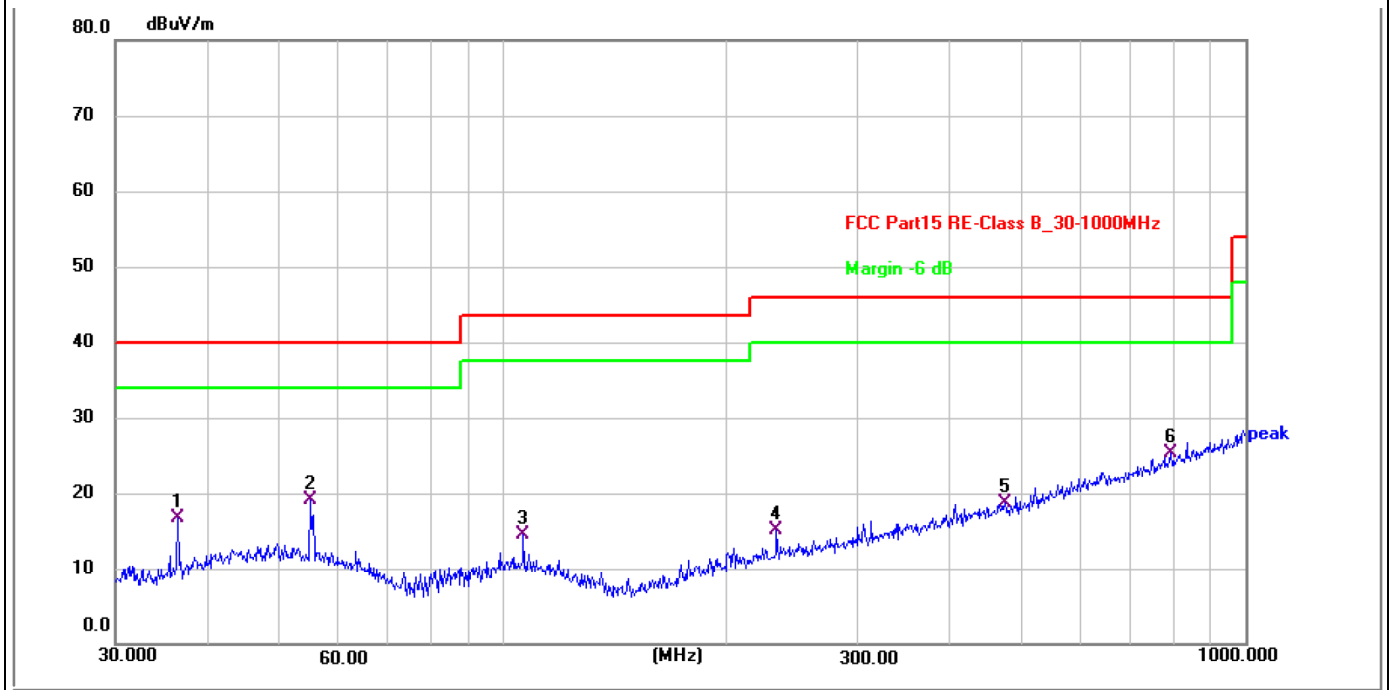

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	36.3814	32.59	-15.87	16.72	40.00	-23.28	QP	P
2	54.8348	33.11	-14.01	19.10	40.00	-20.90	QP	P
3	106.3850	30.13	-15.61	14.52	43.50	-28.98	QP	P
4	233.3487	28.57	-13.54	15.03	46.00	-30.97	QP	P
5	473.8347	27.47	-8.70	18.77	46.00	-27.23	QP	P
6 *	793.3960	27.89	-2.58	25.31	46.00	-20.69	QP	P

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.  
 Level = Reading + Factor      Margin = Level - Limit

**Test Results (1GHz-25GHz)**

Test Mode: CH00					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4804.00	39.29	34.04	6.58	34.09	45.82	74.00	-28.18	V
7206.00	33.14	37.11	7.73	34.50	43.48	74.00	-30.52	V
9608.00	32.64	39.31	9.23	34.79	46.39	74.00	-27.61	V
12010.00	*					74.00		V
14412.00	*					74.00		V
4804.00	43.98	34.04	6.58	34.09	50.51	74.00	-23.49	H
7206.00	35.07	37.11	7.73	34.50	45.41	74.00	-28.59	H
9608.00	32.25	39.31	9.23	34.79	46.00	74.00	-28.00	H
12010.00	*					74.00		H
14412.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4804.00	27.72	34.04	6.58	34.09	34.25	54.00	-19.75	V
7206.00	21.61	37.11	7.73	34.50	31.95	54.00	-22.05	V
9608.00	20.56	39.31	9.23	34.79	34.31	54.00	-19.69	V
12010.00	*					54.00		V
14412.00	*					54.00		V
4804.00	32.17	34.04	6.58	34.09	38.70	54.00	-15.30	H
7206.00	23.91	37.11	7.73	34.50	34.25	54.00	-19.75	H
9608.00	20.45	39.31	9.23	34.79	34.20	54.00	-19.80	H
12010.00	*					54.00		H
14412.00	*					54.00		H



**Test Results (1GHz-25GHz)**

Test Mode: CH39					Test channel: Middle			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4882.00	38.30	34.38	6.69	34.09	45.28	74.00	-28.72	V
7323.00	32.49	37.22	7.78	34.53	42.96	74.00	-31.04	V
9764.00	32.06	39.46	9.35	34.80	46.07	74.00	-27.93	V
12205.00	*					74.00		V
14646.00	*					74.00		V
4882.00	42.79	34.38	6.69	34.09	49.77	74.00	-24.23	H
7323.00	34.34	37.22	7.78	34.53	44.81	74.00	-29.19	H
9764.00	31.58	39.46	9.35	34.80	45.59	74.00	-28.41	H
12205.00	*					74.00		H
14646.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4882.00	26.95	34.38	6.69	34.09	33.93	54.00	-20.07	V
7323.00	21.08	37.22	7.78	34.53	31.55	54.00	-22.45	V
9764.00	20.09	39.46	9.35	34.80	34.10	54.00	-19.90	V
12205.00	*					54.00		V
14646.00	*					54.00		V
4882.00	31.29	34.38	6.69	34.09	38.27	54.00	-15.73	H
7323.00	23.32	37.22	7.78	34.53	33.79	54.00	-20.21	H
9764.00	19.91	39.46	9.35	34.80	33.92	54.00	-20.08	H
12205.00	*					54.00		H
14646.00	*					54.00		H

**Test Results (1GHz-25GHz)**

Test Mode: CH78					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4960.00	36.92	34.72	6.79	34.09	44.34	74.00	-29.66	V
7440.00	31.57	37.34	7.82	34.57	42.16	74.00	-31.84	V
9920.00	31.24	39.62	9.46	34.81	45.51	74.00	-28.49	V
12400.00	*					74.00		V
14880.00	*					74.00		V
4960.00	41.13	34.72	6.79	34.09	48.55	74.00	-25.45	H
7440.00	33.30	37.34	7.82	34.57	43.89	74.00	-30.11	H
9920.00	30.63	39.62	9.46	34.81	44.90	74.00	-29.10	H
12400.00	*					74.00		H
14880.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4960.00	25.88	34.72	6.79	34.09	33.30	54.00	-20.70	V
7440.00	20.36	37.34	7.82	34.57	30.95	54.00	-23.05	V
9920.00	19.45	39.62	9.46	34.81	33.72	54.00	-20.28	V
12400.00	*					54.00		V
14880.00	*					54.00		V
4960.00	30.08	34.72	6.79	34.09	37.50	54.00	-16.50	H
7440.00	22.51	37.34	7.82	34.57	33.10	54.00	-20.90	H
9920.00	19.16	39.62	9.46	34.81	33.43	54.00	-20.57	H
12400.00	*					54.00		H
14880.00	*					54.00		H

**Remark:**

1. During the test, pre-scan the GFSK,  $\pi/4$ QPSK modulation, and found the GFSK modulation is worse case, the report only record this mode.
2. Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
3. “\*” means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.

## 6.9 Conducted Emissions

### 6.9.1 Standard requirement:

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50


\* Decreasing linearly with the logarithm of the frequency

### 6.9.2 Test Procedures

The transmitter output is connected to EMI receiver. The resolution bandwidth is set to 9 kHz. The video bandwidth is set to 30 kHz, Sweep time=Auto

The spectrum from 150 kHz to 30MHz is investigated with the transmitter set to the lowest, middle, and highest channels.

### 6.9.3 Test Setup Layout

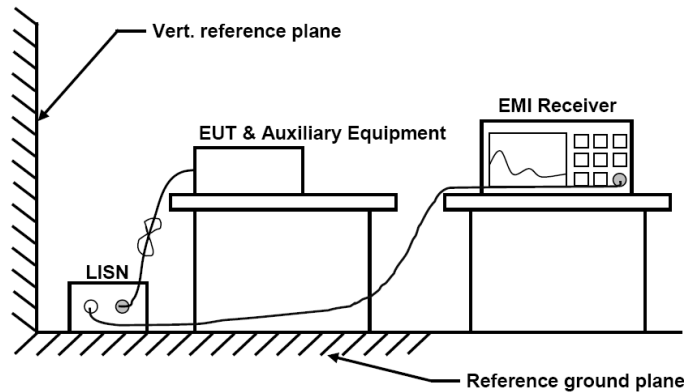

### 6.9.4 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

### 6.9.5 Test result

PASS


The test data please refer to following page.

Temperature	21.6°C	Humidity	52.0%
Test Engineer	Simba Huang	Configurations	BT

**Measurement data:**

Pre-scan all test modes, found worst case at GFSK 2480MHz, and so only show the test result of GFSK 2480MHz


Model name:	TWS6	Test Date :	2023-09-25
ATM Pressure:	101 kPa	Test by:	Simba Huang
Phase :	Line	Test Result:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

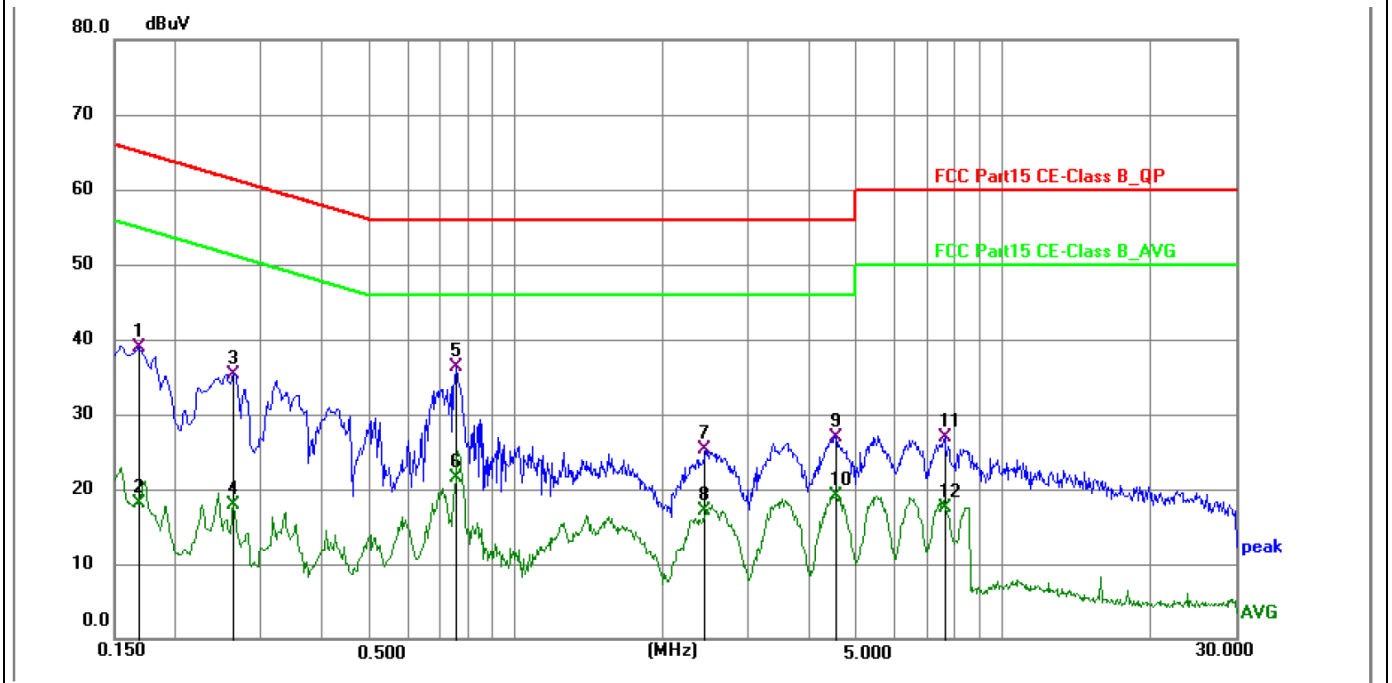

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1680	28.97	9.91	38.88	65.06	-26.18	QP	P	
2	0.1680	8.27	9.91	18.18	55.06	-36.88	AVG	P	
3	0.2625	25.45	9.93	35.38	61.35	-25.97	QP	P	
4	0.2625	7.98	9.93	17.91	51.35	-33.44	AVG	P	
5 *	0.7530	26.32	9.99	36.31	56.00	-19.69	QP	P	
6	0.7530	11.53	9.99	21.52	46.00	-24.48	AVG	P	
7	2.4539	15.29	10.00	25.29	56.00	-30.71	QP	P	
8	2.4539	7.06	10.00	17.06	46.00	-28.94	AVG	P	
9	4.5420	16.82	10.00	26.82	56.00	-29.18	QP	P	
10	4.5420	9.13	10.00	19.13	46.00	-26.87	AVG	P	
11	7.5930	16.91	10.01	26.92	60.00	-33.08	QP	P	
12	7.5930	7.49	10.01	17.50	50.00	-32.50	AVG	P	

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.  
 Level = Reading + Factor      Margin = Level - Limit

Model name:	TWS6	Test Date :	2023-09-25
ATM Pressure:	101 kPa	Test by:	Simba Huang
Phase :	Neutral	Test Result:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

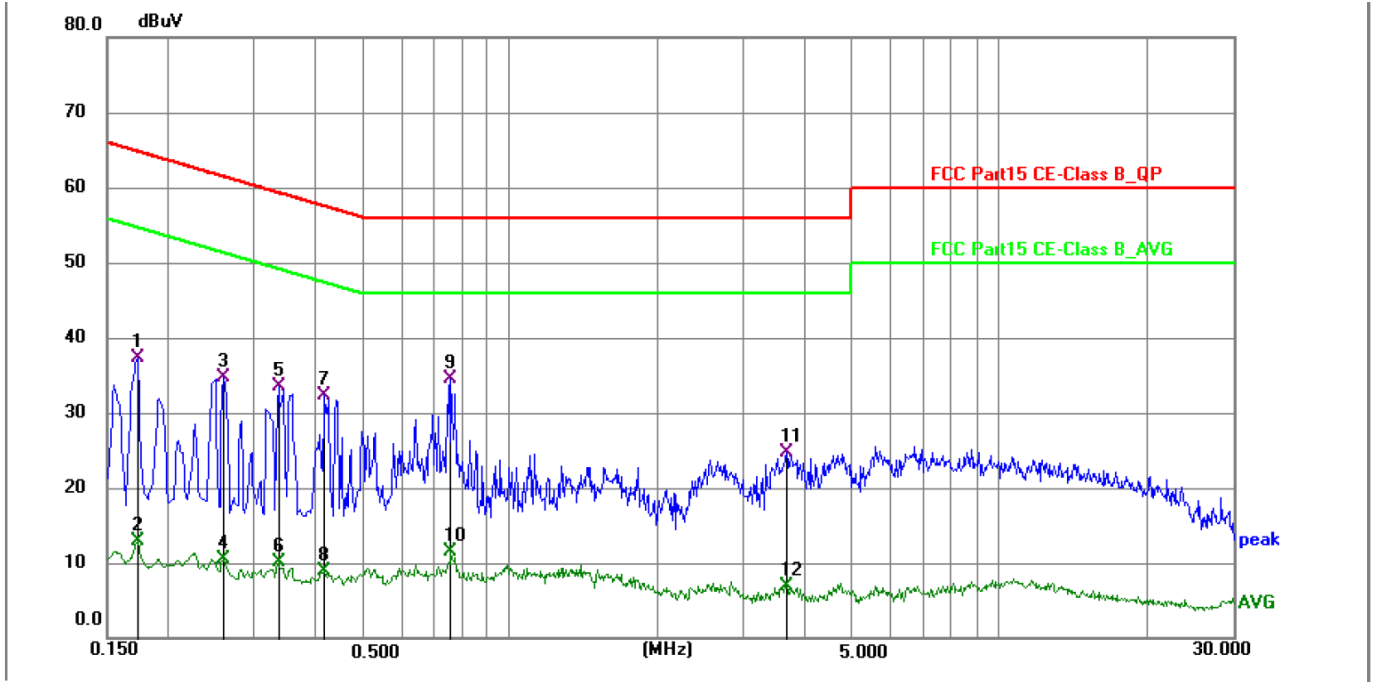

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1725	27.46	9.93	37.39	64.84	-27.45	QP	P	
2	0.1725	2.93	9.93	12.86	54.84	-41.98	AVG	P	
3	0.2580	24.81	9.95	34.76	61.50	-26.74	QP	P	
4	0.2580	0.60	9.95	10.55	51.50	-40.95	AVG	P	
5	0.3345	23.53	9.97	33.50	59.34	-25.84	QP	P	
6	0.3345	0.21	9.97	10.18	49.34	-39.16	AVG	P	
7	0.4155	22.34	9.99	32.33	57.54	-25.21	QP	P	
8	0.4155	-1.00	9.99	8.99	47.54	-38.55	AVG	P	
9 *	0.7575	24.53	10.02	34.55	56.00	-21.45	QP	P	
10	0.7575	1.45	10.02	11.47	46.00	-34.53	AVG	P	
11	3.6690	14.65	10.01	24.66	56.00	-31.34	QP	P	
12	3.6690	-3.06	10.01	6.95	46.00	-39.05	AVG	P	

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.  
 Level = Reading + Factor      Margin = Level - Limit

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

### 6.10 Pseudorandom frequency hopping sequence


For 47 CFR Part 15C sections §15.247(a)(1) or RSS-247§5.1 requirement:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hop-ping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hop-ping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence Requirement:


The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5th first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages:9
- Length of pseudo-random sequence:2<sup>9</sup>-1=511 bits
- Longest sequence of zeros:8(non-inverted signal)

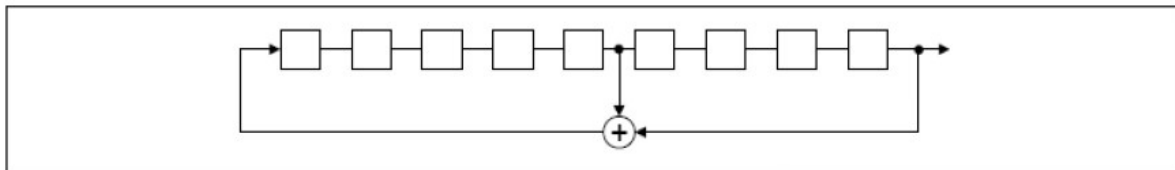

*Linear Feedback Shift Register for Generation of the PRBS sequence*

An example of pseudorandom frequency hopping sequence as follows:

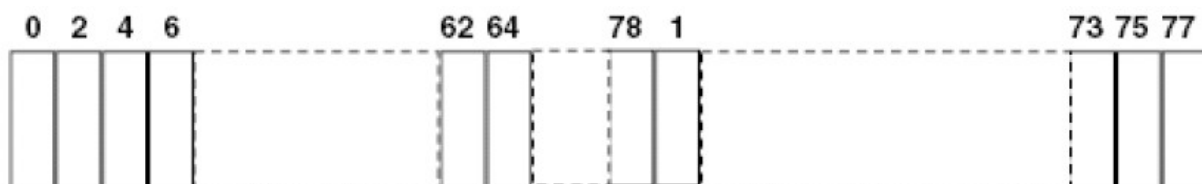

Each frequency used equally one the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.

## **7 Test Setup Photographs of EUT**

Please refer to separated files for Test Setup Photos of the EUT.

## **8 External Photographs of EUT**

Please refer to separated files for External Photos of the EUT.

## **9 Internal Photographs of EUT**

Please refer to separated files for Internal Photos of the EUT.

-----End-----