



产品规格书

PRODUCT SPECIFICATION FOR APPROVAL

客户名称:
CUSTOMER Shenzhen Chenxing Electronic Technology Co., Ltd

产品名称:
PRODUCT NAME A11 transmitter coil

物料编码:
PART No. XF.43-14BMB-000/WP-153-V3

产品规格:
PRODUCT SPEC reciprocal sensibility: 6.5uH±10%
SPEC: 43.5*5.3*0.8
SPEC: 0.08*24*2*10Ts/14mm
0.5mmPVC外环(开环)+20mmPVC内环+0.5mmEVA /8mm
transparent high temperature tape
antenna gain:0dBi

日期:
DATE 2023年05月06日

版本型号:
VERSION REV 1.0

版本 Revision	变更内容 Modified Content	责任人 Principle	日期 Date	备注 Note
REV 1.0	首次发布	薛磊	2023-05-06	

制定/PREPARED BY	审核/CHECKED BY	核准/APPROVED BY

客户认可签名及盖章 Authorized signature & company chop		

附上的是产品规格书, 有任何疑问, 请及时反馈给我们, 谢谢!

Attached is the product specification book, if you have any questions, please timely feedback to us, thank you!

Company name: Shenzhen Chenxing Electronic Technology Co., Ltd

Factory address: 5 / F, Building 1, Xinkecheng Science and Technology Industrial Park, No.51 Dabao Road, Xin'an Street, Bao'an District, Shenzhen



产品规格 SPECIFICATION

一、产品尺寸 Product Size

<p>0.5mmPVC外环</p> <p>Solder Coat</p> <p>TAPE</p> <p>0.5mmPVC内环</p>	磁片直径 A Magnetic sheet diameter A	43.5±0.5mm
	线圈外径 B outer diameter of the coil B	39±0.5mm
	线圈内径 C Coil inner diameter C	20.5±0.5mm
	产品厚度 D Product thickness D	<2.4mm
	出线长度 E Outline length E	14mm±2mm
	焊锡长度 F Welding tin length F	3±1mm
	磁片开孔直径 G Magnetic sheet opening diameter G	5±0.3mm
	磁片厚度 Magnetic sheet thickness	0.8±0.1mm
	磁片形状 Magnetic sheet shape	Round double slot
	PVC 外环外径 PVC Outer ring and outer diameter	43.3mm±0.2mm
	PVC 内环外径 PVC Outer diameter of the inner ring	20.2mm±0.2mm
	背胶厚度 thickness of the back glue	0.5mmEVA
	高位胶带规格 High tape specifications	8mm

Company name: Shenzhen Chenxing Electronic Technology Co., Ltd


Factory address: 5 / F, Building 1, Xinkecheng Science and Technology Industrial Park, No.51 Dabao Road, Xin'an Street, Bao'an District, Shenzhen



深圳市宸兴电子科技有限公司

Shenzhen Chenxing Electronic Technology Co., Ltd

二、原理图 schematic diagram

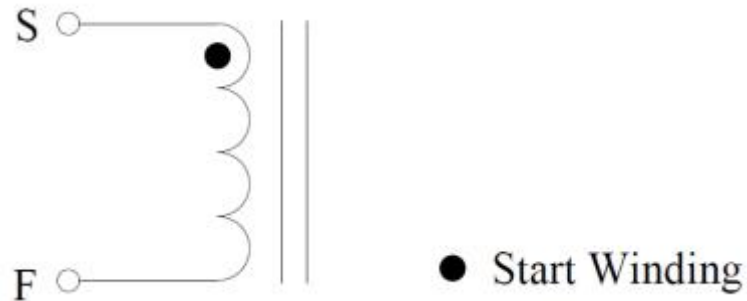

三、绕线参数 Byline parameters


端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction
S	F	漆包线 0.08*24P (双股并绕)	10Ts	CCW

四、电气特性 electrical character:

温度 TEMPERATURE:25±10℃, 湿度 RELATIVE HUMIDITY:65±20%

项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
IND.	S-F	L: 6.5uH±10%	100KHz/1.0V	LCZ METER 1062B

五、产品图片 Product Picture

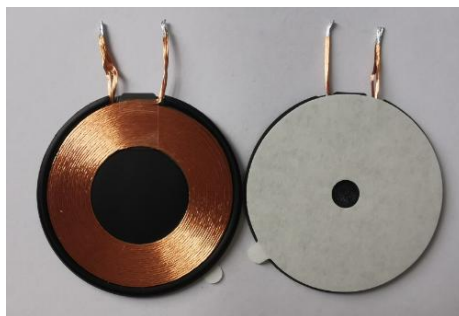

六、包装说明 Packaging instructions:


Company name: Shenzhen Chenxing Electronic Technology Co., Ltd

Factory address: 5 / F, Building 1, Xinkecheng Science and Technology Industrial Park, No.51 Dabao Road, Xin 'an Street, Bao' an District, Shenzhen



深圳市宸兴电子技术有限公司

Shenzhen Chenxing Electronic Technology Co., Ltd

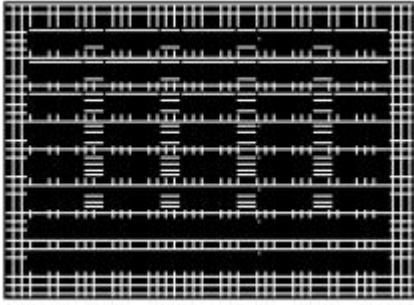

pearl cotton size is

35*24.5*6.2cm,

Each pearl cotton has a total of 40 grids each grid of 6 PCS products, a total of 240 PCS products each box of three layers of pearl cotton;



size of the carton:

36.5*25.5*21 CM,

With 720 PCS products per case.

Company name: Shenzhen Chenxing Electronic Technology Co., Ltd

Factory address: 5 / F, Building 1, Xinkecheng Science and Technology Industrial Park, No.51 Dabao Road, Xin'an Street, Bao'an District, Shenzhen