

承认书

SPECIFICATION FOR APPROVAL

客户名称(CUSTOMER): BLS TN039

客户料号(PART NO.): BLS0-Y20.5×40-15-FR

品名(DESCRIPTION): 单线圈+硬磁Single coil + hard magnetic

规格(SPECIFICATION): 20.5×40, 0.08×105P 磁边起Edge rise15MM

日期 DATE): 20230804

本司确认 (TRX APPROVAL)		
制作fabrication	审核audit	承认日期 Date of recognition
曾小仙	邱志辉	20230804
客户确认 (CUSTOMER APPROVAL)		
工程project	审批ratify	承认日期 Date of recognition
确认结果(Result):	<input type="checkbox"/> 合格qualified <input type="checkbox"/> 不合格 disqualification <input type="checkbox"/> 其它other	

东莞市德弗力五金电子材料有限公司

Dongguan city DFL Electronic Technology Co.,LTD

东莞市石碣镇新风西路107号

No. 107, Xinfeng West Road, Shijie Town,

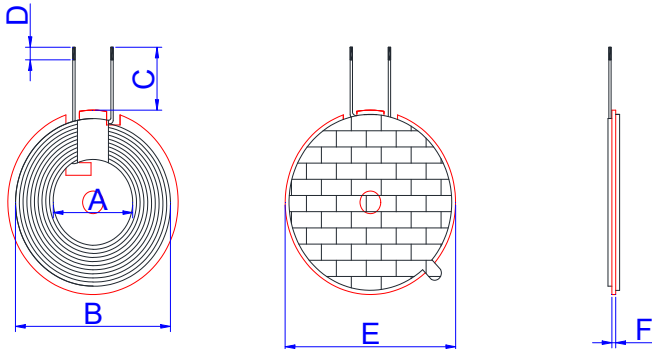
Dongguan City

电话: 0769-86016320 传真: 0769-86372427

东莞市德弗力五金电子材料有限公司

Dongguan city DFL Electronic Technology Co.,LTD

SPECIFICATION

产品型号: DESC	BLS0-Y20.5×40-15-FR	版本 Rev:B	Customer:	BLS TN039	
			Description:	Single coil + hard magnetic	
			Date:	20230804	
一、尺寸DIMENSION:(mm)			A	20.5±1.0	
			B	40.0±1.5	
			C	15.0±2.0	
			D	3.0±2.0	
			E	44.0±1.0	
			F	0.8±0.2	
			G		
			H		
			I		
			J		
			K		
L					
M					
N					
O					
P					
二、原理图 (schematic diagram:)			note:		
三、绕线参数(Winding Specification:)			<ol style="list-style-type: none"> 1. Single coil attached G44*0.8 magnetic disc 2. Coil wrapped with 8MM high-temperature tape 3. White double-sided tape with ears on the back of the magnetic disc 4. Do not loosen the coil 		
序号 NO.	端子 TERMINAL	线径 WIRE	圈数 Turns	绕线方向 Winding Direction	
1		0.08X105Psilk-covered wire	10TS	anticlockwise	
四、电气特性 ELECTRICAL CHARACTERISTICS:					
温度 TEMPERATURE:25±10°C,湿度 RELATIVE HUMIDITY:65±20%					
序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.		6.3uH±10Magnetized sheet	100KHZ/1.0V	SHDA 1062
2	IND.				
3	Q值				
4	DCR				
拟制/日期PREPARED BY/DATE		审核/日期CHECKED BY/DATE		客户/日期CUSTOMEU/DATE	