






Test report No:
20B0794R-RF-US-P06V01

TEST REPORT

FCC Rules&Regulations 47 CFR Chapter I - Part 15C

Product Name	Smart Key
Trademark	KOSTAL , 
Model and /or type reference	AB30
FCC ID	2AYARAB30
Applicant's name / address	Kostal (Shanghai) Management Co., Ltd. Room 201-202 3# Building, 77 Yuan Gao Road, Jiading District Shanghai China
Test method requested, standard	FCC CFR Title 47 Part 15 Subpart C
Verdict Summary	IN COMPLIANCE
Documented by (name / position & signature)	Kitty Li/Project Assistant 
Reviewed by (name / position & signature)	Frank He/ Technical Supervisor 
Approved by (name / position & signature)	Jack Zhang/ Supervisor 
Date of issue	2020-12-29
Report template No	Template_FCC Part 15C-RF-V1.0

INDEX

	page
Competences and Guarantees.....	4
General conditions.....	4
Environmental conditions.....	4
Possible test case verdicts	5
Abbreviations	5
Document History	6
Remarks and Comments	6
Used Equipment	7
Uncertainty.....	9
1 General Information.....	10
1.1 General Description of the Item(s)	10
1.2 Antenna Information	11
2 Description of Test Setup	12
2.1 Operating mode(s) used for tests.....	12
2.2 Support / Auxiliary equipment / unit / Test software for the EUT	12
2.3 Test Configuration / Block diagram used for tests	13
2.4 Testing process	14
3 Verdict summary section	15
3.1 Standards	15
3.2 Overview of results	15
3.3 Test Facility	16
4 Test Results.....	17
4.1 AC Power Line Conducted Emission	17
4.1.1 Limit.....	17
4.1.2 Test Setup.....	17
4.1.3 Test Procedure	17
4.1.4 Test Data.....	18
4.2 Radiated Emissions	19
4.2.1 Limit.....	19
4.2.2 Test Setup.....	20
4.2.3 Test Procedure	21
4.2.4 EUT test Axis definition.....	22
4.2.5 Test Data.....	23
4.3 Emission bandwidth	27

4.3.1	Limit.....	27
4.3.2	Test Setup.....	27
4.3.3	Test Procedure	27
4.3.4	Test Data.....	28
4.4	Duration Time.....	29
4.4.1	Limit.....	29
4.4.2	Test Setup.....	29
4.4.3	Test Procedure	29
4.4.4	Test Data.....	30
4.5	Antenna Requirement	31
4.5.1	Limit:.....	31
4.5.2	Antenna Connector Construction:.....	31
5	Test setup photo and EUT Photo	32

COMPETENCES AND GUARANTEES

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

GENERAL CONDITIONS

Test Location	No. 99, Hongye Road, Suzhou Industrial Park Suzhou, 215006, P.R. China
Date(receive sample)	Nov. 23, 2020
Date (start test)	Nov. 23, 2020
Date (finish test)	Dec. 16, 2020

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or Competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA.

ENVIRONMENTAL CONDITIONS

The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment. The climatic conditions during the tests were within the following limits:

Ambient temperature	15 °C – 35 °C
Relative Humidity air	30% - 60%

If explicitly required in the basic standard or applied product / product family standard the climatic values are recorded and documented separately in this test report.

POSSIBLE TEST CASE VERDICTS

Test case does not apply to test object	N/A
Test object does meet requirement	P (Pass) / PASS
Test object does not meet requirement	F (Fail) / FAIL
Not measured	N/M

ABBREVIATIONS

For the purposes of the present document, the following abbreviations apply:

EUT	: Equipment Under Test
QP	: Quasi-Peak
CAV	: CISPR Average
AV	: Average
CDN	: Coupling Decoupling Network
SAC	: Semi-Anechoic Chamber
OATS	: Open Area Test Site
BW	: Bandwidth
AM	: Amplitude Modulation
PM	: Pulse Modulation
HCP	: Horizontal Coupling Plane
VCP	: Vertical Coupling Plane
U_N	: Nominal voltage
T_x	: Transmitter
R_x	: Receiver
N/A	: Not Applicable
N/M	: Not Measured

DOCUMENT HISTORY

Report No.	Version	Description	Issued Date
20B0794R-RF-US-P06V01	V1.0	Initial issue of report.	2020-12-17
20B0794R-RF-US-P06V01	V1.1	Page 7: Remote equipment for AC-Line conducted emission; Page 14: Update the description of testing process; Page 22: Add chapter 4.2.4 EUT test Axis definition; Chapter 4.2.5: Update test data.	2020-12-29

REMARKS AND COMMENTS

1. The equipment under test (EUT) does meet the essential requirements of the stated standard(s)/test(s).
2. These test results on a sample of the device are for the purpose of demonstrating Compliance with Part 15 Subpart C.
3. The measurement result is considered in conformance with the requirement if it is within the prescribed limit, It is not necessary to account the uncertainty associated with the measurement result.
4. The test results presented in this report relate only to the object tested.
5. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification (Suzhou) Co., Ltd.
6. This report will not be used for social proof function in China market.
7. DEKRA declines any responsibility with the following test data provided by customer that may affect the validity of result:
 - Chapter 1.1 General Description of the Item(s);
 - Chapter 1.2 Antenna information.

USED EQUIPMENT

Emission in non-restricted frequency bands / TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2020.08.15	2021.08.14
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2020.04.17	2021.04.16
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2020.08.15	2021.08.14
Temperature/Humidity Meter	Zhichen	ZC1-2	TR8-TH	2020.08.19	2021.08.18
Note: All equipment is calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					

Radiated Emission(Below 1GHz) / AC-3					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
EMI Test Receiver	R&S	ESCI	100176	2020.08.15	2021.08.14
Loop Antenna	R&S	HFH2-Z2	833799/003	2020.02.17	2021.02.16
Bilog Antenna	Teseq GmbH	CBL6112D	27613	2020.08.19	2021.08.18
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC3-C	2020.04.13	2021.04.12
Temperature/Humidity Meter	RTS	RTS-8S	AC3-TH	2020.08.19	2021.08.18
Quietek EMI V3(test software)	Quietek	N/A	N/A	N/A	N/A
Note: All equipment is calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					

Radiated Emission / AC5(1GHz-40GHz)(Chamber details)					
Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
EMI Receiver	Agilent	N9038A	MY51210196	2020.04.18	2021.04.17
DRG Horn	ETS-Lindgren	3117	00123988	2020.09.21	2021.09.20
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170D	750	2019.01.05	2021.01.04
Pre-Amplifier	Schwarzbeck	BBV 9721	9721-024	2019.07.17	2021.07.16
Temperature/Humidity Meter	RTS	RTS-8S	AC5-TH	2020.08.13	2021.08.12
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2020.04.05	2021.04.04
DEKRA test software	N/A	N/A	N/A	N/A	N/A

UNCERTAINTY

Uncertainties have been calculated according to the DEKRA internal document. The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%. The Uncertainties is complice with standard required as below.

Test item	Uncertainty
AC Power Line Conducted Emission	± 2.02 dB
Peak Power Output	± 1.27 dB
Radiated Emission(30MHz~1GHz)	± 3.80 dB
RF antenna conducted test	± 1.27 dB
DTS Bandwidth	± 1 kHz
Occupied Bandwidth	± 1 kHz
Power Density	± 1.27 dB
Frequency Stability	± 100 Hz

1 GENERAL INFORMATION

1.1 General Description of the Item(s)

Product Name	Smart Key
Model No.....	AB30
Trademark.....	KOSTAL 
FCC ID	2AYARAB30
Manufacturer.....	Kostal (Shanghai) Management Co., Ltd.
Manufacturer Address	Room 201-202 3# Building, 77 Yuan Gao Road, Jiading District Shanghai China

Wireless specification	N/A
Operating frequency(s)	433.92 MHz
Type of modulation	ASK
Number of channel	1

Rated power supply	Voltage and Frequency	
	☐	AC: 220 – 240 V, 50/60 Hz
	☐	AC: 100 – 240 V, 50/60 Hz
	☐	DC: 12 V
	☒	Battery: 3V
Mounting position.....	☐	Table top equipment
	☐	Wall/Ceiling mounted equipment
	☐	Floor standing equipment
	☒	Hand-held equipment
	☐	Other:

1.2 Antenna Information

Antenna model / type number	N/A		
Antenna serial number.....	N/A		
Antenna Delivery	☒	1TX + 1RX	
	☐	2TX + 2RX	
	☐	Others:.....	
Antenna technology	☒	SISO	
	☐	MIMO	☐ CDD
			☐ Beam-forming
Antenna Type	☐	External	☐ Dipole
			☐ Sectorized
	☒	Internal	☐ Monopole
			☒ PCB
			☐ Metal
			☐ PIFA
			☐ Others.....
Antenna Gain	N/A		

Note: The General Description of the Item and antenna information in clause 1 are provided and confirmed by the client.

2 DESCRIPTION OF TEST SETUP

2.1 Operating mode(s) used for tests

During the tests the following operating mode(s) has(have) been used.


Test Mode	Mode 1: Transmit
-----------	------------------

2.2 Support / Auxiliary equipment / unit / Test software for the EUT

Auxiliary equipment	Type / Version	Manufacturer	Supplied by
N/A	N/A	N/A	N/A
software	Type / Version	Manufacturer	Supplied by
N/A	N/A	N/A	N/A

2.3 Test Configuration / Block diagram used for tests

Test setup Diagram- Radiated Emission

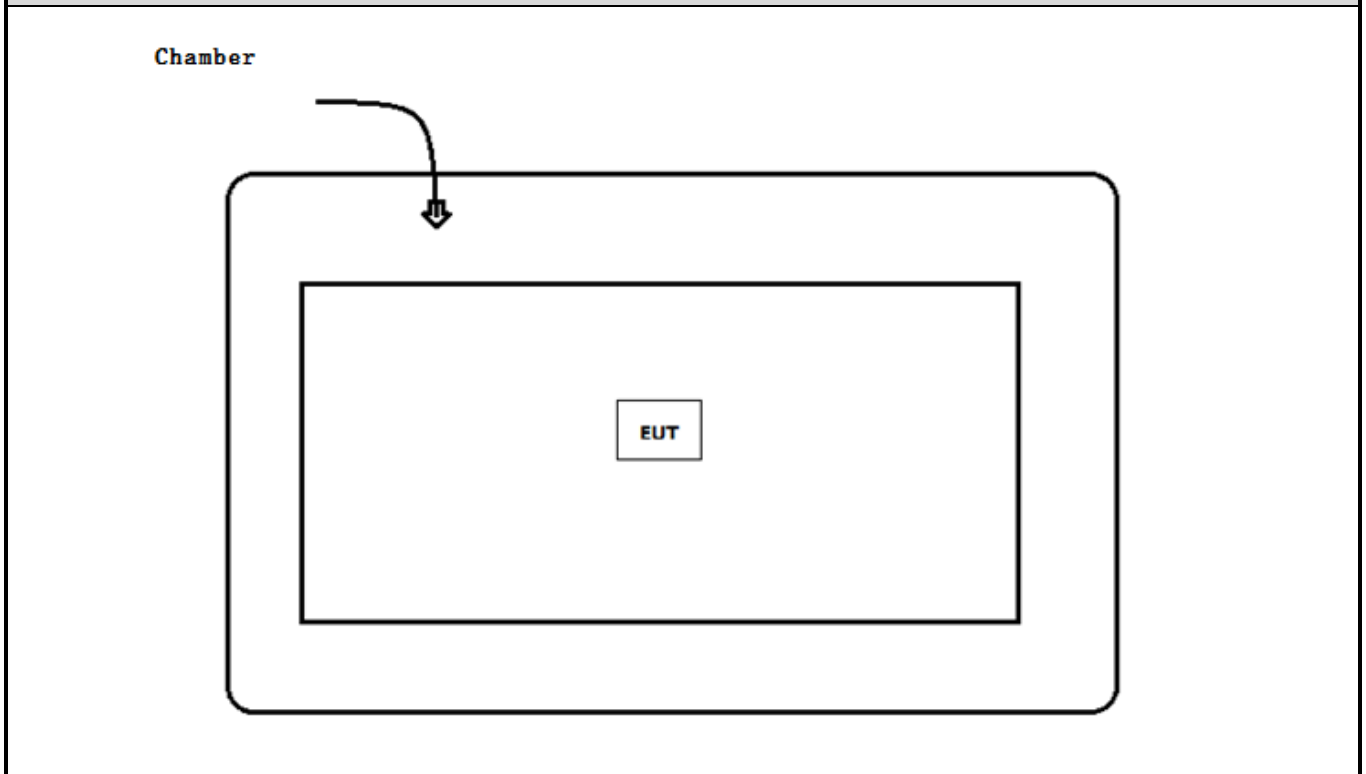

2.4 Testing process

1	Setup the EUT as shown in Section 2.3.
2	Press the  button on the EUT.
3	Verify that the EUT works properly.

3 VERDICT SUMMARY SECTION

This chapter presents an overview of standards and results. Refer to the next chapters for details of measured test results and applied test levels.

3.1 Standards

Standard	Year	Description
FCC CFR Title 47 Part 15 Subpart C	2020	Intentional Radiators

3.2 Overview of results

Requirement – Test case	Basic standard(s)	Verdict	Remark
Conducted Emission	FCC CFR Title 47 Part 15 Subpart C Section 15.207	N/A	---
Field Strength of Spurious	FCC CFR Title 47 Part 15 Subpart C Section 15.209	PASS	---
Channel Bandwidth	FCC CFR Title 47 Part 15 Subpart C Section 15.231(c)	PASS	---
Antenna Requirement	FCC CFR Title 47 Part 15 Subpart C Section 15.203	PASS	---
<u>Supplementary information:</u>			

3.3 Test Facility

USA	:	FCC Designation Number: CN1199
Canada	:	CAB identifier Number: CN0040

4 TEST RESULTS

4.1 AC Power Line Conducted Emission	VERDICT: N/A
---	---------------------

4.1.1 Limit

Standard	FCC Part 15 Subpart E Paragraph 15.207	
Frequency range [MHz]	Limit: QP [dB(μV) ¹⁾]	Limit: AV [dB(μV) ¹⁾]
0,15 - 0,50	66 - 56 ²⁾	56 - 46 ²⁾
0,50 - 5,0	56	46
5,0 - 30	60	50


¹⁾ At the transition frequency, the lower limit applies.

²⁾ The limit decreases linearly with the logarithm of the frequency.

NOTE 1: The exclusion band for transmitters shall be considered for transmitters operating at frequencies below 30 MHz.

NOTE 2: Where the AC output port is directly connected (or via a circuit breaker) to the AC power input port of the EUT the AC power output port need not to be tested.

4.1.2 Test Setup

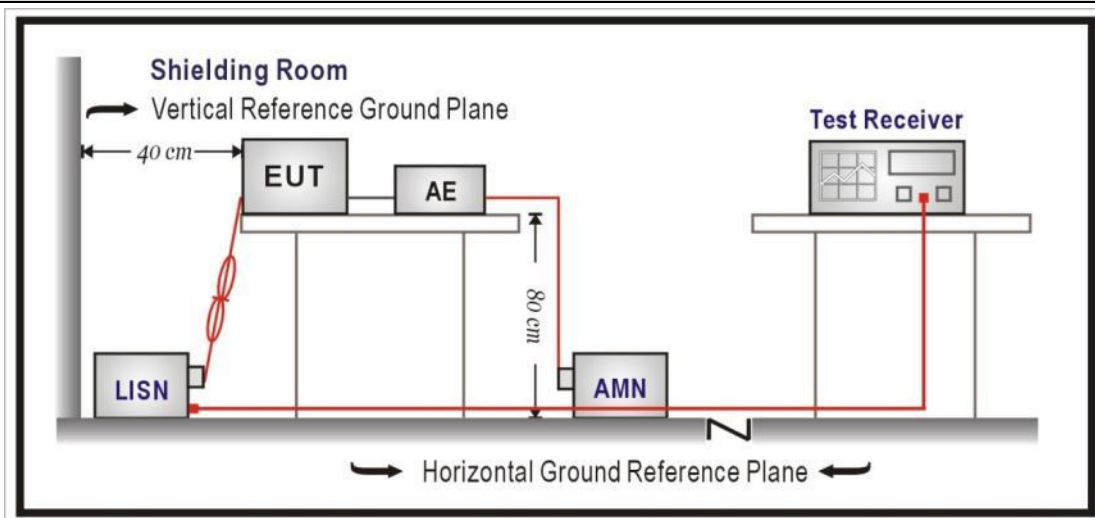

4.1.3 Test Procedure

	References Rule	Chapter	Item
☒	ANSI C63.10-2013	6.2	Standard test method for ac power-line conducted emissions from unlicensed wireless devices

4.1.4 Test Data

N/A: The sample is supply by DC .

4.2 Radiated Emissions**VERDICT: PASS****4.2.1 Limit**

Standard	FCC Part 15 Subpart C Paragraph 15. 209
-----------------	---

Restricted Band Emissions Limit


Frequency (MHz)	Field strength (μV/m)	Field strength (dBμV/m)	Measurement distance (m)
0.009 - 0.49	2400/F(kHz)	48.5 – 13.8	300 _(Note 1)
0.49 - 1.705	24000/F(kHz)	33.8 - 23	30 _(Note 1)
1.705 - 30	30	29.5	30 _(Note 1)
30 - 88	100	40	3 _(Note 2)
88 - 216	150	43.5	3 _(Note 2)
216 - 960	200	46	3 _(Note 2)
Above 960	500	54	3 _(Note 2)

Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).


Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

4.2.2 Test Setup


Below 30MHz Test Setup:

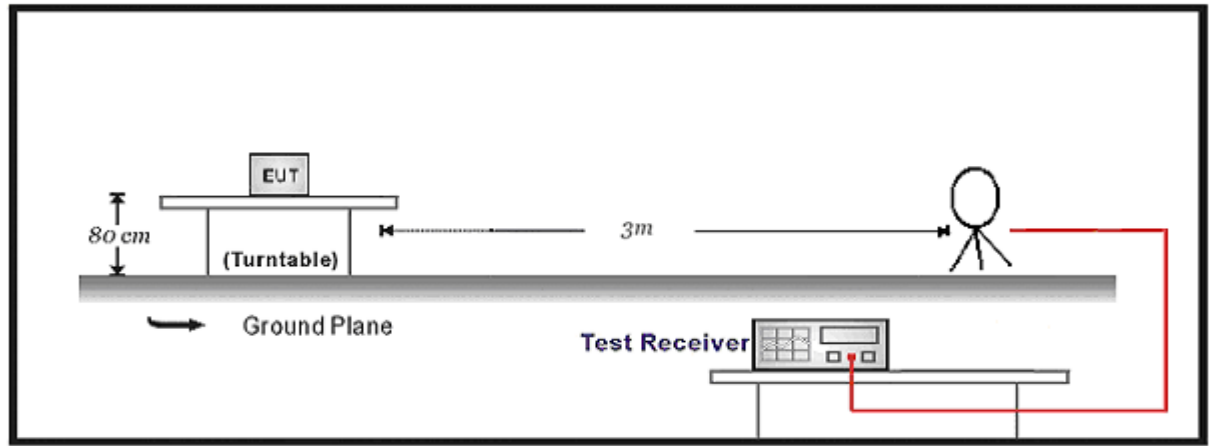

30MHz-1GHz Test Setup:


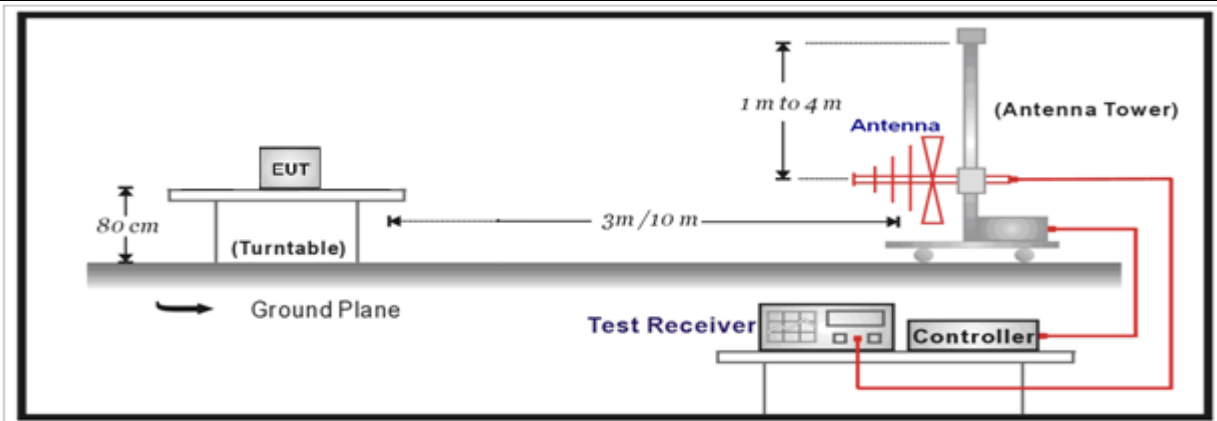


Above 1GHz Test Setup:

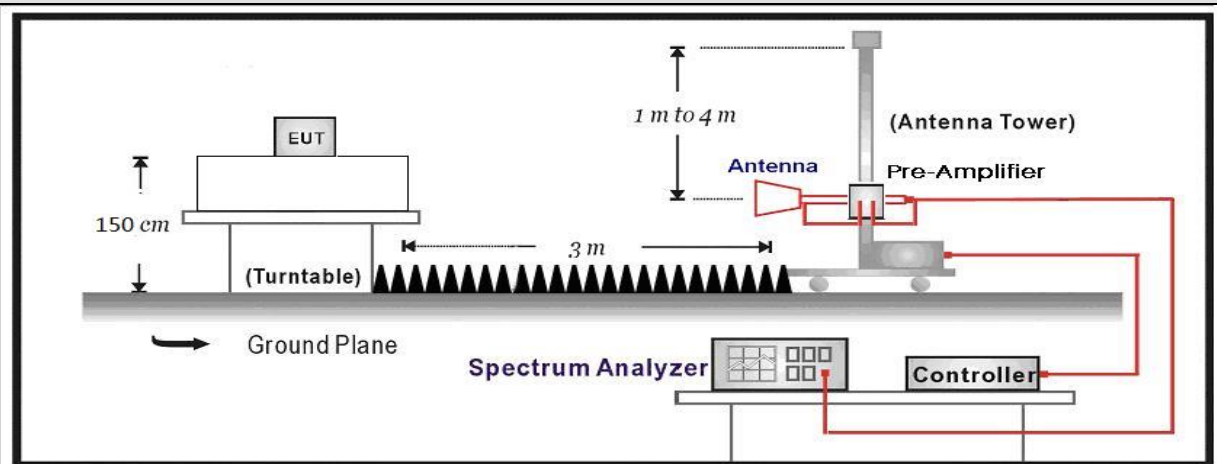

4.2.3 Test Procedure


	References Rule	Chapter	Description
☒	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
☒	ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
☒	ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz

4.2.4 EUT test Axis definition				
Item	Emissions in restricted frequency bands			
Device Category	☐	Fixed point-to-point		
	☐	Emit multiple directional beams, simultaneously or sequentially		
	☒	Other cases		
Test mode	Mode 1			
Test method	☒	Radiated		
		X Axis	Y Axis	Z Axis
				
		Worst Axis ☒	Worst Axis ☐	Worst Axis ☐
	☐	Conducted		
	☐	Chain 1		
				
	☐	Chain 1	Chain 2	
				
	☐	Chain 1	Chain 2	Chain 3
				

4.2.5 Test Data

Fundamental Frequency (MHz)	Field Strength of fundamental (dBuV/m) (Peak)	Field Strength of fundamental (dBuV/m) (AV)	Limit (dBuV/m) (Peak)	Limit (dBuV/m) (AV)	Result
433.92	87.769	79.864	100.08	80.08	Pass


Profile: 20B0794R	Page No.: 19
Engineer: Pawn	
Site: AC5	Time: 2020/12/09 - 16:30
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Smart Key AB30	Power: Battery
Note: Mode 1: Transmit at 433.92MHz	

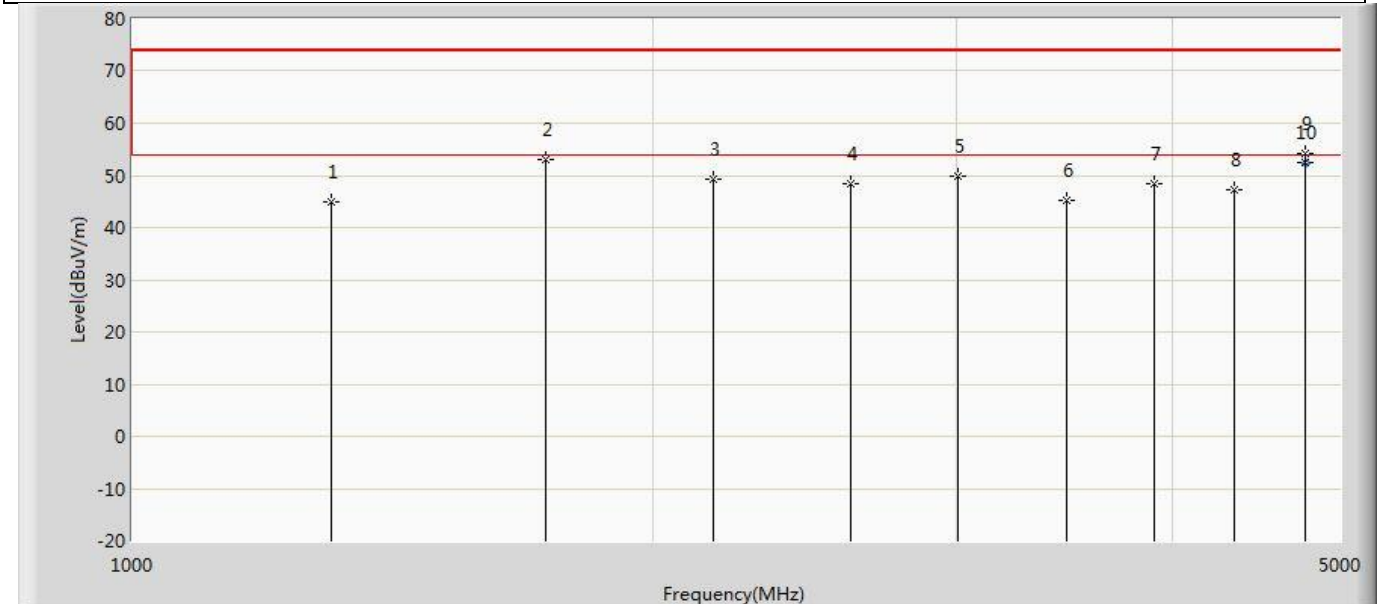

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		1304.000	44.848	58.307	-29.152	74.000	-13.459	PK
2		1736.000	53.084	65.250	-26.996	80.080	-12.166	PK
3		2168.000	49.393	59.492	-30.687	80.080	-10.100	PK
4		2604.000	48.536	58.248	-31.544	80.080	-9.712	PK
5		3004.000	49.947	58.616	-30.133	80.080	-8.669	PK
6		3472.000	45.278	52.427	-34.802	80.080	-7.149	PK
7		3904.000	48.432	54.757	-25.568	74.000	-6.325	PK
8		4340.000	47.225	52.347	-26.775	74.000	-5.121	PK
9		4772.000	54.180	59.258	-19.820	74.000	-5.078	PK
10	*	4773.216	52.345	57.434	-1.655	54.000	-5.089	AV

Note: 1.Measure level =Reading Level + Factor


Profile: 20B0794R	Page No.: 20
Engineer: Pawn	
Site: AC5	Time: 2020/12/09 - 16:30
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Smart Key AB30	Power: Battery
Note: Mode 1:Transmit at 433.92MHz	

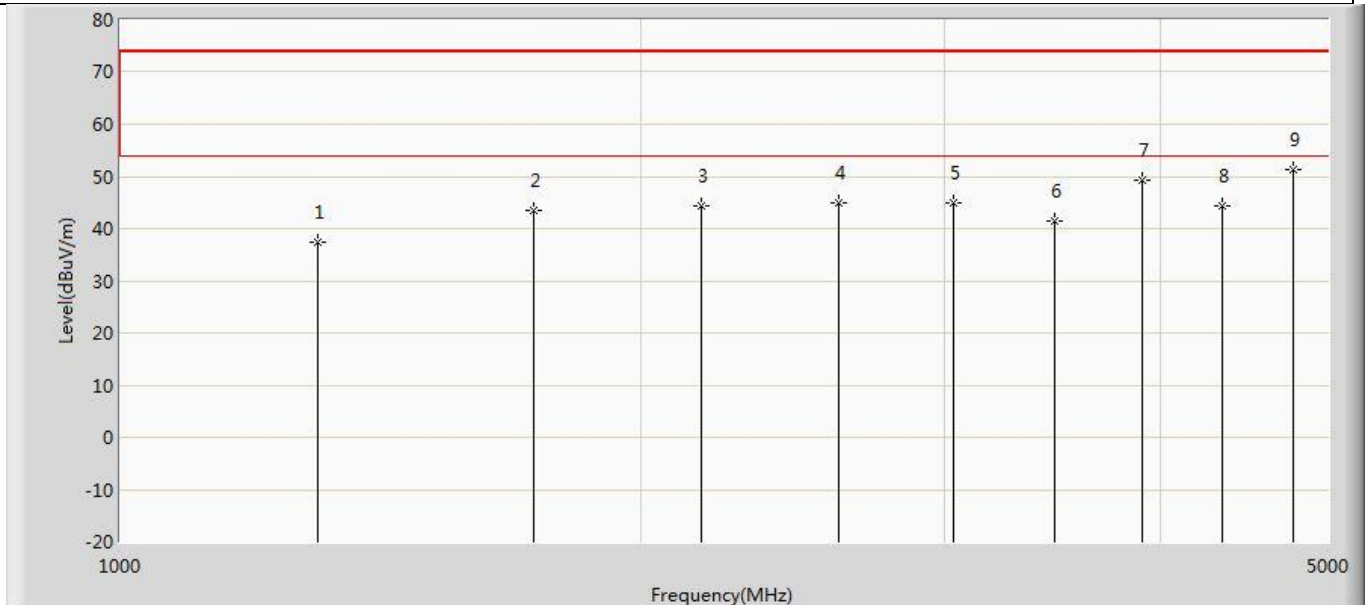

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		1302.000	37.295	50.822	-36.705	74.000	-13.527	PK
2		1736.000	43.588	55.754	-36.492	80.080	-12.166	PK
3		2168.000	44.208	54.307	-35.872	80.080	-10.100	PK
4		2604.000	44.797	54.509	-35.283	80.080	-9.712	PK
5		3036.000	45.003	54.013	-35.077	80.080	-9.010	PK
6		3471.360	41.560	48.658	-38.520	80.080	-7.098	PK
7		3904.000	49.242	55.567	-24.758	74.000	-6.325	PK
8		4340.000	44.356	49.478	-29.644	74.000	-5.121	PK
9	*	4772.000	51.166	56.244	-22.834	74.000	-5.078	PK

Note: 1.Measure level =Reading Level + Factor

Profile: 20B0794R	Page No.: 7
Engineer: Pawn	
Site: AC3	Time: 2020/12/15 - 20:49
Limit: FCC_Part15.109_RE(3m)_ClassB	Margin: 0
Probe: AC3_3m (30-1000MHz)	Polarity: Vertical
EUT: Smart Key AB30	Power: Battery
Note: Mode 1: Transmit	

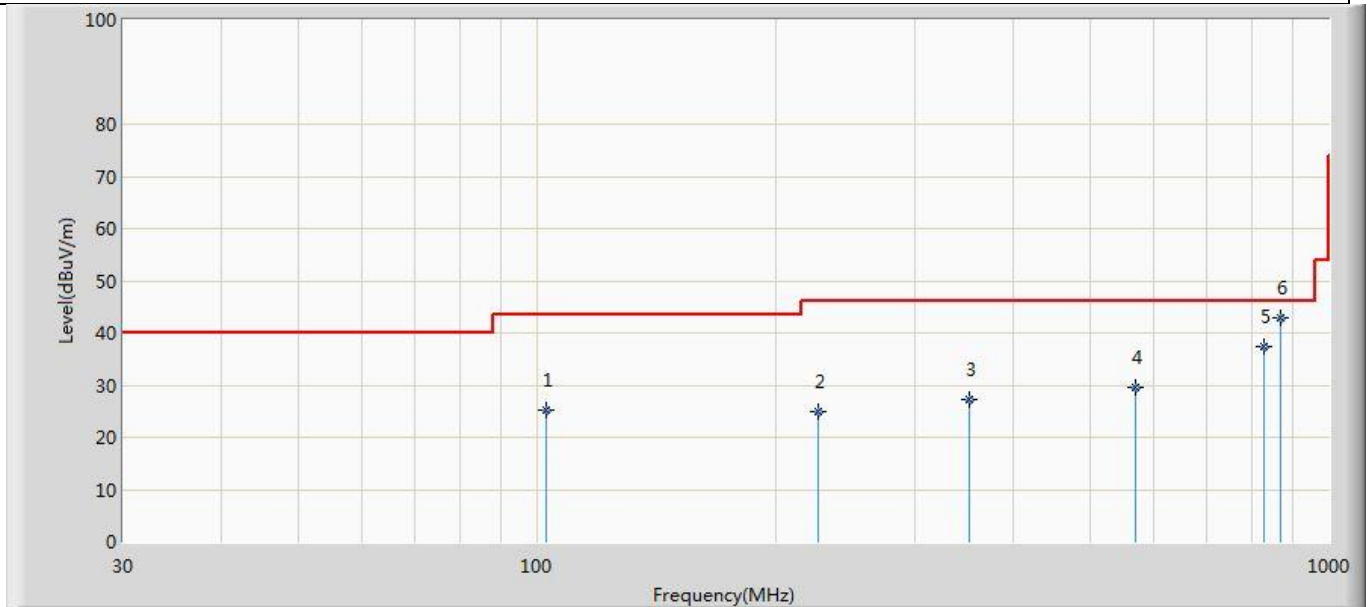


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		102.750	25.105	3.124	-18.395	43.500	21.981	QP
2		226.910	24.978	3.011	-21.022	46.000	21.967	QP
3		351.676	27.131	2.471	-18.869	46.000	24.660	QP
4		570.047	29.424	3.175	-16.576	46.000	26.250	QP
5		827.097	37.331	5.153	-8.669	46.000	32.178	QP
6	*	867.838	43.039	10.353	-37.041	80.080	32.686	PK

Note: 1.Measure level =Reading Level + Factor

2. Mark 6 is 2th harmonic.

Profile: 20B0794R	Page No.: 8
Engineer: Pawn	
Site: AC3	Time: 2020/12/15 - 20:50
Limit: FCC_Part15.109_RE(3m)_ClassB	Margin: 0
Probe: AC3_3m (30-1000MHz)	Polarity: Horizontal
EUT: Smart Key AB30	Power: Battery
Note: Mode 1: Transmit	

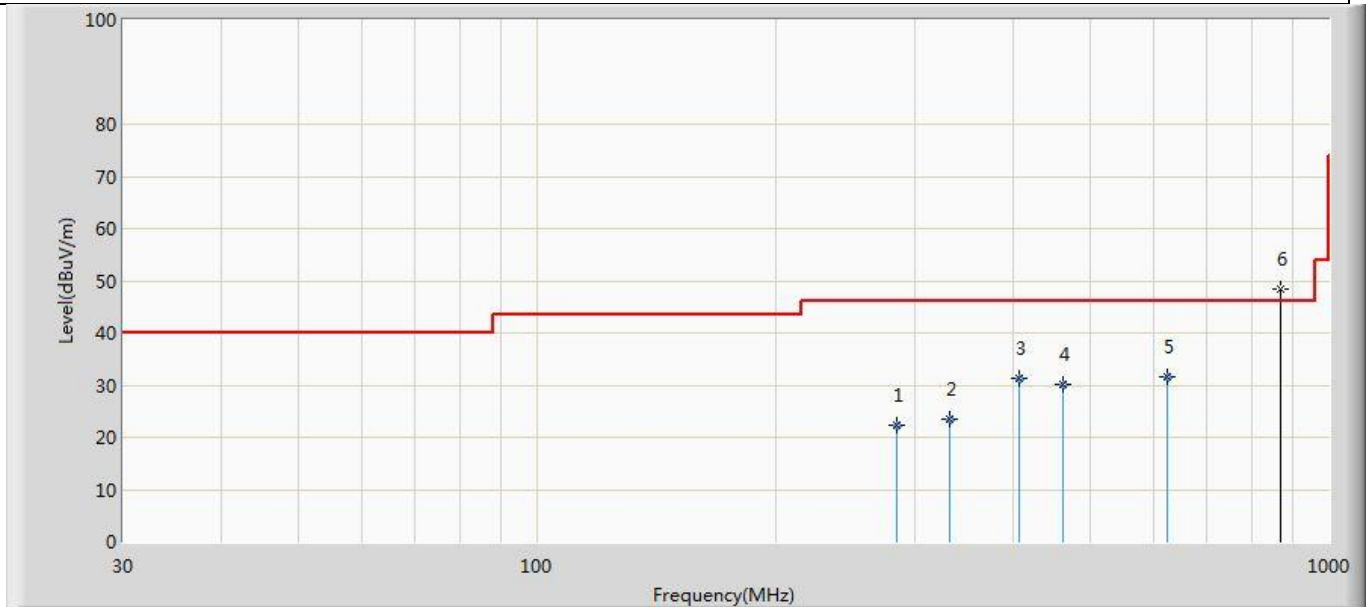


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		284.746	22.305	1.312	-23.695	46.000	20.993	QP
2		332.276	23.381	0.631	-22.619	46.000	22.750	QP
3		406.239	31.298	6.019	-14.702	46.000	25.280	QP
4		461.529	30.184	3.612	-15.816	46.000	26.572	QP
5	*	625.095	31.476	1.680	-14.524	46.000	29.796	QP
6		867.838	48.415	15.729	-31.665	80.080	32.686	PK

Note: 1.Measure level =Reading Level + Factor

2. Mark 6 is 2th harmonic.

4.3 Emission bandwidth	VERDICT: PASS
------------------------	---------------

4.3.1 Limit	
Standard	FCC Part 15 Subpart C Paragraph 15.215
Within the band.	

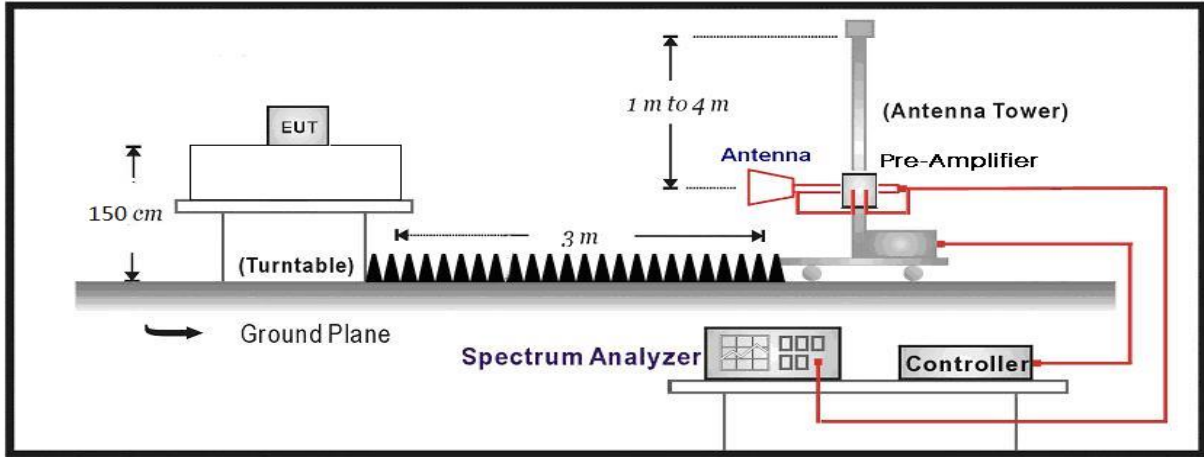
4.3.2 Test Setup	
	

4.3.3 Test Procedure			
	Reference Rule	Chapter	Description
☒	ANSI C63.10	6.9.2	Occupied bandwidth—relative measurement procedure

4.3.4 Test Data


Frequency (MHz)	20dB bandwidth (kHz)	99% bandwidth (kHz)	Result
433.92	24.60	31.40	Pass

20dB bandwidth

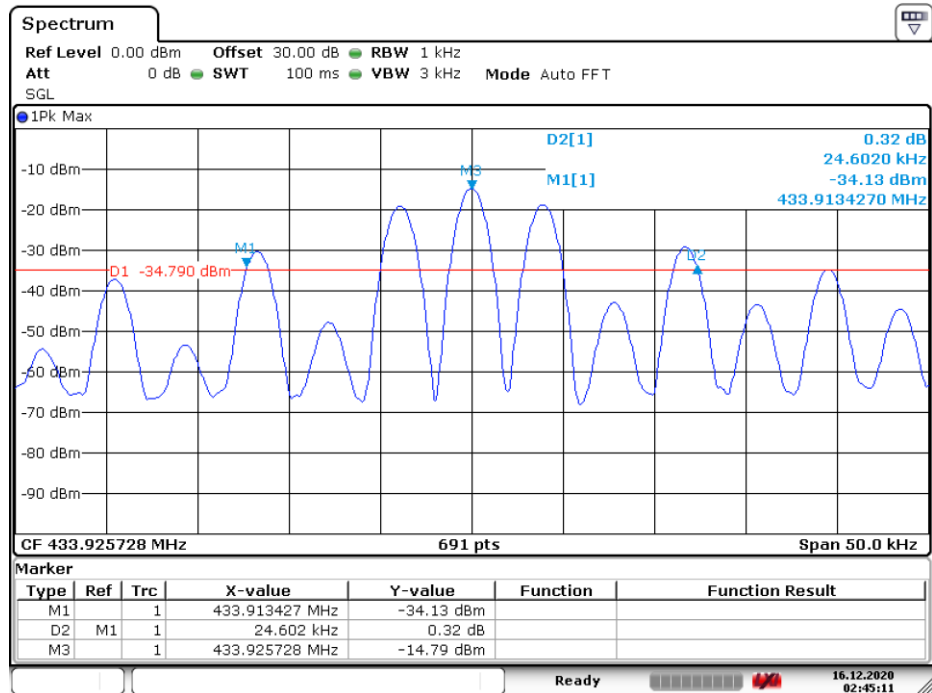

Date: 16.DEC.2020 02:45:12

99% bandwidth

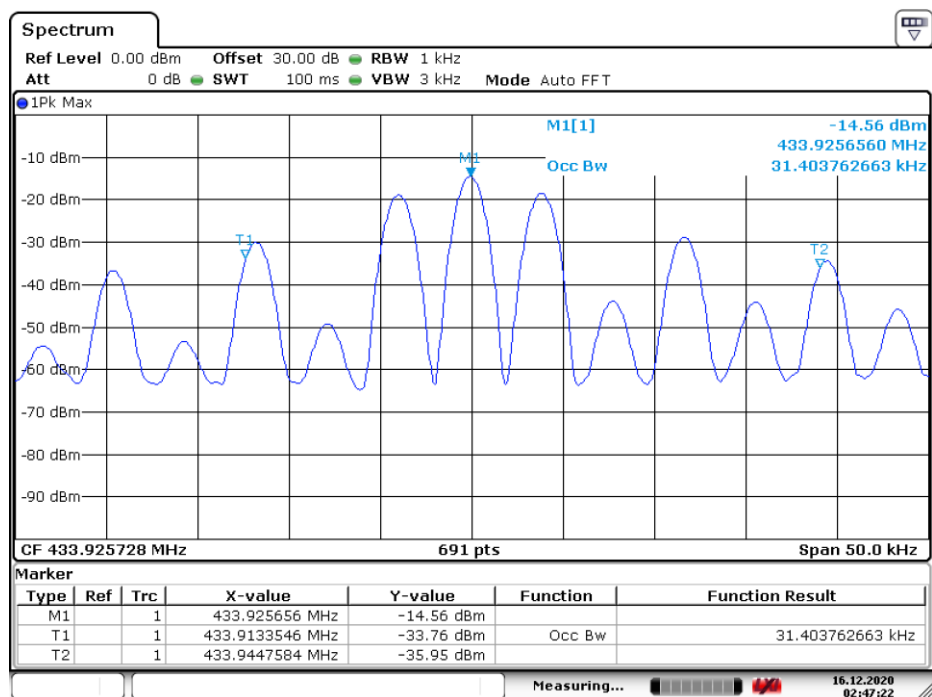

Date: 16.DEC.2020 02:47:23

4.4 Duration Time


VERDICT: PASS

4.4.1 Limit

Standard	FCC Part 15 Subpart C Paragraph 15.221(a)
-----------------	---

A transmitter activated automatically shall cease transmission within 5 seconds after activation.

4.4.2 Test Setup

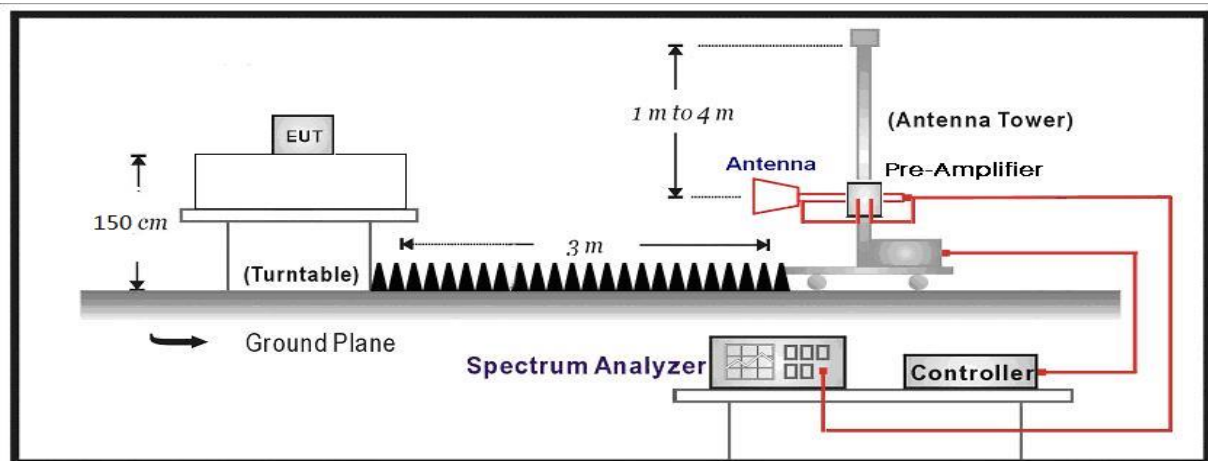

4.4.3 Test Procedure

	Reference Rule	Chapter	Description
☒	CFR 47	15.231	Periodic operation in the band 40.66-40.70 MHz and above 70 MHz.
1. According to the follow Test-setup, keep the relative position between the artificial antenna and the EUT.			
2. Set the EUT to proper test channel.			
3. Single scan the transmission, and read the transmission time.			


4.4.4 Test Data

Frequency (MHz)	Duration Time (ms)	Limit (S)	Result
433.92	159.42	<5.0	Pass

Spectrum **Spectrum 2** 

Ref Level -10.00 dBm  RBW 100 kHz
Att 10 dB  SWT 5 s  VBW 300 kHz
SGL

1Pk Clrw

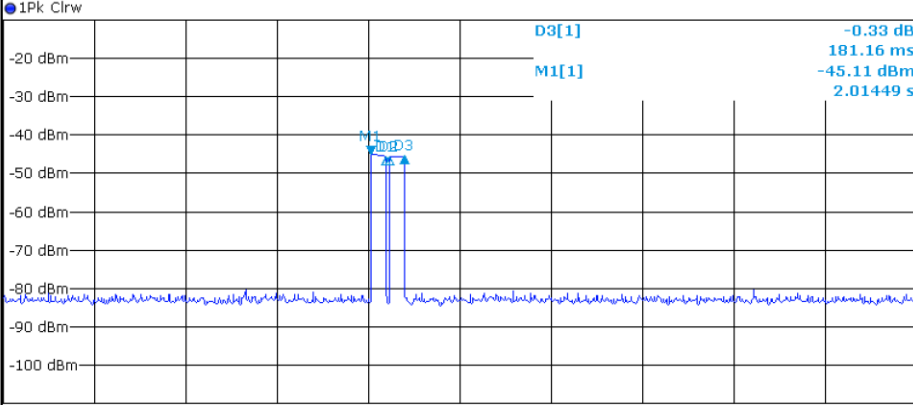

CF 433.92 MHz 691 pts 500.0 ms/

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.01449 s	-45.11 dBm		
D1	M1	1	79.71 ms	-0.45 dB		
D2	M1	1	101.45 ms	-0.52 dB		
D3	M1	1	181.16 ms	-0.33 dB		

Ready  17.12.2020 11:49:02

Date: 17.DEC.2020 11:49:02

4.5 Antenna Requirement	VERDICT: PASS
--------------------------------	----------------------

4.5.1 Limit:

Standard	FCC Part 15 Subpart E Paragraph 15.203
An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.	

4.5.2 Antenna Connector Construction:

☒	The use of a permanently attached antenna
☐	The antenna use of a unique coupling to the intentional radiator
☐	The use of a nonstandard antenna jack or electrical connector
Please refer to the attached document "Internal Photograph" to show the antenna connector.	

5 TEST SETUP PHOTO AND EUT PHOTO	VERDICT: PASS
-------------------------------------	------------------

Remark: The test setup photo and EUT Photo please see appendix.

_____ The End _____