



FCC PART 15.247 TEST REPORT

For

SOLAR BRIGHT INDUSTRIAL LIMITED

FLAT/RM 4, 7F SHING YIP INDUSTRIAL BUILDING, 19-21 SHING YIP STREET,
KWUNTONG, KL., HONG KONG.

FCC ID: 2AYB769636S

Report Type: Original Report	Product Type: Vivitar Bluetooth Boombox Speaker
Report Number: <u>RSZ210311801-00A</u>	
Report Date: <u>2021-04-02</u>	
Reviewed By: <u>Candy Li</u> RF Engineer	<i>Candy . Li</i>
Prepared By: Shenzhen Accurate Technology Co., Ltd. 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China Tel: (0755) 26503290 Fax: (0755) 26503396 Http://www.atc-lab.com	

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
SPECIAL ACCESSORIES	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
TEST EQUIPMENT LIST	9
FCC §15.203 – ANTENNA REQUIREMENT	11
APPLICABLE STANDARD	11
ANTENNA CONNECTOR CONSTRUCTION	11
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	12
APPLICABLE STANDARD	12
EUT SETUP.....	12
EMI TEST RECEIVER SETUP.....	12
TEST PROCEDURE	12
TRANSD FACTOR & MARGIN CALCULATION	13
TEST DATA	13
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS.....	16
APPLICABLE STANDARD	16
EUT SETUP.....	16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	17
TEST PROCEDURE	17
FACTOR & MARGIN CALCULATION	17
TEST DATA	17
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST	24
APPLICABLE STANDARD	24
TEST PROCEDURE	24
TEST DATA	24
FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH.....	26
APPLICABLE STANDARD	26
TEST PROCEDURE	26
TEST DATA	27
FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST	34
APPLICABLE STANDARD	34
TEST PROCEDURE	34

TEST DATA	34
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	36
APPLICABLE STANDARD	36
TEST PROCEDURE	36
TEST DATA	36
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	43
APPLICABLE STANDARD	43
TEST PROCEDURE	43
TEST DATA	43
FCC §15.247(d) - BAND EDGES TESTING	47
APPLICABLE STANDARD	47
TEST PROCEDURE	47
TEST DATA	47

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	Vivitar Bluetooth Boombox Speaker
Tested Model	MD36S
Multiple Model	VIVBOOM1-RG -T37-1, VIVBOOM1-BLK-T37-1, VIVBOOM1-BLK, VIVBOOM1-RG, RG36S, RG36CD, RG36
Trademark	Modern, VIVITAR, Vivitar, vivitar
Model Differences	Refer to DOS letter.
Frequency Range	2402~2480MHz
Maximum conducted Peak output power	2.72dBm
Modulation Technique	GFSK, $\pi/4$ -DQPSK
Antenna Specification*	PCB Antenna: -0.58dBi(provided by the applicant)
Voltage Range	AC 100-240V, 50/60Hz or DC 12V (8*1.5V) by battery.
Date of Test	2021-03-20 to 2021-03-31
Sample number	RSZ210311801-RF-S1(Assigned by ATC)
Received date	2021-03-15
Sample/EUT Status	Good condition
Adapter information	Model: JDA010601200U Input: 100-240VAC, 50/60Hz, 0.8A Output: 6V, 1.20A

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

For Radiated Emissions testing, please refer to DA 00-705 Released March 30, 2000, Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
AC Power Lines Conducted Emissions		±2.72dB
Emissions, Radiated	30MHz - 1GHz	±4.28dB
	1GHz- 18GHz	±4.98dB
	18GHz- 26.5GHz	±5.06dB

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 429 7.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A-2.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode.

EUT Exercise Software

Software “FCCAssist” was used during testing and the power level was 10.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable

Cable Description	Length (m)	From Port	To
Adaptor with unshielded DC cable	1.77	EUT	Adapter

Block Diagram of Test Setup

For conducted emission:

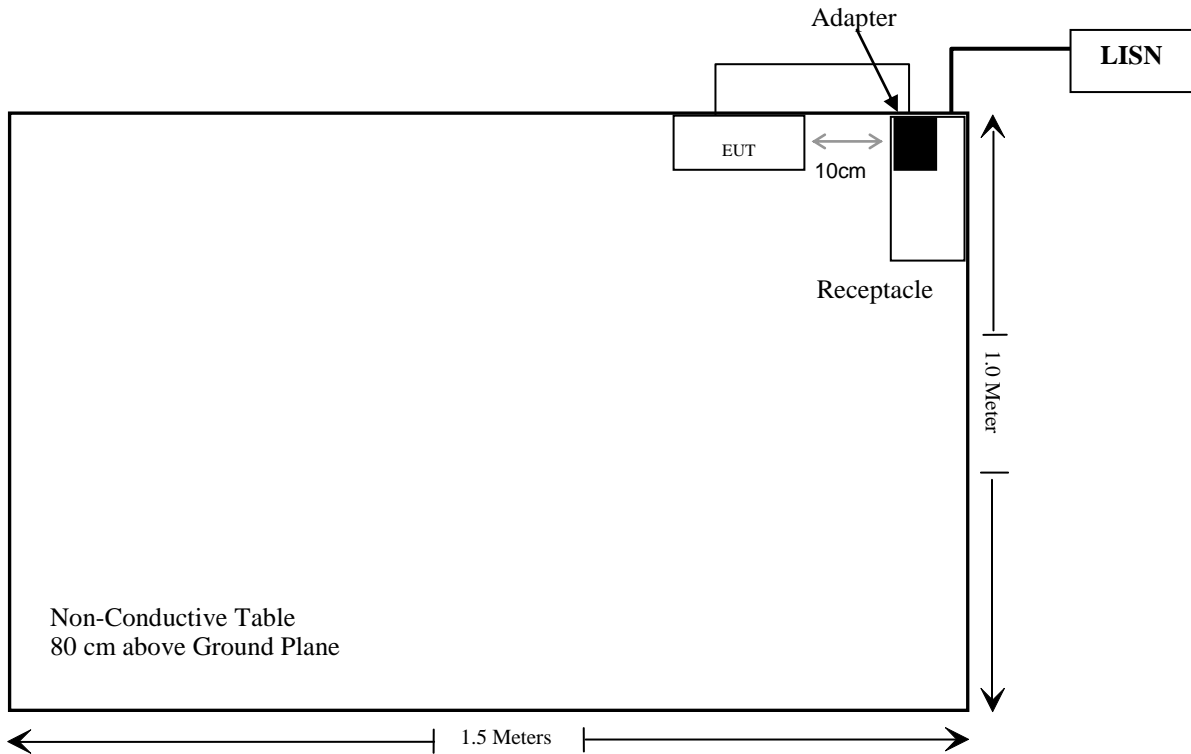

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i) & §2.1091	Maximum Permissible Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth & 99% Occupied Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde& Schwarz	Test Receiver	ESPI3	100396	2020/12/24	2021/12/23
R & S	L.I.S.N.	ENV216	101314	2020/12/25	2021/12/24
Anritsu Corp	50Ω Coaxial Switch	MP59B	6200506474	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-2m	No.2	2020/12/25	2021/12/24
Radiated Emissions Test					
Rohde&Schwarz	Test Receiver	ESR	101817	2020/12/24	2021/12/23
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101495	2020/12/24	2021/12/23
A.H. Systems, inc.	Preamplifier	PAM-0118P	531	2020/07/08	2021/07/07
SONOMA INSTRUMENT	Amplifier	310 N	186131	2020/12/25	2021/12/24
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2020/01/04	2023/01/03
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
Schwarzbeck	Horn Antenna	BBHA9170	9170-359	2020/01/05	2023/01/04
Quinstar	Amplifier	QLW-184055 36-J0	15964001002	2020/11/28	2021/11/27
Unknown	RF Coaxial Cable	N-5m	No.3	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-5m	No.4	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-1m	No.5	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-1m	No.6	2020/12/25	2021/12/24
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101495	2020/12/24	2021/12/23
WEINSCHTEL	10dB Attenuator	5324	AU 3842	Each time	

* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.247 (i) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)**Applicable Standard**

According to subpart 15.247 (i) and subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (Minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

Result**Calculated Formulary:**

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

For worst case:

Frequency (MHz)	Antenna Gain		Tune up conducted power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
	(dBi)	(numeric)	(dBm)	(mW)			
2402-2480	-0.58	0.87	3.0	2.00	20	0.0003	1

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliance

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one PCB Antenna arrangement, which was permanently attached and the antenna gain is -0.58 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

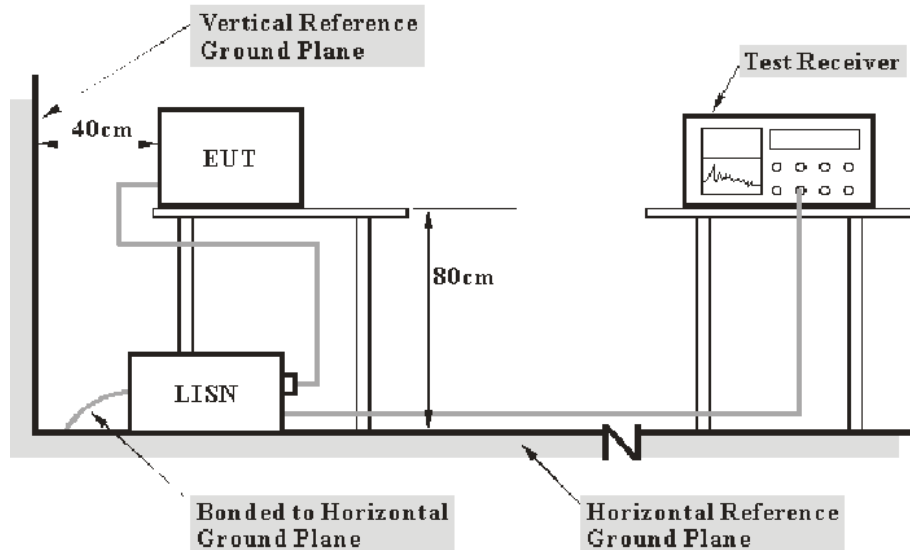

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Transd Factor & Margin Calculation

The Transd factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Transd Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\begin{aligned} \text{Margin} &= \text{Limit} - \text{level} \\ \text{Level} &= \text{reading level} + \text{Transd Factor} \end{aligned}$$

Test Data


Environmental Conditions

Temperature:	24 °C
Relative Humidity:	48 %
ATM Pressure:	101.0 kPa

The testing was performed by Ting on 2021-03-31.

EUT operation mode: Transmitting (the worst case is $\pi/4$ -DQPSK Mode, Low channel)

AC 120V/60 Hz, Line

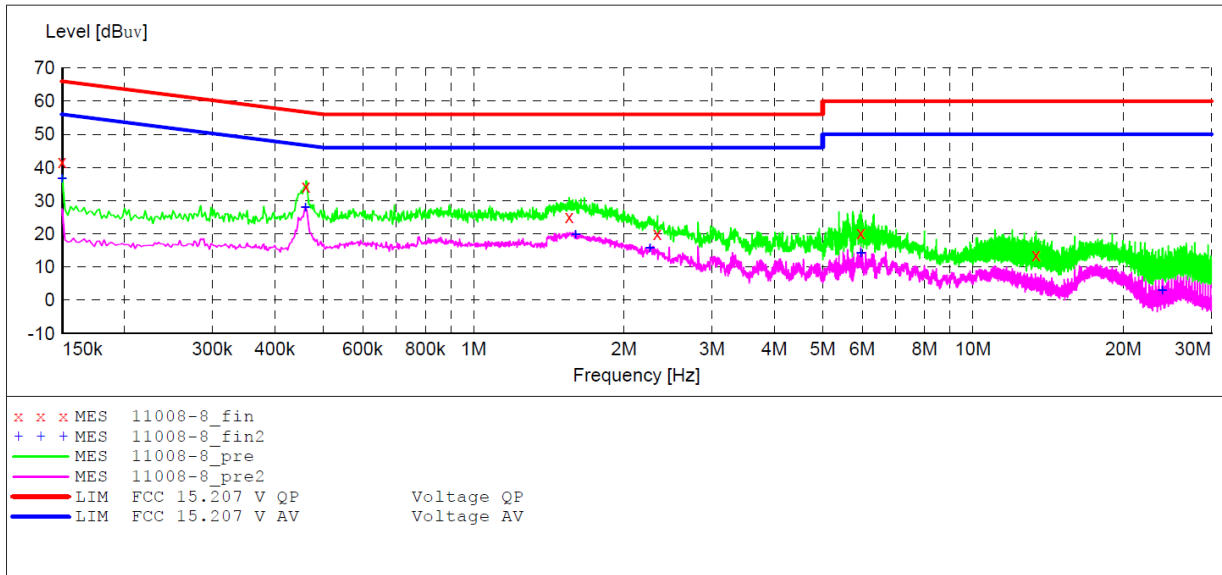

MEASUREMENT RESULT: "11008-8_fin"

2021-3-31 17:12


Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.150000	41.60	10.8	66	24.4	QP	L1	GND
0.462000	34.20	11.0	57	22.8	QP	L1	GND
1.554000	25.00	11.2	56	31.0	QP	L1	GND
2.335000	19.90	11.3	56	36.1	QP	L1	GND
5.965000	20.20	11.5	60	39.8	QP	L1	GND
13.375000	13.60	11.6	60	46.4	QP	L1	GND

MEASUREMENT RESULT: "11008-8_fin2"

2021-3-31 17:12

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.150000	36.60	10.8	56	19.4	AV	L1	GND
0.460000	28.00	11.0	47	19.0	AV	L1	GND
1.600000	19.80	11.2	46	26.2	AV	L1	GND
2.255000	15.60	11.3	46	30.4	AV	L1	GND
5.960000	14.20	11.5	50	35.8	AV	L1	GND
23.935000	2.90	11.7	50	47.1	AV	L1	GND

AC 120V/60 Hz, Neutral

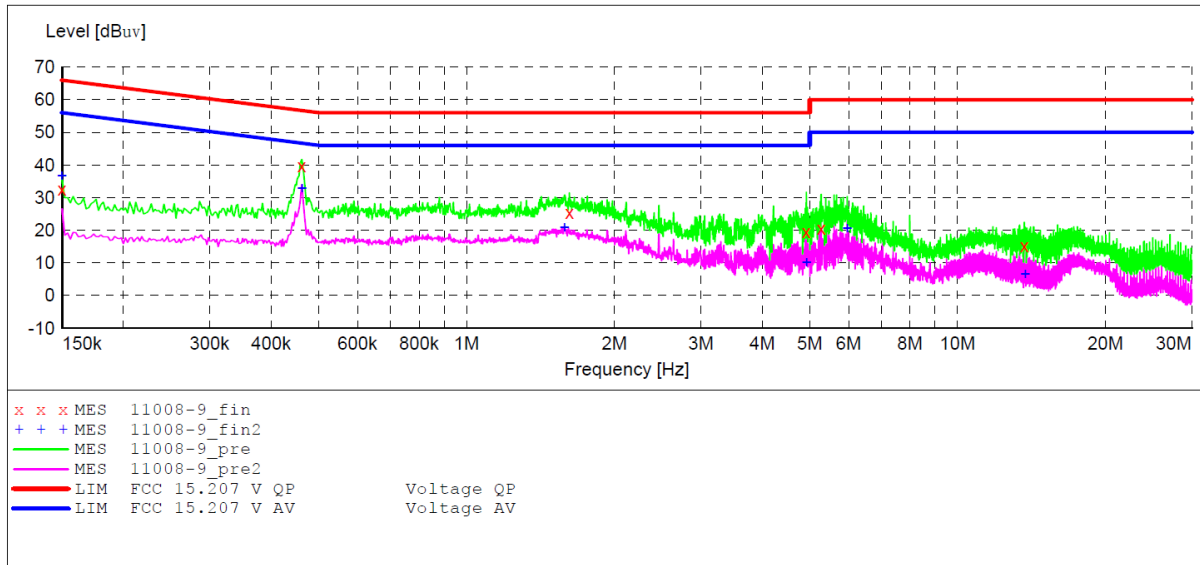

MEASUREMENT RESULT: "11008-9_fin"

2021-3-31 17:15

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.150000	32.40	10.8	66	33.6	QP	N	GND
0.462000	39.70	11.0	57	17.3	QP	N	GND
1.620000	25.30	11.2	56	30.7	QP	N	GND
4.920000	19.40	11.4	56	36.6	QP	N	GND
5.275000	20.60	11.4	60	39.4	QP	N	GND
13.680000	15.10	11.6	60	44.9	QP	N	GND

MEASUREMENT RESULT: "11008-9_fin2"

2021-3-31 17:15

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.150000	36.60	10.8	56	19.4	AV	N	GND
0.462000	32.90	11.0	47	14.1	AV	N	GND
1.582000	20.70	11.2	46	25.3	AV	N	GND
4.920000	10.10	11.4	46	35.9	AV	N	GND
5.960000	20.40	11.5	50	29.6	AV	N	GND
13.725000	6.40	11.6	50	43.6	AV	N	GND


FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

Applicable Standard


FCC §15.205; §15.209; §15.247(d)

EUT Setup

Below 1 GHz:

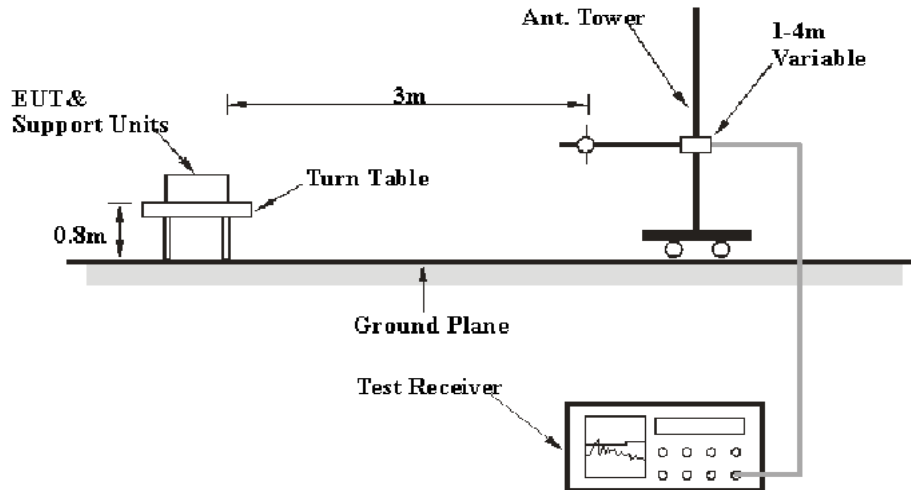

Above 1GHz:

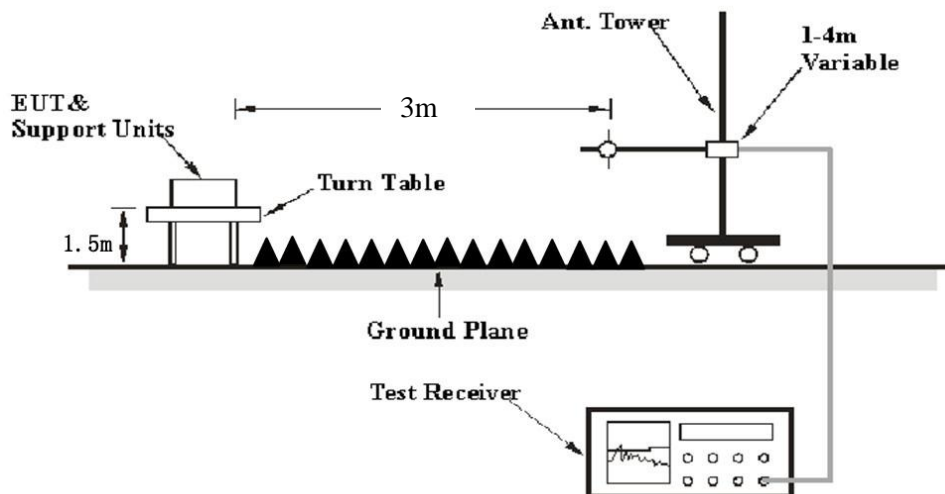

The radiated emission performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, according to the DA 00-705 Released March 30, 2000, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1 MHz	10 Hz	/	Average

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Factor & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Result} - \text{Limit}$$

Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	48 %
ATM Pressure:	101.0 kPa

The testing was performed by Ting on 2021-03-31.


EUT operation mode: Transmitting

30 MHz~18 GHz: (Scan with GFSK, $\pi/4$ -DQPSK mode, the worst case is $\pi/4$ -DQPSK Mode)


18~25GHz: The test values in the noise floor level, the test data were not recorded in the report.

Below 1GHz: $\pi/4$ -DQPSK Mode, Low channel

Horizontal

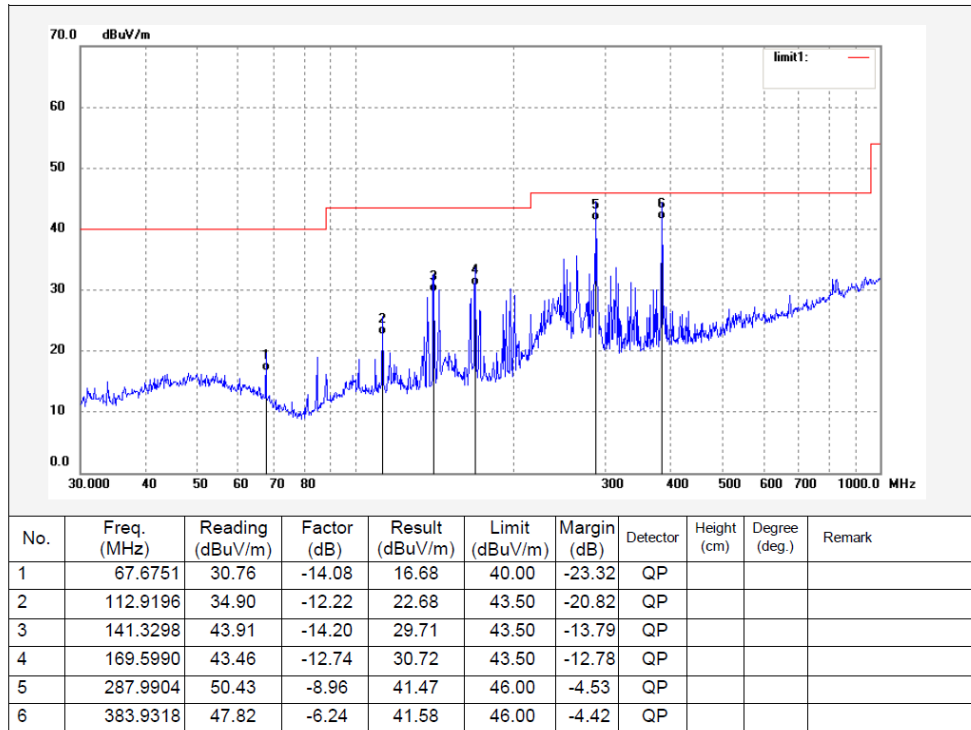


Vertical

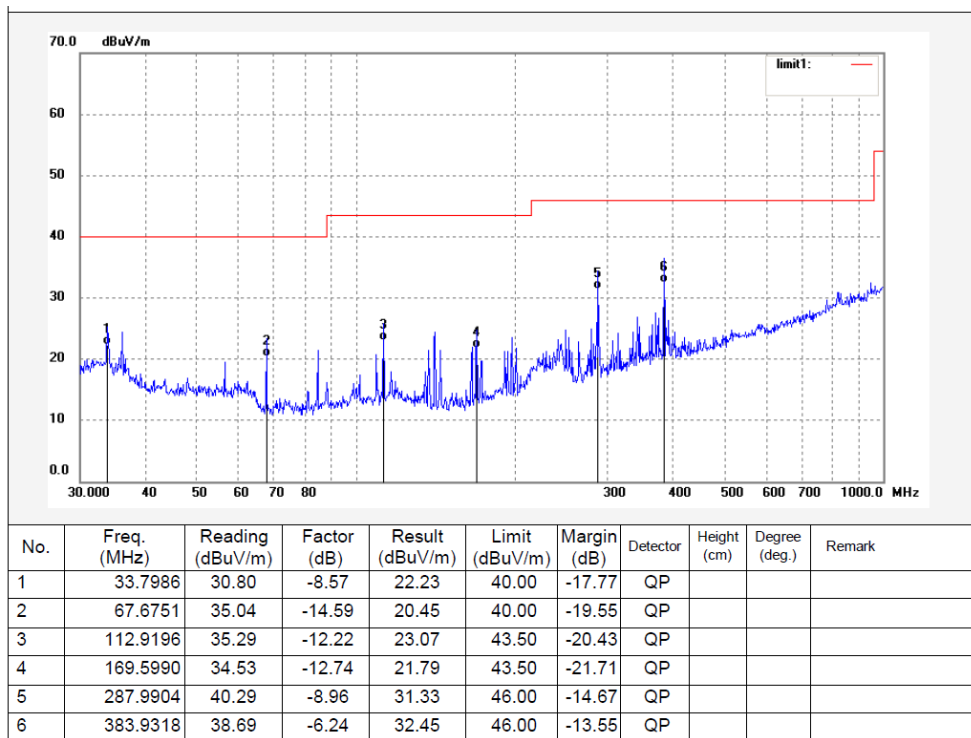


Middle channel

Horizontal

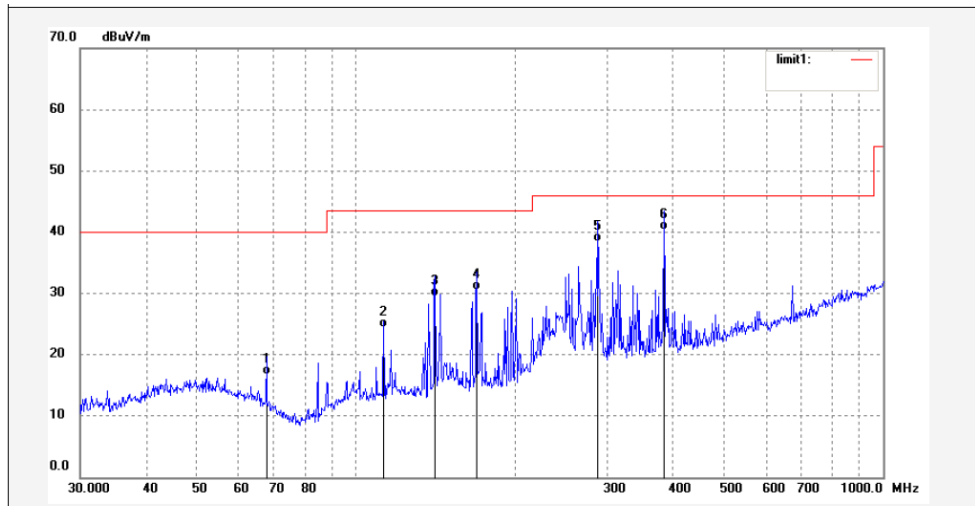


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	67.6751	30.78	-14.08	16.70	40.00	-23.30	QP			
2	112.9196	36.60	-12.22	24.38	43.50	-19.12	QP			
3	141.3298	43.67	-14.20	29.47	43.50	-14.03	QP			
4	169.5990	43.20	-12.74	30.46	43.50	-13.04	QP			
5	287.9904	47.42	-8.96	38.46	46.00	-7.54	QP			
6	383.9318	46.65	-6.24	40.41	46.00	-5.59	QP			

Vertical

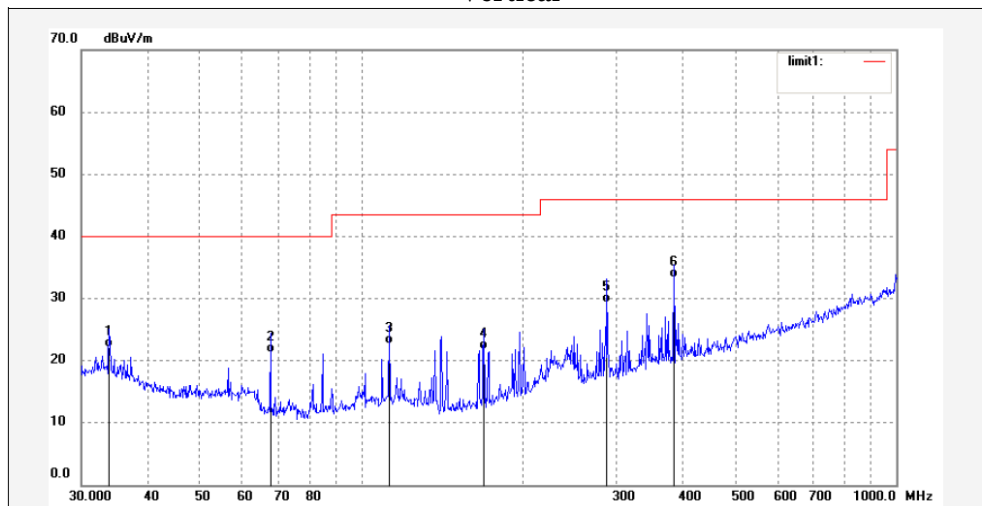


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	33.7986	30.70	-8.57	22.13	40.00	-17.87	QP			
2	67.6751	35.89	-14.59	21.30	40.00	-18.70	QP			
3	112.9196	34.88	-12.22	22.66	43.50	-20.84	QP			
4	169.5990	34.56	-12.74	21.82	43.50	-21.68	QP			
5	287.9904	38.29	-8.96	29.33	46.00	-16.67	QP			
6	383.9318	39.66	-6.24	33.42	46.00	-12.58	QP			

High channel Horizontal

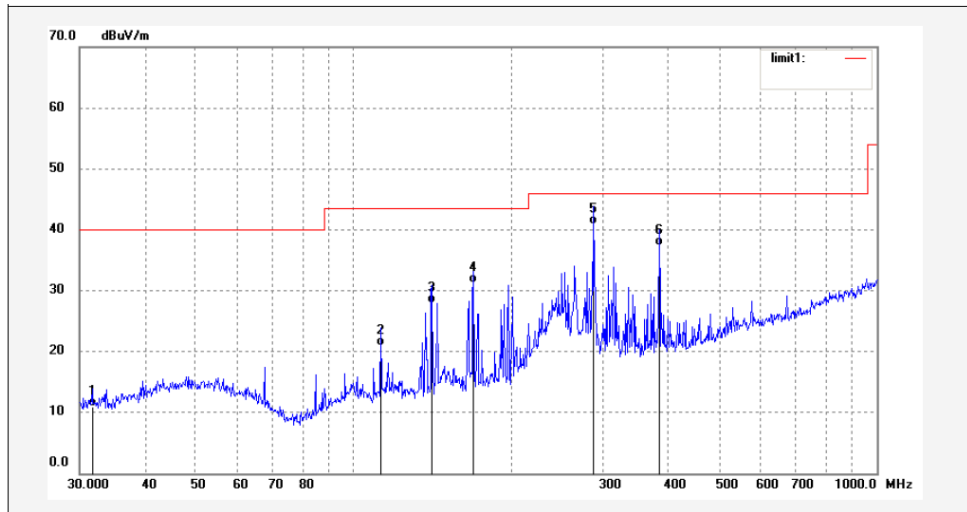

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	31.7313	24.90	-13.95	10.95	40.00	-29.05	QP			
2	112.9196	33.18	-12.22	20.96	43.50	-22.54	QP			
3	141.3298	42.14	-14.20	27.94	43.50	-15.56	QP			
4	169.5990	43.98	-12.74	31.24	43.50	-12.26	QP			
5	287.9904	49.82	-8.96	40.86	46.00	-5.14	QP			
6	383.9318	43.63	-6.24	37.39	46.00	-8.61	QP			

Vertical

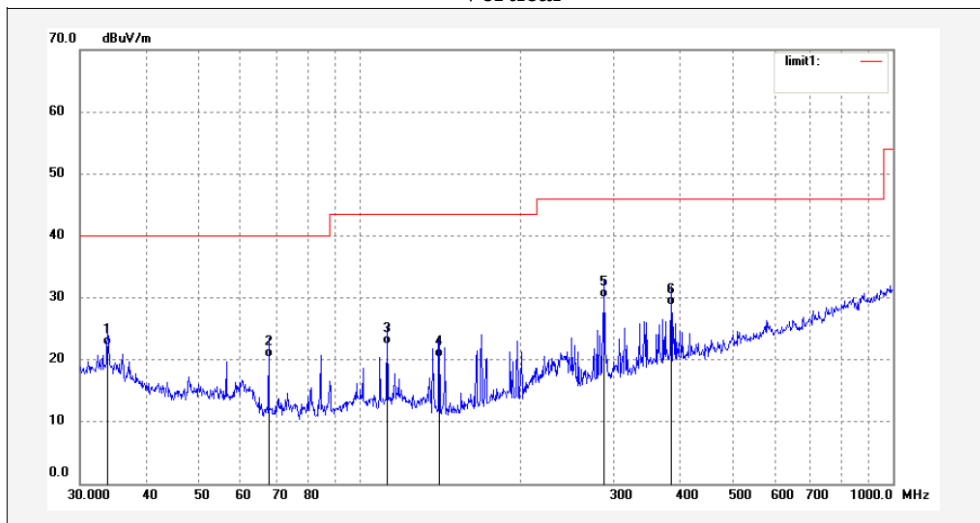


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	33.7986	30.81	-8.57	22.24	40.00	-17.76	QP			
2	67.6751	35.06	-14.59	20.47	40.00	-19.53	QP			
3	112.9196	34.76	-12.22	22.54	43.50	-20.96	QP			
4	141.3298	34.56	-14.20	20.36	43.50	-23.14	QP			
5	287.9904	38.91	-8.96	29.95	46.00	-16.05	QP			
6	383.9318	35.10	-6.24	28.86	46.00	-17.14	QP			

Above 1GHz:


1 GHz - 18 GHz: (Scan with GFSK, $\pi/4$ -DQPSK mode, the worst case is in $\pi/4$ -DQPSK Mode)

Low Channel

Horizontal

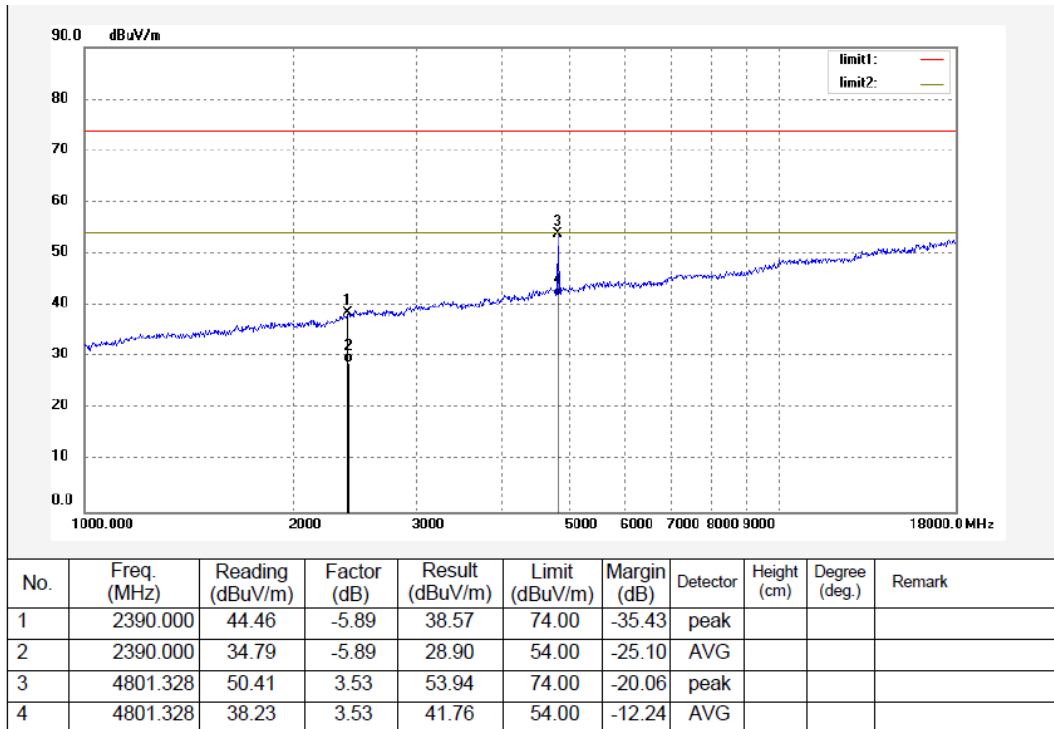


Vertical

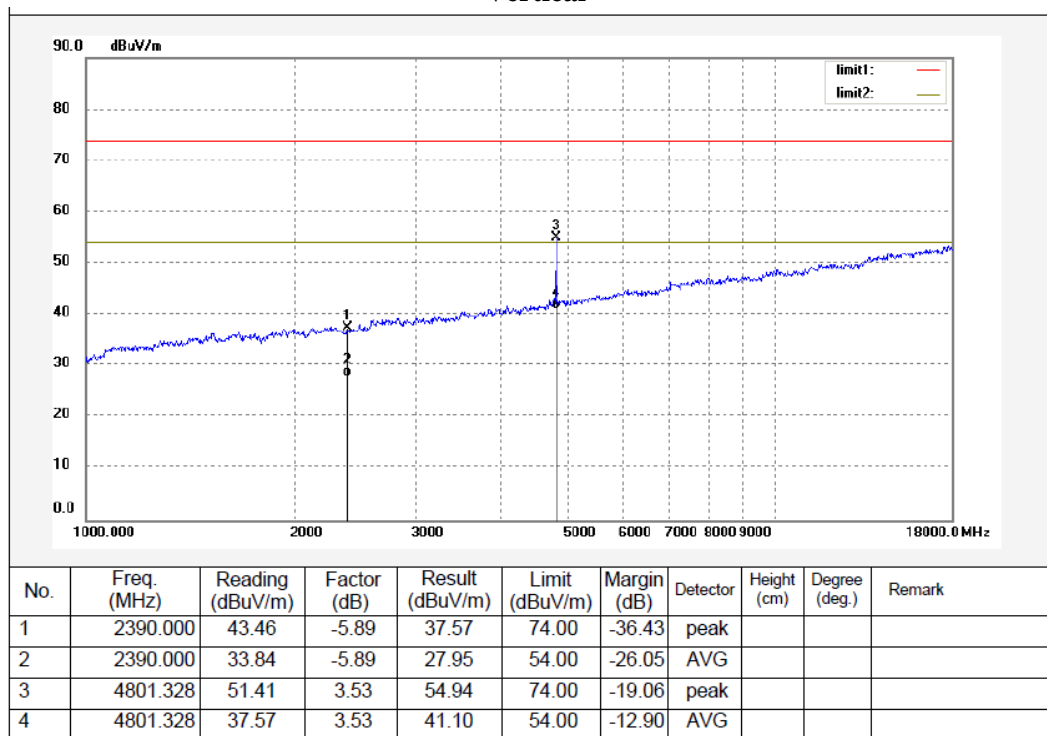


Middle Channel

Horizontal

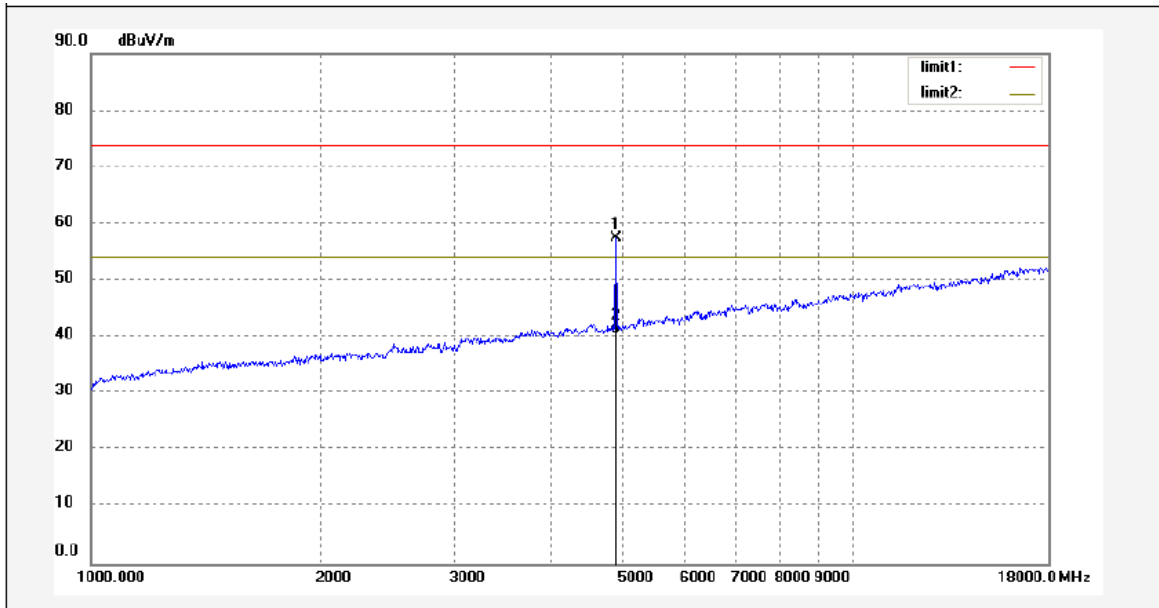

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	4882.917	53.13	4.30	57.43	74.00	-16.57	peak			
2	4882.917	36.25	4.30	40.55	54.00	-13.45	AVG			


Vertical

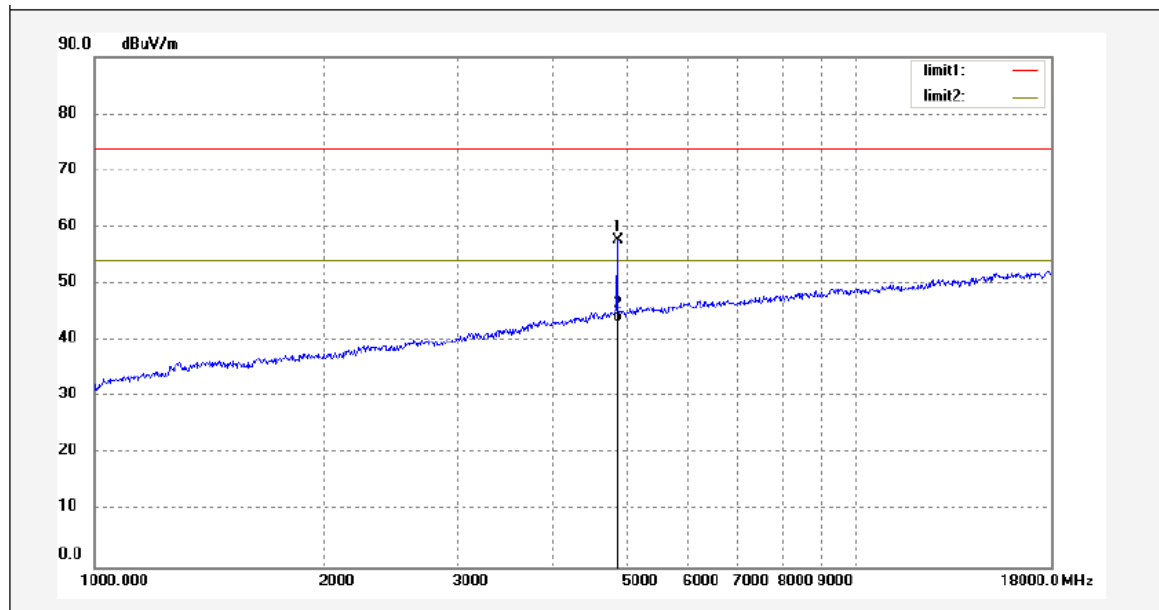

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	4882.557	53.34	4.29	57.63	74.00	-16.37	peak			
2	4882.557	38.95	4.29	43.24	54.00	-10.76	AVG			


High Channel

Horizontal

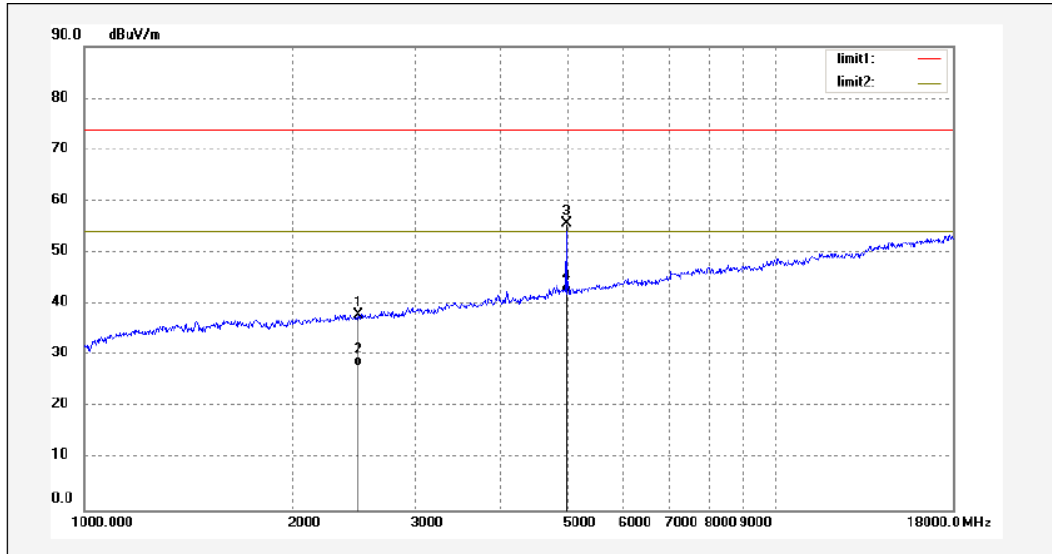

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.000	43.44	-5.51	37.93	74.00	-36.07	peak			
2	2483.000	33.51	-5.51	28.00	54.00	-26.00	AVG			
3	4960.000	50.87	4.79	55.66	74.00	-18.34	peak			
4	4960.000	37.36	4.79	42.15	54.00	-11.85	AVG			

Vertical

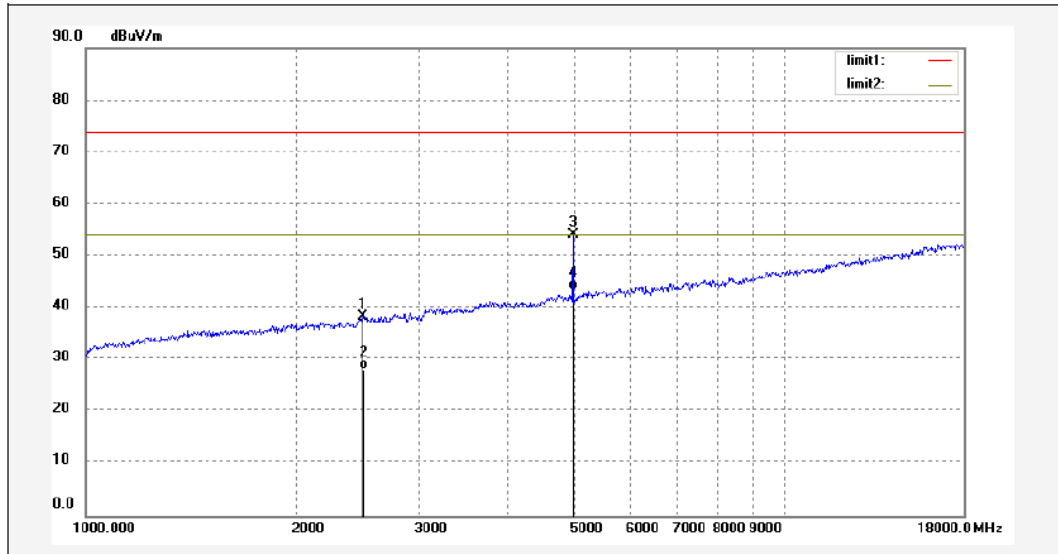

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.000	43.94	-5.51	38.43	74.00	-35.57	peak			
2	2483.000	33.85	-5.51	28.34	54.00	-25.66	AVG			
3	4960.000	49.39	4.79	54.18	74.00	-19.82	peak			
4	4960.000	38.78	4.79	43.57	54.00	-10.43	AVG			

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	48 %
ATM Pressure:	101.0 kPa

The testing was performed by Ting on 2021-03-20


EUT operation mode: Transmitting

Test Result: Compliant.


Test Mode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
DH1	Ant1	Hop	1.003	>=0.588	PASS
2DH1	Ant1	Hop	1.000	>=0.824	PASS

Please refer to the below plots:

DH1_Ant1_Hop

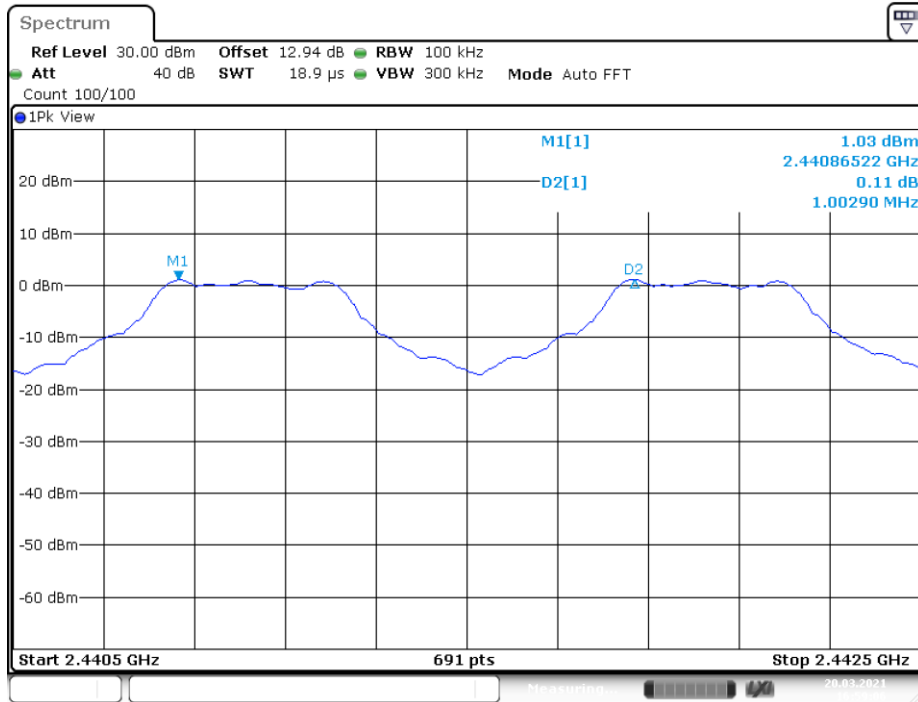

2DH1_Ant1_Hop

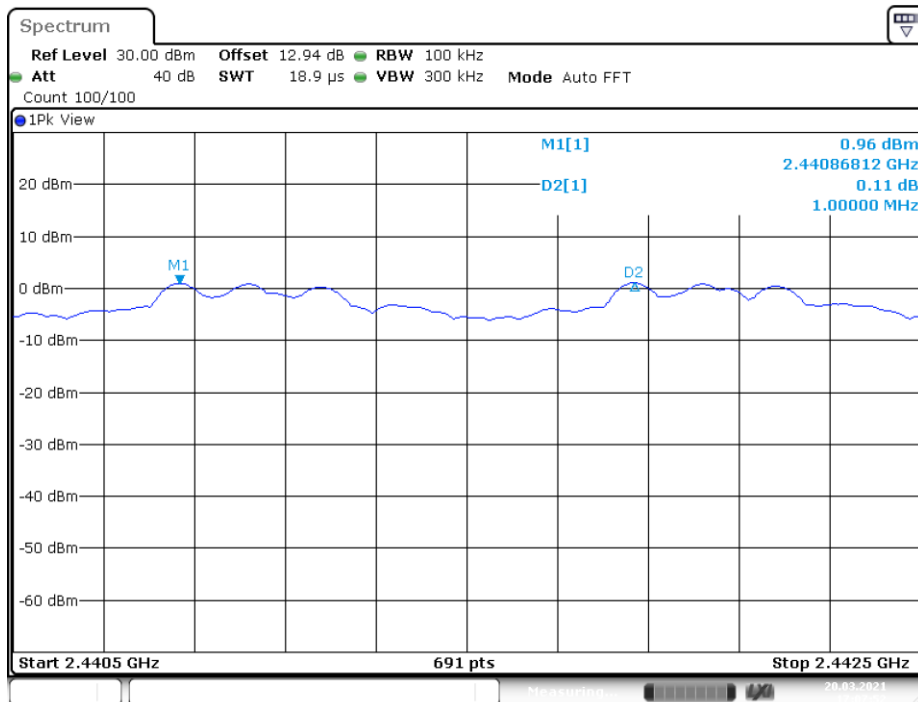

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


Test Procedure

The following conditions shall be observed for measuring the occupied bandwidth and 20 dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / 20 dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / 20 dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).



Test Data**Environmental Conditions**

Temperature:	24 °C
Relative Humidity:	48 %
ATM Pressure:	101.0 kPa

The testing was performed by Ting on 2021-03-20.

EUT operation mode: Transmitting

Test Result: Compliant.


Test Mode	Antenna	Channel	20db EBW[MHz]	Limit[MHz]	Verdict
DH1	Ant1	2402	0.882	---	PASS
		2441	0.882	---	PASS
		2480	0.882	---	PASS
2DH1	Ant1	2402	1.233	---	PASS
		2441	1.236	---	PASS
		2480	1.257	---	PASS

Test Mode	Antenna	Channel	99% Occupied Bandwidth [MHz]	Limit[MHz]	Verdict
DH1	Ant1	2402	0.857	---	PASS
		2441	0.851	---	PASS
		2480	0.851	---	PASS
2DH1	Ant1	2402	1.178	---	PASS
		2441	1.181	---	PASS
		2480	1.187	---	PASS

Please refer to the below plots:


20 dB EMISSION BANDWIDTH

DH1_Ant1_2402MHz

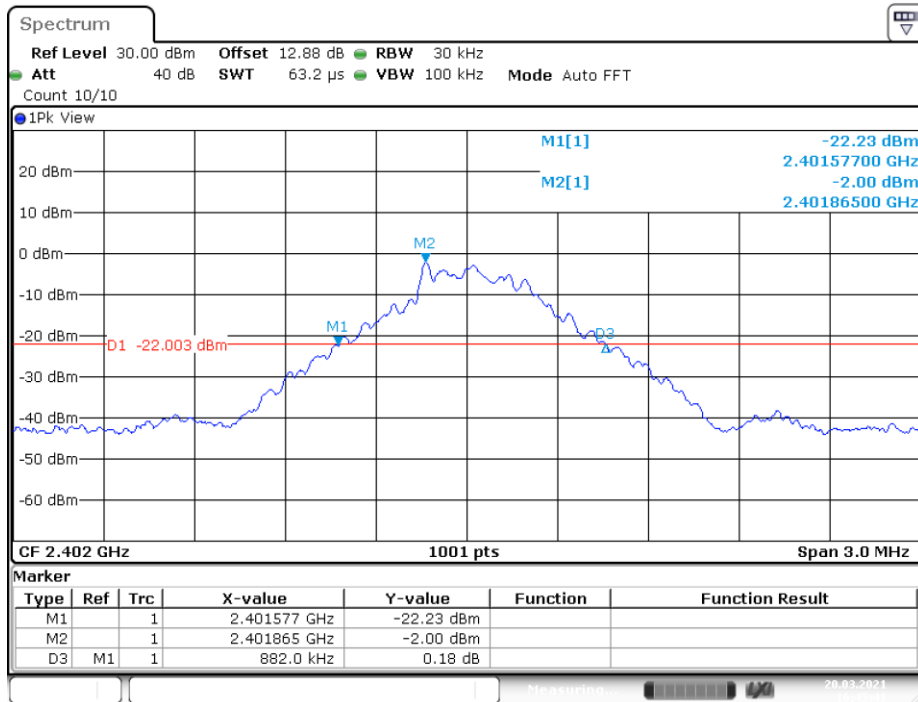


Date: 20.MAR.2021 16:45:41

DH1_Ant1_2441MHz

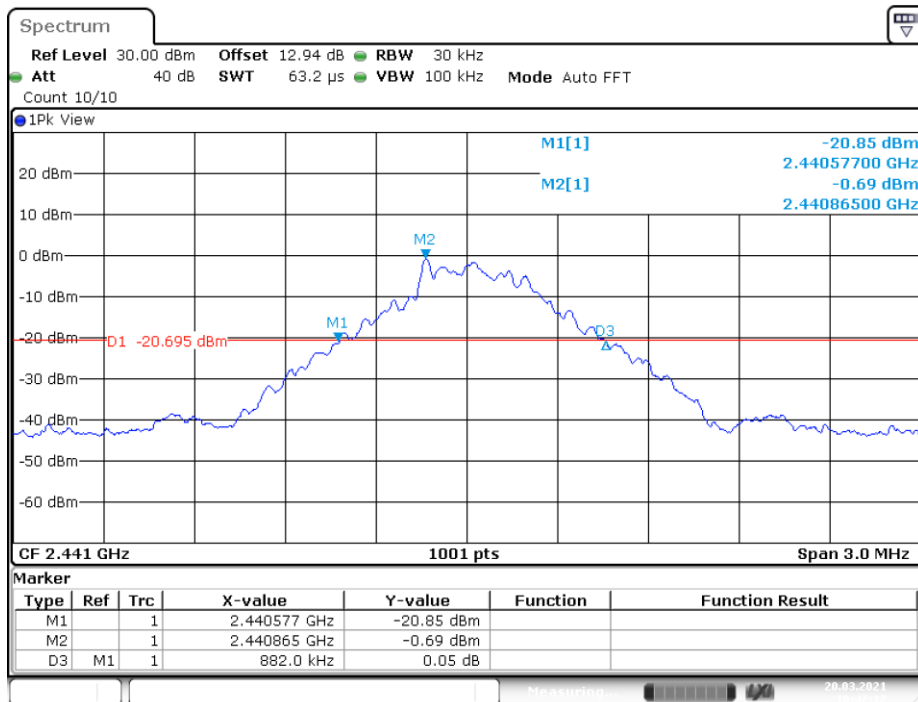


Date: 20.MAR.2021 16:47:12


DH1_Ant1_2480MHz

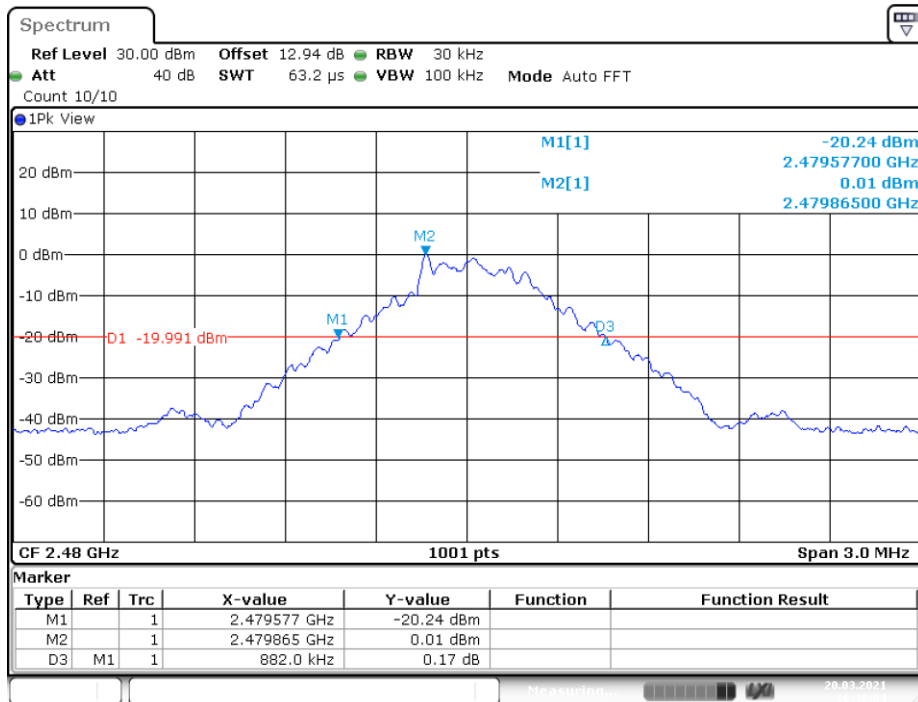

2DH1_Ant1_2402MHz

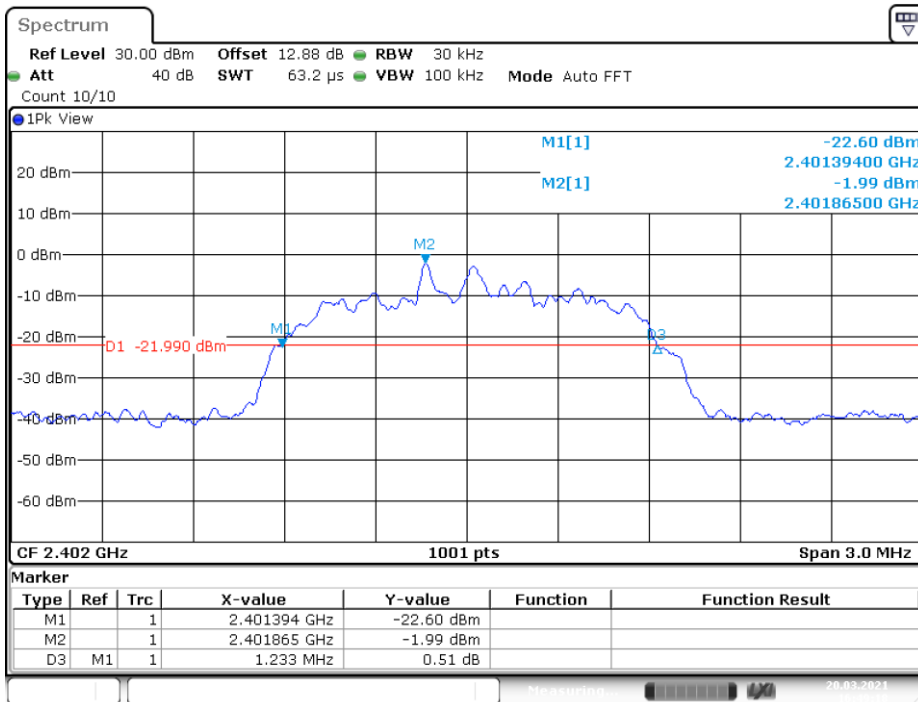


2DH1_Ant1_2441MHz

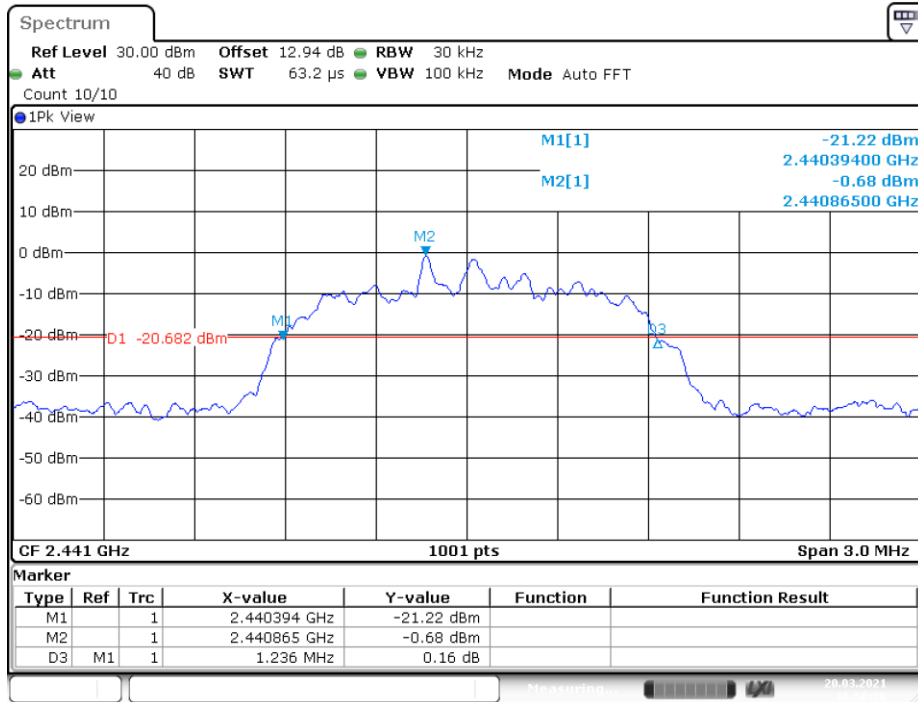

Date: 20.MAR.2021 16:50:36


2DH1_Ant1_2480MHz

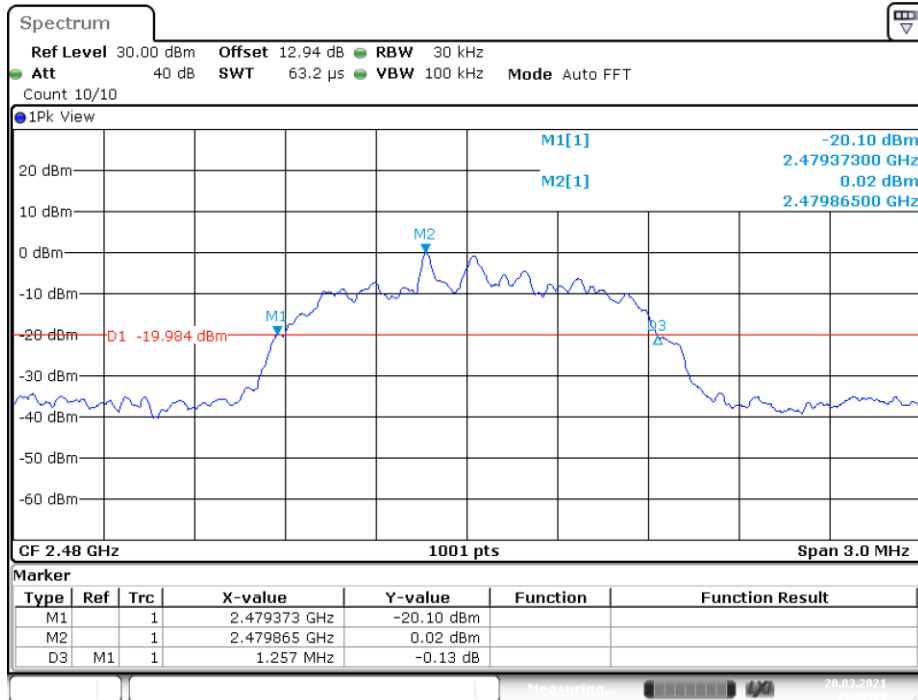


Date: 20.MAR.2021 16:51:24

99% OCCUPIED BANDWIDTH


DH1_Ant1_2402MHz

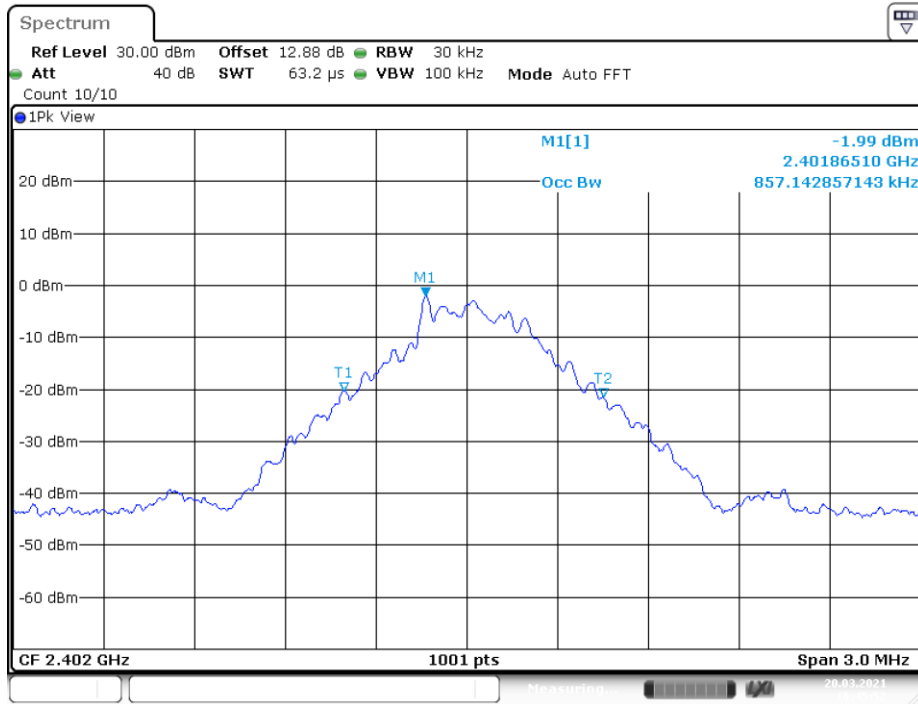

DH1_Ant1_2441MHz

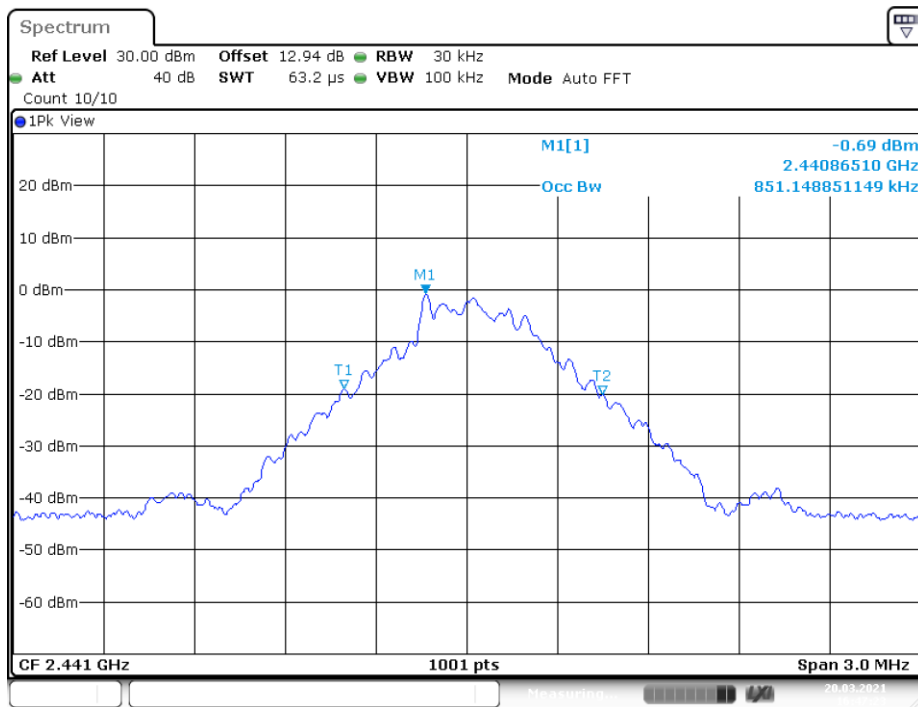


DH1_Ant1_2480MHz

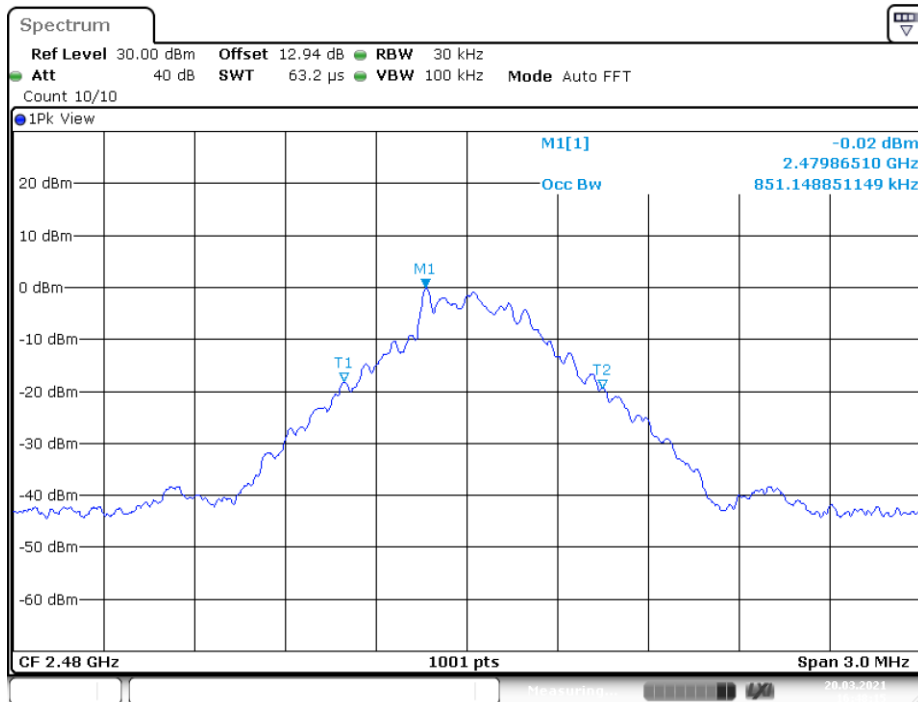


Date: 20.MAR.2021 16:48:14

2DH1_Ant1_2402MHz

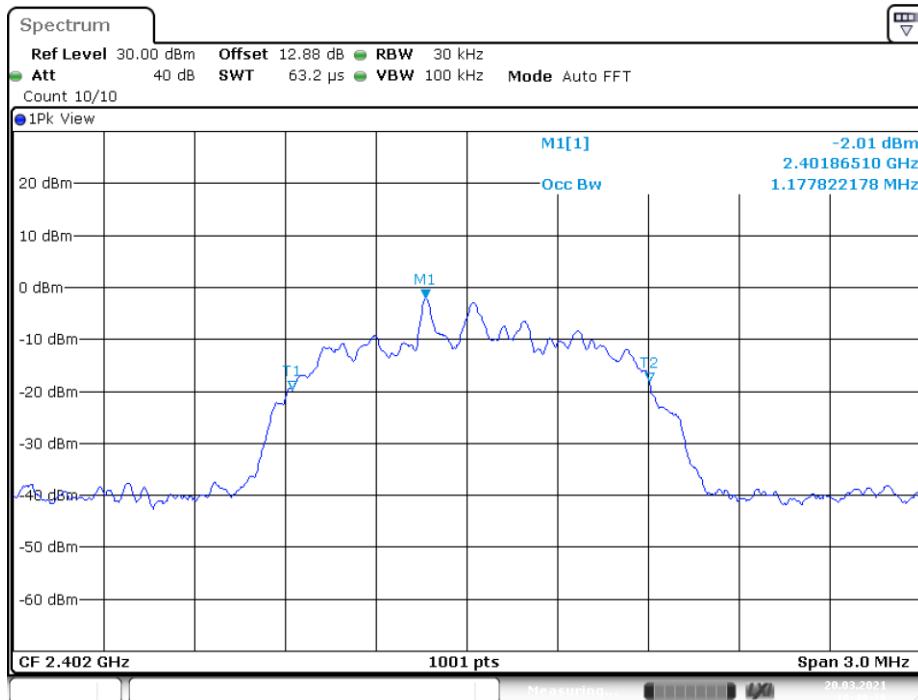


Date: 20.MAR.2021 16:49:29

2DH1_Ant1_2441MHz

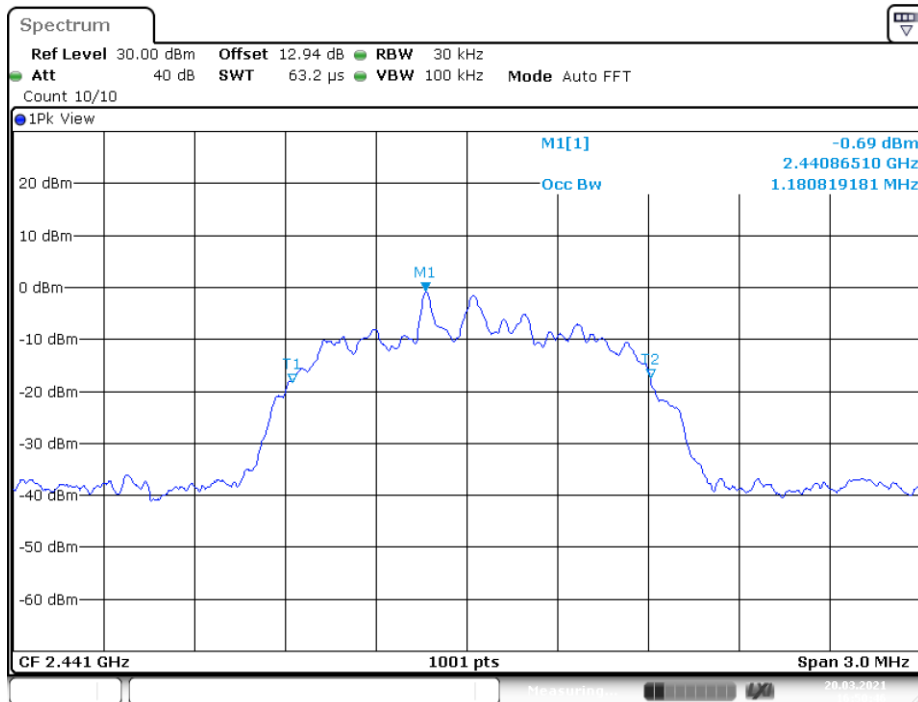

2DH1_Ant1_2480MHz

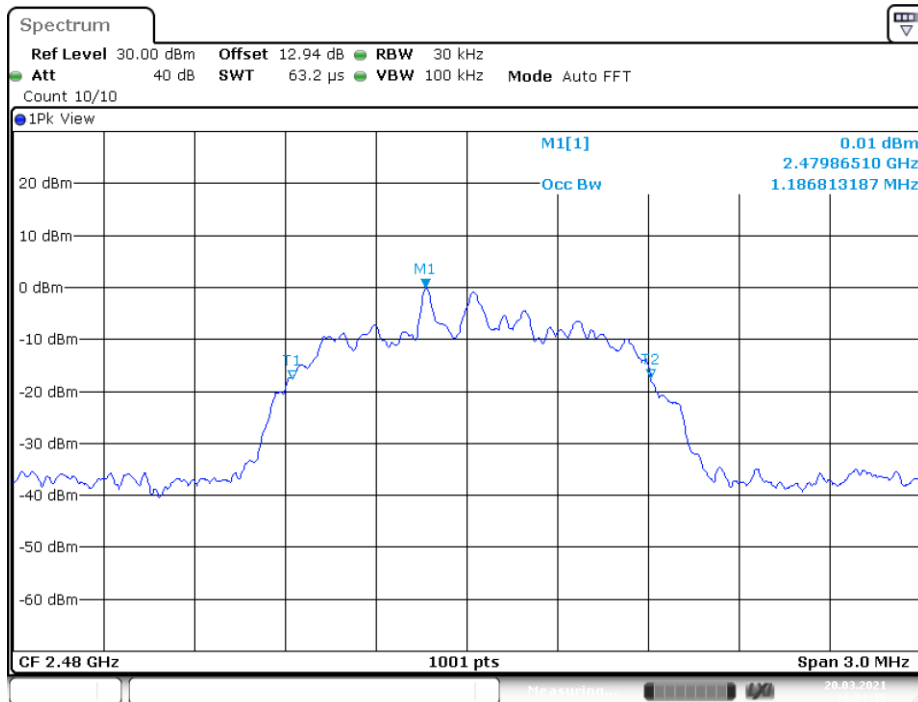

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	48 %
ATM Pressure:	101.0 kPa


The testing was performed by Ting on 2021-03-20.

EUT operation mode: Transmitting

Test Result: Compliant.


TestMode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
DH1	Ant1	Hop	79	>=15	PASS
2DH1	Ant1	Hop	79	>=15	PASS

DH1_Ant1_Hop

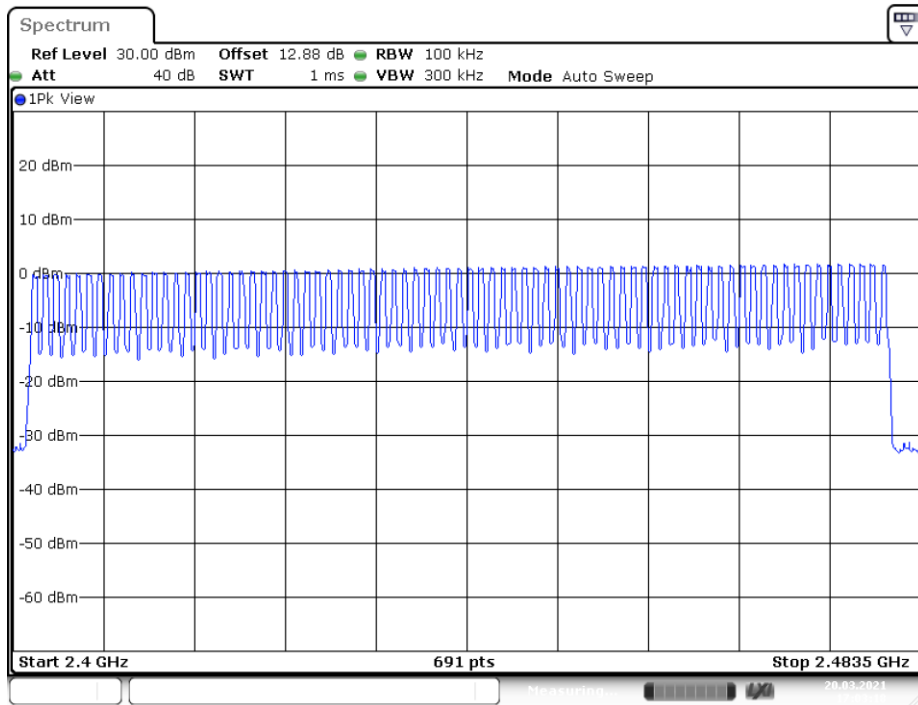

Date: 20.MAR.2021 17:03:18

2DH1_Ant1_Hop

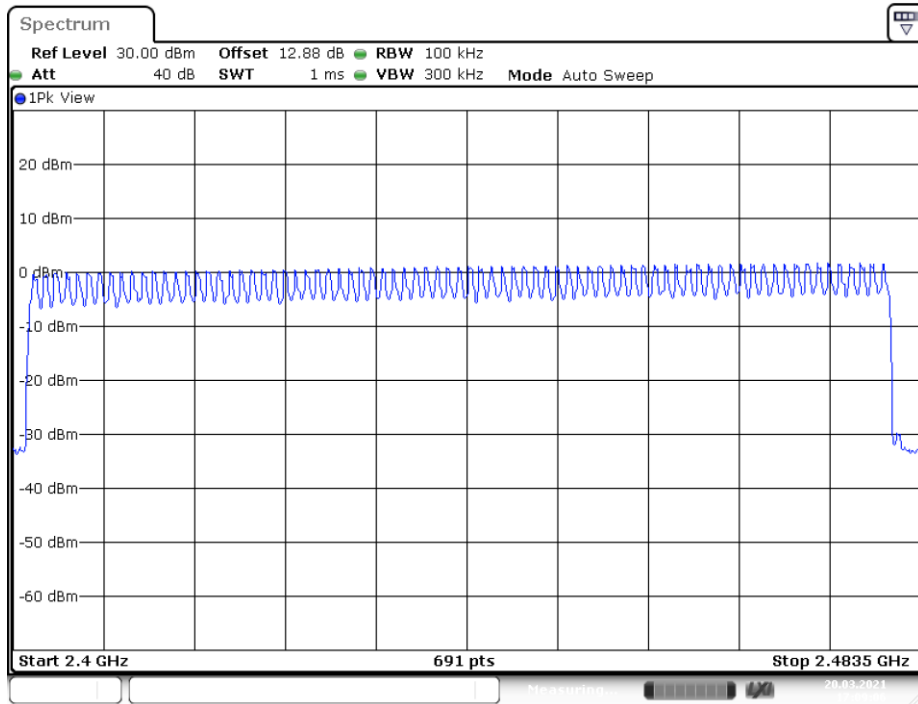

Date: 20.MAR.2021 17:09:06

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. The EUT was worked in channel hopping.
2. Set the RBW to: 1MHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to 0Hz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Recorded the time of single pulses

Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	48 %
ATM Pressure:	101.0 kPa

The testing was performed by Ting on 2021-03-20.

EUT operation mode: Transmitting

Test Result: Compliant.


Test Mode	Antenna	Channel	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.37	330	0.123	≤ 0.4	PASS
DH3	Ant1	Hop	1.62	90	0.146	≤ 0.4	PASS
DH5	Ant1	Hop	2.89	60	0.173	≤ 0.4	PASS
2DH1	Ant1	Hop	0.38	330	0.126	≤ 0.4	PASS
2DH3	Ant1	Hop	1.63	110	0.179	≤ 0.4	PASS
2DH5	Ant1	Hop	2.87	70	0.201	≤ 0.4	PASS

Note 1: A period time = $0.4 \times 79 = 31.6(S)$, Result = Burst Width * Total Hops


Note 2: Total Hops = Hopping Number in $3.16s \times 10$

Note 3: Hopping Number in $3.16s$ = Total of highest signals in $3.16s$ (Second high signals were other channel)

DH1_Ant1_Hop


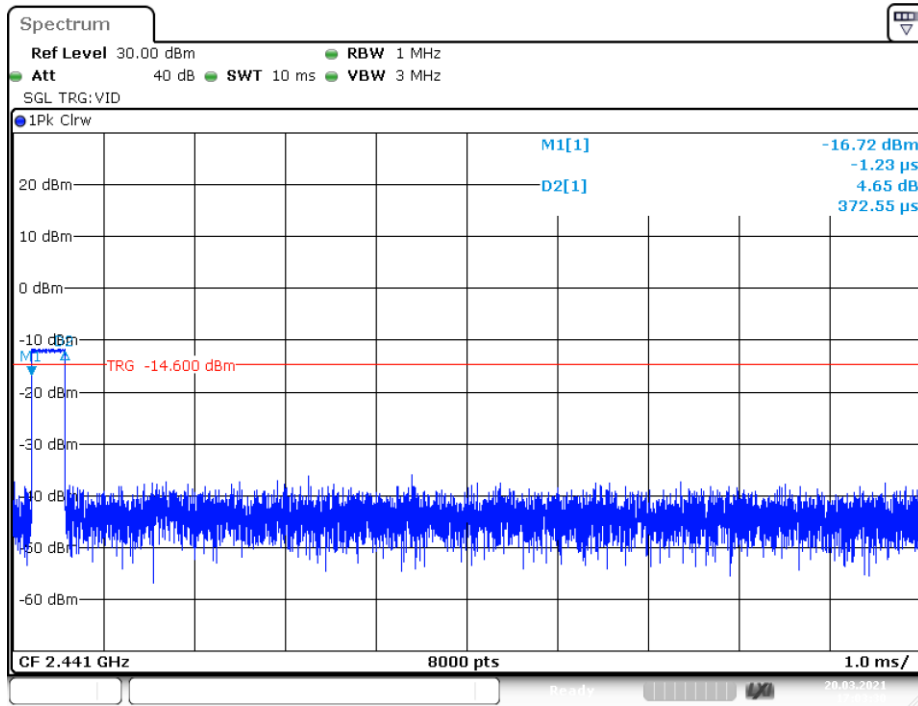


Date: 20.MAR.2021 17:03:30

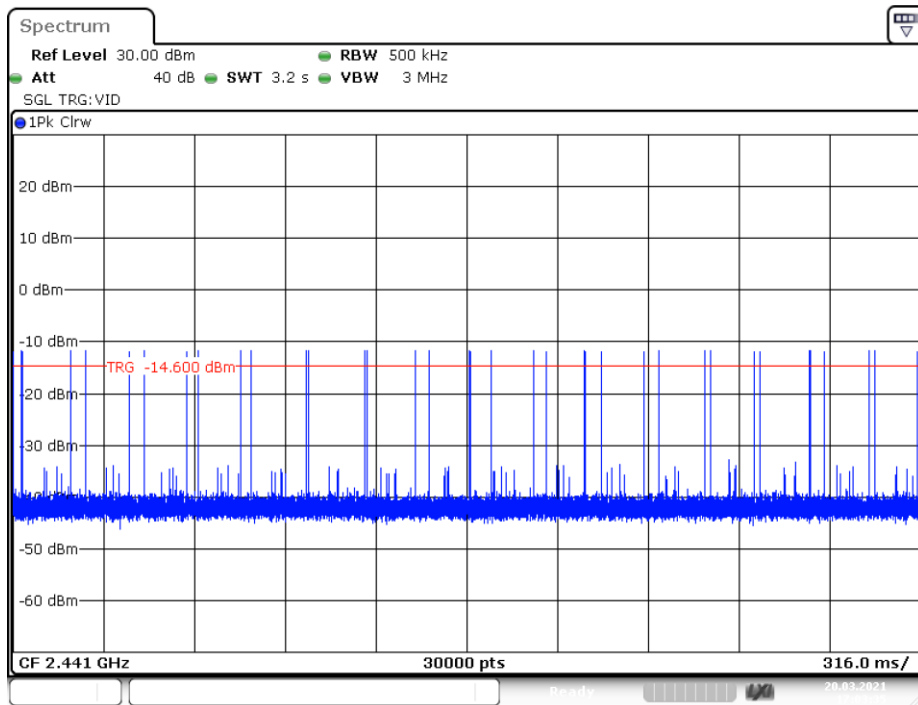


Date: 20.MAR.2021 17:03:35


DH3_Ant1_Hop

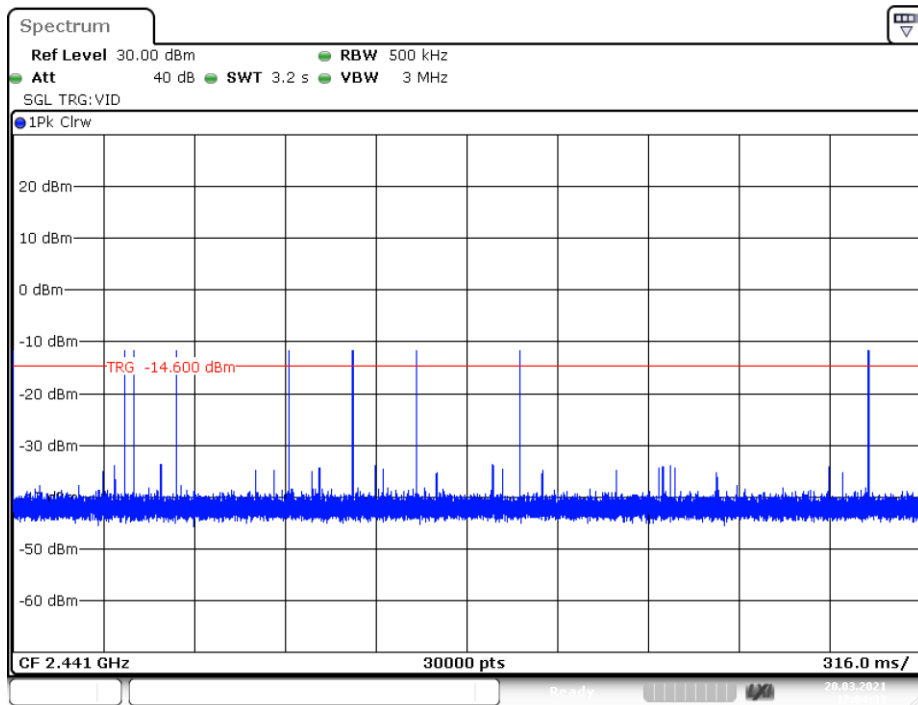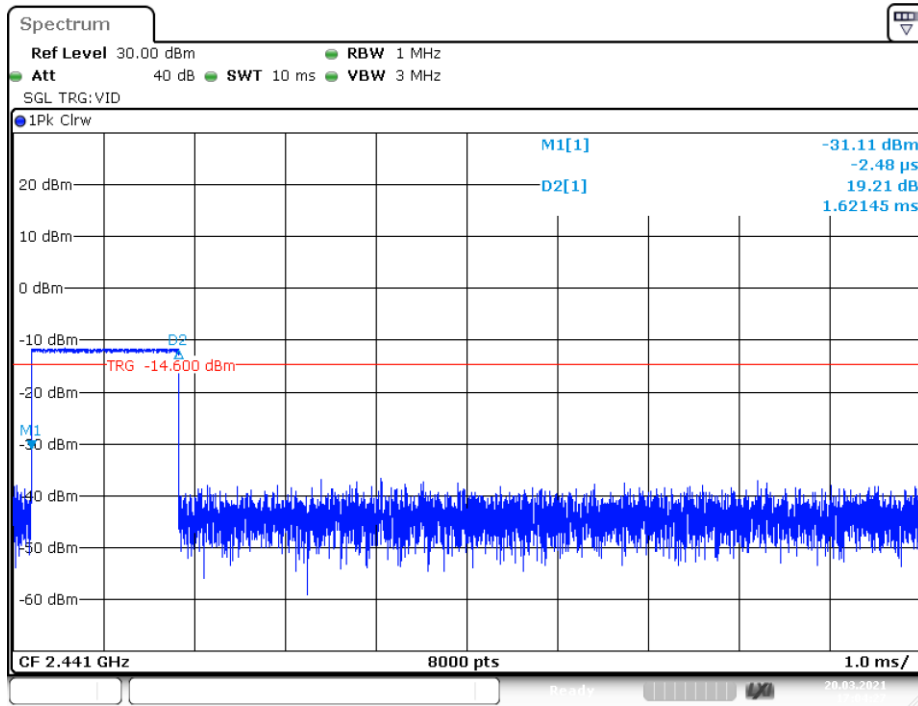

DH5_Ant1_Hop

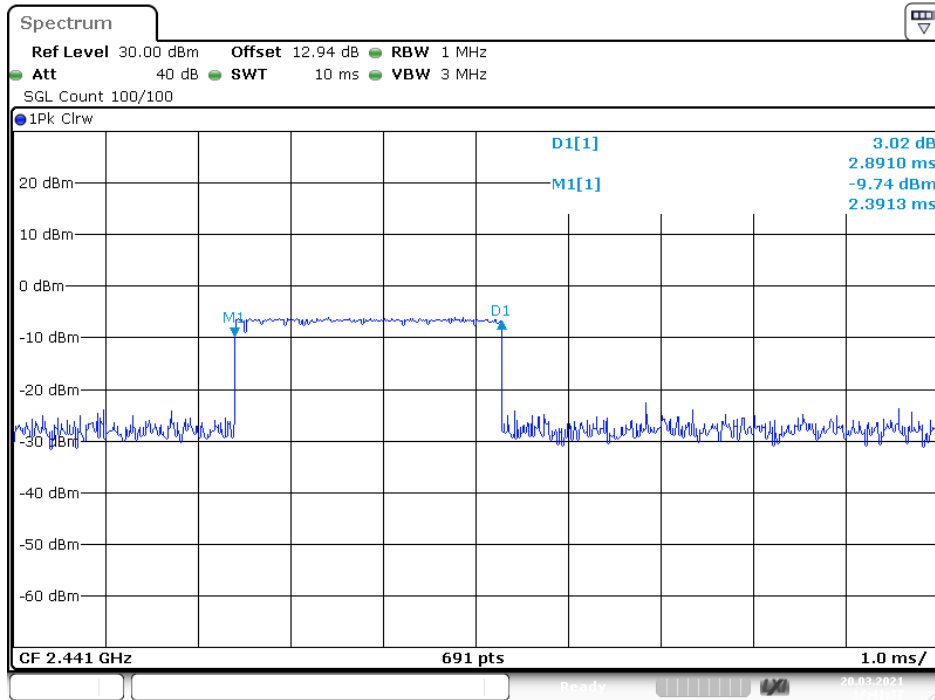


Date: 20.MAR.2021 17:41:36

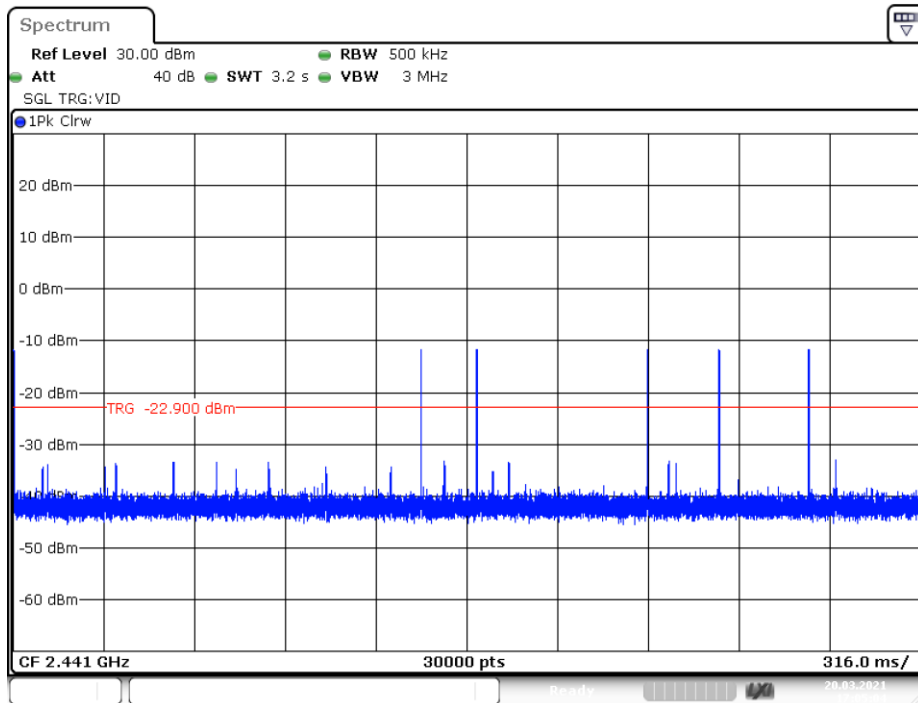


Date: 20.MAR.2021 17:05:04

2DH1_Ant1_Hop

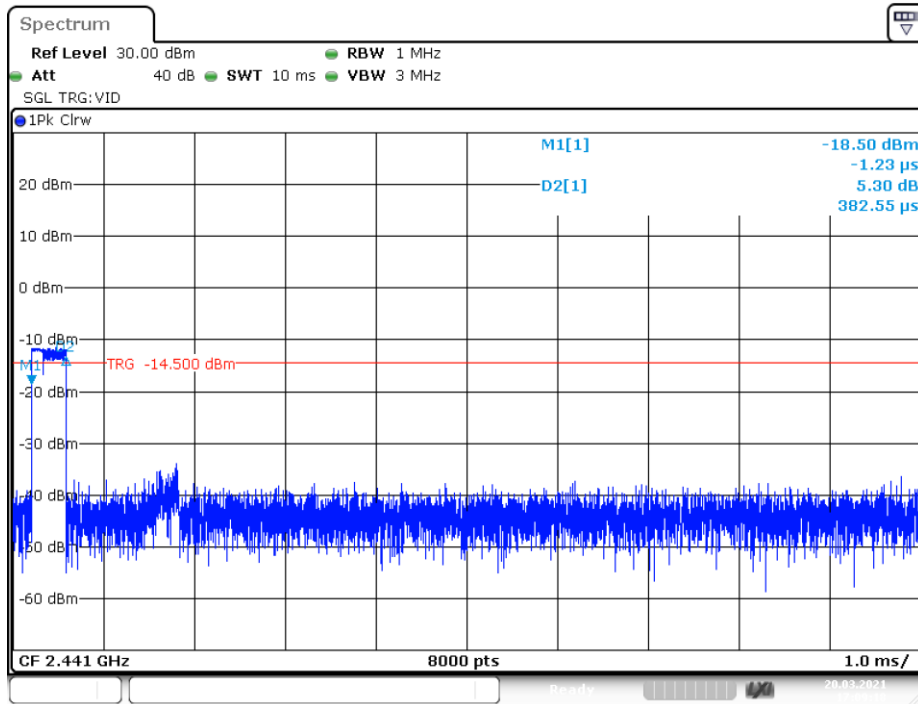


Date: 20.MAR.2021 17:09:18

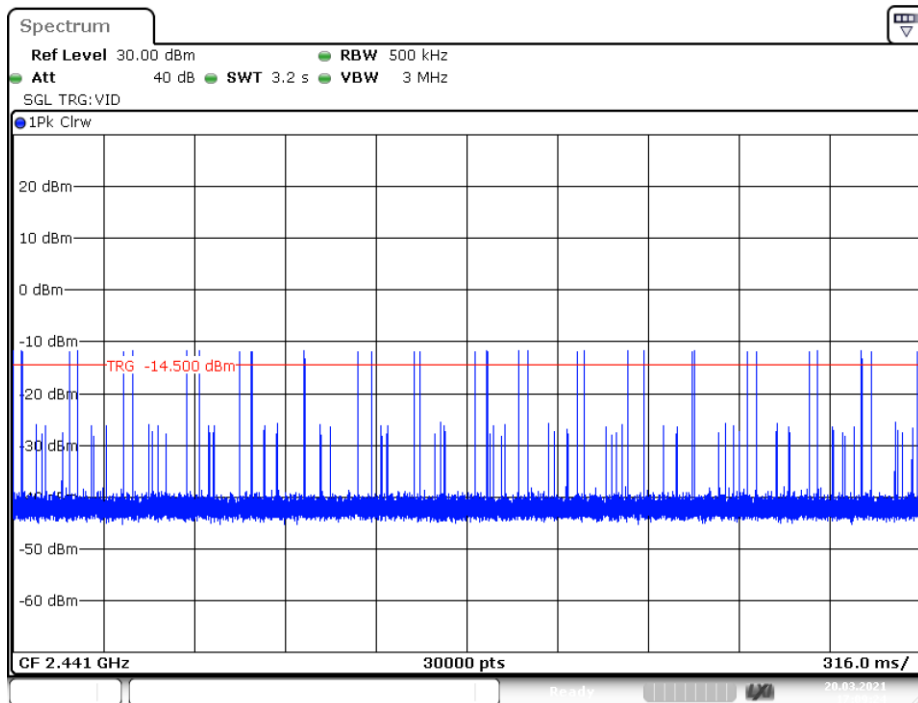


Date: 20.MAR.2021 17:09:23

2DH3_Ant1_Hop

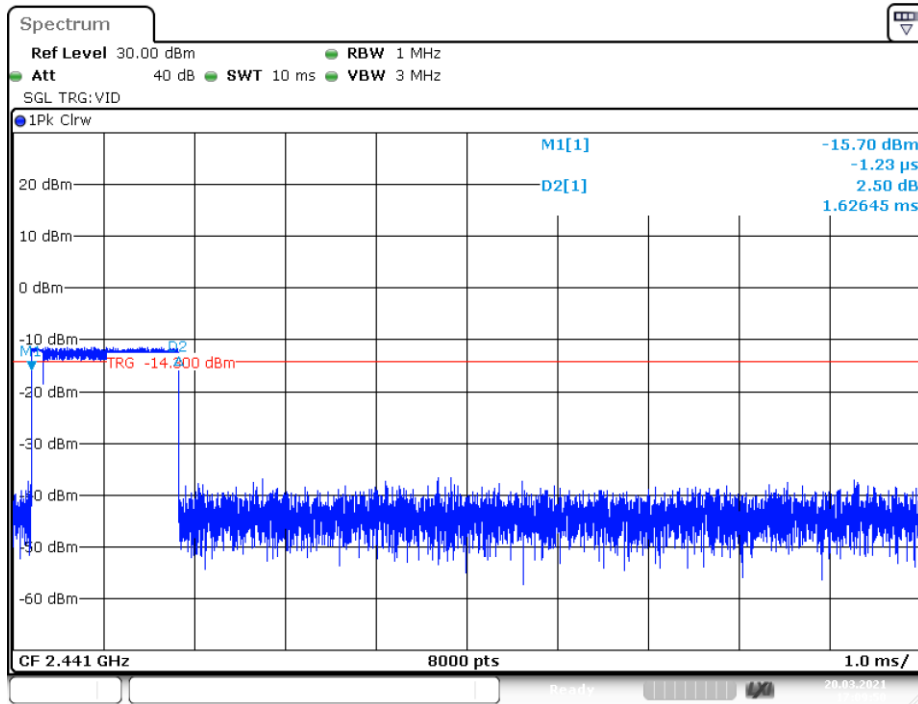


Date: 20.MAR.2021 17:09:50

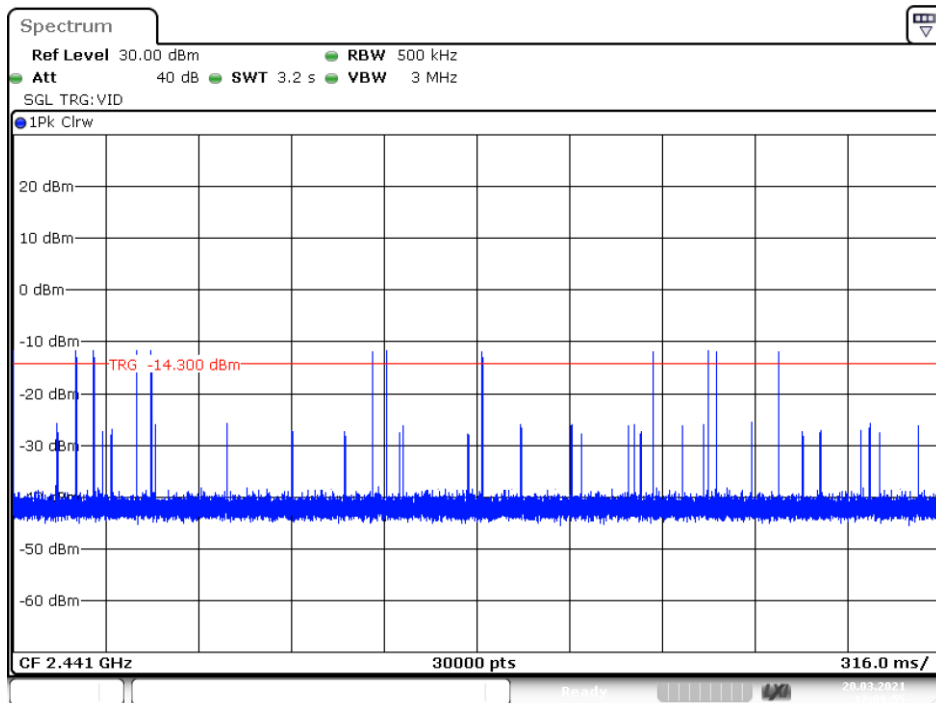


Date: 20.MAR.2021 17:09:55

2DH5_Ant1_Hop

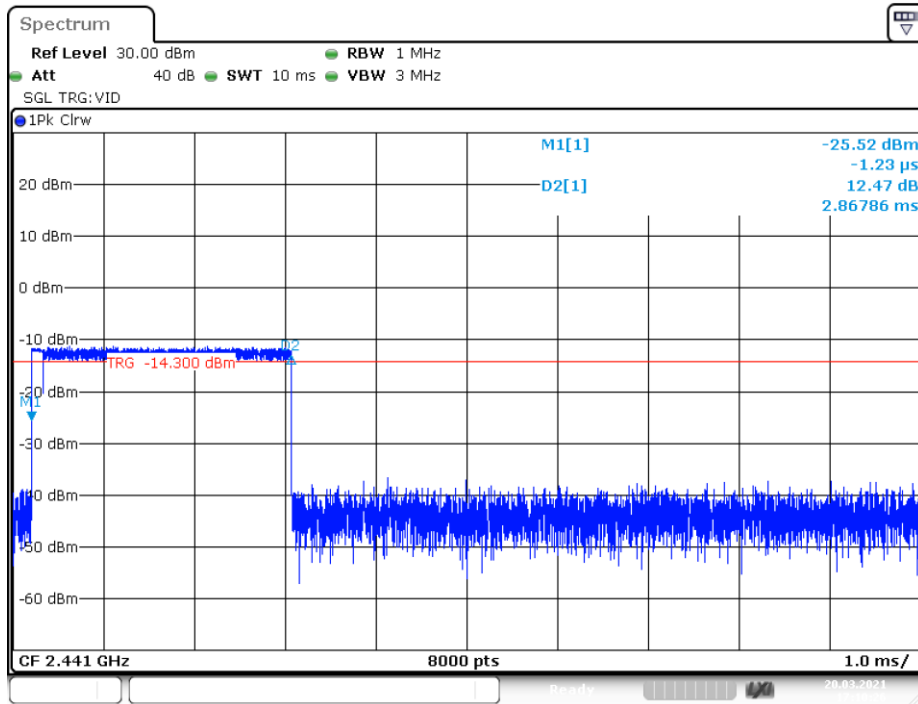

Date: 20.MAR.2021 17:10:26

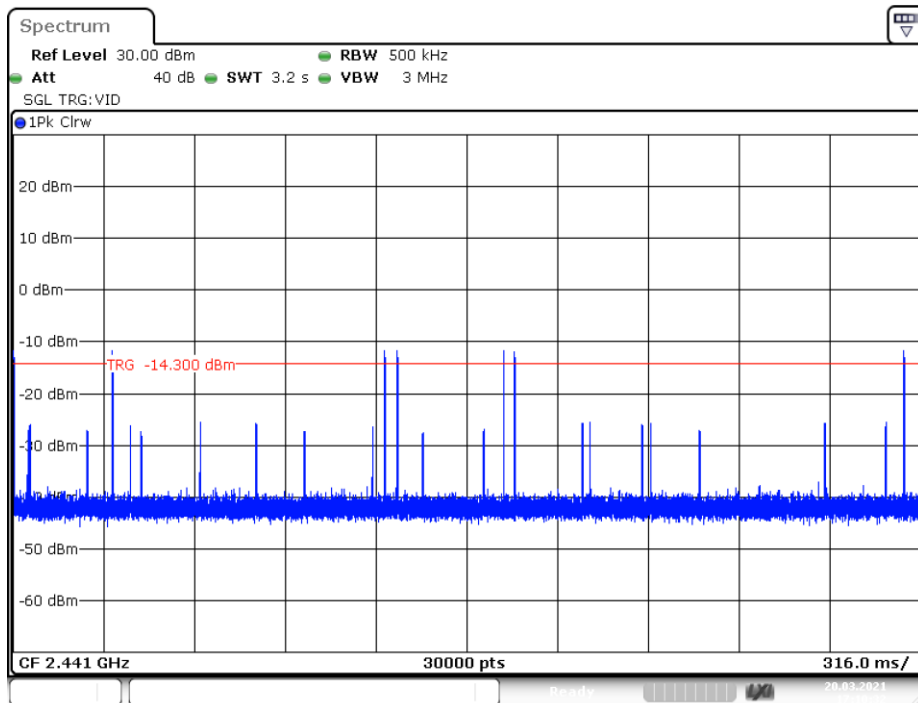

Date: 20.MAR.2021 17:10:31

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Data

Environmental Conditions

Temperature:	24°C
Relative Humidity:	48 %
ATM Pressure:	101.0 kPa


The testing was performed by Ting on 2021-03-20.

EUT operation mode: Transmitting


Test Result: Compliant.

Test Mode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
DH1	Ant1	2402	0.39	<=20.97	PASS
		2441	1.63	<=20.97	PASS
		2480	2.28	<=20.97	PASS
2DH1	Ant1	2402	0.89	<=20.97	PASS
		2441	2.23	<=20.97	PASS
		2480	2.72	<=20.97	PASS


DH1_Ant1_2402MHz

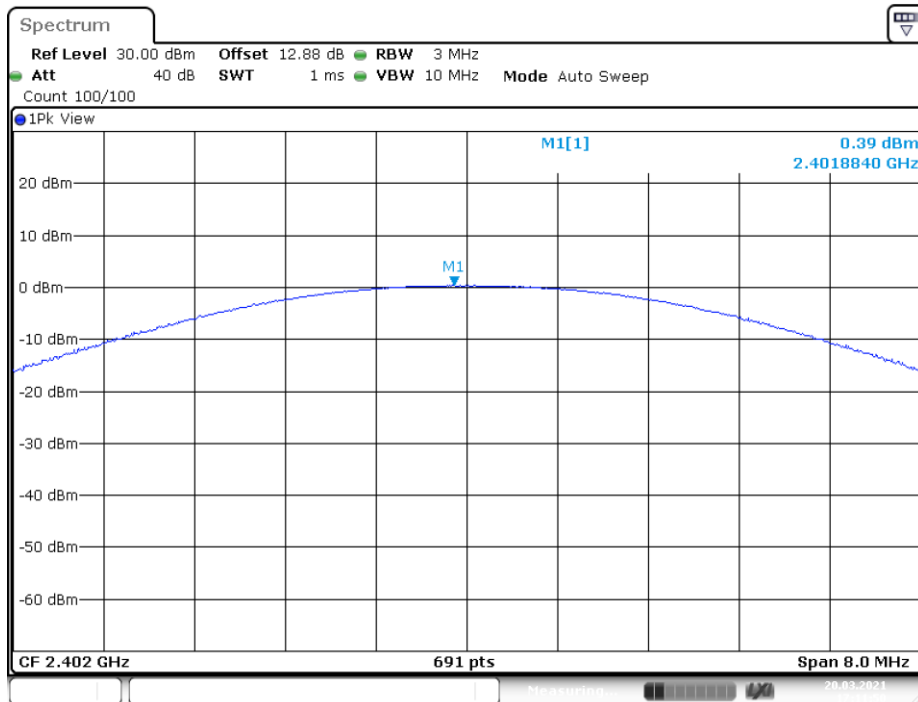

DH1_Ant1_2441MHz

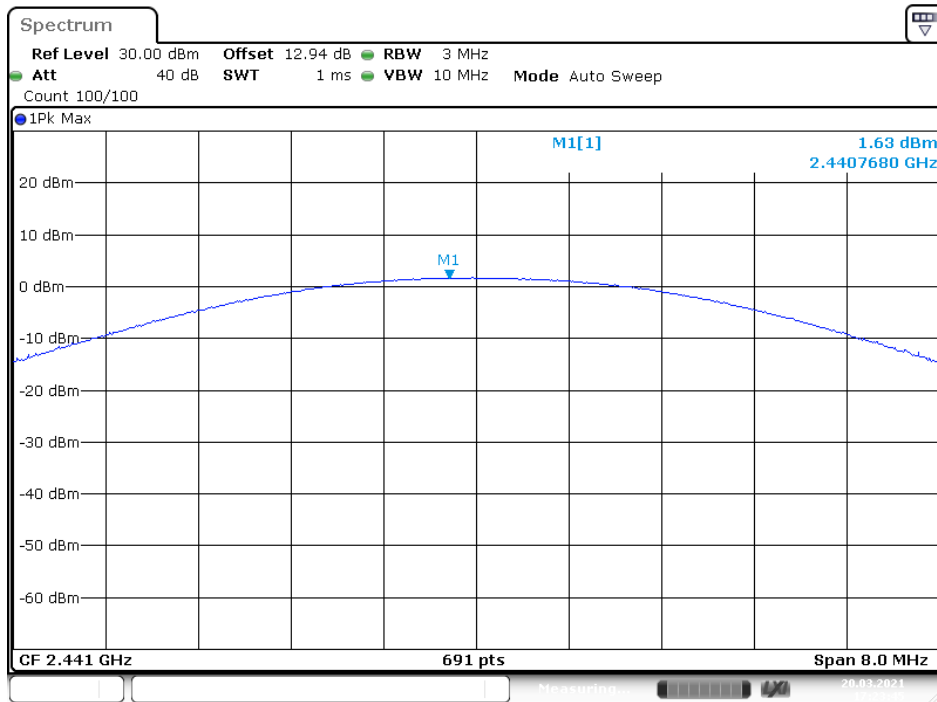


DH1_Ant1_2480MHz

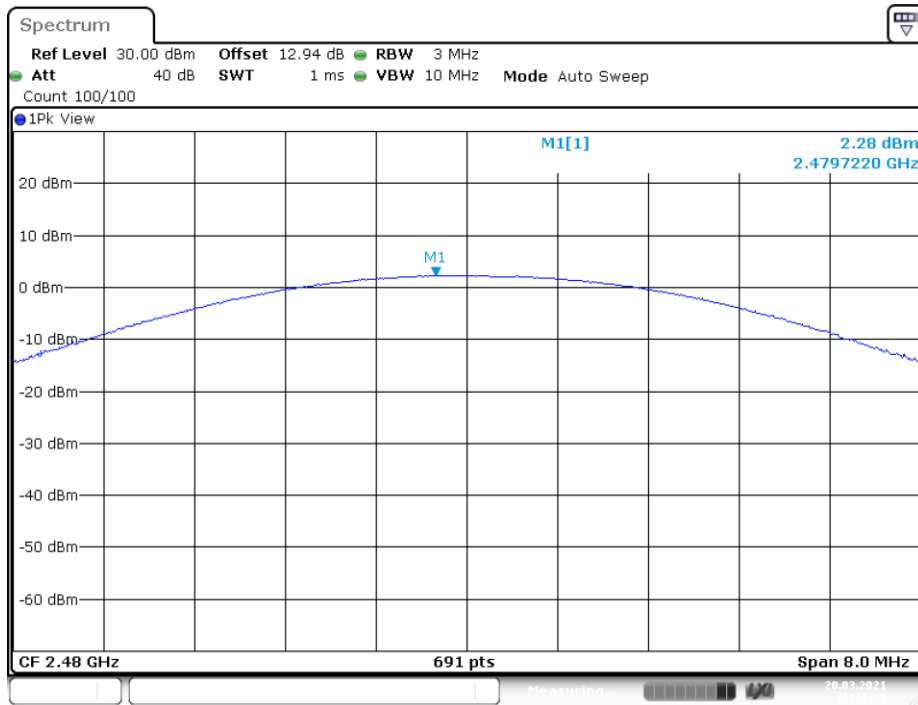


Date: 20.MAR.2021 17:12:39

2DH1_Ant1_2402MHz

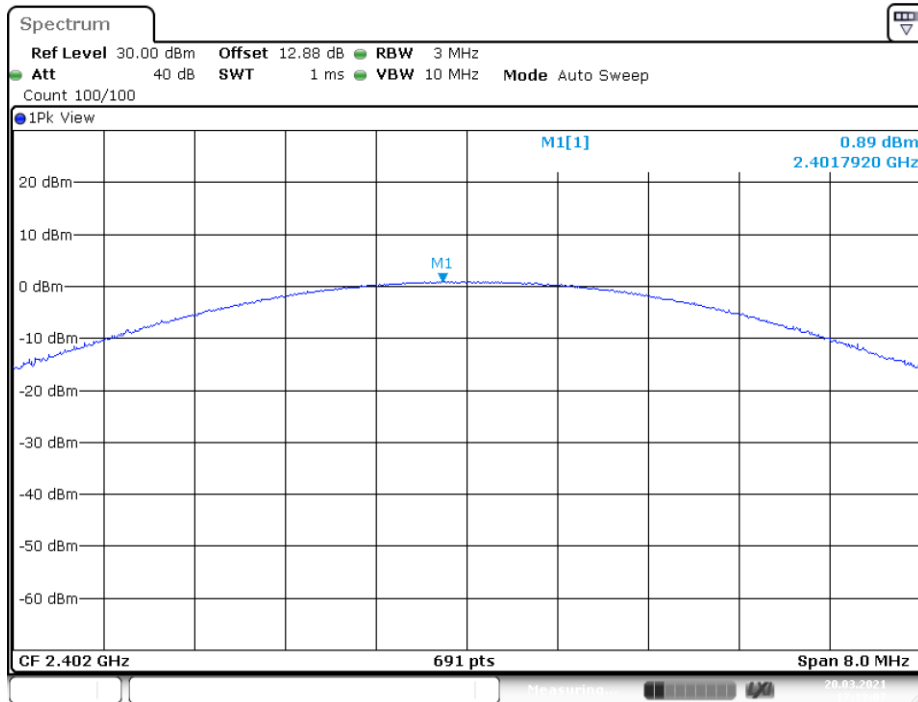


Date: 20.MAR.2021 17:13:07

2DH1_Ant1_2441MHz

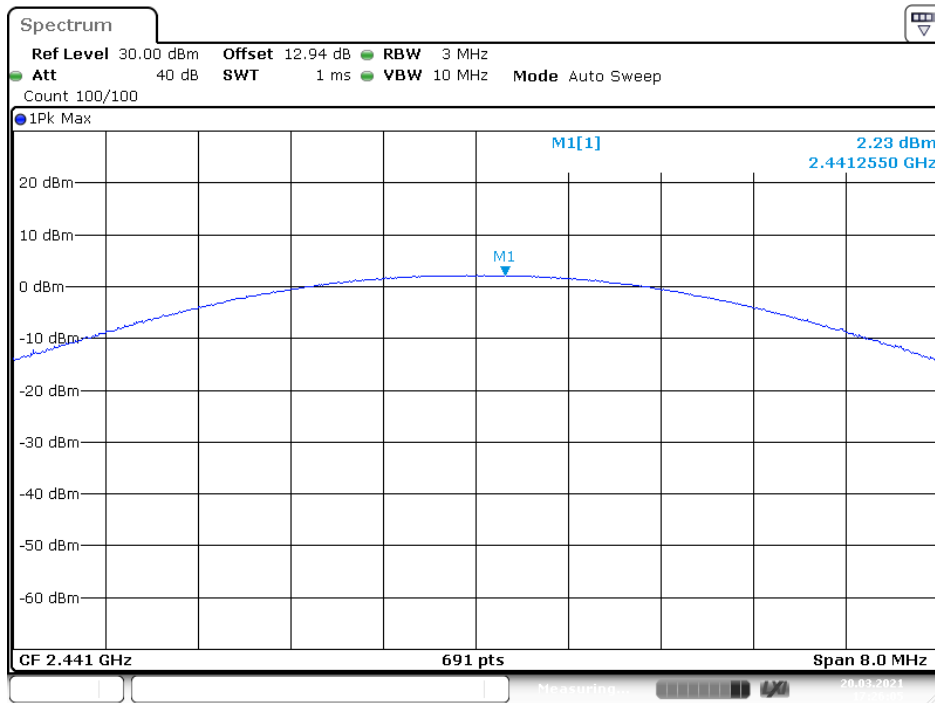

Date: 20.MAR.2021 17:26:05

2DH1_Ant1_2480MHz

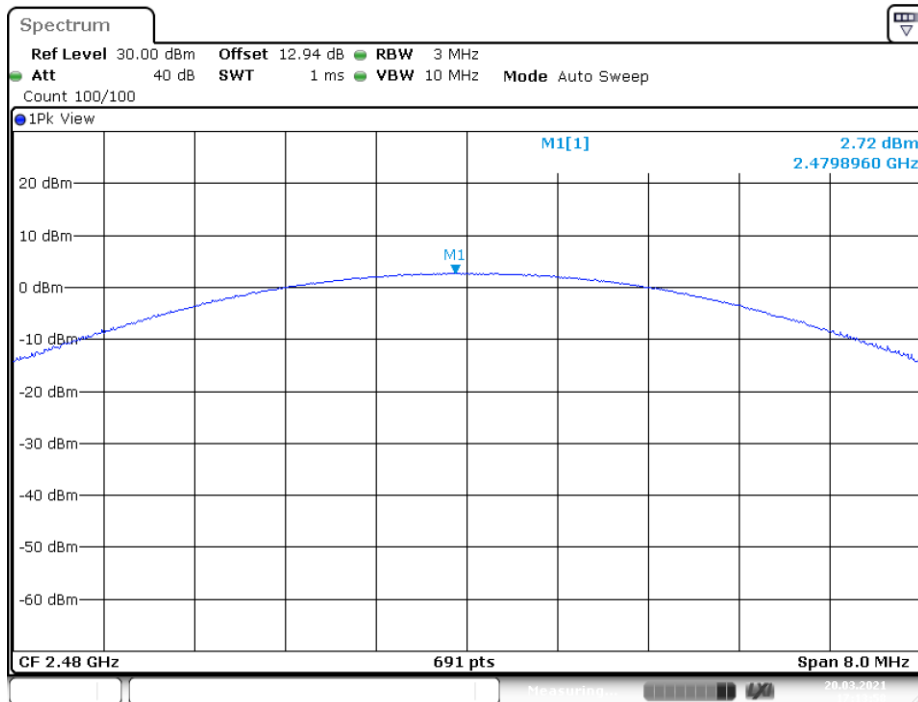

Date: 20.MAR.2021 17:13:58

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions

Temperature:	24°C
Relative Humidity:	48 %
ATM Pressure:	101.0 kPa


The testing was performed by Ting on 2021-03-20.

EUT operation mode: Transmitting


Test Result: Compliant.

Conducted Band Edge Result:


DH1_Ant1_Low_2402MHz

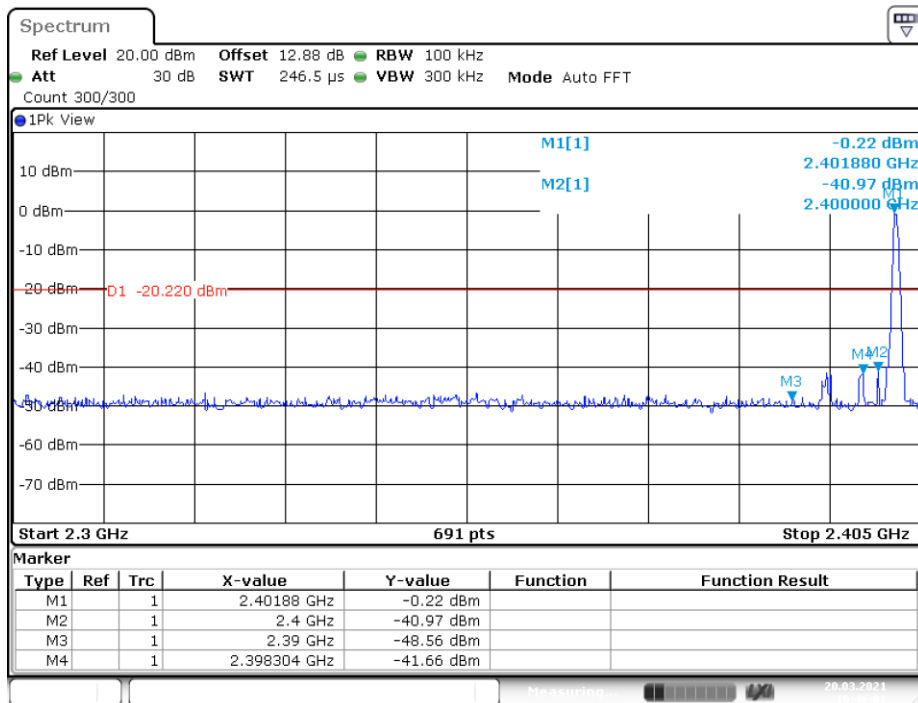


DH1_Ant1_High_2480MHz

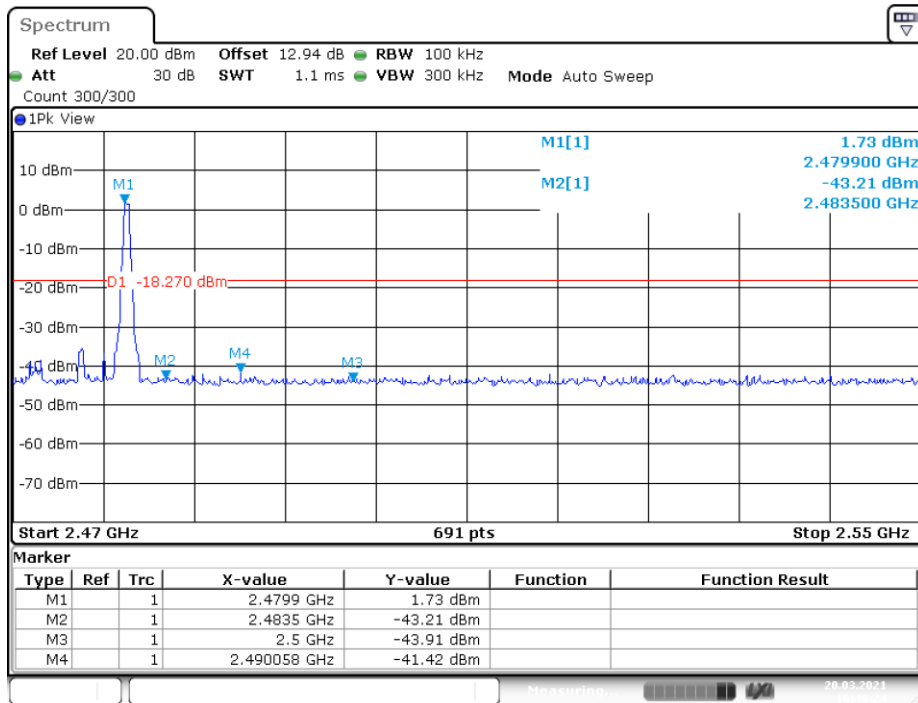


DH1_Ant1_Low_Hop_2402MHz

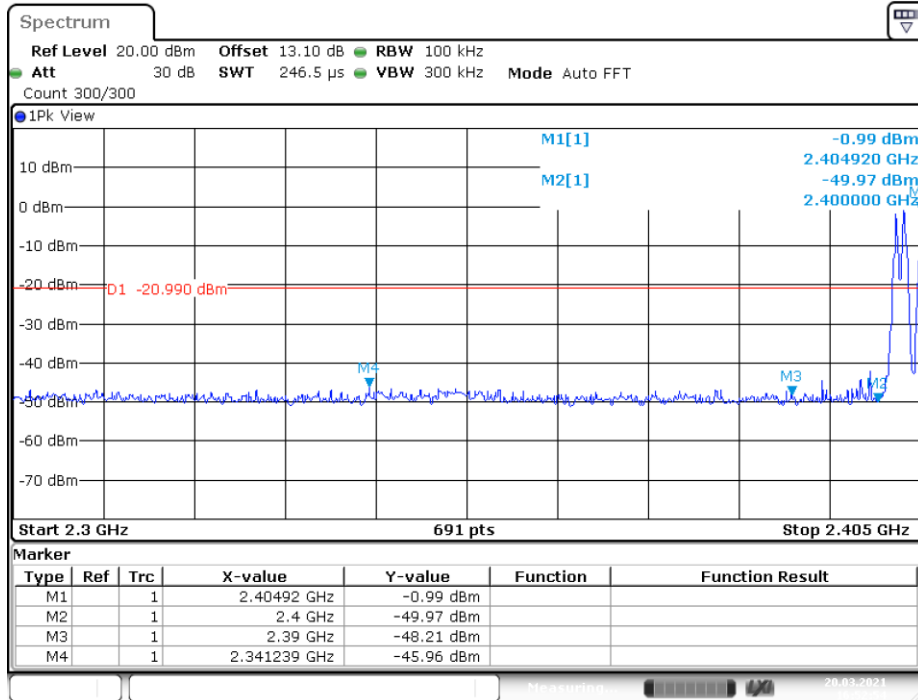

DH1_Ant1_High_Hop_2480MHz

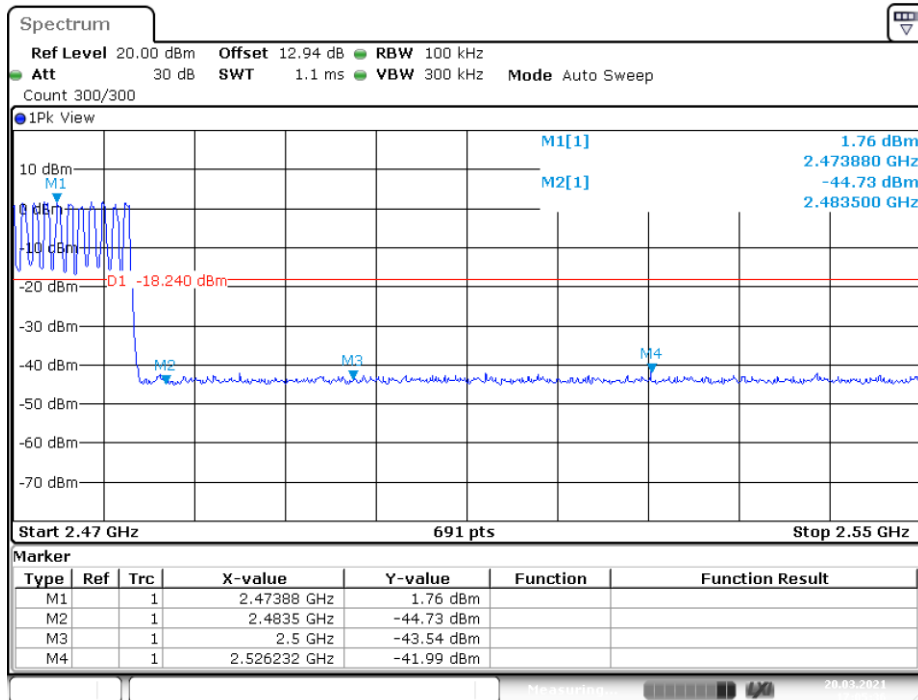


2DH1_Ant1_Low_2402MHz

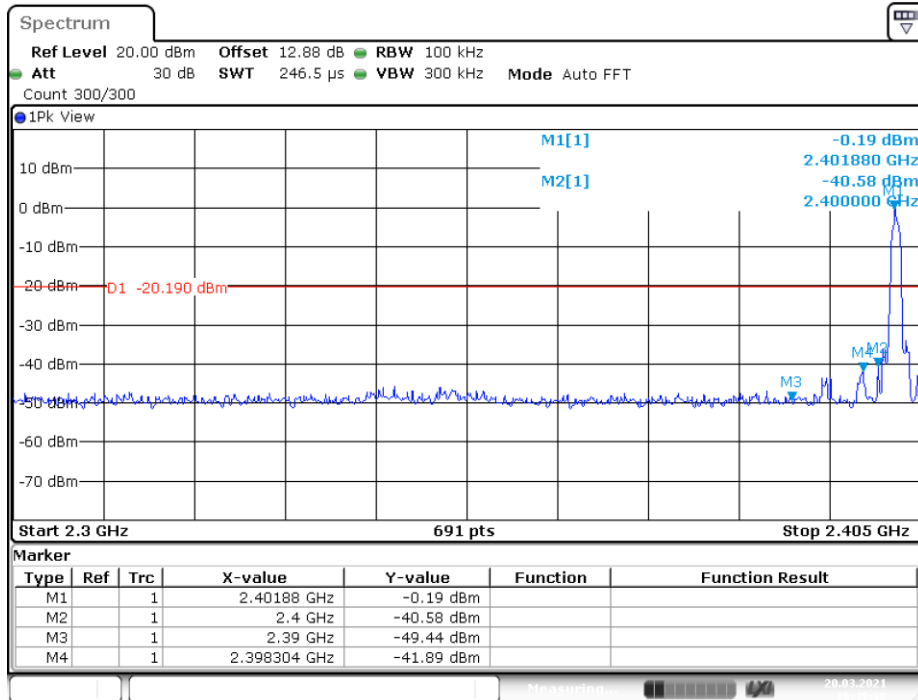


Date: 20.MAR.2021 16:49:38

2DH1_Ant1_High_2480MHz

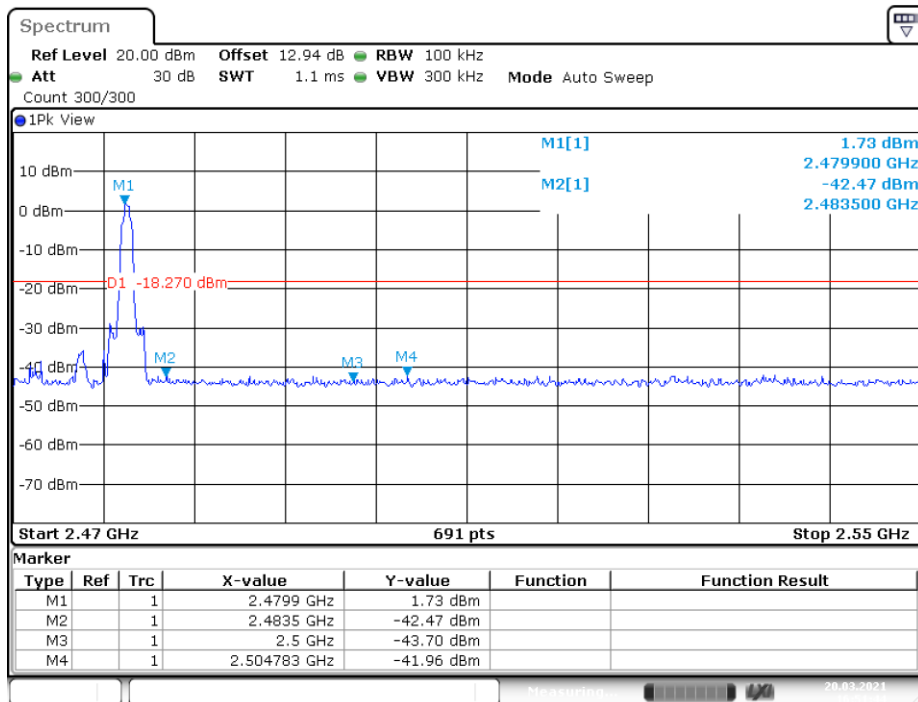


Date: 20.MAR.2021 16:51:44

2DH1_Ant1_Low_Hop_2402MHz

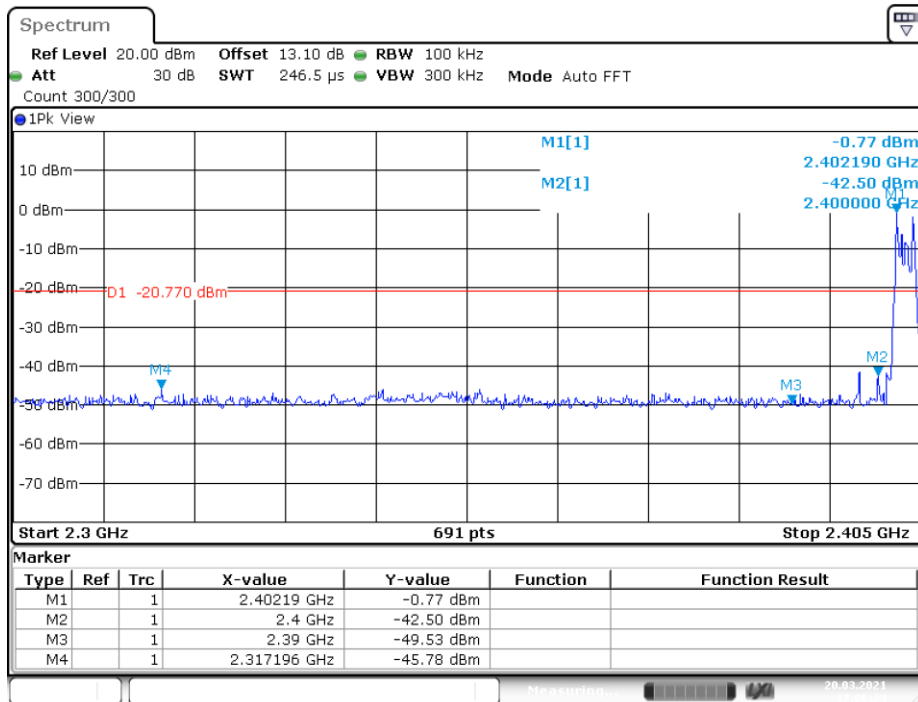

Date: 20.MAR.2021 17:06:24

2DH1_Ant1_High_Hop_2480MHz

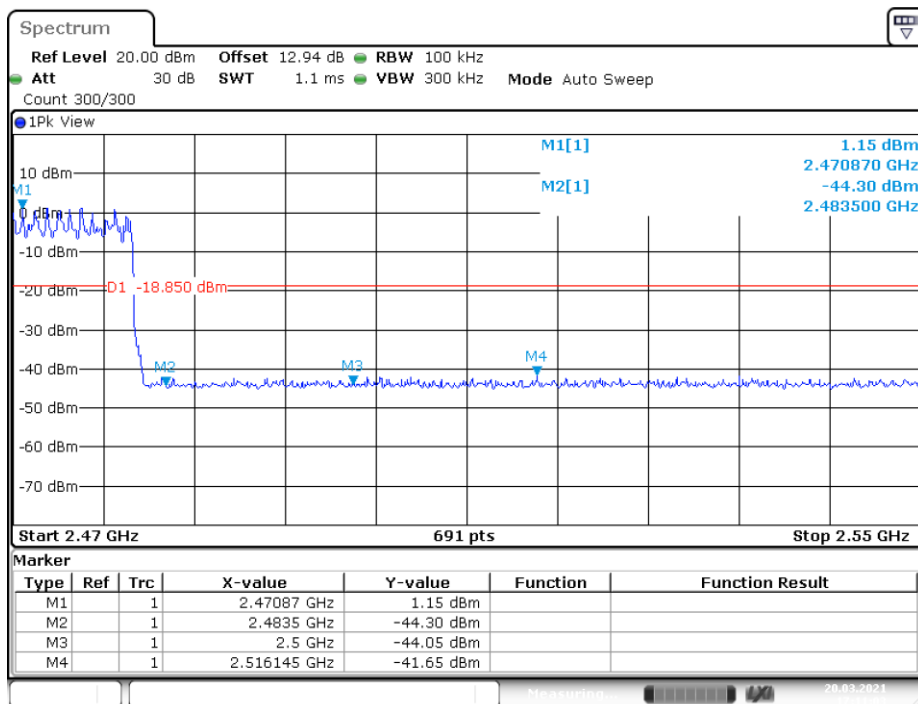

Date: 20.MAR.2021 17:11:03

***** END OF REPORT *****