

Test Mode :	TX (5.8G) --802.11ac-HT20
-------------	---------------------------

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenn a Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel (5745 MHz)-Above 1G									
V	4679.197	62.89	5.94	35.40	44.00	60.23	74.00	-13.77	PK
V	4679.197	43.89	5.94	35.40	44.00	41.23	54.00	-12.77	AV
V	11490.171	62.45	8.46	39.75	44.50	66.16	68.20	-2.04	PK
V	11490.171	43.78	8.46	39.75	44.50	47.49	54.00	-6.51	AV
V	17235.157	63.07	10.12	38.80	44.10	67.89	74.00	-6.11	PK
V	17235.157	43.56	10.12	38.80	42.70	49.78	54.00	-4.22	AV
H	4679.038	61.53	5.94	35.18	44.00	58.65	74.00	-15.35	PK
H	4679.038	43.52	5.94	35.18	44.00	40.64	54.00	-13.36	AV
H	11490.151	54.88	8.46	38.71	44.50	57.55	68.20	-10.65	PK
H	11490.151	41.21	8.46	38.71	44.50	43.88	54.00	-10.12	AV
H	17235.121	51.88	10.12	38.38	44.10	56.28	74.00	-17.72	PK
H	17235.121	40.34	10.12	38.38	44.10	44.74	54.00	-9.26	AV
middle Channel (5785 MHz)-Above 1G									
V	4592.187	60.55	6.48	36.35	44.05	59.33	74.00	-14.67	PK
V	4592.187	43.73	6.48	36.35	44.05	42.51	54.00	-11.49	AV
V	11570.032	62.81	8.47	37.88	44.51	64.65	68.20	-3.55	PK
V	11570.032	43.38	8.47	37.88	44.51	45.22	54.00	-8.78	AV
V	17355.127	63.56	10.12	38.80	44.10	68.38	74.00	-5.62	PK
V	17355.127	43.48	10.12	38.80	42.70	49.70	54.00	-4.30	AV
H	4592.129	61.70	6.48	36.37	44.05	60.50	74.00	-13.50	PK
H	4592.129	43.97	6.48	36.37	44.05	42.77	54.00	-11.23	AV
H	11570.050	54.57	8.47	38.64	44.50	57.18	68.20	-11.02	PK
H	11570.050	41.62	8.47	38.64	44.50	44.23	54.00	-9.77	AV
H	17355.173	54.47	10.12	38.38	44.10	58.87	74.00	-15.13	PK
H	17355.173	43.08	10.12	38.38	44.10	47.48	54.00	-6.52	AV
High Channel (5825 MHz)-Above 1G									
V	6039.117	61.19	7.10	37.24	43.50	62.03	68.20	-6.17	PK
V	6039.117	43.38	7.10	37.24	43.50	44.22	54.00	-9.78	AV
V	11650.076	64.85	8.46	37.68	44.50	66.49	74.00	-7.51	PK
V	11650.076	43.20	8.46	37.68	44.50	44.84	54.00	-9.16	AV
V	17475.017	60.14	10.12	38.80	44.10	64.96	68.20	-3.24	PK
V	17475.017	43.04	10.12	38.80	42.70	49.26	54.00	-4.74	AV
H	6039.043	60.70	7.10	37.24	43.50	61.54	68.20	-6.66	PK
H	6039.043	43.05	7.10	37.24	43.50	43.89	54.00	-10.11	AV
H	11650.148	54.35	8.46	38.57	44.50	56.88	74.00	-17.12	PK
H	11650.148	43.82	8.46	38.57	44.50	46.35	54.00	-7.65	AV
H	17475.154	53.16	10.12	38.38	44.10	57.56	68.20	-10.64	PK
H	17475.154	40.68	10.12	38.38	44.10	45.08	54.00	-8.92	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

Test Mode :	TX (5.8G) -- 802.11ac-HT40
-------------	----------------------------

Polar (H/V)	Frequency (MHz)	Meter Reading (dBUV)	Cable loss (dB)	Antenn a Factor dB/m	Preamp Factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector Type
Low Channel (5755 MHz)-Above 1G									
V	4679.046	63.40	5.94	35.40	44.00	60.74	74.00	-13.26	PK
V	4679.046	43.38	5.94	35.40	44.00	40.72	54.00	-13.28	AV
V	11510.155	61.02	8.46	39.75	44.50	64.73	68.20	-3.47	PK
V	11510.155	43.94	8.46	39.75	44.50	47.65	54.00	-6.35	AV
V	17265.166	64.39	10.12	38.80	44.10	69.21	74.00	-4.79	PK
V	17265.166	43.92	10.12	38.80	42.70	50.14	54.00	-3.86	AV
H	4679.138	62.21	5.94	35.18	44.00	59.33	74.00	-14.67	PK
H	4679.138	43.16	5.94	35.18	44.00	40.28	54.00	-13.72	AV
H	11510.066	52.01	8.46	38.71	44.50	54.68	68.20	-13.52	PK
H	11510.066	43.62	8.46	38.71	44.50	46.29	54.00	-7.71	AV
H	17265.194	52.87	10.12	38.38	44.10	57.27	74.00	-16.73	PK
H	17265.194	44.39	10.12	38.38	44.10	48.79	54.00	-5.21	AV
middle Channel (5795 MHz)-Above 1G									
V	6039.021	62.76	6.48	36.35	44.05	61.54	68.20	-6.66	PK
V	6039.021	43.74	6.48	36.35	44.05	42.52	54.00	-11.48	AV
V	11590.156	61.00	8.47	37.88	44.51	62.84	74.00	-11.16	PK
V	11590.156	43.93	8.47	37.88	44.51	45.77	54.00	-8.23	AV
V	17385.173	60.12	10.12	38.80	44.10	64.94	68.20	-3.26	PK
V	17385.173	43.12	10.12	38.80	42.70	49.34	54.00	-4.66	AV
H	6039.196	63.67	6.48	36.37	44.05	62.47	68.20	-5.73	PK
H	6039.196	43.70	6.48	36.37	44.05	42.50	54.00	-11.50	AV
H	11590.015	50.19	8.47	38.64	44.50	52.80	74.00	-21.20	PK
H	11590.015	41.97	8.47	38.64	44.50	44.58	54.00	-9.42	AV
H	17385.158	54.49	10.12	38.38	44.10	58.89	68.20	-9.31	PK
H	17385.158	40.61	10.12	38.38	44.10	45.01	54.00	-8.99	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBUV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

The Worst mode is Antenna A.

Test Mode :	TX(5.8G) - 802.11 AC80
-------------	------------------------

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenn a Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
(5775 MHz)-Above 1G									
V	4679.107	63.84	5.94	35.40	44.00	61.18	74.00	-12.82	PK
V	4679.107	43.15	5.94	35.40	44.00	40.49	54.00	-13.51	AV
V	11550.113	61.27	8.46	39.75	44.50	64.98	68.20	-3.22	PK
V	11550.113	43.80	8.46	39.75	44.50	47.51	54.00	-6.49	AV
V	17325.110	64.52	10.12	38.80	44.10	69.34	74.00	-4.66	PK
V	17325.110	43.76	10.12	38.80	42.70	49.98	54.00	-4.02	AV
H	4679.128	63.42	5.94	35.18	44.00	60.54	74.00	-13.46	PK
H	4679.128	43.96	5.94	35.18	44.00	41.08	54.00	-12.92	AV
H	11550.051	54.73	8.46	38.71	44.50	57.40	68.20	-10.80	PK
H	11550.051	44.92	8.46	38.71	44.50	47.59	54.00	-6.41	AV
H	17325.195	54.02	10.12	38.38	44.10	58.42	74.00	-15.58	PK
H	17325.195	44.38	10.12	38.38	44.10	48.78	54.00	-5.22	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

8. POWER SPECTRAL DENSITY TEST

8.1 Block Diagram Of Test Setup



8.2 Limit

For the band 5.15-5.25 GHz,

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum

power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional

gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each

1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz

(3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.3 Test procedure

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas RBW (< 500 KHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since RBW=100 KHz is available on nearly all spectrum analyzers.

8.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

8.5 Test Result

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 7.4V
Test Mode :	TX Frequency U-NII-1 (5180-5240MHz)		


Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A Plot.

Mode	Frequency	Measured Power Density (dBm/MHz)			Limit (dBm/MHz)	Result
		ANT A	ANT B	Total		
802.11 n20	5180 MHz	-2.727	-2.872	0.21	11	PASS
	5200 MHz	-2.929	-2.527	0.29	11	PASS
	5240 MHz	-3.207	-3.476	-0.33	11	PASS
802.11 n40	5190 MHz	-5.123	-6.014	-2.54	11	PASS
	5230 MHz	-6.181	-5.044	-2.57	11	PASS
802.11 ac20	5180 MHz	-3.055	-2.811	0.08	11	PASS
	5200 MHz	-2.825	-3.291	-0.04	11	PASS
	5240 MHz	-3.319	-3.222	-0.26	11	PASS
802.11 ac40	5190 MHz	-5.054	-5.602	-2.31	11	PASS
	5230 MHz	-5.633	-5.281	-2.44	11	PASS
802.11 AC80	5210 MHz	-6.495	-6.268	-3.37	11	PASS


(802.11n20) PSD plot on channel 36




(802.11n40) PSD plot on channel 38

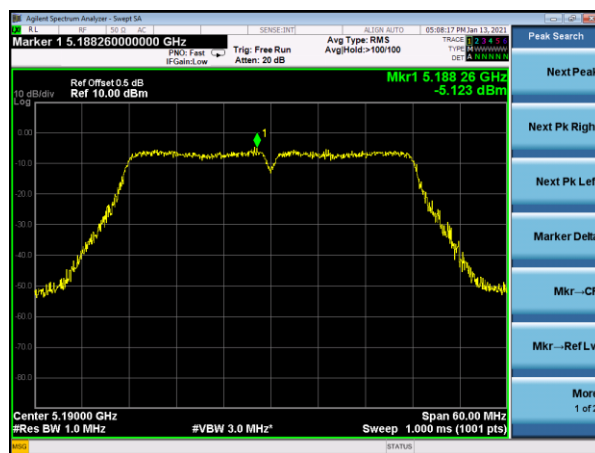


(802.11n20) PSD plot on channel 40

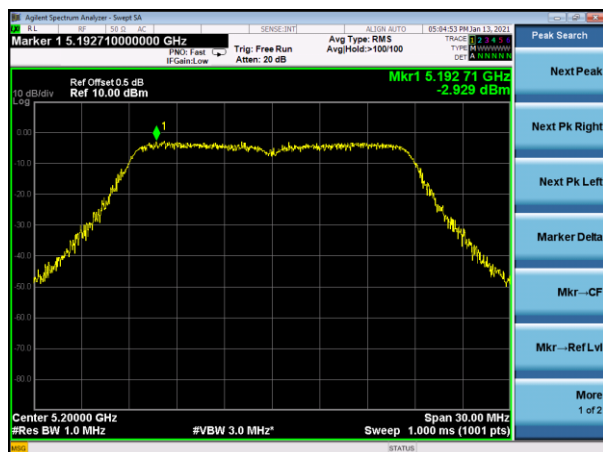


(802.11n40) PSD plot on channel 46

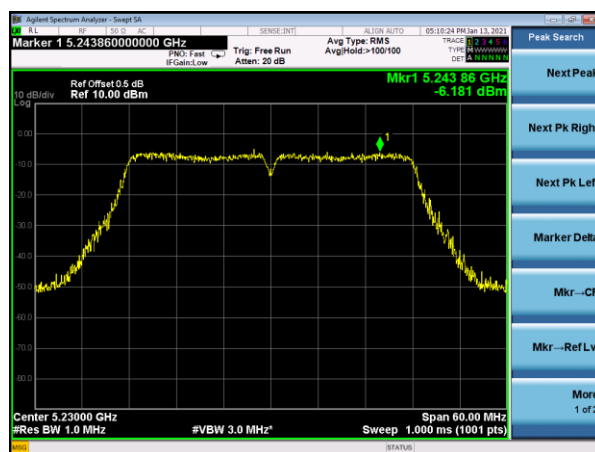

(802.11n20) PSD plot on channel 48

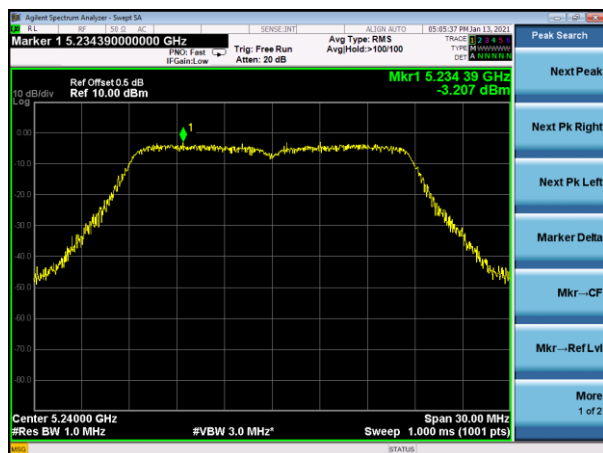


(802.11ac20) PSD plot on channel 36

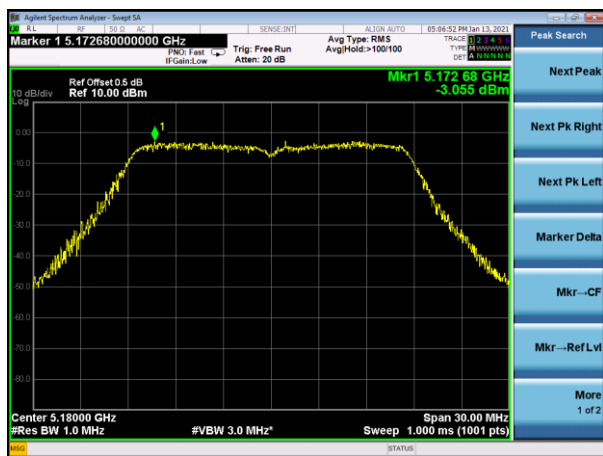

(802.11ac40) PSD plot on channel 38





(802.11ac20) PSD plot on channel 40

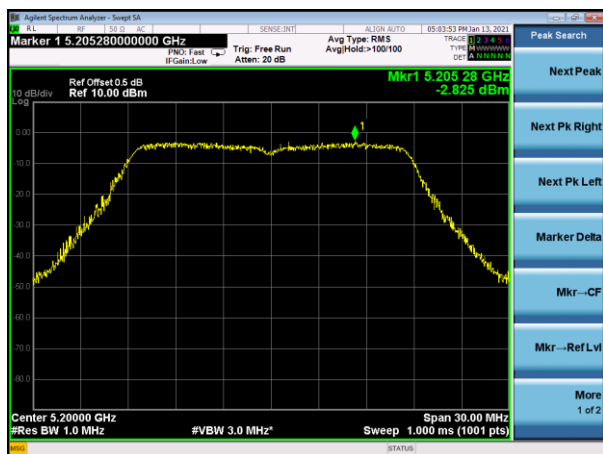



(802.11ac40) PSD plot on channel 46



(802.11ac20) PSD plot on channel 48

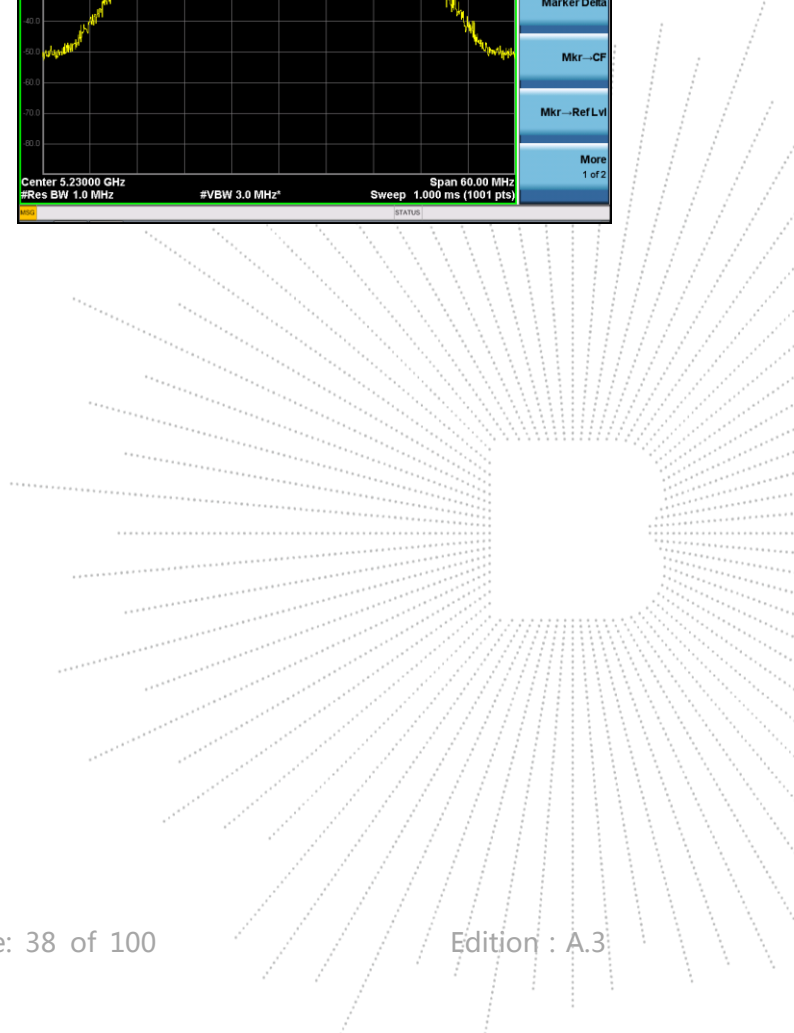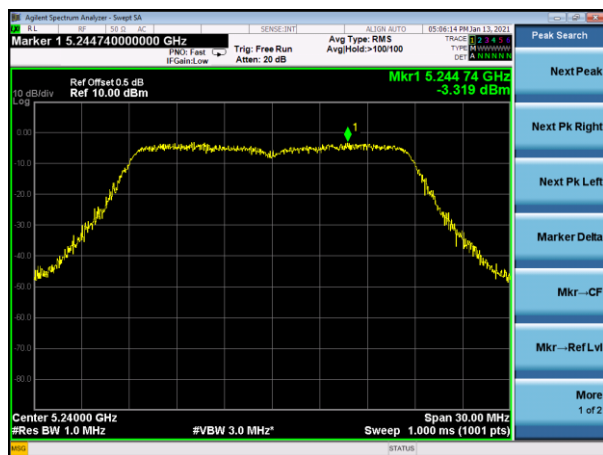

(802.11ac80) PSD plot on channel 42

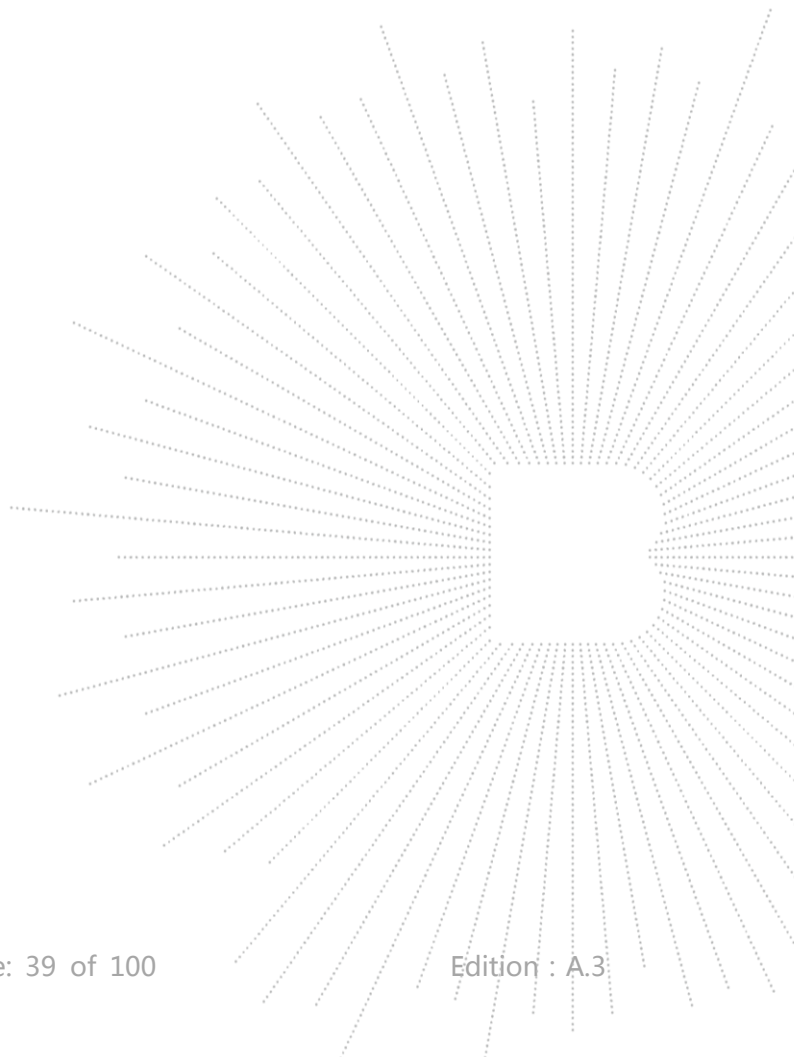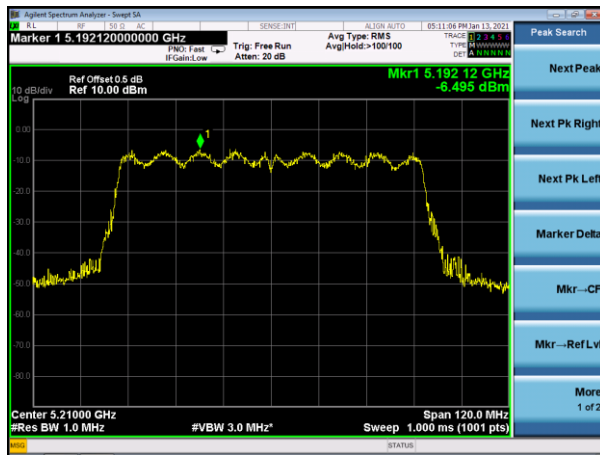


Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 7.4V
Test Mode :	TX Frequency U-NII-3 (5745-5825MHz)		


Note: A(B) Represent the value of antenna A and B, The worst data is Antenna B, only shown Antenna B Plot.

Mode	Frequency	Measured Power Density (dBm/500KHz)			Limit (dBm/500kHz)	Result
		ANT A	ANT B	Total		
802.11 n20	5745 MHz	-9.665	-7.092	-5.18	30	PASS
	5785 MHz	-8.912	-9.459	-6.17	30	PASS
	5825 MHz	-9.827	-8.760	-6.25	30	PASS
802.11 n40	5755 MHz	-10.820	-11.463	-8.12	30	PASS
	5795 MHz	-10.167	-9.785	-6.96	30	PASS
802.11 ac20	5745 MHz	-9.678	-8.945	-6.29	30	PASS
	5785 MHz	-9.001	-6.495	-4.56	30	PASS
	5825 MHz	-9.223	-7.932	-5.52	30	PASS
802.11 ac40	5755 MHz	-10.436	-11.147	-7.77	30	PASS
	5795 MHz	-11.546	-9.715	-7.52	30	PASS
802.11 AC80	5775 MHz	-10.483	-12.358	-8.31	30	PASS


(802.11n20) PSD plot on channel 149

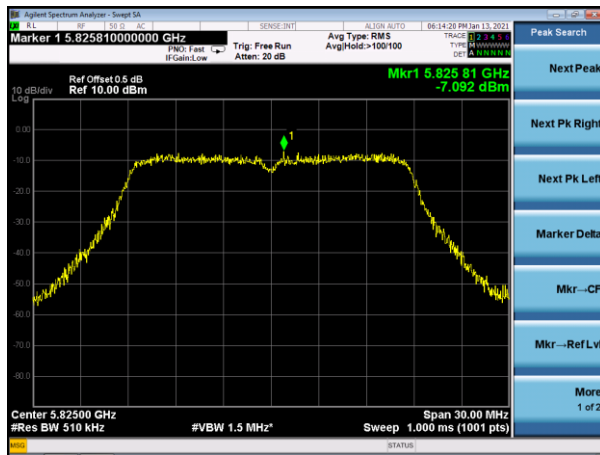


(802.11n40) PSD plot on channel 151

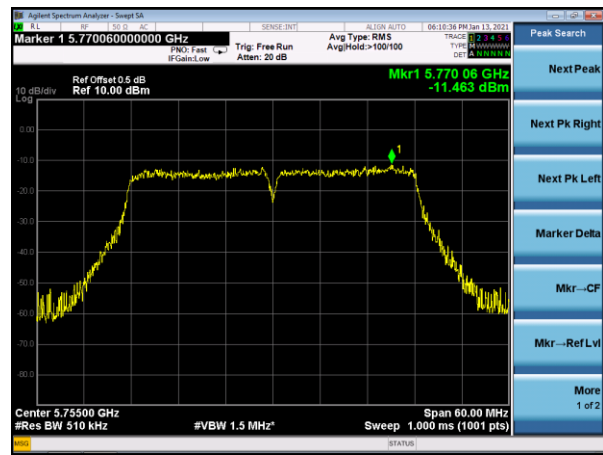



(802.11n20) PSD plot on channel 157

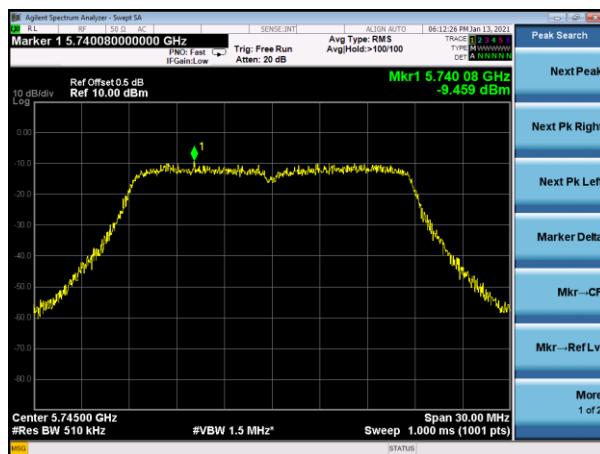


(802.11n40) PSD plot on channel 159

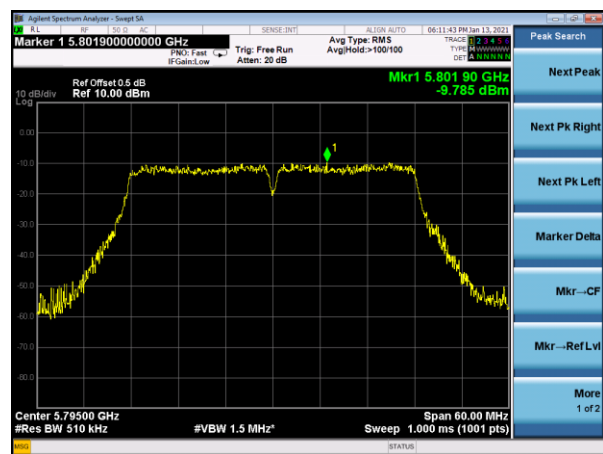


(802.11n20) PSD plot on channel 165

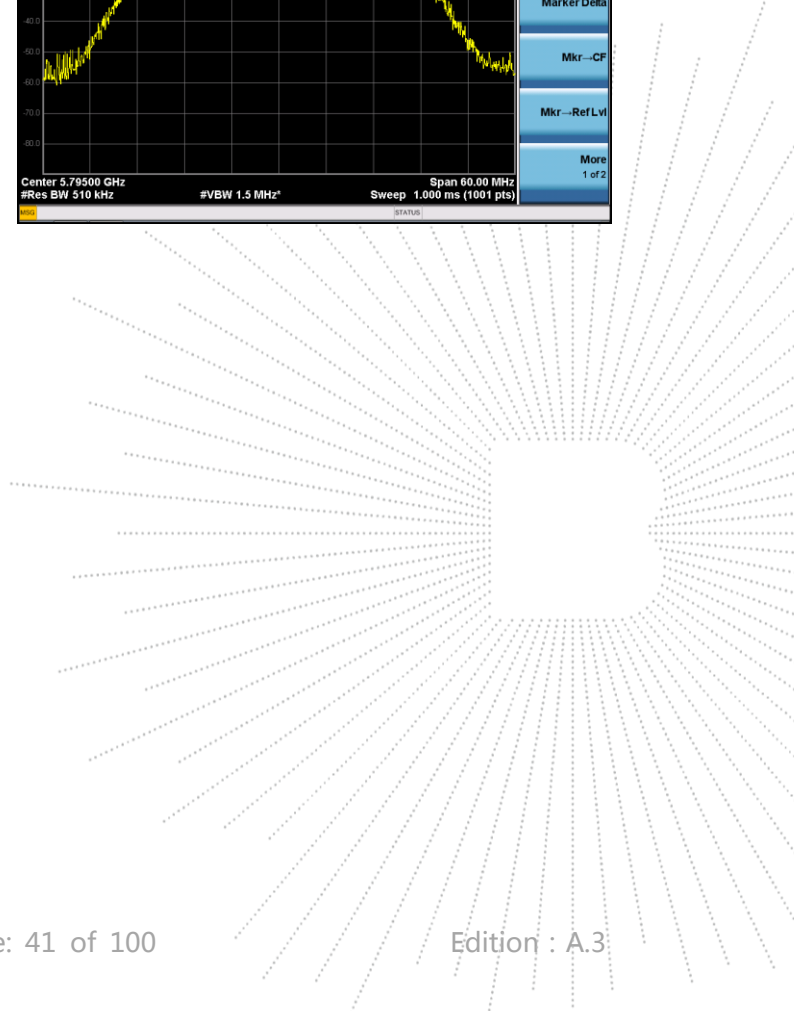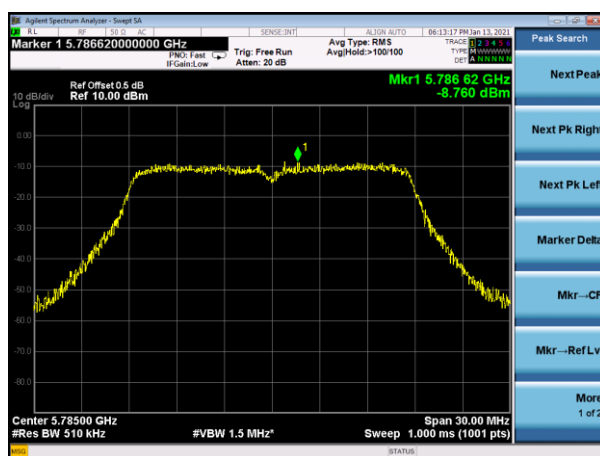


(802.11ac20) PSD plot on channel 149

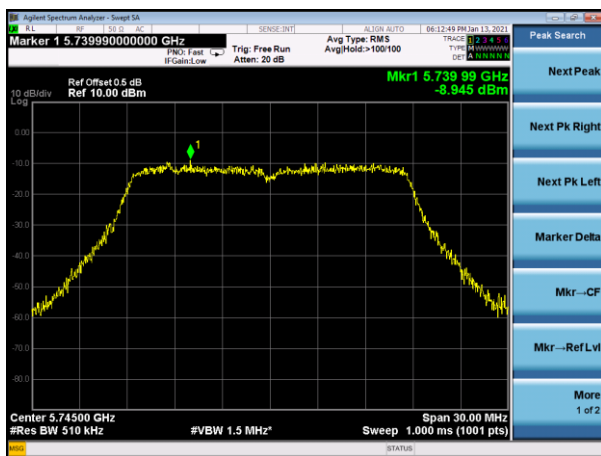


(802.11ac40) PSD plot on channel 151

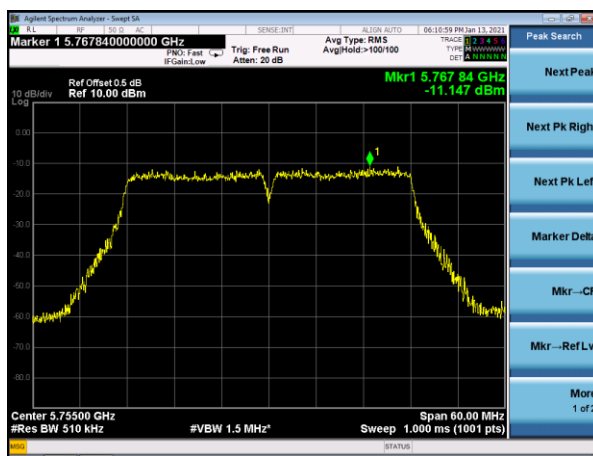


(802.11ac20) PSD plot on channel 157

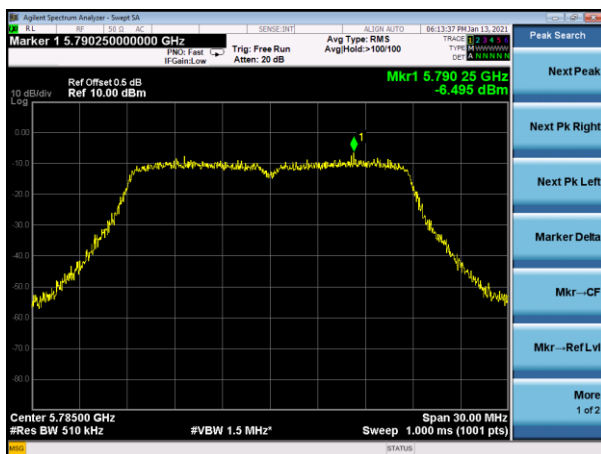



(802.11ac40) PSD plot on channel 159

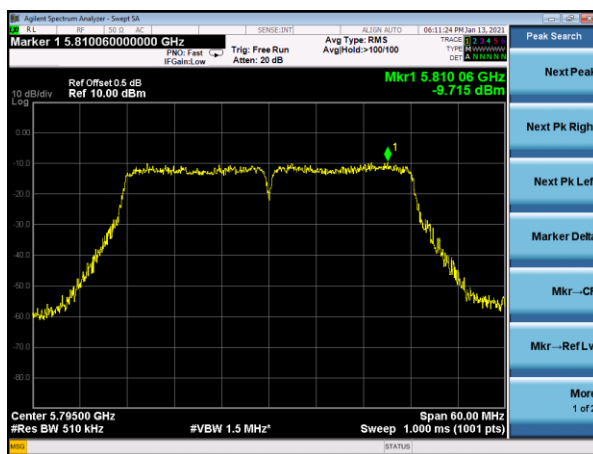

(802.11ac20) PSD plot on channel 165

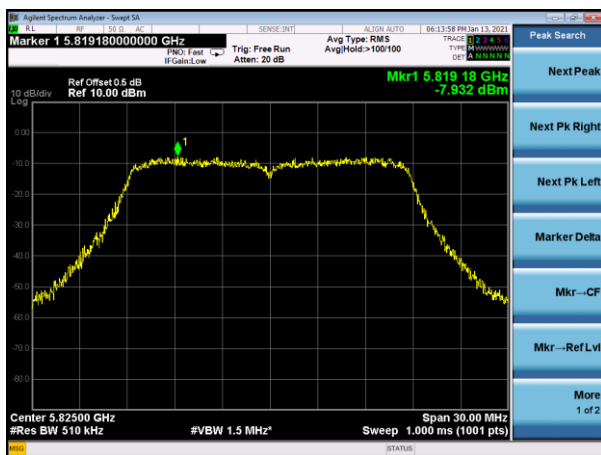


(802.11ac80) PSD plot on channel 155

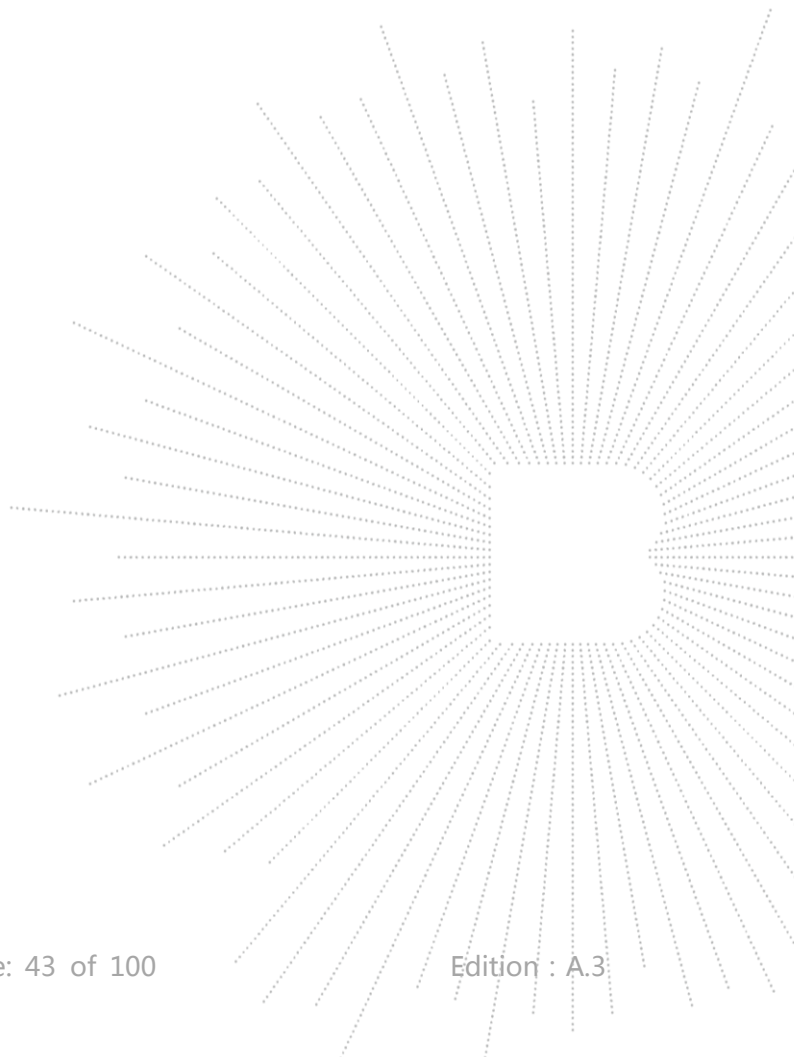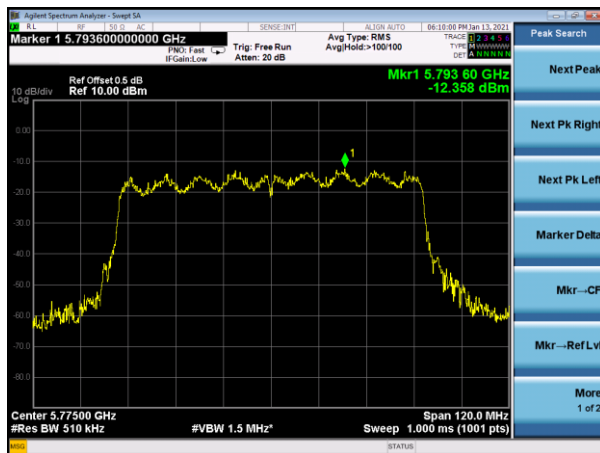

9. 26DB & 6DB & 99% EMISSION BANDWIDTH

9.1 Block Diagram Of Test Setup

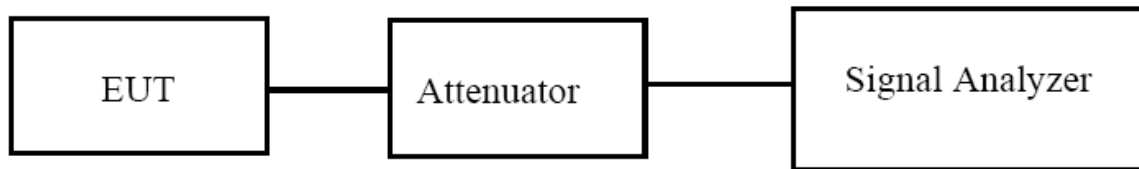

9.2 Limit

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

9.3 Test procedure

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

9.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

9.5 Test Result

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 7.4V
Test Mode :	TX Frequency U-NII-1 (5180-5240MHz)		


Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A Plot.

Mode	Channel	Frequency (MHz)	99% bandwidth (MHz)	26dB bandwidth (MHz)	Limit MHz	Result
			ANT A	ANT A		
802.11 n20	CH36	5180	17.834	21.59	N/A	Pass
	CH40	5200	17.778	21.40	N/A	Pass
	CH48	5240	17.811	21.74	N/A	Pass
802.11 n40	CH 38	5190	37.140	45.14	N/A	Pass
	CH 46	5230	37.155	45.17	N/A	Pass
802.11 ac20	CH36	5180	17.816	21.34	N/A	Pass
	CH40	5200	17.815	21.42	N/A	Pass
	CH48	5240	17.808	21.46	N/A	Pass
802.11 ac40	CH 38	5190	37.357	45.31	N/A	Pass
	CH 46	5230	37.212	44.84	N/A	Pass
802.11 AC80	CH 42	5210	75.743	83.48	N/A	Pass


Mode	Channel	Frequency (MHz)	99% bandwidth (MHz)	26dB bandwidth (MHz)	Limit MHz	Result
			ANT B	ANT B		
802.11 n20	CH36	5180	17.802	21.58	N/A	Pass
	CH40	5200	17.807	21.62	N/A	Pass
	CH48	5240	17.789	21.63	N/A	Pass
802.11 n40	CH 38	5190	37.040	44.81	N/A	Pass
	CH 46	5230	37.463	45.36	N/A	Pass
802.11 ac20	CH36	5180	17.796	21.56	N/A	Pass
	CH40	5200	17.852	21.65	N/A	Pass
	CH48	5240	17.852	21.74	N/A	Pass
802.11 ac40	CH 38	5190	37.017	45.26	N/A	Pass
	CH 46	5230	36.942	45.03	N/A	Pass
802.11 AC80	CH 42	5210	75.696	83.29	N/A	Pass

Test plot


(802.11 n20) 26dB&99%Bandwidth plot on channel 36

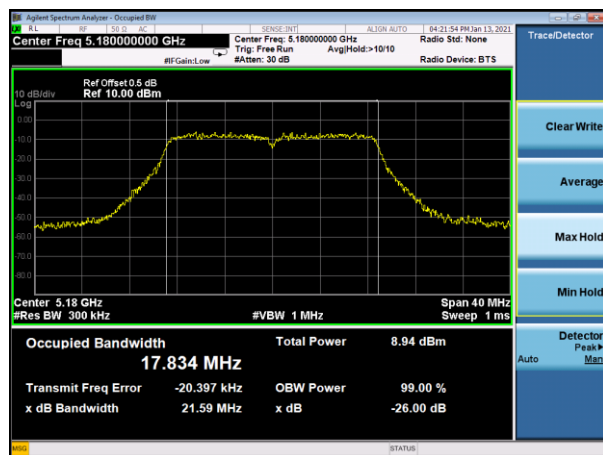


(802.11 n40) 26dB&99%Bandwidth plot on channel 38

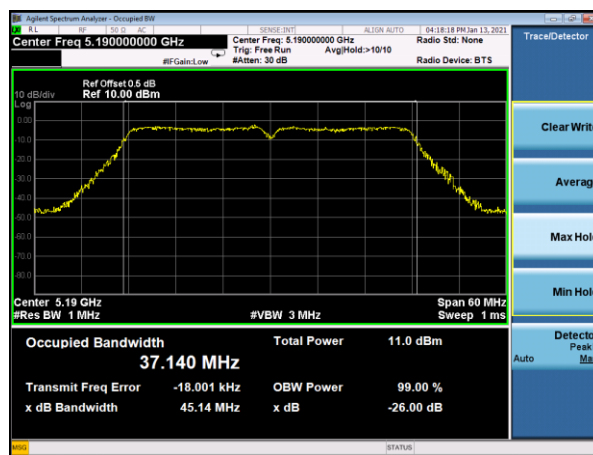


(802.11 n20) 26dB&99%Bandwidth plot on channel 40

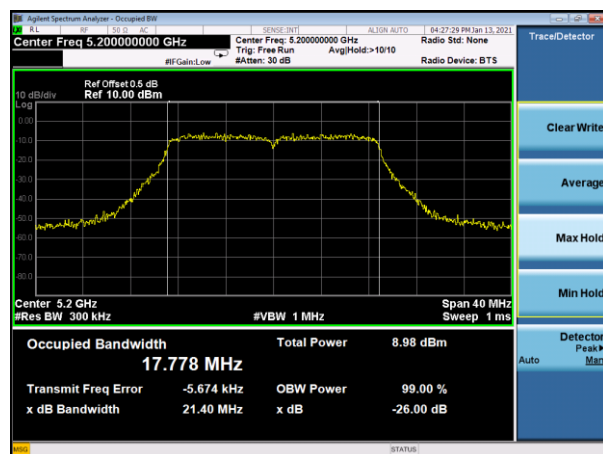

(802.11 n40) 26dB&99%Bandwidth plot on channel 46

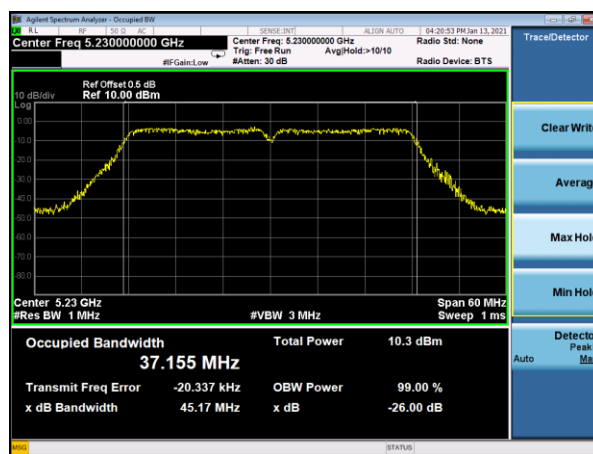


(802.11 n20) 26dB&99%Bandwidth plot on channel 48

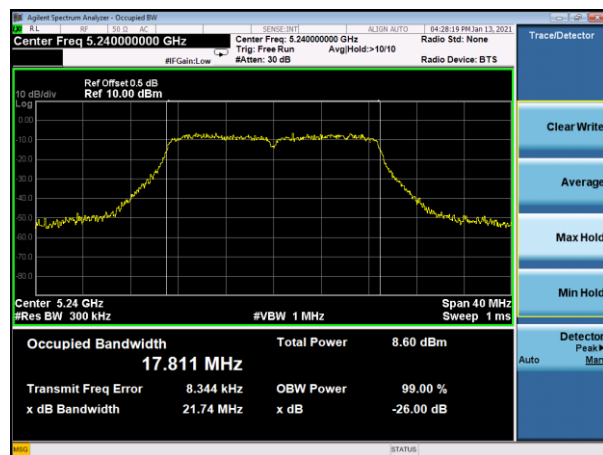


Test plot


(802.11 AC20) 26dB&99%Bandwidth plot
on channel 36

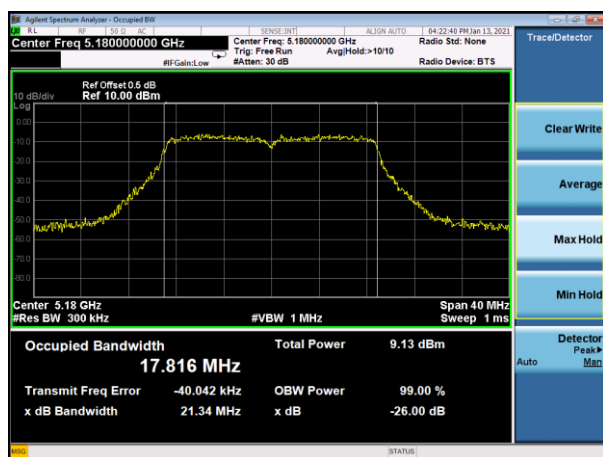


(802.11 AC40) 26dB&99%Bandwidth plot
on channel 38

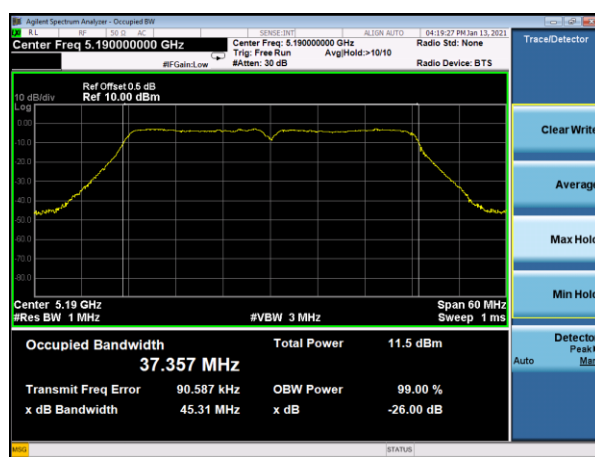


(802.11 AC20) 26dB&99%Bandwidth plot
on channel 40

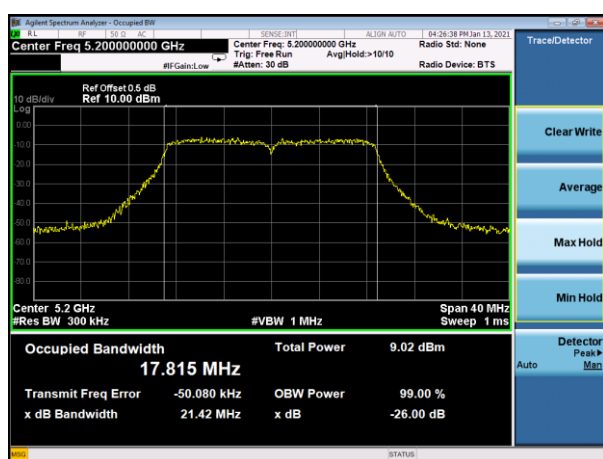

(802.11 AC40) 26dB&99%Bandwidth plot
on channel 46


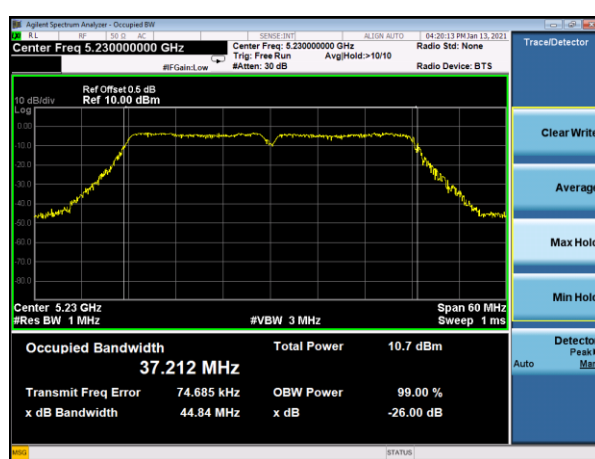


(802.11 AC20) 26dB&99%Bandwidth plot
on channel 40

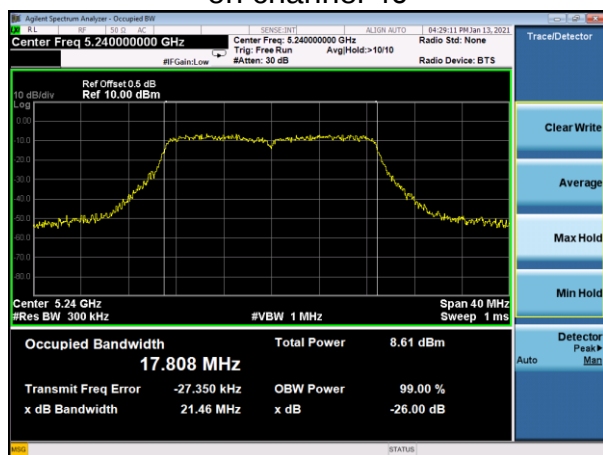

Test plot

(802.11 AC80) -26dB&99%Bandwidth plot
on channel 42

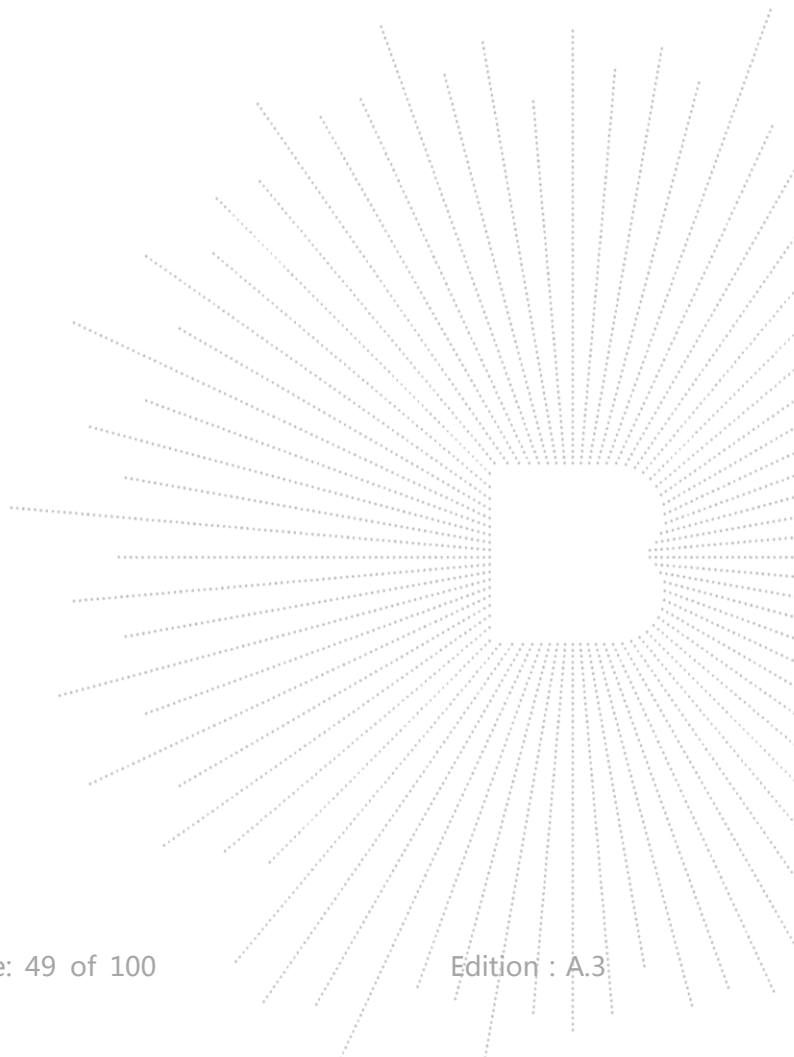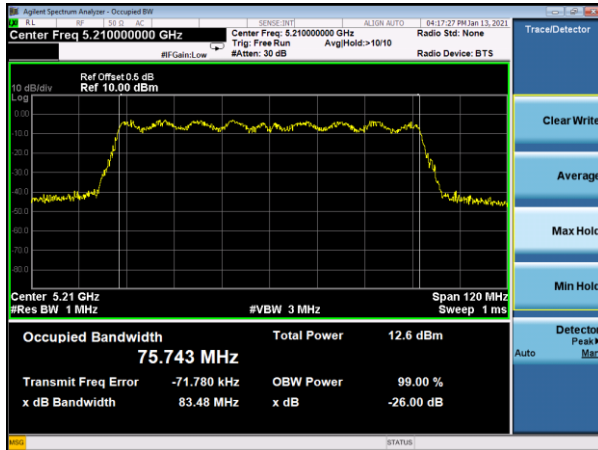

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 7.4V
Test Mode :	TX Frequency U-NII-3(5745-5825MHz)		

Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A Plot.

Mode	Channel	Frequency (MHz)	99% bandwidth (MHz)	6dB bandwidth (MHz)	Limit MHz	Result
			ANT A	ANT A		
802.11 n20	CH149	5745	17.813	17.36	≥500	Pass
	CH157	5785	17.834	17.33	≥500	Pass
	CH165	5825	17.853	16.87	≥500	Pass
802.11 n40	CH151	5755	37.055	36.00	≥500	Pass
	CH159	5795	37.072	36.08	≥500	Pass
802.11 ac20	CH149	5745	17.835	17.30	≥500	Pass
	CH157	5785	17.817	17.10	≥500	Pass
	CH165	5825	17.807	17.30	≥500	Pass
802.11 ac40	CH151	5755	36.955	35.73	≥500	Pass
	CH159	5795	37.227	36.10	≥500	Pass
802.11 AC80	CH155	5775	75.733	75.30	≥500	Pass