

# TEST REPORT

**Reference No.**..... : WTK21D03016253W001  
**FCC ID** ..... : 2AYBP-F3  
**Applicant**..... : Wingo Times Shenzhen Group Co.Ltd  
**Address**..... : 1101, Building H, Chuangxinyungu Workshop, No.48 Paotai Road,  
Gongming Street, Guangming District, Shenzhen, China  
**Manufacturer** ..... : Same as above  
**Address**..... : Same as above  
**Product**..... : 3-in-1 Wireless charging Station  
**Model(s)** ..... : F3  
**Standards**..... : FCC CFR47 Part 15C  
**Date of Receipt sample** .... : 2021-03-10  
**Date of Test** ..... : 2021-03-11 to 2021-03-29  
**Date of Issue**..... : 2021-03-30  
**Test Result**..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

**Prepared By:**

**Waltek Testing Group Co., Ltd.**

Address: No. 77, Houjie Section, Guantai Road, Houjie Town, Dongguan City, Guangdong, China

Tel: +86-769-2267 6998


Fax: +86-769-2267 6828

Compiled by:

Approved by:



Estel Qian / Project Engineer

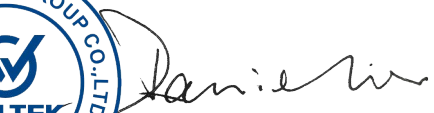

Daniel Liu / Designated Reviewer

## 2 Contents

	Page
<b>1 COVER PAGE</b> .....	<b>1</b>
<b>2 CONTENTS</b> .....	<b>2</b>
<b>3 REVISION HISTORY</b> .....	<b>3</b>
<b>4 GENERAL INFORMATION</b> .....	<b>4</b>
4.1 GENERAL DESCRIPTION OF E.U.T.....	4
4.2 DETAILS OF ACCESSORIES .....	4
4.3 TEST MODE .....	5
4.4 TEST FACILITY .....	5
<b>5 TEST SUMMARY</b> .....	<b>6</b>
<b>6 EQUIPMENT USED DURING TEST</b> .....	<b>7</b>
6.1 EQUIPMENTS LIST .....	7
6.2 DESCRIPTION OF SUPPORT UNITS.....	8
6.3 MEASUREMENT UNCERTAINTY.....	8
6.4 TEST EQUIPMENT CALIBRATION .....	8
<b>7 CONDUCTED EMISSION</b> .....	<b>9</b>
7.1 EUT OPERATION.....	9
7.2 EUT SETUP .....	9
7.3 MEASUREMENT DESCRIPTION .....	9
7.4 CONDUCTED EMISSION TEST RESULT.....	10
<b>8 RADIATED SPURIOUS EMISSIONS</b> .....	<b>12</b>
8.1 EUT OPERATION.....	12
8.2 TEST SETUP .....	13
8.3 SPECTRUM ANALYZER SETUP .....	14
8.4 TEST PROCEDURE.....	14
8.5 CORRECTED AMPLITUDE & MARGIN CALCULATION .....	14
8.6 SUMMARY OF TEST RESULTS .....	15
<b>9 BANDWIDTH MEASUREMENT</b> .....	<b>18</b>
9.1 TEST PROCEDURE.....	18
9.2 TEST RESULT .....	18
<b>10 ANTENNA REQUIREMENT</b> .....	<b>19</b>
<b>11 RF EXPOSURE</b> .....	<b>20</b>
<b>12 PHOTOGRAPHS OF TEST SETUP AND EUT</b> .....	<b>20</b>

### 3 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTK21D03016 253W001	2021-03-10	2021-03-11 to 2021-03-29	2021-03-30	original	-	Valid

## 4 General Information

### 4.1 General Description of E.U.T

Product:	3-in-1 Wireless charging Station
Model(s):	F3
Model Difference:	N/A
Type of Modulation:	ASK
Frequency Range:	110-205kHz
Antenna installation:	Inductive loop coil Antenna
Hardware Version:	V1.1
Software Version:	V1.1

### 4.2 Details of accessories

Ratings .....	:	Input: 9V $\overline{\text{---}}$ 2A or 12V $\overline{\text{---}}$ 2A
		Output: 1 Top: 3W Max
		2 Front: 15W Max
		3 Back: 5W Max

### 4.3 Test Mode

Test Mode	Descriptions
Standby mode	EUT alone powered by AC/DC adapter
Charging mode	Ant.1 loading of 3W
	Ant.2 loading of 15W
	Ant.3 loading of 15W
	Ant.4 loading of 5W

**Note:**

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

### 4.4 Test Facility

The test facility has a test site registered with the following organizations:

**ISED CAB identifier: CN0013. Test Firm Registration No.: 7760A.**

Waltek Testing Group Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files.

Registration number 7760A, October 15, 2016.

**FCC Designation No.: CN1201. Test Firm Registration No.: 523476.**

Waltek Testing Group Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration number 523476, September 10, 2019.

## 5 Test Summary

Test Items	Test Requirement	Result
Conducted Emission	47CFR part 15 § 15.207	PASS
Radiated Emission	47CFR part 15 § 15.209	PASS
20dB Bandwidth	47CFR part 15 § 15.215	PASS
Antenna Requirement	47CFR part 15 § 15.203	PASS
RF Exposure	FCC CFR 47 part1 § 1.1310 KDB 680106 D01 v03	PASS
Note: Pass=Compliance; NC=Not Compliance; NT=Not Tested; N/A=Not Applicable		

Note: -

## 6 Equipment Used during Test

### 6.1 Equipments List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Valid
1.	EMI Test Receiver	R&S	ESCI	100947	2020-07-30	1Year
2.	LISN	R&S	ENV216	100115	2020-07-30	1Year
3.	Cable	Top	TYPE16(3.5M)	-	2020-07-30	1Year
Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Valid
1.	EMI Test Receiver	R&S	ESCI	101155	2020-07-30	1Year
2.	LISN	SCHWARZBECK	NSLK 8128	8128-259	2020-07-30	1Year
3.	Limiter	CYBERTEK	EM5010	261115-001-0024	2020-07-30	1Year
4.	Cable	Laplace	RF300	-	2020-07-30	1Year
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Valid
1	Test Receiver	R&S	ESCI	101296	2020-04-20	1Year
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2020-04-25	1Year
3	Active Loop Antenna	Com-Power Corp.	AL-130R	10160007	2020-05-06	1Year
4	Amplifier	ANRITSU	MH648A	M43381	2020-04-20	1Year
5	Cable	HUBER+SUHNER	CBL2	525178	2020-04-20	1Year
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Valid
1	Spectrum Analyzer	R&S	FSP30	100091	2020-04-20	1Year
2	Amplifier	Agilent	8447D	2944A10178	2020-08-26	1Year
4	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	2020-08-22	1Year
5	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	2020-04-20	1Year
RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Valid
1.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	2020-04-20	1Year
2	Spectrum Analyzer	R&S	FSP40	100501	2020-07-30	1Year

## 6.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
Power Adapter	Flextronics Sales & Marketing (A-P) Ltd	A1882	/
Cellular Phone	HAWEI	MATE 20 PRO	/
Watch	Apple	SE	/
Wireless Charging Case	Apple	A2031	/

## 6.3 Measurement Uncertainty

Parameter	Uncertainty
Conducted Emission	$\pm 3.64$ dB (AC mains 150KHz~30MHz)
Radiated Spurious Emissions	$\pm 5.08$ dB (Bilog antenna 30M~1000MHz)
	$\pm 5.47$ dB (Horn antenna 1000M~25000MHz)
Radio Frequency	$\pm 1 \times 10^{-7}$ Hz
RF Power	$\pm 0.42$ dB
RF Power Density	$\pm 0.7$ dB
Conducted Spurious Emissions	$\pm 2.76$ dB (9kHz~26500MHz)
Confidence interval: 95%. Confidence factor: k=2	

## 6.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P. R. China.



## 7 Conducted Emission

Test Requirement: FCC CFR 47 Part 15 Section 15.207

Test Method: ANSI C63.10:2013

Test Result: PASS

Frequency Range: 150kHz to 30MHz

Class/Severity: Class B

Limit:

Frequency (MHz)	Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	46
5 to 30	60	50

\* Decreases with the logarithm of the frequency.

### 7.1 EUT Operation

Operating Environment:

Temperature: 22.8 °C

Humidity: 45.6 % RH


Atmospheric Pressure: 101.2kPa

EUT Operation: Ant. 3 loading of 5W

Only the worst-case transmitting mode were record in the report.

### 7.2 EUT Setup

The EUT was placed on the test table in shielding room.

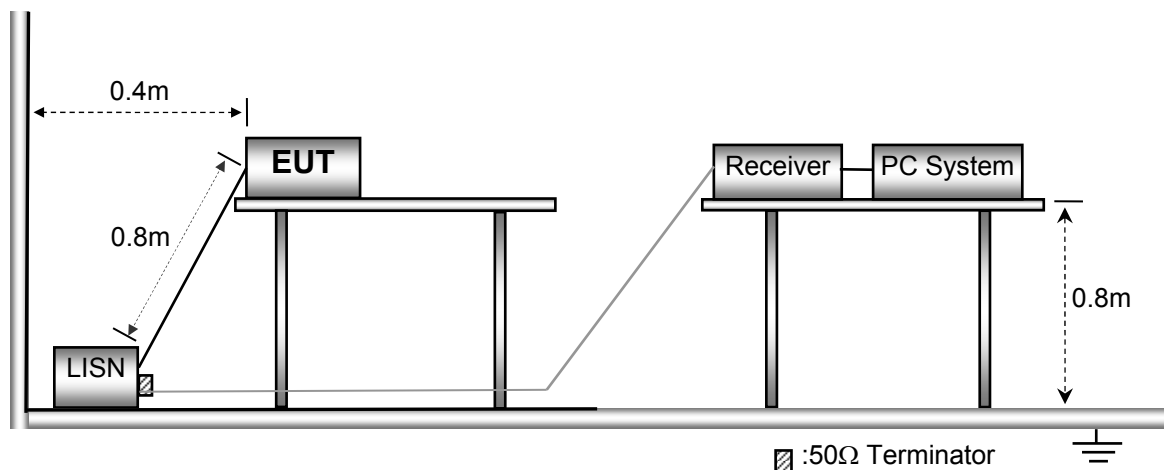


### 7.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.


### 7.4 Conducted Emission Test Result

Live line:

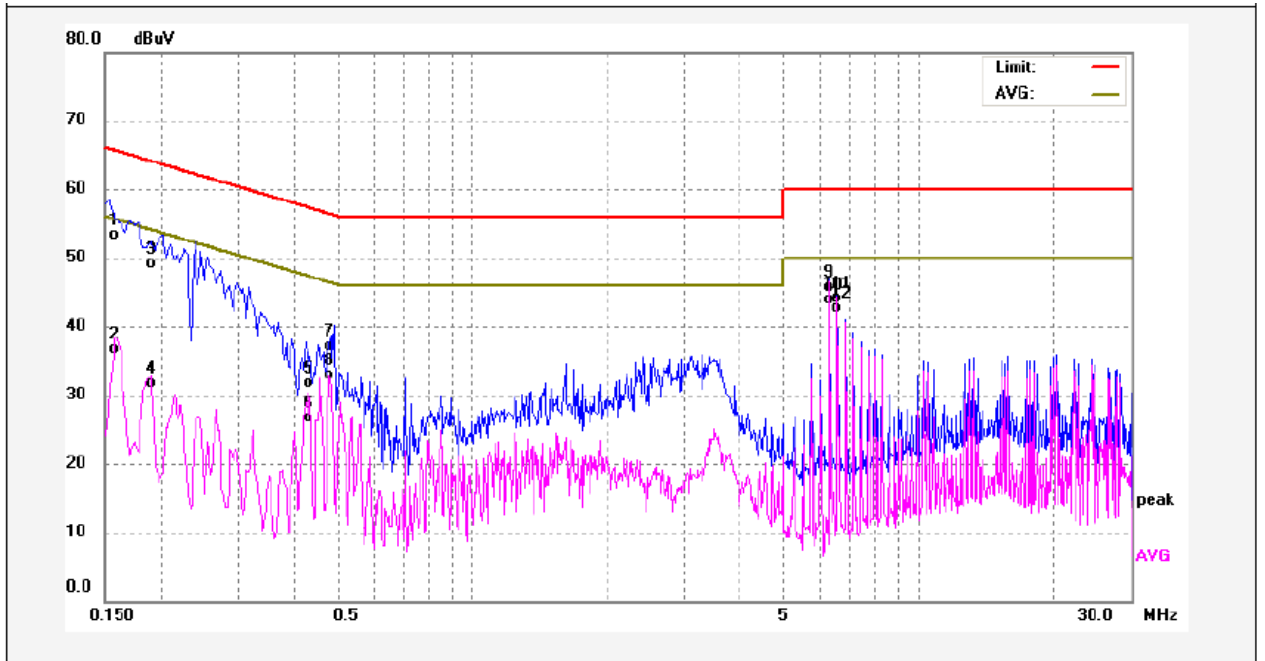

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1580	42.42	10.80	53.22	65.56	-12.34	QP	
2	0.1580	25.99	10.80	36.79	55.56	-18.77	AVG	
3	0.1900	38.38	10.70	49.08	64.03	-14.95	QP	
4	0.1900	20.95	10.70	31.65	54.03	-22.38	AVG	
5	0.4300	21.12	10.55	31.67	57.25	-25.58	QP	
6	0.4300	16.21	10.55	26.76	47.25	-20.49	AVG	
7	0.4780	26.51	10.53	37.04	56.37	-19.33	QP	
8	0.4780	22.35	10.53	32.88	46.37	-13.49	AVG	
9	6.3060	34.98	10.70	45.68	60.00	-14.32	QP	
10	6.3060	33.28	10.70	43.98	50.00	-6.02	AVG	
11	6.5860	33.41	10.67	44.08	60.00	-15.92	QP	
12	6.5860	31.97	10.67	42.64	50.00	-7.36	AVG	

Neutral line:

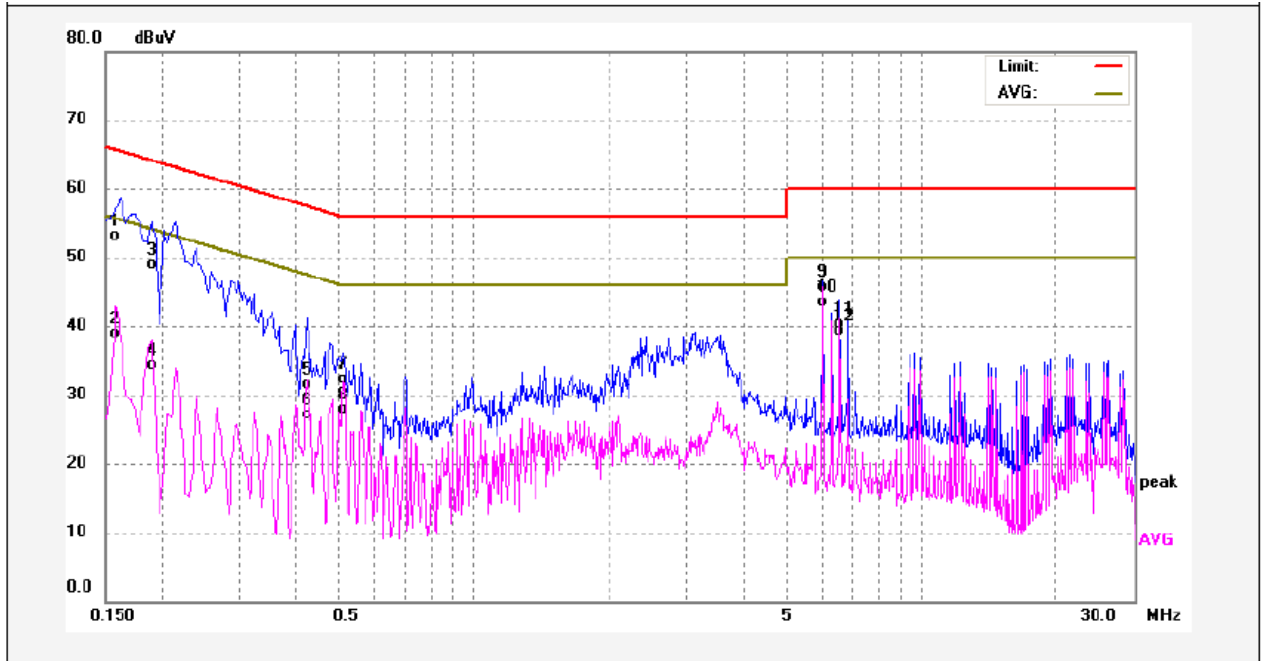

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1580	42.34	10.80	53.14	65.56	-12.42	QP	
2	0.1580	28.03	10.80	38.83	55.56	-16.73	AVG	
3	0.1900	38.13	10.70	48.83	64.03	-15.20	QP	
4	0.1900	23.64	10.70	34.34	54.03	-19.69	AVG	
5	0.4220	20.97	10.56	31.53	57.41	-25.88	QP	
6	0.4220	16.62	10.56	27.18	47.41	-20.23	AVG	
7	0.5100	21.76	10.52	32.28	56.00	-23.72	QP	
8	0.5100	17.32	10.52	27.84	46.00	-18.16	AVG	
9	6.0260	34.98	10.72	45.70	60.00	-14.30	QP	
10	6.0260	32.83	10.72	43.55	50.00	-6.45	AVG	
11	6.5900	29.70	10.67	40.37	60.00	-19.63	QP	
12	6.5900	28.67	10.67	39.34	50.00	-10.66	AVG	

## 8 Radiated Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209

Test Method: ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

FCC Part15 Paragraph 15.209

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	$\mu\text{V/m}$	Distance (m)	$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100**	3	100	$20\log^{(100)}$
88 ~ 216	150**	3	150	$20\log^{(150)}$
216 ~ 960	200**	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

\*\*Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241.

In the emission table above, the tighter limit applies at the band edges.

Note:

According to § 15.209(d), the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

According to § 15.31(f)(2):

3m Measurement level ( $\text{dB}\mu\text{V/m}$ ) = 300m Measurement level ( $\text{dB}\mu\text{V/m}$ ) +  $40\log(300/3)$  ( $\text{dB}\mu\text{V/m}$ ).

### 8.1 EUT Operation

Operating Environment:

Temperature: 25.2 °C

Humidity: 51.5 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation: Ant. 1 loading of 3W

Only the worst-case transmitting mode were record in the report.


## 8.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI 63.10:2013.

The test setup for emission measurement below 30MHz.

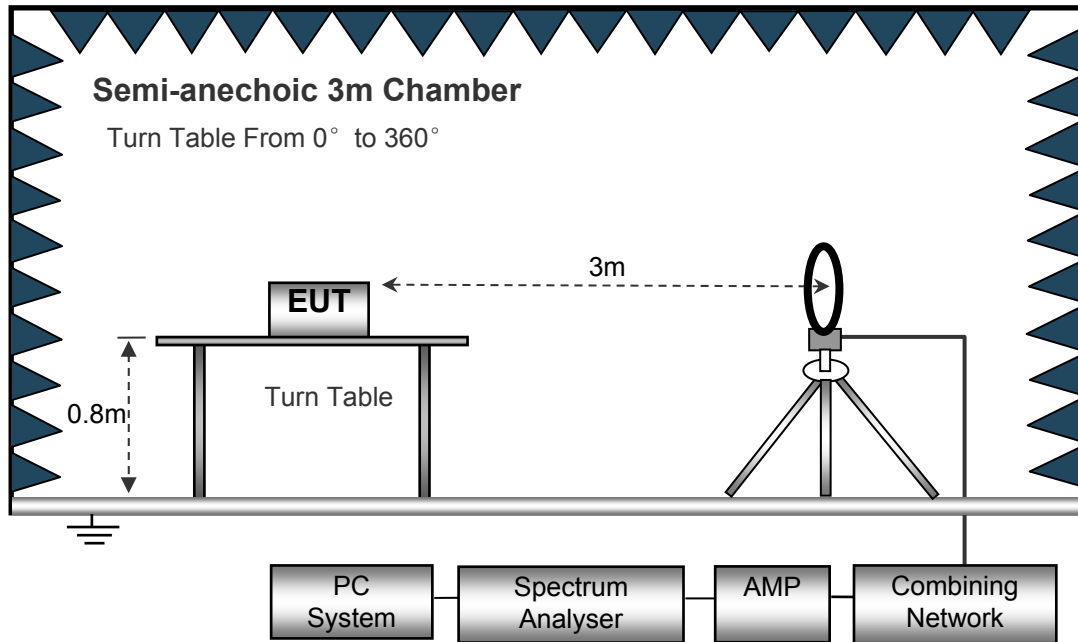

The test setup for emission measurement above 30MHz and up to 1 000MHz.

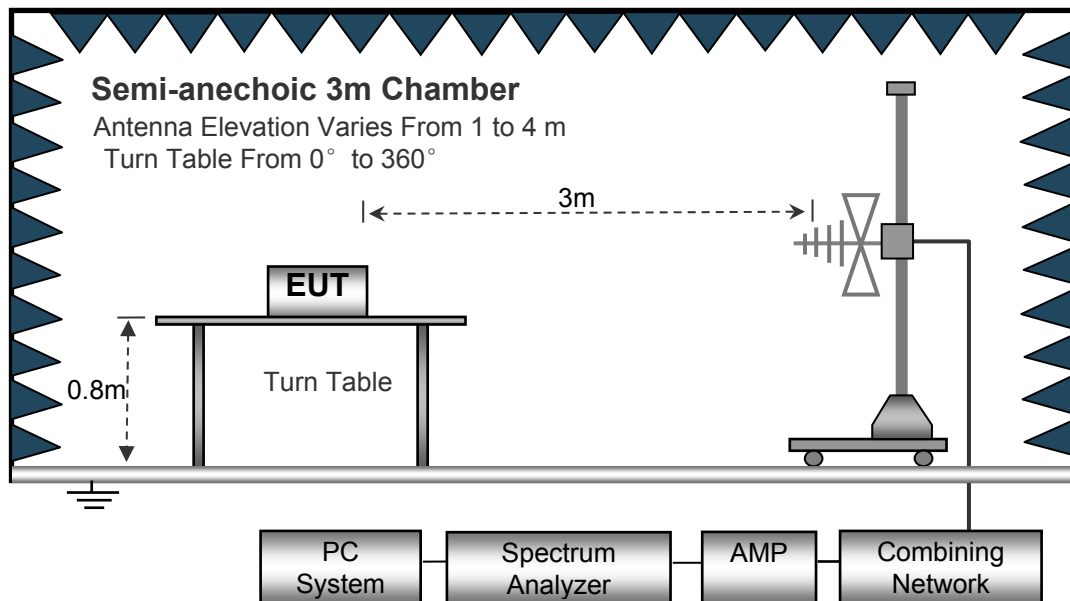

### 8.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed ..... Auto  
 IF Bandwidth..... 10kHz  
 Video Bandwidth..... 10kHz  
 Resolution Bandwidth..... 10kHz

Above 30MHz

Sweep Speed ..... Auto  
 Video Bandwidth..... 300kHz  
 Resolution Bandwidth..... 100kHz

### 8.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane, EUT is set 3m away from the receiving antenna, which is 1.0m above ground plane (Height of the centre of the loop above the GRP of the SAC is 1 m).
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And each emission was to be maximized by changing the polarization of receiving antenna both vertical coaxial and vertical coplanar.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes (X, Y, Z) position (X denotes lying on the table, Y denotes side stand and Z denotes vertical stand). After pre-test, it was found that the worse radiation emission was get at the Z position. So the data shown was the Z position only.

**Note:**

Although these test were performed other than open area test site, adequate comparison measurements were confirmed against 300m open area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788 D01.

### 8.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

## 8.6 Summary of Test Results

### Field Strength of Fundamental Test Result

Frequency	Measurement results	Polarity	Detector	Correct factor	Measurement results (calculated)	Limits	Margin
(MHz)	dB $\mu$ V @3m	0° /90°	QP/Ave	dB/m	dB $\mu$ V/m @3m	dB $\mu$ V/m @3m	dB
0.1471	63.13	90°	Ave	14.32	77.45	104.25	-26.80
-	-	-	-	-	-	-	-

### Harmonics and Spurious emission test result

Test Frequency: 9KHz ~ 30MHz


Frequency	Measurement results	Polarity	Detector	Correct factor	Measurement results (calculated)	Limits	Margin
(MHz)	dB $\mu$ V @3m	0° /90°	QP/Ave	dB/m	dB $\mu$ V/m @3m	dB $\mu$ V/m @3m	dB
0.442	63.13	0°	Ave	13.46	76.59	94.71	-18.12
36.65	0°	QP	13.7	50.4	70.27	-19.92	36.65
-	-	-	-	-	-	-	-

Note: 1. Correct factor = Cable loss + Antenna factor - Amplifier Gain

2. The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement.

**Test Frequency: 30MHz ~ 1 000MHz**


Antenna Polarization: Vertical

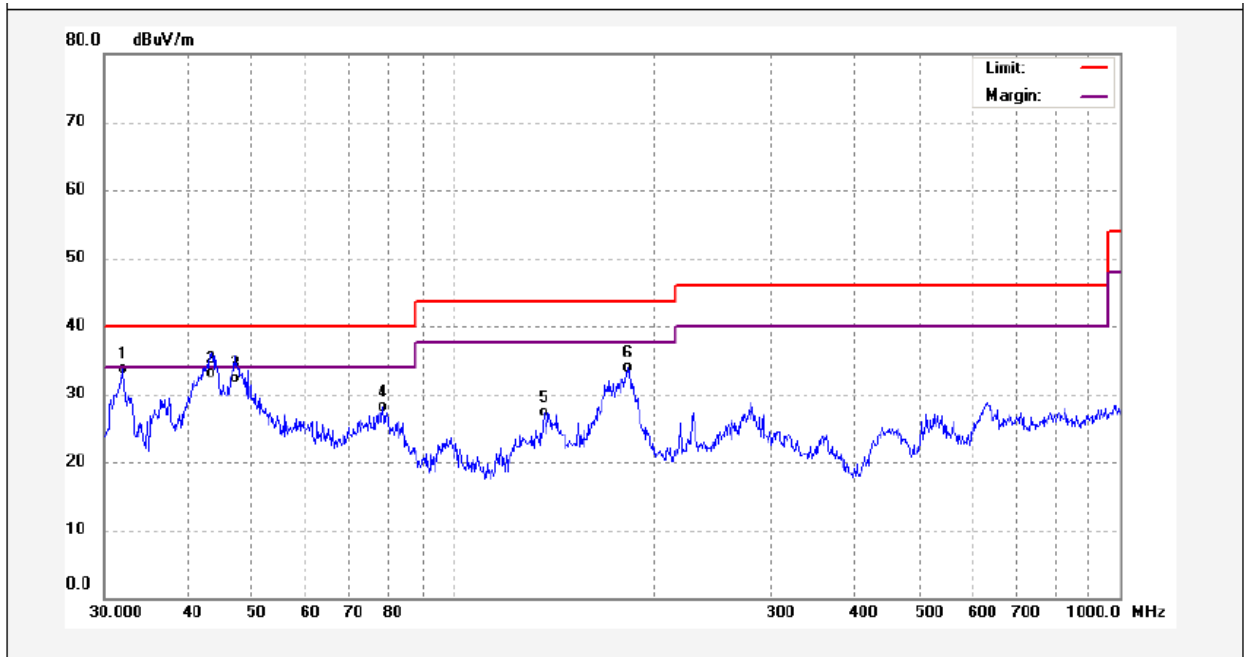

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	31.9544	51.77	-18.08	33.69	40.00	-6.31	QP	
2	43.3534	50.58	-17.48	33.10	40.00	-6.90	QP	
3	46.9947	49.54	-17.14	32.40	40.00	-7.60	QP	
4	78.4133	48.98	-20.94	28.04	40.00	-11.96	QP	
5	136.4598	43.43	-16.08	27.35	43.50	-16.15	QP	
6	182.5592	50.83	-16.98	33.85	43.50	-9.65	QP	



Antenna Polarization: Horizontal

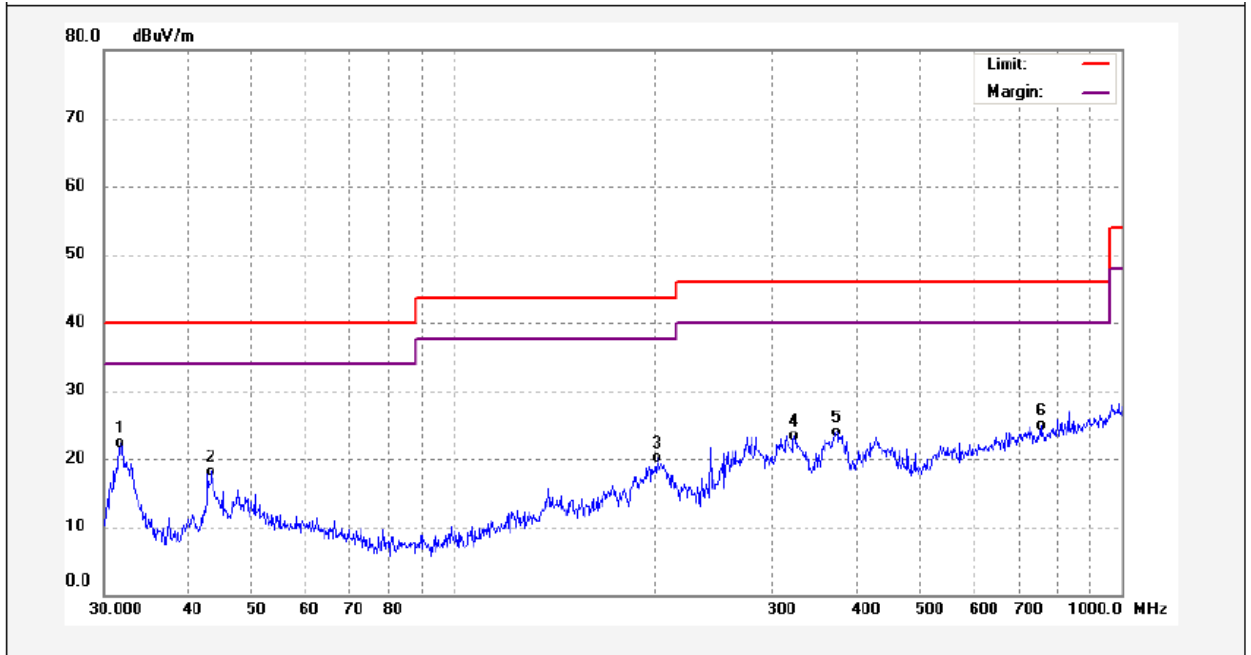

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	31.6202	40.32	-18.10	22.22	40.00	-17.78	QP	
2	43.3534	35.53	-17.48	18.05	40.00	-21.95	QP	
3	201.3930	38.27	-18.24	20.03	43.50	-23.47	QP	
4	323.3204	37.71	-14.31	23.40	46.00	-22.60	QP	
5	373.3112	36.92	-13.10	23.82	46.00	-22.18	QP	
6	755.3873	30.23	-5.27	24.96	46.00	-21.04	QP	

## 9 Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.215

Test Method: ANSI C63.10:2013


### 9.1 Test Procedure

- 1 The transmitter shall be operated at its maximum carrier power measured under normal test conditions;
2. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.
3. The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the occupied bandwidth (OBW), video bandwidth (VBW) is set to approximately 3 times of the RBW.
4. Measured the spectrum width with power higher than 20dB below carrier and 99% Bandwidth.

### 9.2 Test Result

Test Channel (kHz)	99% Bandwidth (kHz)	20dB Bandwidth Emission(kHz)
147.0	0.066	0.087

Test result plot as follows:

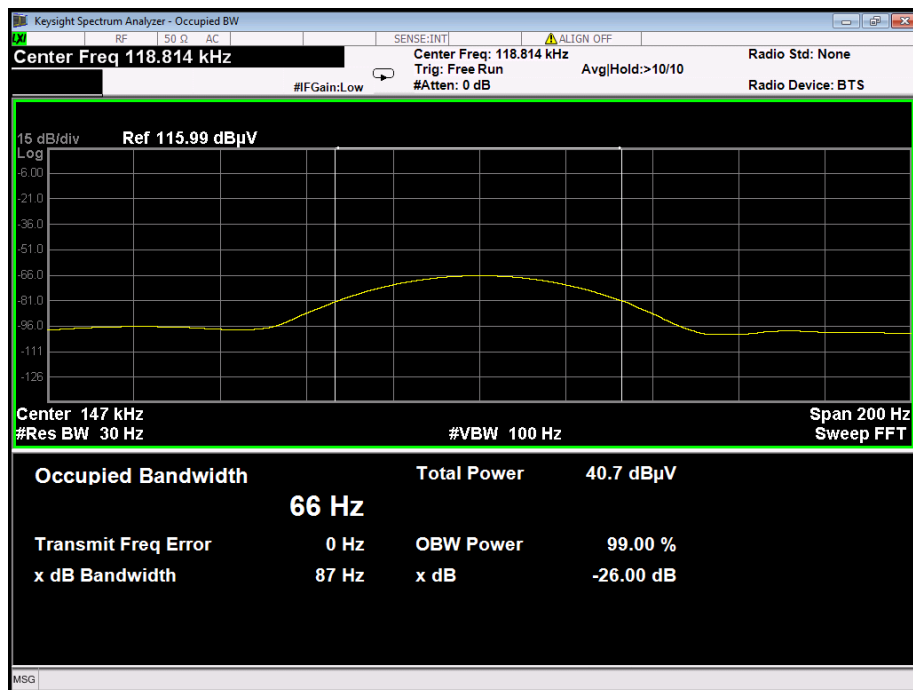

## 10 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement.

Antenna location: Refer to Appendix (Internal Photos).

