



TEST REPORT

Reference No...... : WTZ21F12147454W001
FCC ID : 2AYCY-LM-60-12-U1B2
Applicant..... : ZHUHAI LITECH TECHNOLOGY CO., LTD
Address..... : 15th Build, No.3, Pingdong 6th Road, Nanping Technical Industrial Park Zhuhai China 519060
Manufacturer : The same as above
Address..... : The same as above
Product Name..... : LED Driver
Model No...... : LM-60-12-U1B2, LM-60-12-U2B2, LM-60-24-U1B2, LM-60-24-U2B2, LM-100-24-U1B2, LM-100-24-U2B2
Test specification..... : FCC CFR47 Part 15 Subpart C (Section 15.247): 2020
Date of Receipt sample : 2022-01-04
Date of Test : 2022-01-04 to 2022-01-13
Date of Issue..... : 2022-04-02
Test Report Form No. : WEW-15247A-01A
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Foshan) Co., Ltd.

Address: No.13-19, 2/F., 2nd Building, Sunlink International Machinery City,
Chencun, Shunde District, Foshan, Guangdong, China

Tel:+86-757-23811398

Fax:+86-757-23811381

E-mail:info@waltek.com.cn

Tested by:

Kyrie Yun

Approved by:

Danny Zhou



1 Revision History

Test Report No.	Date of Issue	Description	Status
WTZ21F12147454W001	2022-04-02	Original	Valid

WALTEK



2 Contents

	Page
1 REVISION HISTORY.....	2
2 CONTENTS.....	3
3 GENERAL INFORMATION.....	4
3.1 GENERAL DESCRIPTION OF E.U.T	4
3.2 TECHNICAL CHARACTERISTICS OF EUT	4
3.3 STANDARDS APPLICABLE FOR TESTING.....	4
3.4 TEST FACILITY	5
3.5 SUBCONTRACTED	5
3.6 ABNORMALITIES FROM STANDARD CONDITIONS.....	5
3.7 DISCLAIMER.....	5
4 EUT SETUP AND TEST MODE.....	6
5 EQUIPMENT USED DURING TEST.....	7
5.1 EQUIPMENT LIST	7
5.2 TEST SOFTWARE	8
5.3 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	8
5.4 MEASUREMENT UNCERTAINTY	8
6 SUMMARY OF TEST RESULT	9
6.1 ANTENNA REQUIREMENT.....	10
6.2 RF EXPOSURE REQUIREMENT	11
6.3 RADIATED SPURIOUS EMISSIONS	12
6.4 POWER SPECTRAL DENSITY	29
6.5 DTS BANDWIDTH.....	31
6.6 RF OUTPUT POWER.....	33
6.7 OUT OF BAND EMISSIONS.....	35
6.8 CONDUCTED EMISSIONS.....	40
7 PHOTOGRAPHS TEST SETUP.....	46
7.1 PHOTOGRAPHS - RADIATED EMISSION TEST SETUP.....	46
7.2 PHOTOGRAPHS – CONDUCTED EMISSION TEST SETUP	47
8 PHOTOGRAPHS - CONSTRUCTIONAL DETAILS.....	48
8.1 EUT - EXTERNAL PHOTOS.....	48
8.2 EUT - INTERNAL PHOTOS.....	54



3 General Information

3.1 General Description of E.U.T

Product Name	LED Driver
Model No.	LM-60-12-U1B2, LM-60-12-U2B2, LM-60-24-U1B2, LM-60-24-U2B2, LM-100-24-U1B2, LM-100-24-U2B2
Model Description	All models are using the same RF module and electric circuit, but the two series are with different PCB layout. The models with prefix 'LM-60' are identical except for the appearance. The models with prefix 'LM-100' are identical except for the appearance. Therefore the full tests were performed on model LM-60-12-U1B2, additional DV and Radiated Spurious Emissions was performed on model LM-100-24-U2B2.
Rated Voltage	AC 120-277V, 50/60Hz
Battery Capacity	---
Power Adapter	---

3.2 Technical Characteristics of EUT

Bluetooth Version	V5.0(BLE mode)
Frequency Range	2402-2480MHz
RF Output Power	-6.929dBm (Conducted)
Modulation	GFSK
Data Rate	1Mbps
Quantity of Channels	40
Channel Separation	2MHz
Type of Antenna	PCB Printed Antenna
Antenna Gain	2dBi

3.3 Standards Applicable for Testing

The tests were performed according to following standards:

FCC Rules Part 15.247	Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz
558074 D01 15.247 Meas Guidance v05r02	Guidance For Compliance Measurements On Digital Transmission System, Frequency Hopping Spread Spectrum System, And Hybrid System Devices Operating Under Section 15.247 Of The FCC Rules
ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices



3.4 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: 21895-1**

Waltek Testing Group (Foshan) Co., Ltd. has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration IC number: 21895-1, Nov. 14, 2016.

- **FCC – Registration No.: 820106**

Waltek Testing Group (Foshan) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 820106, August 16, 2018

- **FCC – Designation No.: CN5034**

Waltek Testing Group (Foshan) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation No. CN5034.

- **NVLAP – Lab Code: 600191-0**

Waltek Testing Group (Foshan) Co., Ltd. EMC Laboratory is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 600191-0.

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

3.5 Subcontracted

Whether parts of tests for the product have been subcontracted to other labs:

☐ Yes ☒ No

If Yes, list the related test items and lab information:

Test items: ---

Lab information: ---

3.6 Abnormalities from Standard Conditions

None.

3.7 Disclaimer

The antenna gain information is provided by the customer. The laboratory is not responsible for the accuracy of the antenna gain information.



4 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List

Test Mode	Description	Remark
TM1	Low Channel	2402MHz
TM2	Middle Channel	2440MHz
TM3	High Channel	2480MHz

Test Conditions

Temperature:	22~25°C
Relative Humidity:	50~55%
Atmospheric pressure:	101.9kPa

WALTEK



5 Equipment Used during Test

5.1 Equipment List

☒ Conducted Emissions 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal Date	Cal Due Date
1.	EMI Test Receiver	R&S	ESR3	102423	2022-01-06	2023-01-05
2.	LISN	R&S	ENV216	101343	2022-01-06	2023-01-05
3.	Cable	HUBER+SUHNER	CBL2-NN-6M	223NN624	2022-01-06	2023-01-05
4.	Switch	CD	RSU-A4 18G	RSUA4008	2022-01-06	2023-01-05
☐ Conducted Emissions 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal Date	Cal Due Date
1.	EMI Test Receiver	R&S	ESCI	101178	2022-01-06	2023-01-05
2.	LISN	R&S	ENV216	101215	2022-01-06	2023-01-05
3.	Cable	HUBER+SUHNER	CBL2-NN-6M	6102701	2022-01-06	2023-01-05
4.	Switch	ESE	RSU/M2	---	2022-01-07	2023-01-06
☐ Conducted Emissions 3#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal Date	Cal Due Date
1.	EMI Test Receiver	R&S	ESR3	102842	2022-01-06	2023-01-05
2.	LISN	R&S	ENV216	101542	2022-01-06	2023-01-05
3.	Cable	YIHENG	LMR195UF-NMNM-2.5	---	2022-01-07	2023-01-06
4.	Manual RF Switch	YIHENG	SW-2	RSU0402	2022-01-07	2023-01-06
☒ Radiation Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	3m Semi-anechoic Chamber	CHANGCHUANG	9m×6m×6m	-	2021-01-11	2024-01-10
2.	EMI Test Receiver	RS	ESR7	101566	2022-01-07	2023-01-06
3.	EMC Analyzer	Agilent	N9020A	MY48011796	2021-06-04	2022-06-03
4.	Active Loop Antenna	SCHWARZBECK	FMZB1519B	00004	2022-01-10	2023-01-09
5.	Trilog Broadband Antenna	SCHWARZBECK	VULB 9162	9162-117	2022-01-09	2023-01-08
6.	Coaxial Cable (below 1GHz)	H+S	CBL3-NN-12+3 m	214NN320	2022-01-07	2023-01-06
7.	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	01561	2022-01-09	2023-01-08
8.	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	01119	2022-01-09	2023-01-08
9.	Coaxial Cable (above 1GHz)	Times-Microwave	CBL5-NN	-	2022-01-06	2023-01-05
10.	Amplifier	Lunar E M	LNA1G18-40	20160501002	2022-01-06	2023-01-05



☒ RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	Spectrum Analyzer	Agilent	N9020A	MY48011796	2021-06-04	2022-06-03
2.	Analog Signal Generator	Agilent	N5181A	MY48180720	2022-01-06	2023-01-05
3.	RF Control Unit	CHANGCHUANG	JS0806-2	-	2022-01-06	2023-01-05

☐: Not Used

☒: Used

5.2 Test Software

Description	Manufacturer	Model	Version
EMI Test Software (Conducted Emission 1#)	FARATRONIC	EZ-EMC	EMEC-3A1
EMI Test Software (Conducted Emission 2#)	FARATRONIC	EZ-EMC	CON-03A1
EMI Test Software (Conducted Emission 3#)	FARATRONIC	EZ-EMC	COM 3A1.1
EMI Test Software (Radiated Emission)	FARATRONIC	EZ-EMC	RA-03A1-1
RF Conducted Test Software	TONSCEND	JS1120-2	V2.6

5.3 Special Accessories and Auxiliary Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.
1.	/	/	/	/

5.4 Measurement Uncertainty

Parameter	Uncertainty
RF Output Power	±0.95dB
Occupied Bandwidth	±1.5%
Conducted Spurious Emission	±2.7dB
Conducted Emission	±3.2dB
Transmitter Spurious Emission	±4.1dB (for 30MHz-1GHz)
	±5.0dB (for 1GHz-18GHz)



6 Summary of Test Result

Test Items	FCC Rules	Result
Antenna Requirement	§15.203; §15.247(b)(4)(i)	Compliant
Restricted Band of Operation	§15.205	Compliant
Conducted Emissions	§15.207(a)	Compliant
Radiated Spurious Emissions	§15.209(a)	Compliant
Power Spectral Density	§15.247(e)	Compliant
DTS Bandwidth	§ 15.247(a)(2)	Compliant
RF Output Power	§15.247(b)(3)	Compliant
Band edge (Out of Band Emissions)	§15.247(d)	Compliant
RF Exposure	§2.1093	Compliant

Remark:

Pass Test item meets the requirement

Fail Test item does not meet the requirement

N/A Test case does not apply to the test object

WALTEK




6.1 Antenna Requirement

6.1.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

6.1.2 Evaluation Information

The EUT has a PCB Printed Antenna, the gain is 2 dBi, fulfil the requirement of this section.

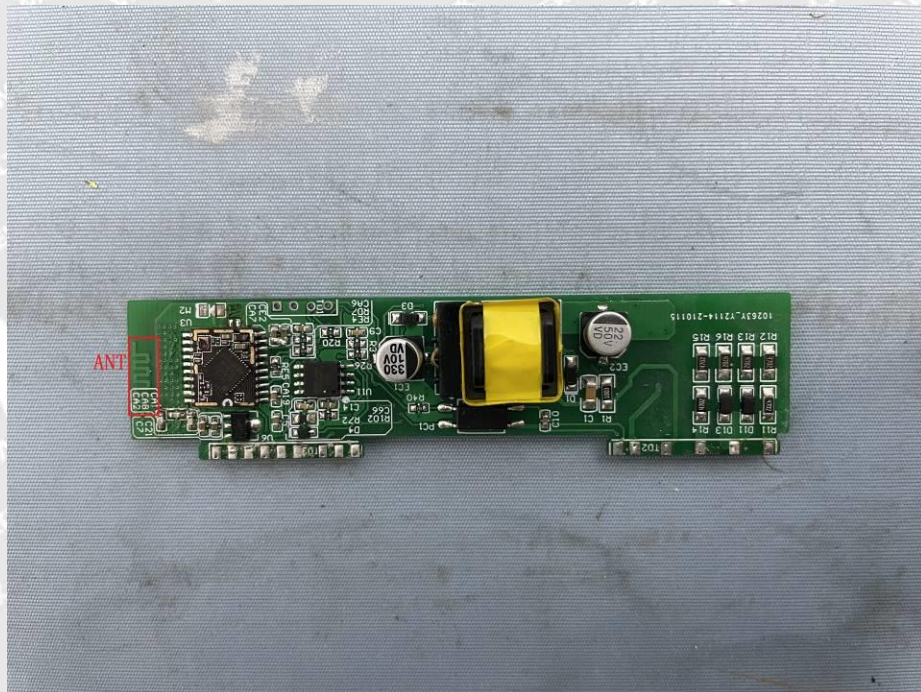



6.2 RF Exposure Requirement

6.2.1 Standard Applicable

According to §1.1307 and §2.1093, the portable transmitter must comply the RF exposure requirements.

6.2.2 Test Result

This product complied with the requirement of the RF exposure; please see the RF Exposure Report WTZ21F12147454W002.

WALTEK



6.3 Radiated Spurious Emissions

6.3.1 Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

6.3.2 Test Procedure

- 1) The EUT is placed on a turntable, which is 0.8m(Below 1G) 1.5m(above 1G)above ground plane.
- 2) The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3) EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- 4) Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 5) And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 6) Repeat above procedures until the measurements for all frequencies are complete.
- 7) The radiation measurements are tested under 3-axes(X, Y, Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the Z position. So the data shown was the Z position only.




6.3.3 Test Setup

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.


The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The test setup for emission measurement below 30MHz.

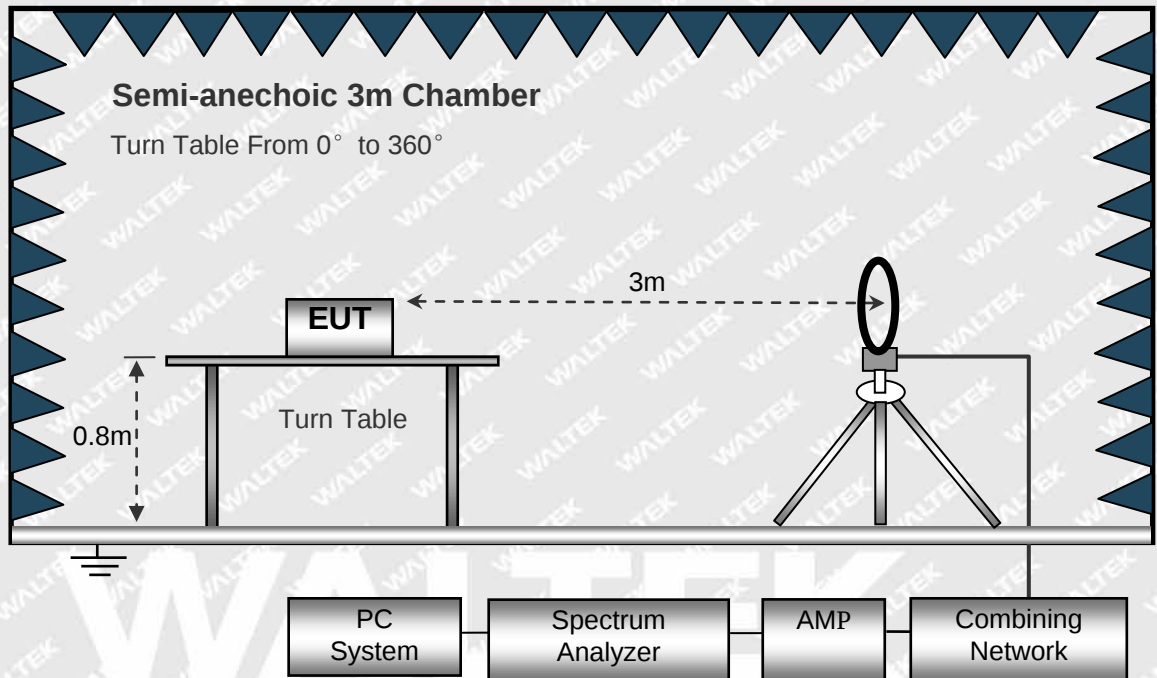


The test setup for emission measurement from 30 MHz to 1 GHz.

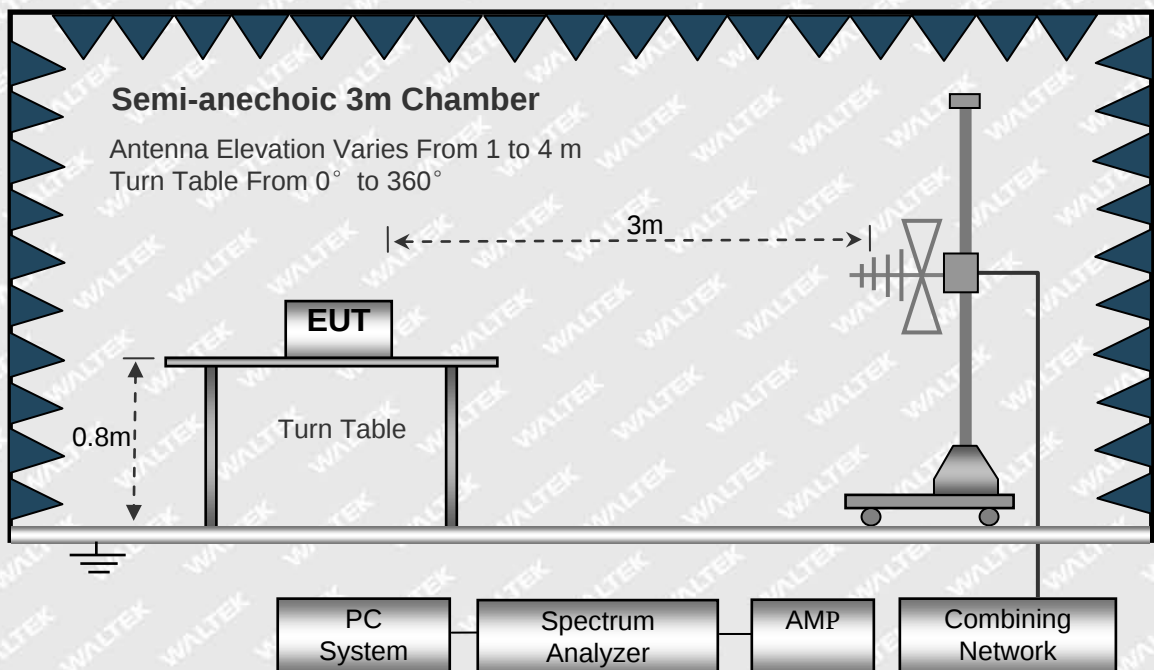



The test setup for emission measurement above 1 GHz.

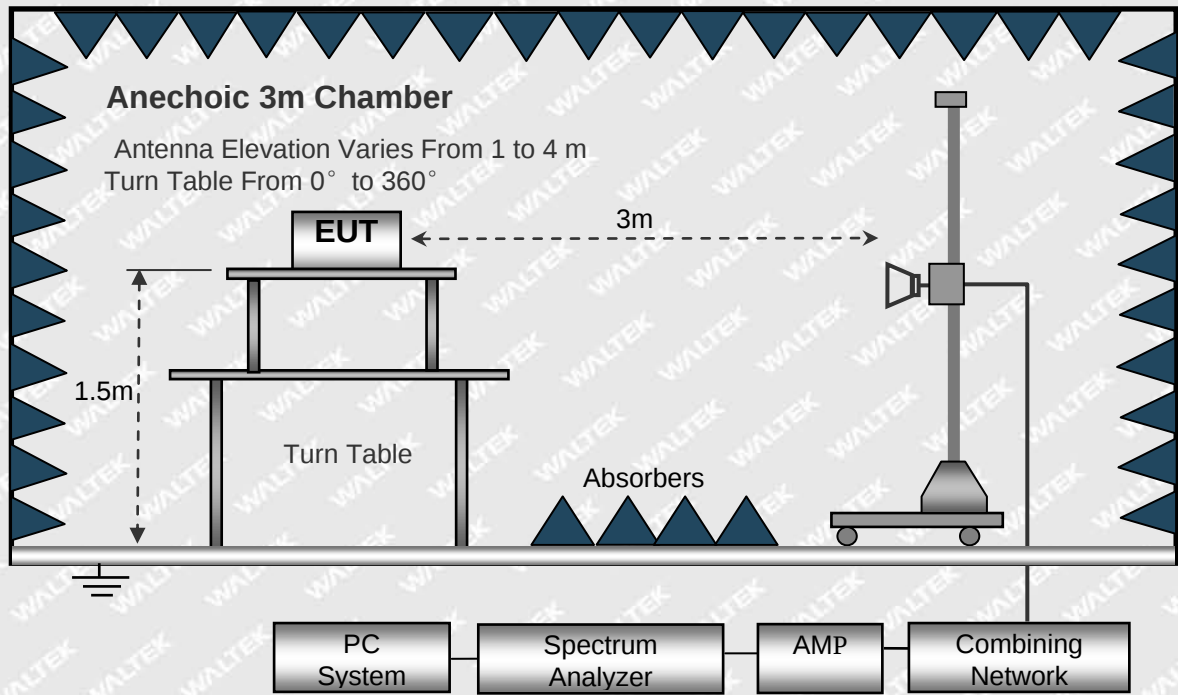

6.3.4 Spectrum Analyzer Setup

9KHz-30MHz

RBW=10kHz

VBW=30kHz

Sweep time=Auto

Trace=Max hold

Detector function=peak

30MHz-1GHz

RBW=120kHz

VBW=300kHz

Sweep time=Auto

Trace=Max hold

Detector function=peak, QP

Above 1GHz

RBW=1MHz

VBW=3MHz(Peak), 10MHz(AV)

Sweep time=Auto

Trace=Max hold

Detector function=peak, AV

6.3.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Corr. Factor}$$

$$\text{Corr. Factor} = \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$




6.3.6 Test Results

Test Frequency: 9 kHz~30 MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency: 30MHz ~ 1GHz


Model: LM-60-12-U1B2 Test Channel: Low Polarization: Vertical

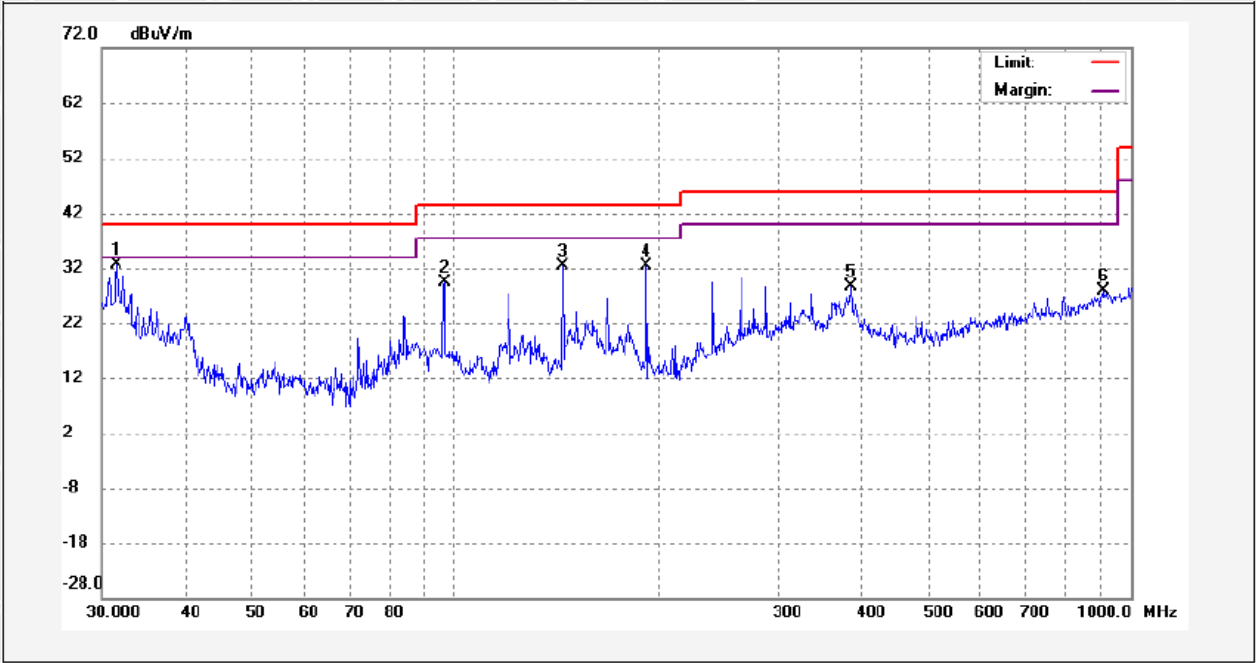

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	31.5206	21.24	11.40	32.64	40.00	-7.36	peak	
2	96.0986	18.18	11.12	29.30	43.50	-14.20	peak	
3	144.1830	21.34	11.16	32.50	43.50	-11.00	peak	
4	192.2163	18.20	14.25	32.45	43.50	-11.05	peak	
5	384.4707	10.24	18.42	28.66	46.00	-17.34	peak	
6	907.7548	0.09	27.77	27.86	46.00	-18.14	peak	




Model: LM-60-12-U1B2 Test Channel: Low Polarization: Horizontal

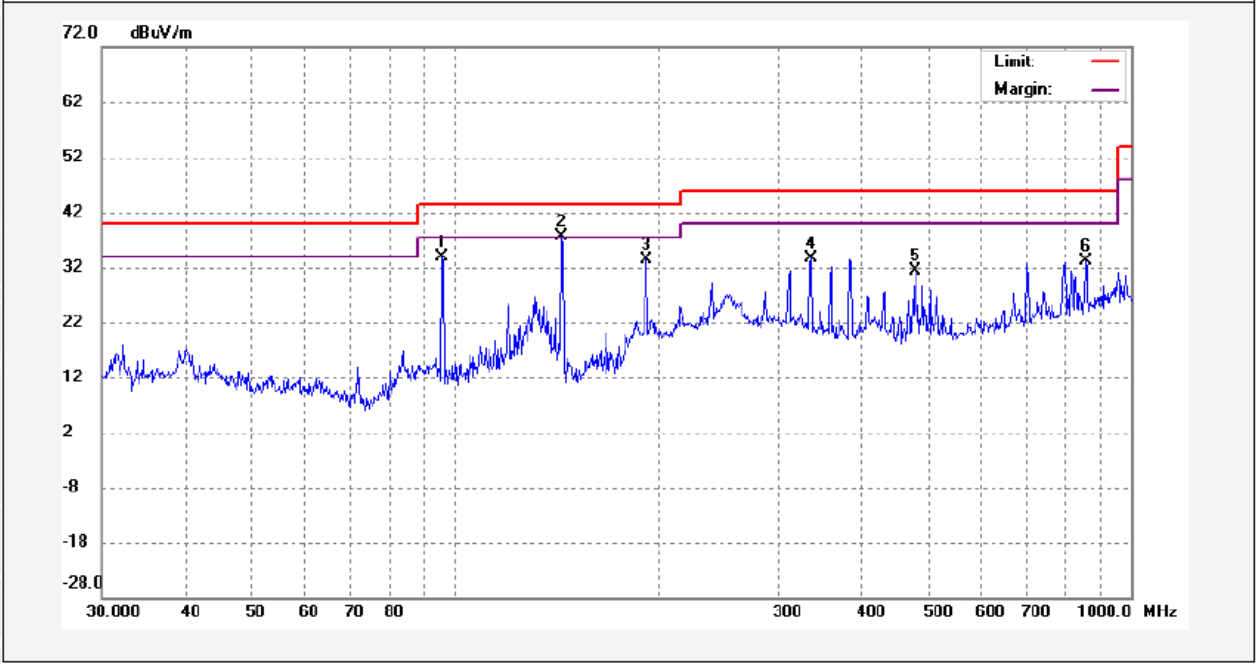

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	95.6280	21.95	11.87	33.82	43.50	-9.68	peak	
2	143.4265	27.65	9.92	37.57	43.50	-5.93	peak	
3	191.8122	20.73	12.59	33.32	43.50	-10.18	peak	
4	335.5642	17.06	16.67	33.73	46.00	-12.27	peak	
5	480.3591	11.65	19.65	31.30	46.00	-14.70	peak	
6	855.8235	6.89	26.21	33.10	46.00	-12.90	peak	




Model: LM-60-12-U1B2 Test Channel: Middle Polarization: Vertical

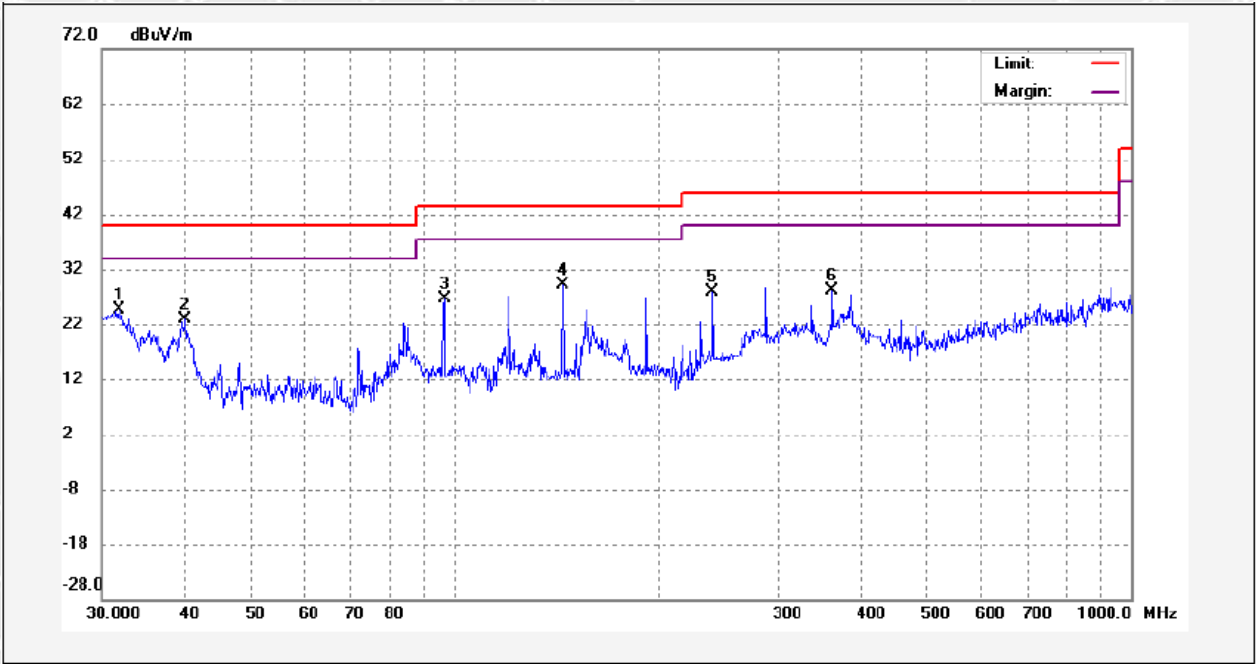

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	31.7758	13.20	11.47	24.67	40.00	-15.33	peak	
2	39.8822	10.06	12.86	22.92	40.00	-17.08	peak	
3	96.0986	15.40	11.12	26.52	43.50	-16.98	peak	
4	144.1325	17.97	11.16	29.13	43.50	-14.37	peak	
5	240.3242	12.55	15.38	27.93	46.00	-18.07	peak	
6	360.4476	10.32	17.85	28.17	46.00	-17.83	peak	



Model: LM-60-12-U1B2 Test Channel: Middle Polarization: Horizontal

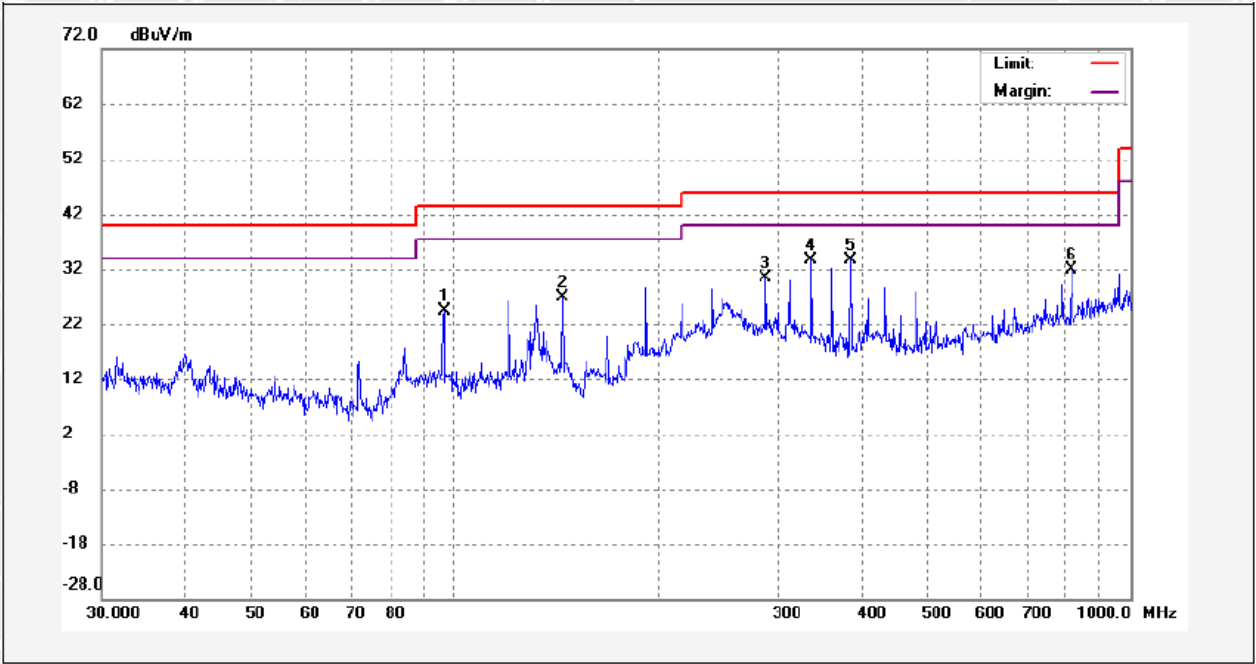


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	96.1323	12.37	11.91	24.28	43.50	-19.22	peak	
2	144.1830	16.92	9.91	26.83	43.50	-16.67	peak	
3	288.3946	14.44	16.01	30.45	46.00	-15.55	peak	
4	336.3888	16.97	16.69	33.66	46.00	-12.34	peak	
5	384.4707	16.33	17.37	33.70	46.00	-12.30	peak	
6	817.1131	6.49	25.47	31.96	46.00	-14.04	peak	



Model: LM-60-12-U1B2

Test Channel: High


Polarization: Vertical

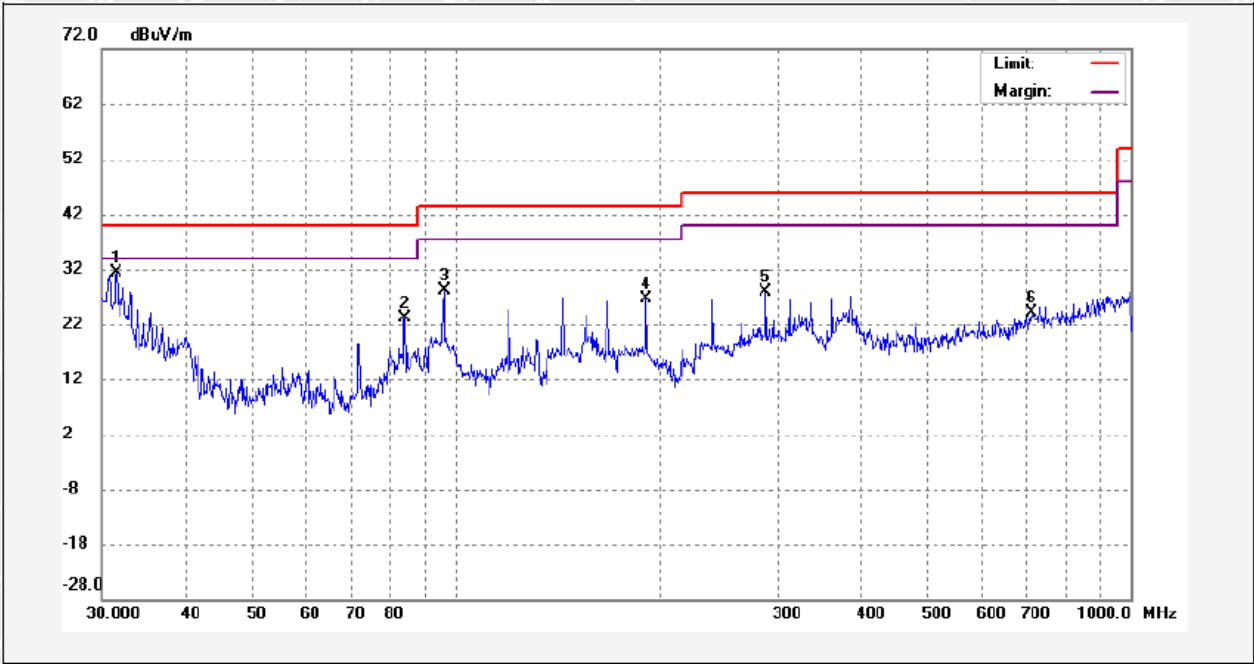

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	31.5095	19.99	11.40	31.39	40.00	-8.61	peak	
2	84.1100	12.57	10.60	23.17	40.00	-16.83	peak	
3	96.1323	17.05	11.12	28.17	43.50	-15.33	peak	
4	192.2836	12.36	14.25	26.61	43.50	-16.89	peak	
5	288.3946	11.51	16.34	27.85	46.00	-18.15	peak	
6	713.1723	-0.96	25.04	24.08	46.00	-21.92	peak	




Model: LM-60-12-U1B2 Test Channel: High Polarization: Horizontal

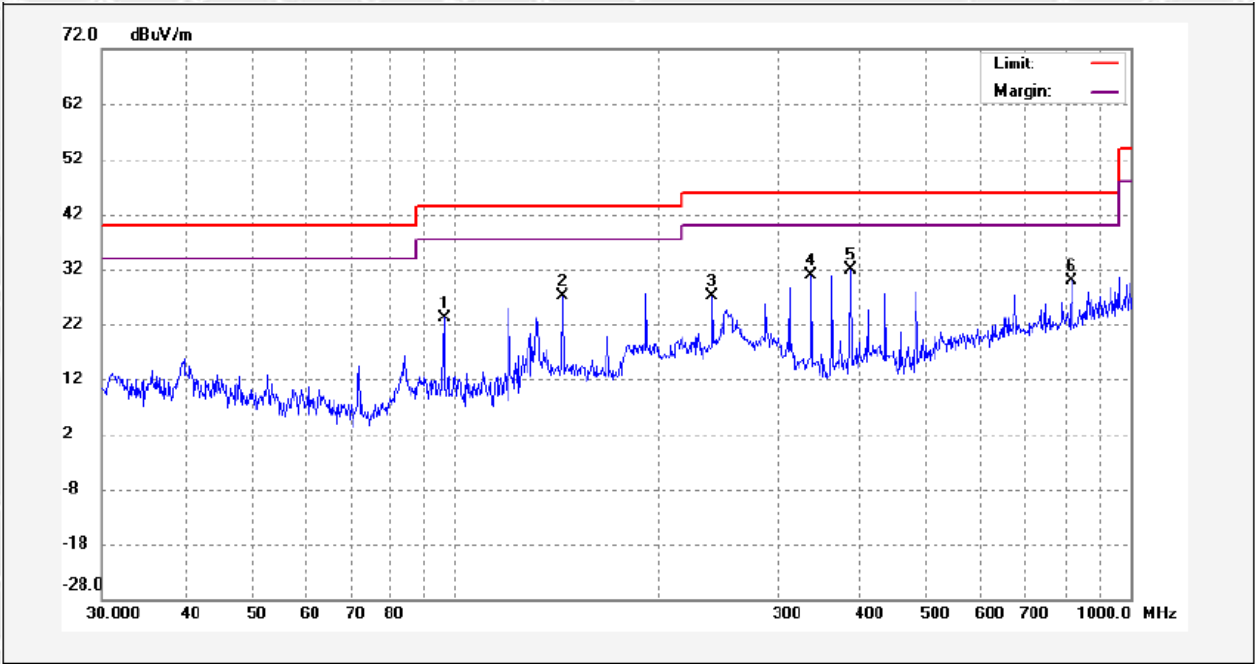

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	96.1323	11.34	11.91	23.25	43.50	-20.25	peak	
2	144.1830	17.20	9.91	27.11	43.50	-16.39	peak	
3	240.3242	12.29	14.80	27.09	46.00	-18.91	peak	
4	336.5068	14.30	16.69	30.99	46.00	-15.01	peak	
5	384.4707	14.61	17.37	31.98	46.00	-14.02	peak	
6	817.3997	4.41	25.48	29.89	46.00	-16.11	peak	




Model: LM-100-24-U2B2 Test Channel: Low Polarization: Vertical

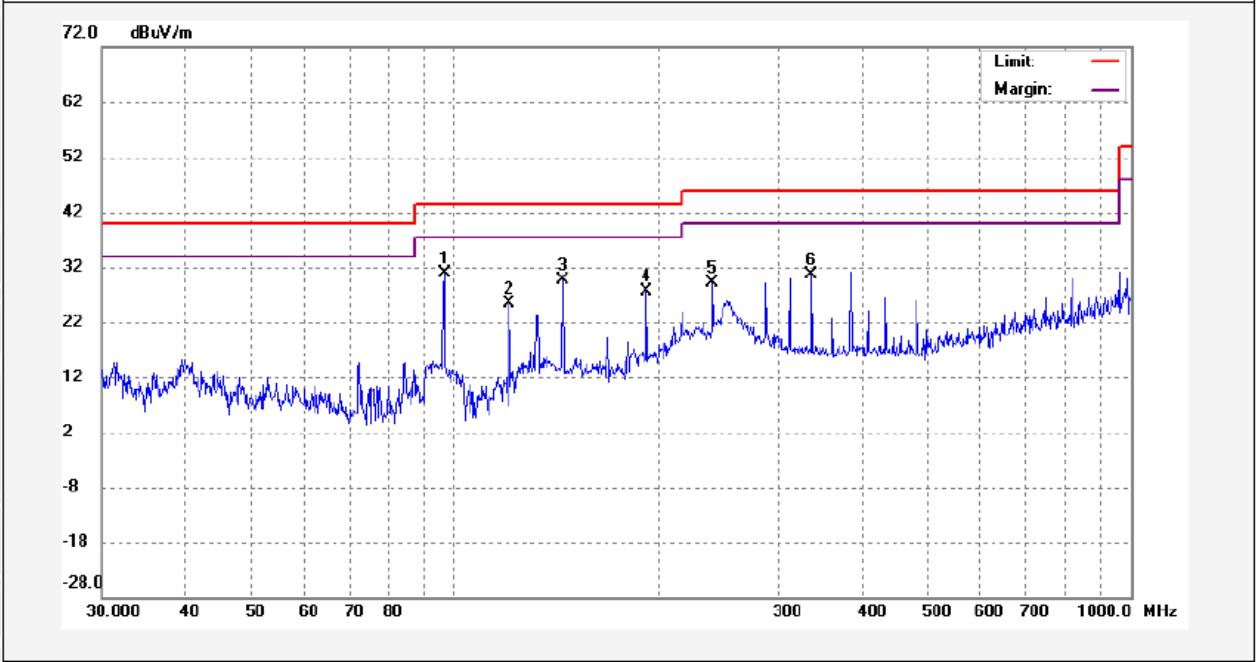

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	96.1323	19.73	11.12	30.85	43.50	-12.65	peak	
2	120.1502	12.82	12.44	25.26	43.50	-18.24	peak	
3	144.1830	18.38	11.16	29.54	43.50	-13.96	peak	
4	192.2163	13.41	14.25	27.66	43.50	-15.84	peak	
5	240.3242	13.84	15.38	29.22	46.00	-16.78	peak	
6	336.5068	13.76	16.76	30.52	46.00	-15.48	peak	




Model: LM-100-24-U2B2 Test Channel: Low Polarization: Horizontal

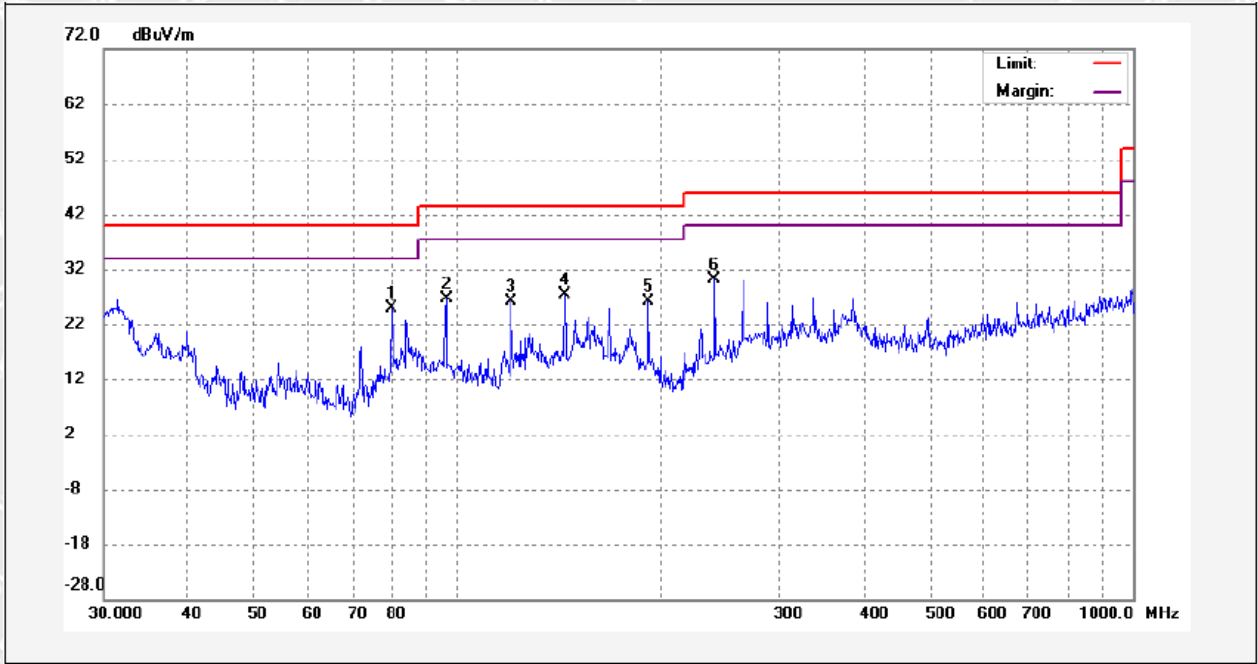

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	79.9964	14.49	10.32	24.81	40.00	-15.19	peak	
2	96.1323	15.41	11.12	26.53	43.50	-16.97	peak	
3	120.1502	13.81	12.44	26.25	43.50	-17.25	peak	
4	144.1830	16.24	11.16	27.40	43.50	-16.10	peak	
5	192.2836	11.92	14.25	26.17	43.50	-17.33	peak	
6	240.3242	14.78	15.38	30.16	46.00	-15.84	peak	




Model: LM-100-24-U2B2 Test Channel: Middle Polarization: Vertical

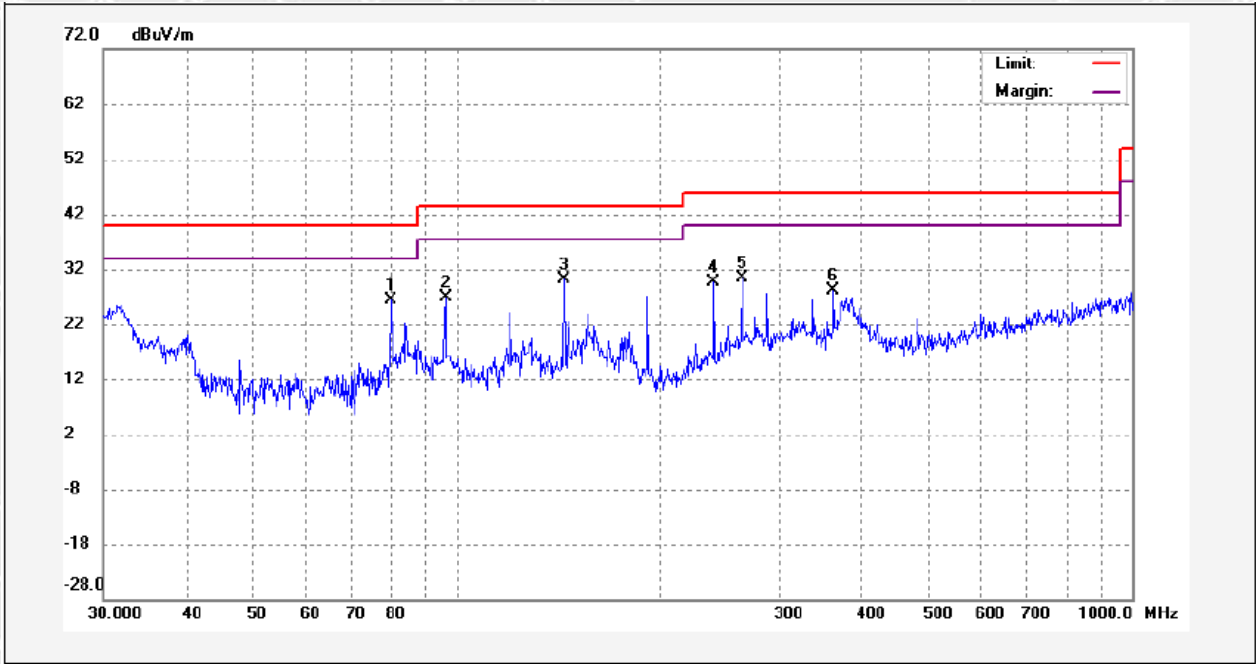

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	79.9964	15.99	10.32	26.31	40.00	-13.69	peak	
2	96.1323	15.81	11.12	26.93	43.50	-16.57	peak	
3	144.1830	18.92	11.16	30.08	43.50	-13.42	peak	
4	240.3242	14.14	15.38	29.52	46.00	-16.48	peak	
5	264.3745	14.55	15.77	30.32	46.00	-15.68	peak	
6	360.5741	10.24	17.84	28.08	46.00	-17.92	peak	




Model: LM-100-24-U2B2 Test Channel: Middle Polarization: Horizontal

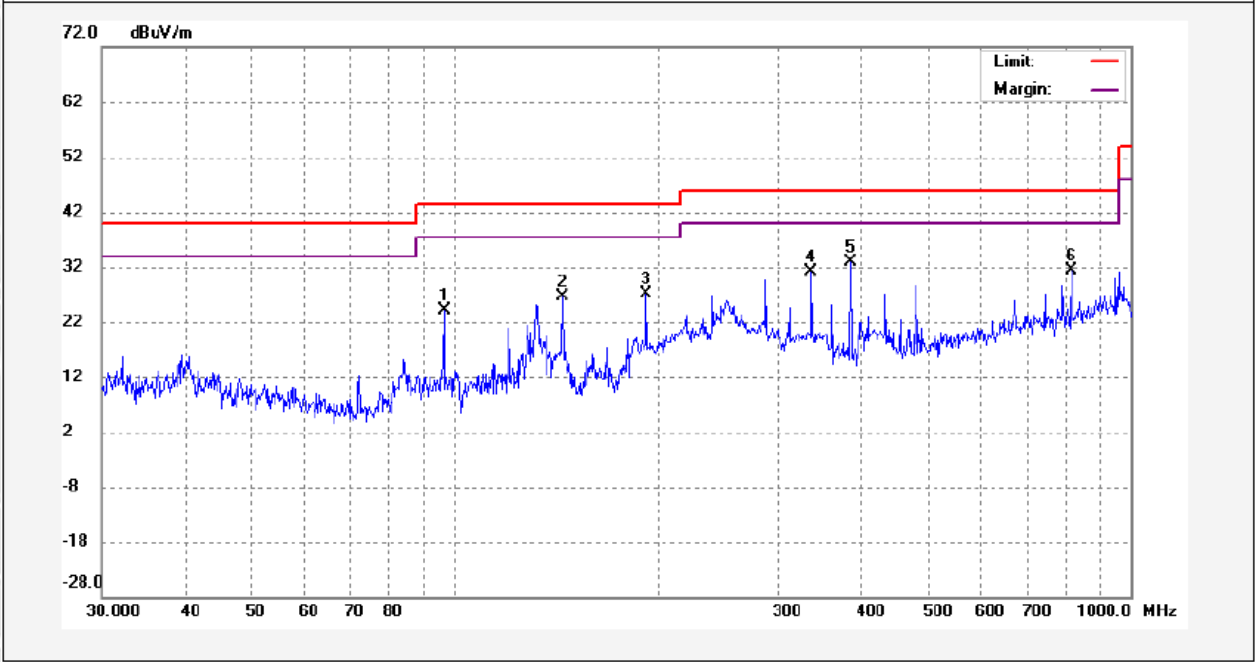

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	96.1323	12.25	11.91	24.16	43.50	-19.34	peak	
2	144.2336	16.62	9.91	26.53	43.50	-16.97	peak	
3	192.2836	14.46	12.64	27.10	43.50	-16.40	peak	
4	336.5068	14.51	16.69	31.20	46.00	-14.80	peak	
5	384.6055	15.43	17.38	32.81	46.00	-13.19	peak	
6	817.3997	6.01	25.48	31.49	46.00	-14.51	peak	




Model: LM-100-24-U2B2 Test Channel: High Polarization: Vertical

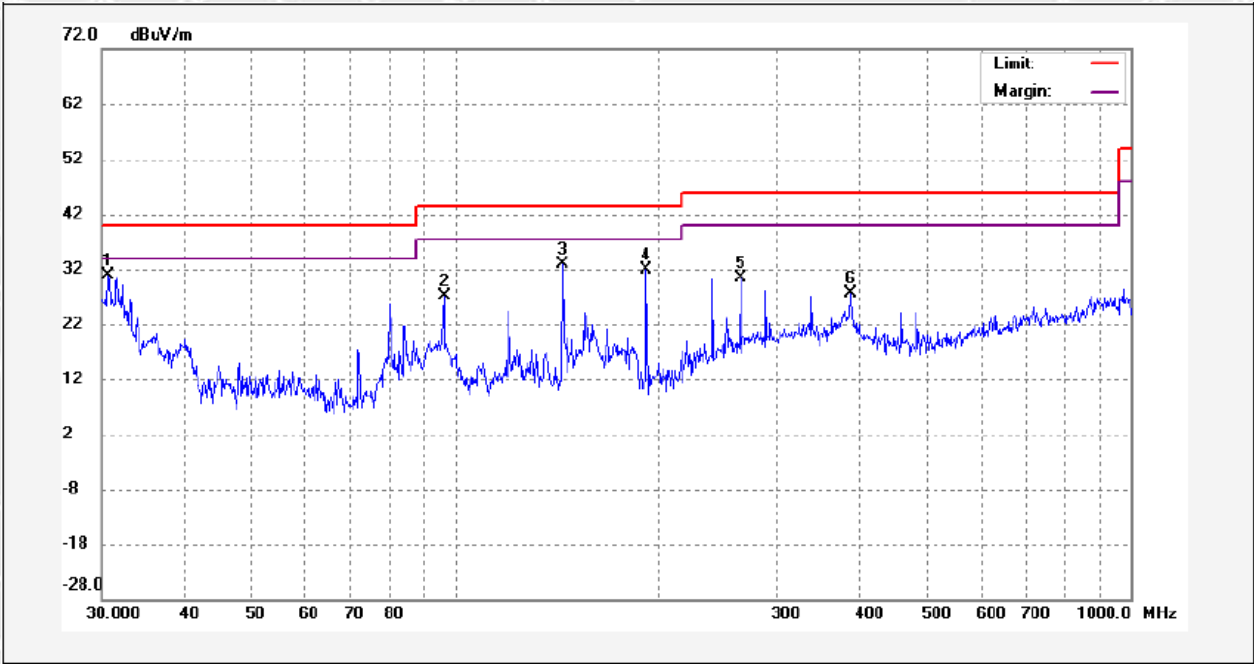

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	30.7347	19.68	11.25	30.93	40.00	-9.07	peak	
2	96.1323	16.10	11.12	27.22	43.50	-16.28	peak	
3	144.2336	21.62	11.16	32.78	43.50	-10.72	peak	
4	192.2836	17.59	14.25	31.84	43.50	-11.66	peak	
5	264.4674	14.49	15.77	30.26	46.00	-15.74	peak	
6	384.6055	9.28	18.42	27.70	46.00	-18.30	peak	



Model: LM-100-24-U2B2 Test Channel: High Polarization: Horizontal

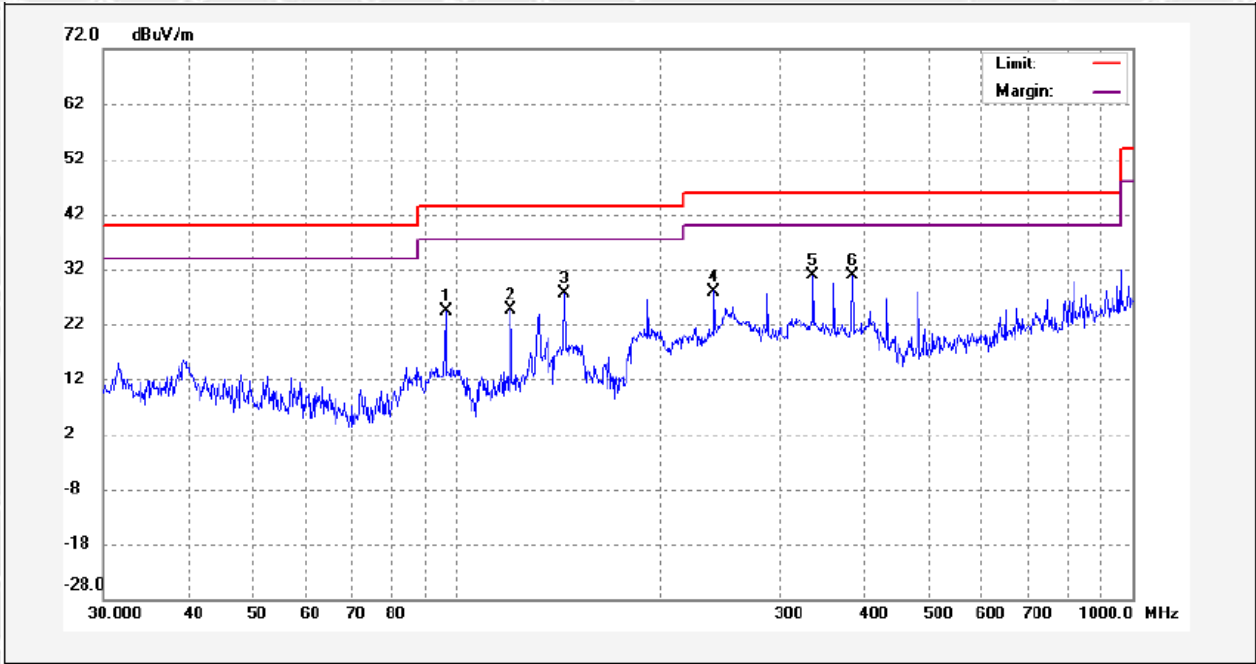

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	96.1323	12.35	11.91	24.26	43.50	-19.24	peak	
2	120.1502	13.56	11.05	24.61	43.50	-18.89	peak	
3	144.1830	17.67	9.91	27.58	43.50	-15.92	peak	
4	240.3242	13.20	14.80	28.00	46.00	-18.00	peak	
5	336.5068	14.17	16.69	30.86	46.00	-15.14	peak	
6	384.6055	13.53	17.38	30.91	46.00	-15.09	peak	

**Test Frequency: 1GHz~18GHz**

Frequency (MHz)	Reading (dBμV/m)	Detector	Polar (H/V)	Corrected Factor (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
Model LM-60-12-U1B2_Low Channel-2402MHz							
5112.50	49.48	Peak	H	-2.93	46.55	74	-27.45
5112.50	38.9	AVG	H	-2.93	35.97	54	-18.03
11974.50	43.57	Peak	H	10.34	53.91	74	-20.09
11974.50	32.65	AVG	H	10.34	42.99	54	-11.01
5982.00	48.06	Peak	V	-0.70	47.36	74	-26.64
5982.00	37.63	AVG	V	-0.70	36.93	54	-17.07
11845.25	43.1	Peak	V	10.25	53.35	74	-20.65
11845.25	33.52	AVG	V	10.25	43.77	54	-10.23
Model LM-60-12-U1B2_Middle Channel-2440MHz							
7368.50	46.95	Peak	H	3.30	50.25	74	-23.75
7368.50	37.53	AVG	H	3.30	40.83	54	-13.17
11116.75	43.59	Peak	H	10.36	53.95	74	-20.05
11116.75	34.35	AVG	H	10.36	44.71	54	-9.29
6217.00	35.6	Peak	V	0.06	35.66	74	-38.34
6217.00	51.82	AVG	V	0.06	51.88	54	-2.12
11598.50	43.15	Peak	V	10.17	53.32	74	-20.68
11598.50	34.21	AVG	V	10.17	44.38	54	-9.62
Model LM-60-12-U1B2_High Channel-2480MHz							
5888.00	47.27	Peak	H	-1.39	45.88	74	-28.12
5888.00	37.66	AVG	H	-1.39	36.27	54	-17.73
10447.00	44.63	Peak	H	8.53	53.16	74	-20.84
10447.00	35.75	AVG	H	8.53	44.28	54	-9.72
7791.50	46.78	Peak	V	3.74	50.52	74	-23.48
7791.50	36.84	AVG	V	3.74	40.58	54	-13.42
11868.75	44	Peak	V	10.26	54.26	74	-19.74
11868.75	35.6	AVG	V	10.26	45.86	54	-8.14



Frequency (MHz)	Reading (dBμV/m)	Detector	Polar (H/V)	Corrected Factor (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
Model LM-100-24-U2B2_Low Channel-2402MHz							
5465.00	48.43	Peak	H	-2.32	46.11	74	-27.89
5465.00	37.93	AVG	H	-2.32	35.61	54	-18.39
9859.50	44.46	Peak	H	7.30	51.76	74	-22.24
9859.50	35.49	AVG	H	7.30	42.79	54	-11.21
6217.00	48.00	Peak	V	0.06	48.06	74	-25.94
6217.00	38.33	AVG	V	0.06	38.39	54	-15.61
11093.25	43.90	Peak	V	9.68	53.58	74	-20.42
11093.25	34.71	AVG	V	9.68	44.39	54	-9.61
Model LM-100-24-U2B2_Middle Channel-2440MHz							
6593.00	46.42	Peak	H	1.28	47.70	74	-26.30
6593.00	35.61	AVG	H	1.28	36.89	54	-17.11
12244.75	42.64	Peak	H	10.46	53.10	74	-20.90
12244.75	33.75	AVG	H	10.46	44.21	54	-9.79
6546.00	45.73	Peak	V	1.13	46.86	74	-27.14
6546.00	35.68	AVG	V	1.13	36.81	54	-17.19
11340.00	43.54	Peak	V	9.95	53.49	74	-20.51
11340.00	34.24	AVG	V	9.95	44.19	54	-9.81
Model LM-100-24-U2B2_High Channel-2480MHz							
6334.50	46.08	Peak	H	-0.13	45.95	74	-28.05
6334.50	37.02	AVG	H	-0.13	36.89	54	-17.11
12444.50	43.51	Peak	H	10.14	53.65	74	-20.35
12444.50	33.44	AVG	H	10.14	43.58	54	-10.42
5935.00	46.99	Peak	V	-0.82	46.17	74	-27.83
5935.00	36.5	AVG	V	-0.82	35.68	54	-18.32
11986.25	42.72	Peak	V	10.31	53.03	74	-20.97
11986.25	32.58	AVG	V	10.31	42.89	54	-11.11

Test Frequency: 18GHz~25GHz

The measurements were more than 20 dB below the limit and not reported.



6.4 Power Spectral Density

6.4.1 Standard Applicable

According to 15.247(a)(1)(iii), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

6.4.2 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.10.2, the test method of power spectral density as below:


- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq 3 \times \text{RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.4.3 Test Result


Test Mode	Test Channel	Power Spectral Density dBm/10kHz	Limit dBm/3kHz
BLE	Low	-23.365	8
	Middle	-22.438	8
	High	-21.646	8




BLE_Low Channel

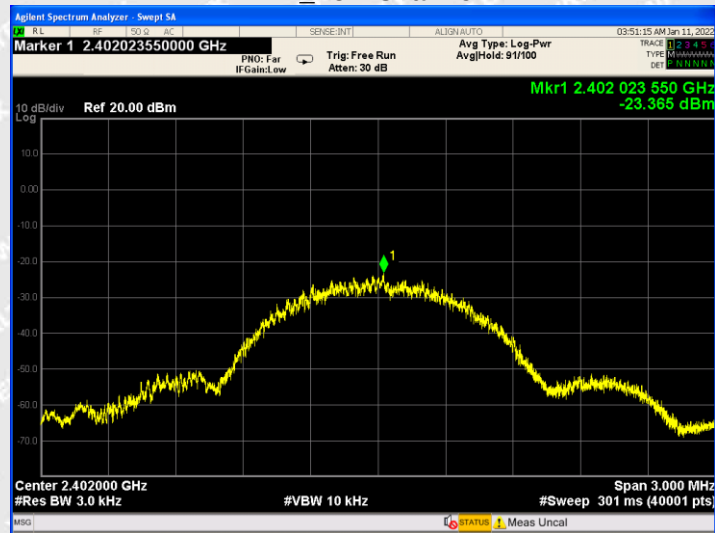

BLE_Middle Channel

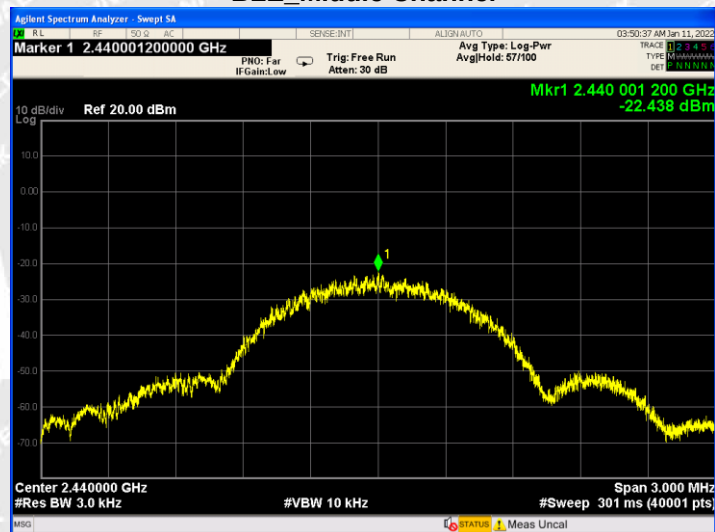

BLE_High Channel

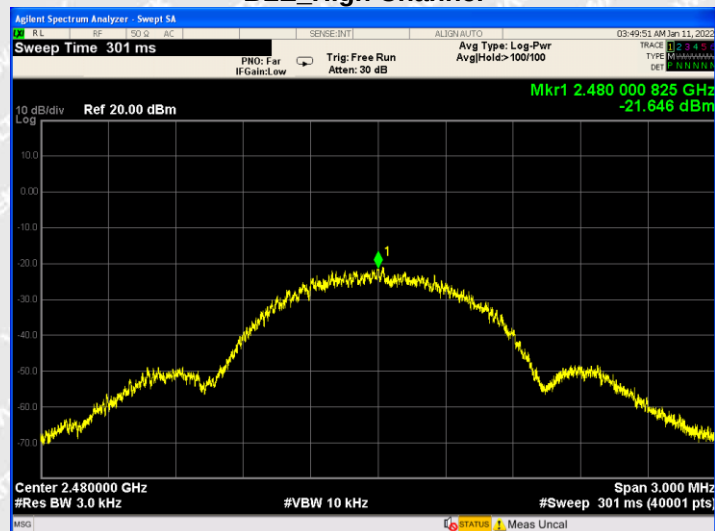



6.5 DTS Bandwidth

6.5.1 Standard Applicable

According to 15.247(a)(2). Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

6.5.2 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.2 and ANSI C63.10-2013 Subclause 11.8.1, the test method of DTS Bandwidth as below:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.5.3 Test Result

Test Mode	Test Channel	6dB Bandwidth KHz	Limit kHz
BLE	Low	727.875	≥ 500
	Middle	719.550	≥ 500
	High	714.300	≥ 500



BLE Low Channel



BLE Middle Channel



BLE High Channel





6.6 RF Output Power

6.6.1 Standard Applicable

According to 15.247(b)(3). For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

6.6.2 Test Procedure

According to the KDB-558074 D01 v05r02 Subclause 8.3.1.1 and ANSI C63.10-2013 Subclause 11.9.1.1, this procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) Set the RBW $\geq$ DTS bandwidth.
- b) Set VBW $\geq 3 \times$ RBW.
- c) Set span $\geq 3 \times$ RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

6.6.3 Test Result


Modulation	Test Channel	Reading (dBm)	Output Power (mW)	Limit (mW)
BLE	Low	-9.221	0.120	1000
	Middle	-8.319	0.147	1000
	High	-6.929	0.203	1000




BLE_Low Channel



BLE_Middle Channel

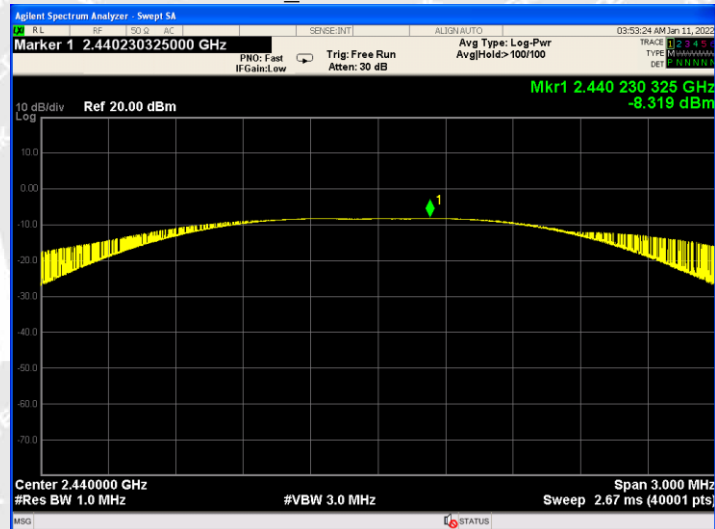

BLE_High Channel

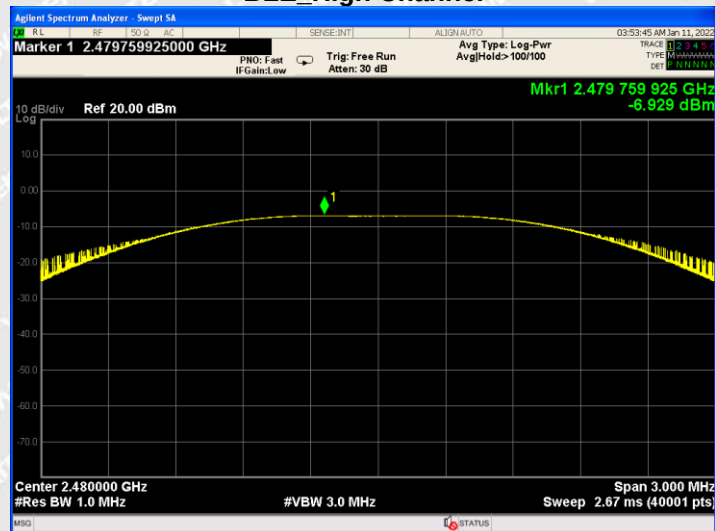



6.7 Out of Band Emissions

6.7.1 Standard Applicable

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

6.7.2 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.11, the Emissions in nonrestricted frequency bands test method as follows:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

According to the KDB 558074 D01 v05r02 Subclause 8.5 and ANSI C63.10-2013 Subclause 11.12, the Emissions in restricted frequency bands test method as follows:

A. Radiated emission measurements:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge,

as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz

for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, and then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emissions must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205.



Note that the method of measurement KDB publication number: 913591 may be used for the radiated band edge measurements.

B. Antenna-port conducted measurements

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 9/
- b) VBW $\geq [3 \times \text{RBW}]$.
- c) Detector = peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

Table 9—RBW as a function of frequency

Frequency	RBW
9 kHz to 150 kHz	200 Hz to 300 Hz
0.15 MHz to 30 MHz	9 kHz to 10 kHz
30 MHz to 1000 MHz	100 kHz to 120 kHz
>1000 MHz	1 MHz

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1.




6.7.3 Test Result

Radiated Test

Test Channel Low Channel


Polarization Horizontal (worst case)

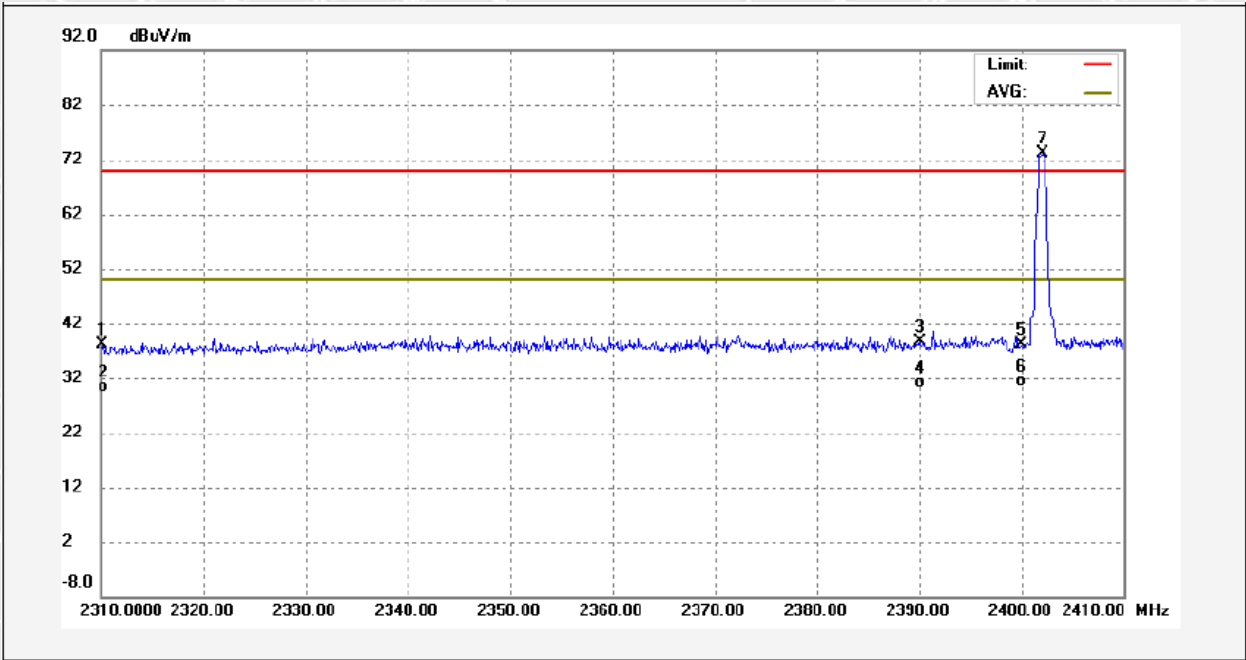

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2310.000	-0.31	38.37	38.06	70.00	-31.94	peak	
2	2310.000	-8.09	38.37	30.28	50.00	-19.72	AVG	
3	2390.000	-0.38	38.90	38.52	70.00	-31.48	peak	
4	2390.000	-7.82	38.90	31.08	50.00	-18.92	AVG	
5	2400.000	-1.03	39.23	38.20	70.00	-31.80	peak	
6	2400.000	-7.84	39.23	31.39	50.00	-18.61	AVG	
7	2402.000	33.89	39.21	73.10	70.00	3.10	peak	



Test Channel High Channel Polarization Horizontal (worst case)

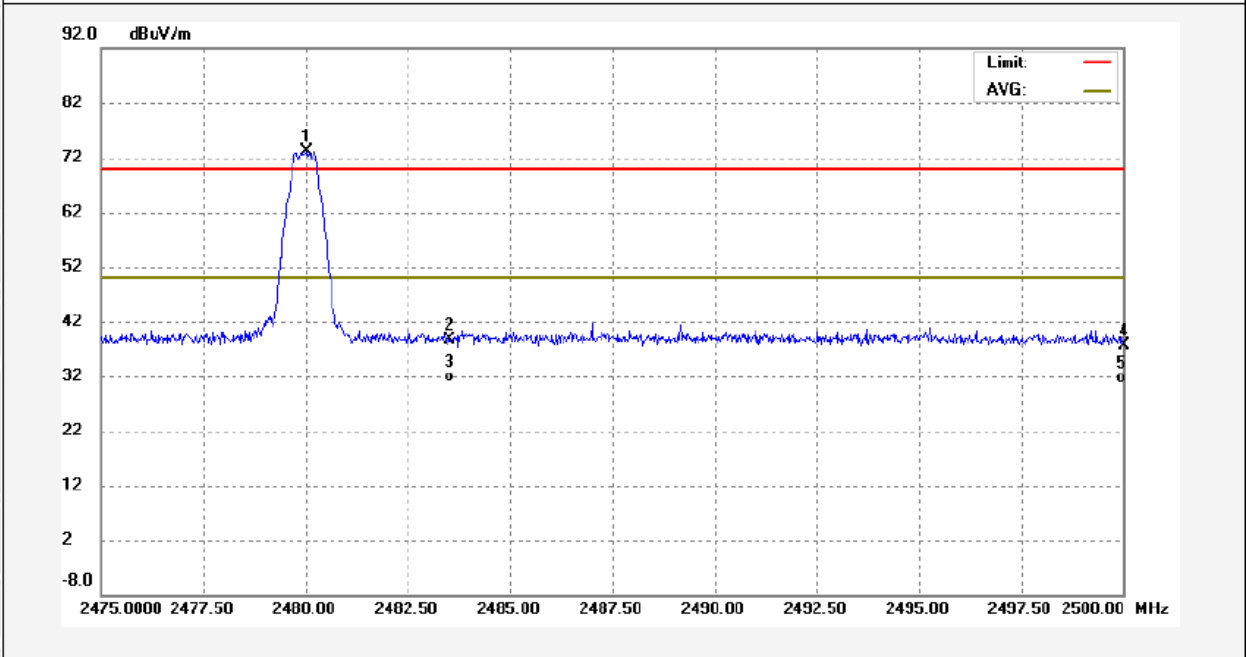


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2480.000	33.36	39.75	73.11	70.00	3.11	peak	
2	2483.500	-1.04	39.67	38.63	70.00	-31.37	peak	
3	2483.500	-7.71	39.67	31.96	50.00	-18.04	AVG	
4	2500.000	-1.59	39.31	37.72	70.00	-32.28	peak	
5	2500.000	-7.60	39.31	31.71	50.00	-18.29	AVG	




Conducted Test

BLE_Low Channel

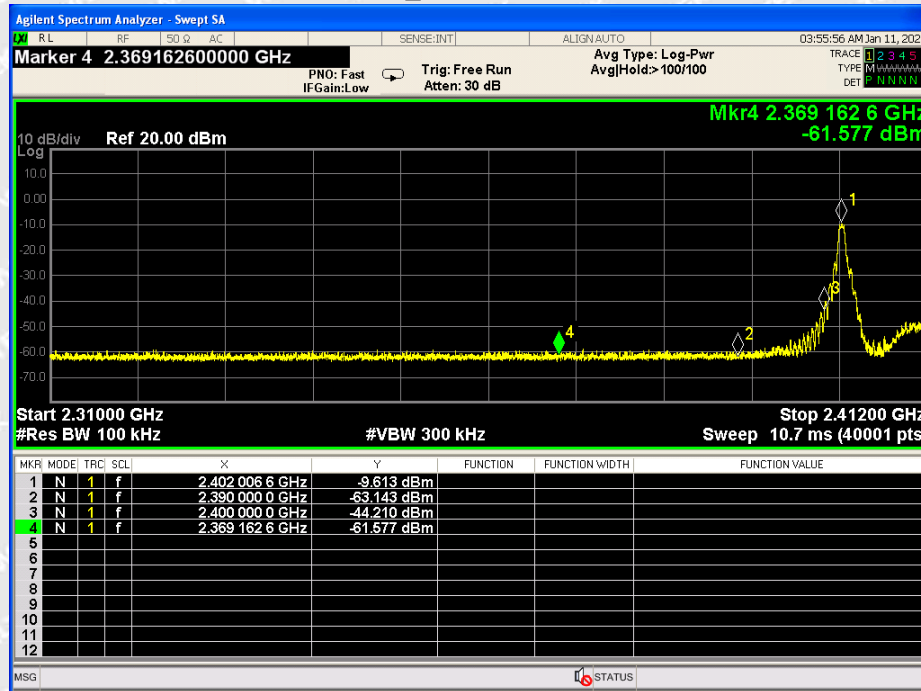

BLE_High Channel

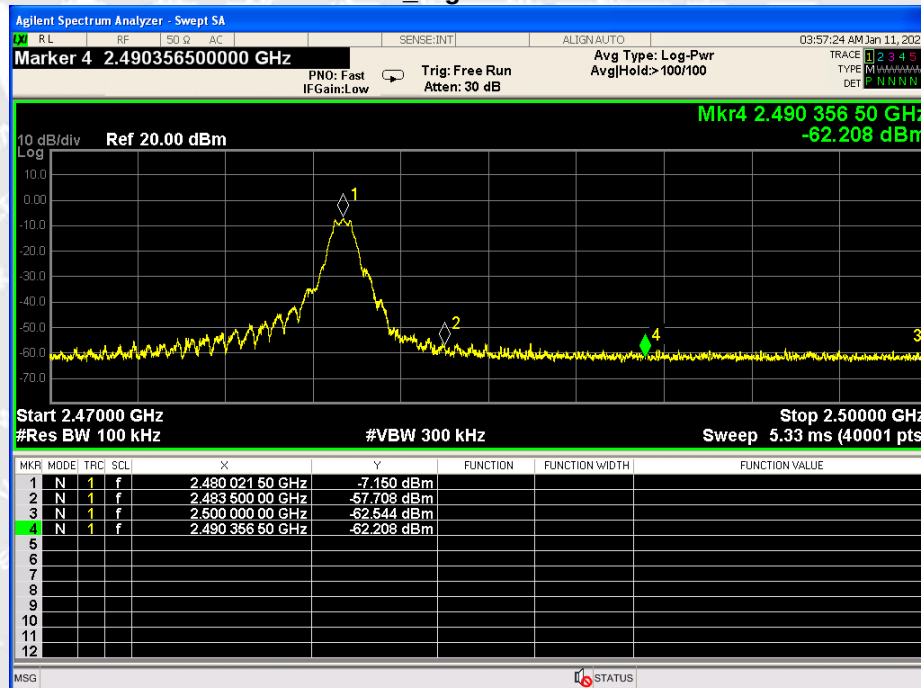



6.8 Conducted Emissions


6.8.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

6.8.2 Basic Test Setup Block Diagram

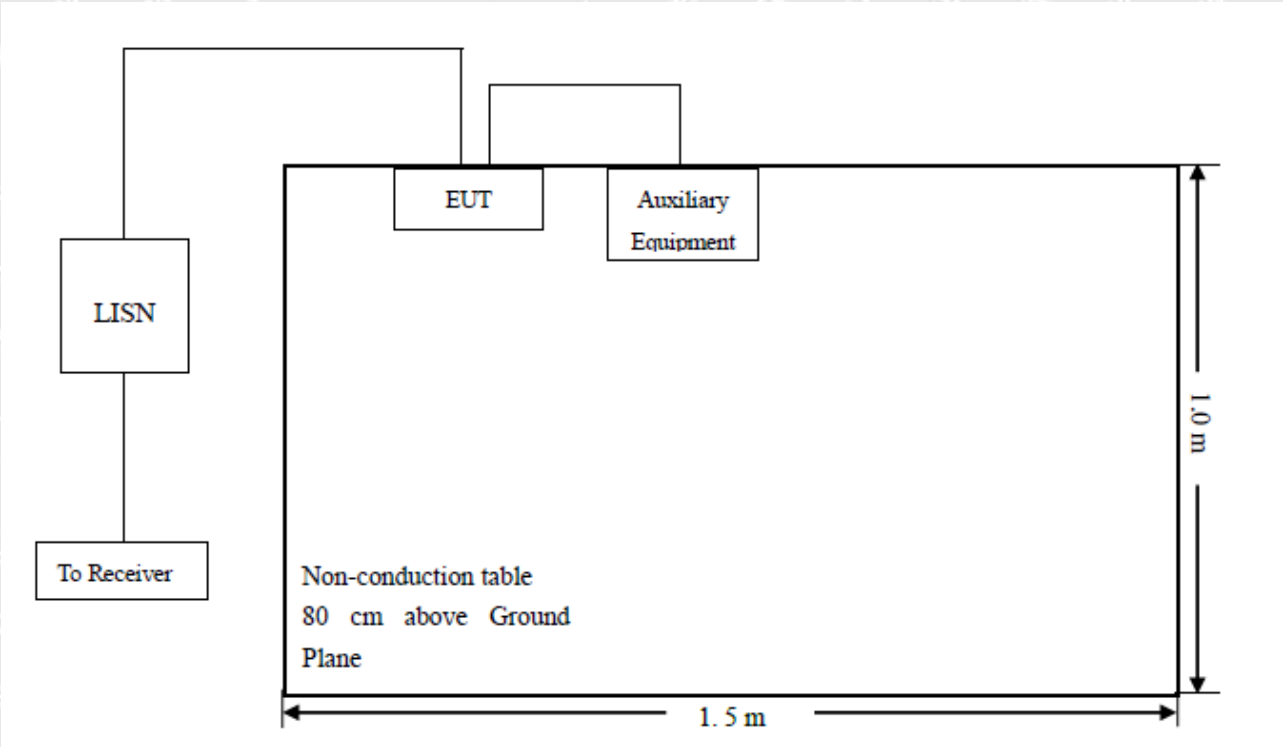

6.8.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency.....	150 kHz
Stop Frequency.....	30 MHz
Sweep Speed.....	Auto
IF Bandwidth.....	10 kHz
Quasi-Peak Adapter Bandwidth.....	9 kHz
Quasi-Peak Adapter Mode.....	Normal



6.8.4 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

6.8.5 Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF(Voltage Division Facotr), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Measurement} = \text{Reading Level} + \text{Correct Factor}$$

$$\text{Correct Facotor} = \text{LISN VDF} + \text{Cable Loss}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Measurement}$$

WALTEK



6.8.6 Test Result


Model LM-60-12-U1B2

Test Mode

Communication mode (AC 120V/60Hz)

Polarity

Line

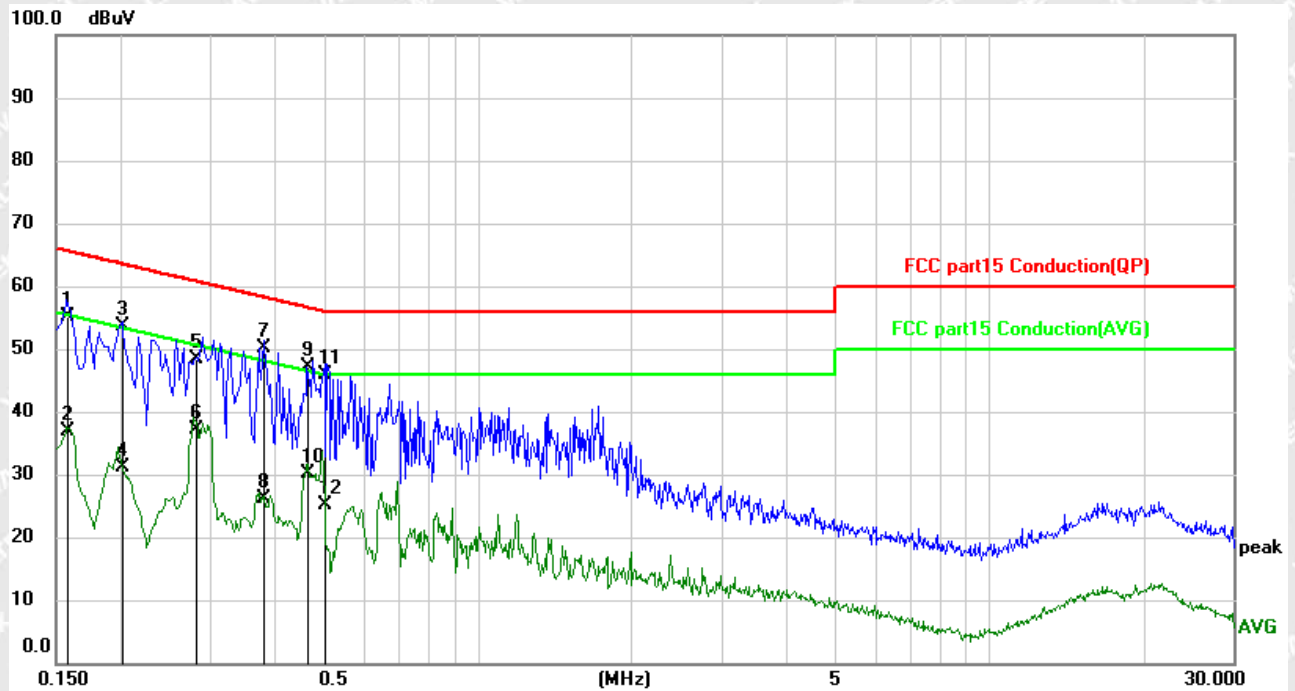


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1580	45.53	9.62	55.15	65.57	-10.42	QP	
2		0.1580	27.31	9.62	36.93	55.57	-18.64	AVG	
3		0.2020	43.99	9.64	53.63	63.53	-9.90	QP	
4		0.2020	21.40	9.64	31.04	53.53	-22.49	AVG	
5		0.2803	38.81	9.64	48.45	60.81	-12.36	QP	
6		0.2803	27.38	9.64	37.02	50.81	-13.79	AVG	
7	*	0.3820	40.58	9.65	50.23	58.24	-8.01	QP	
8		0.3820	16.48	9.65	26.13	48.24	-22.11	AVG	
9		0.4660	37.49	9.66	47.15	56.58	-9.43	QP	
10		0.4660	20.46	9.66	30.12	46.58	-16.46	AVG	
11		0.5020	36.30	9.66	45.96	56.00	-10.04	QP	
12		0.5020	15.46	9.66	25.12	46.00	-20.88	AVG	

**Test Mode**

Communication mode (AC 120V/60Hz)

Polarity

Neutral

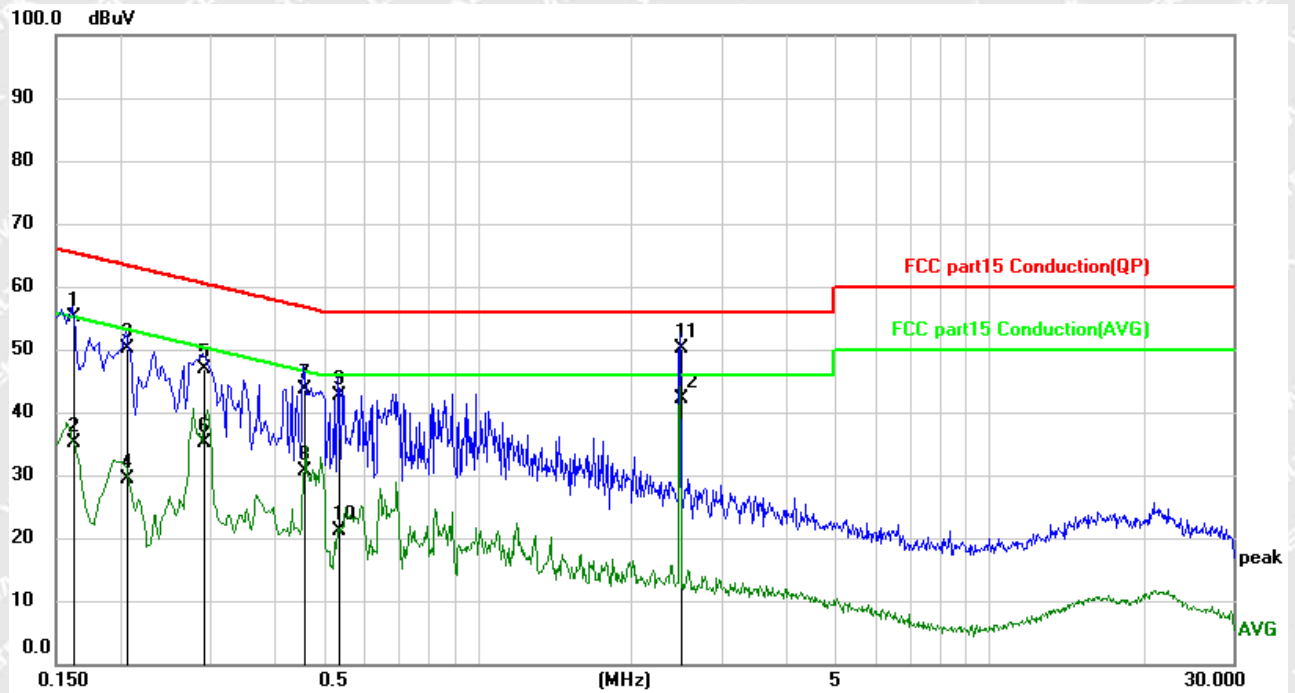

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1620	45.61	9.62	55.23	65.36	-10.13	QP	
2		0.1620	25.40	9.62	35.02	55.36	-20.34	AVG	
3		0.2060	40.51	9.63	50.14	63.37	-13.23	QP	
4		0.2060	19.73	9.63	29.36	53.37	-24.01	AVG	
5		0.2909	37.26	9.64	46.90	60.50	-13.60	QP	
6		0.2909	25.48	9.64	35.12	50.50	-15.38	AVG	
7		0.4580	33.97	9.66	43.63	56.73	-13.10	QP	
8		0.4580	20.87	9.66	30.53	46.73	-16.20	AVG	
9		0.5340	32.92	9.66	42.58	56.00	-13.42	QP	
10		0.5340	11.46	9.66	21.12	46.00	-24.88	AVG	
11		2.4940	40.51	9.72	50.23	56.00	-5.77	QP	
12	*	2.4940	32.30	9.72	42.02	46.00	-3.98	AVG	




Model LM-100-24-U2B2

Test Mode

Communication mode (AC 120V/60Hz)

Polarity

Line

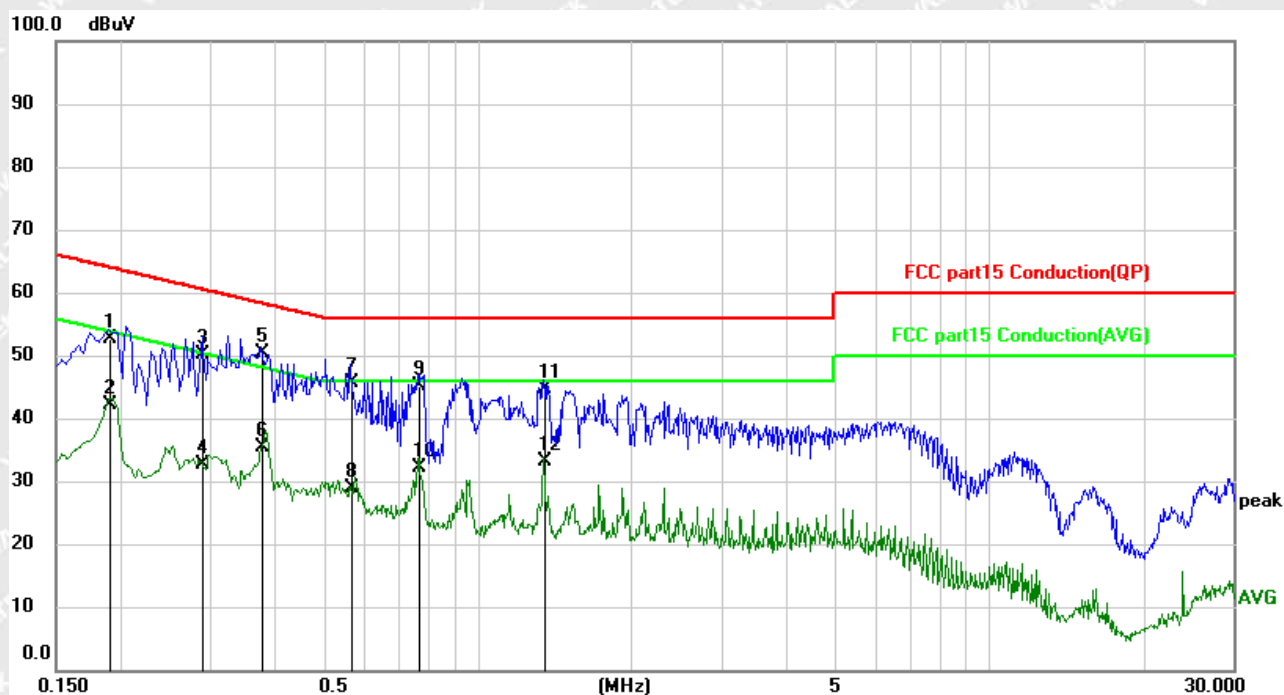


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1914	43.12	9.63	52.75	63.98	-11.23	QP	
2		0.1914	32.39	9.63	42.02	53.98	-11.96	AVG	
3		0.2900	40.51	9.64	50.15	60.52	-10.37	QP	
4		0.2900	23.08	9.64	32.72	50.52	-17.80	AVG	
5	*	0.3780	40.80	9.65	50.45	58.32	-7.87	QP	
6		0.3780	25.80	9.65	35.45	48.32	-12.87	AVG	
7		0.5660	35.97	9.66	45.63	56.00	-10.37	QP	
8		0.5660	19.28	9.66	28.94	46.00	-17.06	AVG	
9		0.7700	35.43	9.67	45.10	56.00	-10.90	QP	
10		0.7700	22.41	9.67	32.08	46.00	-13.92	AVG	
11		1.3500	34.87	9.69	44.56	56.00	-11.44	QP	
12		1.3500	23.54	9.69	33.23	46.00	-12.77	AVG	

**Test Mode**

Communication mode (AC 120V/60Hz)

Polarity

Neutral

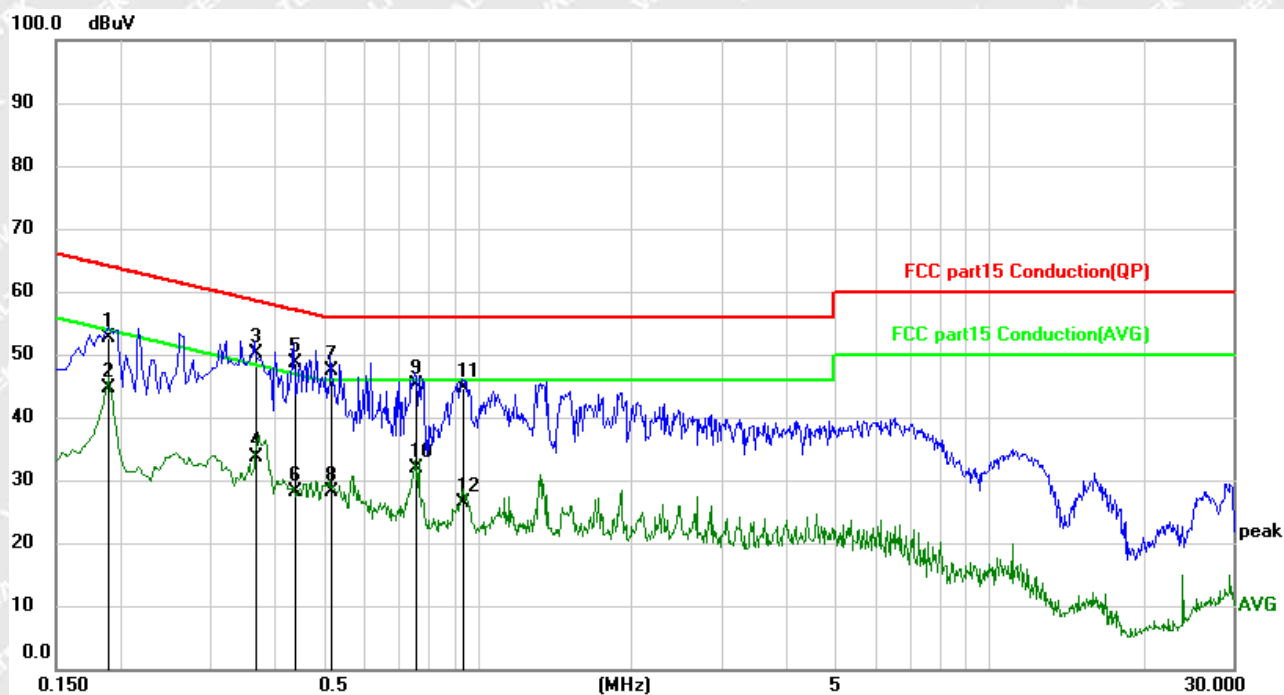

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1		0.1900	42.99	9.62	52.61	64.04	-11.43	QP	
2		0.1900	35.09	9.62	44.71	54.04	-9.33	AVG	
3	*	0.3673	40.48	9.64	50.12	58.56	-8.44	QP	
4		0.3673	23.96	9.64	33.60	48.56	-14.96	AVG	
5		0.4380	38.90	9.66	48.56	57.10	-8.54	QP	
6		0.4380	18.45	9.66	28.11	47.10	-18.99	AVG	
7		0.5180	37.76	9.66	47.42	56.00	-8.58	QP	
8		0.5180	18.59	9.66	28.25	46.00	-17.75	AVG	
9		0.7580	35.36	9.67	45.03	56.00	-10.97	QP	
10		0.7580	22.21	9.67	31.88	46.00	-14.12	AVG	
11		0.9380	34.83	9.68	44.51	56.00	-11.49	QP	
12		0.9380	16.67	9.68	26.35	46.00	-19.65	AVG	



7 Photographs Test Setup

7.1 Photographs - Radiated Emission Test Setup

30MHz-1GHz



Above 1GHz





7.2 Photographs – Conducted Emission Test Setup



WALTEK



8 Photographs - Constructional Details

8.1 EUT - External Photos

Model LM-60-12-U1B2







**Model LM-100-24-U2B2**














8.2 EUT - Internal Photos

Model LM-60-12-U1B2

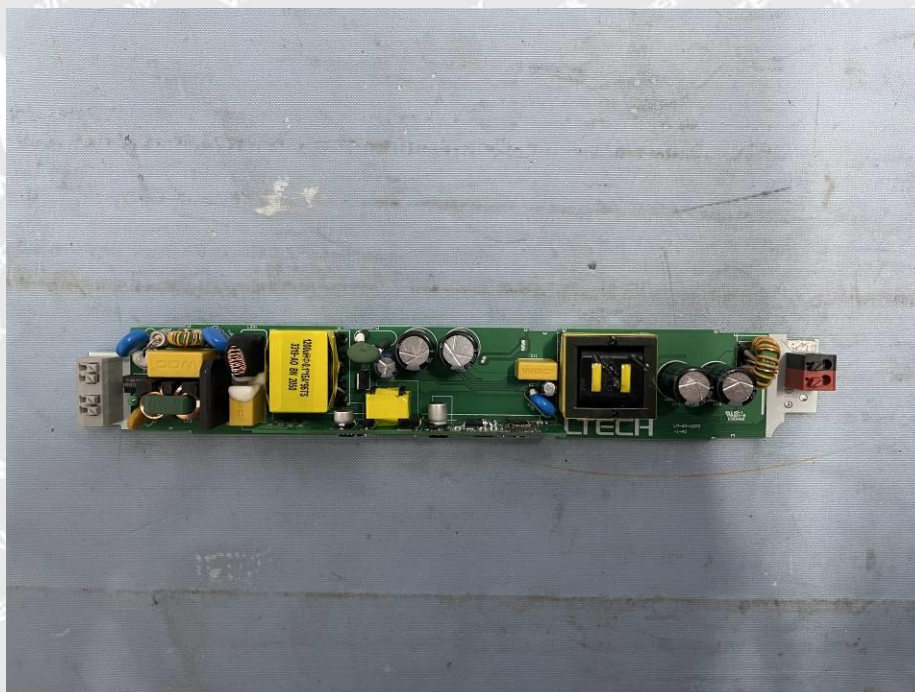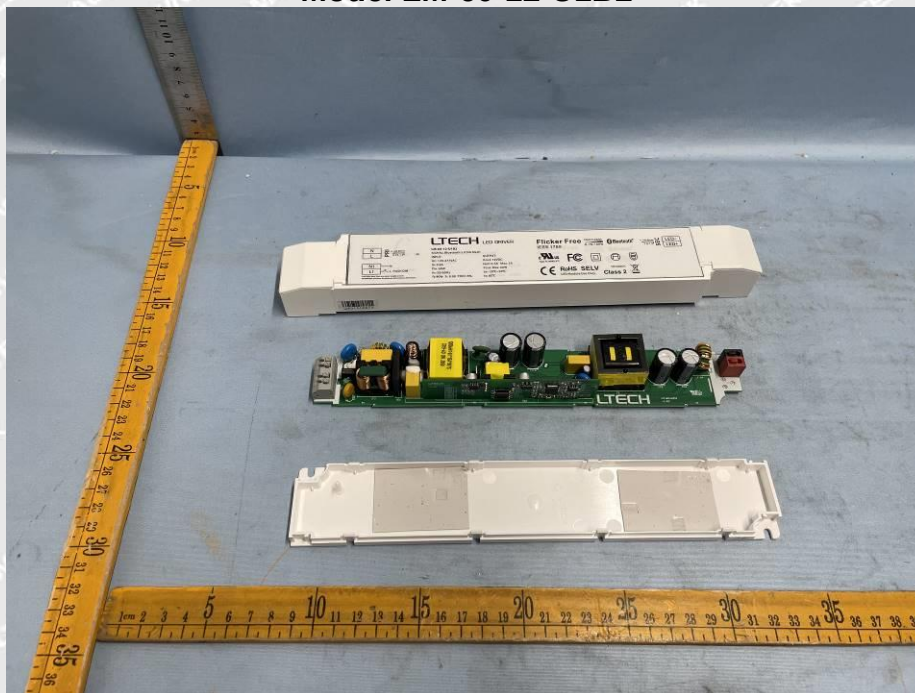

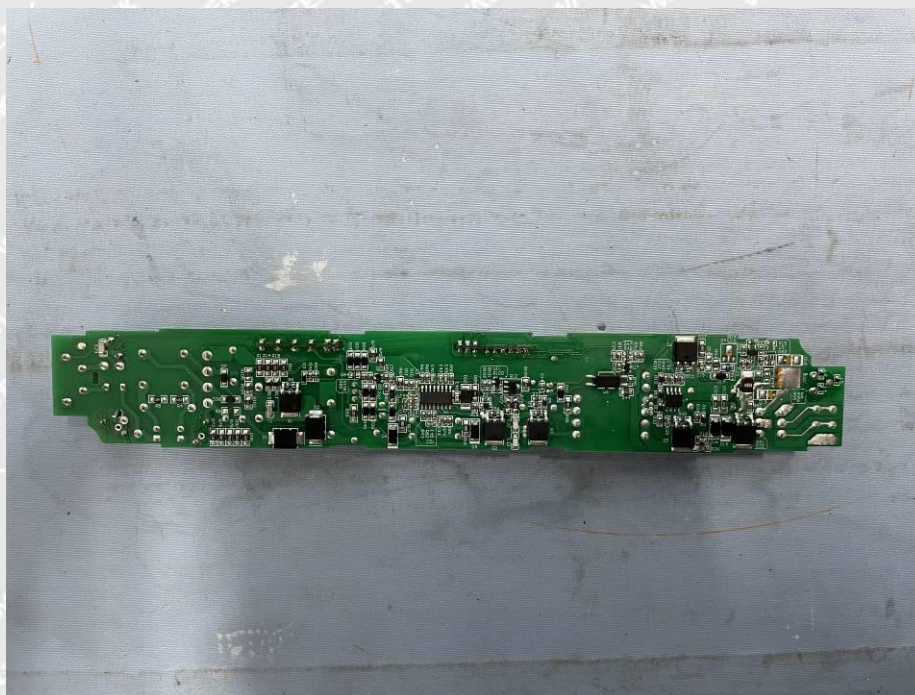

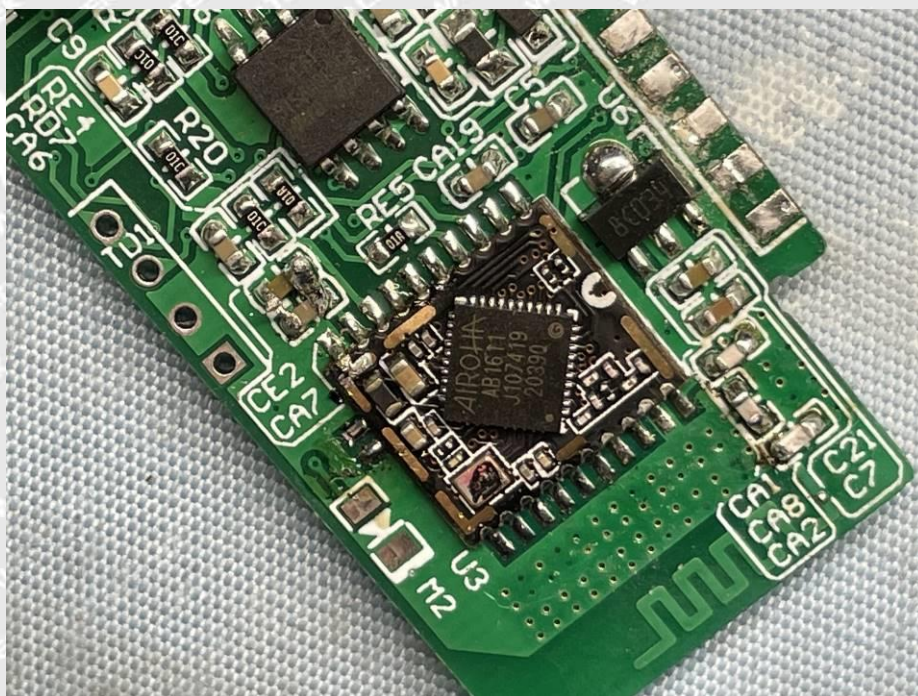
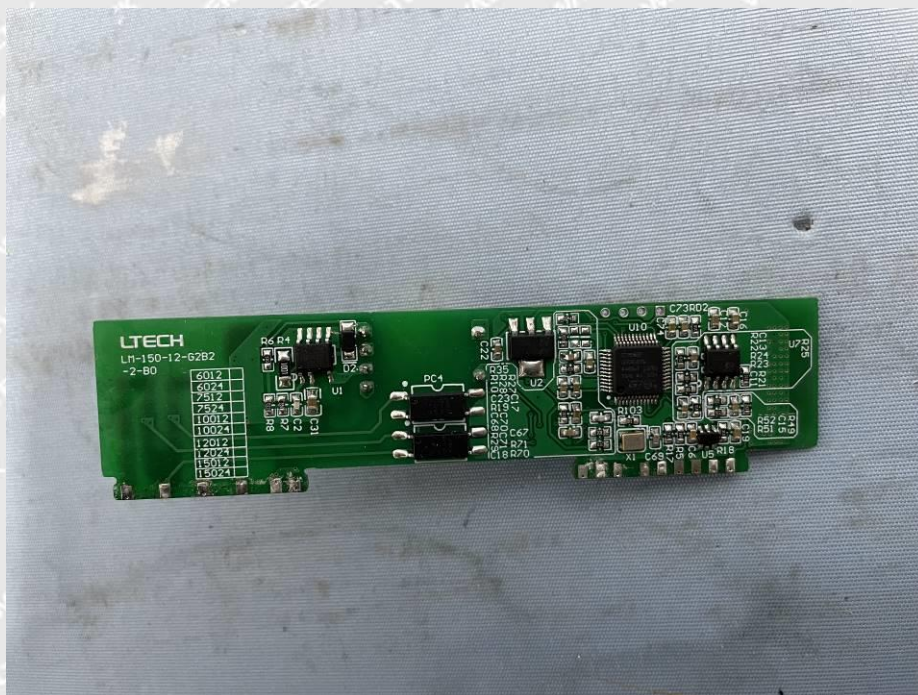


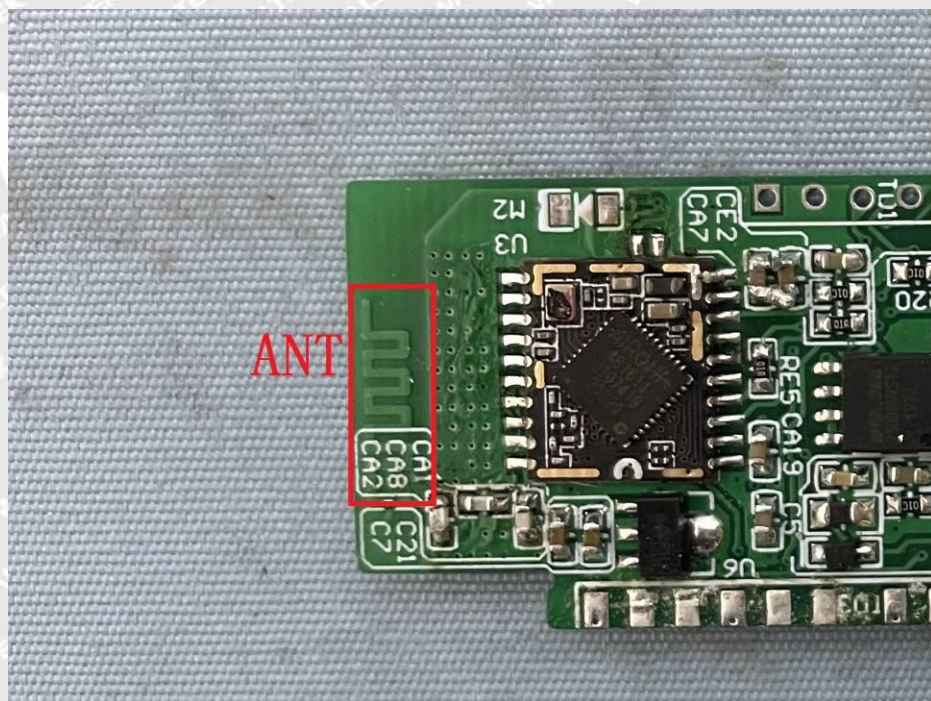
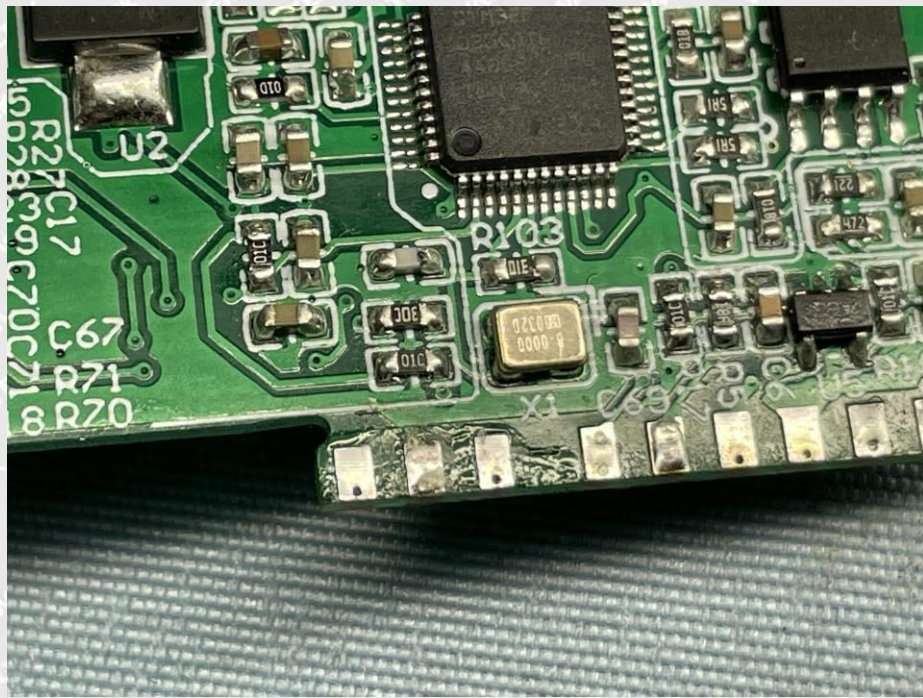






Model LM-100-24-U2B2



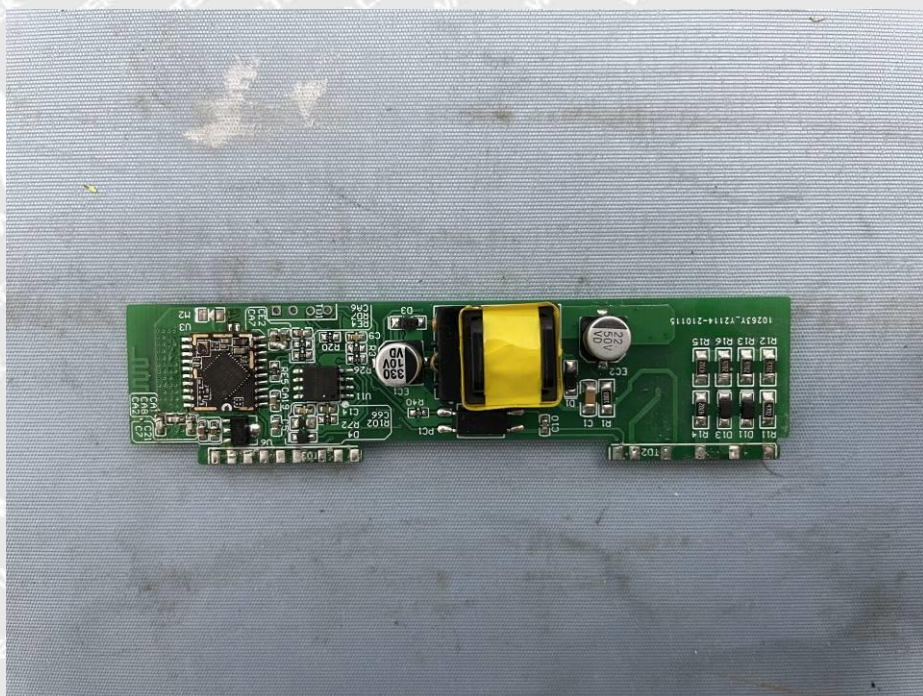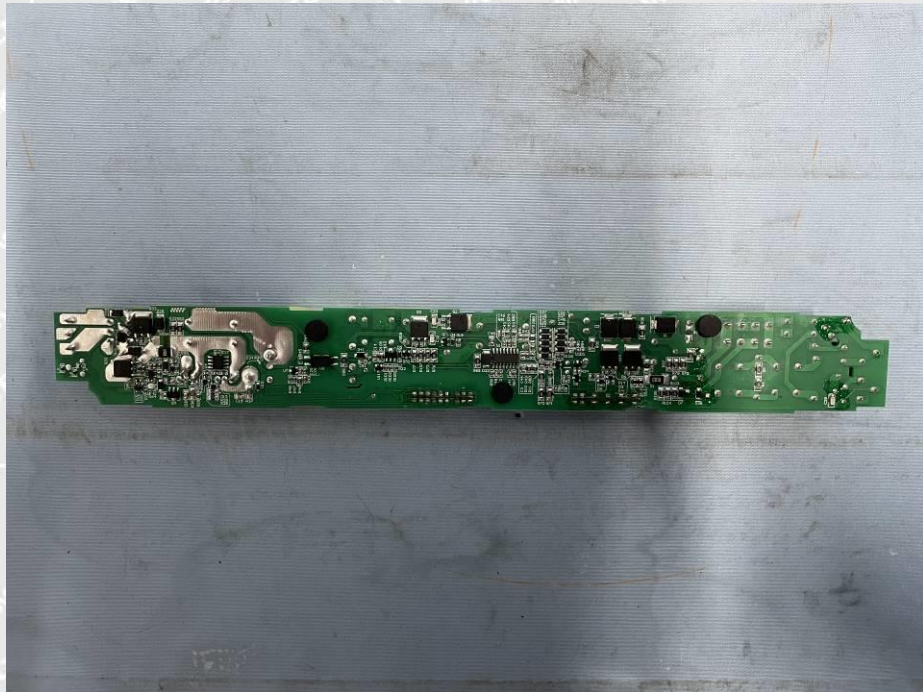

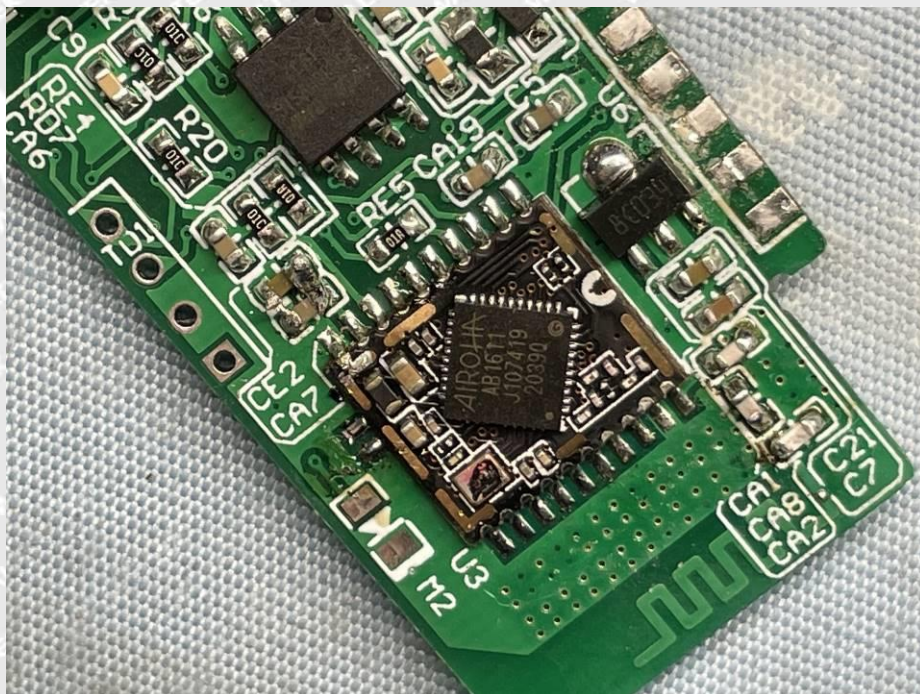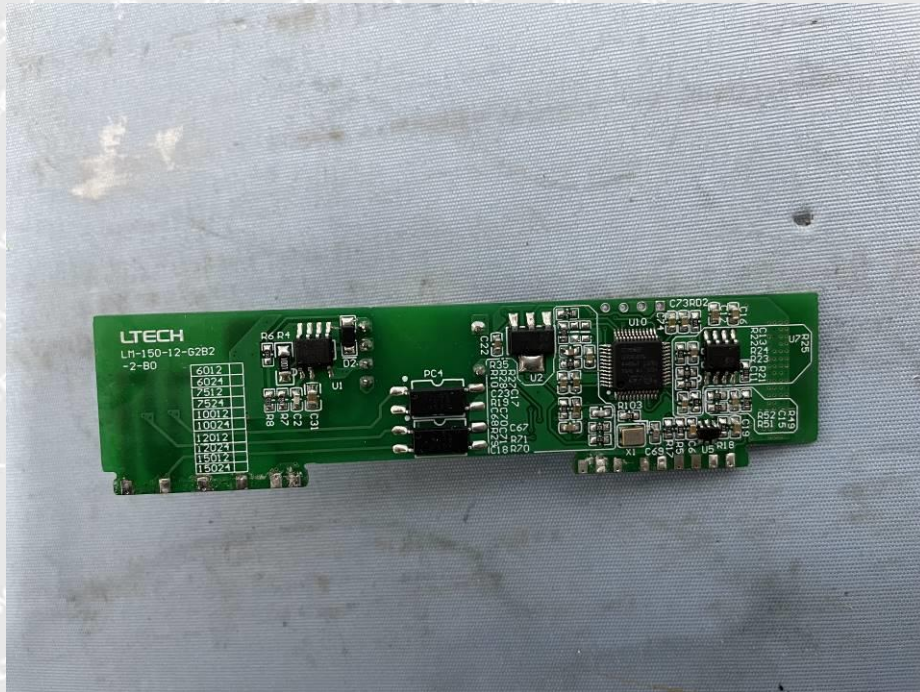

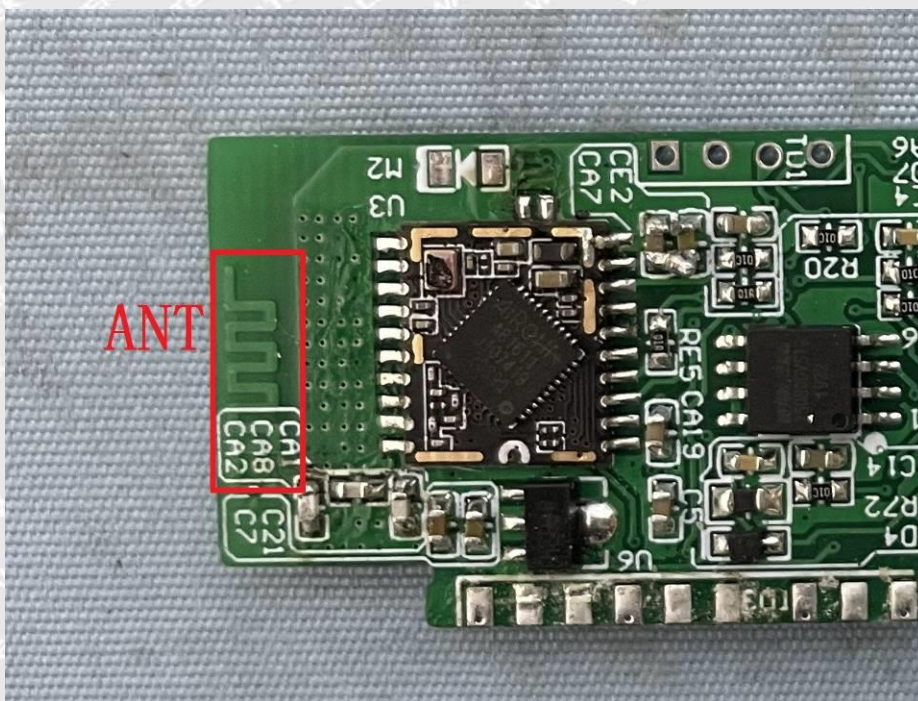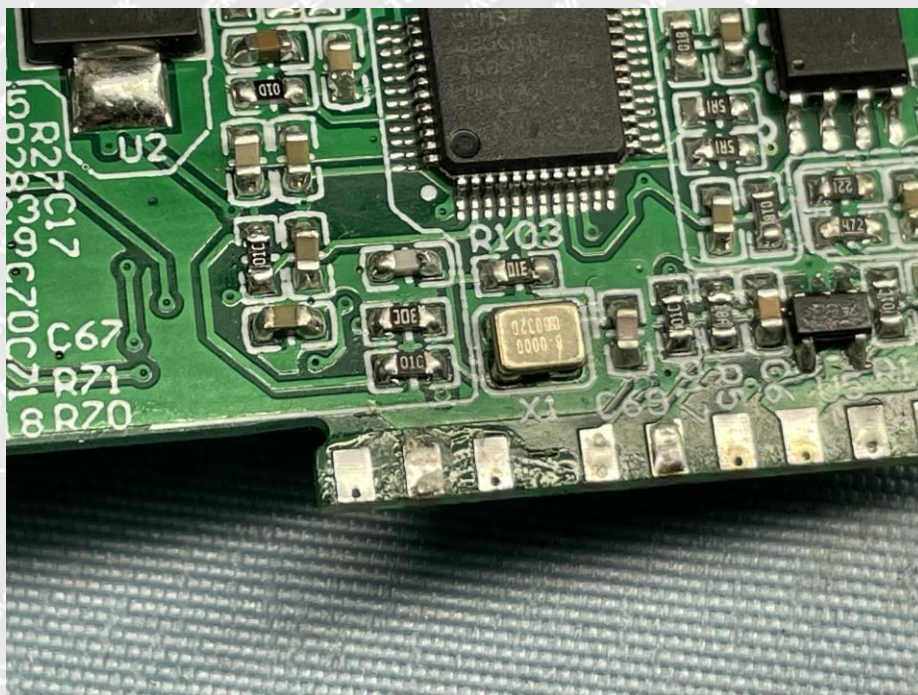

=====End of Report=====