



FCC Part 15, Subpart B, Class B

ARTIKA FOR LIVING INC.

Sputnik Pendant 3CCT

Test Model: PDT-SPC-C3BG

Additional Model No.: Please Refer to Page 7

Prepared for : ARTIKA FOR LIVING INC.
Address : 1756 50th avenue, Lachine, Qc, CanadaH8T 2V5,
Lachine, Canada, H8T 2V5

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : Room 101, 201, Building A and Room 301, Building C,
Juji Industrial Park, Yabianxueziwei, Shajing Street,
Bao'an District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : March 21, 2022
Number of tested samples : 2
Serial number : 220307141A-1
Date of Test : March 21, 2022 ~ March 24, 2022
Date of Report : March 24, 2022





FCC Part 15, Subpart B, Class B
FCC 47 CFR Part 15 Subpart B, Class B, ANSI C63.4 -2014

Report Reference No. : LCS220307141AEA

Date Of Issue : March 24, 2022

Testing Laboratory Name : Shenzhen LCS Compliance Testing Laboratory Ltd.

Address : Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Testing Location/ Procedure... : Full application of Harmonised standards
Partial application of Harmonised standards
Other standard testing method

Applicant's Name : ARTIKA FOR LIVING INC.

Address : 1756 50th avenue, Lachine, Qc, CanadaH8T 2V5, Lachine, Canada, H8T 2V5

Test Specification

Standard : FCC 47 CFR Part 15 Subpart B, Class B, ANSI C63.4 -2014

Test Report Form No. : LCSEMC-1.0

TRF Originator : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF : Dated 2011-03

SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. is acknowledged as copyright owner and source of the material. SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description : Sputnik Pendant 3CCT

Trade Mark : Artika

Test Model : PDT-SPC-C3BG

Ratings : Input: AC 120V, 50/60Hz, 21W

Result : Positive

Compiled by:

Ray Yang (signature)

Ray Yang/ Administrator

Supervised by:

Jin Wang (signature)

Jin Wang/ Technique principal

Approved by:

Gavin Liang (signature)

Gavin Liang/ Manager





FCC SDOC-- TEST REPORT

| | |
|---|--|
| Test Report No. : LCS220307141AEA | <u>March 24, 2022</u> Date of issue |
|---|--|

| | |
|--------------------------|--|
| Test Model | : PDT-SPC-C3BG |
| EUT..... | : Sputnik Pendant 3CCT |
| Applicant..... | : ARTIKA FOR LIVING INC. |
| Address..... | : 1756 50th avenue, Lachine, Qc, CanadaH8T 2V5, Lachine, Canada, H8T 2V5 |
| Telephone..... | : / |
| Fax..... | : / |
| Manufacturer..... | : ZHONGSHAN C5 LIGHTING CO. LTD |
| Address..... | : 1# Henglong Road, Tongyi Industrial Area, Cao San, Guzhen, Zhongshan, Guangdong, China. |
| Telephone..... | : / |
| Fax..... | : / |
| Factory..... | : ARTIKA FOR LIVING INC. |
| Address..... | : 1756 50th avenue, Lachine, Qc, CanadaH8T 2V5, Lachine, Canada, H8T 2V5 |
| Telephone..... | : / |
| Fax..... | : / |

Test Result according to the standards on page 6: **Positive**

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.





Revision History

| Report Version | Issue Date | Revision Content | Revised By |
|----------------|----------------|------------------|------------|
| 000 | March 24, 2022 | Initial Issue | -- |
| | | | |
| | | | |



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street,
Bao'an District, Shenzhen, Guangdong, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



TABLE OF CONTENTS

| Test Report Description | Page |
|--|-----------|
| 1. SUMMARY OF STANDARDS AND RESULTS | 6 |
| 1.1. Description of Standards and Results | 6 |
| 2. GENERAL INFORMATION | 7 |
| 2.1. Description of Device (EUT)..... | 7 |
| 2.2. Support Equipment List..... | 8 |
| 2.3 External I/O Cable..... | 8 |
| 2.4. Description of Test Facility | 8 |
| 2.4. Statement of the Measurement Uncertainty | 9 |
| 2.5. Measurement Uncertainty..... | 9 |
| 3. TEST RESULTS | 10 |
| 3.1. POWER LINE CONDUCTED EMISSION MEASUREMENT | 10 |
| 3.2. Radiated emission Measurement | 14 |
| 4. TEST SETUP PHOTOGRAPHS OF EUT | 19 |
| 5. EXTERIOR PHOTOGRAPHS OF THE EUT | 19 |
| 6. INTERIOR PHOTOGRAPHS OF THE EUT | 19 |





1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

| EMISSION | | | |
|--|---|---------|---------|
| Description of Test Item | Standard | Limits | Results |
| Conducted disturbance at mains terminals | FCC 47 CFR Part 15 Subpart B, Class B, ANSI C63.4 -2014 | Class B | PASS |
| Radiated disturbance | FCC 47 CFR Part 15 Subpart B, Class B, ANSI C63.4 -2014 | Class B | PASS |
| N/A is an abbreviation for Not Applicable. | | | |

| Test mode: | | |
|------------|----------|--------|
| Mode 1 | Lighting | Record |





2. GENERAL INFORMATION

2.1. Description of Device (EUT)

- EUT : Sputnik Pendant 3CCT
- Trade Mark : Artika
- Test Model : PDT-SPC-C3BG
- Additional Model No. : PDT-SPC-XXXXXX("XXXXXX" can be A to Z and/or 0 to 9 and/or blank (commercial code))
- Model Declaration : PCB board, structure and internal of these model(s) are the same, So no additional models were tested
- Power Supply : Input: AC 120V, 50/60Hz, 21W

| Highest internal frequency (Fx) | Highest measured frequency |
|---------------------------------|---------------------------------|
| Fx ≤ 108 MHz | 1 GHz |
| 108 MHz < Fx ≤ 500 MHz | 2 GHz |
| 500 MHz < Fx ≤ 1 GHz | 5 GHz |
| Fx > 1 GHz | 5 × Fx up to a maximum of 6 GHz |

NOTE 1 For FM and TV broadcast receivers, Fx is determined from the highest frequency generated or used excluding the local oscillator and tuned frequencies.
Where Fx is unknown, the radiated emission measurements shall be performed up to 6 GHz.





2.2. Support Equipment List

| Manufacturer | Description | Model | Serial Number | Certificate |
|--------------|-------------|-------|---------------|-------------|
| --- | --- | --- | --- | --- |

2.3 External I/O Cable

| I/O Port Description | Quantity | Cable |
|----------------------|----------|-------|
| --- | --- | --- |

2.4. Description of Test Facility

Site Description
EMC Lab.

: NVLAP Accreditation Code is 600167-0.
 FCC Designation Number is CN5024.
 CAB identifier is CN0071.
 CNAS Registration Number is L4595.
 Test Firm Registration Number: 254912.





2.4. Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

2.5. Measurement Uncertainty

| Test | Parameters | Expanded Uncertainty (Ulab) | Expanded Uncertainty (Ucisp) |
|--------------------|---|-----------------------------|------------------------------|
| Conducted Emission | Level accuracy (9kHz to 150kHz) (150kHz to 30MHz) | ± 2.63 dB ± 2.35 dB | ± 3.8 dB ± 3.4 dB |
| Radiated Emission | Level accuracy (9kHz to 30MHz) | ± 3.68 dB | N/A |
| Radiated Emission | Level accuracy (30MHz to 1000MHz) | ± 3.48 dB | ± 5.3 dB |
| Radiated Emission | Level accuracy (above 1000MHz) | ± 3.90 dB | ± 5.2 dB |

(1) Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus.

(2) The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.



3. TEST RESULTS


3.1. POWER LINE CONDUCTED EMISSION MEASUREMENT

3.1.1. Test Equipment

The following test equipments are used during the power line conducted measurement:

| Item | Test equipment | Manufacturer | Model No. | Serial No. | Cal Date | Due Date |
|------|-------------------------------|--------------|------------|--------------|------------|------------|
| 1 | EMI Test Receiver | R&S | ESCI | 101142 | 2021-06-08 | 2022-06-08 |
| 2 | 10dB Attenuator | SCHWARZBECK | VTSD9561-F | 9561-F159 | 2021-06-08 | 2022-06-08 |
| 3 | Artificial Mains Network | SCHWARZBECK | NSLK8127 | 8127716 | 2021-06-08 | 2022-06-08 |
| 4 | EMI Test Software | EZ | EZ EMC | N/A | / | / |
| 5 | Asymmetric Artificial Network | SCHWARZBECK | NTFM 8158 | NTFM8158#120 | 2021-06-08 | 2022-06-08 |
| 6 | Voltage Probe | SCHWARZBECK | KT 9420 | 9420401 | 2021-06-08 | 2022-06-08 |
| 7 | No. 2 shielded Room | CHENGYU | 843 | / | 2020-06-16 | 2023-06-16 |

3.1.2. Block Diagram of Test Setup

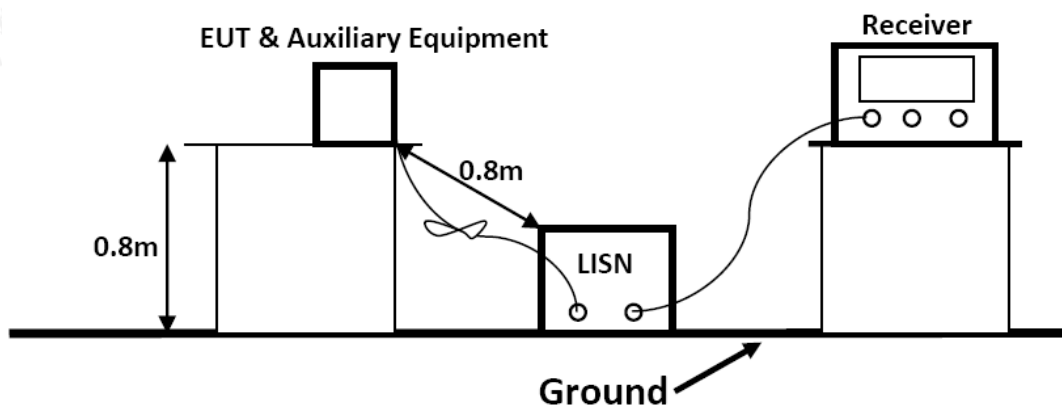

3.1.3. Test Standard

Power Line Conducted Emission Limits (Class B)

| Frequency (MHz) | | | Limit (dB μ V) | |
|-----------------|---|-------|--------------------|---------------|
| | | | Quasi-peak Level | Average Level |
| 0.15 | ~ | 0.50 | 66.0 ~ 56.0 * | 56.0 ~ 46.0 * |
| 0.50 | ~ | 5.00 | 56.0 | 46.0 |
| 5.00 | ~ | 30.00 | 60.0 | 50.0 |

NOTE1-The lower limit shall apply at the transition frequencies.
 NOTE2-The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.





3.1.4.EUT Configuration on Test

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.

3.1.5.Operating Condition of EUT

3.1.5.1.Setup the EUT as shown on Section 3.1.2

3.1.5.2.Turn on the power of all equipments.

3.1.5.3.Let the EUT work in measuring Mode 1 and measure it.

3.1.6.Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC/ANSI C63.4-2014 on Conducted Emission Measurement.

The bandwidth of the test receiver is set at 9kHz.

The frequency range from 150kHz to 30MHz is investigated

3.1.7.Test Results


PASS.

The test result please refer to the next page.





| | | | |
|---------------------------------|------------------|----------------------|--------------|
| Test Model | PDT-SPC-C3BG | Test Mode | Mode 1 |
| Environmental Conditions | 23.9°C, 53.0% RH | Test Engineer | Sam Chen |
| Pol | Line | Test Voltage | AC 120V/60Hz |

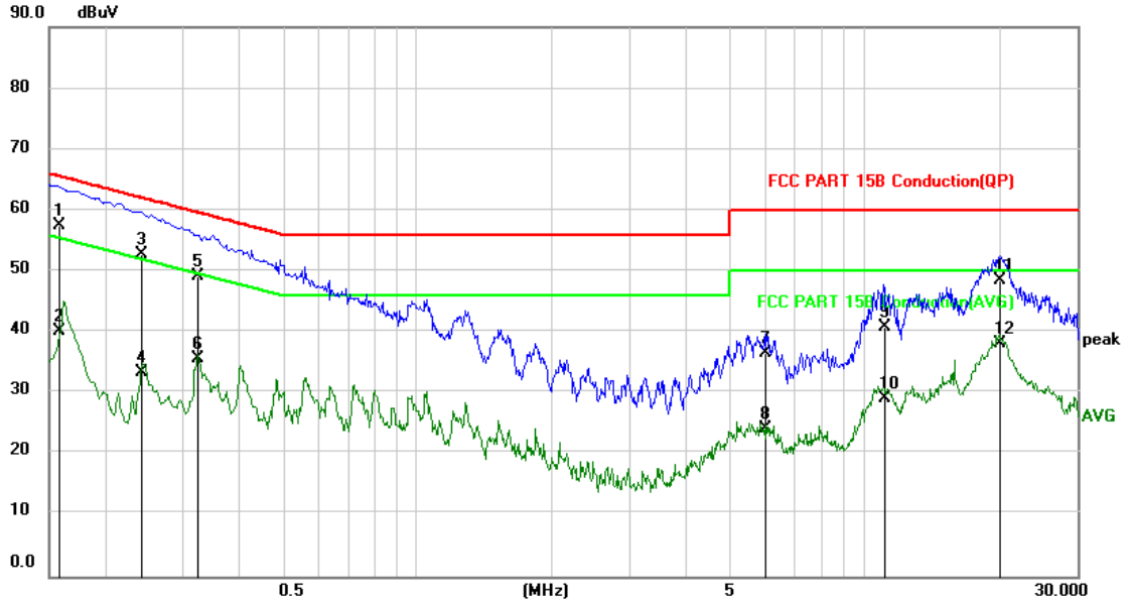


| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV | Limit dBuV | Over dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|---------|
| 1 | * | 0.1583 | 47.17 | 10.24 | 57.41 | 65.55 | -8.14 | QP | |
| 2 | | 0.1583 | 29.94 | 10.24 | 40.18 | 55.55 | -15.37 | AVG | |
| 3 | | 0.2420 | 42.46 | 10.21 | 52.67 | 62.03 | -9.36 | QP | |
| 4 | | 0.2420 | 23.10 | 10.21 | 33.31 | 52.03 | -18.72 | AVG | |
| 5 | | 0.3233 | 39.07 | 10.20 | 49.27 | 59.62 | -10.35 | QP | |
| 6 | | 0.3233 | 25.42 | 10.20 | 35.62 | 49.62 | -14.00 | AVG | |
| 7 | | 6.0341 | 26.29 | 10.20 | 36.49 | 60.00 | -23.51 | QP | |
| 8 | | 6.0341 | 13.89 | 10.20 | 24.09 | 50.00 | -25.91 | AVG | |
| 9 | | 11.1057 | 30.70 | 10.20 | 40.90 | 60.00 | -19.10 | QP | |
| 10 | | 11.1057 | 19.00 | 10.20 | 29.20 | 50.00 | -20.80 | AVG | |
| 11 | | 20.1147 | 38.32 | 10.20 | 48.52 | 60.00 | -11.48 | QP | |
| 12 | | 20.1147 | 27.97 | 10.20 | 38.17 | 50.00 | -11.83 | AVG | |





| | | | |
|---------------------------------|------------------|----------------------|--------------|
| Test Model | PDT-SPC-C3BG | Test Mode | Mode 1 |
| Environmental Conditions | 23.9°C, 53.0% RH | Test Engineer | Sam Chen |
| Pol | Neutral | Test Voltage | AC 120V/60Hz |

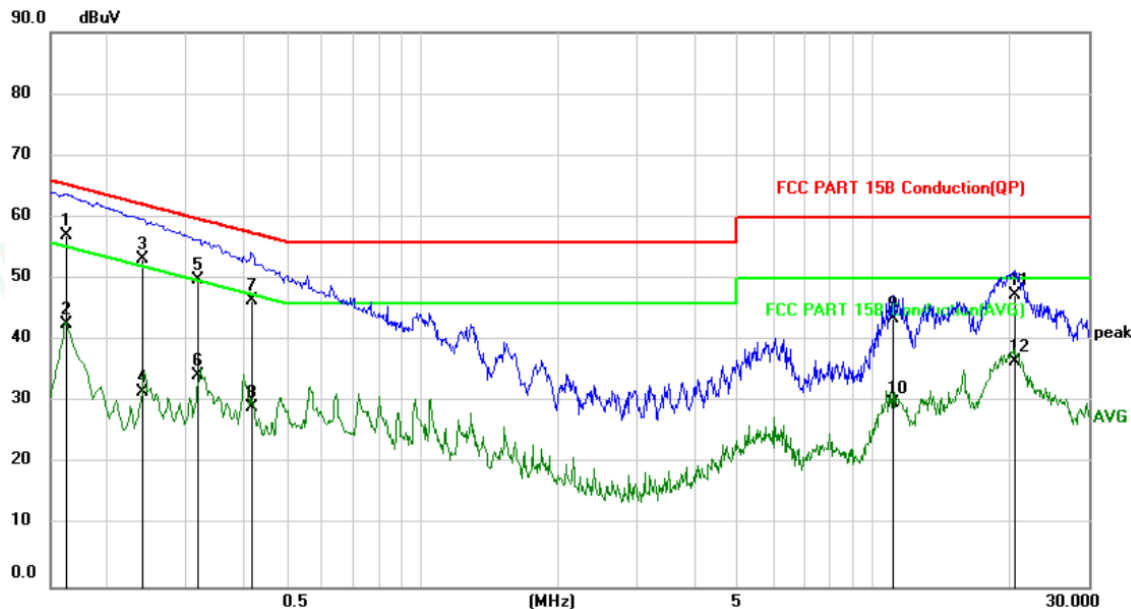

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV | Limit dBuV | Over dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|---------|
| 1 | * | 0.1624 | 46.87 | 10.23 | 57.10 | 65.34 | -8.24 | QP | |
| 2 | | 0.1624 | 32.47 | 10.23 | 42.70 | 55.34 | -12.64 | AVG | |
| 3 | | 0.2380 | 43.03 | 10.22 | 53.25 | 62.17 | -8.92 | QP | |
| 4 | | 0.2380 | 21.29 | 10.22 | 31.51 | 52.17 | -20.66 | AVG | |
| 5 | | 0.3195 | 39.55 | 10.20 | 49.75 | 59.72 | -9.97 | QP | |
| 6 | | 0.3195 | 24.18 | 10.20 | 34.38 | 49.72 | -15.34 | AVG | |
| 7 | | 0.4205 | 36.27 | 10.20 | 46.47 | 57.44 | -10.97 | QP | |
| 8 | | 0.4205 | 18.95 | 10.20 | 29.15 | 47.44 | -18.29 | AVG | |
| 9 | | 11.0698 | 33.45 | 10.20 | 43.65 | 60.00 | -16.35 | QP | |
| 10 | | 11.0698 | 19.69 | 10.20 | 29.89 | 50.00 | -20.11 | AVG | |
| 11 | | 20.5425 | 37.10 | 10.20 | 47.30 | 60.00 | -12.70 | QP | |
| 12 | | 20.5425 | 26.38 | 10.20 | 36.58 | 50.00 | -13.42 | AVG | |

Note: Pre-Scan all mode, Thus record worse case mode result in this report.
 Result = Reading + Correct, Margin = Result – Limit.




3.2. Radiated emission Measurement

3.2.1. Test Equipment

The following test equipments are used during the radiated emission measurement:

| Item | Test equipment | Manufacturer | Model No. | Serial No. | Cal Date | Due Date |
|------|--------------------------|----------------|--------------|---------------|------------|------------|
| 1 | 3m Semi Anechoic Chamber | SIDT FRANKONIA | SAC-3M | 03CH03-HY | 2021-06-15 | 2024-06-15 |
| 2 | EMI Test Receiver | R&S | ESCI3 | 101010 | 2021-06-08 | 2022-06-08 |
| 3 | Spectrum Analyzer | Agilent | N9020A | MY49100699 | 2021-06-08 | 2022-06-08 |
| 4 | Log-periodic Antenna | SCHWARZBECK | VULB9163 | 5094 | 2019-06-23 | 2022-06-23 |
| 5 | Horn Antenna | ETS-LINDGREN | 3115 | 00034771 | 2019-06-23 | 2022-06-23 |
| 6 | EMI Test Software | EZ | EZ EMC | N/A | / | / |
| 7 | Positioning Controller | MF | BK8807-4A-2T | 2016-0808-008 | / | / |

3.2.2. Block Diagram of Test Setup

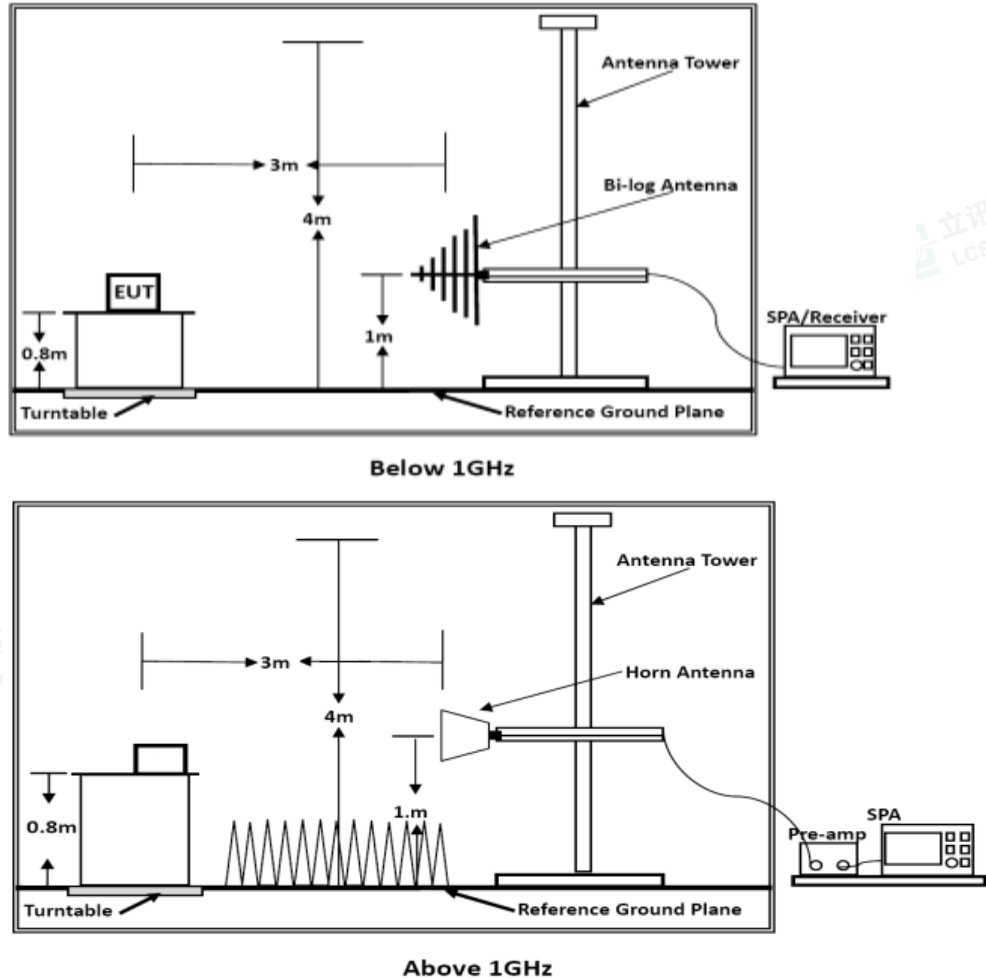



3.2.3. Radiated Emission Limit (Class B)

Limits for Radiated Disturbance Below 1GHz

| FREQUENCY MHz | DISTANCE Meters | FIELD STRENGTHS LIMIT | |
|------------------|--------------------|-----------------------|----------|
| | | μV/m | dB(μV)/m |
| 30 ~ 88 | 3 | 100 | 40 |
| 88 ~ 216 | 3 | 150 | 43.5 |
| 216 ~ 960 | 3 | 200 | 46 |
| 960 ~ 1000 | 3 | 500 | 54 |

Remark: (1) Emission level (dB)μV = 20 log Emission level μV/m
 (2) The smaller limit shall apply at the cross point between two frequency bands.
 (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

Limits for Radiated Emission Above 1GHz

| Frequency (MHz) | Distance (Meters) | Peak Limit (dBμV/m) | Average Limit (dBμV/m) |
|-----------------|-------------------|---------------------|------------------------|
| Above 1000 | 3 | 74 | 54 |

***Note: The lower limit applies at the transition frequency.

3.2.4. EUT Configuration on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

3.2.5. Operating Condition of EUT

3.2.5.1. Setup the EUT as shown in Section 3.2.2.

3.2.5.2. Let the EUT work in test Mode 1 and measure it.

3.2.6. Test Procedure

EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated by-log antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-2014 on radiated emission measurement.

3.2.7. Measuring Instruments and Setting

Please refer to equipment list in this report. The following table is the setting of spectrum analyzer and receiver





| Receiver Parameter | Setting |
|------------------------|--|
| Attenuation | Auto |
| Start ~ Stop Frequency | 9kHz~150kHz / RB/VB 200Hz/1KHz for QP/AVG |
| Start ~ Stop Frequency | 150kHz~30MHz / RB/VB 9kHz/30KHz for QP/AVG |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB/VB 120kHz/1MHz for QP |

| Spectrum Parameter | Setting |
|---|---|
| Attenuation | Auto |
| Start Frequency | 1000 MHz |
| Stop Frequency | 10th carrier harmonic |
| RB / VB (Emission in restricted band) | 1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average |
| RB / VB (Emission in non-restricted band) | 1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average |

The frequency range from 30MHz to 1000MHz and above 1000MHz is checked.

3.2.8. Radiated Emission Noise Measurement Result


PASS.

The scanning waveforms please refer to the next page.





| | | | |
|---------------------------------|------------------|--------------------------|--------------|
| Test Model | PDT-SPC-C3BG | Test Mode | Mode 1 |
| Environmental Conditions | 23.9°C, 51.0% RH | Detector Function | Quasi-peak |
| Pol | Vertical | Distance | 3m |
| Test Engineer | Sam Chen | Test Voltage | AC 120V/60Hz |

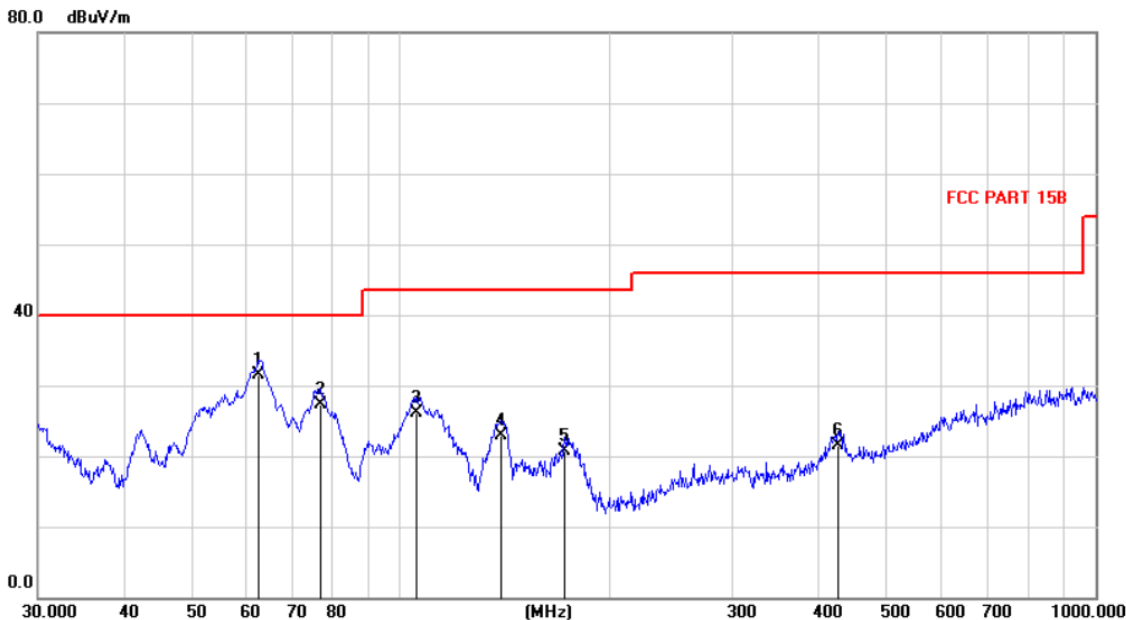


| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB/m | Measure- ment dBuV/m | Limit dBuV/m | Margin dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------|--------------|----------|
| 1 | * | 62.4314 | 19.05 | 12.55 | 31.60 | 40.00 | -8.40 | QP |
| 2 | | 76.6463 | 17.36 | 10.04 | 27.40 | 40.00 | -12.60 | QP |
| 3 | | 105.5952 | 15.44 | 10.76 | 26.20 | 43.50 | -17.30 | QP |
| 4 | | 139.4224 | 11.46 | 11.54 | 23.00 | 43.50 | -20.50 | QP |
| 5 | | 172.5232 | 9.39 | 11.31 | 20.70 | 43.50 | -22.80 | QP |
| 6 | | 425.7739 | 5.42 | 16.08 | 21.50 | 46.00 | -24.50 | QP |





| | | | |
|---------------------------------|------------------|--------------------------|--------------|
| Test Model | PDT-SPC-C3BG | Test Mode | Mode 1 |
| Environmental Conditions | 23.9°C, 51.0% RH | Detector Function | Quasi-peak |
| Pol | Horizontal | Distance | 3m |
| Test Engineer | Sam Chen | Test Voltage | AC 120V/60Hz |

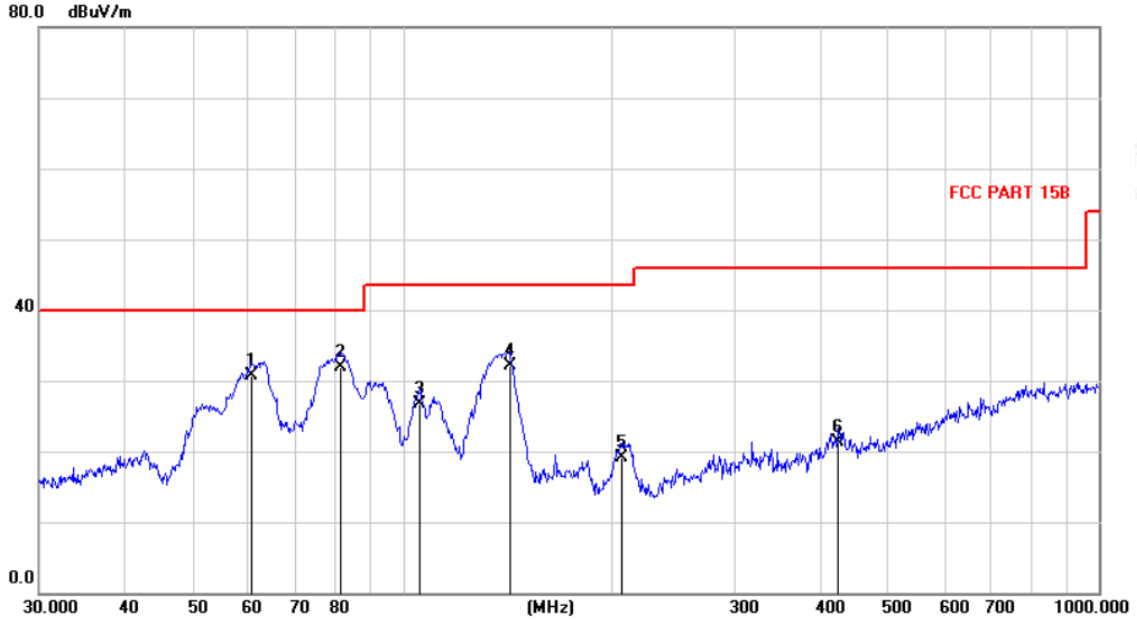

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB/m | Measure- ment dBuV/m | Limit dBuV/m | Margin dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------|--------------|----------|
| 1 | | 60.5980 | 18.58 | 12.12 | 30.70 | 40.00 | -9.30 | QP |
| 2 | * | 81.7475 | 22.45 | 9.55 | 32.00 | 40.00 | -8.00 | QP |
| 3 | | 105.6415 | 15.77 | 11.03 | 26.80 | 43.50 | -16.70 | QP |
| 4 | | 142.6367 | 23.06 | 9.04 | 32.10 | 43.50 | -11.40 | QP |
| 5 | | 206.5786 | 7.24 | 11.86 | 19.10 | 43.50 | -24.40 | QP |
| 6 | | 423.5403 | 5.26 | 16.14 | 21.40 | 46.00 | -24.60 | QP |

Note: 1. Pre-Scan all mode, Thus record worse case mode result in this report.

2. For above 1000MHz, Because the emission it too low to be reported.

3. Emission level (dBuV/m) = 20 log Emission level (uV/m).

4. Level = Reading + Factor, Margin = Level-Limit, Factor = Antenna Factor + Cable Loss - Preamp Factor.





4. TEST SETUP Photographs of eut

Please refer to separated files for Test Setup Photos of the EUT.

5. Exterior Photographs of the eut

Please refer to separated files for External Photos of the EUT.

6. INTERIOR Photographs of the eut

Please refer to separated files for Internal Photos of the EUT.

-----THE END OF TEST REPORT-----

