

# TEST REPORT

Product Name : Round edge-lit mirror with Anti-fog  
Model Number : WMIRH-MACH-D28; may be followed by "-"; may be followed by up to 6 characters  
FCC ID : 2AYFP-WMIRH-MACH

Prepared for : ARTIKA FOR LIVING INC  
Address : 1756 50th avenue, Lachine, Qc, Canada H8T 2V5

Prepared by : EMTEK (NINGBO) CO., LTD.  
Address : 1F Building 4, 1177#, Lingyun Road, Ningbo National Hi-Tech Zone, Ningbo, Zhejiang, China.

Tel: +86-574-27907998  
Fax: +86-574-27721538

Report Number : ENB2205060194W00101R  
Date(s) of Tests : May 06, 2022 to May 11, 2022  
Date of issue : May 19, 2022

## TABLE OF CONTENT

| Test Report Description                                    | Page      |
|--|-----------|
| <b>1. SUMMARY OF TEST RESULTS</b> .....                    | <b>5</b>  |
| <b>2. GENERAL INFORMATION</b> .....                        | <b>6</b>  |
| 2.1. Description of Device (EUT) .....                     | 6         |
| 2.2. Input / Output Ports .....                            | 6         |
| 2.3. Independent Operation Modes.....                      | 6         |
| 2.4. Test Manner.....                                      | 7         |
| 2.5. Description of Test Facility .....                    | 7         |
| 2.6. Test Software .....                                   | 7         |
| 2.7. Description of Support Device.....                    | 7         |
| 2.8. Measurement Uncertainty .....                         | 7         |
| <b>3. MEASURING DEVICE AND TEST EQUIPMENT</b> .....        | <b>8</b>  |
| 3.1. For Conducted Emissions at Mains Measurement .....    | 8         |
| 3.2. For Radiated Emission Measurement.....                | 8         |
| <b>4. POWER LINE CONDUCTED EMISSION MEASUREMENT</b> .....  | <b>9</b>  |
| 4.1. Block Diagram of Test Setup .....                     | 9         |
| 4.2. Conducted Limit.....                                  | 9         |
| 4.3. Test Procedure.....                                   | 9         |
| 4.4. Measuring Results.....                                | 10        |
| <b>5. RADIATED EMISSION MEASUREMENT(UP TO 1GHz)</b> .....  | <b>13</b> |
| 5.1. Block Diagram of Test Setup .....                     | 13        |
| 5.2. Radiated Limit .....                                  | 13        |
| 5.3. Test Procedure.....                                   | 13        |
| 5.4. Measuring Results.....                                | 14        |
| <b>6. RADIATED EMISSION MEASUREMENT (ABOVE 1GHz)</b> ..... | <b>17</b> |
| 6.1. Block Diagram of Test Setup .....                     | 17        |
| 6.2. Radiated Limit .....                                  | 17        |
| 6.3. Test Procedure.....                                   | 17        |
| 6.4. Measuring Results.....                                | 18        |

**TEST REPORT DESCRIPTION**

Applicant : ARTIKA FOR LIVING INC  
Manufacturer : NINGBO LGDD ELECTRICAL FITTINGS CO., LTD  
Trade Mark :    
EUT : Round edge-lit mirror with Anti-fog  
Model No. : WMIRH-MACH-D28; may be followed by "-"; may be followed by up to 6 characters  
Power Supply : AC 120V, 60Hz

**Measurement Procedure Used:**


FCC CFR Title 47, Part 15, Subpart B  
ANSI C63.4-2014

The device described above is tested by EMTEK (NINGBO) CO., LTD. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and EMTEK (NINGBO) CO., LTD. is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of EMTEK (NINGBO) CO., LTD.

Date of Test : May 06, 2022 to May 11, 2022

Prepared by :   
June Gao/Engineer

Reviewer :   
Ade Wang/Supervisor

Approved & Authorized Signer :   
Tony Wei/Manager



## Modified Information

| Version | Report No.           | Revision date | Summary         |
|---------|----------------------|---------------|-----------------|
|         | ENB2205060194W00101R | /             | Original Report |



## 1. SUMMARY OF TEST RESULTS

| EMISSION                              |  |         |
|---------------------------------------|--|---------|
| Description of Test Item              | Standard & Limits  | Results |
| Conducted Emission at Mains Terminals | FCC CFR Title 47, Part 15, Subpart B, Class B<br>ANSI C63.4-2014 | Pass    |
| Radiated Emission                     | FCC CFR Title 47, Part 15, Subpart B, Class B<br>ANSI C63.4-2014 | Pass    |

Note: N/A is an abbreviation for Not Applicable.



## 2. GENERAL INFORMATION

### 2.1. Description of Device (EUT)

|                   |   |  |
|-------------------|---|--|
| EUT               | : | Round edge-lit mirror with Anti-fog  |
| Model Number      | : | WMIRH-MACH-D28; may be followed by “-”; may be followed by up to 6 characters<br>Note: For six characters, which symbolize different commercial code, no additional difference on Product. We chose WmirH-Mach-D28 for RF test |
| Test Voltage      | : | AC 120V/60Hz   |
| Highest Frequency | : | Below 108MHz   |
| Sample Number     | : | ENB2205060194W001-1-1  |
| Applicant         | : | ARTIKA FOR LIVING INC  |
| Address           | : | 1756 50th avenue, Lachine, Qc, CanadaH8T 2V5   |
| Manufacturer      | : | NINGBO LGDD ELECTRICAL FITTINGS CO., LTD   |
| Address           | : | No.188 Changxing Road, Jiangbei District, Ningbo, China 315033   |
| Date of Received  | : | May 06, 2022   |
| Date of Test      | : | May 06, 2022 to May 11, 2022   |

### 2.2. Input / Output Ports

| Port # | Name    | Type* | Cable Max. >3m | Cable Shielded | Comments |
|--------|---------|-------|----------------|----------------|----------|
| 1      | AC Port | AC    | --             | --             | None     |

\* Note: Use abbreviations:

AC= AC Power Port

DC= DC Power Port

N/E= Non-Electrical

I/O= Signal Input or Output Port (Not Involved in Process Control)

TP= Telecommunication Ports

### 2.3. Independent Operation Modes

A. ON

## 2.4. Test Manner

| Test Items                            | Test Voltage | Operation Modes | Worst case |
|---------------------------------------|--------------|-----------------|------------|
| Conducted Emission at Mains Terminals | AC 120V/60Hz | Mode A          | Mode A     |
| Radiated Emission up to 1 GHz         | AC 120V/60Hz | Mode A          | Mode A     |

## 2.5. Description of Test Facility

Site Description  
EMC Lab.

**Accredited by CNAS**

The Certificate Registration Number is L6666.

The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2018 (identical to ISO/IEC 17025:2017)

**Accredited by FCC**

Designation Number: CN1302

Test Firm Registration Number: 436491

**Accredited by A2LA**

The certificate is valid until May 31, 2023

**Accredited by Industry Canada**

The Conformity Assessment Body Identifier is CN0114

Name of Firm

: EMTEK (NINGBO) CO., LTD.

Site Location

: 1F Building 4, 1177#, Lingyun Road, Ningbo National Hi-Tech Zone, Ningbo, Zhejiang, China.

## 2.6. Test Software

Item

Software

Conducted Emission

: TS+ (Ver. 4.0.0.0)

Radiated Emission

: TS+ (Ver. 4.0.0.0)

## 2.7. Description of Support Device

N/A

## 2.8. Measurement Uncertainty

Test Item

Uncertainty

Conducted Emission Uncertainty

: 2.08dB (9 k-150 kHz)  
2.40dB (150 k-30 MHz)

Radiated Emission Uncertainty  
(3m Chamber)

: 4.06 dB (Polarize: H) (30MHz-1000MHz)  
4.04 dB (Polarize: V) (30MHz-1000MHz)  
4.82 dB (Polarize: H) (1~18GHz)  
4.80 dB (Polarize: V) (1~18GHz)

### 3. MEASURING DEVICE AND TEST EQUIPMENT

#### 3.1. For Conducted Emissions at Mains Measurement

| Equ. No. | Equipment         | Manufacturer      | Model No. | Serial No.       | Last Cal.     | Cal. Interval |
|----------|-------------------|-------------------|-----------|------------------|---------------|---------------|
| ENE-001  | Test Receiver     | Rohde & Schwarz   | ESCI      | 101108           | July 08, 2021 | 1 Year        |
| ENE-003  | L.I.S.N           | Rohde & Schwarz   | ENV216    | 101193           | July 08, 2021 | 1 Year        |
| ENE-004  | L.I.S.N           | Schwarzbeck       | NSLK 8126 | 8126-462         | July 08, 2021 | 1 Year        |
| ENE-006  | Pulse Limiter     | MTS-systemtechnik | IMP-136   | 2611115-001-0033 | July 08, 2021 | 1 Year        |
| ENE-005  | RF Switching unit | CD                | RSU-M2    | 38400            | July 08, 2021 | 1 Year        |
| ENE-076  | CE control room   | SAEMC             | 8*4*4m    | /                | Feb. 25, 2019 | 4 Year        |


#### 3.2. For Radiated Emission Measurement

| Equ. No.  | Equipment                | Manufacturer    | Model No.    | Serial No.           | Last Cal.     | Cal. Interval |
|-----------|--------------------------|-----------------|--------------|----------------------|---------------|---------------|
| ENE-002   | Spectrum Analyzer        | Rohde & Schwarz | ESCI         | 101107               | July 08, 2021 | 1 Year        |
| ENE-002   | EMI Test Receiver        | Rohde & Schwarz | ESCI         | 101107               | July 08, 2021 | 1 Year        |
| ENE-009   | Pre-Amplifier            | CD              | PAP-0203     | 22015                | July 08, 2021 | 1 Year        |
| ENE-010   | Bilog Antenna            | Schwarzbeck     | VULB9163     | 9163-467             | July 12, 2020 | 2 Year        |
| ENE-025-1 | Cable                    | Huber + Suhner  | CBL3-NN-0.5m | 101216-2140<br>500-2 | July 08, 2021 | 1 Year        |
| ENE-025-2 | Cable                    | Huber + Suhner  | CBL3-NN-3.0m | 101216-2143<br>000-2 | July 08, 2021 | 1 Year        |
| ENE-025-3 | Cable                    | Huber + Suhner  | CBL3-NN-9.0m | 101216-2149<br>000   | July 08, 2021 | 1 Year        |
| ENE-077   | RE control room          | SAEMC           | 7.2*3*4m     | /                    | Feb. 25, 2019 | 4 Year        |
| ENE-079   | 3 meter anechoic chamber | SAEMC           | 9*6*6m       | /                    | Feb. 25, 2019 | 4 Year        |



## 4. POWER LINE CONDUCTED EMISSION MEASUREMENT

### 4.1. Block Diagram of Test Setup

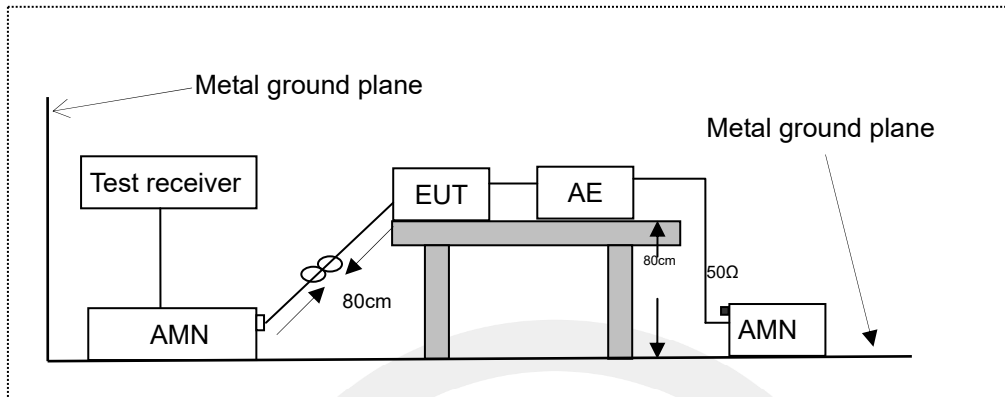

LISN: Line Impedance Stabilization Network  
AE: Associated equipment  
EUT: Equipment under test

### 4.2. Conducted Limit

FCC CFR Title 47, Part 15, Subpart B, Class B

| Frequency (MHz) | Limit (dB $\mu$ V) |               |
|-----------------|--------------------|---------------|
|                 | Quasi-peak Level   | Average Level |
| 0.15 ~ 0.50     | 66.0 ~ 56.0 *      | 56.0 ~ 46.0 * |
| 0.50 ~ 5.00     | 56.0               | 46.0          |
| 5.00 ~ 30.00    | 60.0               | 50.0          |

NOTE1-The lower limit shall apply at the transition frequencies.  
NOTE2-The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

### 4.3. Test Procedure

The EUT was placed on a desk 0.8 m height from the metal ground plane and 0.4 m from the conducting wall of the shielding room and it was kept at least 0.8 m from any other grounded conducting surface. The size of the table will nominally be 1.5 m x1.0 m.

The rear of the arrangement shall be flush with the back of the supporting tabletop unless that would not be possible or typical of normal use.

All units of equipment forming the system under test (includes the EUT as well as connected peripherals and associated equipment or devices) shall be arranged such that a nominal 0.1 m separation is achieved between the neighboring units.

Connect EUT to the power mains through a line impedance stabilization network (LISN). Where the mains cable supplied by the manufacturer is longer than 1 m, the excess should be folded at the centre into a bundle no longer than 0.4 m, so that its length is shortened to 1 m.

All the support units are connecting to the other LISN.

The LISN provides 50 ohm coupling impedance for the measuring instrument.

Both sides of AC line were checked for maximum conducted interference.

The frequency range from 150 kHz to 30 MHz was sweep.

Set the test-receiver system to quasi peak detect function and average detect function, and to measure the conducted emissions values.

Test results were obtained from the following equation:


Measurement (dB $\mu$ V) = Correct Factor (dB) + Reading (dB $\mu$ V)

Over (dB) = Measurement (dB $\mu$ V) - Limit (dB $\mu$ V)


#### 4.4. Measuring Results

**Pass.**

Please refer to following pages.

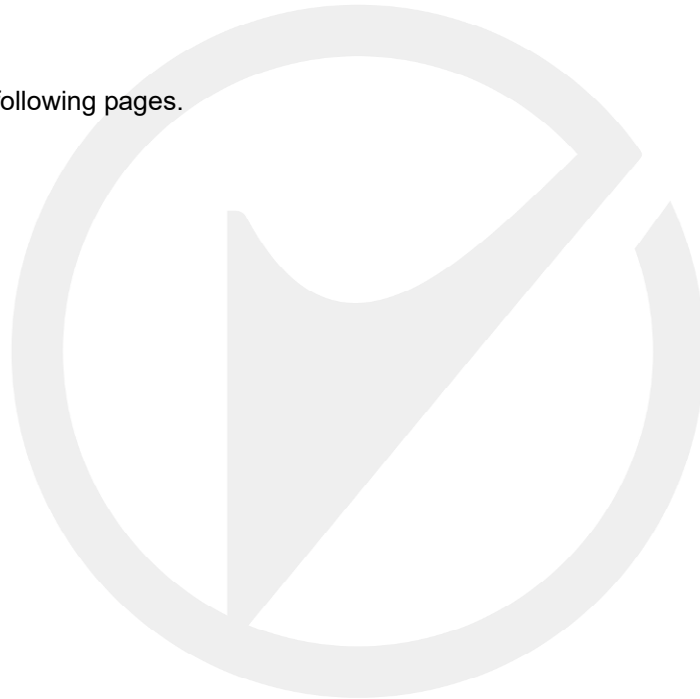


| Project Information |                      |           |              |
|---------------------|----------------------|-----------|--------------|
| Mode:               | LIGHTING             | Voltage:  | AC 120V/60Hz |
| Environment:        | Temp: 25°C; Humi:60% | Engineer: | San Song     |

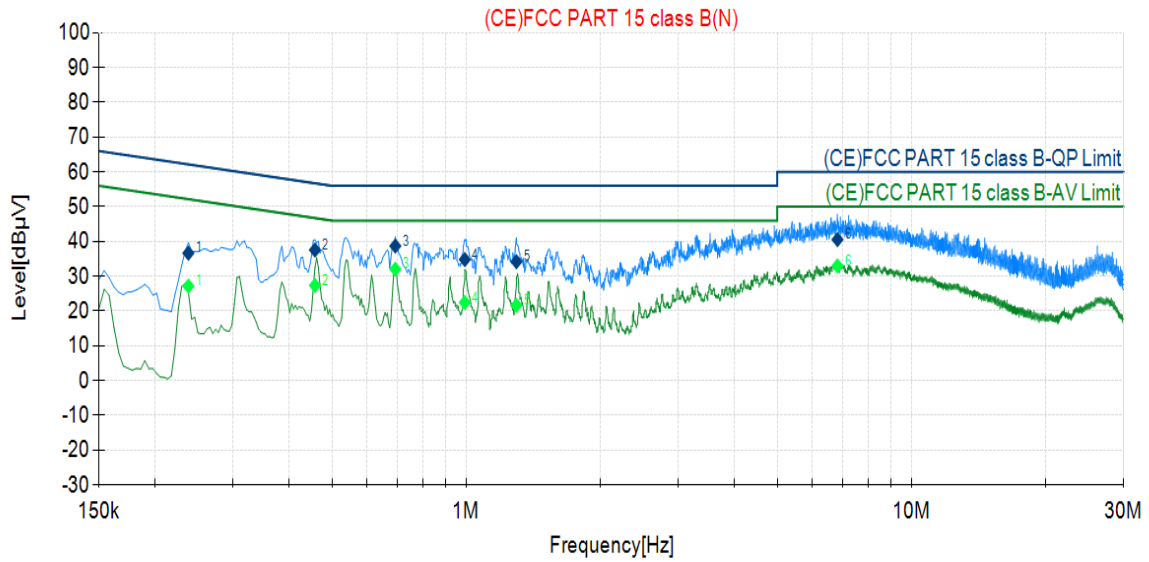

| Final Data List |             |             |                   |                 |                 |                |                   |                 |                 |                |         |
|-----------------|-------------|-------------|-------------------|-----------------|-----------------|----------------|-------------------|-----------------|-----------------|----------------|---------|
| NO.             | Freq. [MHz] | Factor [dB] | QP Reading [dBµV] | QP Value [dBµV] | QP Limit [dBµV] | QP Margin [dB] | AV Reading [dBµV] | AV Value [dBµV] | AV Limit [dBµV] | AV Margin [dB] | Verdict |
| 1               | 0.2380      | 9.49        | 27.15             | 36.64           | 62.17           | 25.53          | 17.68             | 27.17           | 52.17           | 25.00          | Pass    |
| 2               | 0.4580      | 9.51        | 28.04             | 37.55           | 56.73           | 19.18          | 17.84             | 27.35           | 46.73           | 19.38          | Pass    |
| 3               | 0.6940      | 9.44        | 29.25             | 38.69           | 56.00           | 17.31          | 22.59             | 32.03           | 46.00           | 13.97          | Pass    |
| 4               | 0.9940      | 9.45        | 25.35             | 34.80           | 56.00           | 21.20          | 12.99             | 22.44           | 46.00           | 23.56          | Pass    |
| 5               | 1.2980      | 9.44        | 24.75             | 34.19           | 56.00           | 21.81          | 12.19             | 21.63           | 46.00           | 24.37          | Pass    |
| 6               | 6.8300      | 9.38        | 31.17             | 40.55           | 60.00           | 19.45          | 23.57             | 32.95           | 50.00           | 17.05          | Pass    |


| Project Information |                      |           |              |
|---------------------|----------------------|-----------|--------------|
| Mode:               | ON                   | Voltage:  | AC 120V/60Hz |
| Environment:        | Temp: 25°C; Humi:60% | Engineer: | WHD          |

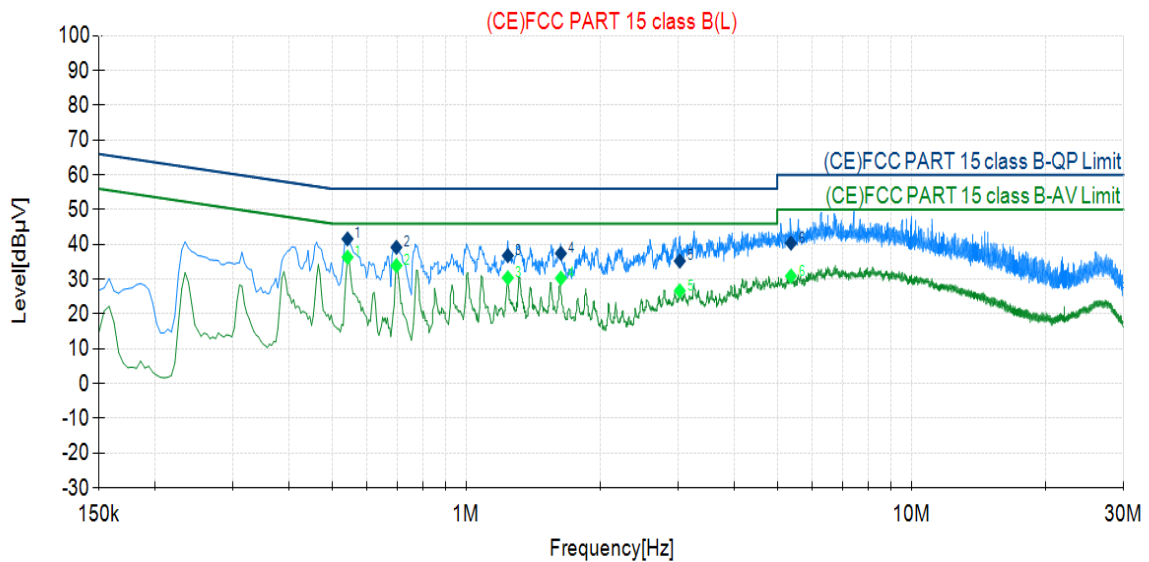

| Final Data List |             |             |                   |                 |                 |                |                   |                 |                 |                |         |
|-----------------|-------------|-------------|-------------------|-----------------|-----------------|----------------|-------------------|-----------------|-----------------|----------------|---------|
| NO.             | Freq. [MHz] | Factor [dB] | QP Reading [dBµV] | QP Value [dBµV] | QP Limit [dBµV] | QP Margin [dB] | AV Reading [dBµV] | AV Value [dBµV] | AV Limit [dBµV] | AV Margin [dB] | Verdict |
| 1               | 0.5420      | 9.54        | 32.06             | 41.60           | 56.00           | 14.40          | 26.79             | 36.33           | 46.00           | 9.67           | Pass    |
| 2               | 0.6980      | 9.58        | 29.61             | 39.19           | 56.00           | 16.81          | 24.33             | 33.91           | 46.00           | 12.09          | Pass    |
| 3               | 1.2420      | 9.58        | 27.21             | 36.79           | 56.00           | 19.21          | 20.82             | 30.40           | 46.00           | 15.60          | Pass    |
| 4               | 1.6340      | 9.58        | 27.84             | 37.42           | 56.00           | 18.58          | 20.71             | 30.29           | 46.00           | 15.71          | Pass    |
| 5               | 3.0220      | 9.57        | 25.66             | 35.23           | 56.00           | 20.77          | 17.13             | 26.70           | 46.00           | 19.30          | Pass    |
| 6               | 5.3700      | 9.52        | 30.86             | 40.38           | 60.00           | 19.62          | 21.40             | 30.92           | 50.00           | 19.08          | Pass    |

## 5. RADIATED EMISSION MEASUREMENT(UP TO 1GHz)

### 5.1. Block Diagram of Test Setup

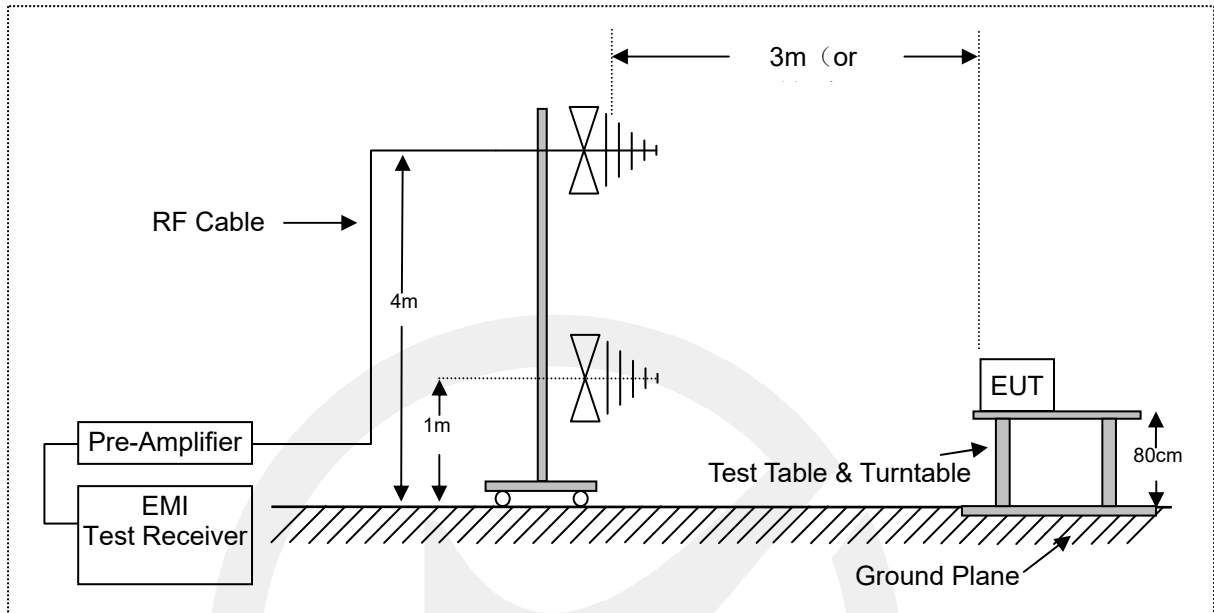

### 5.2. Radiated Limit

FCC CFR Title 47, Part 15, Subpart B, Class B

| Frequency<br>MHz | Distance<br>Meters | Field Strengths Limit  |                                   |
|------------------|--------------------|------------------------|-----------------------------------|
|                  |                    | $\mu\text{V}/\text{m}$ | $\text{dB}(\mu\text{V})/\text{m}$ |
| 30 ~ 88          | 3                  | 100                    | 40.0                              |
| 88 ~ 216         | 3                  | 150                    | 43.5                              |
| 216 ~ 960        | 3                  | 200                    | 46.0                              |
| 960 ~ 1000       | 3                  | 500                    | 54.0                              |

### 5.3. Test Procedure

The EUT was placed on a non-conductive table whose total height equaled 80cm. All units of equipment forming the system under test (includes the EUT as well as connected peripherals and associated equipment or devices) shall be arranged such that a nominal 0.1 m separation is achieved between the neighboring units. Where the mains cable supplied by the manufacturer is longer than 1 m, the excess should be folded at the centre into a bundle no longer than 0.4 m, so that its length is shortened to 1 m.

The EUT was set 3 meters away from the receiving antenna that was mounted on a non-conductive mast. The antenna can move up and down between 1 to 4 meters to find out the maximum emission level.

The turntable can rotate 360 degree to determine the position of the maximum emission level.

The initial testing identified the frequency that has the highest disturbance relative to the limit while operating the EUT in typical modes of operation and cable positions in a test setup representative of typical system configuration.

The identification of the frequency of highest emission with respect to the limit was found by investigating emissions at a number of significant frequencies. The probable frequency of maximum emission had been found and that the associated cable and EUT configuration and mode of operation had been identified.

The bandwidth of the Receiver is set at 120 kHz.

Test results were obtained from the following equation:

Measurement (dB $\mu$ V) = Correct Factor (dB) + Reading (dB $\mu$ V)

Over (dB) = Measurement (dB $\mu$ V) - Limit (dB $\mu$ V)


## 5.4. Measuring Results

**Pass.**

Please refer to following pages.




| Project Information |                      |           |              |
|---------------------|----------------------|-----------|--------------|
| Mode:               | LIGHTING             | Voltage:  | AC 120V/60Hz |
| Environment:        | Temp: 25°C; Humi:60% | Engineer: | Allen Tang   |

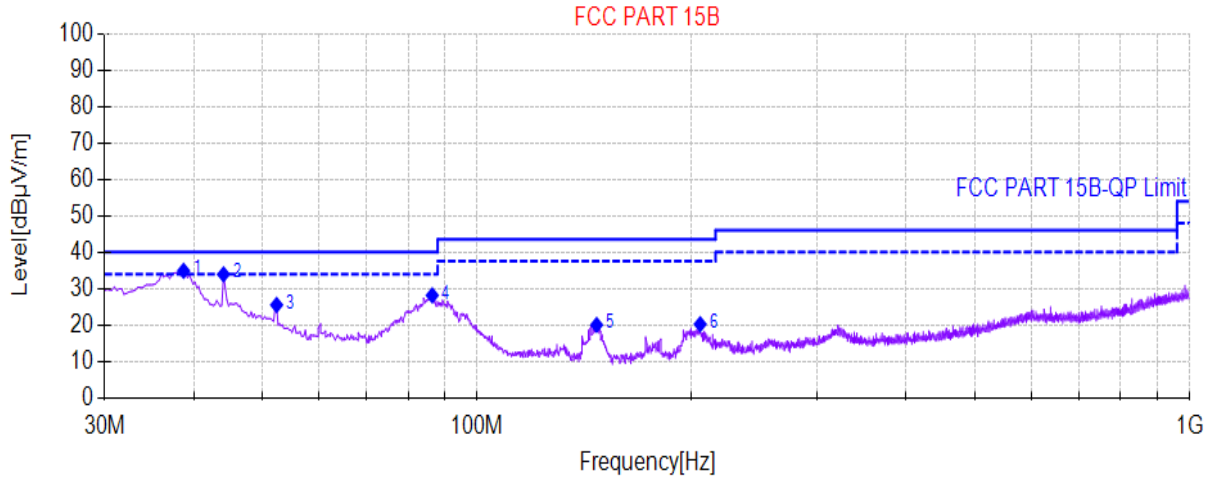

| Final Data List |             |                     |             |                   |                   |                |             |           |          |         |
|-----------------|-------------|---------------------|-------------|-------------------|-------------------|----------------|-------------|-----------|----------|---------|
| NO.             | Freq. [MHz] | QP Reading [dBµV/m] | Factor [dB] | QP Value [dBµV/m] | QP Limit [dBµV/m] | QP Margin [dB] | Height [cm] | Angle [°] | Polarity | Verdict |
| 1               | 38.73       | 58.35               | -23.45      | 34.90             | 40.00             | 5.10           | 100         | 196       | Vertical | Pass    |
| 2               | 44.065      | 57.37               | -23.44      | 33.93             | 40.00             | 6.07           | 100         | 204       | Vertical | Pass    |
| 3               | 52.31       | 47.83               | -22.32      | 25.51             | 40.00             | 14.49          | 100         | 344       | Vertical | Pass    |
| 4               | 86.5025     | 53.36               | -25.22      | 28.14             | 40.00             | 11.86          | 100         | 132       | Vertical | Pass    |
| 5               | 147.1275    | 45.92               | -25.91      | 20.01             | 43.50             | 23.49          | 100         | 202       | Vertical | Pass    |
| 6               | 205.57      | 43.26               | -23.05      | 20.21             | 43.50             | 23.29          | 100         | 242       | Vertical | Pass    |

| Project Information |                      |           |              |
|---------------------|----------------------|-----------|--------------|
| Mode:               | LIGHTING             | Voltage:  | AC 120V/60Hz |
| Environment:        | Temp: 25°C; Humi:60% | Engineer: | Allen Tang   |

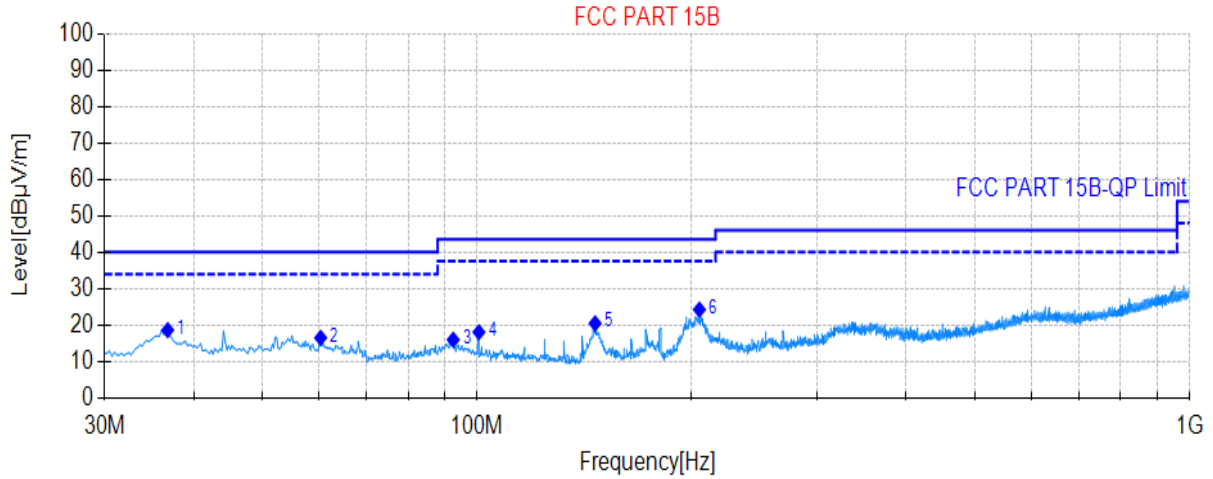


| Final Data List |             |                     |             |                   |                   |                |             |           |            |         |
|-----------------|-------------|---------------------|-------------|-------------------|-------------------|----------------|-------------|-----------|------------|---------|
| NO.             | Freq. [MHz] | QP Reading [dBµV/m] | Factor [dB] | QP Value [dBµV/m] | QP Limit [dBµV/m] | QP Margin [dB] | Height [cm] | Angle [°] | Polarity   | Verdict |
| 1               | 36.79       | 42.38               | -23.78      | 18.60             | 40.00             | 21.40          | 100         | 249       | Horizontal | Pass    |
| 2               | 60.3125     | 38.68               | -22.20      | 16.48             | 40.00             | 23.52          | 100         | 188       | Horizontal | Pass    |
| 3               | 92.565      | 41.12               | -25.16      | 15.96             | 43.50             | 27.54          | 100         | 158       | Horizontal | Pass    |
| 4               | 100.5675    | 41.84               | -23.82      | 18.02             | 43.50             | 25.48          | 100         | 322       | Horizontal | Pass    |
| 5               | 146.4       | 46.38               | -25.92      | 20.46             | 43.50             | 23.04          | 100         | 257       | Horizontal | Pass    |
| 6               | 205.085     | 47.29               | -23.06      | 24.23             | 43.50             | 19.27          | 100         | 84        | Horizontal | Pass    |



## 6. RADIATED EMISSION MEASUREMENT (ABOVE 1GHz)

### 6.1. Block Diagram of Test Setup

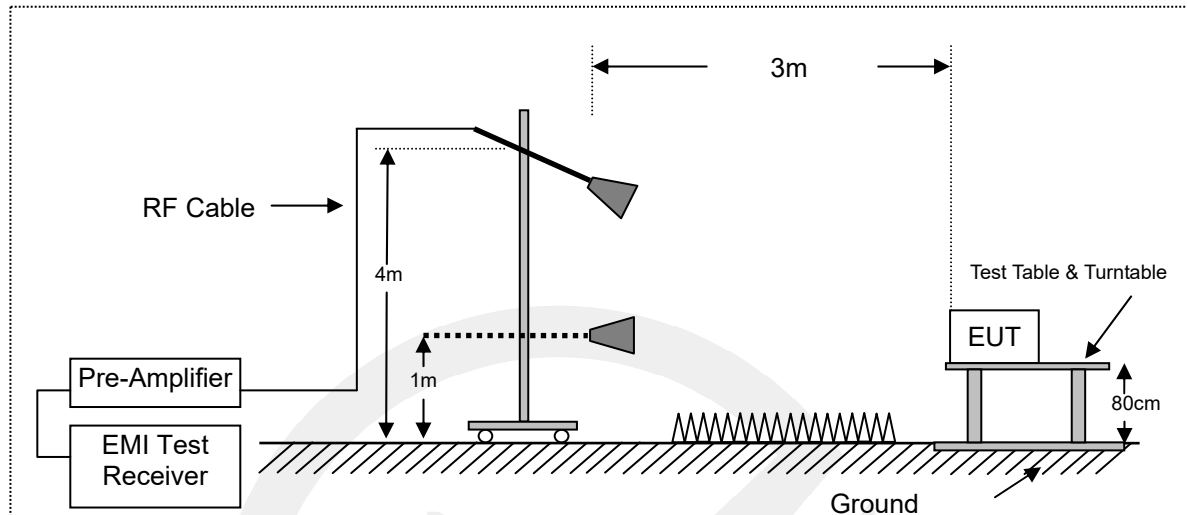

### 6.2. Radiated Limit

FCC CFR Title 47, Part 15, Subpart B, Class B

| Frequency range<br>MHz | Average limit<br>dB( $\mu$ V/m) | Peak limit<br>dB( $\mu$ V/m) |
|------------------------|---------------------------------|------------------------------|
| Above 1000             | 54                              | 74                           |

Note: The highest internal source of an EUT is defined as the highest frequency generated or used in the device or on which the EUT operates or tunes. If the highest frequency of the internal sources of the EUT is less than 1.705 MHz, the measurement shall only be made up to 30 MHz. If the highest frequency of the internal sources of the EUT is between 1.705 MHz and 108 MHz, the measurement shall only be made up to 1 GHz. If the highest frequency of the internal sources of the EUT is between 108 MHz and 500 MHz the measurement shall only be made up to 2 GHz. If the highest frequency of the internal sources of the EUT is between 500 MHz and 1 GHz, the measurement shall only be made up to 5 GHz. If the highest frequency of the internal sources of the EUT is above 1 GHz, the measurement shall be made up to 5 times the highest frequency or 40 GHz, whichever is less.

### 6.3. Test Procedure

The EUT was placed on a non-conductive table whose total height equaled 80cm. All units of equipment forming the system under test (includes the EUT as well as connected peripherals and associated equipment or devices) shall be arranged such that a nominal 0.1 m separation is achieved between the neighboring units. Where the mains cable supplied by the manufacturer is longer than 1 m, the excess should be folded at the centre into a bundle no longer than 0.4 m, so that its length is shortened to 1 m.

The EUT was set 3 meters away from the receiving antenna that was mounted on a non-conductive mast. The antenna can move up and down between 1 to 4 meters to find out the maximum emission level.

The turntable can rotate 360 degree to determine the position of the maximum emission level.

The initial testing identified the frequency that has the highest disturbance relative to the limit while operating the EUT in typical modes of operation and cable positions in a test setup representative of typical system configuration.

The identification of the frequency of highest emission with respect to the limit was found by investigating emissions at a number of significant frequencies. The probable frequency of maximum emission had been found and that the associated cable and EUT configuration and mode of operation had been identified.

The frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with peak detector for peak values, and use RBW=1 MHz and VBW=10 Hz with peak detector for Average Values.

Test results were obtained from the following equation:

Measurement (dB $\mu$ V) = Correct Factor (dB) + Reading (dB $\mu$ V)

Over (dB) = Measurement (dB $\mu$ V) - Limit (dB $\mu$ V)

#### 6.4. Measuring Results

N/A.

\*\*\* End of Report \*\*\*

# 声明 Statement

1. 本报告无授权批准人签字及“检验报告专用章”无效；  
This report will be void without authorized signature or special seal for testing report.
2. 未经许可本报告不得部分复制；  
This report shall not be copied partly without authorization.
3. 本报告的检测结果仅对送测样品有效，委托方对样品的代表性和资料的真实性负责；  
The test results or observations are applicable only to tested sample. Client shall be responsible for representativeness of the sample and authenticity of the material.
4. 本检测报告中检测项目标注有特殊符号则该项目不在资质认定范围内，仅作为客户委托、科研、教学或内部质量控制等目的使用；  
The observations or tests with special mark fall outside the scope of accreditation, and are only used for purpose of commission, research, training, internal quality control etc.
5. 本检测报告以实测值进行符合性判定，未考虑不确定度所带来的风险，本实验室不承担相关责任，特别约定、标准或规范中有明确规定的除外；  
The test results or observations are provided in accordance with measured value, without taking risks caused by uncertainty into account. Without explicit stipulation in special agreements, standards or regulations, EMTEK shall not assume any responsibility.
6. 对本检测报告若有异议，请于收到报告之日起 20 日内提出；  
Objections shall be raised within 20 days from the date receiving the report.