


7.4 Test Result

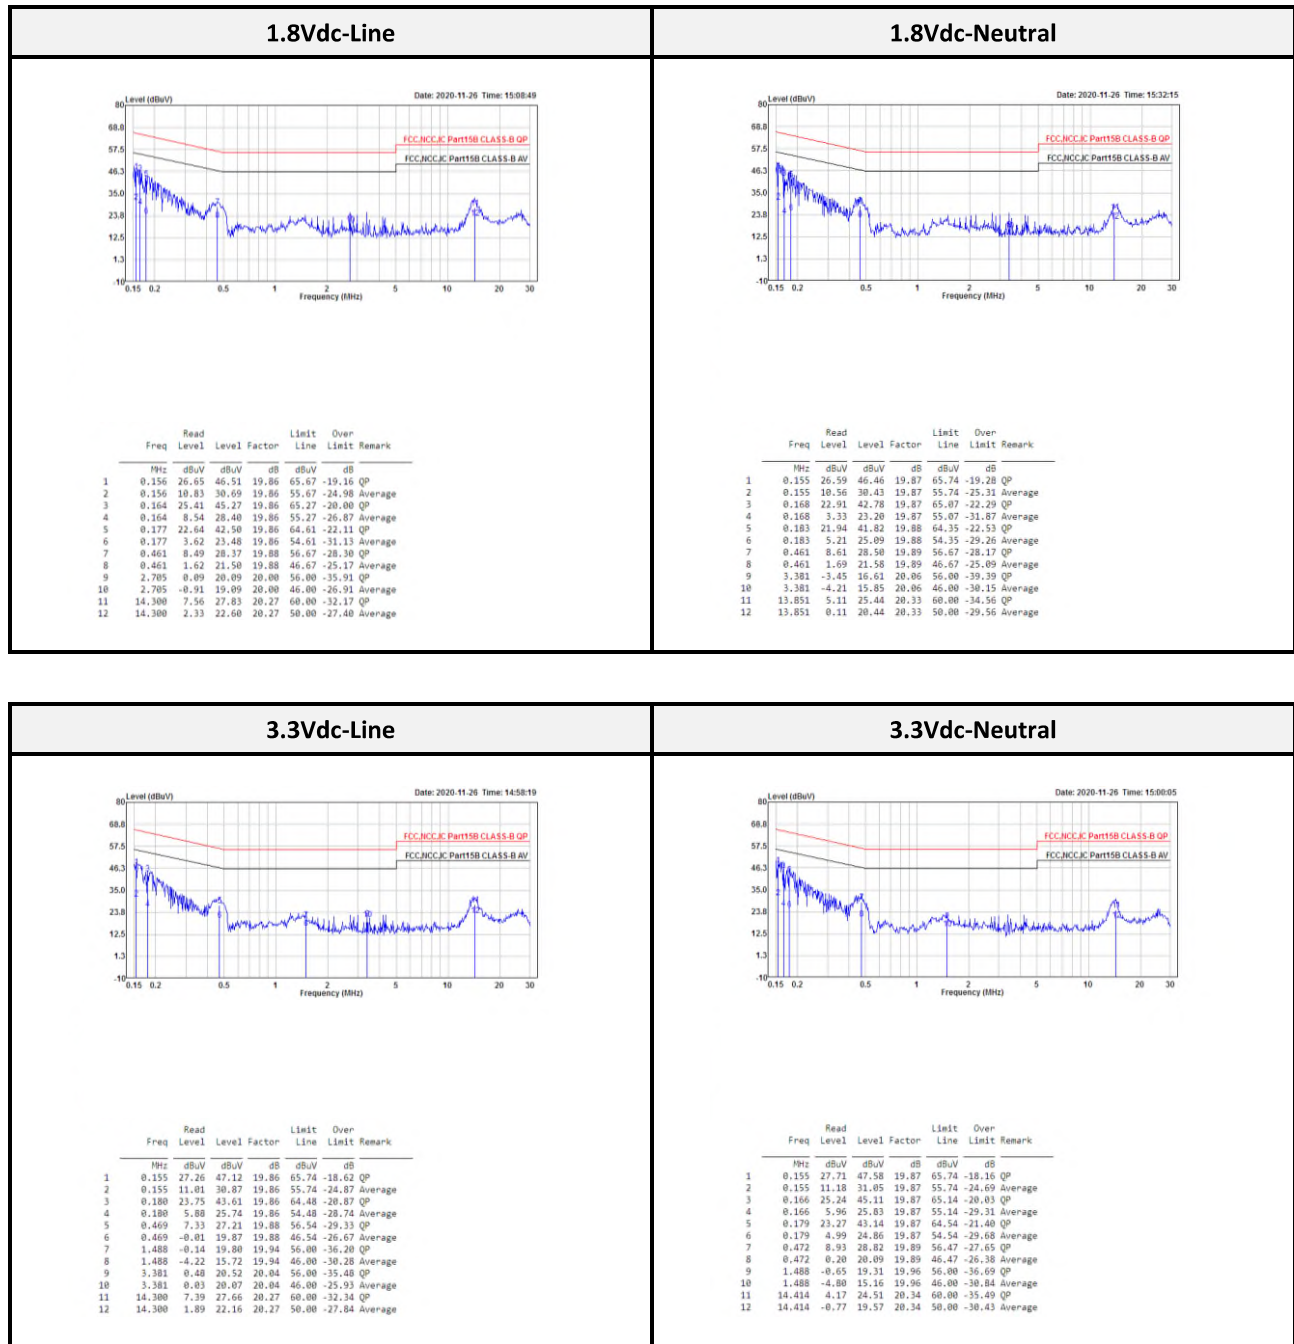

Note:

Level = Read Level + Factor

Over Limit (Margin) = Level – Limit Line

Factor = (LISN, ISN, PLC or current probe) Factor + Cable Loss + Attenuator

8 FCC §15.209, §15.205, §15.247(d), RSS-Gen Sec 8.9, 8.10 and RSS-247 Sec 5.5 – Spurious Emissions

8.1 Applicable Standard

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1MHz.

As Per FCC §15.205(a) except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	13.36-13.41	399.9-410	4.5-5.15
0.495-0.505	16.42-16.423	608-614	5.35-5.46
2.1735-2.1905	16.69475-16.69525	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6

As per FCC §15.209(a): Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

As per FCC §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

As per RSS-Gen 8.9,

Except when the requirements applicable to a given device state otherwise, emissions from licence-exempt transmitters shall comply with the field strength limits shown in Table 4 and Table 5 below. Additionally, the level of any transmitter emission shall not exceed the level of the transmitter's fundamental emission.

Table 4 – General Field Strength Limits for Licence-Exempt Transmitters at Frequencies Above 30 MHz


Frequency (MHz)	Field Strength (µV/m at 3 metres)
30-88	100
88-216	150
216-960	200
Above 960*	500

* Unless otherwise specified, for all frequencies greater than 1 GHz, the radiated emission limits for licence-exempt radio apparatus stated in applicable RSSs (including RSS-Gen) are based on measurements using a linear average detector function having a minimum resolution bandwidth of 1 MHz. If an average limit is specified for the EUT, then the peak emission shall also be measured with instrumentation properly adjusted for such factors as pulse desensitization to ensure the peak emission is less than 20 dB above the average limit.

Note: Transmitting devices are not permitted in restricted frequency bands unless stated otherwise in the specific RSS.

As per RSS-247 §5.5, in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

8.2 EUT Setup and Test Procedure

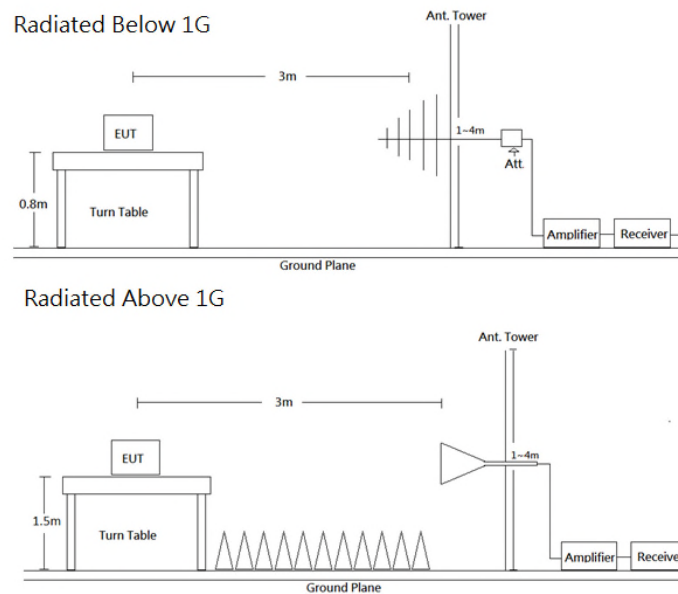

Radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the RSS-Gen, FCC Part 15.209 and FCC 15.247 Limits.

The system was investigated from 30 MHz to 26.5 GHz. During the radiated emission test, the EMI test receiver was set with the following configurations measurement method 6.3 in ANSI C63.10.

Frequency Range	RBW	VBW	Duty cycle	Measurement method
30-1000 MHz	120 kHz	/	-	QP
Above 1 GHz	1 MHz	3 MHz	-	PK
	1 MHz	10 Hz	>98%	PK
	1 MHz	1/T	<98%	Ave

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations. All data was recorded in the Quasi-peak detector mode from 30 MHz to 1 GHz and PK and average detector modes for frequencies above 1 GHz.

8.3 Test Equipment List and Details


Description	Manufacture	Model	Serial No.	Cal. Date.	Cal. Due.
Radiation 3M Room (966B)					
Active Loop	EMCO	6502	0001-3322	2020/03/16	2021/03/15
Bilog Antenna/6 dB Attenuator	SUNOL SCIENCES & EMEC /EMCI	JB3/N-6-06	A111513/AT-N0668	2020/03/19	2021/03/18
Signal and Spectrum Analyzer	Rohde & Schwarz	FSV40	101434	2020/05/07	2021/05/06
Horn Antenna	ETS-Lindgren	3115	00109141	2020/07/15	2021/07/14
Horn Antenna	ETS-Lindgren	3160-09	00123852	2020/07/07	2021/07/06
Preamplifier	A.H. Systems	PAM-1840VH	174	2020/03/25	2021/03/24
Preamplifier	A.H. Systems	PAM-0118	478	2020/05/05	2021/05/04
Microflex Cable (1m)	EMCI	EMC102-KM-KM-1000	180524	2020/08/06	2021/08/05
Microflex Cable (2m)	EMCI	EMC106-SM-SM-2000	180516	2020/08/06	2021/08/05
Microflex Cable (8m)	UTIFLEX	UFA210A-1-3149-300300	MFR 64639 232490-002	2020/08/06	2021/08/05
Turn Table	Chaintek	T-200-S-1	003501	N.C.R	N.C.R
Antenna Tower	Chaintek	MBD-400-1	003504	N.C.R	N.C.R
Controller	Chaintek	3000-1	003507	N.C.R	N.C.R
Software	Audix	e3 v9	E3LK-01	N.C.R	N.C.R
Conducted Room (TH-02)					
Signal and Spectrum Analyzer	Rohde & Schwarz	FSV40	101434	2020/05/07	2021/05/06
Cable	MTJ	MT40S	620620-MT40S-100	Each Use	-

***Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).

8.4 Test Results

Transmitting mode (Pre-scan with three orthogonal axis, and worse case as Z axis)

Below 1G (30 MHz-1 GHz) test the worst mode

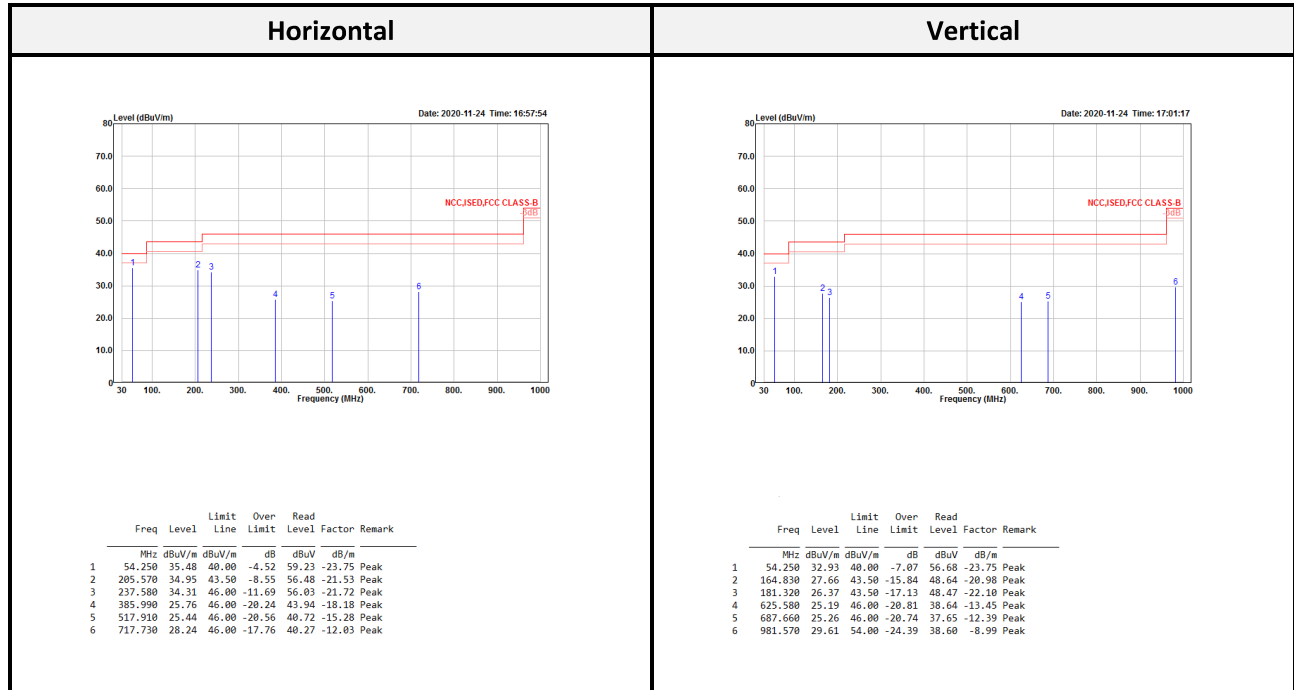

Result = Reading + Correct Factor

Margin = Result – Limit

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain

Spurious emissions more than 20 dB below the limit were not reported

Above 1G (1 GHz-26.5 GHz)<Chip Antenna (FR05-S1-N-0-102) with 1.8V_{dc}>

IEEE 802.11b Low CH Horizontal							IEEE 802.11b Low CH Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2386.496	48.99	54.00	-5.01	56.76	-7.77	Average	2385.936	41.33	54.00	-12.67	49.10	-7.77	Average
2386.496	58.66	74.00	-15.34	66.43	-7.77	Peak	2385.936	53.06	74.00	-20.94	60.83	-7.77	Peak
2411.248	101.74			109.45	-7.71	Average	2411.248	94.33			102.04	-7.71	Average
2411.248	104.35			112.06	-7.71	Peak	2411.248	96.99			104.70	-7.71	Peak
3216.000	43.51	54.00	-10.49	48.97	-5.46	Average	3216.000	39.95	54.00	-14.05	45.41	-5.46	Average
3216.000	46.17	74.00	-27.83	51.63	-5.46	Peak	3216.000	43.83	74.00	-30.17	49.29	-5.46	Peak
4824.000	35.05	54.00	-18.95	36.70	-1.65	Average	4824.000	33.05	54.00	-20.95	34.70	-1.65	Average
4824.000	43.23	74.00	-30.77	44.88	-1.65	Peak	4824.000	43.00	74.00	-31.00	44.65	-1.65	Peak
7236.000	35.44	54.00	-18.56	29.87	5.57	Average	7236.000	34.87	54.00	-19.13	29.30	5.57	Average
7236.000	48.57	74.00	-25.43	43.00	5.57	Peak	7236.000	48.07	74.00	-25.93	42.50	5.57	Peak

IEEE 802.11b Middle CH Horizontal							IEEE 802.11b Middle CH Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2388.892	48.08	54.00	-5.92	55.84	-7.76	Average	2389.376	40.93	54.00	-13.07	48.69	-7.76	Average
2388.892	58.99	74.00	-15.01	66.75	-7.76	Peak	2389.376	52.67	74.00	-21.33	60.43	-7.76	Peak
2436.324	104.68			112.33	-7.65	Average	2436.324	97.44			105.09	-7.65	Average
2436.324	107.51			115.16	-7.65	Peak	2436.324	100.12			107.77	-7.65	Peak
2488.596	43.73	54.00	-10.27	51.32	-7.59	Average	2547.402	38.53	54.00	-15.47	45.92	-7.39	Average
2488.596	56.29	74.00	-17.71	63.88	-7.59	Peak	2547.402	52.25	74.00	-21.75	59.64	-7.39	Peak
3249.300	45.48	54.00	-8.52	50.84	-5.36	Average	3249.300	44.19	54.00	-9.81	49.55	-5.36	Average
3249.300	47.79	74.00	-26.21	53.15	-5.36	Peak	3249.300	47.28	74.00	-26.72	52.64	-5.36	Peak
4874.000	44.11	54.00	-9.89	45.66	-1.55	Average	4874.000	45.87	54.00	-8.13	47.42	-1.55	Average
4874.000	47.32	74.00	-26.68	48.87	-1.55	Peak	4874.000	49.21	74.00	-24.79	50.76	-1.55	Peak
7311.000	44.62	54.00	-9.38	39.30	5.32	Average	7311.000	41.27	54.00	-12.73	35.95	5.32	Average
7311.000	52.13	74.00	-21.87	46.81	5.32	Peak	7311.000	49.74	74.00	-24.26	44.42	5.32	Peak

IEEE 802.11b High CH Horizontal							IEEE 802.11b High CH Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2461.100	101.58			109.20	-7.62	Average	2461.200	94.02			101.64	-7.62	Average
2461.100	104.32			111.94	-7.62	Peak	2461.200	96.63			104.25	-7.62	Peak
2487.800	53.21	54.00	-0.79	60.80	-7.59	Average	2488.100	43.00	54.00	-11.00	50.59	-7.59	Average
2487.800	59.95	74.00	-14.05	67.54	-7.59	Peak	2488.100	54.50	74.00	-19.50	62.09	-7.59	Peak
3282.700	45.03	54.00	-8.97	50.33	-5.30	Average	3282.700	43.04	54.00	-10.96	48.34	-5.30	Average
3282.700	47.24	74.00	-26.76	52.54	-5.30	Peak	3282.700	46.03	74.00	-27.97	51.33	-5.30	Peak
4924.000	41.09	54.00	-12.91	42.52	-1.43	Average	4924.000	40.08	54.00	-13.92	41.51	-1.43	Average
4924.000	46.78	74.00	-27.22	48.21	-1.43	Peak	4924.000	46.08	74.00	-27.92	47.51	-1.43	Peak
7386.000	38.66	54.00	-15.34	33.22	5.44	Average	7386.000	36.94	54.00	-17.06	31.50	5.44	Average
7386.000	48.74	74.00	-25.26	43.30	5.44	Peak	7386.000	48.86	74.00	-25.14	43.42	5.44	Peak

IEEE 802.11g Low CH Horizontal							IEEE 802.11g Low CH Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2389.968	53.66	54.00	-0.34	61.42	-7.76	Average	2389.072	45.74	54.00	-8.26	53.50	-7.76	Average
2389.968	71.56	74.00	-2.44	79.32	-7.76	Peak	2389.072	63.65	74.00	-10.35	71.41	-7.76	Peak
2410.912	92.53			100.24	-7.71	Average	2413.712	85.83			93.54	-7.71	Average
2410.912	102.92			110.63	-7.71	Peak	2413.712	96.08			103.79	-7.71	Peak
3216.000	45.37	54.00	-8.63	50.83	-5.46	Average	3216.000	38.90	54.00	-15.10	44.36	-5.46	Average
3216.000	46.84	74.00	-27.16	52.30	-5.46	Peak	3216.000	43.63	74.00	-30.37	49.09	-5.46	Peak
4824.000	29.10	54.00	-24.90	30.75	-1.65	Average	4824.000	29.21	54.00	-24.79	30.86	-1.65	Average
4824.000	42.05	74.00	-31.95	43.70	-1.65	Peak	4824.000	42.30	74.00	-31.70	43.95	-1.65	Peak
7236.000	34.42	54.00	-19.58	28.85	5.57	Average	7236.000	34.52	54.00	-19.48	28.95	5.57	Average
7236.000	47.74	74.00	-26.26	42.17	5.57	Peak	7236.000	48.30	74.00	-25.70	42.73	5.57	Peak

IEEE 802.11g Middle CH Horizontal							IEEE 802.11g Middle CH Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2389.860	51.05	54.00	-2.95	58.81	-7.76	Average	2389.376	44.57	54.00	-9.43	52.33	-7.76	Average
2389.860	69.08	74.00	-4.92	76.84	-7.76	Peak	2389.376	61.74	74.00	-12.26	69.50	-7.76	Peak
2438.744	98.65			106.30	-7.65	Average	2434.630	90.79			98.45	-7.66	Average
2438.744	109.06			116.71	-7.65	Peak	2434.630	101.19			108.85	-7.66	Peak
2486.176	46.88	54.00	-7.12	54.47	-7.59	Average	2501.180	39.18	54.00	-14.82	46.76	-7.58	Average
2486.176	61.46	74.00	-12.54	69.05	-7.59	Peak	2501.180	52.50	74.00	-21.50	60.08	-7.58	Peak
3249.300	44.87	54.00	-9.13	50.23	-5.36	Average	3249.300	43.94	54.00	-10.06	49.30	-5.36	Average
3249.300	48.23	74.00	-25.77	53.59	-5.36	Peak	3249.300	45.90	74.00	-28.10	51.26	-5.36	Peak
4874.000	31.37	54.00	-22.63	32.92	-1.55	Average	4874.000	30.11	54.00	-23.89	31.66	-1.55	Average
4874.000	44.57	74.00	-29.43	46.12	-1.55	Peak	4874.000	43.87	74.00	-30.13	45.42	-1.55	Peak
7311.000	37.95	54.00	-16.05	32.63	5.32	Average	7311.000	36.42	54.00	-17.58	31.10	5.32	Average
7311.000	50.42	74.00	-23.58	45.10	5.32	Peak	7311.000	49.72	74.00	-24.28	44.40	5.32	Peak

IEEE 802.11g High CH Horizontal							IEEE 802.11g High CH Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2460.900	93.18			100.80	-7.62	Average	2459.400	85.11			92.73	-7.62	Average
2460.900	103.40			111.02	-7.62	Peak	2459.400	95.71			103.33	-7.62	Peak
2484.000	53.31	54.00	-0.69	60.90	-7.59	Average	2484.200	44.56	54.00	-9.44	52.15	-7.59	Average
2484.000	70.67	74.00	-3.33	78.26	-7.59	Peak	2484.200	62.18	74.00	-11.82	69.77	-7.59	Peak
3282.700	44.98	54.00	-9.02	50.28	-5.30	Average	3282.700	42.26	54.00	-11.74	47.56	-5.30	Average
3282.700	47.41	74.00	-26.59	52.71	-5.30	Peak	3282.700	43.99	74.00	-30.01	49.29	-5.30	Peak
4924.000	30.16	54.00	-23.84	31.59	-1.43	Average	4924.000	29.02	54.00	-24.98	30.45	-1.43	Average
4924.000	43.76	74.00	-30.24	45.19	-1.43	Peak	4924.000	43.48	74.00	-30.52	44.91	-1.43	Peak
7386.000	34.09	54.00	-19.91	28.65	5.44	Average	7386.000	34.58	54.00	-19.42	29.14	5.44	Average
7386.000	48.67	74.00	-25.33	43.23	5.44	Peak	7386.000	48.18	74.00	-25.82	42.74	5.44	Peak

IEEE 802.11n HT20 Low CH Horizontal							IEEE 802.11n HT20 Low CH Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2389.072	53.83	54.00	-0.17	61.59	-7.76	Average	2388.288	46.20	54.00	-7.80	53.97	-7.77	Average
2389.072	71.16	74.00	-2.84	78.92	-7.76	Peak	2388.288	61.90	74.00	-12.10	69.67	-7.77	Peak
2411.248	91.50			99.21	-7.71	Average	2414.048	84.77			92.48	-7.71	Average
2411.248	102.27			109.98	-7.71	Peak	2414.048	95.54			103.25	-7.71	Peak
3216.000	44.05	54.00	-9.95	49.51	-5.46	Average	3216.000	39.48	54.00	-14.52	44.94	-5.46	Average
3216.000	46.13	74.00	-27.87	51.59	-5.46	Peak	3216.000	43.96	74.00	-30.04	49.42	-5.46	Peak
4824.000	29.00	54.00	-25.00	30.65	-1.65	Average	4824.000	30.31	54.00	-23.69	31.96	-1.65	Average
4824.000	43.48	74.00	-30.52	45.13	-1.65	Peak	4824.000	44.16	74.00	-29.84	45.81	-1.65	Peak
7236.000	34.31	54.00	-19.69	28.74	5.57	Average	7236.000	34.83	54.00	-19.17	29.26	5.57	Average
7236.000	47.67	74.00	-26.33	42.10	5.57	Peak	7236.000	48.63	74.00	-25.37	43.06	5.57	Peak

IEEE 802.11n HT20 Middle CH Horizontal							IEEE 802.11n HT20 Middle CH Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2387.924	53.39	54.00	-0.61	61.16	-7.77	Average	2389.134	45.67	54.00	-8.33	53.43	-7.76	Average
2387.924	70.53	74.00	-3.47	78.30	-7.77	Peak	2389.134	61.76	74.00	-12.24	69.52	-7.76	Peak
2435.356	98.97			106.62	-7.65	Average	2434.388	91.22			98.88	-7.66	Average
2435.356	109.91			117.56	-7.65	Peak	2434.388	102.30			109.96	-7.66	Peak
2488.838	46.88	54.00	-7.12	54.47	-7.59	Average	2485.692	40.25	54.00	-13.75	47.84	-7.59	Average
2488.838	61.65	74.00	-12.35	69.24	-7.59	Peak	2485.692	53.52	74.00	-20.48	61.11	-7.59	Peak
3249.300	45.62	54.00	-8.38	50.98	-5.36	Average	3249.300	43.84	54.00	-10.16	49.20	-5.36	Average
3249.300	47.98	74.00	-26.02	53.34	-5.36	Peak	3249.300	46.99	74.00	-27.01	52.35	-5.36	Peak
4874.000	31.21	54.00	-22.79	32.76	-1.55	Average	4874.000	30.41	54.00	-23.59	31.96	-1.55	Average
4874.000	44.00	74.00	-30.00	45.55	-1.55	Peak	4874.000	43.35	74.00	-30.65	44.90	-1.55	Peak
7311.000	37.43	54.00	-16.57	32.11	5.32	Average	7311.000	35.85	54.00	-18.15	30.53	5.32	Average
7311.000	50.82	74.00	-23.18	45.50	5.32	Peak	7311.000	48.76	74.00	-25.24	43.44	5.32	Peak

IEEE 802.11n HT20 High CH Horizontal							IEEE 802.11n HT20 High CH Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2458.400	91.56			99.18	-7.62	Average	2459.300	83.77			91.39	-7.62	Average
2458.400	102.55			110.17	-7.62	Peak	2459.300	95.03			102.65	-7.62	Peak
2485.000	47.94	54.00	-6.06	55.53	-7.59	Average	2484.800	40.55	54.00	-13.45	48.14	-7.59	Average
2485.000	65.75	74.00	-8.25	73.34	-7.59	Peak	2484.800	58.34	74.00	-15.66	65.93	-7.59	Peak
3282.700	45.16	54.00	-8.84	50.46	-5.30	Average	3282.700	42.46	54.00	-11.54	47.76	-5.30	Average
3282.700	47.30	74.00	-26.70	52.60	-5.30	Peak	3282.700	45.64	74.00	-28.36	50.94	-5.30	Peak
4924.000	30.11	54.00	-23.89	31.54	-1.43	Average	4924.000	30.07	54.00	-23.93	31.50	-1.43	Average
4924.000	42.88	74.00	-31.12	44.31	-1.43	Peak	4924.000	43.68	74.00	-30.32	45.11	-1.43	Peak
7386.000	35.18	54.00	-18.82	29.74	5.44	Average	7386.000	34.77	54.00	-19.23	29.33	5.44	Average
7386.000	48.27	74.00	-25.73	42.83	5.44	Peak	7386.000	48.58	74.00	-25.42	43.14	5.44	Peak

IEEE 802.11n HT40 Low CH Horizontal							IEEE 802.11n HT40 Low CH Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2386.956	53.50	54.00	-0.50	61.27	-7.77	Average	2388.540	45.88	54.00	-8.12	53.65	-7.77	Average
2386.956	68.00	74.00	-6.00	75.77	-7.77	Peak	2388.540	60.57	74.00	-13.43	68.34	-7.77	Peak
2428.008	84.96			92.63	-7.67	Average	2417.184	78.07			85.76	-7.69	Average
2428.008	95.43			103.10	-7.67	Peak	2417.184	88.98			96.67	-7.69	Peak
3229.300	43.67	54.00	-10.33	49.09	-5.42	Average	3229.300	41.22	54.00	-12.78	46.64	-5.42	Average
3229.300	47.07	74.00	-26.93	52.49	-5.42	Peak	3229.300	45.27	74.00	-28.73	50.69	-5.42	Peak
4844.000	29.12	54.00	-24.88	30.74	-1.62	Average	4844.000	28.81	54.00	-25.19	30.43	-1.62	Average
4844.000	42.99	74.00	-31.01	44.61	-1.62	Peak	4844.000	44.02	74.00	-29.98	45.64	-1.62	Peak
7266.000	33.83	54.00	-20.17	28.41	5.42	Average	7266.000	33.72	54.00	-20.28	28.30	5.42	Average
7266.000	47.21	74.00	-26.79	41.79	5.42	Peak	7266.000	47.14	74.00	-26.86	41.72	5.42	Peak

IEEE 802.11n HT40 Middle CH Horizontal							IEEE 802.11n HT40 Middle CH Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2389.134	53.94	54.00	-0.06	61.70	-7.76	Average	2389.376	46.39	54.00	-7.61	54.15	-7.76	Average
2389.134	70.35	74.00	-3.65	78.11	-7.76	Peak	2389.376	64.52	74.00	-9.48	72.28	-7.76	Peak
2430.032	88.95			96.62	-7.67	Average	2444.068	80.81			88.45	-7.64	Average
2430.032	99.55			107.22	-7.67	Peak	2444.068	91.12			98.76	-7.64	Peak
2484.240	49.97	54.00	-4.03	57.56	-7.59	Average	2483.998	41.60	54.00	-12.40	49.19	-7.59	Average
2484.240	67.78	74.00	-6.22	75.37	-7.59	Peak	2483.998	58.03	74.00	-15.97	65.62	-7.59	Peak
3249.300	45.51	54.00	-8.49	50.87	-5.36	Average	3249.300	43.50	54.00	-10.50	48.86	-5.36	Average
3249.300	47.95	74.00	-26.05	53.31	-5.36	Peak	3249.300	46.26	74.00	-27.74	51.62	-5.36	Peak
4874.000	29.06	54.00	-24.94	30.61	-1.55	Average	4874.000	29.21	54.00	-24.79	30.76	-1.55	Average
4874.000	42.62	74.00	-31.38	44.17	-1.55	Peak	4874.000	44.17	74.00	-29.83	45.72	-1.55	Peak
7311.000	33.90	54.00	-20.10	28.58	5.32	Average	7311.000	33.82	54.00	-20.18	28.50	5.32	Average
7311.000	47.05	74.00	-26.95	41.73	5.32	Peak	7311.000	48.24	74.00	-25.76	42.92	5.32	Peak

IEEE 802.11n HT40 High CH Horizontal							IEEE 802.11n HT40 High CH Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2445.440	86.96			94.59	-7.63	Average	2445.440	79.69			87.32	-7.63	Average
2445.440	98.13			105.76	-7.63	Peak	2445.440	90.70			98.33	-7.63	Peak
2487.080	48.92	54.00	-5.08	56.51	-7.59	Average	2485.160	40.31	54.00	-13.69	47.90	-7.59	Average
2487.080	64.95	74.00	-9.05	72.54	-7.59	Peak	2485.160	55.41	74.00	-18.59	63.00	-7.59	Peak
3269.300	43.98	54.00	-10.02	49.31	-5.33	Average	3269.300	43.09	54.00	-10.91	48.42	-5.33	Average
3269.300	46.78	74.00	-27.22	52.11	-5.33	Peak	3269.300	46.06	74.00	-27.94	51.39	-5.33	Peak
4904.000	29.30	54.00	-24.70	30.77	-1.47	Average	4904.000	29.30	54.00	-24.70	30.77	-1.47	Average
4904.000	43.24	74.00	-30.76	44.71	-1.47	Peak	4904.000	43.10	74.00	-30.90	44.57	-1.47	Peak
7356.000	33.50	54.00	-20.50	28.23	5.27	Average	7356.000	33.71	54.00	-20.29	28.44	5.27	Average
7356.000	47.09	74.00	-26.91	41.82	5.27	Peak	7356.000	46.91	74.00	-27.09	41.64	5.27	Peak

<Chip Antenna (FR05-S1-N-0-102) with 3.3V_{dc}>

IEEE 802.11b Low CH Horizontal							IEEE 802.11b Low CH Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2389.520	53.85	54.00	-0.15	61.61	-7.76	Average	2387.056	45.14	54.00	-8.86	52.91	-7.77	Average
2389.520	61.96	74.00	-12.04	69.72	-7.76	Peak	2387.056	55.08	74.00	-18.92	62.85	-7.77	Peak
2411.248	105.88			113.59	-7.71	Average	2411.248	99.62			107.33	-7.71	Average
2411.248	108.59			116.30	-7.71	Peak	2411.248	102.35			110.06	-7.71	Peak
3216.000	44.33	54.00	-9.67	49.79	-5.46	Average	3216.000	43.13	54.00	-10.87	48.59	-5.46	Average
3216.000	47.03	74.00	-26.97	52.49	-5.46	Peak	3216.000	46.16	74.00	-27.84	51.62	-5.46	Peak
4824.000	43.15	54.00	-10.85	44.80	-1.65	Average	4824.000	42.19	54.00	-11.81	43.84	-1.65	Average
4824.000	47.61	74.00	-26.39	49.26	-1.65	Peak	4824.000	46.45	74.00	-27.55	48.10	-1.65	Peak
7236.000	42.07	54.00	-11.93	36.50	5.57	Average	7236.000	41.87	54.00	-12.13	36.30	5.57	Average
7236.000	50.47	74.00	-23.53	44.90	5.57	Peak	7236.000	50.42	74.00	-23.58	44.85	5.57	Peak

IEEE 802.11b Middle CH Horizontal							IEEE 802.11b Middle CH Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2389.860	44.87	54.00	-9.13	52.63	-7.76	Average	2353.318	39.85	54.00	-14.15	47.73	-7.88	Average
2389.860	57.99	74.00	-16.01	65.75	-7.76	Peak	2353.318	53.24	74.00	-20.76	61.12	-7.88	Peak
2436.324	106.60			114.25	-7.65	Average	2436.324	99.72			107.37	-7.65	Average
2436.324	109.55			117.20	-7.65	Peak	2436.324	102.57			110.22	-7.65	Peak
2517.152	42.79	54.00	-11.21	50.30	-7.51	Average	2515.942	38.56	54.00	-15.44	46.07	-7.51	Average
2517.152	56.91	74.00	-17.09	64.42	-7.51	Peak	2515.942	52.36	74.00	-21.64	59.87	-7.51	Peak
3249.300	46.34	54.00	-7.66	51.70	-5.36	Average	3249.300	45.39	54.00	-8.61	50.75	-5.36	Average
3249.300	48.58	74.00	-25.42	53.94	-5.36	Peak	3249.300	48.15	74.00	-25.85	53.51	-5.36	Peak
4874.000	49.31	54.00	-4.69	50.86	-1.55	Average	4874.000	47.27	54.00	-6.73	48.82	-1.55	Average
4874.000	51.88	74.00	-22.12	53.43	-1.55	Peak	4874.000	50.27	74.00	-23.73	51.82	-1.55	Peak
7311.000	48.42	54.00	-5.58	43.10	5.32	Average	7311.000	47.51	54.00	-6.49	42.19	5.32	Average
7311.000	54.17	74.00	-19.83	48.85	5.32	Peak	7311.000	53.22	74.00	-20.78	47.90	5.32	Peak

IEEE 802.11b High CH Horizontal							IEEE 802.11b High CH Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2461.200	103.84			111.46	-7.62	Average	2461.100	96.38			104.00	-7.62	Average
2461.200	106.73			114.35	-7.62	Peak	2461.100	99.21			106.83	-7.62	Peak
2486.700	51.01	54.00	-2.99	58.60	-7.59	Average	2498.600	40.88	54.00	-13.12	48.46	-7.58	Average
2486.700	59.82	74.00	-14.18	67.41	-7.59	Peak	2498.600	53.25	74.00	-20.75	60.83	-7.58	Peak
3282.700	45.96	54.00	-8.04	51.26	-5.30	Average	3282.700	45.41	54.00	-8.59	50.71	-5.30	Average
3282.700	48.22	74.00	-25.78	53.52	-5.30	Peak	3282.700	47.45	74.00	-26.55	52.75	-5.30	Peak
4924.000	47.87	54.00	-6.13	49.30	-1.43	Average	4924.000	46.19	54.00	-7.81	47.62	-1.43	Average
4924.000	51.37	74.00	-22.63	52.80	-1.43	Peak	4924.000	49.30	74.00	-24.70	50.73	-1.43	Peak
7386.000	45.17	54.00	-8.83	39.73	5.44	Average	7386.000	42.24	54.00	-11.76	36.80	5.44	Average
7386.000	51.19	74.00	-22.81	45.75	5.44	Peak	7386.000	50.97	74.00	-23.03	45.53	5.44	Peak

IEEE 802.11g Low CH Horizontal							IEEE 802.11g Low CH Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2389.744	53.83	54.00	-0.17	61.59	-7.76	Average	2389.296	46.51	54.00	-7.49	54.27	-7.76	Average
2389.744	72.03	74.00	-1.97	79.79	-7.76	Peak	2389.296	63.87	74.00	-10.13	71.63	-7.76	Peak
2414.496	96.40			104.11	-7.71	Average	2410.240	89.83			97.54	-7.71	Average
2414.496	106.69			114.40	-7.71	Peak	2410.240	100.03			107.74	-7.71	Peak
3216.000	44.68	54.00	-9.32	50.14	-5.46	Average	3216.000	42.74	54.00	-11.26	48.20	-5.46	Average
3216.000	46.42	74.00	-27.58	51.88	-5.46	Peak	3216.000	45.84	74.00	-28.16	51.30	-5.46	Peak
4824.000	31.10	54.00	-22.90	32.75	-1.65	Average	4824.000	31.55	54.00	-22.45	33.20	-1.65	Average
4824.000	45.10	74.00	-28.90	46.75	-1.65	Peak	4824.000	43.88	74.00	-30.12	45.53	-1.65	Peak
7236.000	34.48	54.00	-19.52	28.91	5.57	Average	7236.000	34.85	54.00	-19.15	29.28	5.57	Average
7236.000	47.22	74.00	-26.78	41.65	5.57	Peak	7236.000	47.52	74.00	-26.48	41.95	5.57	Peak

IEEE 802.11g Middle CH Horizontal							IEEE 802.11g Middle CH Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2385.020	51.40	54.00	-2.60	59.17	-7.77	Average	2389.860	44.36	54.00	-9.64	52.12	-7.76	Average
2385.020	67.16	74.00	-6.84	74.93	-7.77	Peak	2389.860	60.70	74.00	-13.30	68.46	-7.76	Peak
2438.744	102.11			109.76	-7.65	Average	2435.114	95.58			103.23	-7.65	Average
2438.744	112.88			120.53	-7.65	Peak	2435.114	105.76			113.41	-7.65	Peak
2484.482	50.92	54.00	-3.08	58.51	-7.59	Average	2484.482	41.64	54.00	-12.36	49.23	-7.59	Average
2484.482	69.98	74.00	-4.02	77.57	-7.59	Peak	2484.482	56.88	74.00	-17.12	64.47	-7.59	Peak
3249.300	46.59	54.00	-7.41	51.95	-5.36	Average	3249.300	46.49	54.00	-7.51	51.85	-5.36	Average
3249.300	48.64	74.00	-25.36	54.00	-5.36	Peak	3249.300	48.49	74.00	-25.51	53.85	-5.36	Peak
4874.000	36.81	54.00	-17.19	38.36	-1.55	Average	4874.000	35.43	54.00	-18.57	36.98	-1.55	Average
4874.000	49.22	74.00	-24.78	50.77	-1.55	Peak	4874.000	49.35	74.00	-24.65	50.90	-1.55	Peak
7311.000	43.53	54.00	-10.47	38.21	5.32	Average	7311.000	42.84	54.00	-11.16	37.52	5.32	Average
7311.000	56.94	74.00	-17.06	51.62	5.32	Peak	7311.000	56.19	74.00	-17.81	50.87	5.32	Peak

IEEE 802.11g High CH Horizontal							IEEE 802.11g High CH Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2459.300	96.27			103.89	-7.62	Average	2459.400	88.82			96.44	-7.62	Average
2459.300	106.69			114.31	-7.62	Peak	2459.400	99.21			106.83	-7.62	Peak
2484.500	53.84	54.00	-0.16	61.43	-7.59	Average	2484.900	44.83	54.00	-9.17	52.42	-7.59	Average
2484.500	73.05	74.00	-0.95	80.64	-7.59	Peak	2484.900	63.08	74.00	-10.92	70.67	-7.59	Peak
3282.700	46.08	54.00	-7.92	51.38	-5.30	Average	3282.700	45.63	54.00	-8.37	50.93	-5.30	Average
3282.700	48.61	74.00	-25.39	53.91	-5.30	Peak	3282.700	48.24	74.00	-25.76	53.54	-5.30	Peak
4924.000	34.45	54.00	-19.55	35.88	-1.43	Average	4924.000	34.30	54.00	-19.70	35.73	-1.43	Average
4924.000	47.33	74.00	-26.67	48.76	-1.43	Peak	4924.000	47.32	74.00	-26.68	48.75	-1.43	Peak
7386.000	36.06	54.00	-17.94	30.62	5.44	Average	7386.000	35.74	54.00	-18.26	30.30	5.44	Average
7386.000	48.79	74.00	-25.21	43.35	5.44	Peak	7386.000	48.44	74.00	-25.56	43.00	5.44	Peak

IEEE 802.11n HT20 Low CH Horizontal							IEEE 802.11n HT20 Low CH Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2388.624	53.81	54.00	-0.19	61.58	-7.77	Average	2389.296	45.75	54.00	-8.25	53.51	-7.76	Average
2388.624	70.95	74.00	-3.05	78.72	-7.77	Peak	2389.296	61.51	74.00	-12.49	69.27	-7.76	Peak
2410.800	94.39			102.10	-7.71	Average	2410.576	87.99			95.70	-7.71	Average
2410.800	105.31			113.02	-7.71	Peak	2410.576	99.02			106.73	-7.71	Peak
3216.000	44.07	54.00	-9.93	49.53	-5.46	Average	3216.000	43.05	54.00	-10.95	48.51	-5.46	Average
3216.000	46.63	74.00	-27.37	52.09	-5.46	Peak	3216.000	46.23	74.00	-27.77	51.69	-5.46	Peak
4824.000	30.22	54.00	-23.78	31.87	-1.65	Average	4824.000	30.53	54.00	-23.47	32.18	-1.65	Average
4824.000	44.50	74.00	-29.50	46.15	-1.65	Peak	4824.000	42.55	74.00	-31.45	44.20	-1.65	Peak
7236.000	34.07	54.00	-19.93	28.50	5.57	Average	7236.000	35.11	54.00	-18.89	29.54	5.57	Average
7236.000	48.50	74.00	-25.50	42.93	5.57	Peak	7236.000	49.92	74.00	-24.08	44.35	5.57	Peak

IEEE 802.11n HT20 Middle CH Horizontal							IEEE 802.11n HT20 Middle CH Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2388.408	51.86	54.00	-2.14	59.63	-7.77	Average	2389.134	44.34	54.00	-9.66	52.10	-7.76	Average
2388.408	67.24	74.00	-6.76	75.01	-7.77	Peak	2389.134	57.51	74.00	-16.49	65.27	-7.76	Peak
2435.114	101.44			109.09	-7.65	Average	2435.114	93.54			101.19	-7.65	Average
2435.114	112.06			119.71	-7.65	Peak	2435.114	103.96			111.61	-7.65	Peak
2483.998	49.35	54.00	-4.65	56.94	-7.59	Average	2483.756	41.60	54.00	-12.40	49.19	-7.59	Average
2483.998	66.93	74.00	-7.07	74.52	-7.59	Peak	2483.756	55.23	74.00	-18.77	62.82	-7.59	Peak
3249.300	46.50	54.00	-7.50	51.86	-5.36	Average	3249.300	46.44	54.00	-7.56	51.80	-5.36	Average
3249.300	48.36	74.00	-25.64	53.72	-5.36	Peak	3249.300	48.58	74.00	-25.42	53.94	-5.36	Peak
4874.000	35.56	54.00	-18.44	37.11	-1.55	Average	4874.000	34.36	54.00	-19.64	35.91	-1.55	Average
4874.000	48.90	74.00	-25.10	50.45	-1.55	Peak	4874.000	47.31	74.00	-26.69	48.86	-1.55	Peak
7311.000	41.72	54.00	-12.28	36.40	5.32	Average	7311.000	40.63	54.00	-13.37	35.31	5.32	Average
7311.000	55.65	74.00	-18.35	50.33	5.32	Peak	7311.000	53.82	74.00	-20.18	48.50	5.32	Peak

IEEE 802.11n HT20 High CH Horizontal							IEEE 802.11n HT20 High CH Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2459.400	95.03			102.65	-7.62	Average	2460.900	87.18			94.80	-7.62	Average
2459.400	105.91			113.53	-7.62	Peak	2460.900	97.99			105.61	-7.62	Peak
2485.000	50.96	54.00	-3.04	58.55	-7.59	Average	2484.500	41.60	54.00	-12.40	49.19	-7.59	Average
2485.000	68.47	74.00	-5.53	76.06	-7.59	Peak	2484.500	59.50	74.00	-14.50	67.09	-7.59	Peak
3282.700	46.21	54.00	-7.79	51.51	-5.30	Average	3282.700	44.71	54.00	-9.29	50.01	-5.30	Average
3282.700	48.24	74.00	-25.76	53.54	-5.30	Peak	3282.700	47.12	74.00	-26.88	52.42	-5.30	Peak
4924.000	33.67	54.00	-20.33	35.10	-1.43	Average	4924.000	33.45	54.00	-20.55	34.88	-1.43	Average
4924.000	46.91	74.00	-27.09	48.34	-1.43	Peak	4924.000	47.17	74.00	-26.83	48.60	-1.43	Peak
7386.000	34.29	54.00	-19.71	28.85	5.44	Average	7386.000	34.24	54.00	-19.76	28.80	5.44	Average
7386.000	47.09	74.00	-26.91	41.65	5.44	Peak	7386.000	49.83	74.00	-24.17	44.39	5.44	Peak

IEEE 802.11n HT40 Low CH Horizontal							IEEE 802.11n HT40 Low CH Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2386.824	53.56	54.00	-0.44	61.33	-7.77	Average	2385.636	45.53	54.00	-8.47	53.30	-7.77	Average
2386.824	67.32	74.00	-6.68	75.09	-7.77	Peak	2385.636	59.87	74.00	-14.13	67.64	-7.77	Peak
2417.844	88.51			96.20	-7.69	Average	2418.768	81.46			89.14	-7.68	Average
2417.844	98.65			106.34	-7.69	Peak	2418.768	92.01			99.69	-7.68	Peak
3229.300	45.03	54.00	-8.97	50.45	-5.42	Average	3229.300	43.44	54.00	-10.56	48.86	-5.42	Average
3229.300	47.34	74.00	-26.66	52.76	-5.42	Peak	3229.300	45.99	74.00	-28.01	51.41	-5.42	Peak
4844.000	29.08	54.00	-24.92	30.70	-1.62	Average	4844.000	29.27	54.00	-24.73	30.89	-1.62	Average
4844.000	43.62	74.00	-30.38	45.24	-1.62	Peak	4844.000	44.26	74.00	-29.74	45.88	-1.62	Peak
7266.000	34.05	54.00	-19.95	28.63	5.42	Average	7266.000	33.87	54.00	-20.13	28.45	5.42	Average
7266.000	48.19	74.00	-25.81	42.77	5.42	Peak	7266.000	48.19	74.00	-25.81	42.77	5.42	Peak

IEEE 802.11n HT40 Middle CH Horizontal							IEEE 802.11n HT40 Middle CH Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2387.198	53.33	54.00	-0.67	61.10	-7.77	Average	2386.714	45.03	54.00	-8.97	52.80	-7.77	Average
2387.198	69.33	74.00	-4.67	77.10	-7.77	Peak	2386.714	59.49	74.00	-14.51	67.26	-7.77	Peak
2434.388	91.58			99.24	-7.66	Average	2439.228	83.22			90.87	-7.65	Average
2434.388	102.30			109.96	-7.66	Peak	2439.228	94.11			101.76	-7.65	Peak
2485.450	46.01	54.00	-7.99	53.60	-7.59	Average	2484.240	39.21	54.00	-14.79	46.80	-7.59	Average
2485.450	62.40	74.00	-11.60	69.99	-7.59	Peak	2484.240	53.59	74.00	-20.41	61.18	-7.59	Peak
3249.300	46.16	54.00	-7.84	51.52	-5.36	Average	3249.300	44.47	54.00	-9.53	49.83	-5.36	Average
3249.300	48.17	74.00	-25.83	53.53	-5.36	Peak	3249.300	47.22	74.00	-26.78	52.58	-5.36	Peak
4874.000	30.40	54.00	-23.60	31.95	-1.55	Average	4874.000	30.32	54.00	-23.68	31.87	-1.55	Average
4874.000	43.00	74.00	-31.00	44.55	-1.55	Peak	4874.000	43.30	74.00	-30.70	44.85	-1.55	Peak
7311.000	34.77	54.00	-19.23	29.45	5.32	Average	7311.000	34.03	54.00	-19.97	28.71	5.32	Average
7311.000	48.82	74.00	-25.18	43.50	5.32	Peak	7311.000	48.69	74.00	-25.31	43.37	5.32	Peak

IEEE 802.11n HT40 High CH Horizontal							IEEE 802.11n HT40 High CH Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2435.960	91.43			99.08	-7.65	Average	2447.120	83.08			90.71	-7.63	Average
2435.960	102.55			110.20	-7.65	Peak	2447.120	94.04			101.67	-7.63	Peak
2487.080	51.06	54.00	-2.94	58.65	-7.59	Average	2484.560	42.56	54.00	-11.44	50.15	-7.59	Average
2487.080	67.26	74.00	-6.74	74.85	-7.59	Peak	2484.560	57.64	74.00	-16.36	65.23	-7.59	Peak
3269.300	45.21	54.00	-8.79	50.54	-5.33	Average	3269.300	44.58	54.00	-9.42	49.91	-5.33	Average
3269.300	47.53	74.00	-26.47	52.86	-5.33	Peak	3269.300	47.51	74.00	-26.49	52.84	-5.33	Peak
4904.000	30.75	54.00	-23.25	32.22	-1.47	Average	4904.000	30.54	54.00	-23.46	32.01	-1.47	Average
4904.000	43.64	74.00	-30.36	45.11	-1.47	Peak	4904.000	43.92	74.00	-30.08	45.39	-1.47	Peak
7356.000	33.48	54.00	-20.52	28.21	5.27	Average	7356.000	34.44	54.00	-19.56	29.17	5.27	Average
7356.000	47.82	74.00	-26.18	42.55	5.27	Peak	7356.000	48.08	74.00	-25.92	42.81	5.27	Peak

< Dipole Antenna (GW.34.5153) with 1.8V_{dc}>

IEEE 802.11b Low CH Horizontal							IEEE 802.11b Low CH Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2389.520	38.82	54.00	-15.18	46.58	-7.76	Average	2386.272	53.49	54.00	-0.51	61.26	-7.77	Average
2389.520	51.68	74.00	-22.32	59.44	-7.76	Peak	2386.272	61.60	74.00	-12.40	69.37	-7.77	Peak
2411.248	88.81			96.52	-7.71	Average	2411.248	103.81			111.52	-7.71	Average
2411.248	91.48			99.19	-7.71	Peak	2411.248	106.50			114.21	-7.71	Peak
3216.000	42.62	54.00	-11.38	48.08	-5.46	Average	3216.000	44.29	54.00	-9.71	49.75	-5.46	Average
3216.000	45.94	74.00	-28.06	51.40	-5.46	Peak	3216.000	47.31	74.00	-26.69	52.77	-5.46	Peak
4824.000	36.00	54.00	-18.00	37.65	-1.65	Average	4824.000	35.75	54.00	-18.25	37.40	-1.65	Average
4824.000	44.21	74.00	-29.79	45.86	-1.65	Peak	4824.000	43.67	74.00	-30.33	45.32	-1.65	Peak
7236.000	36.36	54.00	-17.64	30.79	5.57	Average	7236.000	37.97	54.00	-16.03	32.40	5.57	Average
7236.000	48.21	74.00	-25.79	42.64	5.57	Peak	7236.000	48.72	74.00	-25.28	43.15	5.57	Peak

IEEE 802.11b Middle CH Horizontal							IEEE 802.11b Middle CH Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2382.600	38.03	54.00	-15.97	45.81	-7.78	Average	2389.376	48.34	54.00	-5.66	56.10	-7.76	Average
2382.600	51.24	74.00	-22.76	59.02	-7.78	Peak	2389.376	59.10	74.00	-14.90	66.86	-7.76	Peak
2436.324	92.13			99.78	-7.65	Average	2436.324	106.23			113.88	-7.65	Average
2436.324	94.97			102.62	-7.65	Peak	2436.324	108.94			116.59	-7.65	Peak
2512.312	38.58	54.00	-15.42	46.11	-7.53	Average	2487.386	46.73	54.00	-7.27	54.32	-7.59	Average
2512.312	51.94	74.00	-22.06	59.47	-7.53	Peak	2487.386	58.07	74.00	-15.93	65.66	-7.59	Peak
3249.300	41.82	54.00	-12.18	47.18	-5.36	Average	3249.300	46.87	54.00	-7.13	52.23	-5.36	Average
3249.300	45.17	74.00	-28.83	50.53	-5.36	Peak	3249.300	49.03	74.00	-24.97	54.39	-5.36	Peak
4874.000	45.36	54.00	-8.64	46.91	-1.55	Average	4874.000	44.99	54.00	-9.01	46.54	-1.55	Average
4874.000	48.98	74.00	-25.02	50.53	-1.55	Peak	4874.000	48.46	74.00	-25.54	50.01	-1.55	Peak
7311.000	39.95	54.00	-14.05	34.63	5.32	Average	7311.000	42.81	54.00	-11.19	37.49	5.32	Average
7311.000	49.09	74.00	-24.91	43.77	5.32	Peak	7311.000	50.52	74.00	-23.48	45.20	5.32	Peak

IEEE 802.11b High CH Horizontal							IEEE 802.11b High CH Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2461.200	86.71			94.33	-7.62	Average	2461.200	101.24			108.86	-7.62	Average
2461.200	89.70			97.32	-7.62	Peak	2461.200	104.21			111.83	-7.62	Peak
2483.700	38.60	54.00	-15.40	46.19	-7.59	Average	2484.400	47.84	54.00	-6.16	55.43	-7.59	Average
2483.700	52.27	74.00	-21.73	59.86	-7.59	Peak	2484.400	57.76	74.00	-16.24	65.35	-7.59	Peak
3282.700	46.49	54.00	-7.51	51.79	-5.30	Average	3282.700	44.49	54.00	-9.51	49.79	-5.30	Average
3282.700	48.79	74.00	-25.21	54.09	-5.30	Peak	3282.700	45.89	74.00	-28.11	51.19	-5.30	Peak
4924.000	40.78	54.00	-13.22	42.21	-1.43	Average	4924.000	40.27	54.00	-13.73	41.70	-1.43	Average
4924.000	45.92	74.00	-28.08	47.35	-1.43	Peak	4924.000	46.27	74.00	-27.73	47.70	-1.43	Peak
7386.000	34.61	54.00	-19.39	29.17	5.44	Average	7386.000	35.19	54.00	-18.81	29.75	5.44	Average
7386.000	48.14	74.00	-25.86	42.70	5.44	Peak	7386.000	47.29	74.00	-26.71	41.85	5.44	Peak