



# RF TEST REPORT

**Applicant** Honor Device Co., Ltd.  
**FCC ID** 2AYGCANY-LX3  
**Product** Smart Phone  
**Model** ANY-LX3  
**Report No.** R2202A0171-R5V1  
**Issue Date** March 18, 2022

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15C (2021)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Prepared by: Peng Tao

Approved by: Kai Xu

---

**TA Technology (Shanghai) Co., Ltd.**

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

## TABLE OF CONTENT

1. Test Laboratory .....	5
1.1. Notes of the test report.....	5
1.2. Test facility .....	5
1.3. Testing Location.....	5
2. General Description of Equipment under Test.....	6
2.1. Applicant and Manufacturer Information.....	6
2.2. General information.....	6
3. Applied Standards .....	8
4. Test Configuration .....	9
5. Test Case Results .....	10
5.1. Maximum output power .....	10
5.2. 99% Bandwidth and 6dB Bandwidth .....	13
5.3. Band Edge .....	27
5.4. Power Spectral Density .....	36
5.5. Spurious RF Conducted Emissions.....	47
5.6. Unwanted Emission .....	58
5.7. Conducted Emission .....	122
6. Main Test Instruments.....	127
ANNEX A: The EUT Appearance .....	128
ANNEX B: Test Setup Photos .....	129



Version	Revision description	Issue Date
Rev.0	Initial issue of report.	March 18, 2022
Rev.1	Update adapter information in Page 7.	March 18, 2022

Note: This revised report (Report No. R2202A0171-R5V1) supersedes and replaces the previously issued report (Report No. R2202A0171-R5). Please discard or destroy the previously issued report and dispose of it accordingly.

### Summary of measurement results

Number	Test Case	Clause in FCC rules	Verdict
1	Maximum output power	15.247(b)(3)	PASS
2	6 dB bandwidth	15.247(a)(2)	PASS
3	Power spectral density	15.247(e)	PASS
4	Band Edge	15.247(d)	PASS
5	Spurious RF Conducted Emissions	15.247(d)	PASS
6	Unwanted Emissions	15.247(d),15.205,15.209	PASS
7	Conducted Emissions	15.207	PASS
Date of Testing: February 22, 2022 ~ March 15, 2020			
Date of Sample Received: February 21, 2022			
Note: All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			

## 1. Test Laboratory

### 1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

### 1.2. Test facility

#### **FCC (Designation number: CN1179, Test Firm Registration Number: 446626)**

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

#### **A2LA (Certificate Number: 3857.01)**

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

### 1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.  
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Xu Kai  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <http://www.ta-shanghai.com>  
E-mail: [xukai@ta-shanghai.com](mailto:xukai@ta-shanghai.com)

## 2. General Description of Equipment under Test

### 2.1. Applicant and Manufacturer Information

Applicant	Honor Device Co., Ltd.
Applicant address	Suite 3401, Unit A, Building 6, Shum Yip Sky Park, No. 8089, Hongli West Road, Xiangmihu Street, Futian District, Shenzhen, Guangdong 518040, People's Republic of China
Manufacturer	Honor Device Co., Ltd.
Manufacturer address	Suite 3401, Unit A, Building 6, Shum Yip Sky Park, No. 8089, Hongli West Road, Xiangmihu Street, Futian District, Shenzhen, Guangdong 518040, People's Republic of China

### 2.2. General information

EUT Description			
Model	ANY-LX3		
SN	AJDR012126000081		
Hardware Version	HL2ANYM		
Software Version	4.2.0.19(SP01C900E11R1P1)		
Power Supply	Battery / AC adapter		
Antenna Type	Internal Antenna		
Antenna Gain	-2 dBi		
additional beamforming gain	NA		
Operating Frequency Range(s)	802.11b/g/n(HT20): 2412 ~ 2462 MHz 802.11n(HT40): 2422 ~ 2452 MHz Bluetooth LE V5.0: 2402 ~2480 MHz		
Modulation Type	802.11b: DSSS 802.11g/n(HT20/HT40): OFDM Bluetooth LE: GFSK		
Max. Conducted Power	Wi-Fi 2.4G: 19.42 dBm Bluetooth LE: 9.64 dBm		
EUT Accessory			
Accessory	Model	Manufacture	No
Adapter	HW-110600E00	Honor Device Co., Ltd. (Manufacturer: Astec)	1
	HW-110600B00	Honor Device Co., Ltd. (Manufacturer: Astec)	2



	HW-110600U00	Honor Device Co., Ltd. (Manufacturer: Astec)	3
	HN-110600E00	Honor Device Co., Ltd. (Manufacturer: Astec)	4
	HN-110600B00	Honor Device Co., Ltd. (Manufacturer: Astec)	5
	HN-110600U00	Honor Device Co., Ltd. (Manufacturer: Astec)	6
Battery	HB466596EFW	Honor Device Co., Ltd. (Manufacturer: Desay)	1
	HB466596EFW	Honor Device Co., Ltd. (Manufacturer: NVT)	2
	HB466596EFW	Honor Device Co., Ltd. (Manufacturer: SCUD)	3
Earphone	1293-3283-3.5mm-339	BOLUO COUNTY QUANCHENG ELECTRONIC CO.,LTD.	1
	EPAB542-2WH05-DH	FOXCONN INTERCONNECT TECHNOLOGY LIMITED	2
	MEND1532B528A11	Jiangxi Lianchuang Hongsheng Electronic Co., LTD.	3
USB Cable	L99UC139 - CS - H	Luxshare Precision Industry Co.,Ltd.	1
	213-01011-0	MING JI ELECTRONICS CO., LTD.	2
Earphone,USB Type-C to 3.5mm Adapter Assembly	Model: USB042020090AW7		1

Note: 1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant.  
2. There is more than one Adapter/Battery/ USB cable, each one should be applied throughout the compliance test respectively, and however, only the worst case (Adapter 3/ Battery 2 for Unwanted Emissions and Battery 3 for Conducted Emissions/ USB cable 1) will be recorded in this report.

### 3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**Test standards:**

**FCC CFR47 Part 15C (2021) Radio Frequency Devices**

**ANSI C63.10 (2013)**

**Reference standard:**

**KDB 558074 D01 15.247 Meas Guidance v05r02**



## 4. Test Configuration

### Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the loop antenna is vertical, the others are vertical and horizontal. and the worst case was recorded.

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate. Preliminary tests have been done on all the configuration for confirming worst case. Data rate below means worst-case rate of each test item.

Worst-case data rates are shown as following table.

Test Mode	Data Rate
Bluetooth(Low Energy)	1Mbps
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0

## 5. Test Case Results

### 5.1. Maximum output power


#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Methods of Measurement

During the process of the testing, The EUT was connected to Power meter with a known loss. The EUT is max power transmission with proper modulation.

#### Test Setup



#### Limits

Rule Part 15.247 (b) (3) specifies that " For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz: 1 Watt."

Average Output Power	$\leq 1W$ (30dBm)
----------------------	-------------------

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.44$  dB.

**Test Results**

Test Mode	T <sub>on</sub> (ms)	T <sub>(on+off)</sub> (ms)	Duty cycle	Duty cycle correction Factor(dB)
802.11b	12.40	12.60	0.98	0.00
802.11g	2.06	2.10	0.98	0.00
802.11n HT20	1.92	1.96	0.98	0.00
802.11n HT40	0.95	1.00	0.95	0.22
Bluetooth LE	2.13	2.50	0.85	0.70

Note: when Duty cycle  $\geq$  0.98, Duty cycle correction Factor not required.

Test Mode	Carrier frequency (MHz) / Channel	Average Power Measured (dBm)	Average Power with duty factor (dBm)	Limit (dBm)	Conclusion
802.11b	2412/CH 1	18.56	18.56	30	PASS
	2437/CH 6	18.37	18.37	30	PASS
	2462/CH11	18.75	18.75	30	PASS
802.11g	2412/CH 1	16.53	16.53	30	PASS
	2417/CH 2	17.62	17.62	30	PASS
	2437/CH 6	19.01	19.01	30	PASS
	2447/CH 8	19.42	19.42	30	PASS
	2452/CH 9	18.25	18.25	30	PASS
	2457/CH 10	17.53	17.53	30	PASS
	2462/CH 11	14.42	14.42	30	PASS
802.11n HT20	2412/CH 1	16.50	16.50	30	PASS
	2417/CH 2	17.47	17.47	30	PASS
	2437/CH 6	18.82	18.82	30	PASS
	2447/CH 8	19.36	19.36	30	PASS
	2452/CH 9	18.61	18.61	30	PASS
	2457/CH 10	17.83	17.83	30	PASS
	2462/CH 11	14.27	14.27	30	PASS
802.11n HT40	2422/CH 3	13.62	13.84	30	PASS
	2427/CH 4	13.56	13.78	30	PASS
	2432/CH 5	15.12	15.34	30	PASS
	2437/CH 6	15.21	15.43	30	PASS
	2442/CH 7	13.87	14.09	30	PASS



	2447/CH 8	12.53	12.75	30	PASS
	2452/CH 9	11.50	11.72	30	PASS
Bluetooth (Low Energy)	2402/CH0	8.18	8.88	30	PASS
	2440/CH19	8.31	9.01	30	PASS
	2480/CH39	8.94	9.64	30	PASS
Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor					

## 5.2. 99% Bandwidth and 6dB Bandwidth

### Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable. RBW is set to 100 kHz; VBW is set to 300 kHz on spectrum analyzer. Dector=Peak, Trace mode=max hold.

The EUT was connected to the spectrum analyzer through a known loss cable. The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value.

### Test Setup



### Limits

Rule Part 15.247 (a) (2) specifies that “Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.”

minimum 6 dB bandwidth	≥ 500 kHz
------------------------	-----------

### Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 936$  Hz.

**Test Results:**

Test Mode	Carrier frequency (MHz)	99% bandwidth (MHz)	Minimum 6 dB bandwidth (MHz)	Limit (kHz)	Conclusion
802.11b	2412/CH 1	14.223	9.045	500	PASS
	2437/CH 6	14.188	9.052	500	PASS
	2462/CH11	14.023	8.116	500	PASS
802.11g	2412/CH 1	16.603	15.675	500	PASS
	2417/CH 2	17.394	13.119	500	PASS
	2437/CH 6	16.888	16.018	500	PASS
	2447/CH 8	17.371	15.052	500	PASS
	2452/CH 9	16.765	15.683	500	PASS
	2457/CH 10	16.569	15.501	500	PASS
	2462/CH 11	16.496	15.334	500	PASS
802.11n HT20	2412/CH 1	17.795	16.039	500	PASS
	2417/CH 2	18.168	16.831	500	PASS
	2437/CH 6	17.937	17.292	500	PASS
	2447/CH 8	18.014	17.150	500	PASS
	2452/CH 9	17.900	15.949	500	PASS
	2457/CH 10	17.747	16.839	500	PASS
	2462/CH 11	17.710	15.117	500	PASS
802.11n HT40	2422/CH 3	35.995	35.058	500	PASS
	2427/CH 4	36.068	33.858	500	PASS
	2432/CH 5	36.218	35.412	500	PASS
	2437/CH 6	36.314	36.318	500	PASS
	2442/CH 7	36.261	36.310	500	PASS
	2447/CH 8	36.195	35.011	500	PASS
	2452/CH 9	36.075	33.883	500	PASS
Bluetooth (Low Energy)	2402/CH0	1.040	0.662	500	PASS
	2440/CH19	1.041	0.659	500	PASS
	2480/CH39	1.045	0.659	500	PASS

99%bandwidth


802.11b, Carrier frequency (MHz): 2412

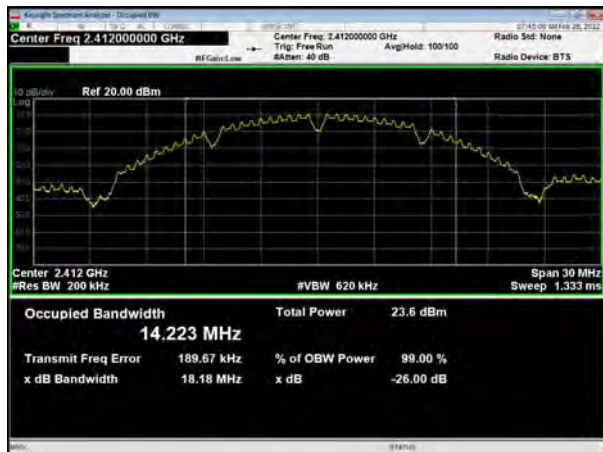


802.11g, Carrier frequency (MHz): 2412



802.11b, Carrier frequency (MHz): 2437

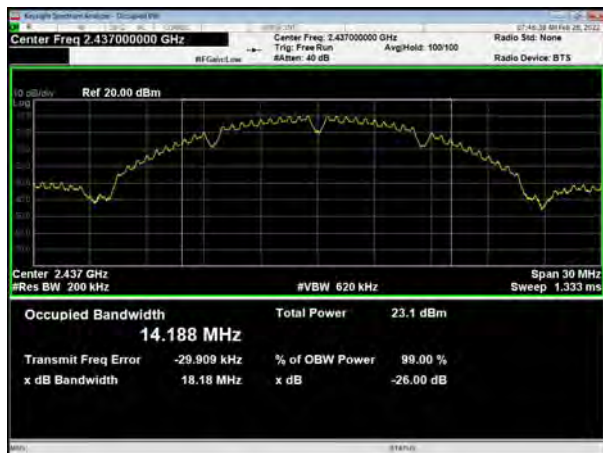

802.11g, Carrier frequency (MHz): 2437

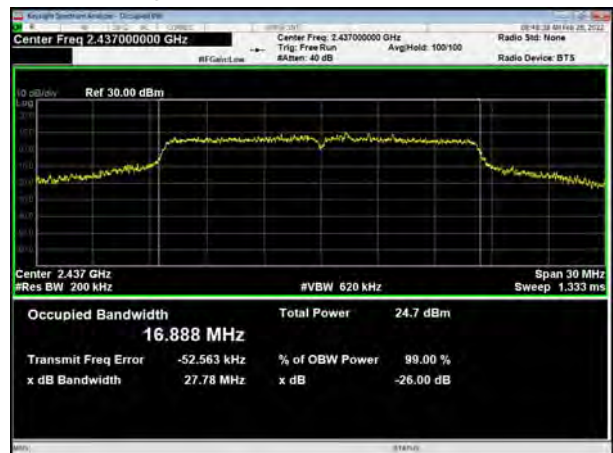

802.11b, Carrier frequency (MHz): 2462




802.11g, Carrier frequency (MHz): 2462






802.11g, Carrier frequency (MHz): 2417

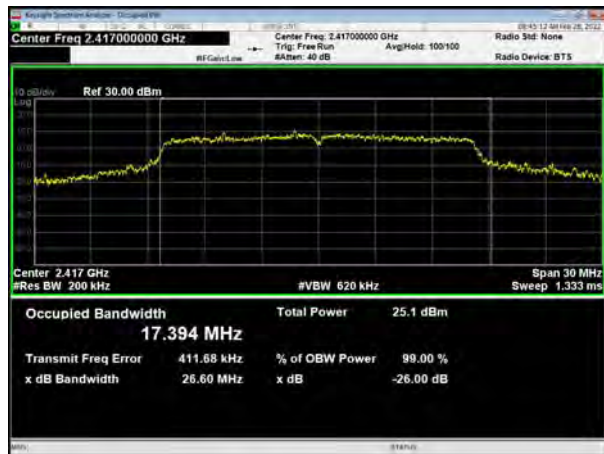


802.11g, Carrier frequency (MHz):2462



802.11g, Carrier frequency (MHz): 2447

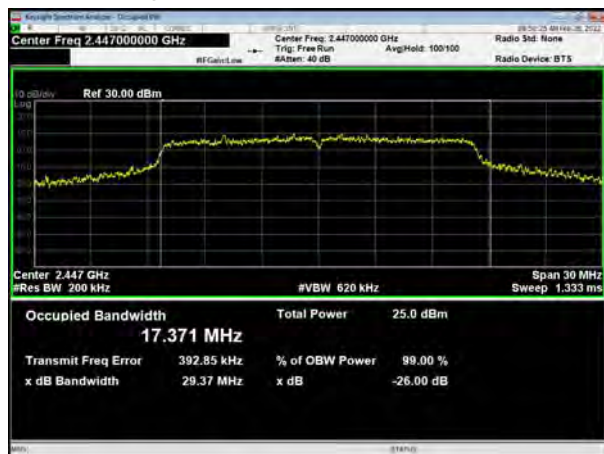

802.11g, Carrier frequency (MHz):2457

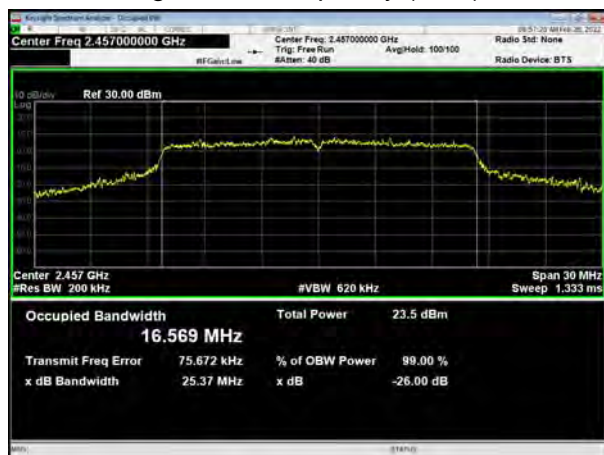





802.11n(HT20), Carrier frequency (MHz): 2412




802.11n(HT20), Carrier frequency (MHz): 2417

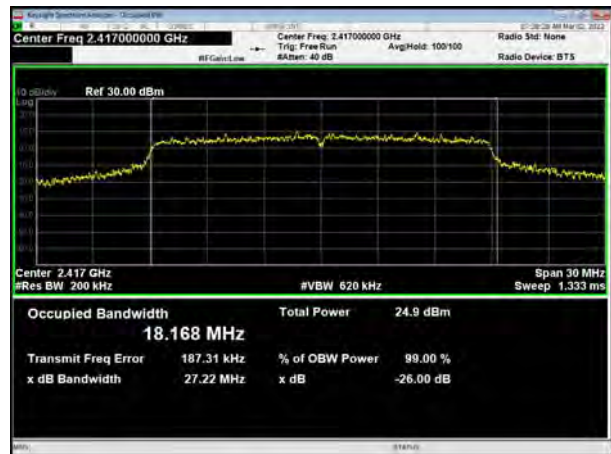


802.11n(HT20), Carrier frequency (MHz): 2437

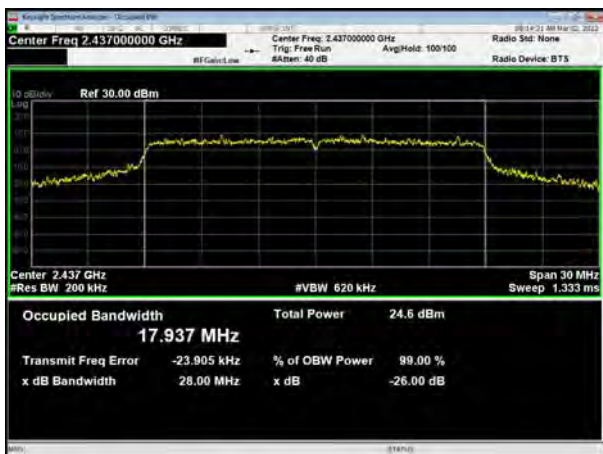

802.11n(HT20), Carrier frequency (MHz): 2447

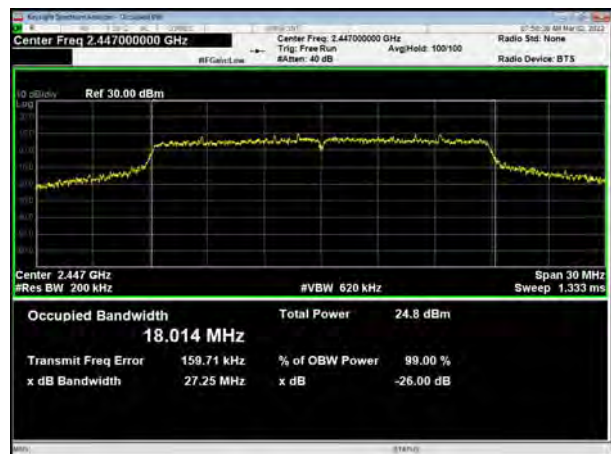

802.11n(HT20), Carrier frequency (MHz):2452

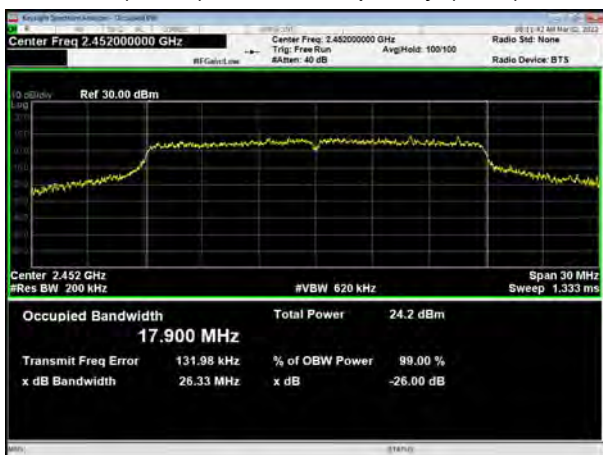


802.11n(HT20), Carrier frequency (MHz):2457



802.11n(HT20), Carrier frequency (MHz):2462




802.11n(HT40), Carrier frequency (MHz): 2432

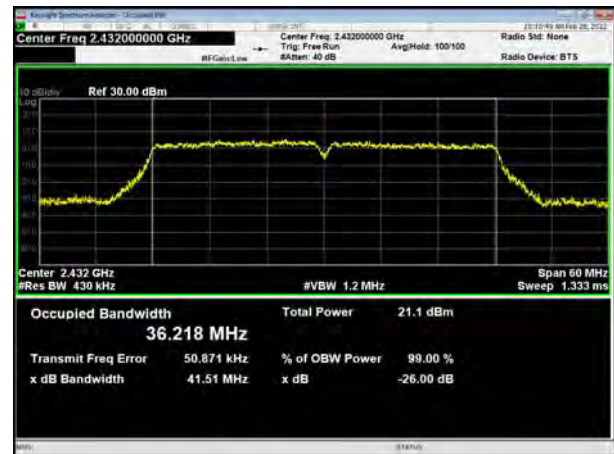

802.11n(HT40), Carrier frequency (MHz): 2422



802.11n(HT40), Carrier frequency (MHz): 2437

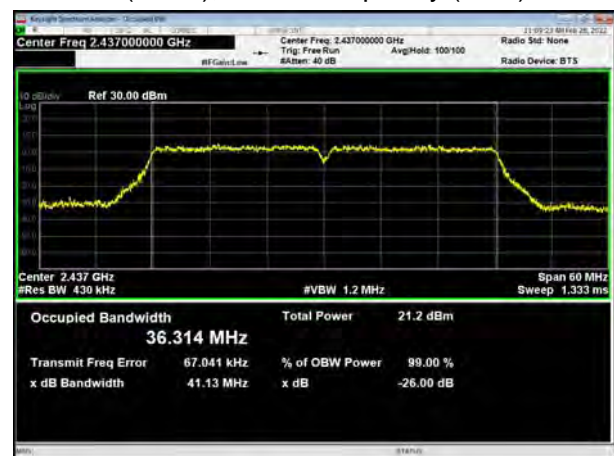

802.11n(HT40), Carrier frequency (MHz): 2427




802.11n(HT40), Carrier frequency (MHz):2442






802.11n(HT40), Carrier frequency (MHz):2447

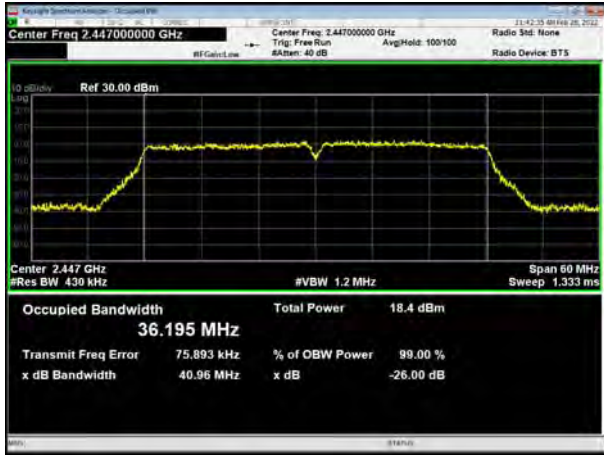


802.11n(HT40), Carrier frequency (MHz):2452

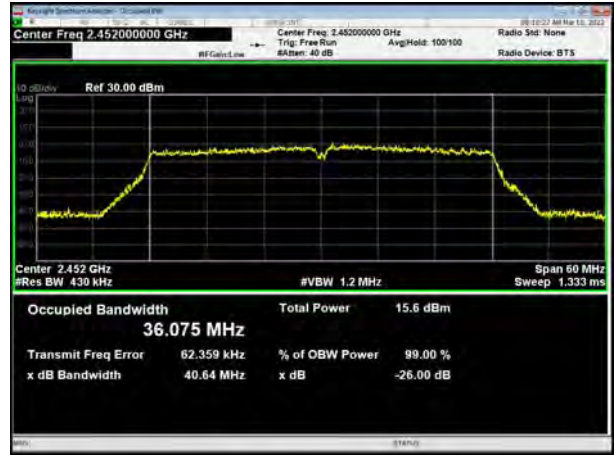




Bluetooth LE Carrier frequency (MHz): 2402

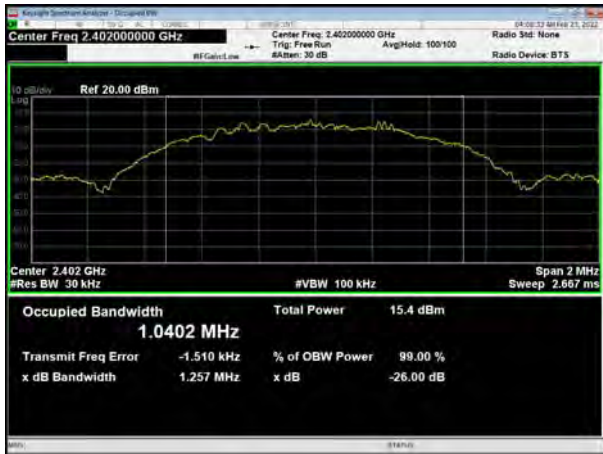

Bluetooth LE Carrier frequency (MHz): 2440

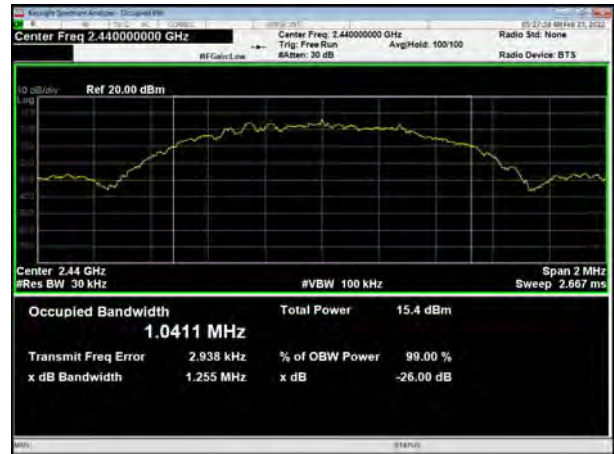

Bluetooth LE Carrier frequency (MHz): 2480





6 dB bandwidth

802.11b, Carrier frequency (MHz): 2412



802.11g, Carrier frequency (MHz): 2412



802.11b, Carrier frequency (MHz): 2437



802.11g, Carrier frequency (MHz): 2437



802.11b, Carrier frequency (MHz): 2462




802.11g, Carrier frequency (MHz): 2452




802.11g, Carrier frequency (MHz): 2417




802.11g, Carrier frequency (MHz):2462

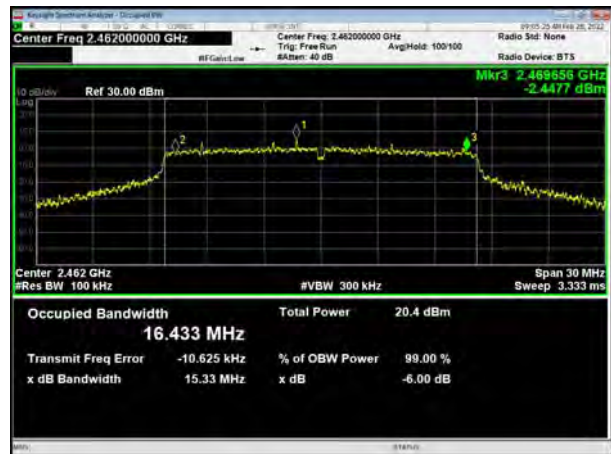


802.11g, Carrier frequency (MHz): 2447

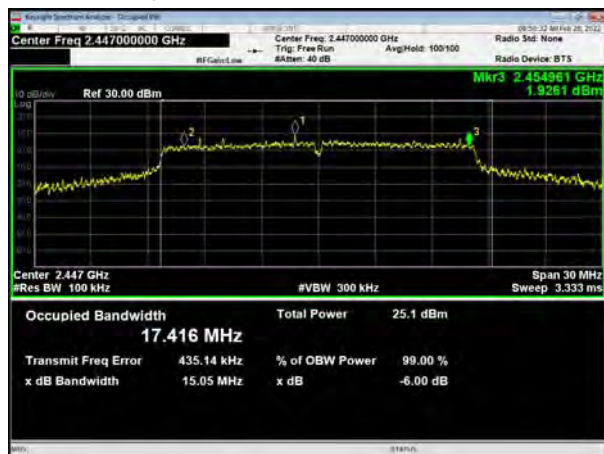


802.11g, Carrier frequency (MHz):2457

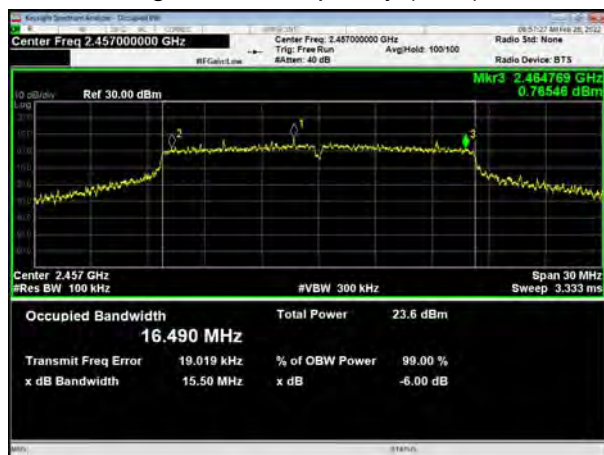

802.11n(HT20), Carrier frequency (MHz): 2412

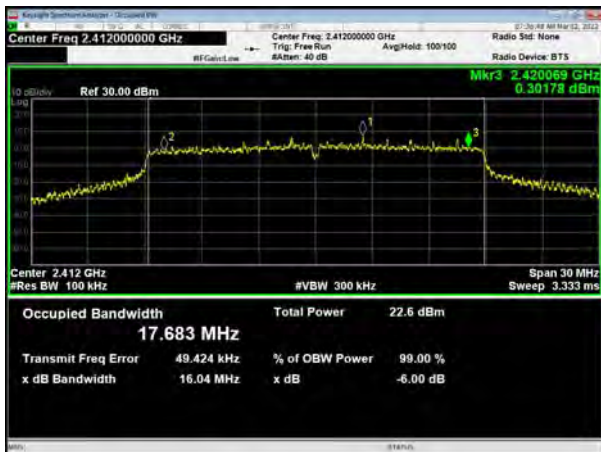

802.11n(HT20), Carrier frequency (MHz): 2417

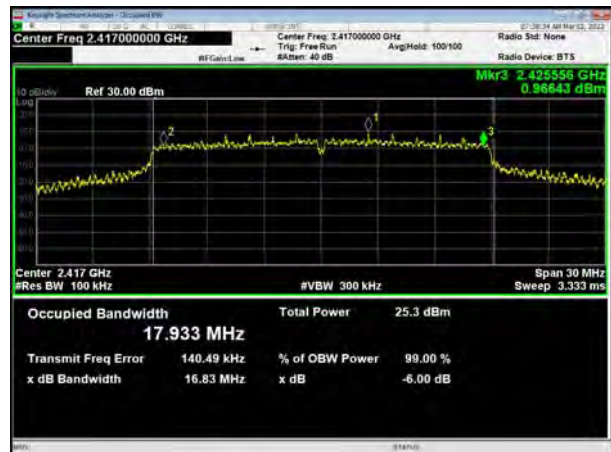

802.11n(HT20), Carrier frequency (MHz): 2437



802.11n(HT20), Carrier frequency (MHz): 2447




802.11n(HT20), Carrier frequency (MHz):2452



802.11n(HT20), Carrier frequency (MHz):2457



802.11n(HT20), Carrier frequency (MHz):2462

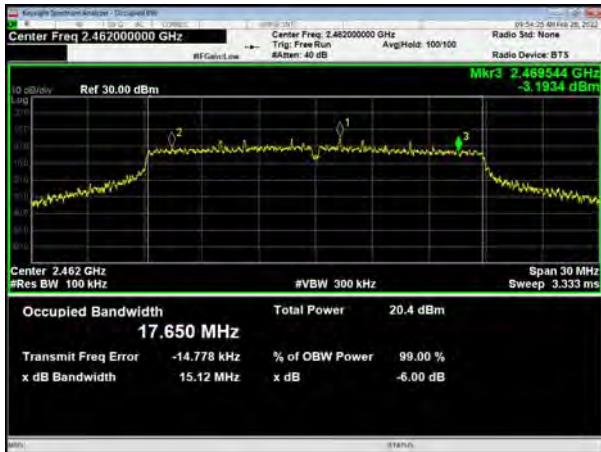


802.11n(HT40), Carrier frequency (MHz): 2432



802.11n(HT40), Carrier frequency (MHz): 2422




802.11n(HT40), Carrier frequency (MHz): 2437

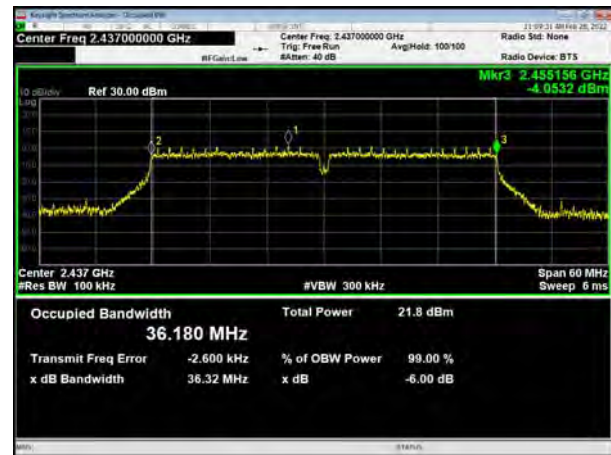

802.11n(HT40), Carrier frequency (MHz): 2427




802.11n(HT40), Carrier frequency (MHz):2442

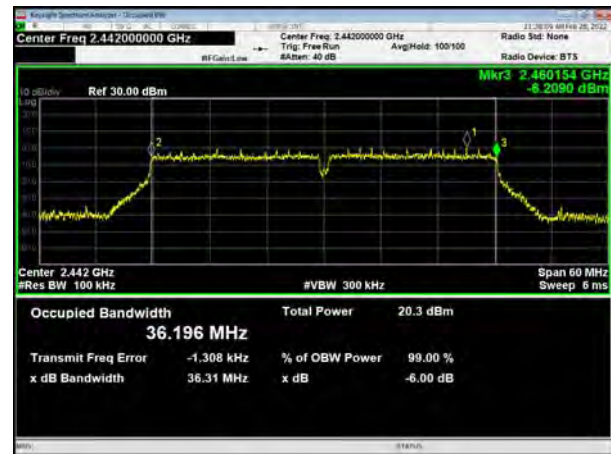






802.11n(HT40), Carrier frequency (MHz):2447

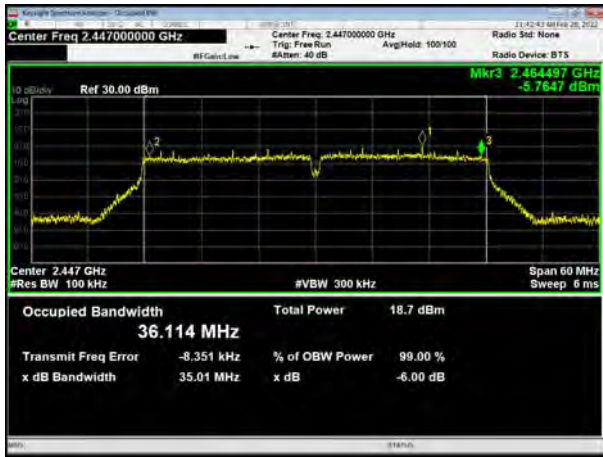


802.11n(HT40), Carrier frequency (MHz):2452



Bluetooth LE Carrier frequency (MHz): 2402

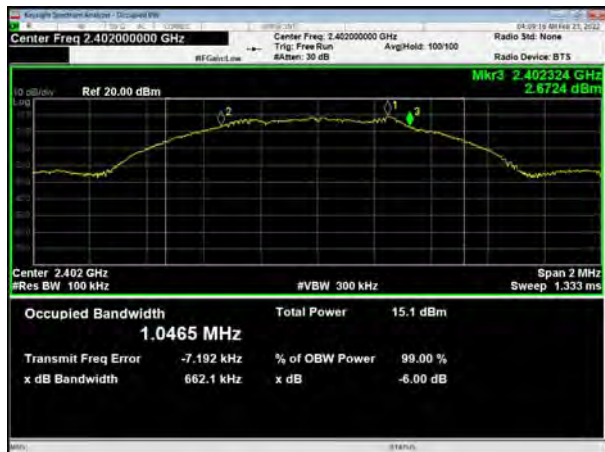

Bluetooth LE Carrier frequency (MHz): 2440

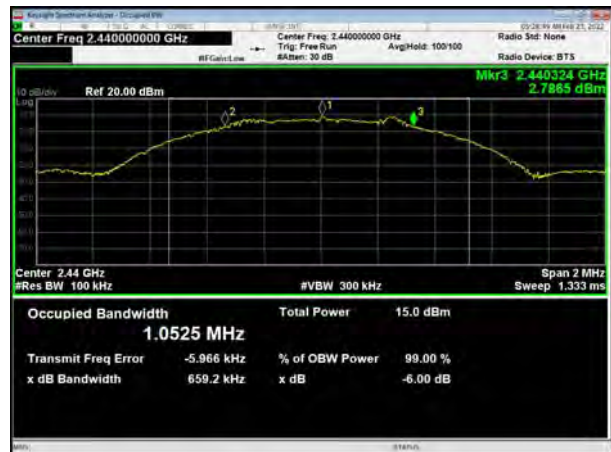

Bluetooth LE Carrier frequency (MHz): 2480



### 5.3. Band Edge


#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable the band edge of the lowest and highest channels were measured. The peak detector is used and RBW is set to 100 kHz and VBW is set to 300 kHz on spectrum analyzer. Spectrum analyzer plots are included on the following pages.

#### Test Setup



#### Limits

Rule Part 15.247(d) specifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.” If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.”

#### Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .

Frequency	Uncertainty
2GHz-3GHz	1.407 dB



Test Results: PASS

802.11b, Channel No.: 1

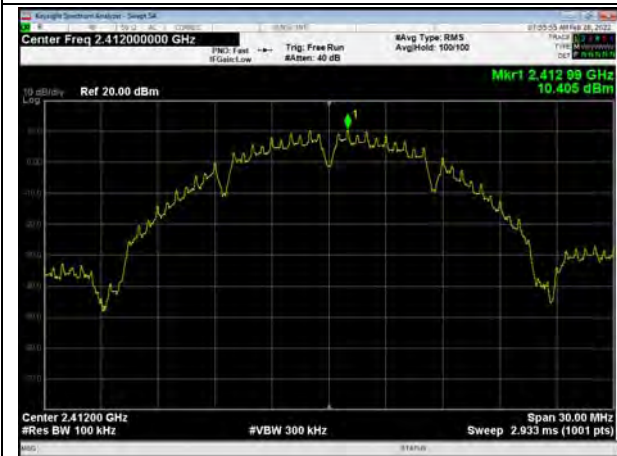

802.11b, Channel No.: 11



802.11g, Channel No.: 1





802.11g, Channel No.: 2



802.11g, Channel No.: 8



802.11g, Channel No.: 9



802.11g, Channel No.: 10



802.11g, Channel No.: 11



802.11n(HT20), Channel No.: 1





802.11n(HT20), Channel No.: 2



802.11n(HT20), Channel No.: 8



802.11n(HT20), Channel No.: 9





802.11n(HT20), Channel No.: 10



802.11n(HT20), Channel No.: 11




802.11n(HT40), Channel No. 3







802.11n(HT40), Channel No. 4

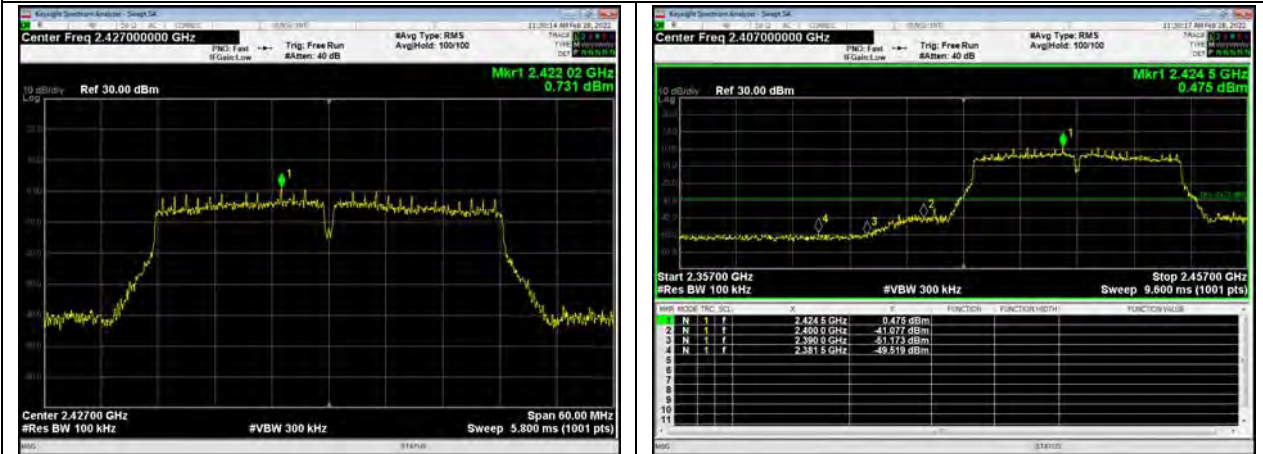

802.11n(HT40), Channel No. 5

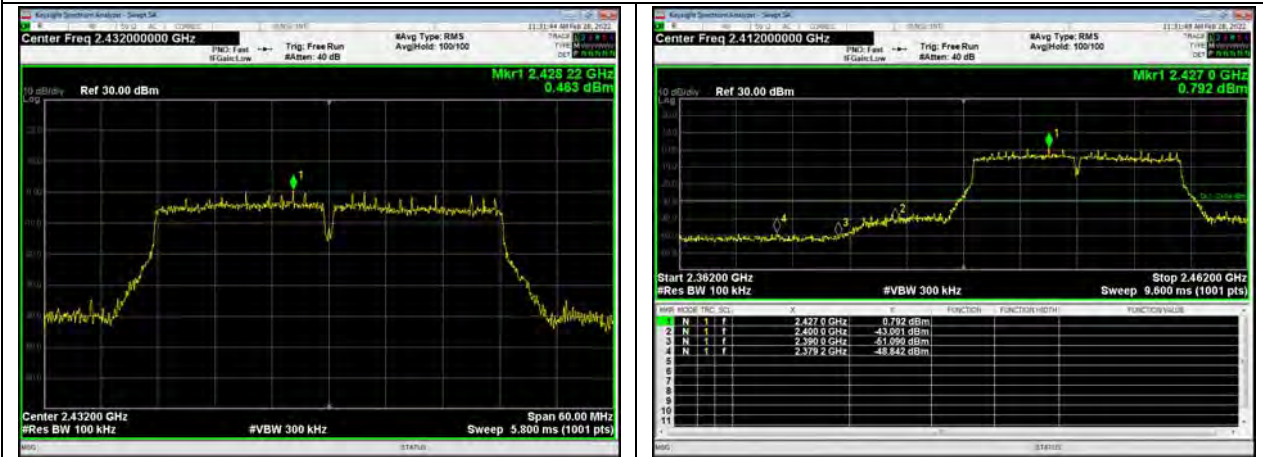


802.11n(HT40), Channel No. 7

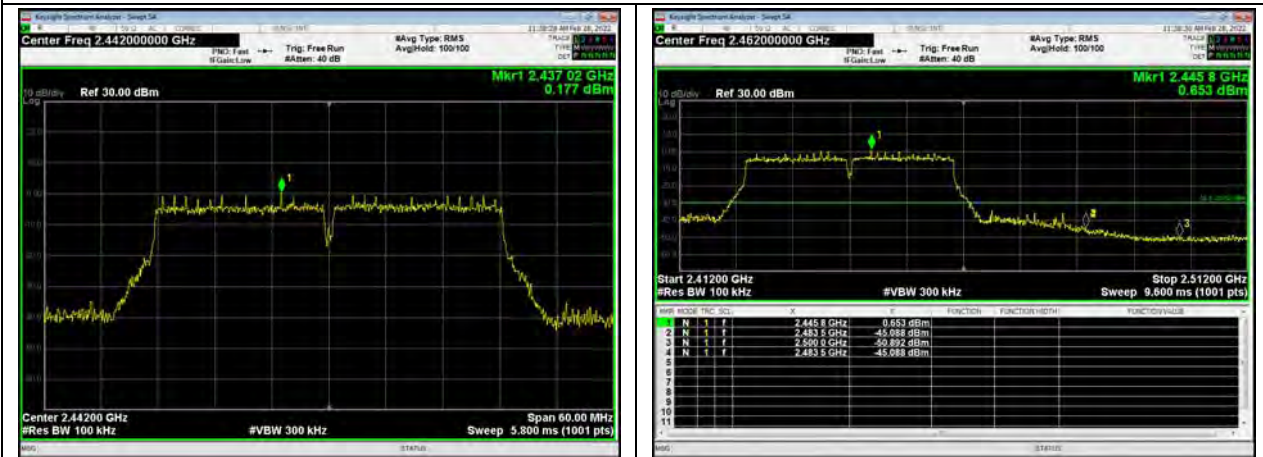

802.11n(HT40), Channel No. 8



802.11n(HT40), Channel No. 9

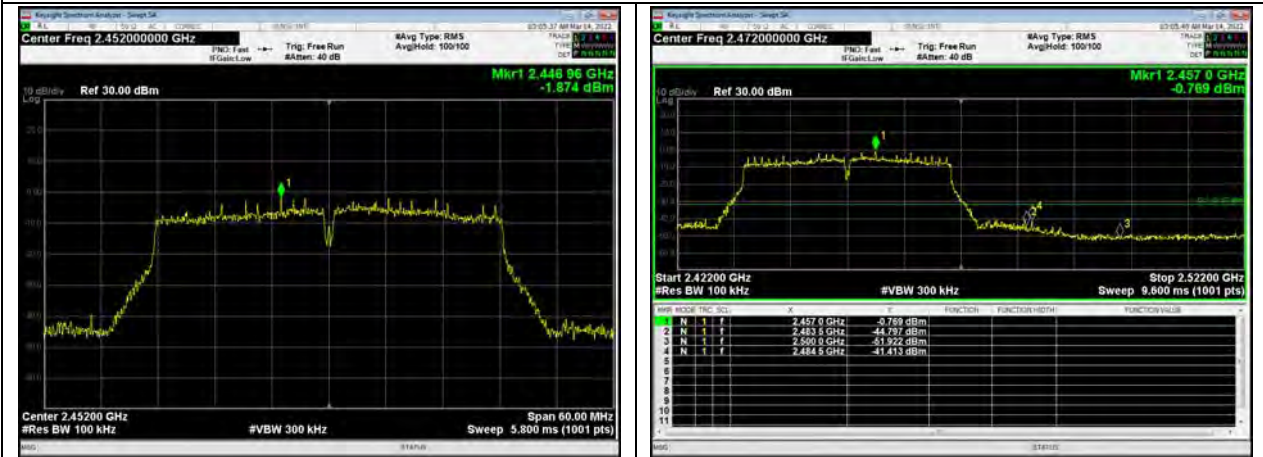


Bluetooth LE, Channel No.: 0





### Bluetooth LE, Channel No.: 39

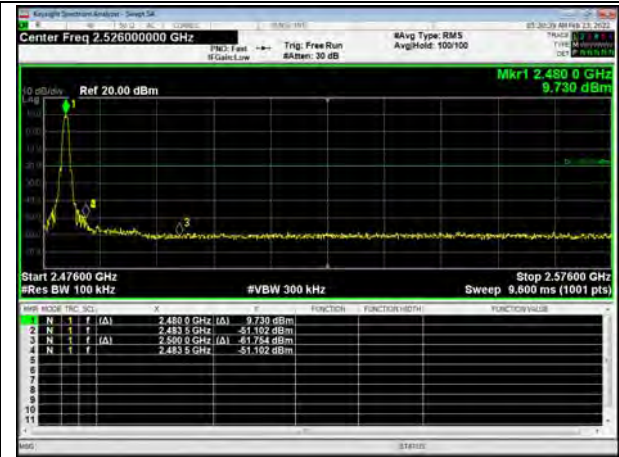

## 5.4. Power Spectral Density

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Method of Measurement

During the process of the testing, The EUT was connected to Spectrum Analyzer with a known loss. The EUT is max power transmission with proper modulation.

Method AVGPSD-1 was used for this test.

- a) Set instrument center frequency to DTS channel center frequency
- b) Set span to at least 1.5 times the OBW
- c) Set RBW to:  $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$
- d) Set VBW  $\geq [3x \text{RBW}]$
- e) Detector=power averaging (rms) or sample detector (when rms not available)
- f) Ensure that the number of measurement points in the sweep  $2[2 \text{ X span/RBWT}]$
- g) Sweep time auto couple
- h) Employ trace averaging (rms) mode over a minimum of 100 traces
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If the measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced)


Method AVGPSD-2 was used for this test.

- a) Measure the duty cycle (D)of the transmitter output signal as described in 11.6
- b) Set instrument center frequency to DTS channel center frequency
- c) Set span to at least 1.5 times the OBW
- d) Set RBW to:  $3\text{kHz} \leq \text{RBW} \leq 100\text{Kh}$
- e) Set VBW  $\geq [3x \text{RBW}]$
- f) Detector= power averaging (rms) or sample detector (when rms not available)
- g) Ensure that the number of measurement points in the sweep  $2[2 \text{ X span/RBW}]$
- h) Sweep time =auto couple
- i) Do not use sweep triggering; allow sweep to "free run"
- j) Employ trace averaging (rms) mode over a minimum of 100 traces
- k) Use the peak marker function to determine the maximum amplitude level

l) Add  $[10 \log(1/D)]$ , where D is the duty cycle measured in step a), to the measured PSD to compute the average PSD during the actual transmission time

m) If measured value exceeds requirement specified by regulatory agency then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced)

### Test setup

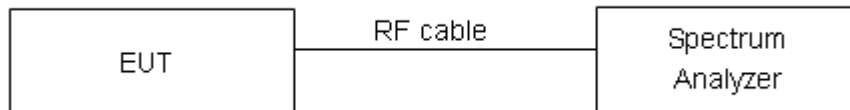

### Limits

Rule Part 15.247(e) specifies that " For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. "

Limits	$\leq 8 \text{ dBm} / 3\text{kHz}$
--------	------------------------------------

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.75\text{dB}$ .

**Test Results:**

Test Mode	Channel Number	Read Value (dBm / 30kHz)	Power Spectral Density (dBm / 3kHz)	Limit (dBm / 3kHz)	Conclusion
802.11b	2412/CH 1	-3.42	-13.42	8	PASS
	2437/CH 6	-3.61	-13.61	8	PASS
	2462/CH11	-3.04	-13.04	8	PASS
802.11g	2412/CH 1	-8.36	-18.36	8	PASS
	2417/CH 2	-6.25	-16.25	8	PASS
	2437/CH 6	-5.54	-15.54	8	PASS
	2447/CH 8	-4.91	-14.91	8	PASS
	2452/CH 9	-5.87	-15.87	8	PASS
	2457/CH 10	-5.97	-15.97	8	PASS
	2462/CH 11	-9.51	-19.51	8	PASS
802.11n HT20	2412/CH 1	-8.05	-18.05	8	PASS
	2417/CH 2	-6.81	-16.81	8	PASS
	2437/CH 6	-5.87	-15.87	8	PASS
	2447/CH 8	-5.30	-15.30	8	PASS
	2452/CH 9	-5.90	-15.90	8	PASS
	2457/CH 10	-6.54	-16.54	8	PASS
	2462/CH 11	-9.83	-19.83	8	PASS
802.11n HT40	2422/CH 3	-13.17	-22.95	8	PASS
	2427/CH 4	-13.39	-23.17	8	PASS
	2432/CH 5	-12.26	-22.04	8	PASS
	2437/CH 6	-12.50	-22.28	8	PASS
	2442/CH 7	-13.93	-23.71	8	PASS
	2447/CH 8	-15.00	-24.78	8	PASS
	2452/CH 9	-15.41	-25.19	8	PASS

Note: Power Spectral Density =Read Value+Duty cycle correction factor+10\*LOG10(3/30)

Test Mode	Channel Number	Read Value (dBm / 3kHz)	Power Spectral Density (dBm / 3kHz)	Limit (dBm / 3kHz)	Conclusion
Bluetooth (Low Energy)	2402/CH0	-13.18	-12.48	8	PASS
	2440/CH19	-13.26	-12.56	8	PASS
	2480/CH39	-12.34	-11.64	8	PASS

Note: Power Spectral Density =Read Value+Duty cycle correction factor

802.11b, Channel No.: 1








802.11b, Channel No.: 6










802.11b, Channel No.: 11





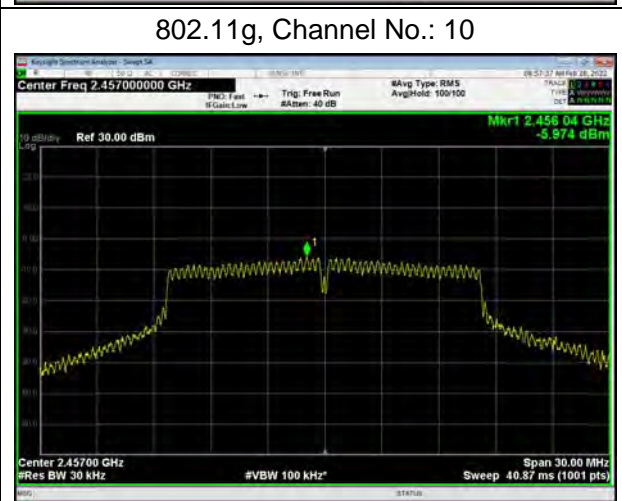
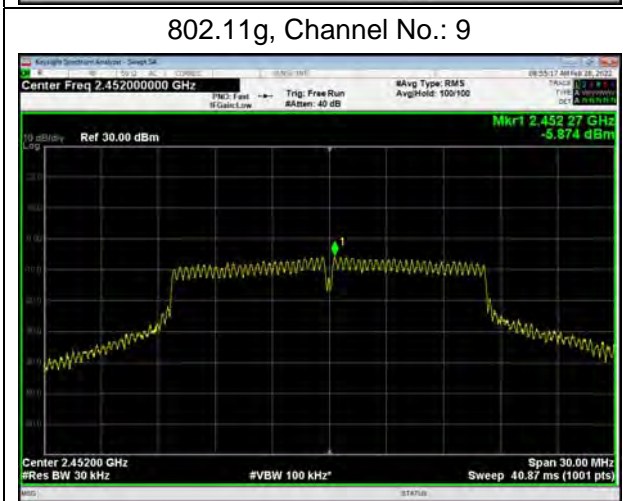
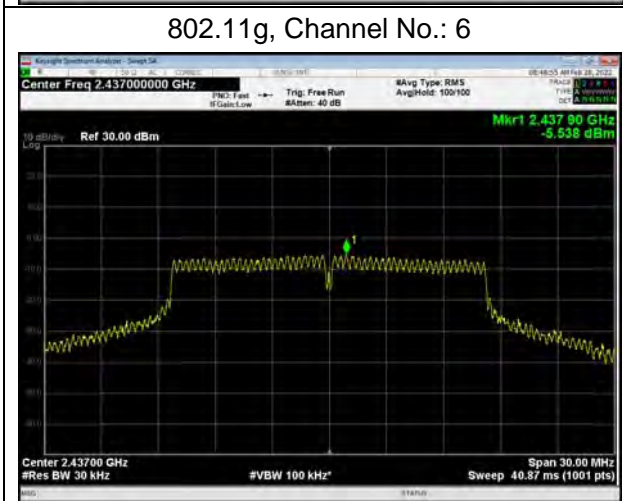
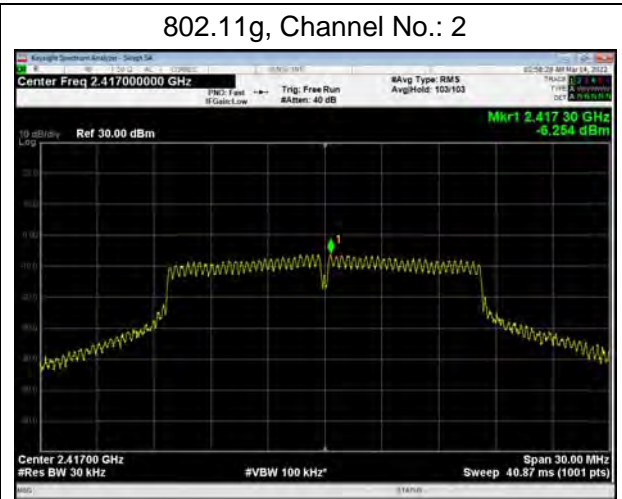
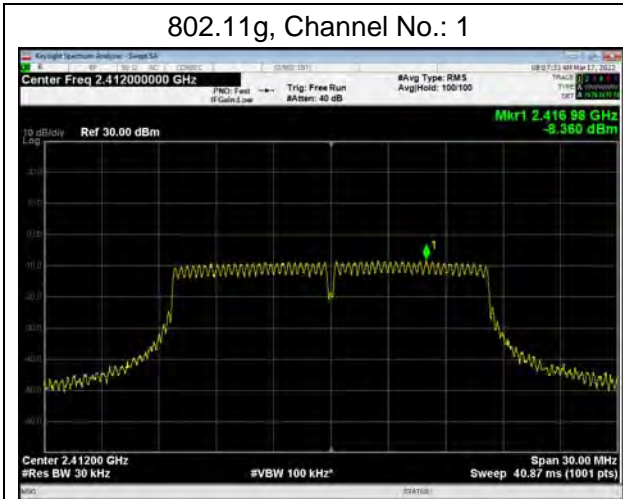





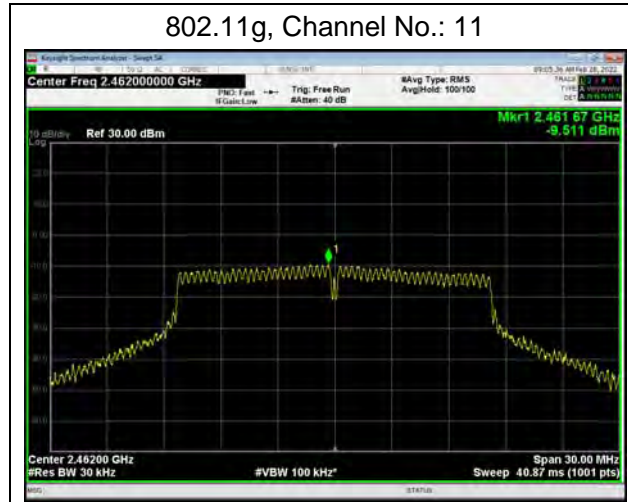

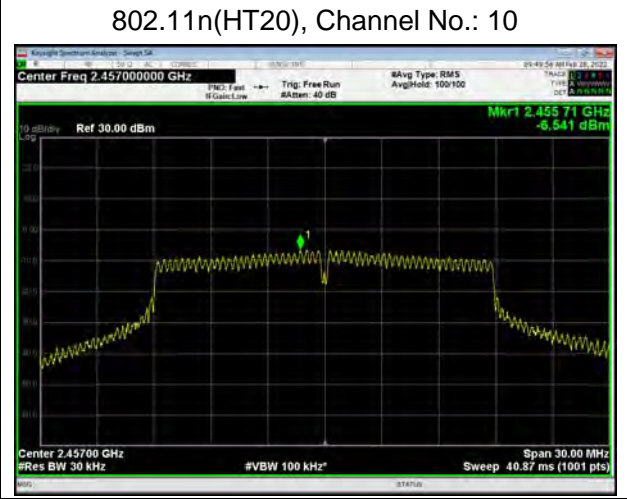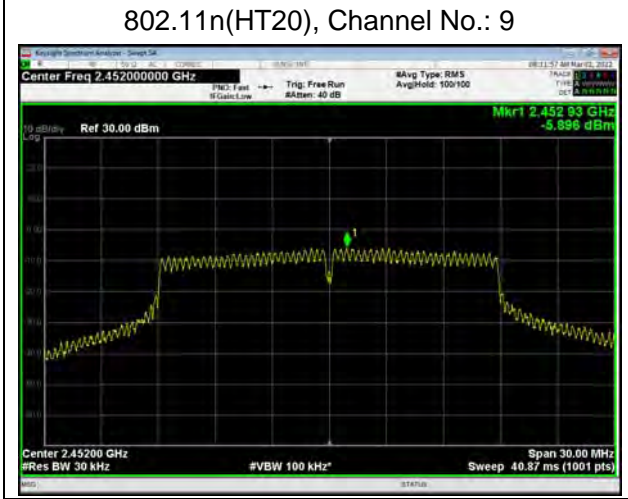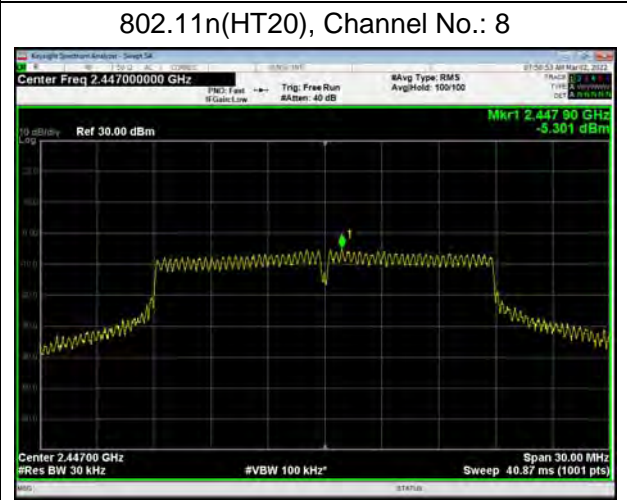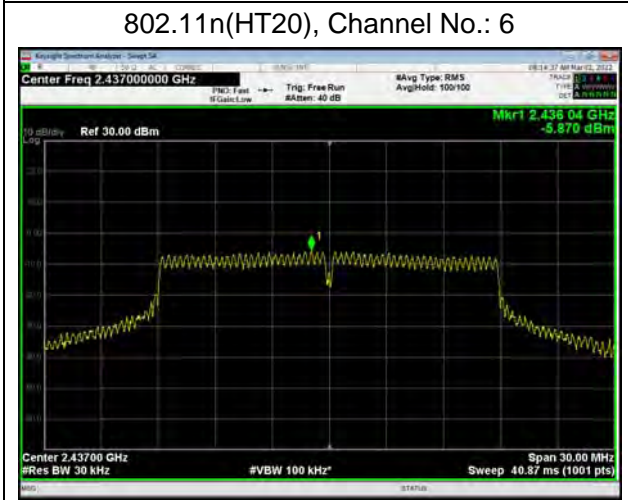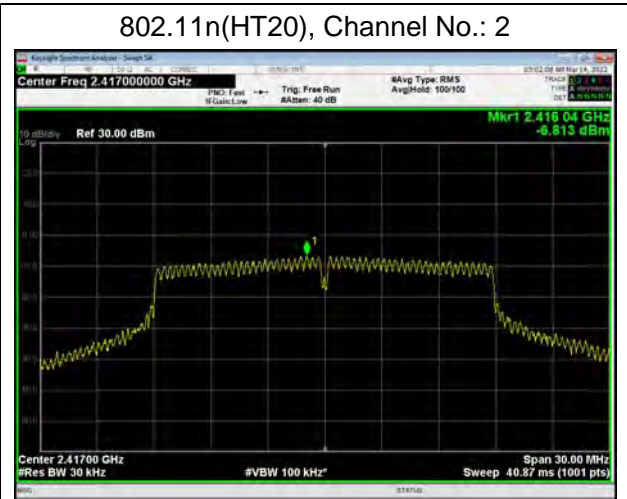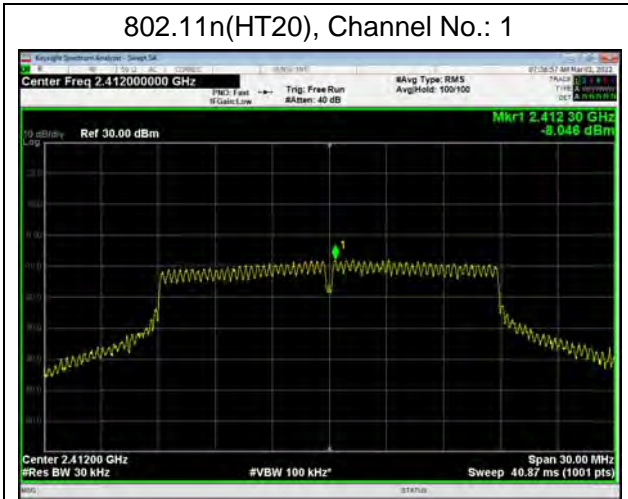

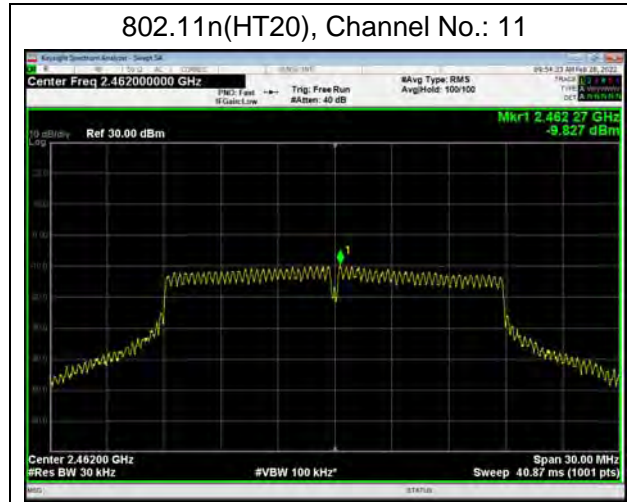

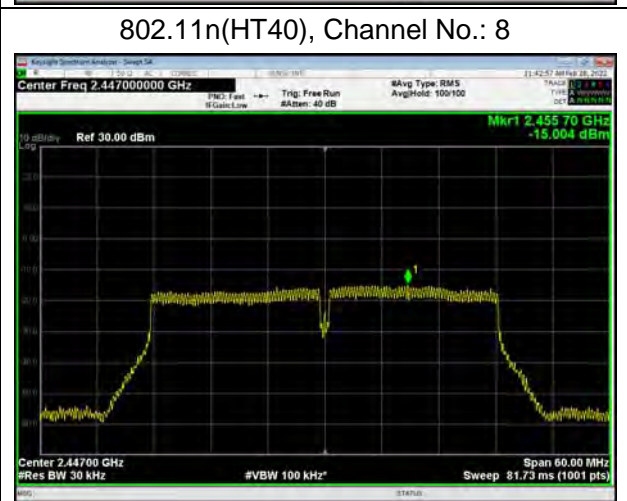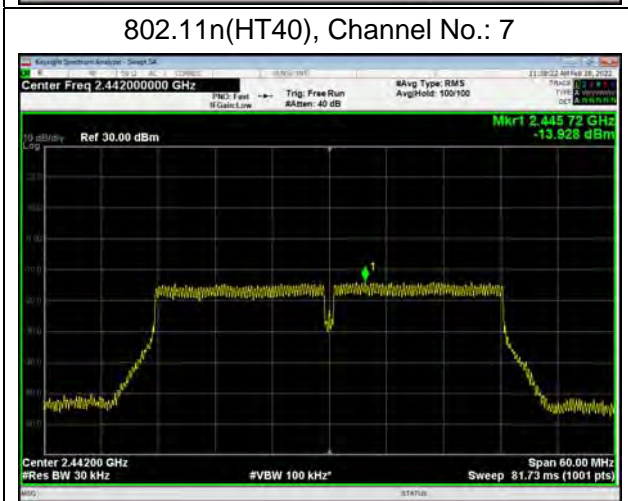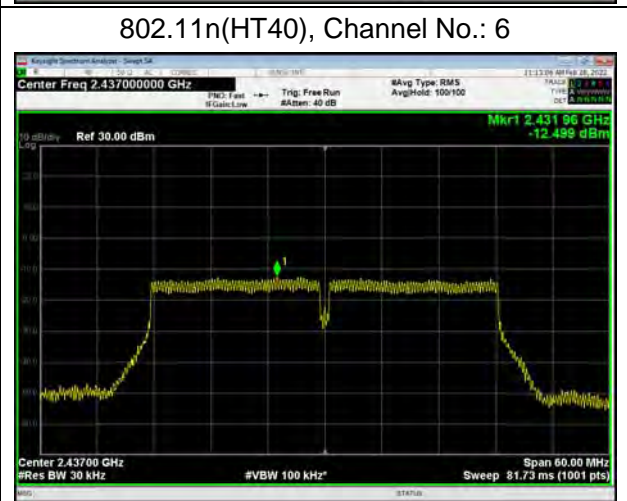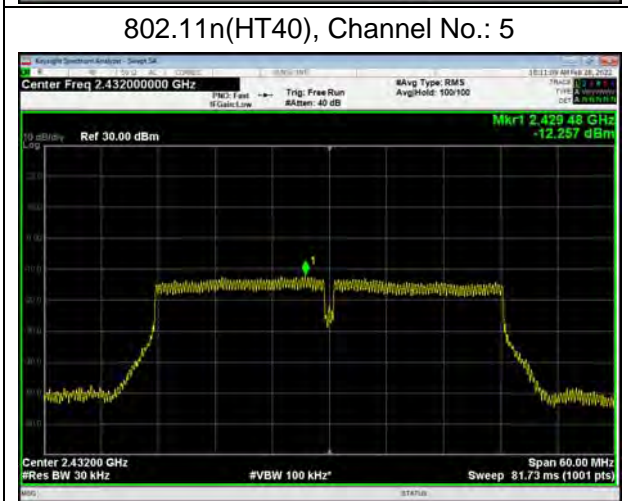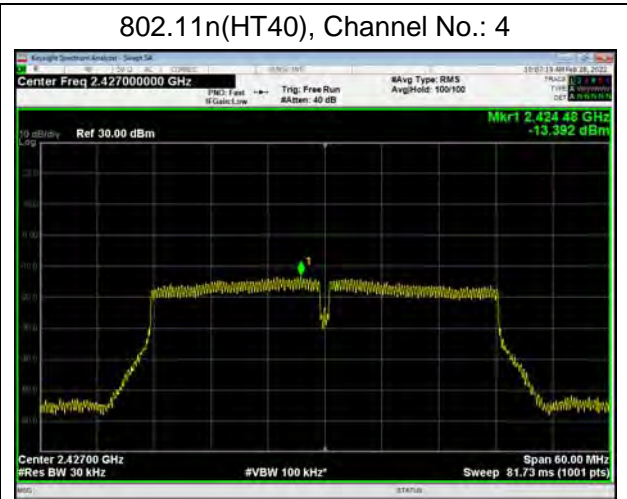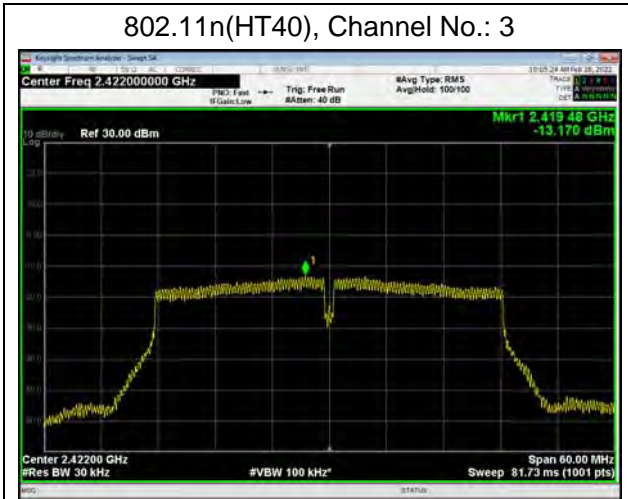

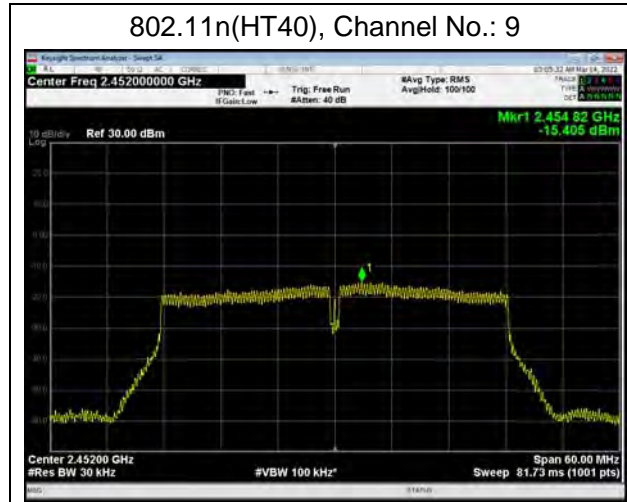

Bluetooth LE, Channel No.: 0



Bluetooth LE, Channel No.: 19



Bluetooth LE, Channel No.: 39



### 5.5. Spurious RF Conducted Emissions

**Ambient condition**

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

**Method of Measurement**

The EUT was connected to the spectrum analyzer with a known loss. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. Set RBW to 100 kHz and VBW to 300 kHz, Sweep is set to ATUO.

The test is in transmitting mode.

**Test setup**



**Limits**

Rule Part 15.247(d) pacifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. ”



Test Mode	Carrier frequency (MHz)	Reference value (dBm)	Limit
802.11b	2412/CH 1	10.47	-19.53
	2437/CH 6	8.75	-21.25
	2462/CH11	9.41	-20.59
802.11g	2412/CH 1	5.17	-24.83
	2417/CH 2	7.68	-22.32
	2437/CH 6	8.09	-21.91
	2447/CH 8	9.91	-20.09
	2452/CH 9	8.02	-21.98
	2457/CH 10	7.53	-22.47
802.11n HT20	2462/CH 11	4.82	-25.18
	2412/CH 1	6.68	-23.32
	2417/CH 2	7.71	-22.29
	2437/CH 6	8.33	-21.67
	2447/CH 8	8.33	-21.67
	2452/CH 9	9.70	-20.30
	2457/CH 10	8.92	-21.08
802.11n HT40	2462/CH 11	4.03	-25.97
	2422/CH 3	0.71	-29.29
	2427/CH 4	0.89	-29.11
	2432/CH 5	1.43	-28.57
	2437/CH 6	1.84	-28.16
	2442/CH 7	0.87	-29.13
	2447/CH 8	-0.92	-30.92
	2452/CH 9	-2.05	-32.05
Bluetooth (Low Energy)	2402/CH0	8.07	-21.93
	2440/CH19	9.71	-20.29
	2480/CH39	8.90	-21.10

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .


Frequency	Uncertainty
100kHz-2GHz	0.684 dB
2GHz-26GHz	1.407 dB






Test Results:


802.11b, Channel No.: 1

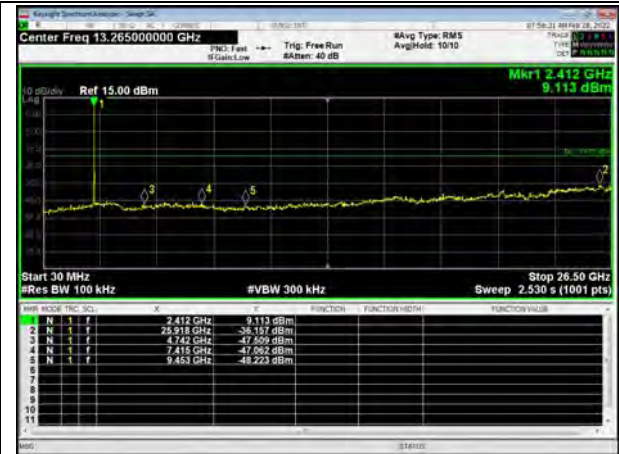

802.11b, Channel No.: 6

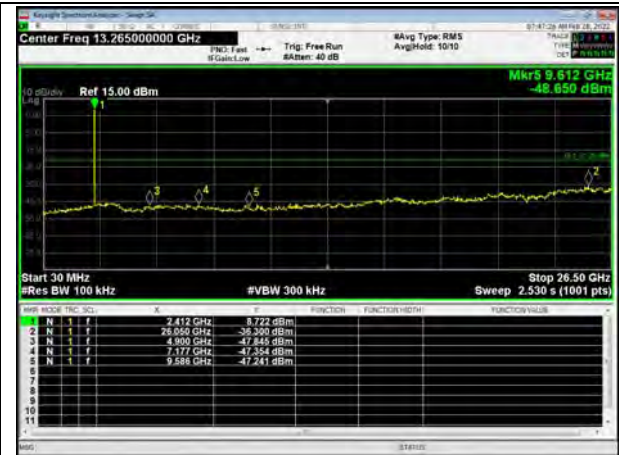


802.11b, Channel No.: 11

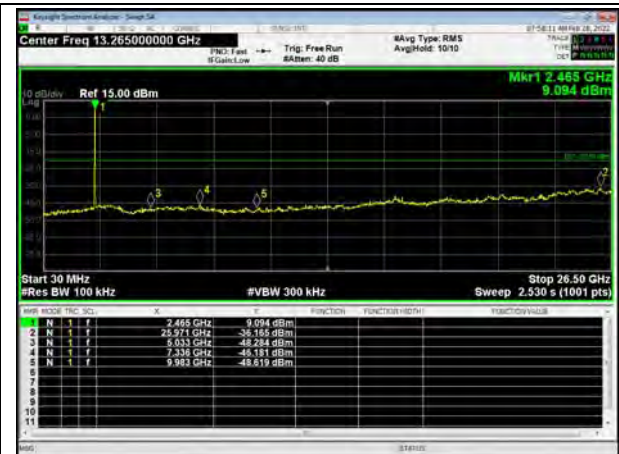





### 802.11g, Channel No.: 1

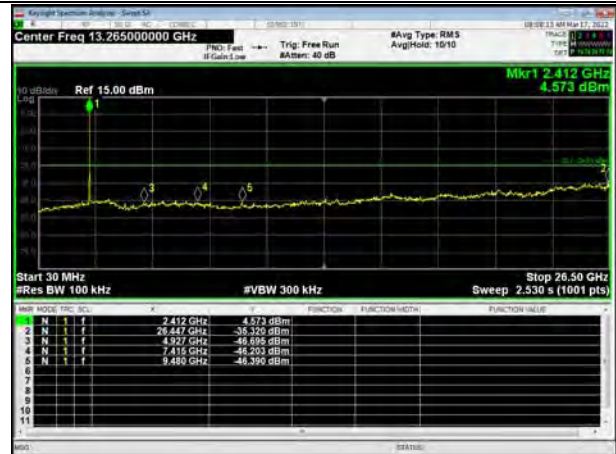

### 802.11g, Channel No.: 2

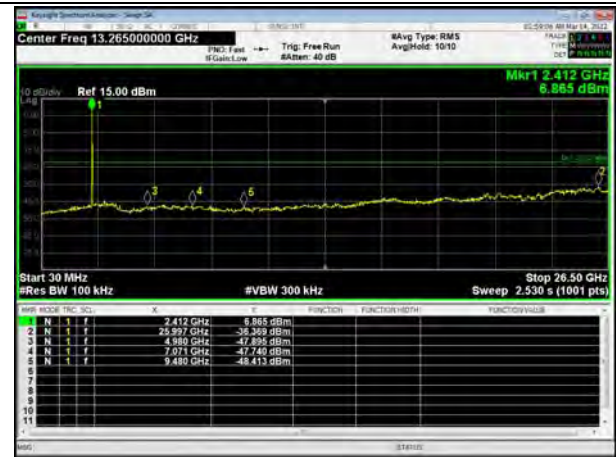


### 802.11g, Channel No.: 6

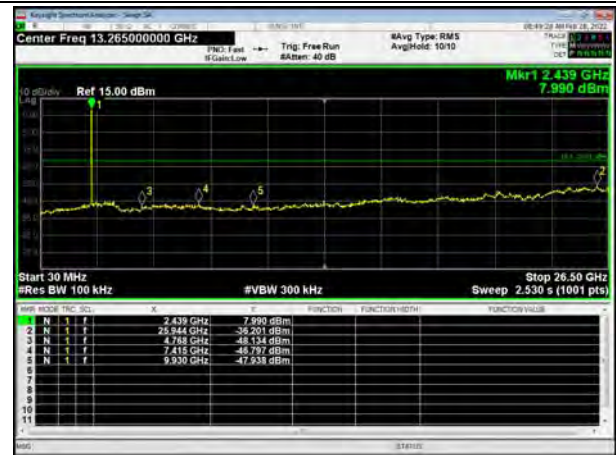

802.11g, Channel No.: 8




802.11g, Channel No.: 9

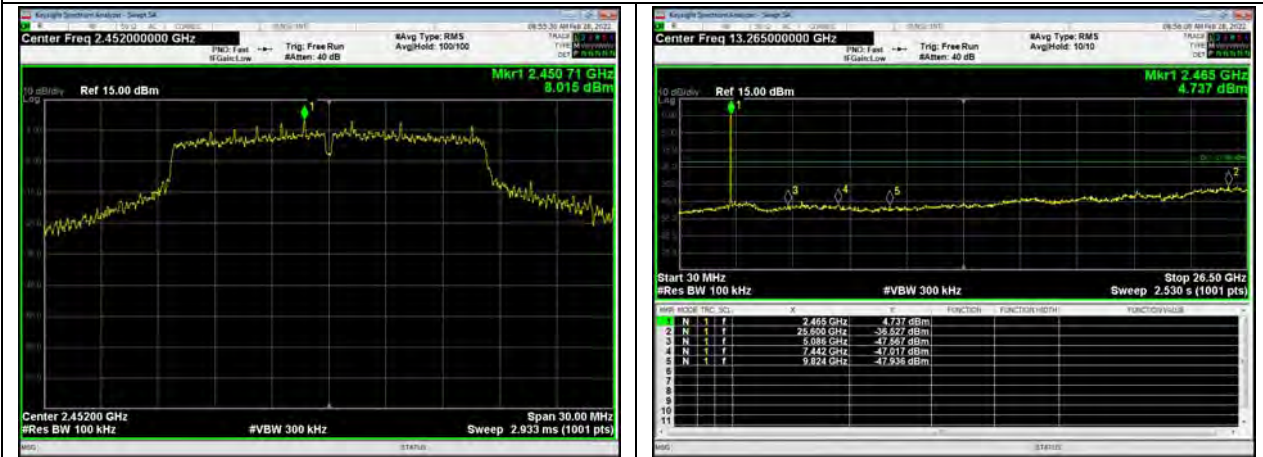

802.11g, Channel No.: 10



802.11g, Channel No.: 11

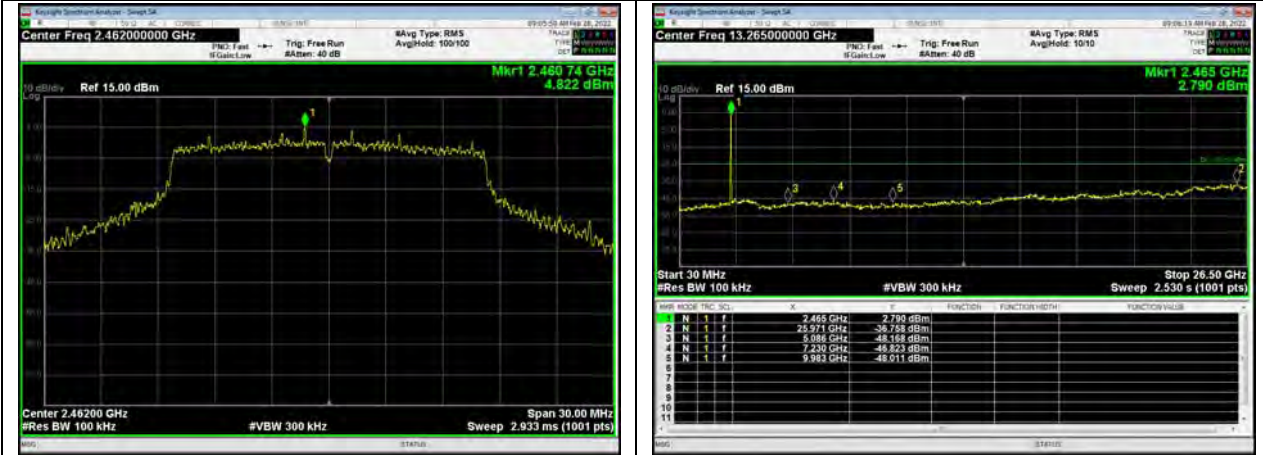

802.11n(HT20), Channel No. 1



802.11n(HT20), Channel No. 2



802.11n(HT20), Channel No. 6




802.11n(HT20), Channel No. 8




802.11n(HT20), Channel No. 9



802.11n(HT20), Channel No. 10

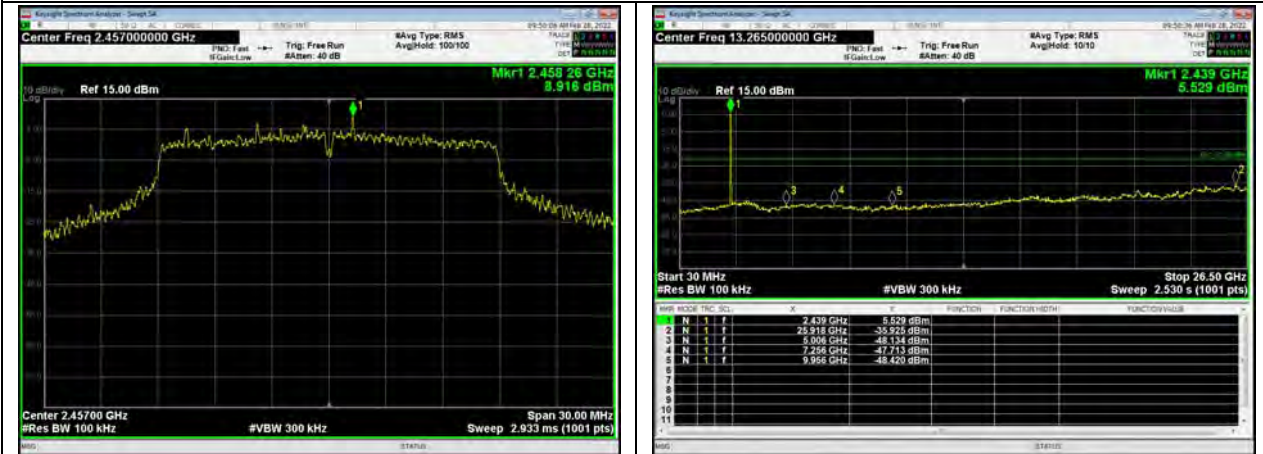

802.11n(HT20), Channel No. 11

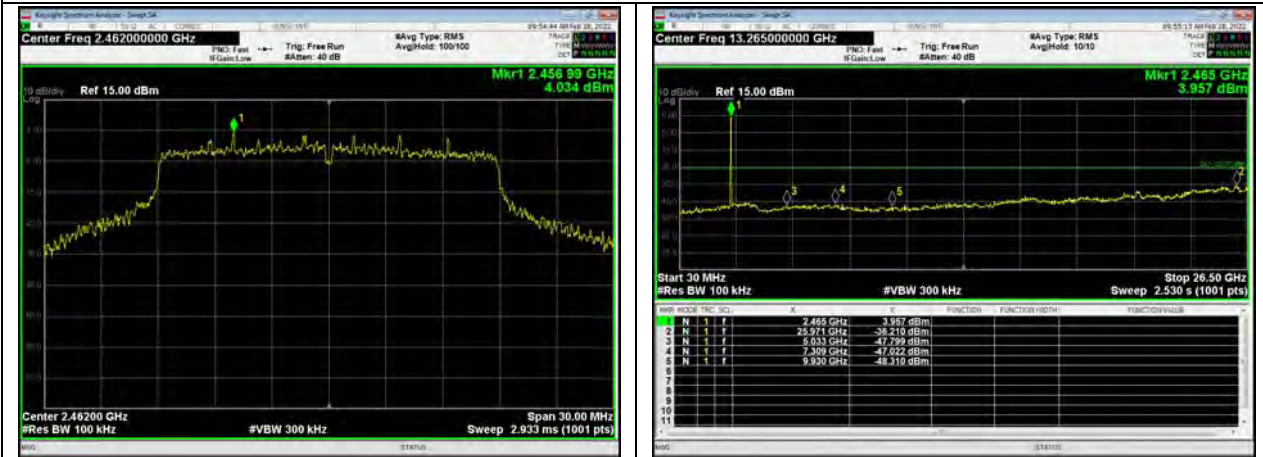


802.11n(HT40), Channel No. 3




802.11n(HT40), Channel No. 4



802.11n(HT40), Channel No. 5


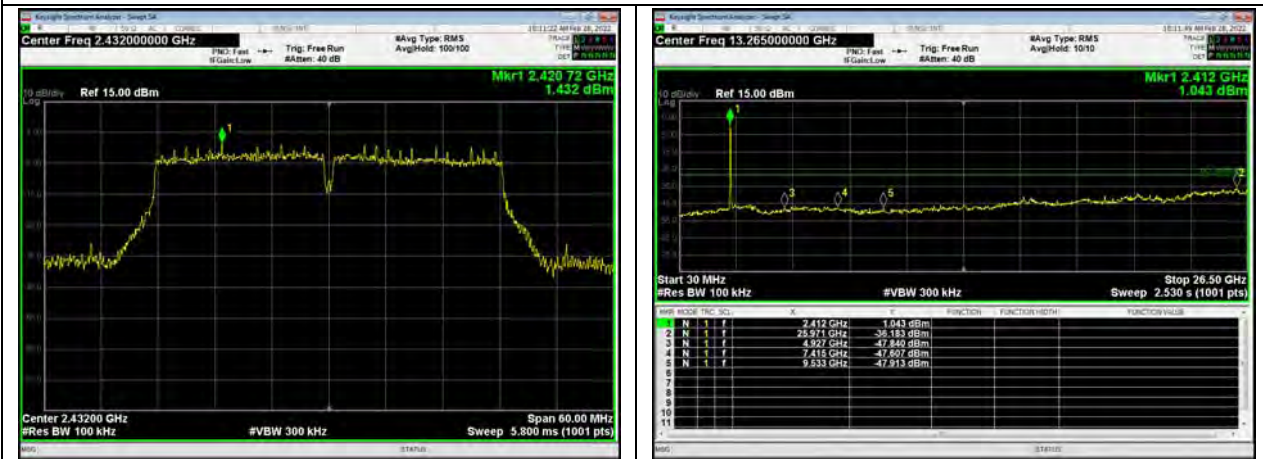


802.11n(HT40), Channel No. 6

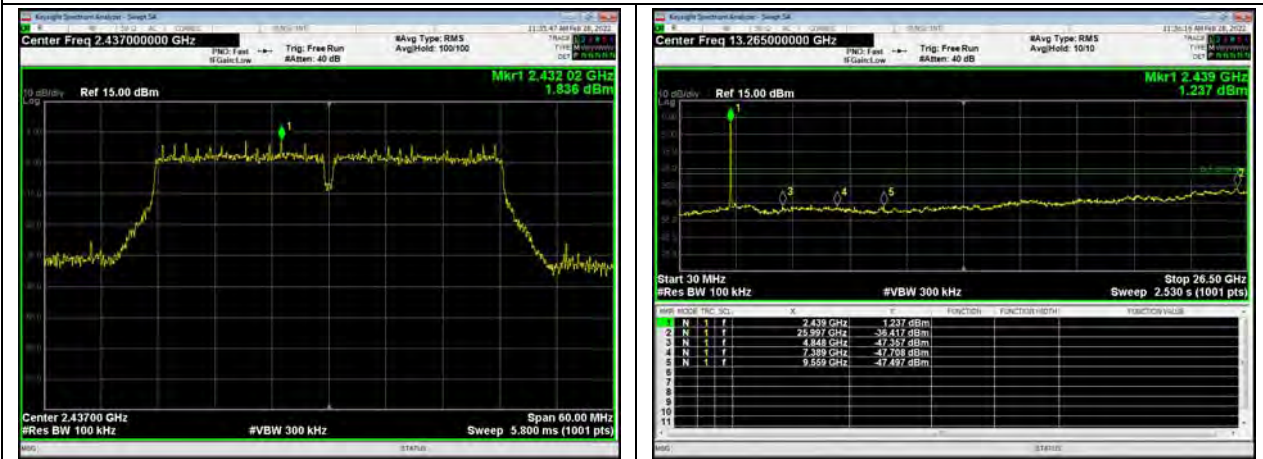





### 802.11n(HT40), Channel No. 7

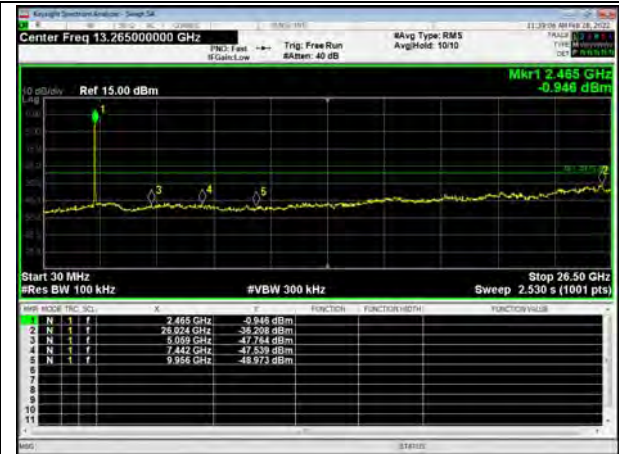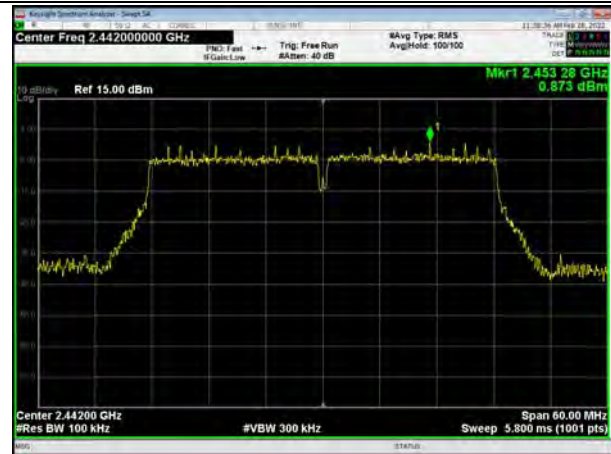

### 802.11n(HT40), Channel No. 8

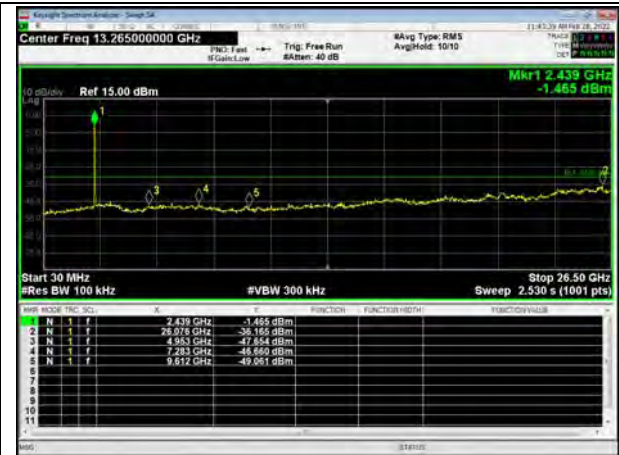


### 802.11n(HT40), Channel No. 9

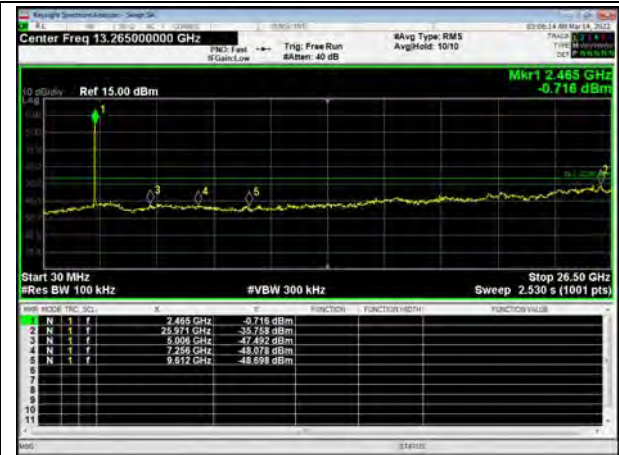





Bluetooth LE, Channel No.: 0

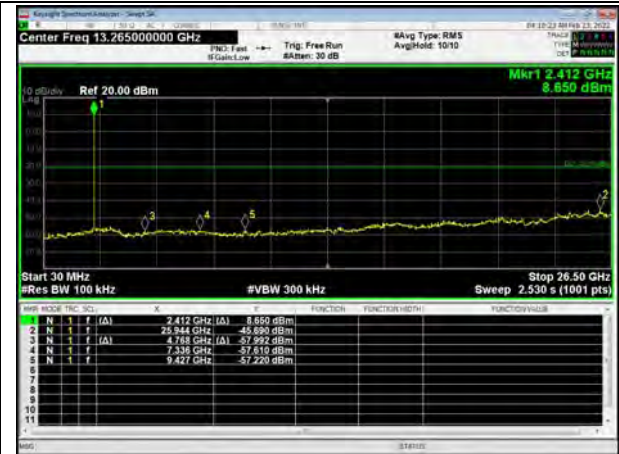

Bluetooth LE, Channel No.: 19

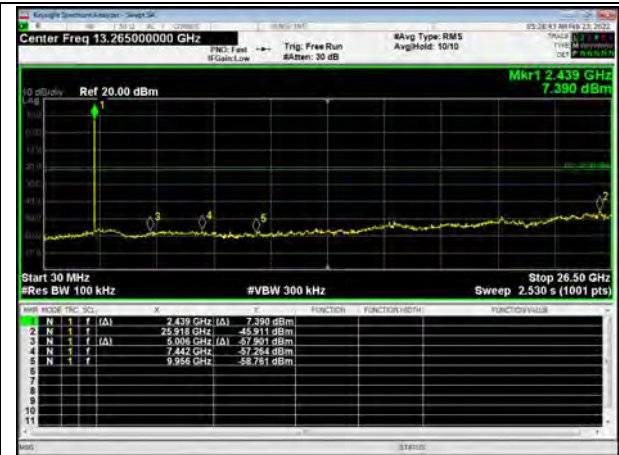

Bluetooth LE, Channel No.: 39

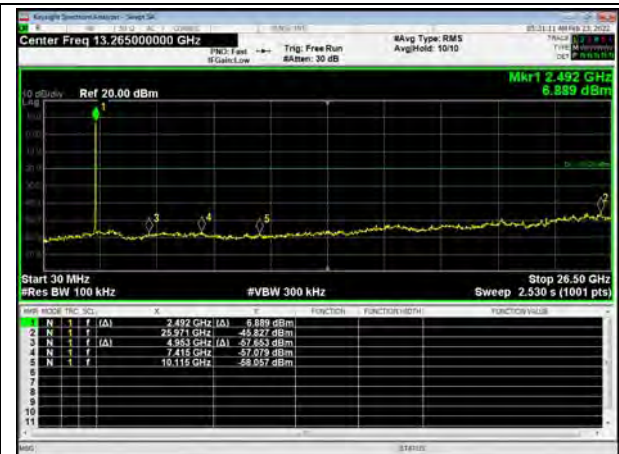

## 5.6. Unwanted Emission

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	102.5kPa

### Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10.

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna.

The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. Sweep the Restricted Band and the emissions less than 20 dB below the permissible value are reported.

The radiated emissions measurements were made in a typical installation configuration.

Sweep the whole frequency band through the range from 9 kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

This method refer to ANSI C63.10.

The procedure for peak unwanted emissions measurements above 1000 MHz is as follows:

Set the spectrum analyzer in the following:

9kHz~150 kHz

RBW=200Hz, VBW=1kHz/ Sweep=AUTO

150 kHz~30MHz

RBW=9KHz, VBW=30KHz,/ Sweep=AUTO

Below 1GHz

RBW=100kHz / VBW=300kHz / Sweep=AUTO

a) Peak emission levels are measured by setting the instrument as follows:

Above 1GHz

PEAK: RBW=1MHz VBW=3MHz/ Sweep=AUTO

b) Average emission levels are measured by setting the instrument as follows:

Above 1GHz

AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO

c) Detector: The measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage



averaging. Log or dB averaging shall not be used.)

e) Sweep time = auto.

f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of  $1 / D$ , where  $D$  is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)

g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:


1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is  $[10 \log (1 / D)]$ , where  $D$  is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.

2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is  $[20 \log (1 / D)]$ , where  $D$  is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.


3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

The test is in transmitting mode.


**Test setup**  
**9KHz ~ 30MHz**

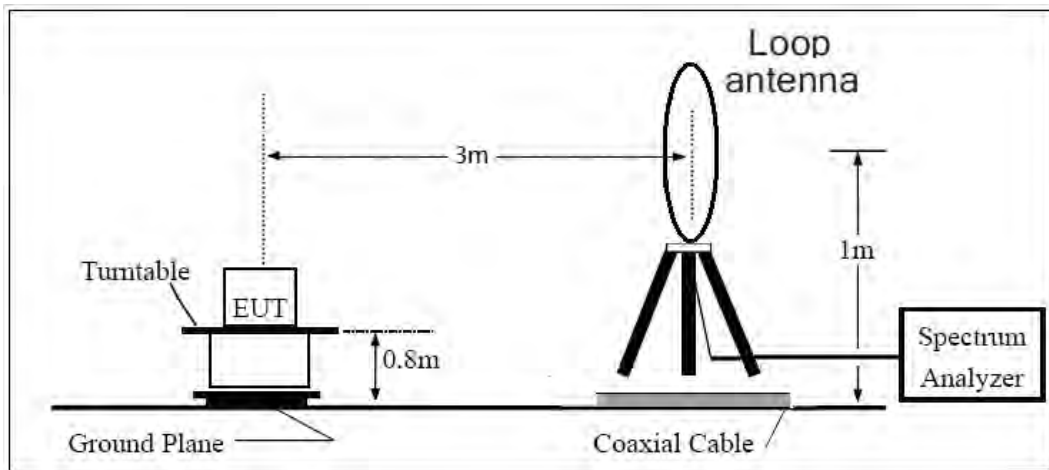

**30MHz ~ 1GHz**

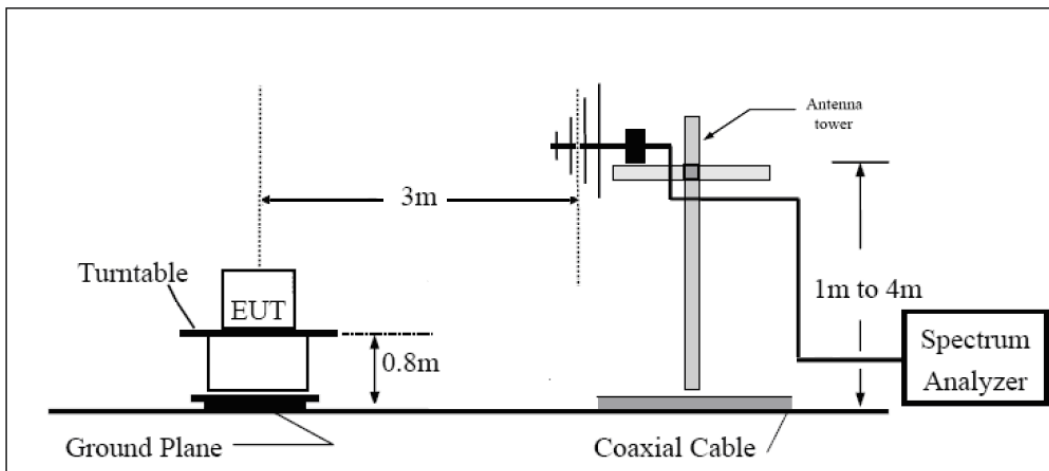

**Above 1GHz**

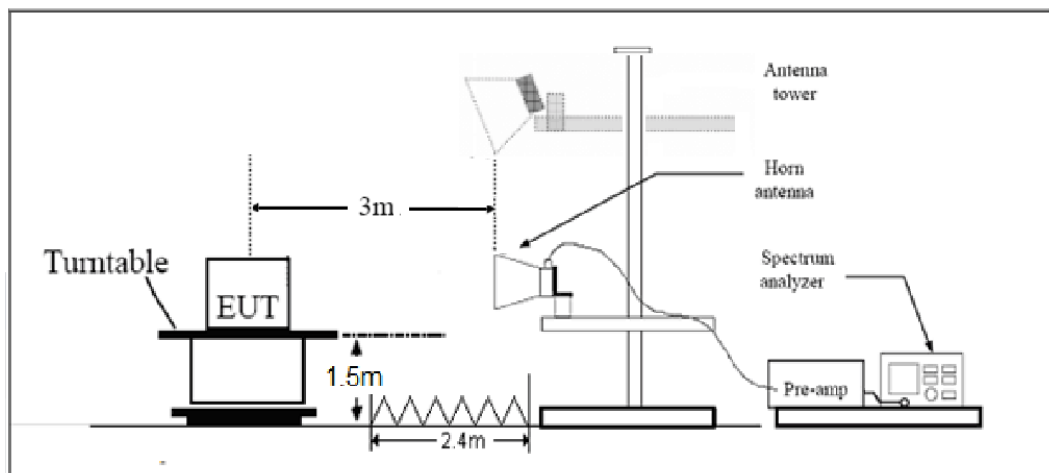

Note: Area side:2.4mX3.6m

**Limits**

Rule Part 15.247(d) specifies that “In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).”

Limit in restricted band

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
0.009–0.490	2400/F(kHz)	/
0.490–1.705	24000/F(kHz)	/
1.705–30.0	30	/
30-88	100	40
88-216	150	43.5
216-960	200	46
Above960	500	54

## §15.35(b)

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

Peak Limit=74 dBuV/m

Average Limit=54 dBuV/m



Spurious Radiated Emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .


Frequency	Uncertainty
9KHz-30MHz	3.55 dB
30MHz-200MHz	4.17 dB
200MHz-1GHz	4.84 dB
1-18GHz	4.35 dB
18-26.5GHz	5.90 dB
26.5GHz~40GHz	5.92 dB




Test Results:

Note: A font (dB $\mu$ V/m) in the test plot =(dB  $\mu$  V/m)


A font (Level in dB V/) in the test plot =(level in dB  $\mu$  V/m)

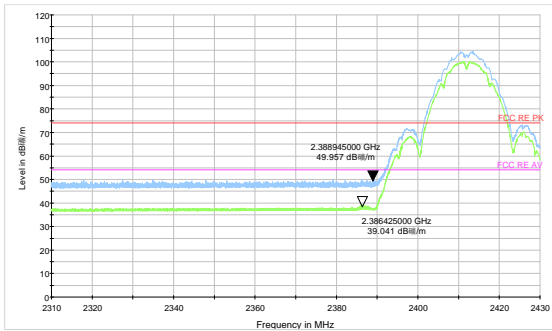


802.11b-Channel 1 Peak+ Average

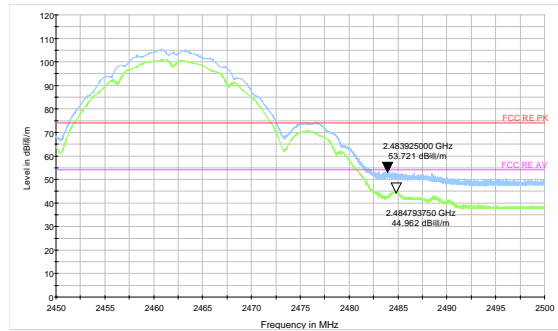


802.11b-Channel 11 Peak+ Average

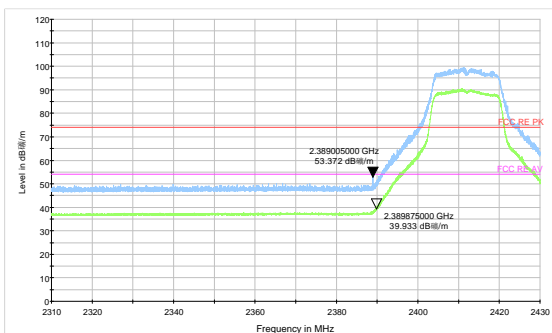


802.11g-Channel 1 Peak+ Average

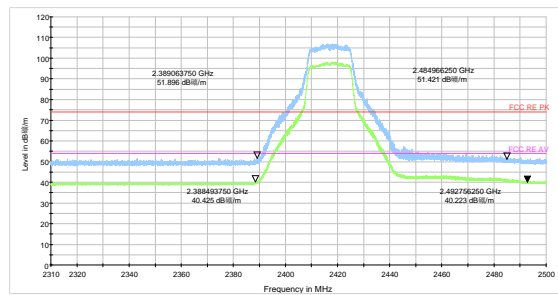


802.11g-Channel 2 Peak+ Average

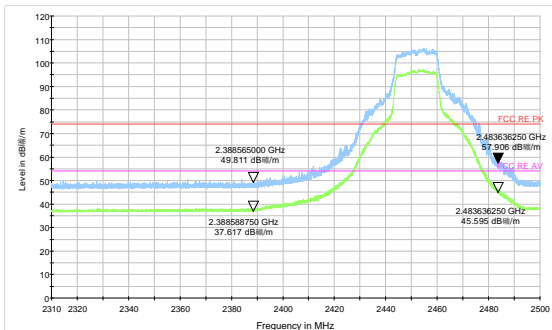


802.11g-Channel 9 Peak+ Average

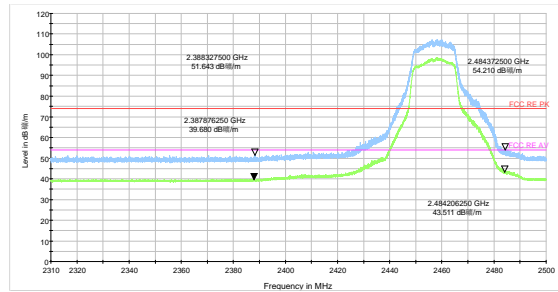


802.11g-Channel 10 Peak+ Average

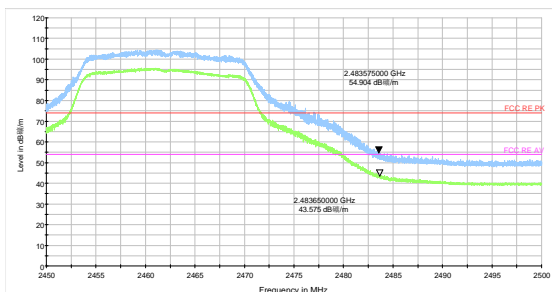


802.11g-Channel 11 Peak+ Average

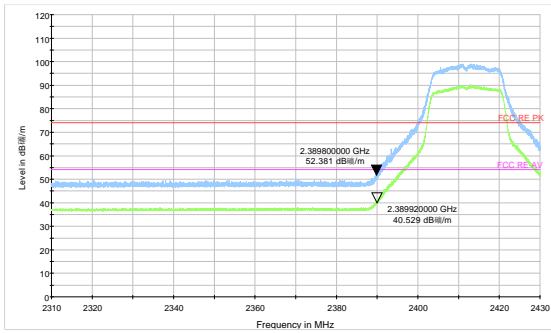


802.11n HT20 -Channel 1 Peak+ Average

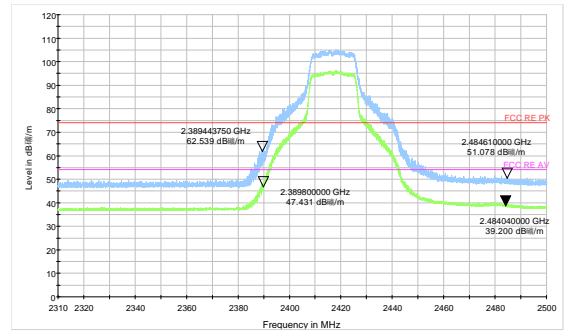


802.11n HT20 -Channel 2 Peak+ Average

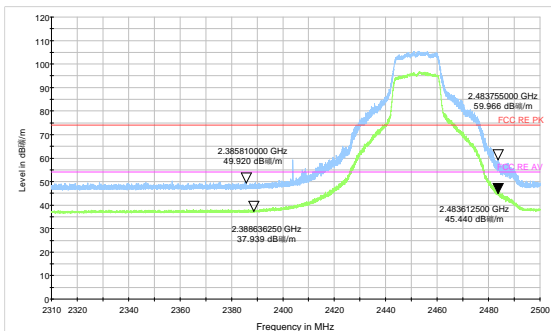

802.11n HT20 -Channel 9 Peak+ Average

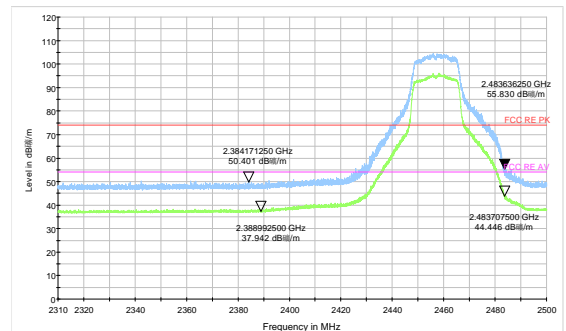


802.11n HT20 -Channel 10 Peak+ Average

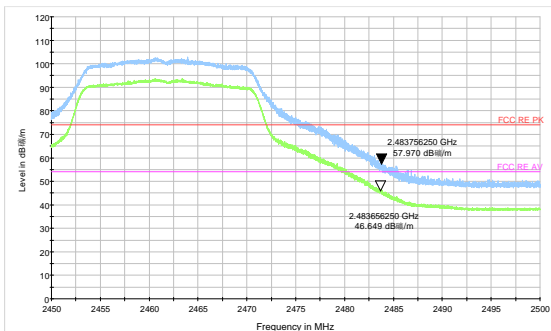


802.11n HT20 -Channel 11 Peak+ Average




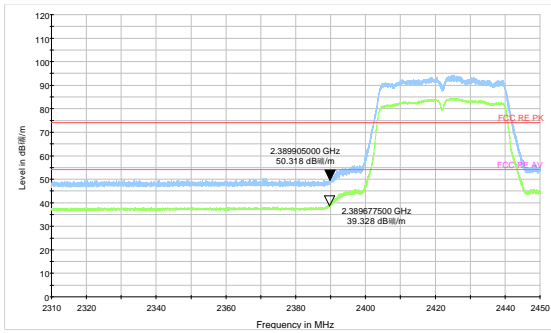


802.11n HT40 -Channel 3 Peak+ Average

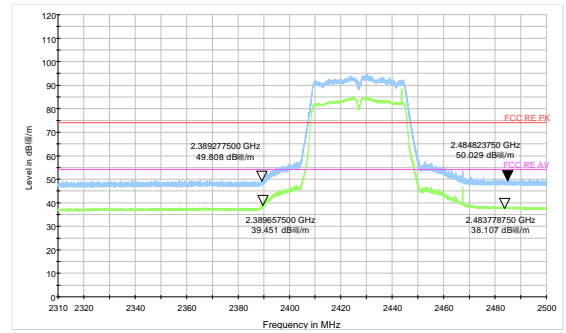


802.11n HT40 -Channel 4 Peak+ Average

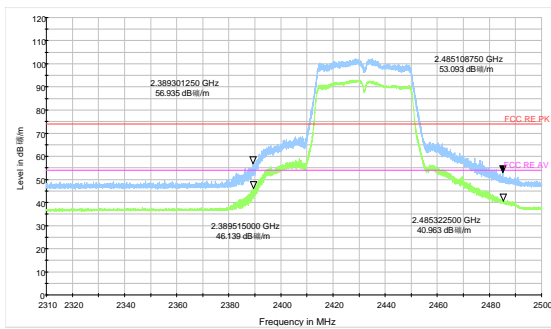


802.11n HT40 -Channel 5 Peak+ Average

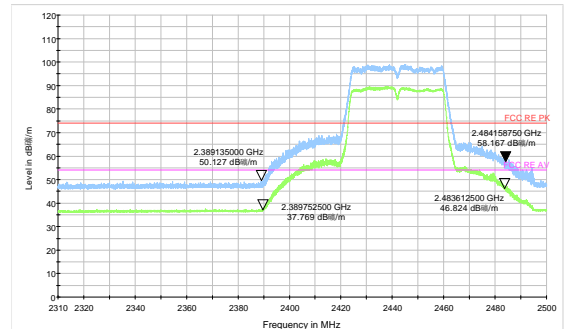


802.11n HT40 -Channel 7 Peak+ Average

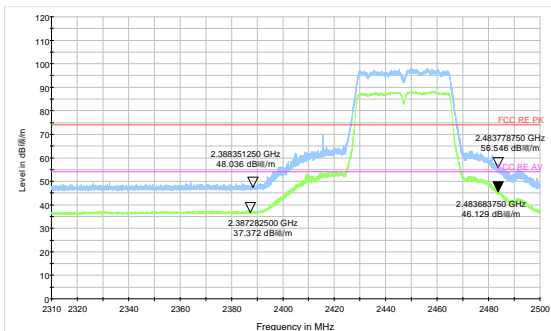


802.11n HT40 -Channel 8 Peak+ Average

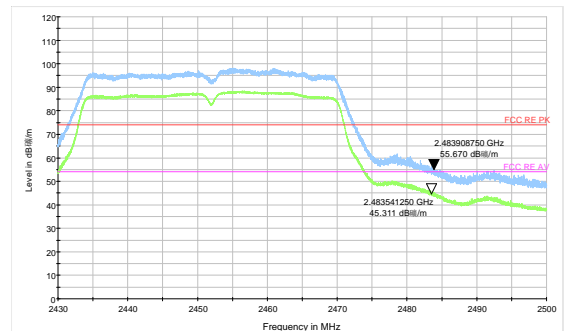

802.11n HT40 -Channel 9 Peak+ Average

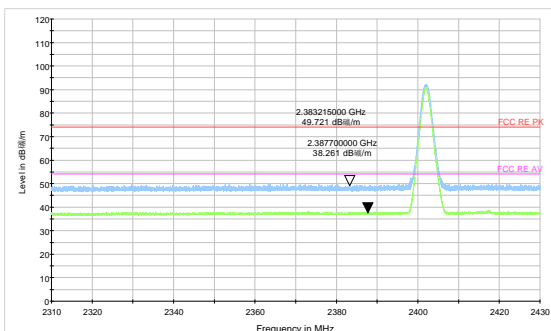

Bluetooth LE Channel 0 Peak+ Average

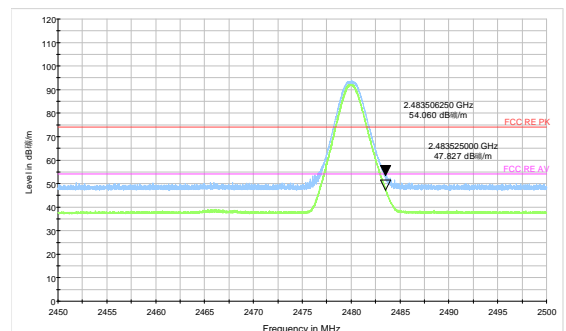

Bluetooth LE Channel 39 Peak+ Average

**Result of RE**

**Test result**


Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the Emissions in the frequency band 9kHz-30MHz and 18GHz-26.5GHz are more than 20dB below the limit are not reported.

The following graphs display the maximum values of horizontal and vertical by software. For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes with all channels, 802.11n (HT20) CH9 and Bluetooth LE-Channel 39are selected as the worst condition. The test data of the worst-case condition was recorded in this report.


**Continuous TX mode:**

FCC RE 9K-90KHz AV

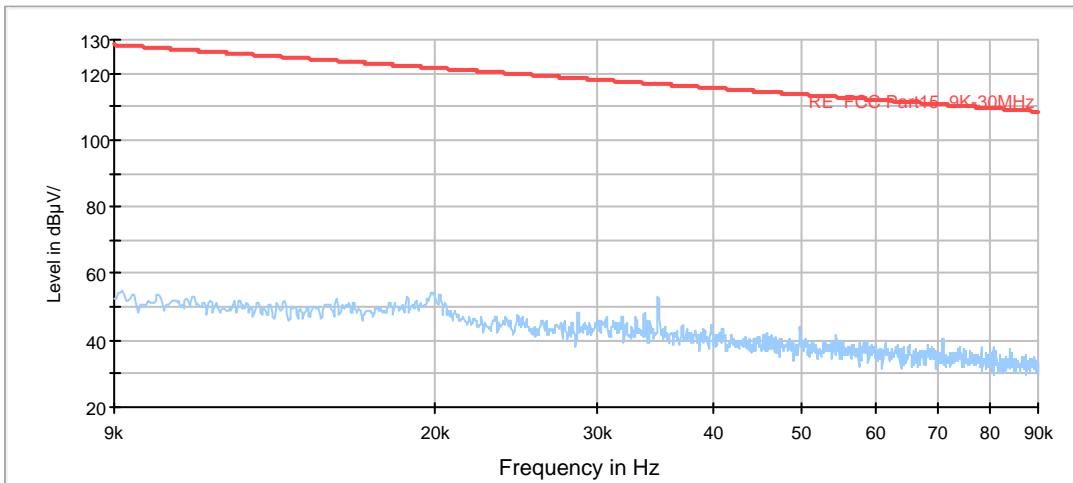

Radiates Emission from 9KHz to 90KHz


FCC RE 90K-110KHz QP

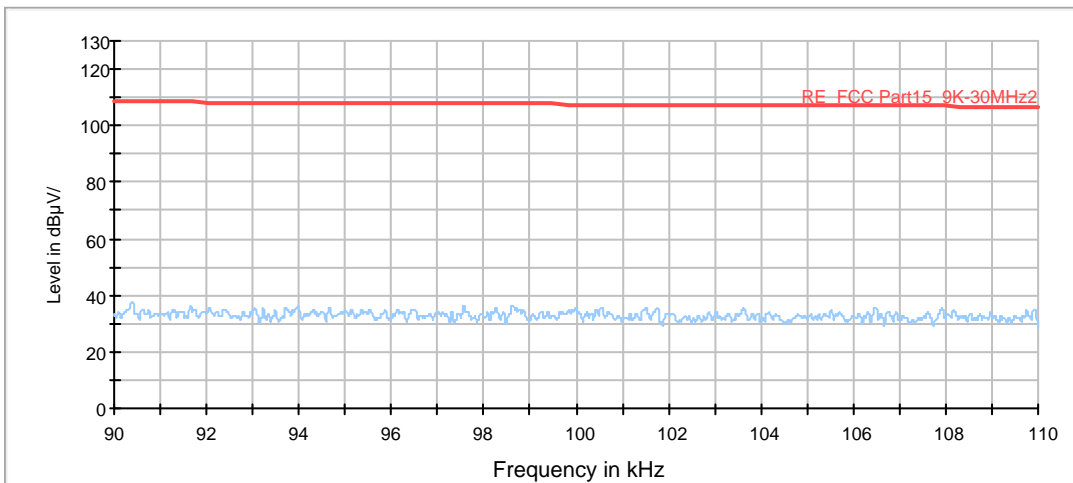

Radiates Emission from 90KHz to 110KHz




FCC RE 110K-490KHz AV

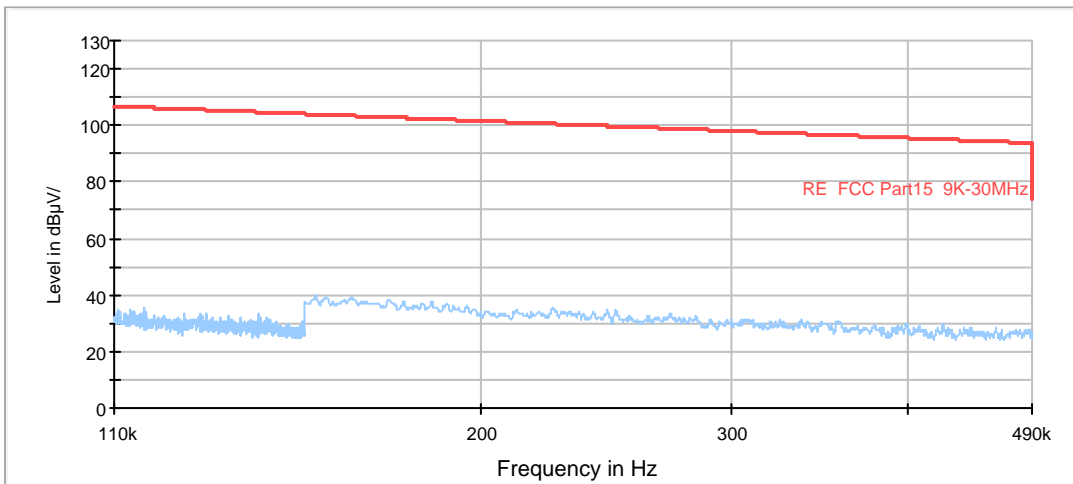


Radiates Emission from 110KHz to 490KHz

FCC RE 490K-30MHz QP

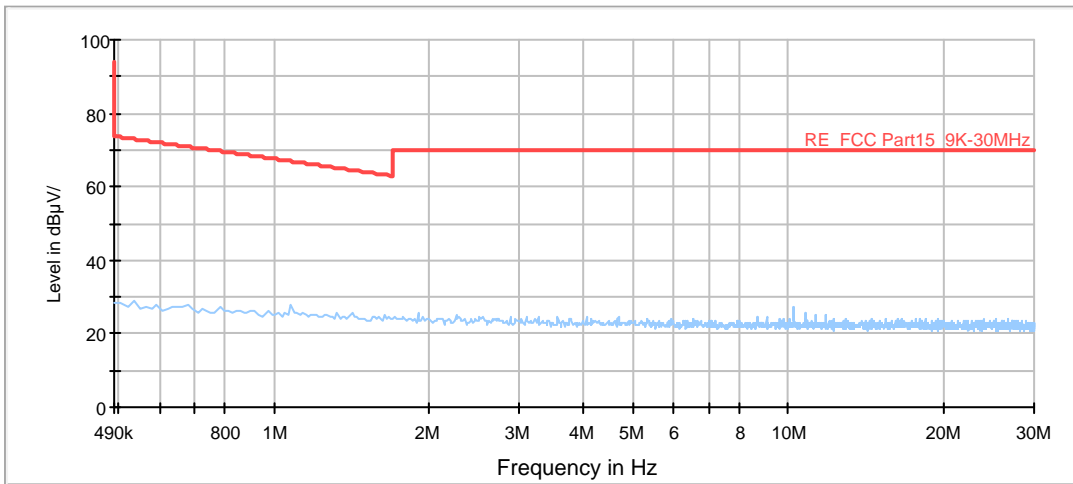

Radiates Emission from 490KHz to 30MHz

**Wi-Fi 2.4G:**

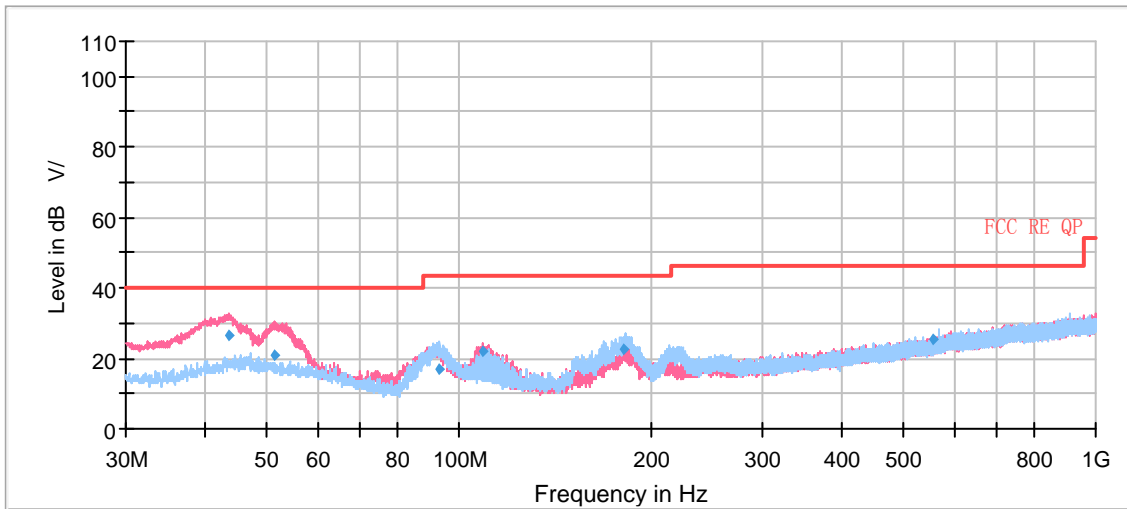

Radiates Emission from 30MHz to 1GHz


Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
43.62	26.66	100.0	V	198.00	20	13.34	40.00
51.43	21.08	100.0	V	47.00	20	18.92	40.00
92.87	16.65	207.0	H	297.00	17	26.85	43.50
108.74	22.21	125.0	V	128.00	18	21.29	43.50
182.01	22.80	184.0	H	77.00	16	20.70	43.50
555.63	25.32	225.0	H	81.00	26	20.68	46.00

**Remark: 1. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)**

**2. Margin = Limit – Quasi-Peak**



Bluetooth LE:

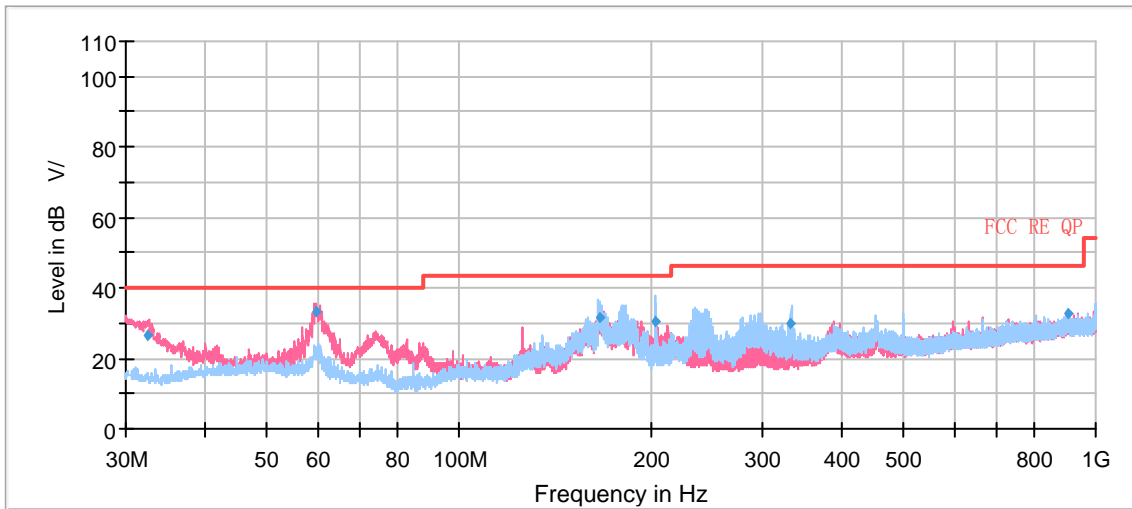

Radiates Emission from 30MHz to 1GHz


Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
32.47	26.67	100.0	V	61.00	17	13.33	40.00
59.69	33.16	100.0	V	103.00	19	6.84	40.00
165.99	31.70	175.0	H	41.00	16	11.80	43.50
204.04	30.44	125.0	H	82.00	18	13.06	43.50
332.12	29.91	100.0	H	1.00	21	16.09	46.00
903.12	32.85	100.0	H	27.00	30	13.15	46.00

Remark: 1. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)

2. Margin = Limit – Quasi-Peak



## 802.11b CH1

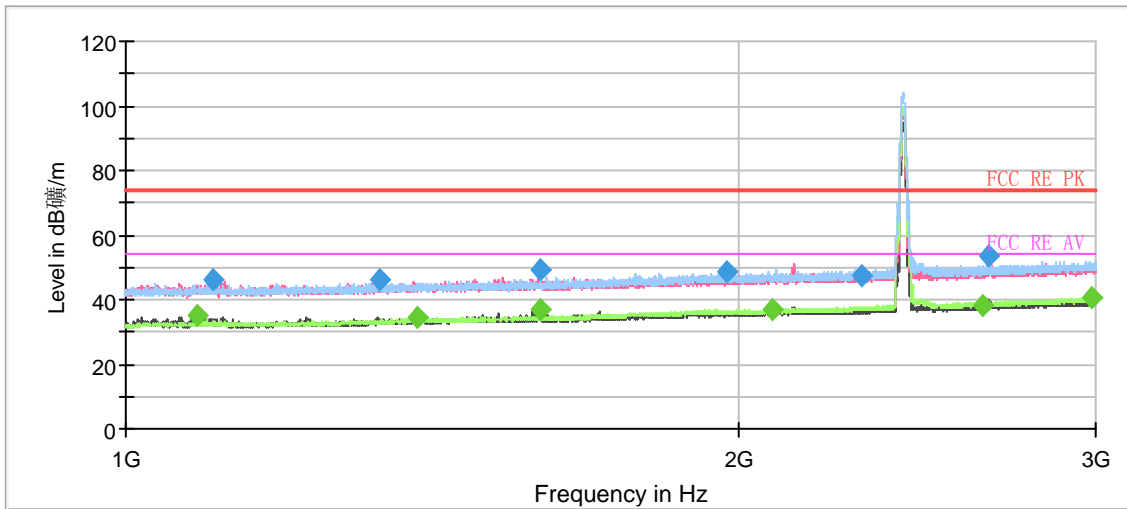


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1083.750000	---	34.88	54.00	19.12	100.0	V	273.0	-16.7
1104.750000	45.97	---	74.00	28.03	200.0	V	102.0	-16.6
1333.250000	46.25	---	74.00	27.75	100.0	V	124.0	-15.6
1390.750000	---	34.69	54.00	19.31	100.0	V	248.0	-15.4
1598.750000	---	37.16	54.00	16.84	200.0	V	66.0	-14.4
1599.000000	49.22	---	74.00	24.78	200.0	V	66.0	-14.4
1977.250000	48.57	---	74.00	25.43	200.0	H	233.0	-12.7
2079.750000	---	37.02	54.00	16.98	200.0	H	251.0	-12.3
2299.500000	47.56	---	74.00	26.44	100.0	V	0.0	-11.7
2636.500000	---	38.33	54.00	15.67	200.0	H	345.0	-10.6
2658.500000	53.42	---	74.00	20.58	200.0	V	114.0	-10.5
2987.000000	---	40.32	54.00	13.68	200.0	H	357.0	-9.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

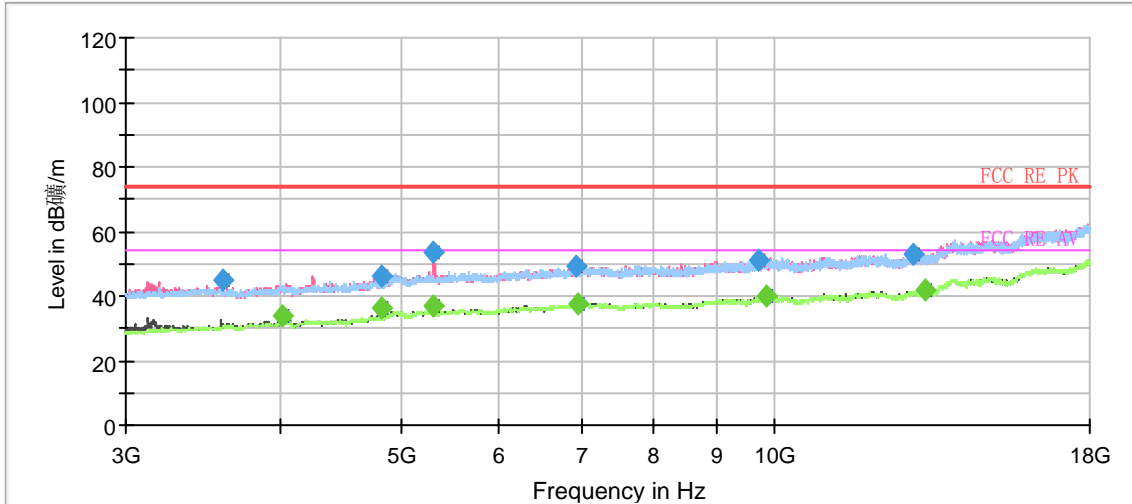


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3592.500000	44.72	---	74.00	29.28	200.0	V	130.0	-16.8
4012.500000	---	33.71	54.00	20.29	200.0	V	300.0	-15.3
4822.500000	---	36.02	54.00	17.98	100.0	H	122.0	-13.1
4822.500000	45.94	---	74.00	28.06	100.0	H	122.0	-13.1
5311.875000	53.61	---	74.00	20.39	200.0	V	138.0	-11.1
5321.250000	---	36.93	54.00	17.07	200.0	V	300.0	-11.1
6939.375000	49.34	---	74.00	24.66	200.0	V	176.0	-7.8
6945.000000	---	37.62	54.00	16.38	200.0	V	285.0	-7.8
9714.375000	51.31	---	74.00	22.69	200.0	V	0.0	-5.4
9862.500000	---	39.71	54.00	14.29	100.0	V	0.0	-5.4
12965.625000	53.10	---	74.00	20.90	100.0	V	15.0	-3.3
13245.000000	---	41.81	54.00	12.19	200.0	V	192.0	-2.2

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



## 802.11b CH6

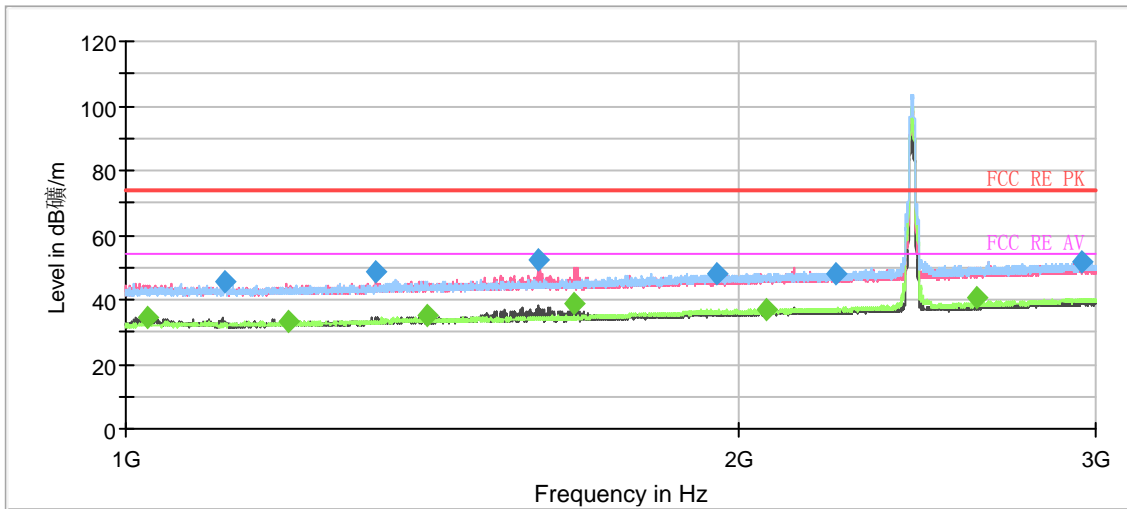


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1024.250000	---	34.28	54.00	19.72	100.0	V	88.0	-16.9
1120.000000	45.40	---	74.00	28.60	200.0	V	74.0	-16.6
1201.750000	---	33.00	54.00	21.00	100.0	V	132.0	-16.1
1328.000000	48.35	---	74.00	25.65	100.0	V	63.0	-15.6
1405.750000	---	35.03	54.00	18.97	200.0	H	146.0	-15.3
1594.250000	52.21	---	74.00	21.79	200.0	V	87.0	-14.4
1663.000000	---	39.00	54.00	15.00	200.0	V	74.0	-14.1
1953.500000	48.06	---	74.00	25.94	200.0	H	246.0	-12.8
2066.750000	---	36.84	54.00	17.16	100.0	H	17.0	-12.4
2234.500000	48.14	---	74.00	25.86	100.0	H	5.0	-12.0
2623.250000	---	40.85	54.00	13.15	200.0	V	359.0	-10.7
2954.250000	51.93	---	74.00	22.07	100.0	H	54.0	-9.1

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



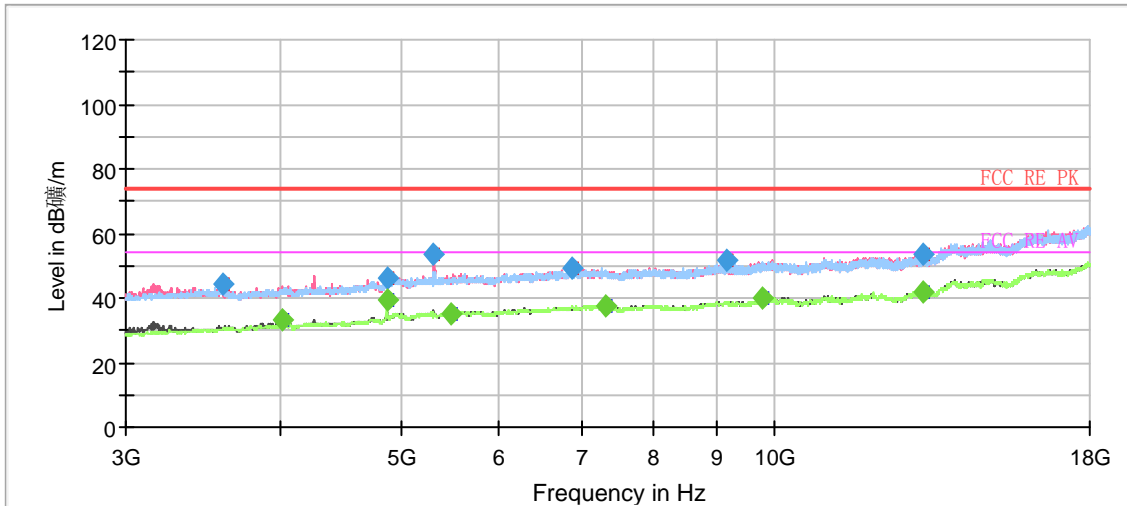


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3592.500000	44.24	---	74.00	29.76	200.0	V	129.0	-16.8
4018.125000	---	33.14	54.00	20.86	200.0	V	0.0	-15.3
4873.125000	---	39.33	54.00	14.67	100.0	H	121.0	-12.6
4873.125000	46.28	---	74.00	27.72	100.0	H	121.0	-12.6
5321.250000	53.41	---	74.00	20.59	200.0	V	49.0	-11.1
5495.625000	---	34.90	54.00	19.10	200.0	V	129.0	-10.5
6881.250000	49.42	---	74.00	24.58	200.0	V	73.0	-7.8
7320.000000	---	37.65	54.00	16.35	200.0	V	95.0	-7.1
9163.125000	51.73	---	74.00	22.27	200.0	H	239.0	-6.6
9796.875000	---	39.79	54.00	14.21	100.0	H	267.0	-5.5
13222.500000	---	41.79	54.00	12.21	100.0	H	229.0	-2.3
13222.500000	53.66	---	74.00	20.34	100.0	H	229.0	-2.3

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



## 802.11b CH11

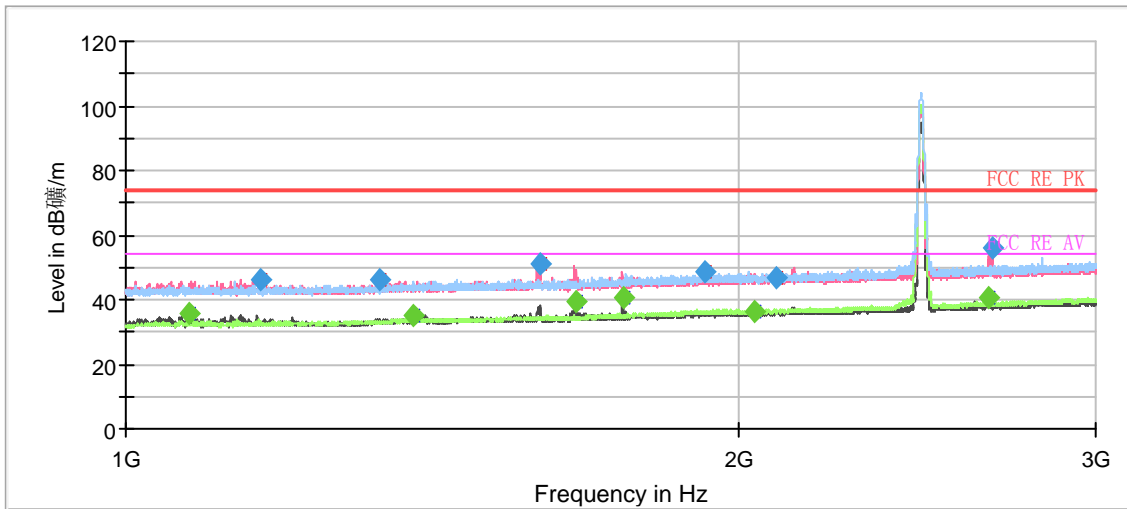


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1075.250000	---	35.49	54.00	18.51	100.0	V	278.0	-16.8
1164.500000	45.94	---	74.00	28.06	200.0	V	110.0	-16.4
1332.250000	46.45	---	74.00	27.55	200.0	V	73.0	-15.6
1385.000000	---	35.08	54.00	18.92	200.0	H	144.0	-15.4
1599.250000	51.24	---	74.00	22.76	200.0	V	80.0	-14.4
1664.250000	---	39.68	54.00	14.32	100.0	V	101.0	-14.1
1755.750000	---	40.67	54.00	13.33	200.0	V	158.0	-13.6
1926.500000	48.92	---	74.00	25.08	100.0	H	0.0	-12.9
2037.250000	---	36.49	54.00	17.51	200.0	H	323.0	-12.5
2087.500000	46.86	---	74.00	27.14	200.0	V	61.0	-12.3
2655.750000	---	40.70	54.00	13.30	100.0	V	76.0	-10.5
2666.500000	56.17	---	74.00	17.83	100.0	V	70.0	-10.5

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

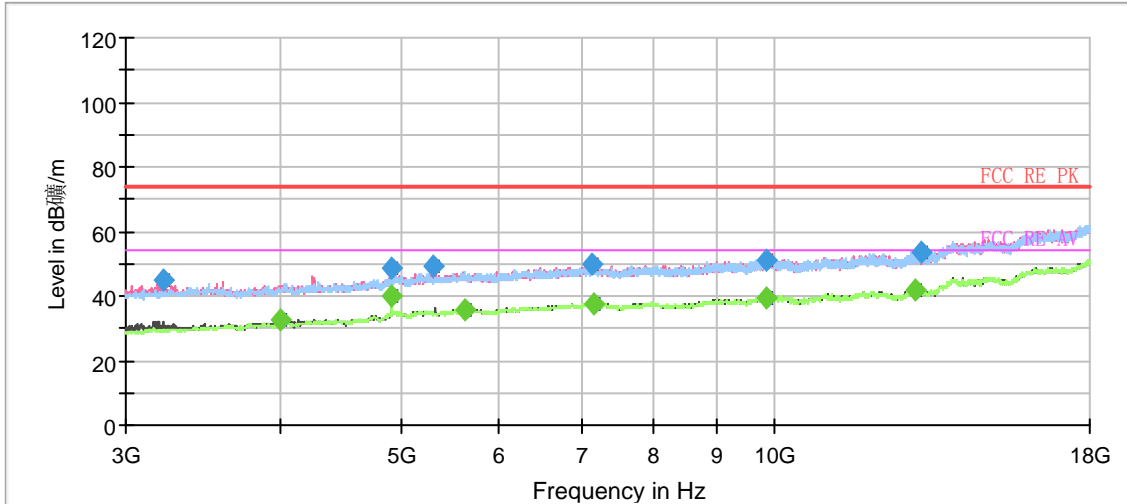


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3219.375000	44.88	---	74.00	29.12	100.0	V	273.0	-18.1
3999.375000	---	32.67	54.00	21.33	100.0	V	78.0	-15.4
4923.750000	---	40.28	54.00	13.72	100.0	H	121.0	-11.8
4923.750000	48.32	---	74.00	25.68	100.0	H	121.0	-11.8
5311.875000	49.16	---	74.00	24.84	100.0	V	78.0	-11.1
5636.250000	---	35.44	54.00	18.56	100.0	V	240.0	-10.3
7140.000000	49.74	---	74.00	24.26	100.0	H	20.0	-7.5
7156.875000	---	37.71	54.00	16.29	200.0	H	247.0	-7.4
9866.250000	51.14	---	74.00	22.86	100.0	V	248.0	-5.4
9875.625000	---	39.63	54.00	14.37	200.0	H	108.0	-5.4
13001.250000	---	41.57	54.00	12.43	200.0	H	292.0	-3.2
13171.875000	53.43	---	74.00	20.57	200.0	V	133.0	-2.4

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



## 802.11g CH1

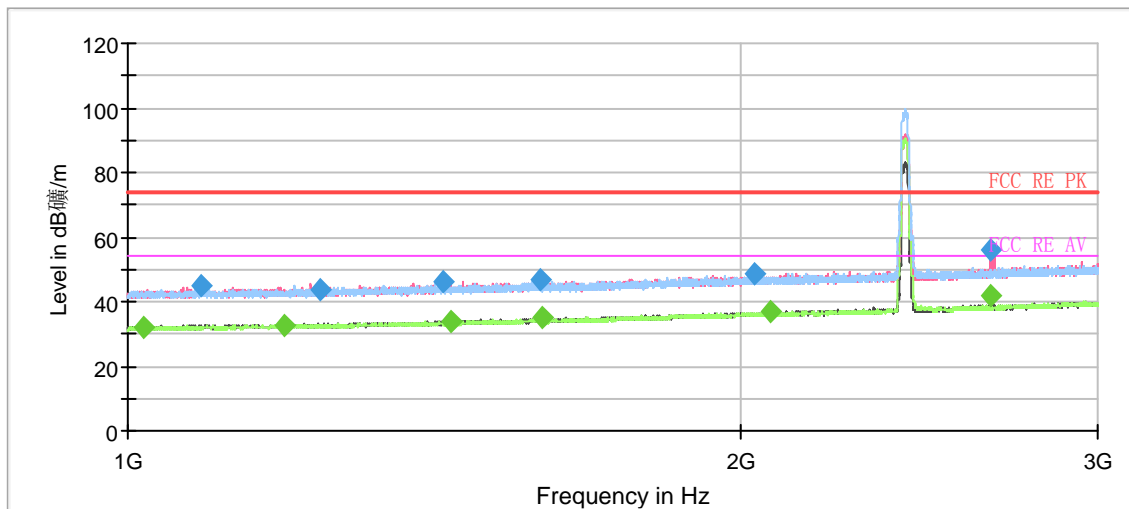


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1019.000000	---	32.14	54.00	21.86	200.0	V	239.0	-17.0
1086.250000	44.93	---	74.00	29.07	200.0	V	359.0	-16.7
1193.250000	---	32.81	54.00	21.19	200.0	V	23.0	-16.1
1242.250000	43.92	---	74.00	30.08	200.0	H	0.0	-16.0
1430.500000	45.92	---	74.00	28.08	200.0	V	257.0	-15.2
1441.500000	---	33.84	54.00	20.16	100.0	V	62.0	-15.1
1596.000000	46.75	---	74.00	27.25	200.0	V	60.0	-14.4
1597.750000	---	35.08	54.00	18.92	200.0	V	302.0	-14.4
2033.250000	48.47	---	74.00	25.53	200.0	V	351.0	-12.5
2073.000000	---	36.79	54.00	17.21	200.0	V	0.0	-12.3
2656.500000	56.06	---	74.00	17.94	100.0	V	38.0	-10.5
2659.750000	---	42.10	54.00	11.90	100.0	V	38.0	-10.5

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

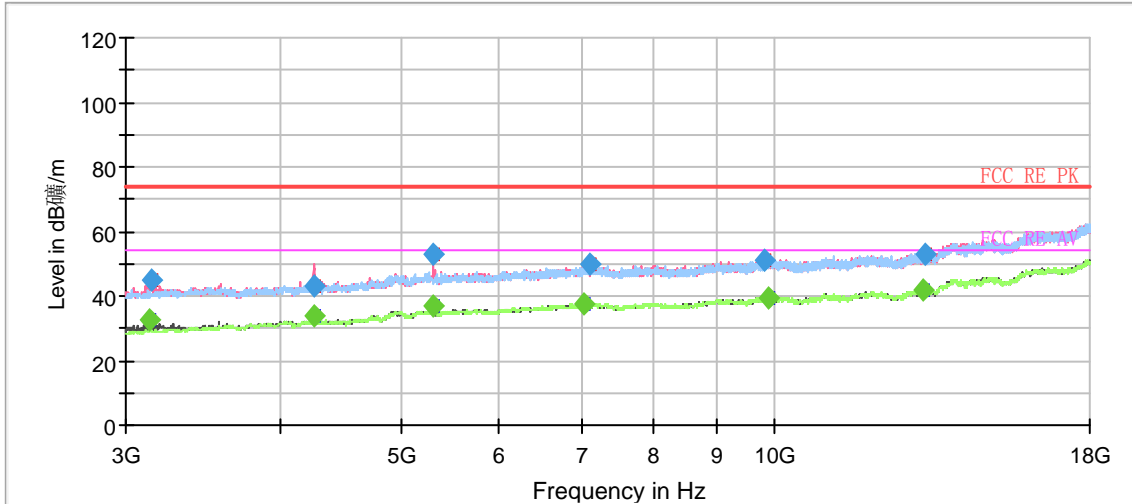


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3140.625000	---	32.86	54.00	21.14	100.0	V	133.0	-18.3
3148.125000	45.19	---	74.00	28.81	100.0	V	347.0	-18.2
4250.625000	---	34.03	54.00	19.97	100.0	V	232.0	-14.6
4254.375000	43.19	---	74.00	30.81	200.0	H	202.0	-14.6
5313.750000	---	36.62	54.00	17.38	200.0	V	245.0	-11.1
5313.750000	52.78	---	74.00	21.22	200.0	V	245.0	-11.1
7042.500000	---	37.64	54.00	16.36	200.0	H	255.0	-7.6
7100.625000	50.10	---	74.00	23.90	200.0	H	62.0	-7.6
9838.125000	50.98	---	74.00	23.02	100.0	H	17.0	-5.5
9890.625000	---	39.61	54.00	14.39	100.0	V	271.0	-5.4
13218.750000	---	41.70	54.00	12.30	200.0	V	129.0	-2.3
13239.375000	53.10	---	74.00	20.90	100.0	H	202.0	-2.2

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11g CH2

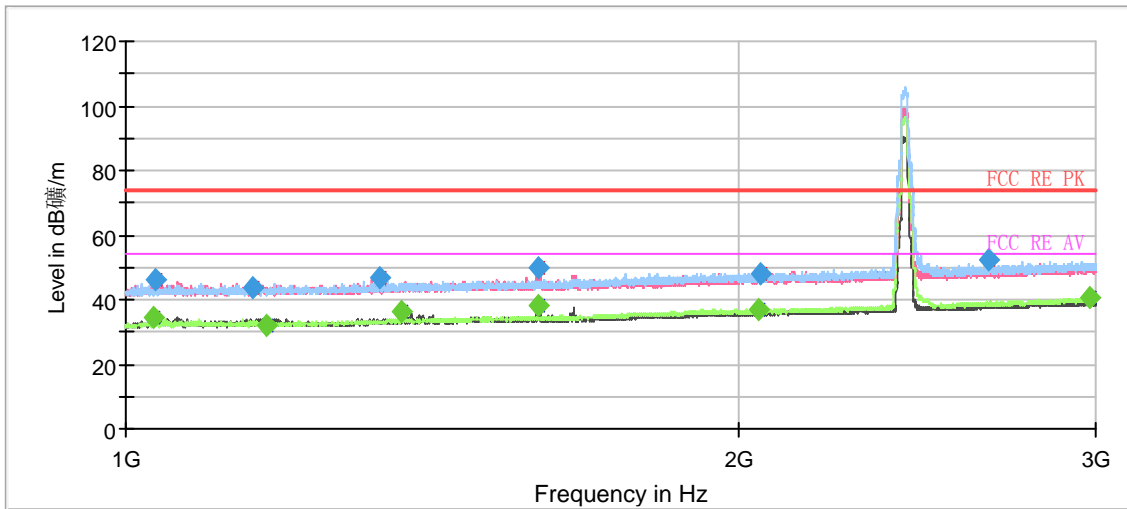


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1032.000000	---	34.66	54.00	19.34	200.0	V	106.0	-16.9
1035.250000	46.12	---	74.00	27.88	200.0	V	106.0	-16.9
1154.250000	43.95	---	74.00	30.05	100.0	H	0.0	-16.4
1173.500000	---	32.16	54.00	21.84	200.0	V	142.0	-16.3
1333.000000	46.80	---	74.00	27.20	100.0	V	132.0	-15.6
1367.250000	---	36.02	54.00	17.98	100.0	V	132.0	-15.5
1595.000000	49.62	---	74.00	24.38	200.0	V	106.0	-14.4
1595.000000	---	37.89	54.00	16.11	200.0	V	106.0	-14.4
2049.250000	---	36.85	54.00	17.15	100.0	H	39.0	-12.5
2053.750000	48.27	---	74.00	25.73	100.0	H	3.0	-12.4
2658.250000	52.17	---	74.00	21.83	200.0	V	106.0	-10.5
2981.000000	---	40.38	54.00	13.62	100.0	H	158.0	-9.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

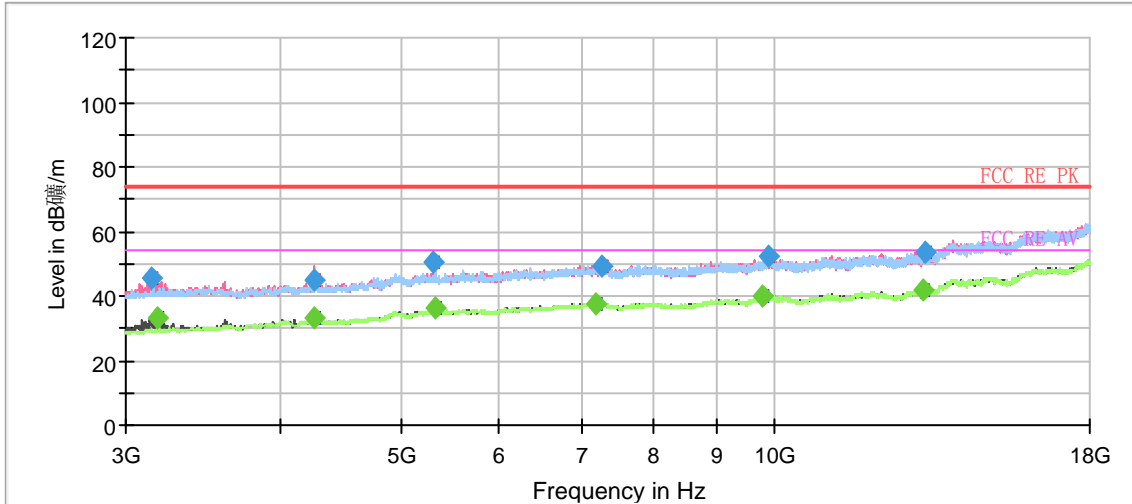


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3146.250000	45.35	---	74.00	28.65	100.0	V	132.0	-18.3
3178.125000	---	32.93	54.00	21.07	200.0	V	266.0	-18.2
4254.375000	45.05	---	74.00	28.95	200.0	V	110.0	-14.6
4258.125000	---	33.14	54.00	20.86	200.0	V	118.0	-14.6
5315.625000	50.42	---	74.00	23.58	200.0	V	16.0	-11.1
5328.750000	---	36.03	54.00	17.97	100.0	V	218.0	-11.2
7175.625000	---	37.76	54.00	16.24	100.0	H	28.0	-7.3
7265.625000	49.32	---	74.00	24.68	100.0	H	0.0	-7.1
9806.250000	---	39.82	54.00	14.18	100.0	H	67.0	-5.5
9890.625000	52.44	---	74.00	21.56	200.0	V	274.0	-5.4
13222.500000	---	41.63	54.00	12.37	100.0	H	52.0	-2.3
13248.750000	53.82	---	74.00	20.18	200.0	V	110.0	-2.2

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11g CH6

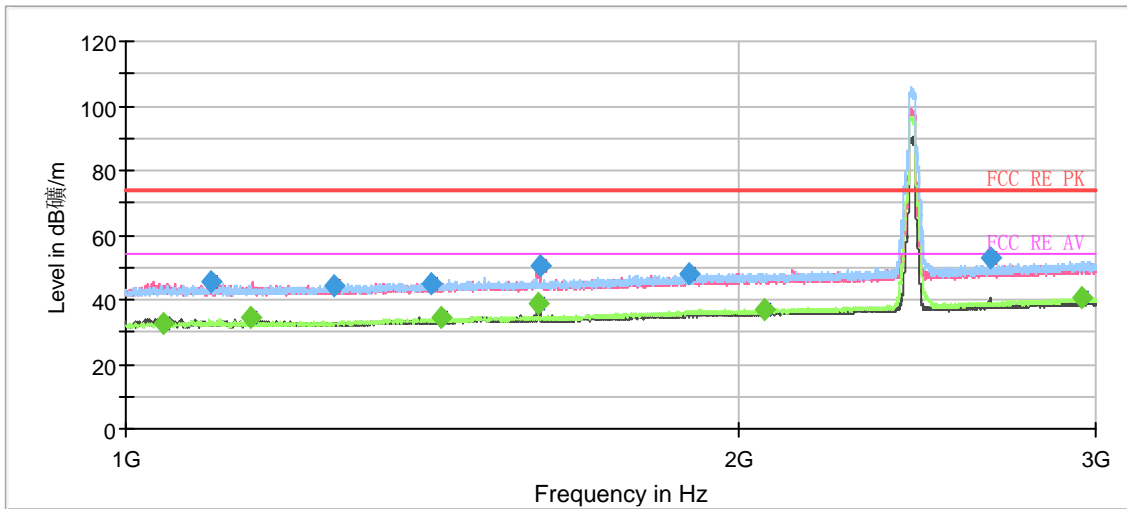


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1044.500000	---	32.61	54.00	21.39	200.0	V	120.0	-16.9
1102.250000	45.58	---	74.00	28.42	200.0	V	251.0	-16.6
1153.000000	---	34.45	54.00	19.55	200.0	V	144.0	-16.4
1266.500000	44.29	---	74.00	29.71	200.0	V	23.0	-15.9
1414.250000	45.20	---	74.00	28.80	100.0	H	58.0	-15.3
1428.500000	---	34.48	54.00	19.52	100.0	H	0.0	-15.2
1595.500000	---	38.50	54.00	15.50	200.0	V	102.0	-14.4
1598.750000	50.50	---	74.00	23.50	200.0	V	108.0	-14.4
1894.250000	48.21	---	74.00	25.79	100.0	H	40.0	-13.0
2063.250000	---	36.90	54.00	17.10	100.0	H	52.0	-12.4
2660.750000	53.22	---	74.00	20.78	100.0	V	186.0	-10.5
2954.500000	---	40.39	54.00	13.61	100.0	H	46.0	-9.1

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



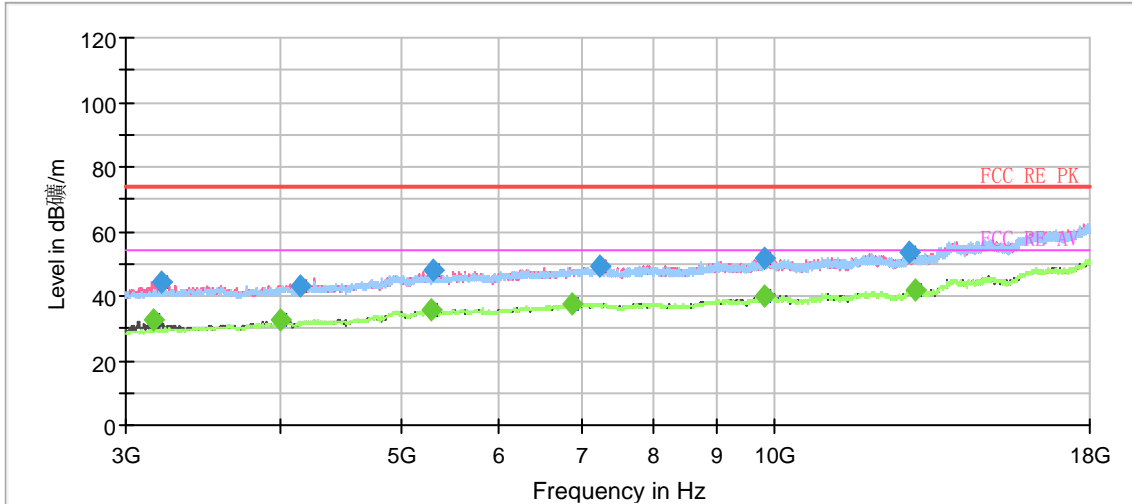


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3153.750000	---	32.42	54.00	21.58	200.0	V	267.0	-18.2
3202.500000	44.06	---	74.00	29.94	100.0	V	132.0	-18.1
3999.375000	---	32.64	54.00	21.36	200.0	V	283.0	-15.4
4151.250000	43.28	---	74.00	30.72	100.0	V	355.0	-15.1
5293.125000	---	35.43	54.00	18.57	100.0	V	270.0	-11.0
5310.000000	47.77	---	74.00	26.23	100.0	V	116.0	-11.1
6870.000000	---	37.63	54.00	16.37	200.0	H	357.0	-7.8
7239.375000	49.08	---	74.00	24.92	200.0	V	35.0	-7.2
9845.625000	51.51	---	74.00	22.49	200.0	H	334.0	-5.4
9847.500000	---	39.71	54.00	14.29	200.0	H	334.0	-5.4
12890.625000	53.68	---	74.00	20.32	100.0	V	163.0	-3.4
13031.250000	---	41.77	54.00	12.23	200.0	V	27.0	-3.1

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



## 802.11g CH9

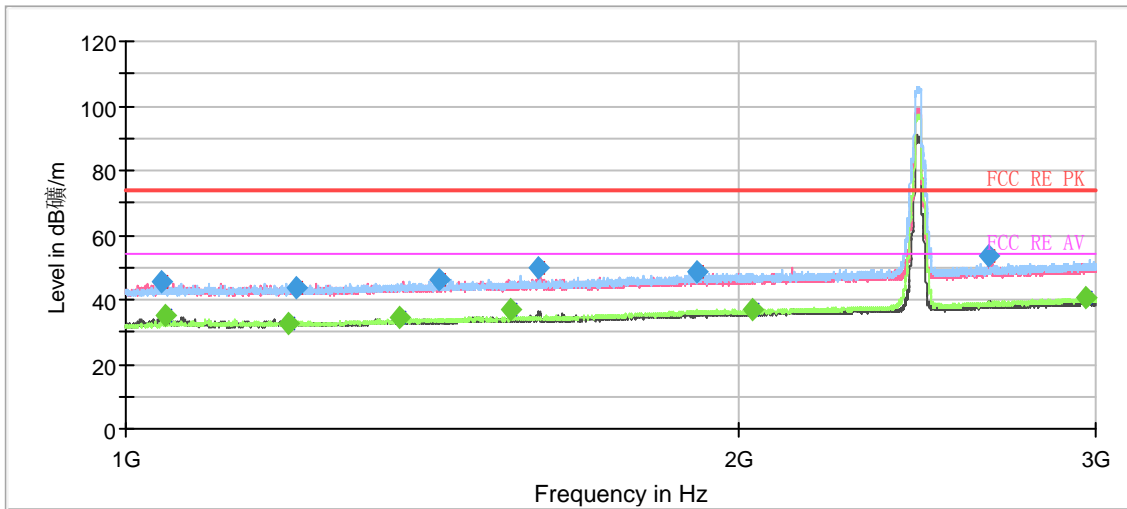


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1040.750000	45.61	---	74.00	28.39	200.0	V	95.0	-16.9
1046.500000	---	34.92	54.00	19.08	200.0	V	101.0	-16.9
1202.250000	---	32.62	54.00	21.38	200.0	V	23.0	-16.1
1212.750000	43.75	---	74.00	30.25	200.0	H	333.0	-16.1
1363.500000	---	34.29	54.00	19.71	200.0	V	237.0	-15.5
1425.750000	46.20	---	74.00	27.80	200.0	H	0.0	-15.2
1545.000000	---	36.82	54.00	17.18	200.0	V	95.0	-14.6
1594.250000	49.88	---	74.00	24.12	200.0	V	101.0	-14.4
1910.250000	48.31	---	74.00	25.69	200.0	V	1.0	-13.0
2034.000000	---	37.06	54.00	16.94	100.0	H	39.0	-12.5
2655.000000	53.38	---	74.00	20.62	100.0	V	152.0	-10.5
2966.000000	---	40.44	54.00	13.56	200.0	H	266.0	-9.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

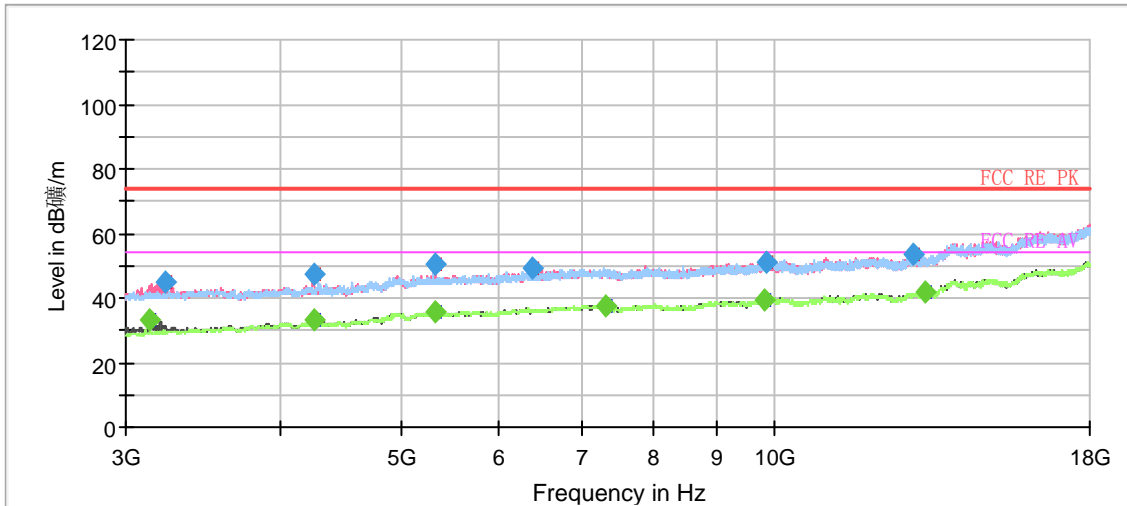


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3138.750000	---	33.21	54.00	20.79	100.0	V	132.0	-18.3
3232.500000	45.07	---	74.00	28.93	200.0	V	123.0	-18.0
4250.625000	---	32.93	54.00	21.07	100.0	V	224.0	-14.6
4260.000000	47.15	---	74.00	26.85	200.0	V	245.0	-14.6
5326.875000	---	35.72	54.00	18.28	200.0	V	245.0	-11.2
5332.500000	50.55	---	74.00	23.45	100.0	V	349.0	-11.2
6376.875000	49.27	---	74.00	24.73	100.0	V	132.0	-8.7
7316.250000	---	37.66	54.00	16.34	200.0	V	230.0	-7.1
9843.750000	---	39.63	54.00	14.37	200.0	V	261.0	-5.4
9881.250000	50.87	---	74.00	23.13	100.0	V	208.0	-5.4
12965.625000	53.24	---	74.00	20.76	100.0	H	112.0	-3.3
13237.500000	---	41.61	54.00	12.39	100.0	V	154.0	-2.2

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11g CH10

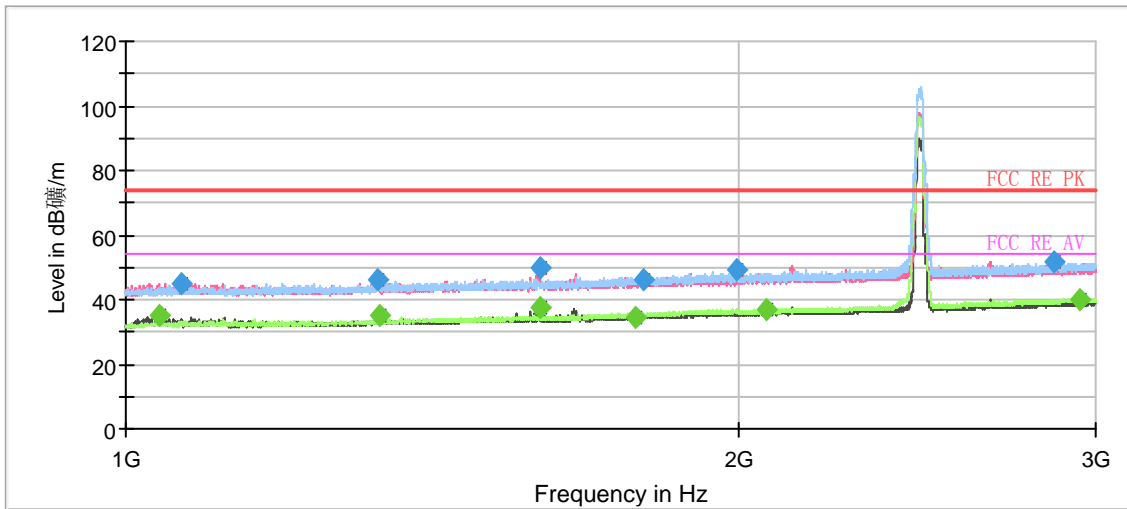


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1038.000000	---	35.24	54.00	18.76	200.0	V	107.0	-16.9
1065.500000	45.17	---	74.00	28.83	100.0	V	117.0	-16.9
1331.500000	46.02	---	74.00	27.98	100.0	V	287.0	-15.6
1332.750000	---	35.26	54.00	18.74	200.0	V	234.0	-15.6
1598.250000	49.61	---	74.00	24.39	200.0	V	107.0	-14.4
1598.750000	---	37.81	54.00	16.19	200.0	V	107.0	-14.4
1781.000000	---	34.75	54.00	19.25	200.0	V	88.0	-13.4
1798.250000	46.22	---	74.00	27.78	100.0	H	48.0	-13.4
1999.750000	49.00	---	74.00	25.00	200.0	V	120.0	-12.5
2067.000000	---	37.02	54.00	16.98	200.0	H	221.0	-12.4
2861.500000	51.80	---	74.00	22.20	200.0	H	0.0	-9.6
2946.250000	---	40.31	54.00	13.69	200.0	H	316.0	-9.2

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

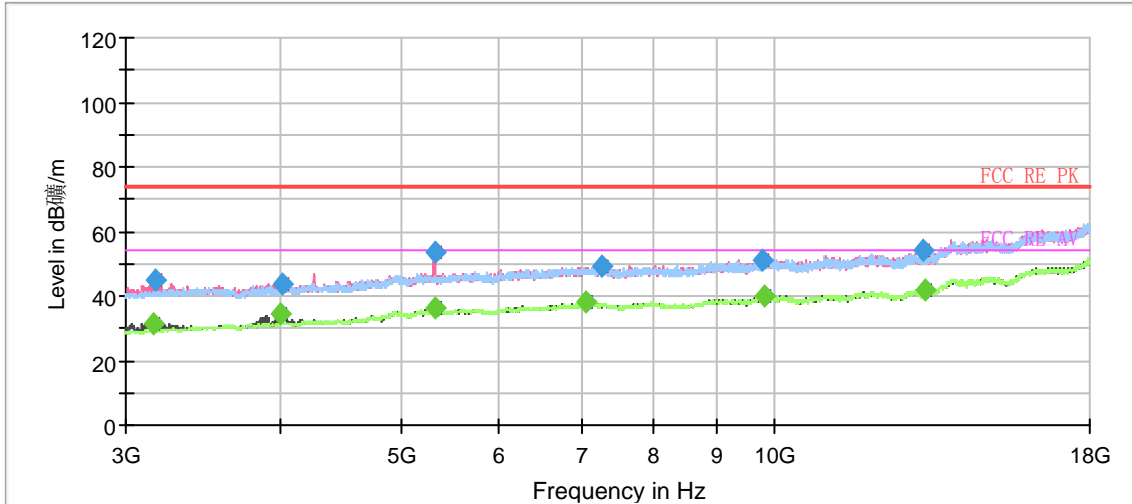


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3159.375000	---	31.41	54.00	22.59	100.0	V	131.0	-18.2
3172.500000	45.06	---	74.00	28.94	100.0	V	131.0	-18.2
3997.500000	---	34.29	54.00	19.71	200.0	V	123.0	-15.4
4012.500000	43.67	---	74.00	30.33	200.0	V	123.0	-15.3
5325.000000	53.58	---	74.00	20.42	100.0	V	30.0	-11.1
5328.750000	---	36.30	54.00	17.70	200.0	V	123.0	-11.2
7065.000000	---	37.87	54.00	16.13	100.0	V	277.0	-7.6
7265.625000	49.08	---	74.00	24.92	200.0	V	131.0	-7.1
9787.500000	51.06	---	74.00	22.94	200.0	V	35.0	-5.6
9840.000000	---	39.74	54.00	14.26	200.0	H	211.0	-5.5
13228.125000	54.08	---	74.00	19.92	100.0	H	137.0	-2.2
13246.875000	---	41.86	54.00	12.14	200.0	H	349.0	-2.2

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11g CH11

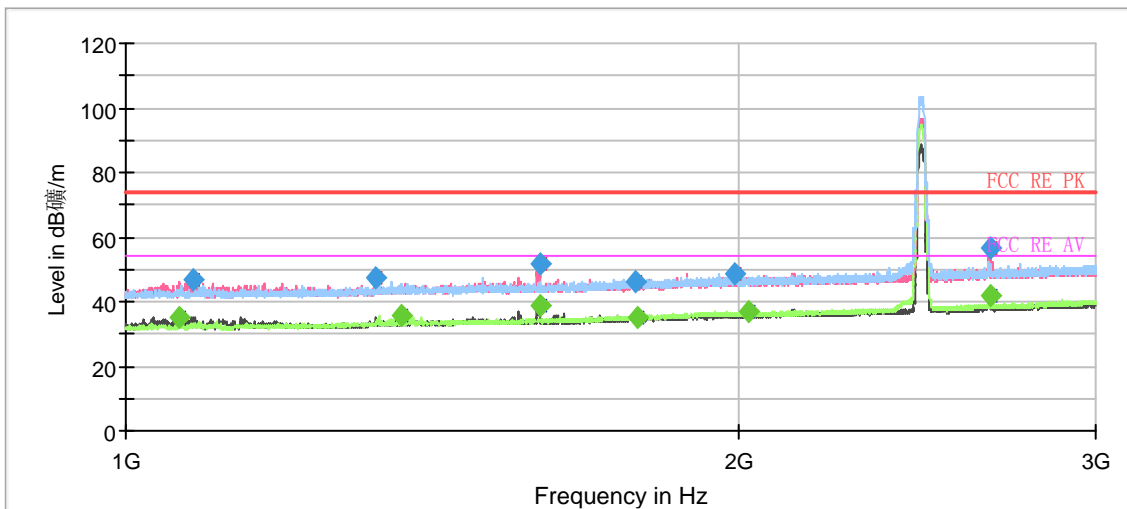


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1063.000000	---	35.38	54.00	18.62	100.0	V	225.0	-16.9
1079.750000	46.48	---	74.00	27.52	100.0	V	286.0	-16.7
1327.000000	47.44	---	74.00	26.56	100.0	V	267.0	-15.6
1365.750000	---	35.85	54.00	18.15	200.0	H	144.0	-15.5
1597.500000	51.50	---	74.00	22.50	200.0	V	98.0	-14.4
1598.250000	---	38.77	54.00	15.23	200.0	V	86.0	-14.4
1779.500000	46.20	---	74.00	27.80	100.0	H	21.0	-13.4
1785.000000	---	35.23	54.00	18.77	100.0	H	3.0	-13.4
1994.000000	48.67	---	74.00	25.33	200.0	H	156.0	-12.6
2022.500000	---	36.71	54.00	17.29	100.0	H	40.0	-12.5
2661.500000	56.33	---	74.00	17.67	100.0	V	71.0	-10.5
2661.750000	---	41.90	54.00	12.10	100.0	V	274.0	-10.5

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

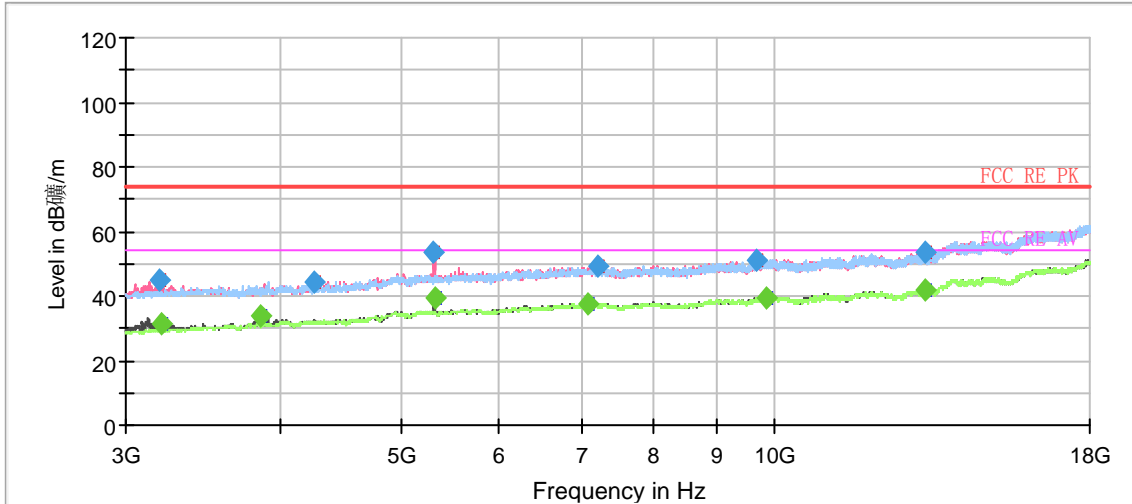


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3195.000000	44.79	---	74.00	29.21	200.0	V	267.0	-18.1
3200.625000	---	31.24	54.00	22.76	200.0	V	267.0	-18.1
3855.000000	---	33.55	54.00	20.45	200.0	V	117.0	-16.0
4263.750000	44.01	---	74.00	29.99	200.0	V	2.0	-14.6
5321.250000	53.83	---	74.00	20.17	200.0	V	117.0	-11.1
5330.625000	---	39.08	54.00	14.92	200.0	V	117.0	-11.2
7095.000000	---	37.74	54.00	16.26	200.0	H	333.0	-7.6
7205.625000	49.27	---	74.00	24.73	100.0	V	336.0	-7.3
9693.750000	51.12	---	74.00	22.88	200.0	V	305.0	-5.4
9851.250000	---	39.48	54.00	14.52	200.0	V	212.0	-5.4
13246.875000	---	41.57	54.00	12.43	100.0	H	36.0	-2.2
13250.625000	53.61	---	74.00	20.39	200.0	V	243.0	-2.2

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11n (HT20) CH1

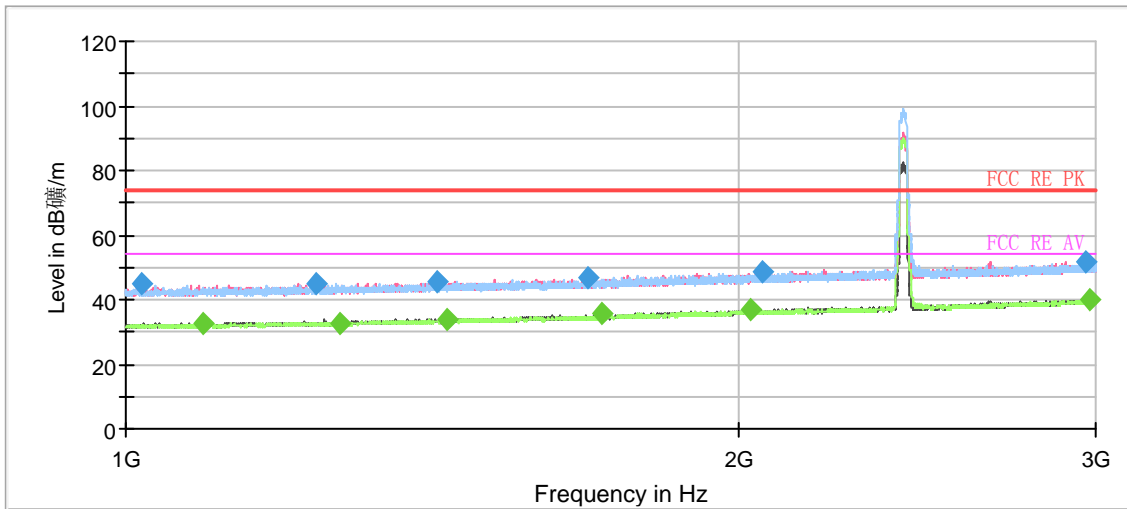


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1017.750000	44.94	---	74.00	29.06	100.0	V	226.0	-17.0
1091.250000	---	32.92	54.00	21.08	100.0	V	0.0	-16.7
1241.750000	44.73	---	74.00	29.27	100.0	V	41.0	-16.0
1275.000000	---	32.77	54.00	21.23	200.0	V	50.0	-15.9
1422.000000	45.32	---	74.00	28.68	100.0	H	7.0	-15.2
1439.250000	---	34.07	54.00	19.93	200.0	V	239.0	-15.1
1686.250000	46.76	---	74.00	27.24	200.0	H	229.0	-14.0
1713.250000	---	35.39	54.00	18.61	100.0	H	0.0	-13.9
2029.750000	---	36.70	54.00	17.30	100.0	V	148.0	-12.5
2055.500000	48.37	---	74.00	25.63	100.0	V	0.0	-12.4
2967.250000	51.59	---	74.00	22.41	100.0	V	263.0	-9.0
2979.750000	---	39.84	54.00	14.16	100.0	V	208.0	-9.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



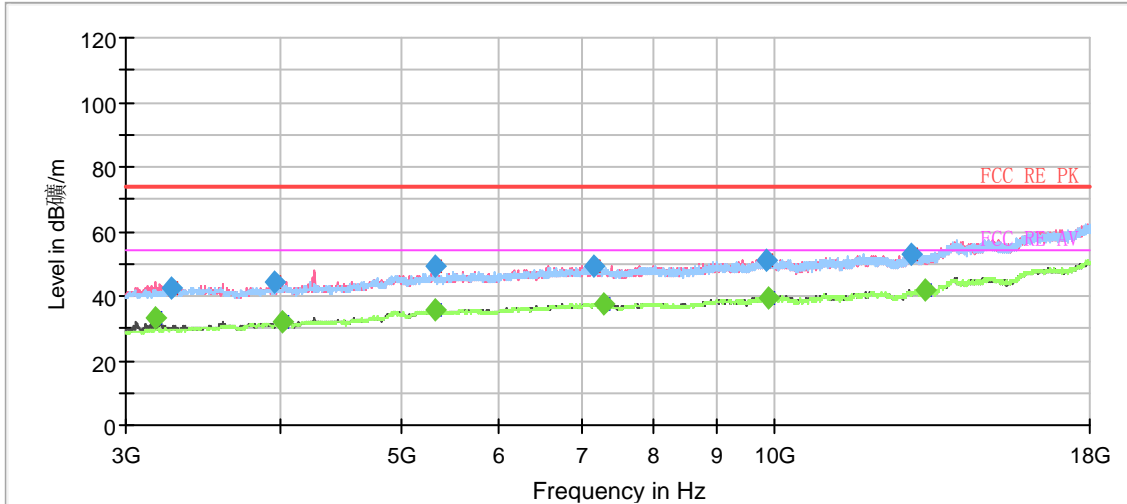


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3172.500000	---	33.19	54.00	20.81	100.0	V	271.0	-18.2
3270.000000	42.65	---	74.00	31.35	200.0	V	104.0	-17.9
3954.375000	44.56	---	74.00	29.44	200.0	V	11.0	-15.8
4012.500000	---	32.00	54.00	22.00	200.0	V	122.0	-15.3
5328.750000	---	35.76	54.00	18.24	200.0	V	112.0	-11.2
5328.750000	49.43	---	74.00	24.57	200.0	V	112.0	-11.2
7164.375000	49.50	---	74.00	24.50	200.0	H	310.0	-7.4
7295.625000	---	37.68	54.00	16.32	100.0	V	247.0	-7.1
9873.750000	51.37	---	74.00	22.63	200.0	V	222.0	-5.4
9896.250000	---	39.53	54.00	14.47	100.0	V	278.0	-5.4
12907.500000	53.18	---	74.00	20.82	200.0	V	160.0	-3.4
13241.250000	---	41.82	54.00	12.18	100.0	V	317.0	-2.2

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11n (HT20) CH2

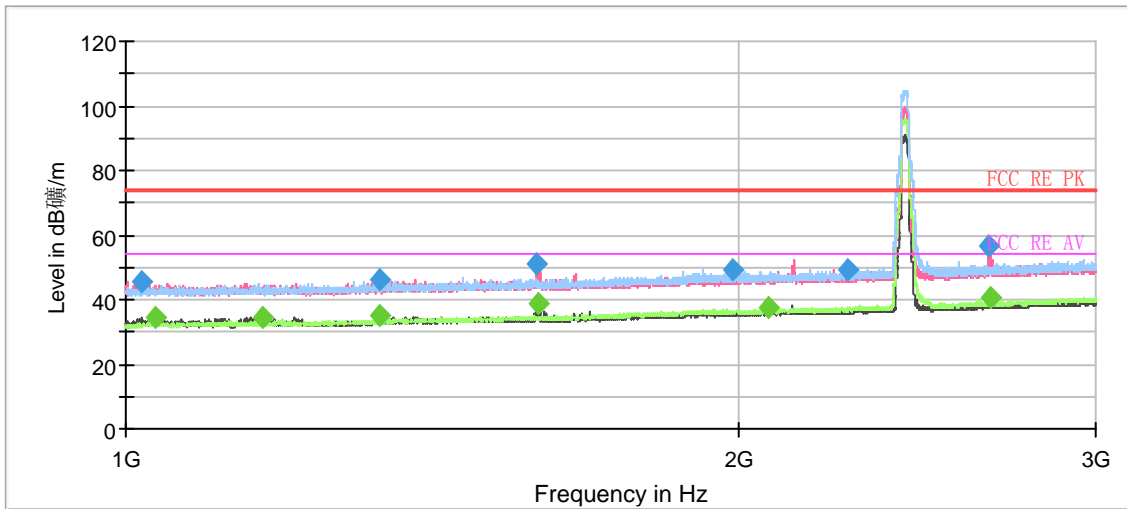


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1017.500000	45.76	---	74.00	28.24	100.0	V	88.0	-17.0
1033.250000	---	34.17	54.00	19.83	200.0	V	287.0	-16.9
1168.000000	---	34.67	54.00	19.33	200.0	V	132.0	-16.4
1332.000000	46.33	---	74.00	27.67	100.0	V	246.0	-15.6
1332.500000	---	35.06	54.00	18.94	100.0	V	43.0	-15.6
1593.000000	50.94	---	74.00	23.06	200.0	V	83.0	-14.4
1596.750000	---	38.55	54.00	15.45	200.0	V	83.0	-14.4
1988.750000	49.06	---	74.00	24.94	200.0	H	287.0	-12.6
2069.500000	---	37.25	54.00	16.75	200.0	H	232.0	-12.4
2264.250000	48.94	---	74.00	25.07	200.0	H	321.0	-11.9
2657.000000	56.56	---	74.00	17.44	100.0	V	270.0	-10.5
2665.250000	---	40.61	54.00	13.39	100.0	V	0.0	-10.5

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

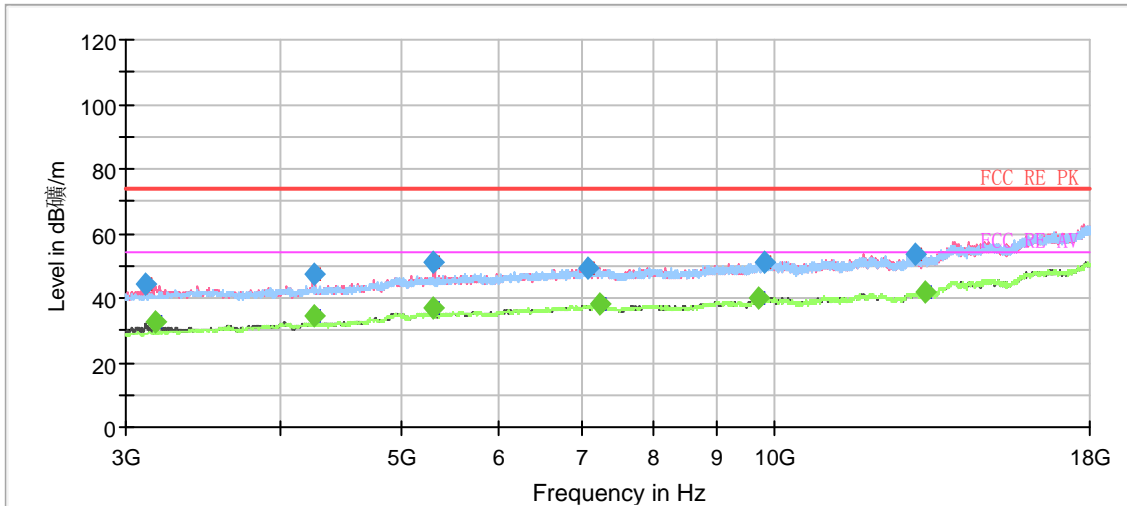


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3118.125000	44.11	---	74.00	29.89	100.0	V	272.0	-18.3
3168.750000	---	32.43	54.00	21.57	100.0	V	133.0	-18.2
4263.750000	47.38	---	74.00	26.62	200.0	V	107.0	-14.6
4263.750000	---	34.27	54.00	19.73	200.0	V	107.0	-14.6
5311.875000	51.31	---	74.00	22.69	100.0	V	203.0	-11.1
5315.625000	---	37.01	54.00	16.99	100.0	V	203.0	-11.1
7095.000000	49.34	---	74.00	24.66	100.0	V	210.0	-7.6
7241.250000	---	37.86	54.00	16.14	200.0	V	153.0	-7.2
9716.250000	---	39.75	54.00	14.25	200.0	V	237.0	-5.4
9836.250000	51.32	---	74.00	22.68	100.0	H	111.0	-5.5
12999.375000	53.35	---	74.00	20.65	200.0	V	53.0	-3.2
13241.250000	---	41.57	54.00	12.43	100.0	H	20.0	-2.2

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



## 802.11n (HT20) CH6

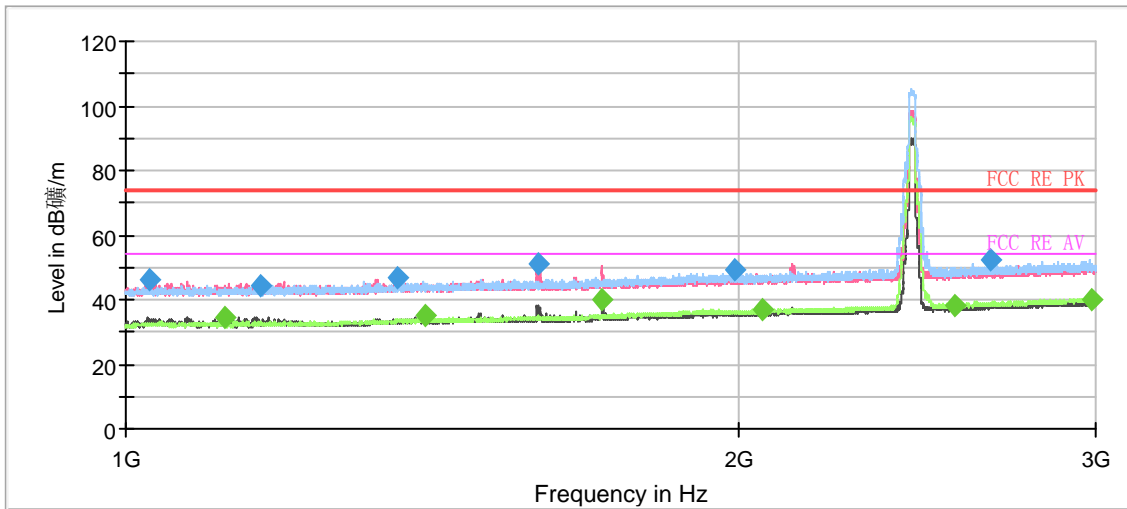


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1027.250000	46.05	---	74.00	27.95	200.0	V	90.0	-16.9
1117.750000	---	34.47	54.00	19.53	200.0	V	102.0	-16.6
1164.000000	44.42	---	74.00	29.58	100.0	V	130.0	-16.4
1360.250000	46.51	---	74.00	27.49	100.0	H	125.0	-15.5
1402.500000	---	34.98	54.00	19.02	200.0	V	126.0	-15.3
1596.000000	50.81	---	74.00	23.19	200.0	V	90.0	-14.4
1715.000000	---	40.22	54.00	13.78	200.0	V	90.0	-13.9
1991.250000	49.12	---	74.00	24.88	200.0	V	126.0	-12.6
2056.750000	---	36.84	54.00	17.16	200.0	H	351.0	-12.4
2559.750000	---	38.39	54.00	15.61	200.0	H	338.0	-11.0
2660.500000	52.44	---	74.00	21.56	200.0	V	132.0	-10.5
2986.000000	---	40.27	54.00	13.73	200.0	H	253.0	-9.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

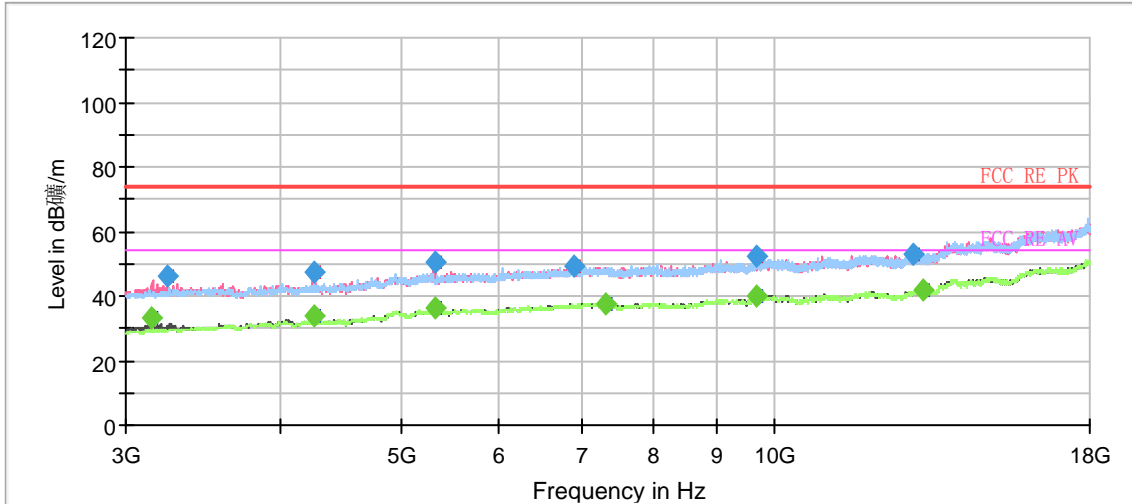


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3151.875000	---	32.98	54.00	21.02	100.0	V	132.0	-18.2
3241.875000	46.19	---	74.00	27.81	100.0	V	132.0	-18.0
4254.375000	---	33.55	54.00	20.45	100.0	V	148.0	-14.6
4261.875000	47.56	---	74.00	26.44	200.0	V	115.0	-14.6
5325.000000	---	36.03	54.00	17.97	200.0	V	30.0	-11.1
5325.000000	50.16	---	74.00	23.84	200.0	V	30.0	-11.1
6901.875000	49.09	---	74.00	24.91	100.0	V	202.0	-7.8
7321.875000	---	37.79	54.00	16.21	100.0	H	44.0	-7.1
9690.000000	---	40.00	54.00	14.00	200.0	H	318.0	-5.4
9693.750000	52.06	---	74.00	21.94	200.0	V	23.0	-5.4
12960.000000	53.03	---	74.00	20.97	200.0	V	282.0	-3.3
13205.625000	---	41.69	54.00	12.31	100.0	V	108.0	-2.3

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



## 802.11n (HT20) CH9

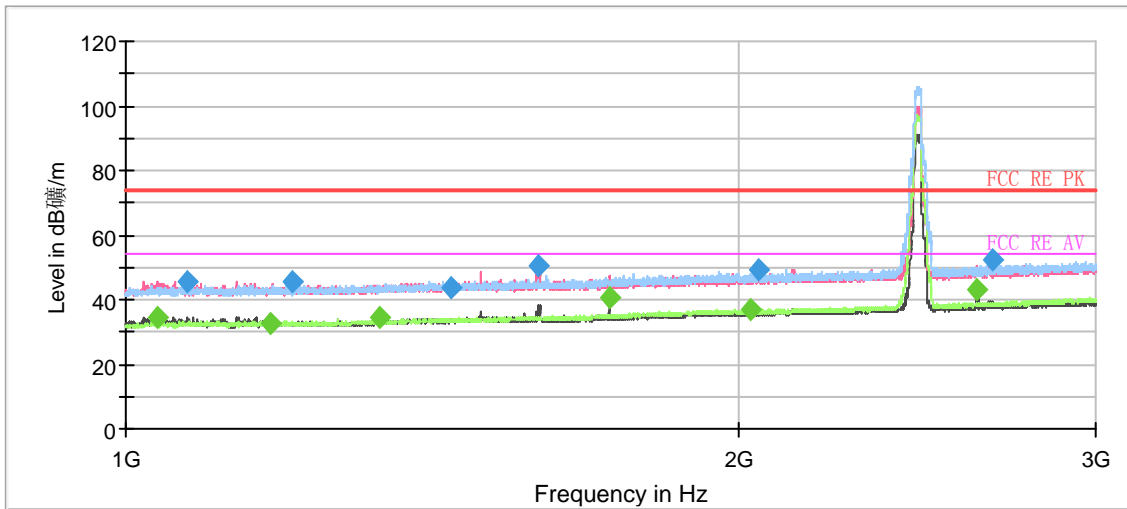


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1035.500000	---	34.68	54.00	19.32	200.0	V	90.0	-16.9
1073.250000	45.78	---	74.00	28.22	100.0	V	281.0	-16.8
1178.500000	---	32.65	54.00	21.35	100.0	V	232.0	-16.3
1208.500000	45.77	---	74.00	28.23	200.0	V	114.0	-16.1
1332.000000	---	34.40	54.00	19.60	200.0	V	72.0	-15.6
1444.250000	43.97	---	74.00	30.03	100.0	V	347.0	-15.1
1596.250000	50.45	---	74.00	23.55	200.0	V	90.0	-14.4
1729.000000	---	40.44	54.00	13.56	200.0	V	138.0	-13.8
2027.750000	---	36.82	54.00	17.18	200.0	H	359.0	-12.5
2049.000000	49.37	---	74.00	24.63	100.0	H	42.0	-12.5
2622.500000	---	43.17	54.00	10.83	100.0	V	171.0	-10.7
2666.750000	52.43	---	74.00	21.57	200.0	V	1.0	-10.5

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

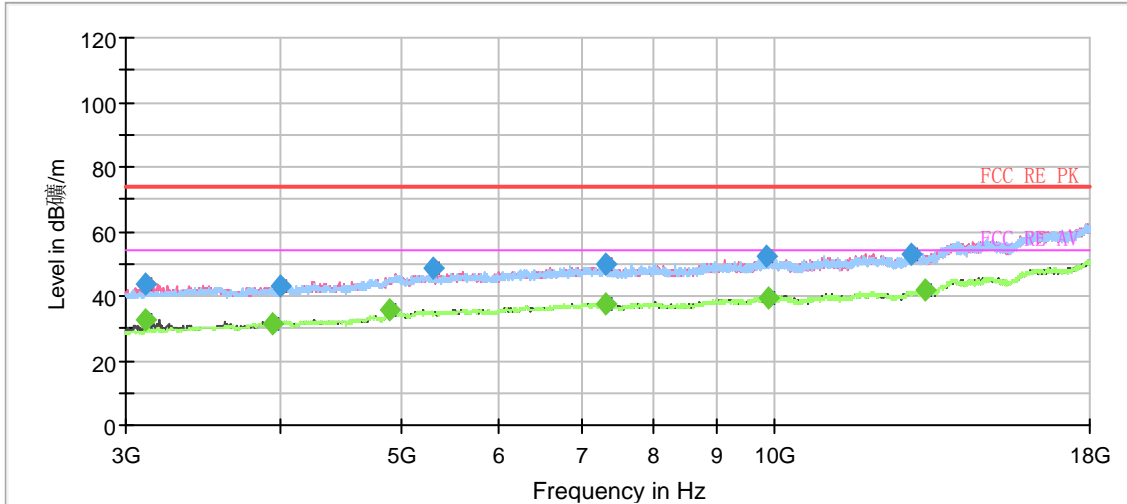


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3110.625000	---	32.56	54.00	21.44	100.0	V	278.0	-18.4
3112.500000	43.96	---	74.00	30.04	100.0	V	131.0	-18.4
3946.875000	---	31.18	54.00	22.82	200.0	V	102.0	-15.9
3997.500000	43.31	---	74.00	30.69	100.0	H	83.0	-15.4
4905.000000	---	35.62	54.00	18.38	100.0	H	120.0	-12.1
5321.250000	48.57	---	74.00	25.43	200.0	V	182.0	-11.1
7321.875000	49.83	---	74.00	24.17	100.0	H	43.0	-7.1
7323.750000	---	37.67	54.00	16.33	200.0	V	236.0	-7.1
9853.125000	52.19	---	74.00	21.81	100.0	V	208.0	-5.4
9892.500000	---	39.68	54.00	14.32	100.0	H	90.0	-5.4
12911.250000	53.20	---	74.00	20.80	100.0	V	333.0	-3.4
13250.625000	---	41.60	54.00	12.40	100.0	V	296.0	-2.2

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



## 802.11n (HT20) CH10

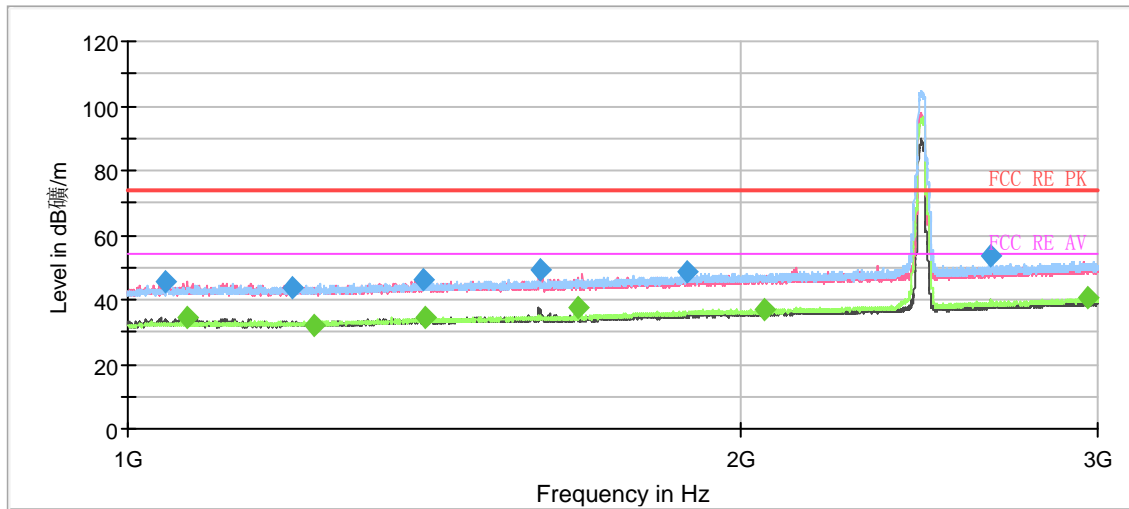


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1044.750000	45.70	---	74.00	28.30	200.0	V	75.0	-16.9
1069.250000	---	34.58	54.00	19.42	100.0	V	275.0	-16.8
1205.500000	43.42	---	74.00	30.58	100.0	V	336.0	-16.1
1235.500000	---	32.14	54.00	21.86	100.0	V	148.0	-16.0
1398.750000	46.41	---	74.00	27.59	200.0	H	323.0	-15.4
1399.250000	---	34.35	54.00	19.65	100.0	V	251.0	-15.4
1594.250000	49.35	---	74.00	24.65	200.0	V	69.0	-14.4
1664.250000	---	37.35	54.00	16.65	200.0	V	112.0	-14.1
1886.250000	48.66	---	74.00	25.34	200.0	H	275.0	-13.0
2054.750000	---	37.03	54.00	16.97	200.0	H	328.0	-12.4
2658.750000	53.56	---	74.00	20.44	200.0	V	131.0	-10.5
2968.750000	---	40.37	54.00	13.63	200.0	H	328.0	-9.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



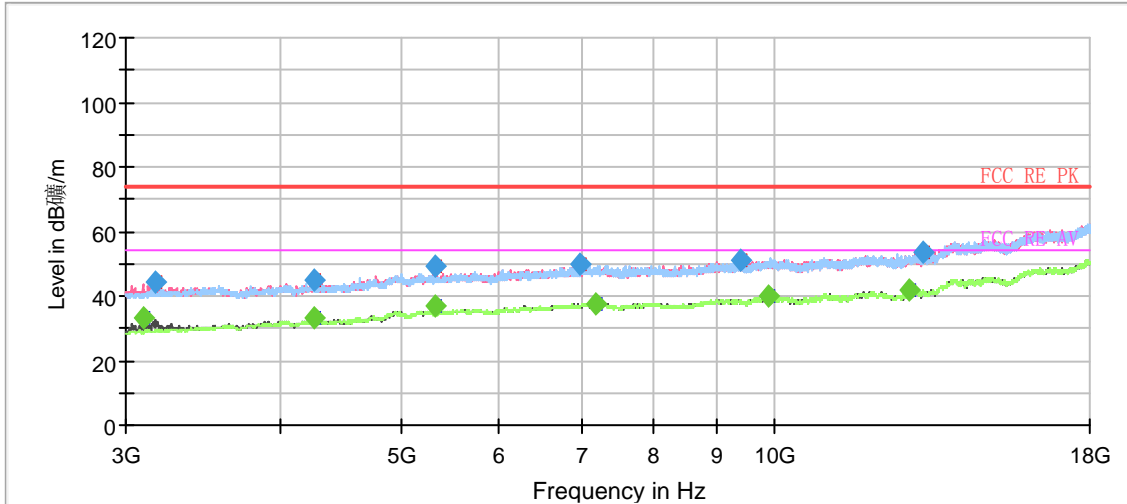


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3097.500000	---	33.43	54.00	20.57	100.0	V	131.0	-18.4
3176.250000	44.53	---	74.00	29.47	100.0	V	131.0	-18.2
4254.375000	---	33.44	54.00	20.56	200.0	V	103.0	-14.6
4263.750000	45.17	---	74.00	28.83	100.0	V	277.0	-14.6
5326.875000	---	36.70	54.00	17.30	100.0	V	92.0	-11.2
5330.625000	49.39	---	74.00	24.61	200.0	V	18.0	-11.2
6988.125000	49.55	---	74.00	24.45	200.0	V	25.0	-7.8
7200.000000	---	37.74	54.00	16.26	200.0	H	186.0	-7.3
9391.875000	50.80	---	74.00	23.20	100.0	H	12.0	-5.8
9898.125000	---	39.72	54.00	14.28	100.0	V	216.0	-5.4
12877.500000	---	41.56	54.00	12.44	100.0	V	147.0	-3.5
13213.125000	53.71	---	74.00	20.29	100.0	H	158.0	-2.3

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



## 802.11n (HT20) CH11

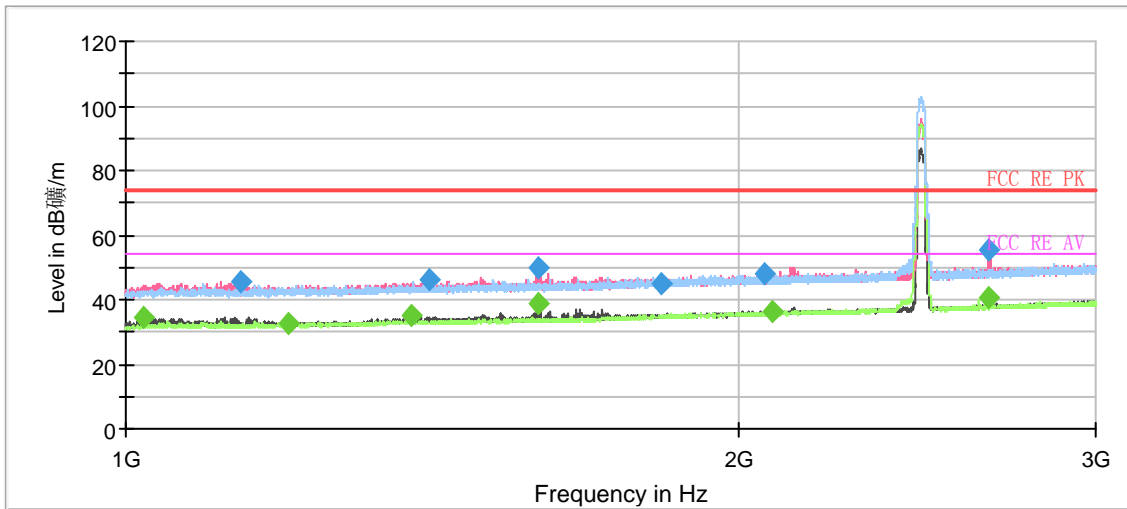


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1020.750000	---	34.54	54.00	19.46	200.0	V	95.0	-17.0
1138.500000	45.52	---	74.00	28.48	100.0	V	112.0	-16.5
1202.250000	---	32.44	54.00	21.56	100.0	V	342.0	-16.1
1383.000000	---	34.89	54.00	19.11	200.0	V	33.0	-15.4
1410.000000	45.89	---	74.00	28.11	200.0	V	131.0	-15.3
1594.500000	49.76	---	74.00	24.24	200.0	V	82.0	-14.4
1595.500000	---	38.60	54.00	15.40	200.0	V	82.0	-14.4
1832.250000	45.17	---	74.00	28.83	200.0	V	168.0	-13.3
2061.250000	47.70	---	74.00	26.30	200.0	H	0.0	-12.4
2078.500000	---	36.40	54.00	17.60	100.0	H	149.0	-12.3
2660.000000	---	40.35	54.00	13.65	100.0	V	270.0	-10.5
2660.000000	55.24	---	74.00	18.76	100.0	V	270.0	-10.5

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

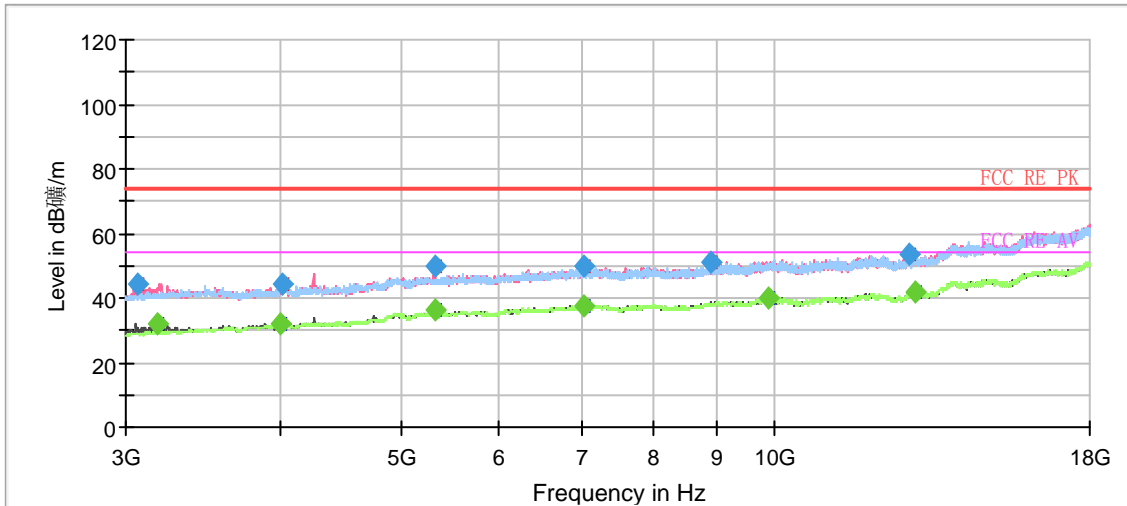


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3061.875000	44.34	---	74.00	29.66	100.0	V	130.0	-18.6
3187.500000	---	31.99	54.00	22.01	100.0	V	161.0	-18.2
4001.250000	---	32.27	54.00	21.73	200.0	V	284.0	-15.4
4008.750000	44.05	---	74.00	29.95	200.0	H	140.0	-15.4
5323.125000	---	36.15	54.00	17.85	200.0	V	346.0	-11.1
5323.125000	49.79	---	74.00	24.21	200.0	V	346.0	-11.1
7033.125000	---	37.81	54.00	16.19	100.0	V	359.0	-7.7
7036.875000	49.64	---	74.00	24.36	200.0	H	0.0	-7.7
8893.125000	51.31	---	74.00	22.69	100.0	H	19.0	-6.9
9890.625000	---	39.76	54.00	14.24	100.0	V	1.0	-5.4
12870.000000	53.44	---	74.00	20.56	100.0	V	76.0	-3.5
13033.125000	---	41.56	54.00	12.44	100.0	V	331.0	-3.1

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



## 802.11n (HT40) CH3

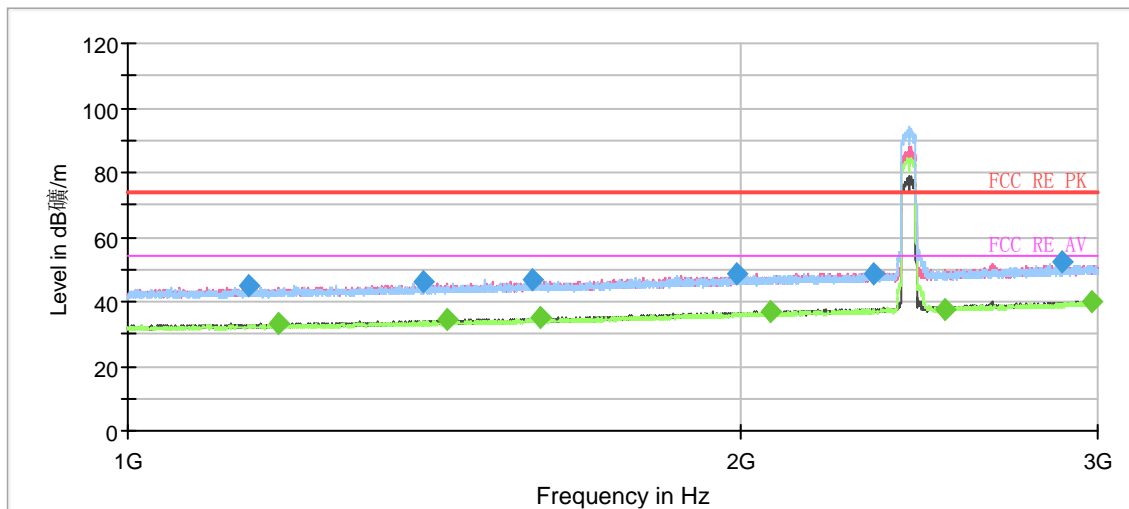


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1148.000000	44.62	---	74.00	29.38	200.0	V	337.0	-16.4
1187.250000	---	33.16	54.00	20.84	200.0	V	288.0	-16.2
1396.750000	45.86	---	74.00	28.14	200.0	V	53.0	-15.4
1434.250000	---	34.24	54.00	19.76	100.0	H	1.0	-15.2
1580.750000	46.84	---	74.00	27.16	100.0	H	6.0	-14.4
1596.250000	---	35.36	54.00	18.64	200.0	V	65.0	-14.4
1992.250000	48.88	---	74.00	25.12	200.0	H	255.0	-12.6
2070.500000	---	36.84	54.00	17.16	200.0	V	282.0	-12.4
2329.750000	48.69	---	74.00	25.31	200.0	V	350.0	-11.7
2523.250000	---	37.51	54.00	16.49	100.0	V	218.0	-11.1
2882.250000	52.30	---	74.00	21.70	100.0	V	327.0	-9.5
2978.250000	---	40.17	54.00	13.83	200.0	V	318.0	-9.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

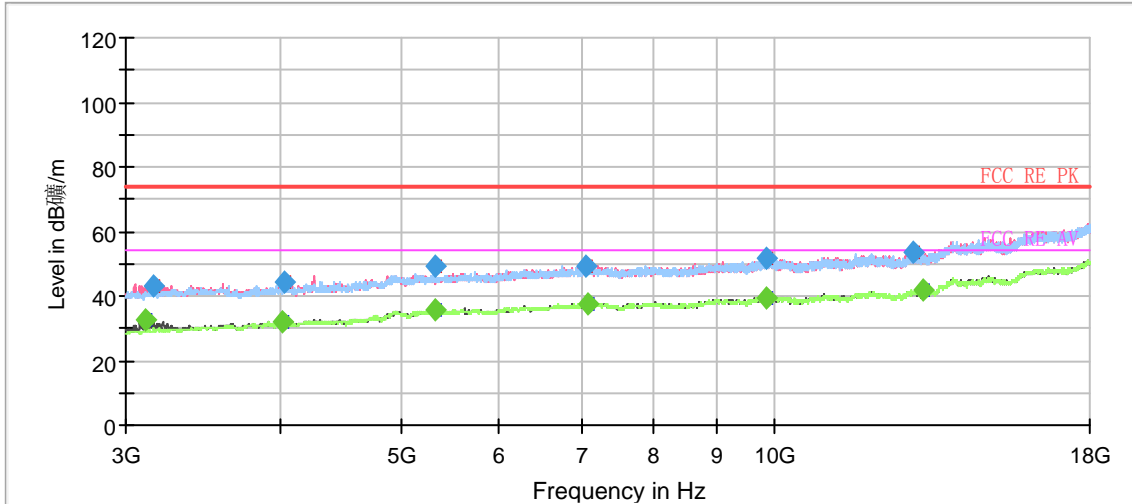


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3110.625000	---	32.72	54.00	21.28	100.0	V	274.0	-18.4
3155.625000	42.89	---	74.00	31.11	200.0	V	273.0	-18.2
4012.500000	---	32.30	54.00	21.70	100.0	V	250.0	-15.3
4035.000000	44.48	---	74.00	29.52	100.0	V	250.0	-15.3
5330.625000	---	36.00	54.00	18.00	100.0	V	312.0	-11.2
5330.625000	49.39	---	74.00	24.61	100.0	V	312.0	-11.2
7050.000000	49.05	---	74.00	24.95	100.0	H	50.0	-7.6
7095.000000	---	37.80	54.00	16.20	200.0	V	273.0	-7.6
9853.125000	---	39.68	54.00	14.32	100.0	H	291.0	-5.4
9877.500000	51.42	---	74.00	22.58	200.0	H	251.0	-5.4
12975.000000	53.29	---	74.00	20.71	200.0	H	358.0	-3.2
13224.375000	---	41.70	54.00	12.30	200.0	H	258.0	-2.3

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



## 802.11n (HT40) CH4

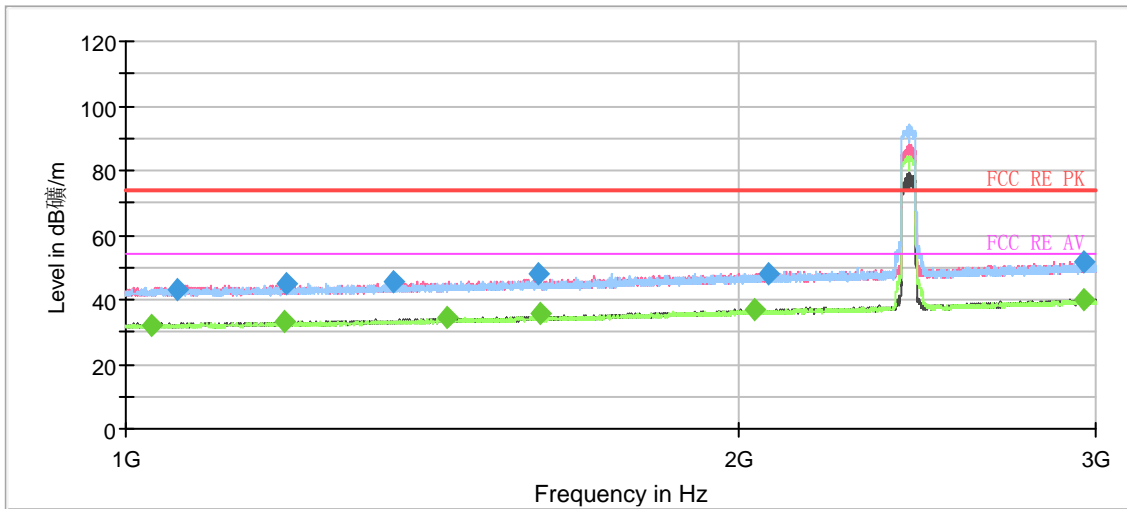


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1028.750000	---	31.93	54.00	22.07	500.0	200.0	V	152.0
1061.000000	43.11	---	74.00	30.89	500.0	100.0	H	0.0
1197.750000	---	32.96	54.00	21.04	500.0	100.0	V	0.0
1200.250000	45.11	---	74.00	28.89	500.0	200.0	V	128.0
1354.750000	45.67	---	74.00	28.33	500.0	200.0	V	65.0
1437.750000	---	34.16	54.00	19.84	500.0	100.0	V	0.0
1595.500000	48.07	---	74.00	25.93	500.0	200.0	V	47.0
1597.500000	---	35.70	54.00	18.30	500.0	200.0	V	65.0
2039.750000	---	36.83	54.00	17.17	500.0	100.0	V	0.0
2072.000000	48.15	---	74.00	25.85	500.0	100.0	V	97.0
2960.000000	---	39.96	54.00	14.04	500.0	100.0	V	245.0
2963.000000	51.60	---	74.00	22.40	500.0	200.0	H	99.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

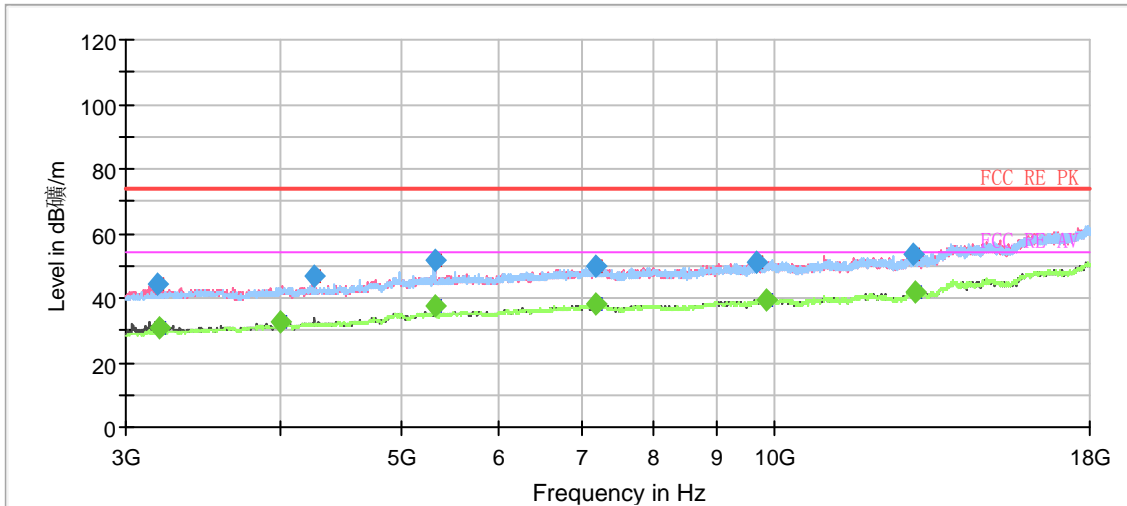


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3178.125000	44.41	---	74.00	29.59	100.0	V	131.0	-18.2
3193.125000	---	31.05	54.00	22.95	200.0	V	113.0	-18.1
3993.750000	---	32.68	54.00	21.32	100.0	V	0.0	-15.4
4260.000000	46.90	---	74.00	27.10	100.0	V	232.0	-14.6
5328.750000	---	37.48	54.00	16.52	100.0	H	119.0	-11.2
5328.750000	51.91	---	74.00	22.09	100.0	H	119.0	-11.2
7186.875000	49.68	---	74.00	24.32	200.0	V	113.0	-7.3
7192.500000	---	37.89	54.00	16.11	200.0	V	113.0	-7.3
9682.500000	50.96	---	74.00	23.04	100.0	H	88.0	-5.4
9870.000000	---	39.63	54.00	14.38	100.0	V	139.0	-5.4
12958.125000	53.54	---	74.00	20.46	200.0	H	254.0	-3.3
13023.750000	---	41.69	54.00	12.31	200.0	H	326.0	-3.1

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



## 802.11n (HT40) CH5

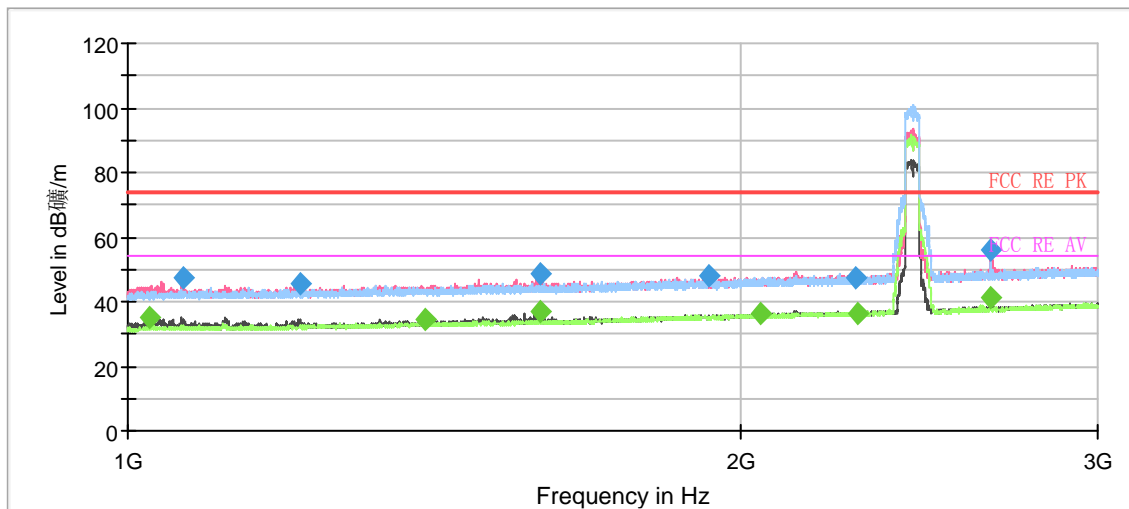


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1026.000000	---	35.26	54.00	18.74	100.0	V	96.0	-16.9
1063.750000	47.08	---	74.00	26.92	100.0	V	235.0	-16.9
1216.500000	45.47	---	74.00	28.53	100.0	V	121.0	-16.1
1400.000000	---	34.53	54.00	19.47	100.0	V	241.0	-15.4
1594.750000	---	37.05	54.00	16.95	200.0	V	83.0	-14.4
1595.000000	48.91	---	74.00	25.09	200.0	V	71.0	-14.4
1930.000000	47.71	---	74.00	26.29	100.0	H	221.0	-12.9
2049.500000	---	36.40	54.00	17.60	200.0	H	278.0	-12.5
2282.500000	47.58	---	74.00	26.42	100.0	V	277.0	-11.8
2286.750000	---	36.20	54.00	17.80	100.0	V	248.0	-11.7
2659.500000	---	41.25	54.00	12.75	100.0	V	277.0	-10.5
2660.000000	55.74	---	74.00	18.26	100.0	V	277.0	-10.5

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



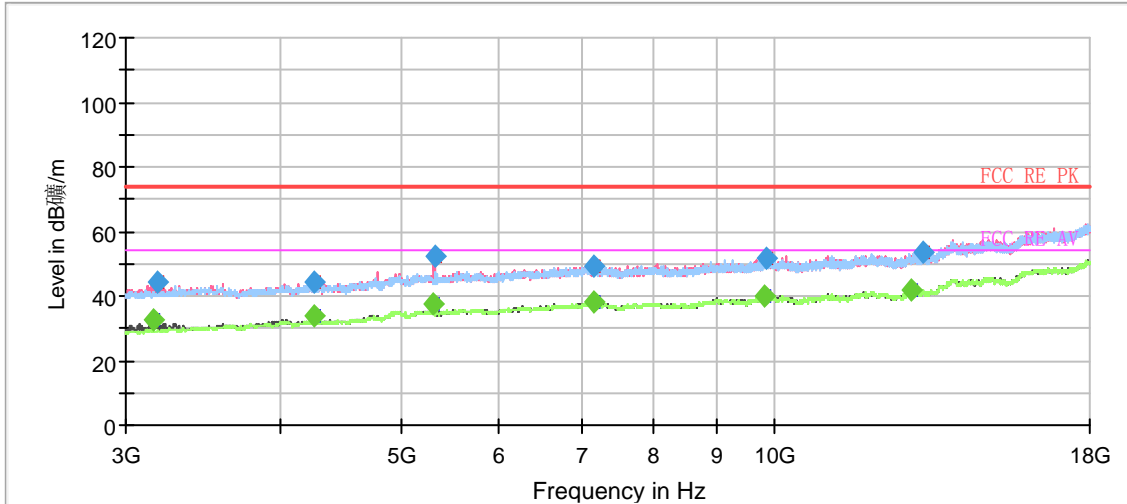


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3161.250000	---	32.72	54.00	21.28	100.0	V	128.0	-18.2
3183.750000	44.27	---	74.00	29.73	100.0	V	158.0	-18.2
4250.625000	44.10	---	74.00	29.90	100.0	V	236.0	-14.6
4261.875000	---	33.72	54.00	20.28	200.0	V	112.0	-14.6
5319.375000	---	37.55	54.00	16.45	100.0	V	214.0	-11.1
5330.625000	52.13	---	74.00	21.87	200.0	V	243.0	-11.2
7170.000000	---	37.88	54.00	16.12	200.0	V	158.0	-7.4
7173.750000	49.21	---	74.00	24.79	200.0	V	281.0	-7.3
9838.125000	---	39.74	54.00	14.26	100.0	H	152.0	-5.5
9877.500000	51.45	---	74.00	22.55	100.0	V	135.0	-5.4
12913.125000	---	41.63	54.00	12.37	200.0	H	0.0	-3.4
13224.375000	53.52	---	74.00	20.49	100.0	H	30.0	-2.3

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



## 802.11n (HT40) CH6

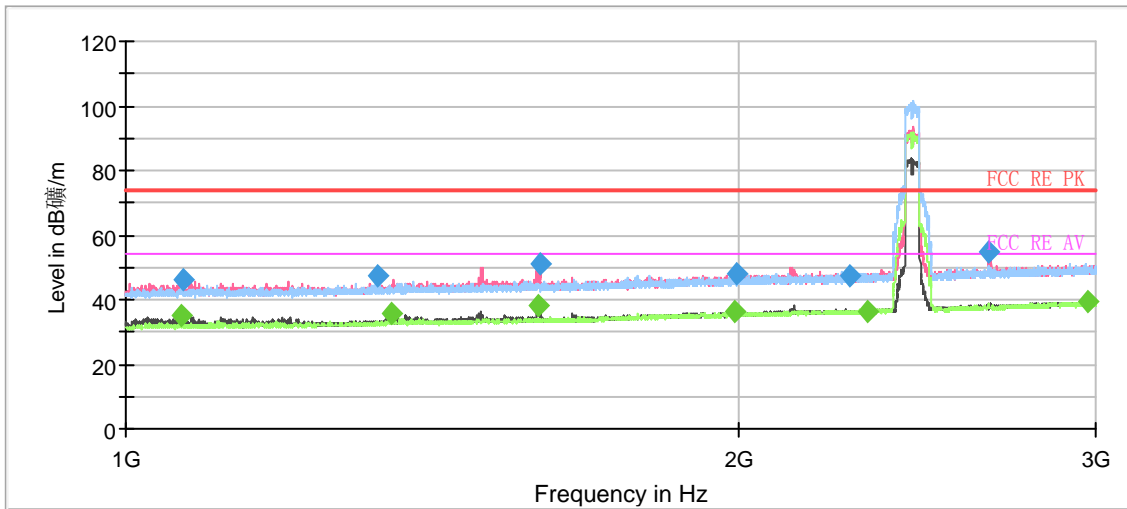


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1066.000000	---	35.00	54.00	19.00	100.0	V	235.0	-16.9
1066.500000	46.34	---	74.00	27.66	100.0	V	307.0	-16.8
1330.250000	47.49	---	74.00	26.51	100.0	V	354.0	-15.6
1351.250000	---	35.41	54.00	18.59	200.0	V	120.0	-15.5
1595.000000	---	38.41	54.00	15.59	200.0	V	89.0	-14.4
1598.500000	51.07	---	74.00	22.93	200.0	V	89.0	-14.4
1993.750000	---	36.55	54.00	17.45	200.0	V	48.0	-12.6
1998.000000	47.86	---	74.00	26.14	200.0	V	48.0	-12.5
2271.500000	47.35	---	74.00	26.65	200.0	V	89.0	-11.8
2315.000000	---	36.43	54.00	17.57	200.0	V	65.0	-11.7
2658.500000	54.64	---	74.00	19.36	100.0	V	154.0	-10.5
2973.500000	---	39.32	54.00	14.68	100.0	V	295.0	-9.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

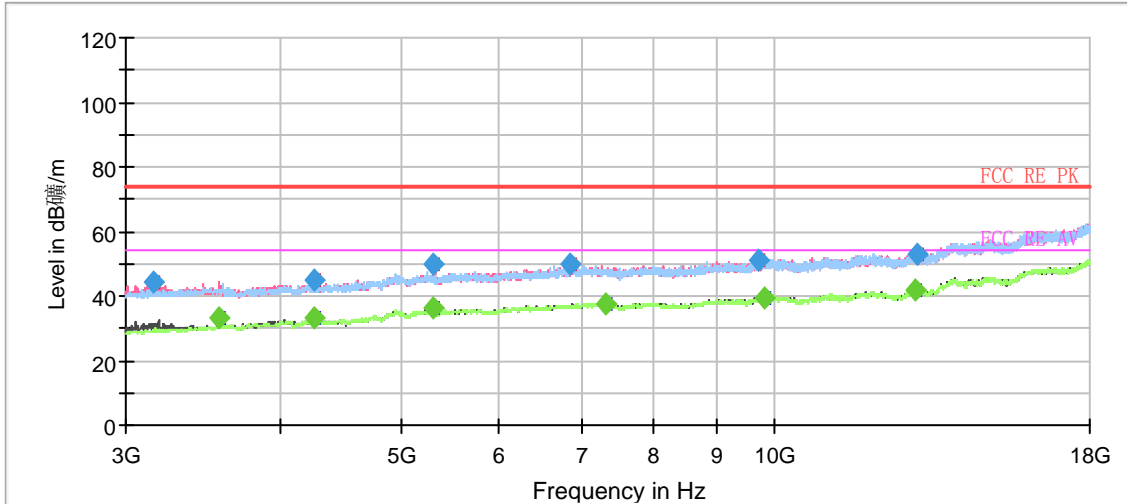


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3157.500000	44.13	---	74.00	29.87	100.0	V	131.0	-18.2
3571.875000	---	32.98	54.00	21.02	200.0	V	133.0	-16.9
4254.375000	---	33.00	54.00	21.00	100.0	V	223.0	-14.6
4254.375000	45.04	---	74.00	28.96	200.0	V	2.0	-14.6
5311.875000	---	36.50	54.00	17.50	100.0	V	309.0	-11.1
5317.500000	50.02	---	74.00	23.98	100.0	V	346.0	-11.1
6858.750000	49.70	---	74.00	24.30	200.0	V	282.0	-7.8
7310.625000	---	37.75	54.00	16.25	200.0	H	170.0	-7.1
9708.750000	51.12	---	74.00	22.88	200.0	V	109.0	-5.4
9845.625000	---	39.66	54.00	14.34	100.0	V	277.0	-5.4
13016.250000	---	41.71	54.00	12.29	100.0	H	259.0	-3.1
13065.000000	52.82	---	74.00	21.18	200.0	V	148.0	-2.9

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



## 802.11n (HT40) CH7

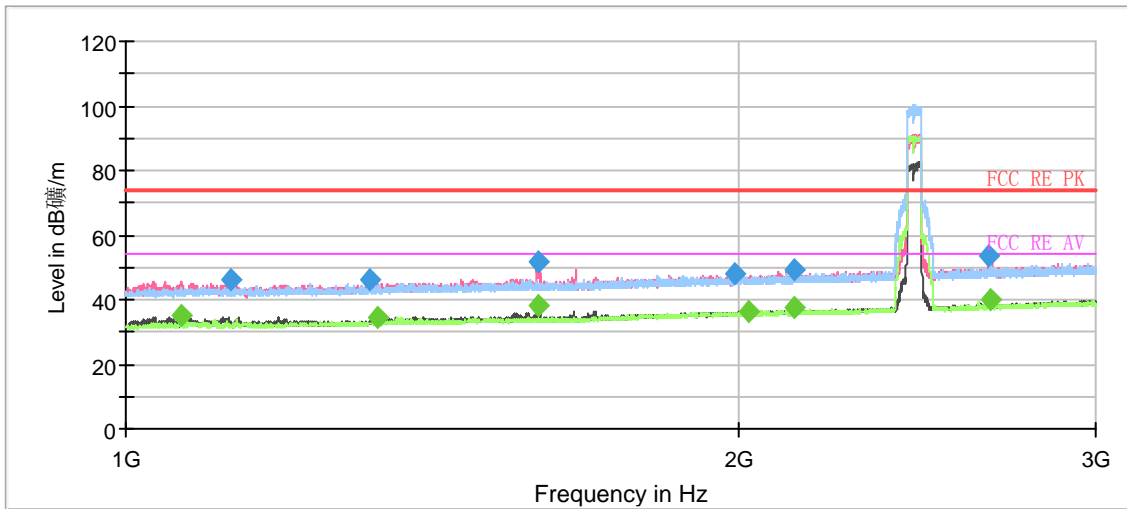


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1065.750000	---	35.30	54.00	18.70	100.0	V	57.0	-16.9
1125.750000	46.06	---	74.00	27.94	200.0	V	103.0	-16.5
1319.250000	45.89	---	74.00	28.11	100.0	V	328.0	-15.7
1331.000000	---	34.50	54.00	19.50	100.0	V	268.0	-15.6
1594.250000	51.88	---	74.00	22.12	200.0	V	85.0	-14.4
1595.250000	---	38.15	54.00	15.85	200.0	V	85.0	-14.4
1992.000000	47.83	---	74.00	26.17	200.0	H	210.0	-12.6
2026.500000	---	36.45	54.00	17.55	100.0	V	138.0	-12.5
2130.750000	---	37.84	54.00	16.16	100.0	V	346.0	-12.2
2131.250000	49.50	---	74.00	24.50	100.0	V	346.0	-12.2
2656.750000	53.63	---	74.00	20.37	200.0	V	37.0	-10.5
2662.000000	---	39.70	54.00	14.30	200.0	V	37.0	-10.5

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

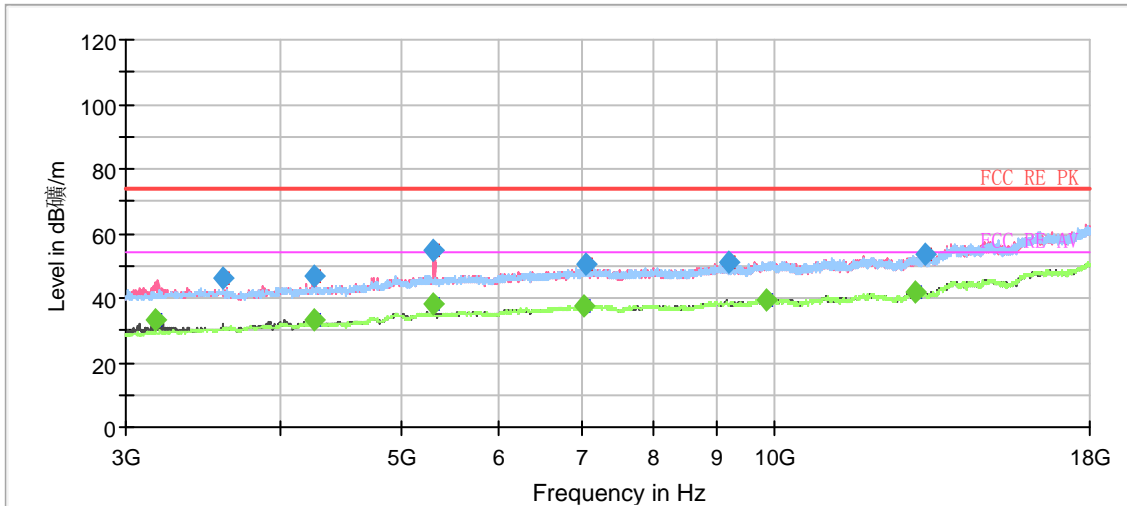


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3165.000000	---	33.26	54.00	20.74	100.0	V	271.0	-18.2
3594.375000	45.97	---	74.00	28.03	200.0	V	127.0	-16.7
4250.625000	46.56	---	74.00	27.44	200.0	V	112.0	-14.6
4260.000000	---	33.50	54.00	20.50	100.0	V	226.0	-14.6
5319.375000	54.69	---	74.00	19.31	200.0	V	56.0	-11.1
5319.375000	---	38.00	54.00	16.00	200.0	V	56.0	-11.1
7023.750000	---	37.71	54.00	16.29	100.0	H	84.0	-7.7
7068.750000	50.22	---	74.00	23.78	100.0	V	171.0	-7.6
9215.625000	51.30	---	74.00	22.70	200.0	V	127.0	-6.4
9853.125000	---	39.63	54.00	14.37	100.0	H	0.0	-5.4
13006.875000	---	41.64	54.00	12.36	100.0	H	114.0	-3.2
13267.500000	53.62	---	74.00	20.38	100.0	H	169.0	-2.1

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



## 802.11n (HT40) CH8

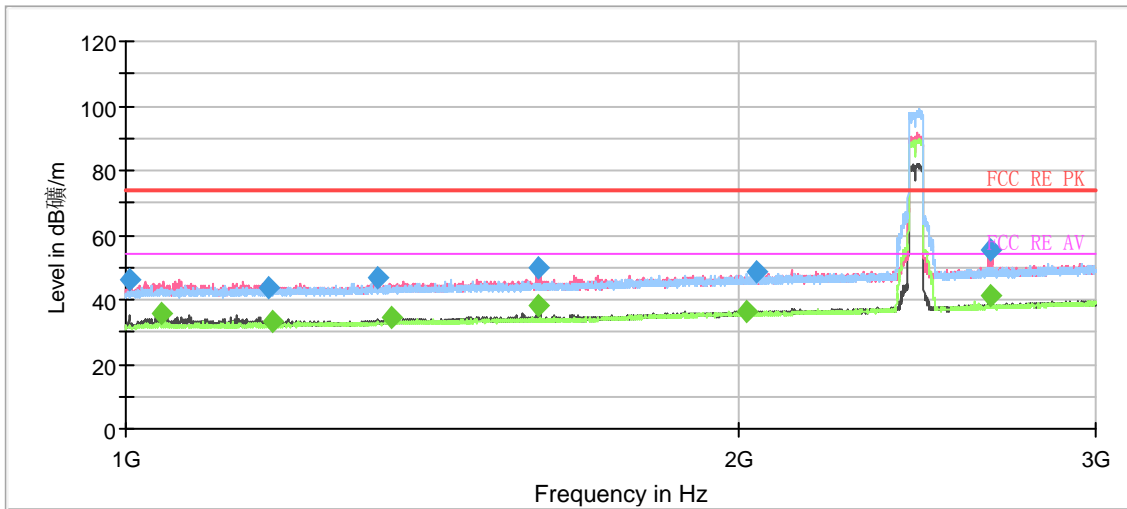


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1003.750000	45.94	---	74.00	28.06	200.0	V	294.0	-17.0
1041.750000	---	35.46	54.00	18.54	100.0	V	234.0	-16.9
1175.250000	43.43	---	74.00	30.57	200.0	V	12.0	-16.3
1180.250000	---	33.06	54.00	20.94	200.0	V	103.0	-16.3
1329.250000	46.51	---	74.00	27.49	200.0	V	91.0	-15.6
1352.750000	---	34.16	54.00	19.84	100.0	V	359.0	-15.5
1594.000000	49.71	---	74.00	24.29	200.0	V	91.0	-14.4
1596.750000	---	38.26	54.00	15.74	200.0	V	85.0	-14.4
2018.750000	---	36.56	54.00	17.44	100.0	V	359.0	-12.5
2042.500000	48.51	---	74.00	25.49	200.0	V	325.0	-12.5
2664.500000	---	41.37	54.00	12.63	100.0	V	73.0	-10.5
2664.750000	55.25	---	74.00	18.75	100.0	V	73.0	-10.5

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

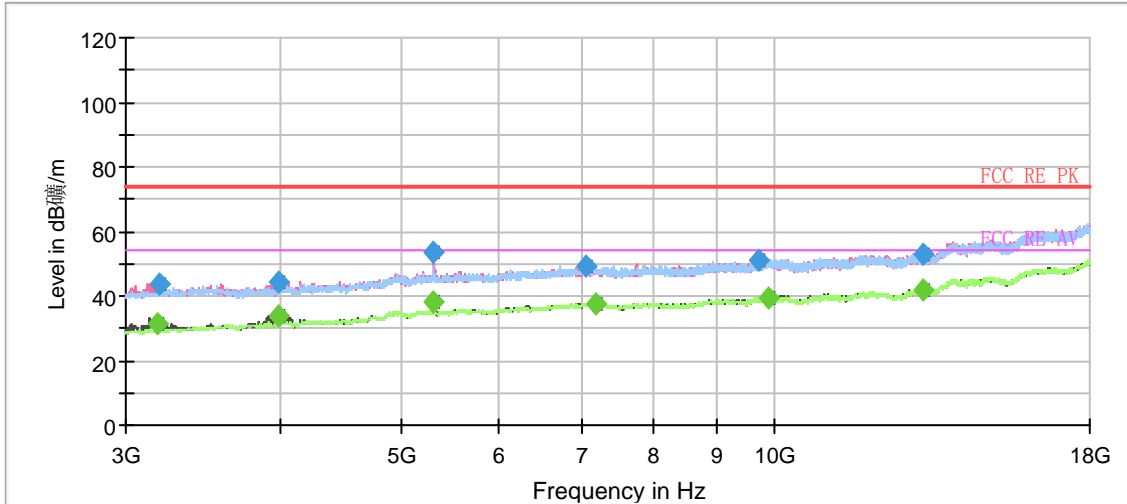


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3178.125000	---	31.57	54.00	22.43	100.0	V	281.0	-18.2
3193.125000	43.49	---	74.00	30.51	200.0	V	127.0	-18.1
3990.000000	44.61	---	74.00	29.39	100.0	V	266.0	-15.5
3991.875000	---	34.03	54.00	19.97	100.0	V	266.0	-15.4
5321.250000	---	38.02	54.00	15.98	100.0	V	312.0	-11.1
5321.250000	53.23	---	74.00	20.77	100.0	V	312.0	-11.1
7068.750000	49.34	---	74.00	24.66	200.0	H	250.0	-7.6
7196.250000	---	37.78	54.00	16.22	100.0	V	0.0	-7.3
9735.000000	51.18	---	74.00	22.82	200.0	H	195.0	-5.5
9900.000000	---	39.59	54.00	14.41	100.0	H	19.0	-5.4
13186.875000	53.06	---	74.00	20.94	100.0	H	0.0	-2.4
13224.375000	---	42.00	54.00	12.00	200.0	V	26.0	-2.3

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



## 802.11n (HT40) CH9

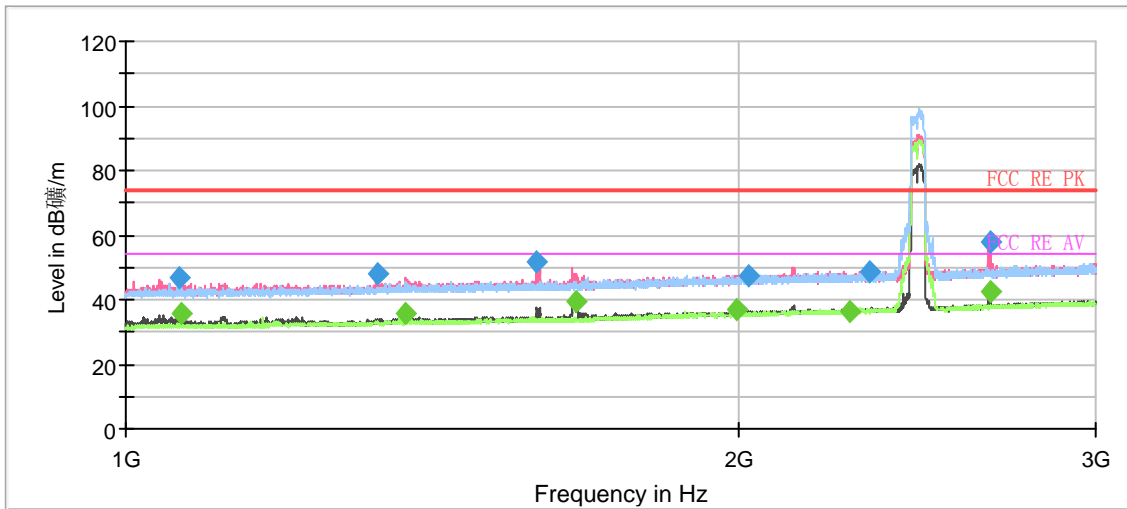


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1062.750000	46.60	---	74.00	27.40	100.0	V	276.0	-16.9
1065.250000	---	35.39	54.00	18.61	100.0	V	270.0	-16.9
1328.750000	48.08	---	74.00	25.92	100.0	V	276.0	-15.6
1373.500000	---	35.98	54.00	18.02	200.0	V	125.0	-15.5
1593.500000	51.46	---	74.00	22.54	200.0	V	83.0	-14.4
1663.500000	---	39.14	54.00	14.86	200.0	V	107.0	-14.1
1997.000000	---	36.67	54.00	17.33	200.0	V	107.0	-12.5
2024.000000	47.62	---	74.00	26.38	200.0	H	58.0	-12.5
2272.250000	---	36.40	54.00	17.60	100.0	V	331.0	-11.8
2323.500000	48.68	---	74.00	25.32	100.0	V	37.0	-11.7
2661.000000	---	42.41	54.00	11.59	100.0	V	62.0	-10.5
2661.000000	57.83	---	74.00	16.17	100.0	V	62.0	-10.5

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



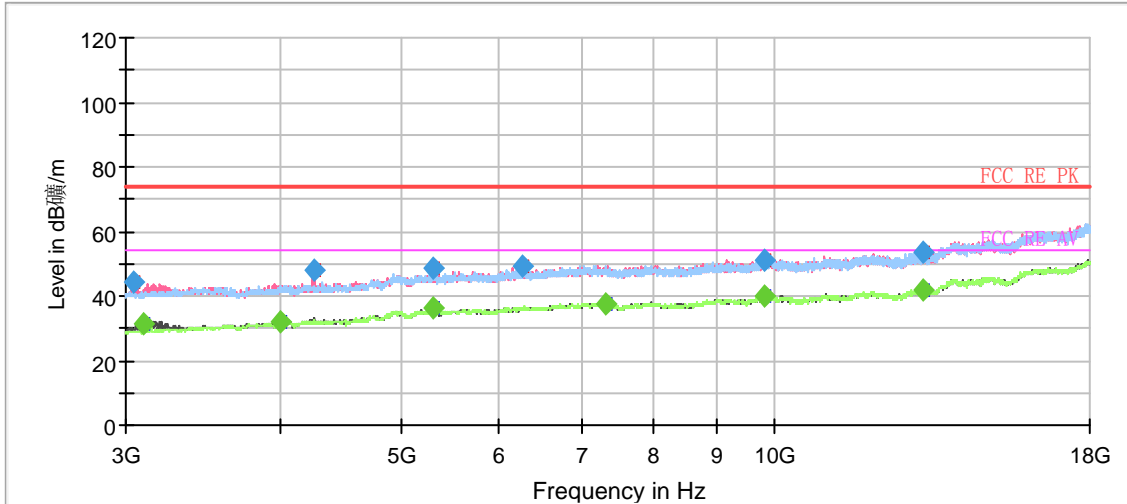


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3043.125000	44.00	---	74.00	30.00	100.0	V	173.0	-18.7
3099.375000	---	31.12	54.00	22.88	100.0	V	181.0	-18.4
3997.500000	---	32.30	54.00	21.70	100.0	V	274.0	-15.4
4252.500000	47.78	---	74.00	26.22	200.0	V	114.0	-14.6
5319.375000	---	36.25	54.00	17.75	200.0	V	106.0	-11.1
5319.375000	48.54	---	74.00	25.46	200.0	V	106.0	-11.1
6264.375000	49.49	---	74.00	24.51	100.0	H	134.0	-8.7
7321.875000	---	37.77	54.00	16.23	100.0	V	205.0	-7.1
9821.250000	51.26	---	74.00	22.74	100.0	H	110.0	-5.5
9845.625000	---	39.76	54.00	14.24	200.0	V	12.0	-5.4
13211.250000	53.60	---	74.00	20.40	100.0	H	150.0	-2.3
13220.625000	---	41.60	54.00	12.40	200.0	V	0.0	-2.3

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



## Bluetooth LE-Channel 0

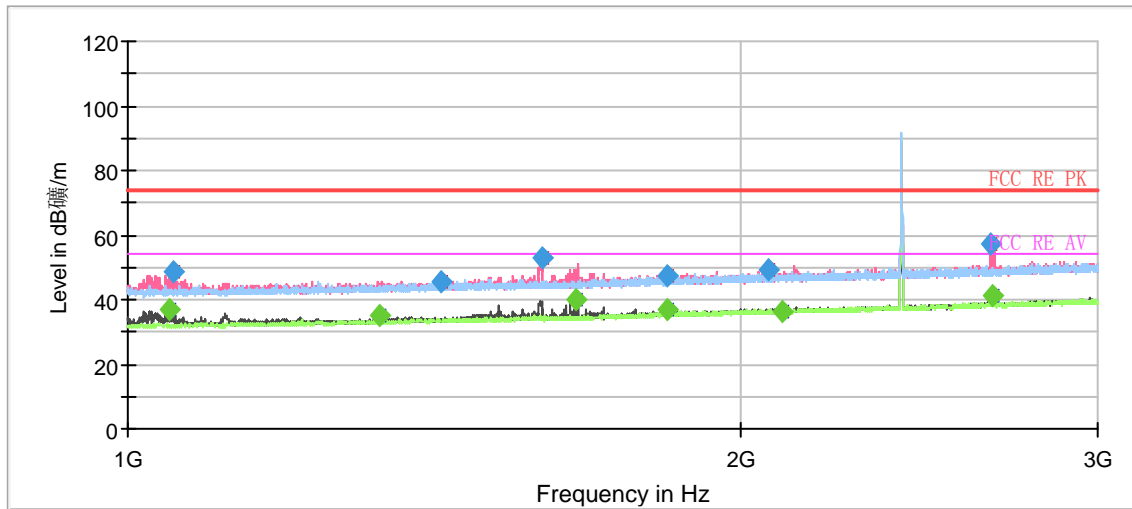


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1047.250000	---	37.01	54.00	16.99	200.0	V	49.0	-16.9
1054.000000	48.66	---	74.00	25.34	200.0	V	49.0	-16.9
1329.750000	---	34.97	54.00	19.03	200.0	V	132.0	-15.6
1426.500000	45.82	---	74.00	28.18	200.0	V	276.0	-15.2
1598.000000	53.18	---	74.00	20.82	200.0	V	42.0	-14.4
1660.000000	---	39.77	54.00	14.23	200.0	V	49.0	-14.1
1841.750000	47.27	---	74.00	26.73	200.0	V	66.0	-13.3
1844.250000	---	37.05	54.00	16.95	200.0	V	66.0	-13.3
2068.000000	49.06	---	74.00	24.94	200.0	V	162.0	-12.4
2100.750000	---	36.41	54.00	17.59	200.0	V	54.0	-12.3
2656.250000	57.01	---	74.00	16.99	200.0	V	66.0	-10.5
2662.500000	---	41.39	54.00	12.61	200.0	V	66.0	-10.5

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

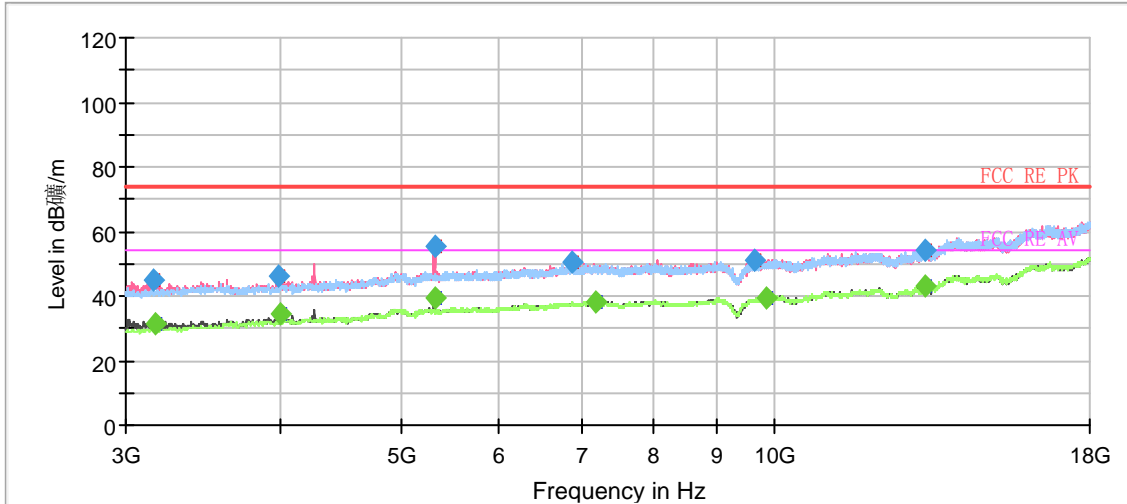


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3155.625000	44.79	---	74.00	29.21	200.0	V	47.0	-18.2
3174.375000	---	31.49	54.00	22.51	200.0	V	192.0	-18.2
3991.875000	45.88	---	74.00	28.12	100.0	V	196.0	-15.4
3997.500000	---	34.20	54.00	19.80	200.0	V	192.0	-15.4
5326.875000	---	39.12	54.00	14.88	100.0	V	242.0	-11.2
5326.875000	55.37	---	74.00	18.63	200.0	V	9.0	-11.2
6883.125000	50.58	---	74.00	23.42	100.0	V	219.0	-7.8
7200.000000	---	38.31	54.00	15.69	100.0	V	226.0	-7.3
9650.625000	51.34	---	74.00	22.66	200.0	V	0.0	-5.4
9864.375000	---	39.47	54.00	14.53	200.0	H	248.0	-5.4
13233.750000	54.32	---	74.00	19.68	100.0	H	42.0	-2.2
13258.125000	---	43.22	54.00	10.78	100.0	V	196.0	-2.2

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



Bluetooth LE-Channel 19

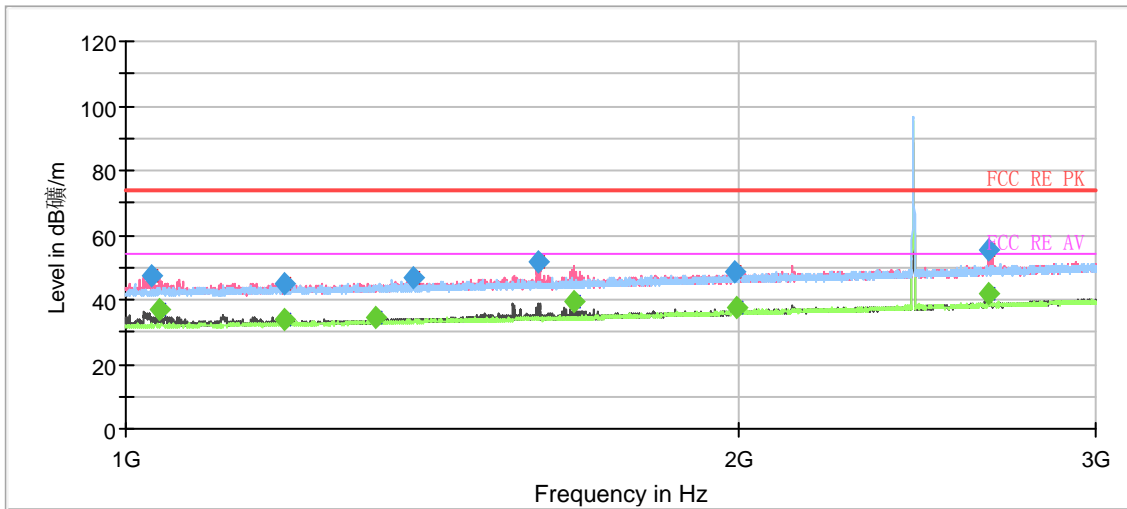


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1029.250000	47.27	---	74.00	26.73	200.0	V	46.0	-16.9
1040.000000	---	37.01	54.00	16.99	200.0	V	52.0	-16.9
1196.250000	45.07	---	74.00	28.93	200.0	V	76.0	-16.1
1197.750000	---	33.59	54.00	20.41	200.0	V	76.0	-16.1
1328.500000	---	34.29	54.00	19.71	200.0	V	131.0	-15.6
1386.000000	46.77	---	74.00	27.23	200.0	V	76.0	-15.4
1596.000000	51.53	---	74.00	22.47	200.0	V	46.0	-14.4
1660.750000	---	39.37	54.00	14.63	200.0	V	52.0	-14.1
1995.250000	48.88	---	74.00	25.12	200.0	V	16.0	-12.6
1995.500000	---	37.32	54.00	16.68	200.0	V	16.0	-12.6
2656.250000	55.62	---	74.00	18.38	200.0	V	246.0	-10.5
2656.500000	---	41.91	54.00	12.09	200.0	V	246.0	-10.5

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

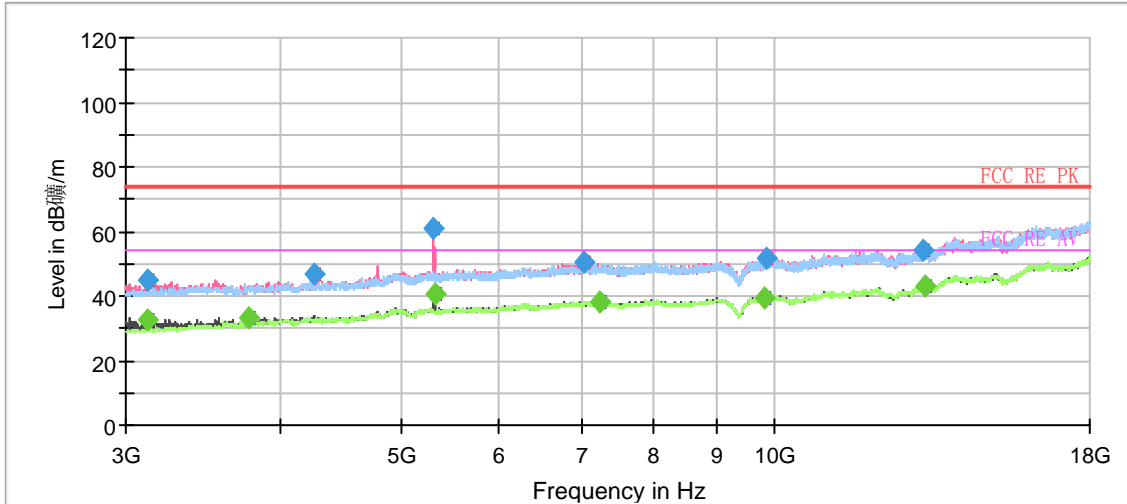


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3121.875000	---	32.87	54.00	21.13	200.0	V	192.0	-18.3
3121.875000	45.02	---	74.00	28.98	200.0	V	192.0	-18.3
3770.625000	---	33.41	54.00	20.59	200.0	V	70.0	-16.1
4254.375000	46.67	---	74.00	27.33	200.0	V	17.0	-14.6
5315.625000	60.66	---	74.00	13.34	200.0	V	316.0	-11.1
5328.750000	---	40.84	54.00	13.16	200.0	V	316.0	-11.2
7036.875000	50.34	---	74.00	23.66	100.0	H	28.0	-7.7
7245.000000	---	38.31	54.00	15.69	200.0	V	147.0	-7.2
9830.625000	---	39.65	54.00	14.35	100.0	V	0.0	-5.5
9883.125000	51.64	---	74.00	22.36	100.0	V	285.0	-5.4
13216.875000	54.44	---	74.00	19.56	100.0	H	0.0	-2.3
13245.000000	---	43.24	54.00	10.76	200.0	V	178.0	-2.2

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

**Bluetooth LE-Channel 39**

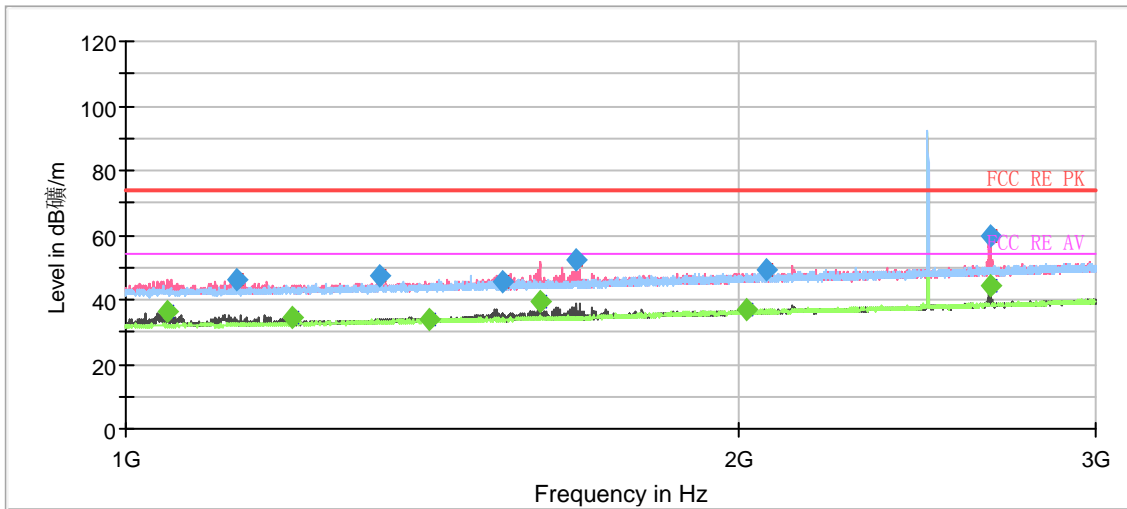


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1049.000000	---	36.34	54.00	17.66	200.0	V	64.0	-16.9
1134.250000	46.45	---	74.00	27.55	200.0	V	82.0	-16.5
1207.500000	---	34.68	54.00	19.32	200.0	V	76.0	-16.1
1332.500000	47.41	---	74.00	26.59	200.0	V	296.0	-15.6
1411.750000	---	34.03	54.00	19.97	200.0	V	217.0	-15.3
1531.250000	45.36	---	74.00	28.64	200.0	V	58.0	-14.7
1598.000000	---	39.40	54.00	14.60	200.0	V	46.0	-14.4
1664.250000	52.05	---	74.00	21.95	200.0	V	52.0	-14.1
2021.250000	---	36.86	54.00	17.14	200.0	H	220.0	-12.5
2065.250000	48.99	---	74.00	25.01	200.0	H	208.0	-12.4
2660.250000	---	44.05	54.00	9.95	200.0	V	70.0	-10.5
2660.250000	59.74	---	74.00	14.26	200.0	V	70.0	-10.5

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

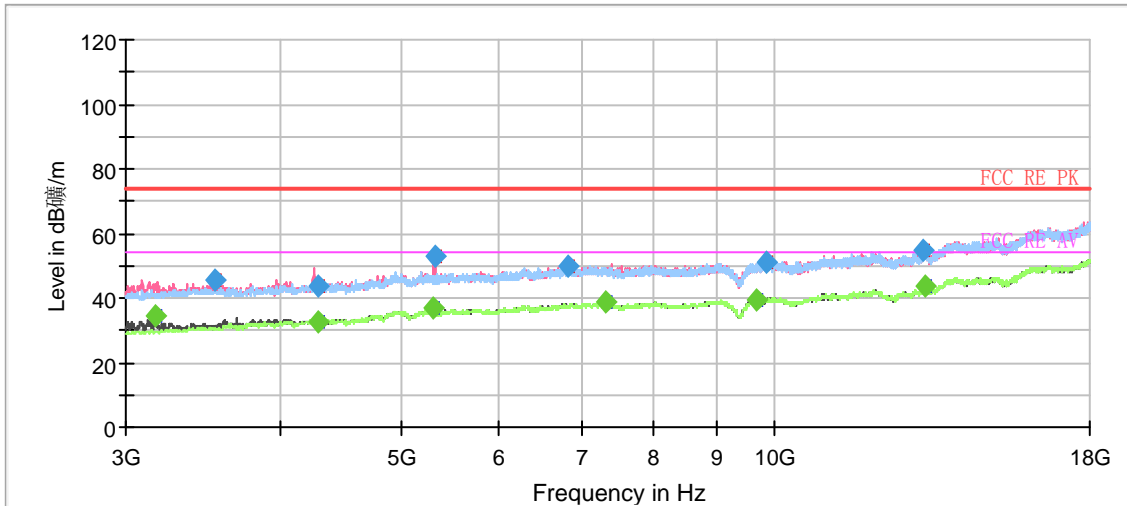


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3174.375000	---	34.27	54.00	19.73	200.0	V	193.0	-18.2
3538.125000	45.74	---	74.00	28.26	200.0	V	64.0	-17.0
4282.500000	---	32.64	54.00	21.36	100.0	V	282.0	-14.6
4288.125000	43.87	---	74.00	30.13	100.0	V	275.0	-14.6
5310.000000	---	37.00	54.00	17.00	200.0	V	64.0	-11.1
5326.875000	53.02	---	74.00	20.98	200.0	V	254.0	-11.2
6825.000000	49.92	---	74.00	24.08	100.0	H	169.0	-7.7
7320.000000	---	38.60	54.00	15.40	200.0	V	231.0	-7.1
9695.625000	---	39.68	54.00	14.32	200.0	V	26.0	-5.4
9875.625000	50.87	---	74.00	23.13	200.0	H	0.0	-5.4
13222.500000	54.87	---	74.00	19.13	200.0	H	299.0	-2.3
13252.500000	---	43.43	54.00	10.57	200.0	H	169.0	-2.2

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

During the test, the Radiates Emission from 18GHz to 26.5GHz was performed in all modes with all channels, 802.11n (HT20) CH9 and Bluetooth LE-Channel 39 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

**Wi-Fi 2.4G:**

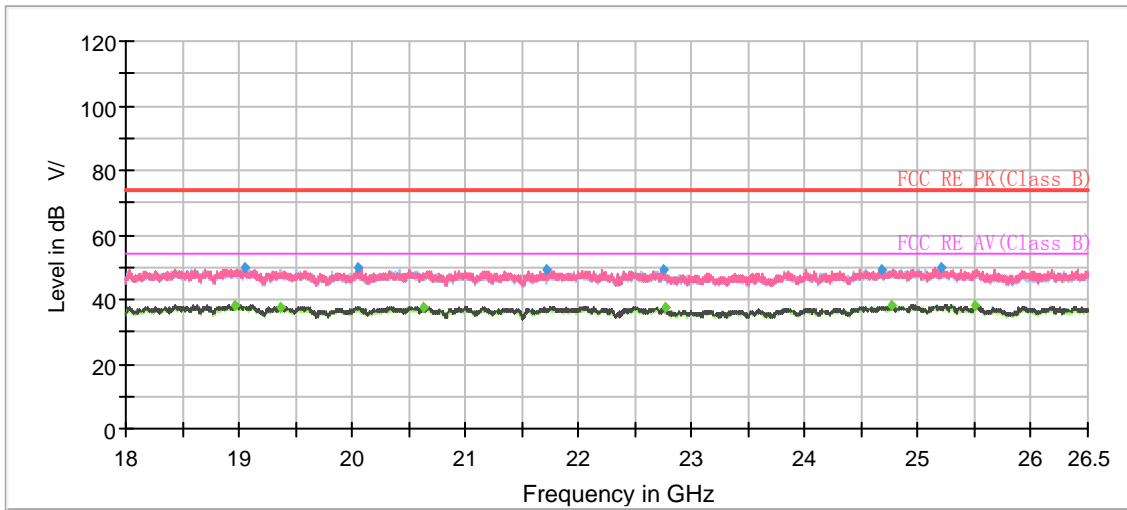


Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	PoI	Azimuth (deg)	Corr. (dB/m)
18956.25	---	38.15	54.00	15.85	100.0	V	182.00	-1
19043.38	49.73	---	74.00	24.27	200.0	H	80.00	-1
19362.13	---	37.68	54.00	16.32	100.0	V	147.00	-1
20058.06	49.68	---	74.00	24.32	100.0	V	44.00	-1
20631.81	---	37.63	54.00	16.37	100.0	V	34.00	0
21708.13	49.41	---	74.00	24.59	200.0	H	64.00	1
22744.06	49.36	---	74.00	24.64	100.0	V	29.00	2
22764.25	---	37.82	54.00	16.18	100.0	V	64.00	2
24669.31	49.26	---	74.00	24.74	100.0	V	307.00	3
24764.94	---	37.97	54.00	16.03	100.0	H	293.00	3
25211.19	49.74	---	74.00	24.26	100.0	V	74.00	3
25501.25	---	38.22	54.00	15.78	100.0	V	292.00	3

**Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)**



Bluetooth LE:

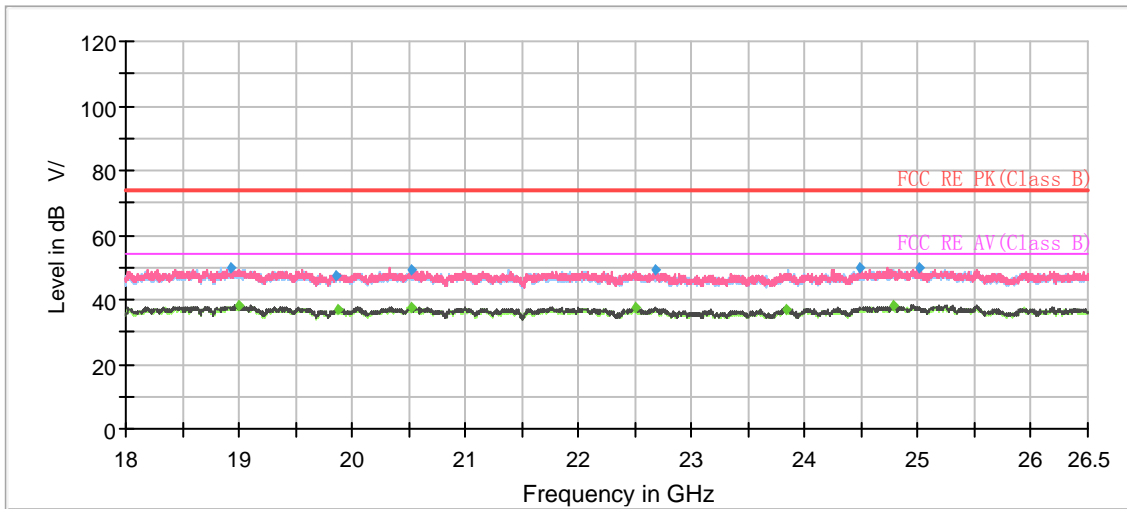

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
18925.44	49.91	---	74.00	24.09	100.0	V	135.00	-1
18992.38	---	38.02	54.00	15.98	200.0	V	124.00	-1
19849.81	47.20	---	74.00	26.80	200.0	V	280.00	-1
19866.81	---	36.94	54.00	17.06	200.0	V	318.00	-1
20518.13	49.18	---	74.00	24.82	100.0	H	274.00	0
20531.94	---	37.72	54.00	16.28	200.0	V	274.00	0
22503.94	---	37.45	54.00	16.55	100.0	V	31.00	2
22687.75	49.24	---	74.00	24.76	200.0	V	235.00	2
23829.94	---	36.91	54.00	17.09	200.0	H	86.00	2
24490.81	49.78	---	74.00	24.22	200.0	V	244.00	3
24783.00	---	37.86	54.00	16.14	100.0	V	165.00	3
25006.13	49.74	---	74.00	24.26	100.0	V	66.00	3

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

### 5.7. Conducted Emission

#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


#### Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.10. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz.

The measurement result should include both L line and N line.

The test is in transmitting mode.

#### Test Setup

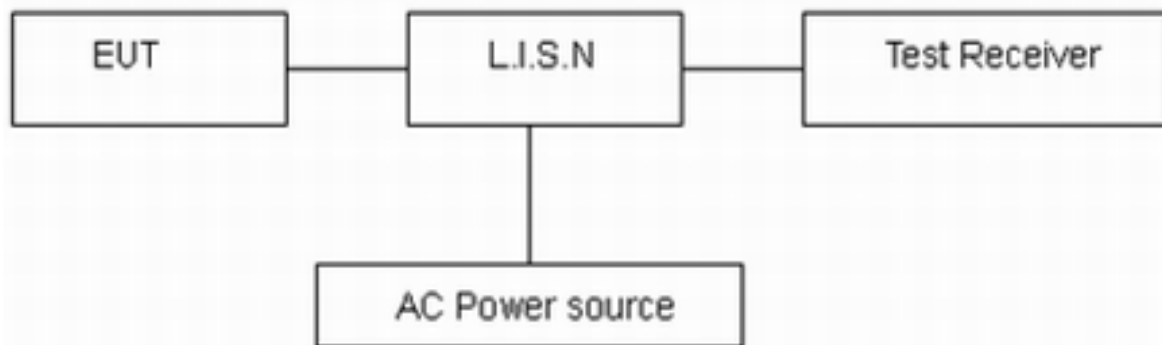

Note: AC Power source is used to change the voltage 110V/60Hz.

#### Limits

Frequency (MHz)	Conducted Limits(dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50

\*: Decreases with the logarithm of the frequency.


#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ ,  $U = 2.69$  dB.

**Test Results:**

Following plots, Blue trace uses the peak detection and Green trace uses the average detection. During the test, the Conducted Emission was performed in all modes (Wi-Fi 2.4G /Bluetooth LE) with all channels, 802.11n (HT20) CH9 and Bluetooth LE-Channel 39 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.


**Wi-Fi 2.4G:**

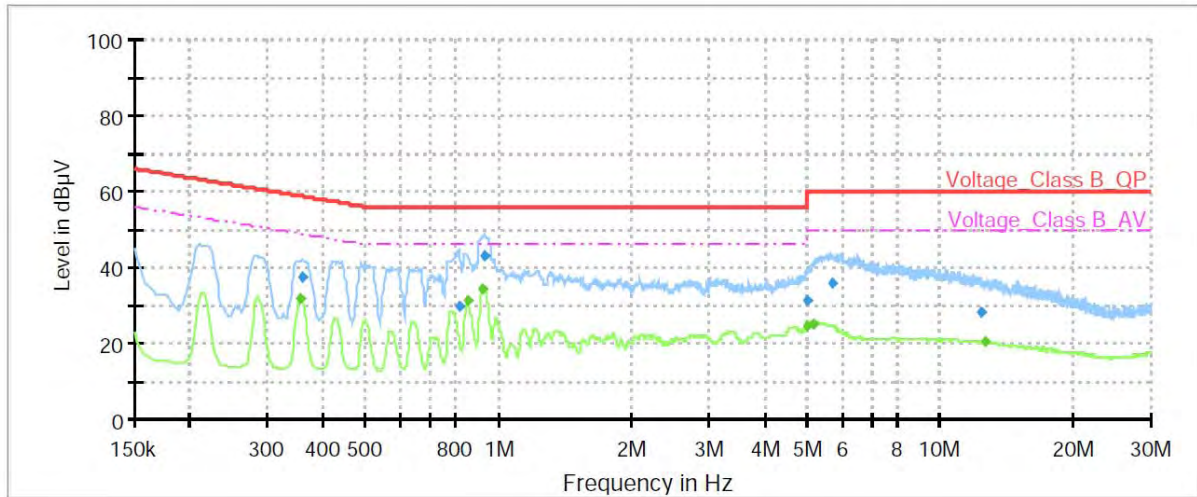

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.35	---	31.65	48.85	17.20	1000.00	9.000	L1	ON	21
0.36	37.44	---	58.75	21.31	1000.00	9.000	L1	ON	21
0.81	29.67	---	56.00	26.33	1000.00	9.000	L1	ON	20
0.85	---	31.15	46.00	14.85	1000.00	9.000	L1	ON	20
0.92	---	34.42	46.00	11.58	1000.00	9.000	L1	ON	20
0.93	43.05	---	56.00	12.95	1000.00	9.000	L1	ON	20
4.98	31.40	---	56.00	24.60	1000.00	9.000	L1	ON	19
5.00	---	24.68	46.00	21.32	1000.00	9.000	L1	ON	19
5.19	---	25.35	50.00	24.65	1000.00	9.000	L1	ON	19
5.69	35.94	---	60.00	24.06	1000.00	9.000	L1	ON	19
12.41	28.28	---	60.00	31.72	1000.00	9.000	L1	ON	20
12.71	---	20.33	50.00	29.67	1000.00	9.000	L1	ON	20

**Remark: Correct factor=cable loss + LISN factor**

L line Conducted Emission from 150 KHz to 30 MHz

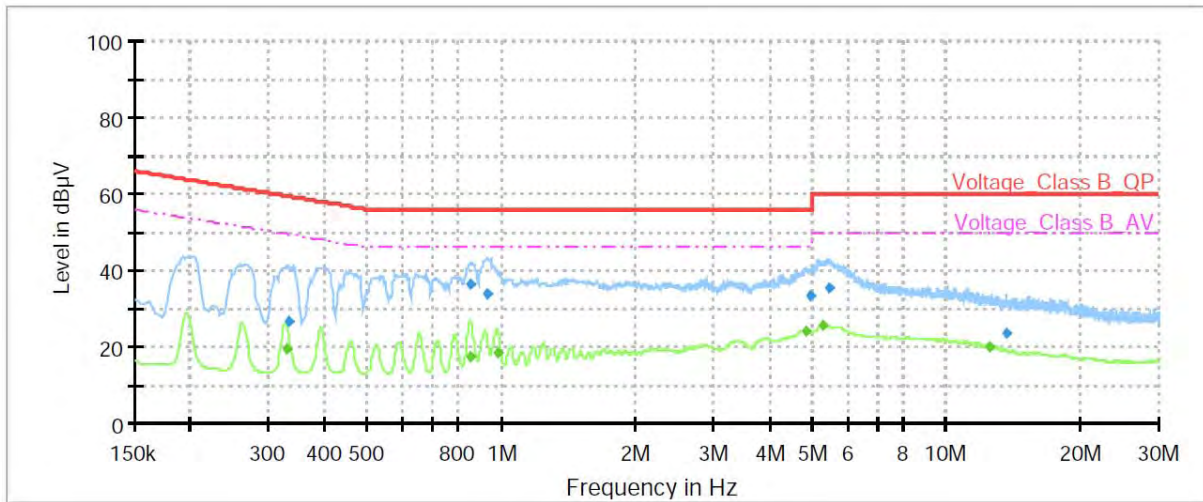


Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.33	---	19.70	49.51	29.81	1000.00	9.000	N	ON	21
0.33	26.66	---	59.34	32.68	1000.00	9.000	N	ON	21
0.85	---	17.31	46.00	28.69	1000.00	9.000	N	ON	20
0.86	36.38	---	56.00	19.62	1000.00	9.000	N	ON	20
0.93	34.03	---	56.00	21.97	1000.00	9.000	N	ON	20
0.98	---	18.29	46.00	27.71	1000.00	9.000	N	ON	20
4.83	---	24.03	46.00	21.97	1000.00	9.000	N	ON	19
4.96	33.11	---	56.00	22.89	1000.00	9.000	N	ON	19
5.28	---	25.77	50.00	24.23	1000.00	9.000	N	ON	19
5.44	35.55	---	60.00	24.45	1000.00	9.000	N	ON	19
12.46	---	20.03	50.00	29.97	1000.00	9.000	N	ON	20
13.64	23.74	---	60.00	36.26	1000.00	9.000	N	ON	20

Remark: Correct factor=cable loss + LISN factor

N line Conducted Emission from 150 KHz to 30 MHz


Bluetooth LE:

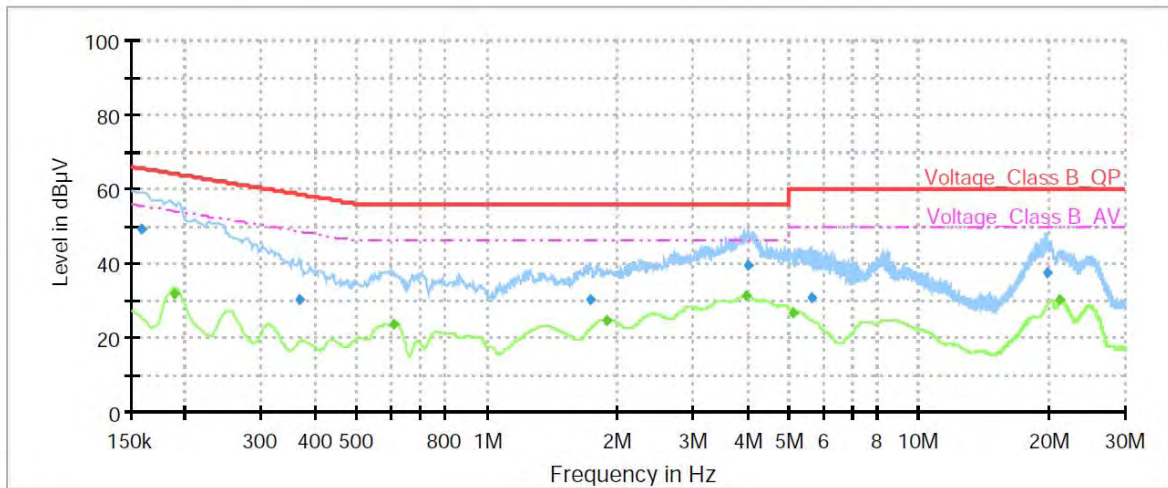

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.16	49.28	---	65.52	16.24	1000.00	9.000	L1	ON	21
0.19	---	31.84	54.11	22.27	1000.00	9.000	L1	ON	21
0.37	30.49	---	58.54	28.05	1000.00	9.000	L1	ON	21
0.61	---	23.65	46.00	22.35	1000.00	9.000	L1	ON	20
1.73	30.50	---	56.00	25.50	1000.00	9.000	L1	ON	20
1.88	---	24.62	46.00	21.38	1000.00	9.000	L1	ON	20
3.98	---	31.48	46.00	14.52	1000.00	9.000	L1	ON	19
4.02	39.47	---	56.00	16.53	1000.00	9.000	L1	ON	19
5.13	---	26.79	50.00	23.21	1000.00	9.000	L1	ON	19
5.66	30.64	---	60.00	29.36	1000.00	9.000	L1	ON	19
19.78	37.49	---	60.00	22.51	1000.00	9.000	L1	ON	20
21.18	---	30.25	50.00	19.75	1000.00	9.000	L1	ON	20

Remark: Correct factor=cable loss + LISN factor

L line Conducted Emission from 150 KHz to 30 MHz

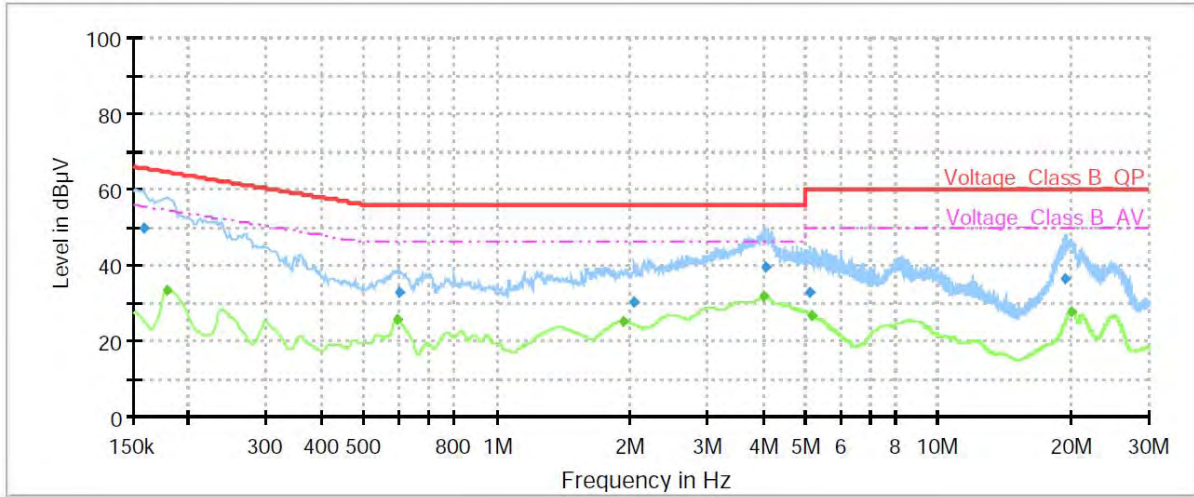

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.16	49.89	---	65.52	15.63	1000.00	9.000	N	ON	21
0.18	---	33.29	54.52	21.23	1000.00	9.000	N	ON	21
0.59	---	25.54	46.00	20.46	1000.00	9.000	N	ON	20
0.60	33.03	---	56.00	22.97	1000.00	9.000	N	ON	20
1.94	---	25.26	46.00	20.74	1000.00	9.000	N	ON	20
2.05	30.48	---	56.00	25.52	1000.00	9.000	N	ON	20
4.02	---	31.89	46.00	14.11	1000.00	9.000	N	ON	19
4.05	39.70	---	56.00	16.30	1000.00	9.000	N	ON	19
5.14	33.05	---	60.00	26.95	1000.00	9.000	N	ON	19
5.14	---	26.66	50.00	23.34	1000.00	9.000	N	ON	19
19.42	36.49	---	60.00	23.51	1000.00	9.000	N	ON	20
20.07	---	27.84	50.00	22.16	1000.00	9.000	N	ON	20

Remark: Correct factor=cable loss + LISN factor

N line Conducted Emission from 150 KHz to 30 MHz

## 6. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
EMI Test Receiver	R&S	ESCI7	100936	2021-12-12	2022-12-11
Signal Analyzer	R&S	FSV40	100815	2021-05-15	2022-05-14
TRILOG Broadband Antenna	SCHWARZBECK	9163	1023	2021-06-07	2024-06-06
Horn Antenna	R&S	HF907	102723	2021-07-26	2024-07-25
Horn Antenna	ETS-Lindgren	3160-09	00102643	2020-10-10	2023-10-09
Software	R&S	EMC32	9.26.01	/	/
Artificial main network	R&S	ENV216	101171	2020-12-13	2022-12-12
EMI Test Receiver	R&S	ESR	101667	2021-05-15	2022-05-14
Software	R&S	EMC32	10.35.10	/	/
Spectrum Analyzer	KEYSIGHT	N9020A	MY54420163	2021-12-12	2022-12-11
Power probe	R&S	NRP18S	101954	2021-05-15	2022-05-14
Climate Chamber	ESPEC	SU-242	93000506	2021-12-12	2022-12-11

\*\*\*\*\*END OF REPORT \*\*\*\*\*



## ANNEX A: The EUT Appearance

The EUT Appearance are submitted separately.



## ANNEX B: Test Setup Photos

The Test Setup Photos are submitted separately.