

Report No.: HEWM2202000026RG01

Rev.: 01 Page: 1 of 30

TEST REPORT

Application No.:HEWM2202000026RGApplicant:Honor Device Co., Ltd.

Address of Applicant: Suite 3401, Unit A, Building 6, Shum Yip Sky Park, No. 8089, Hongli West Road,

Xiangmihu Street, Futian District, Shenzhen, Guangdong 518040, People's

Republic of China

Manufacturer: Honor Device Co., Ltd.

Address of Manufacturer: Suite 3401, Unit A, Building 6, Shum Yip Sky Park, No. 8089, Hongli West Road,

Xiangmihu Street, Futian District, Shenzhen, Guangdong 518040, People's

Republic of China

EUT Description:Smart PhoneModel No.:CMA-LX1Trade Mark:HONOR

FCC ID: 2AYGCCMA-LX1
Standards: 47 CFR Part 2

47 CFR Part 22 subpart H 47 CFR Part 24 subpart E 47 CFR Part 27 subpart M

Date of Receipt: 2022/2/11

Date of Test: 2022/2/13 to 2022/2/28 (for original report SUHR/2022/1001001)

2022/3/1 to 2022/3/8 (for new report HEWM2202000026RG01)

Date of Issue: 2022/3/10

Test Result : PASS *

* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

Authorized Signature:

Panta Sun Wireless Laboratory Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and. for electronic format documents, subject to Terms and Conditions [Felectronic Documents at http://www.sgs.com/en/Termd-Conditions/Terms-e-Document.aspx.attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 t (86–512) 62992980

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: HEWM2202000026RG01

01 Page: 2 of 30

Version 1

Revision Record							
Version Chapter Date Modifier Remark							
01		2022/3/10		Original			

Prepared By	weller lin		
	(Weller Liu) / Engineer		
Checked By	well wei'		
	(Well Wei) / Reviewer		





Report No.: HEWM2202000026RG01

Rev.: 01 Page: 3 of 30

Contents

1	Versi	on	2
2	Test \$	Summary	4
	2.1	GSM850/UMTS Band 5/LTE Band 5	4
	2.2	GSM 1900/UMTS Band 2	5
	2.3	LTE Band 7	6
3	Gene	ral Information	8
	3.1	Details of Client	8
	3.2	Test Location	8
	3.3	Test Facility	8
	3.4	General Description of EUT	9
	3.5	Test Mode	10
	3.6	Test Environment	10
	3.7	Technical Specification	11
	3.8	Test Frequencies	12
4	Desci	ription of Tests	14
	4.1	Maximum Output Power	14
	4.2	Effective (Isotropic) Radiated Power of Transmitter	15
	4.3	Occupied Bandwidth	16
	4.4	Band Edge at Antenna Terminals	17
	4.5	Spurious And Harmonic Emissions at Antenna Terminal	18
	4.6	Peak-Average Ratio	19
	4.7	Field Strength of Spurious Radiation	20
	4.8	Frequency Stability / Temperature Variation	21
	4.9	Test Setups	22
	4	4.9.1 Test Setup 1	22
	4	4.9.2 Test Setup 2	22
	4	4.9.3 Test Setup 3	23
	4.10	Test Conditions	24
5	Main	Test Instruments	27
6	Meas	urement Uncertainty	29
7		ndixes	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CND Doccheck@ass.com.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: HEWM2202000026RG01

Rev.: 01 Page: 4 of 30

2 Test Summary

2.1 GSM850/UMTS Band 5/LTE Band 5

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §22.913(a)(5)	ERP ≤ 7 W	Section 1 of Appendix B	Pass
Peak-Average Ratio	§22.913(d)	Limit≤13 dB	Section 2 of Appendix B	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass
Band Edges Compliance	§2.1051, §22.917(a)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B	Pass
Spurious Emission at Antenna Terminals	§2.1051, §22.917(a)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B	Pass
Field Strength of Spurious Radiation	§2.1053, §22.917(a)	FCC: ≤ -13 dBm/100 kHz.	Section 7 of Appendix B	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(2) §22.355	≤ ±2.5ppm.	Section 8 of Appendix B	Pass





Report No.: HEWM2202000026RG01

Rev.: 01 Page: 5 of 30

2.2 GSM 1900/UMTS Band 2

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §24.232(c)	EIRP ≤ 2 W	Section 1 of Appendix B	Pass
Peak-Average Ratio	§24.232(d)	Limit≤13 dB	Section 2 of Appendix B	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass
Band Edges Compliance	§2.1051, §24.238(a)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B	Pass
Spurious Emission at Antenna Terminals	§2.1051, §24.238(a)	≤ -13 dBm/1 MHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B	Pass
Field Strength of Spurious Radiation	§2.1053, §24.238(a)	≤ -13 dBm/1 MHz.	Section 7 of Appendix B	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(2) §24.235	Within authorized bands of operation/frequency block.	Section 8 of Appendix B	Pass





Report No.: HEWM2202000026RG01

Rev.: 01 Page: 6 of 30

2.3 LTE Band 7

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(h)(2)	EIRP ≤ 2W	Section 1 of Appendix B	Pass
Peak-Average Ratio		≤13 dB	Section 2 of Appendix B	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass
Band Edges Compliance	§2.1051, §27.53(m4)	For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as de ned in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that 43 + 10 log (P) dB on all frequencies between 2490.5 MHz and 2496 MHz and 55 + 10 log (P) dB at or below 2490.5 MHz.	Section 5 of Appendix B	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(m)	Channel Edge -25dBm/ 1 MHz 1 MHz 1 MHz 9 kHz 95 MHz × MHz 10 th harmonics X=Max {6MHz, EBW}	Section 6 of Appendix B	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(m)	Channel Edge -25dBm/ 1 MHz 1 MHz 1 MHz 9 kHz 95 MHz XMHz 10th harmonics X=Max {6MHz, EBW}	Section 7 of Appendix B	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(2) §27.54	Within authorized bands of operation/frequency block.	Section 8 of Appendix B	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CND Doccheck@ass.com.

or email: CN_Doccheck@sgs.com South of No. Fleat, No. 1, Runsheng Rose, Subrou Industrial Park, Suchou Area, Clinie (Aingsu) Plot Free Trade Zone 中国・苏州・中国(江苏)自由贸易成計区苏州十旦国区润胜路1号的6号厂房南部 邮集 215000



Report No.: HEWM2202000026RG01

Rev.: 01 Page: 7 of 30

Remark:

This test report (Report No.: HEWM2202000026RG01 issued on 2022-03-10) is based on the original test report (Report No.: SUHR/2022/1001001 issued on 2022-03-04).

Review this report and original report, this report just changing the parts according to the declaration letter from client.

Considering to the difference, pre-scan were performed on the sample in this report to find the items which can be influential to the result in the original test report for fully retest.

Therefore in this report only radiated spurious emissions were performed based on the worst case of the original report with report number SUHR/2022/1001001 issued on 2022-03-04 and other test data in this report are based on the previous report with report number SUHR/2022/1001001 issued on 2022-03-04.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.appx and, for electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.appx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extend of the law longer of the lawfull and offenders may be prosecuted to the fullest extend of the lawfull and offenders may be prosecuted to the fullest extend of the lawfull and offenders may be prosecuted to the fullest extend of the lawfull and offenders may be prosecuted to the fullest extended for 30 days only.

Attention: To check the authenticity of testing impaction reports & certificate please contact us at telephone (86-755) \$3071443.



Report No.: HEWM2202000026RG01

Rev.: 01 Page: 8 of 30

3 General Information

3.1 Details of Client

Applicant:	Honor Device Co., Ltd.
Address of Applicant:	Suite 3401, Unit A, Building 6, Shum Yip Sky Park, No. 8089, Hongli West Road, Xiangmihu Street, Futian District, Shenzhen, Guangdong 518040, People's Republic of China
Manufacturer:	Honor Device Co., Ltd.
Address of Manufacturer:	Suite 3401, Unit A, Building 6, Shum Yip Sky Park, No. 8089, Hongli West Road, Xiangmihu Street, Futian District, Shenzhen, Guangdong 518040, People's Republic of China

3.2 Test Location

Company:	SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd		
Address: South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, S Area, China (Jiangsu) Pilot Free Trade Zone			
Post code:	215000		
Test engineer:	Weller Liu, King-p Li, Nature Shen, Tizzy Song		

3.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• A2LA (Certificate No. 6336.01)

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

• Innovation, Science and Economic Development Canada

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

• FCC -Designation Number: CN1312

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an

accredited testing laboratory. Designation Number: CN1312.

Test Firm Registration Number: 717327



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.appx and, for electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.appx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extend of the law longer of the lawfull and offenders may be prosecuted to the fullest extend of the lawfull and offenders may be prosecuted to the fullest extend of the lawfull and offenders may be prosecuted to the fullest extend of the lawfull and offenders may be prosecuted to the fullest extended for 30 days only.

Attention: To check the authenticity of testing impaction reports & certificate please contact us at telephone (86-755) \$3071443.



Report No.: HEWM2202000026RG01

Rev.: 01 Page: 9 of 30

3.4 General Description of EUT

EUT Description:	Smart Phone					
Model No.:	CMA-LX1	CMA-LX1				
Trade Mark:	HONOR					
Hardware Version:	HL2CMAM					
Software Version:	4.2.0.32(C900E32R	(1P1)				
Sample Type:	⊠Portable Device,	☐Module				
Antenna Type:	□External, ⊠Integ	rated				
	⊠Provided by client					
	Band	Main Atenna	Sencond Atenna			
	GSM850:	-4.85dBi(Ant0)	-7.89dBi(Ant3)			
Antenna Gain*:	GSM1900:	-2.70dBi(Ant1)	-1.27dBi(Ant3)			
Antenna Gam .	WCDMA Band II:	-2.70dBi(Ant1)	-1.27dBi(Ant3)			
	WCDMA Band V:	-4.85dBi(Ant0)	-7.89dBi(Ant3)			
	LTE Band 5:	-4.85dBi(Ant0)	-7.89dBi(Ant3)			
	LTE Band 7:	-1.68dBi(Ant1)	-2.80dBi(Ant3)			
RF Cable*:	⊠Provided by clien	t				
NE Cable .	5dB					

Note: *Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information, SGS is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.

Remark:

As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.appx and, for electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.appx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extend of the law longer of the lawfull and offenders may be prosecuted to the fullest extend of the lawfull and offenders may be prosecuted to the fullest extend of the lawfull and offenders may be prosecuted to the fullest extend of the lawfull and offenders may be prosecuted to the fullest extended for 30 days only.

Attention: To check the authenticity of testing impaction reports & certificate please contact us at telephone (86-755) \$3071443.

South of No. 6 Plant, No. 1, Runshang Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州 | 上の国内の政策を1号的6号厂房南部 単編: 215000



Report No.: HEWM2202000026RG01

Rev.: 01 Page: 10 of 30

3.5 Test Mode

Test Mode	Test Modes Description			
GSM/TM1	GSM system, GSM/GPRS, GMSK modulation			
GSM/TM2	GSM system, EGPRS, 8PSK modulation			
UMTS/TM1	UMTS system, WCDMA, QPSK modulation			
LTE/TM1	LTE system, QPSK modulation			
LTE/TM2	LTE system, 16QAM modulation			
Remark: The test mode(s) are selected according to relevant radio technology specifications.				

3.6 Test Environment

Environment Parameter	101.0 kPa Selected Values During Tests				
Relative Humidity	44-46 % RH Ambient				
Value	Temperature(℃) Voltage(V)				
NTNV	22~23	3.87			
LTLV	-30	3.6			
LTHV	-30	4.45			
HTLV	50	3.6			
HTHV	50	4.45			

Remark:

NV: Normal Voltage NT: Normal Temperature

LT: Low Extreme Test TemperatureHT: High Extreme Test TemperatureLV: Low Extreme Test VoltageHV: High Extreme Test Voltage





Report No.: HEWM2202000026RG01

Rev.: Page: 11 of 30

3.7 Technical Specification

Characteristics	Description							
Radio System Type	☐ GSM ☐ UMTS ☐ LTE							
	Band		Т	TX			RX	
	GSM850		8	824 to 849 MHz			869 to 894 MHz	
	GSM1900		1	1850 to 1910 MHz			1930 to 1990 MHz	
Supported Frequency Range	UMTS Band II		1	850 to 19	10 MHz		1930 to 1	990 MHz
	UMTS Band V		8	24 to 849	MHz		869 to 89	94 MHz
	LTE Band 5		8	24 to 849	MHz		869 to 89	94 MHz
	LTE Band 7		2	500 to 25	70 MHz		2620 to 2	2690 MHz
	GSM system:		\boxtimes	0.2 MHz				
	UMTS system	:	\boxtimes]5 MHz				
Supported Channel Bandwidth	LTE Band 5		\boxtimes]1.4 MHz	⊠3 MHz	\boxtimes]5 MHz	⊠10 MHz
oupported orialino Bandwidth	LTE Band 7		\boxtimes]5 MHz	⊠10 MHz	\boxtimes]15 MHz	⊠20 MHz
	Note1: WCDMA supports HSUPA, HSDPA, DS-HSDPA,HSPA+, but only the worst case was tested and the data displayed in this report.							
Characteristics	Description							
	GSM: GM		SMSk	ISK 8PS		BPS	SK	
	GSM850 247		47KC	3XW	2	246l	KG7W	
	GSM1900 247		47KC	3XW	2	245l	KG7W	
	UMTS:	(PSK					
	Band II 4M ²		M13F	F9W				
Designation of Emissions (Remark: the necessary	Band V	4	M11I	F9W				
bandwidth of which is the	E-UTRA: QP		PSK	PSK 160		16Q	QAM	
worst value from the measured occupied		1	1M09G7D 1M		IM1	110W7D		
bandwidths for each type of	LTE Band 5	2	M700	70G7D 2M		2M6	69W7D	
channel bandwidth configuration.)	LIL Danu J	4	M470	G7D	4	1M4	6W7D	
J ,		8	M930	G7D	8	8M92W7D		
		4	M470	M47G7D 4M		1M4	6W7D	
	LTE Band 7		8M92G7D 8M		3M9	90W7D		
			13M4G7D 13M		13M	M4W7D		
		1	7M90	G7D	1	17M	19W7D	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN Doccheck@ass.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: HEWM2202000026RG01

Rev.: 01 Page: 12 of 30

3.8 Test Frequencies

Test Mode	TX / RX		RF Channel	
i est ivioue	IA/ NA	Low (L)	Middle (M)	High (H)
	TX	Channel 128	Channel 190	Channel 251
GSM850		824.2MHz	836.6 MHz	848.8 MHz
GSIVIOSU	DV	Channel 128	Channel 190	Channel 251
	RX	869.2 MHz	881.6 MHz	893.8 MHz

Test Mode	TX / RX	/ PX RF Channel				
rest Mode	IA/NA	Low (L)	Middle (M)	High (H)		
	TX	Channel 512	Channel 661	Channel 810		
GSM1900		1850.2MHz	1880.0 MHz	1909.8 MHz		
GSW11900	DV	Channel 512	Channel 661	Channel 810		
	RX	1930.2 MHz	1960.0 MHz	1989.8 MHz		

Test Mode	TX / RX		RF Channel	
i est ivioue	IA/NA	Low (L)	Middle (M)	High (H)
	TX	Channel 9262	Channel 9400	Channel 9538
WCDMA Bond II	17	1852.4 MHz	1880.0 MHz	1907.6 MHz
WCDMA Band II	DV	Channel 9662	Channel 9800	Channel 9938
	RX	1932.4 MHz	1960.0 MHz	1987.6 MHz

Test Mode	TX / RX		RF Channel	
rest ivioue	IA/ NA	Low (L)	Middle (M)	High (H)
	TX	Channel 4132	Channel 4182	Channel 4233
MCDMA Bond V	IA	826.4MHz	836.4 MHz	846.6 MHz
WCDMA Band V	RX	Channel 4357	Channel 4407	Channel 4458
		871.4 MHz	881.4 MHz	891.6 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.apx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.apx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extend of the law Lunless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention:To check the authenticity of testing (inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, **Attention:**To check the authenticity of testing (inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, ***To check the authenticity of testing (inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, ***To check the authenticity of testing (inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, ***To check the authenticity of testing (inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, ***To check the authent

South of No. 19 Part, No. 7, Rursheng Road, Sudrou Industria Park, Sudrou Area, Chira (Jangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区消胜路1号か6号厂房南部 卸場: 215000



Report No.: HEWM2202000026RG01

Rev.: Page: 13 of 30

			1 agc. 10 01 00			
Test Mode	Bandwidth	TX / RX	RF Channel			
i est iviode	Dariuwiuiri	IA/KA	Low (L)	Middle (M)	High (H)	
			Channel 20407	Channel 20525	Channel 20643	
		TX	824.7 MHz	836.5 MHz	848.3 MHz	
	1.4MHz	RX	Channel 2407	Channel 2525	Channel 2643	
		KΛ	869.7 MHz	881.5 MHz	893.3 MHz	
			Channel 20415	Channel 20525	Channel 20635	
	3MHz	TX	825.5 MHz	836.5 MHz	847.5 MHz	
		RX	Channel 2415	Channel 2525	Channel 2635	
1.TE D 1.5			870.5 MHz	881.5 MHz	892.5 MHz	
LTE Band 5		TX	Channel 20425	Channel 20525	Channel 20625	
	_,,,,		826.5 MHz	836.5 MHz	846.5 MHz	
	5MHz	RX	Channel 2425	Channel 2525	Channel 2625	
		KΛ	871.5 MHz	881.5 MHz	891.5 MHz	
			Channel 20450	Channel 20525	Channel 20600	
		TX	829 MHz	836.5 MHz	844 MHz	
	10MHz	RX	Channel 2450	Channel 2525	Channel 2600	
		KΛ	874 MHz	881.5 MHz	889 MHz	

Tari Maria	D d - 2.10.	TV / DV		RF Channel	
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
			Channel 20775	Channel 21100	Channel 21425
		TX	2502.5 MHz	2535 MHz	2567.5 MHz
	5MHz	RX	Channel 2775	Channel 3100	Channel 5825
		KΛ	2622.5 MHz	2655 MHz	2687.5 MHz
			Channel 20800	Channel 21100	Channel 21400
	10MHz	TX	2505 MHz	2535 MHz	2565 MHz
		RX	Channel 2800	Channel 3100	Channel 3400
LTC D			2625 MHz	2655 MHz	2685 MHz
LTE Band 7	15MHz	TX	Channel 20825	Channel 21100	Channel 21375
			2507.5 MHz	2535 MHz	2562.5 MHz
		RX	Channel 2825	Channel 3100	Channel 3375
		KΛ	2627.5 MHz	2655 MHz	2682.5 MHz
			Channel 20850	Channel 21100	Channel 21350
		TX	2510 MHz	2535 MHz	2560 MHz
	20MHz	RX	Channel 2850	Channel 3100	Channel 3350
		INΛ	2630 MHz	2655 MHz	2680 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic Documents as this trip of the trip of the second of the seco

South of No. 6 Plant, No. 1, Runsteing Rosal, Suzhou Industrial Park, Suzhou Area, Chime (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区河胜商1号的6号厂房商部 鄉鄉: 215000

t (86–512) 62992980 www.sgsgroup.com.cn t (86-512) 62992980

sgs.china@sgs.com



Report No.: HEWM2202000026RG01

Rev.: 01 Page: 14 of 30

4 Description of Tests

4.1 Maximum Output Power

Measurement Procedure: FCC KDB 971168 D01 V03r01

The transmitter output was connected to a calibrated coaxial cable, attenuator and power meter, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The power output at the transmitter antenna port was determined by adding the value of the cable insertion loss to the power reading. The tests were performed at three frequencies (low channel, middle channel and high channel) and on the highest power levels, which can be setup on the transmitters.

Remark: Reference test setup 1



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.appx and, for electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.appx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extend of the law longer of the lawfull and offenders may be prosecuted to the fullest extend of the lawfull and offenders may be prosecuted to the fullest extend of the lawfull and offenders may be prosecuted to the fullest extend of the lawfull and offenders may be prosecuted to the fullest extended for 30 days only.

Attention: To check the authenticity of testing impaction reports & certificate please contact us at telephone (86-755) \$3071443.



Report No.: HEWM2202000026RG01

Rev.: 01 Page: 15 of 30

4.2 Effective (Isotropic) Radiated Power of Transmitter

Measurement Procedure: FCC KDB 971168 D01 V03r01; ANSI/C63.26 (2015)

Calculate power in dBm by the following formula:

ERP (dBm) = Conducted Power (dBm) + antenna gain (dBd)

EIRP(dBm) = Conducted Power (dBm) + antenna gain (dBi)

EIRP=ERP+2.15dB

Measurement Procedure: FCC KDB 971168 D01 V03r01; ANSI/C63.26 (2015)

Below 1GHz test procedure as below:

- 1). The EUT was powered ON and placed on a 80cm high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). Test the EUT in the lowest channel, the middle channel ,the Highest channel.
- 5). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 6). Repeat above procedures until all frequencies measured was complete.

E (dB μ V/m) = Measured amplitude level (dBm) + 107 + Cable Loss (dB) + Antenna Factor (dB/m) EIRP (dBm) = E (dB μ V/m) + 20 log D - 104.8; where D is the measurement distance in meters ERP = EIRP - 2.15 (dB); where ERP and EIRP are expressed in consistent units.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber
- 2) Calculate power in dBm by the following formula:

E (dB μ V/m) = Measured amplitude level (dBm) + 107 + Cable Loss (dB) + Antenna Factor (dB/m) EIRP (dBm) = E (dB μ V/m) + 20 log D - 104.8; where D is the measurement distance in meters

- 3). Test the EUT in the lowest channel, the middle channel the Highest channel
- 4). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 5). Repeat above procedures until all frequencies measured was complete

Remark: Reference test setup 2



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Ferms-and-Conditions.aspx and, for electronic Documents at <a href="http://www.sgs.com/en/Ferms-and-Conditions/Ferms-and-Condit



Report No.: HEWM2202000026RG01

Rev.: 01 Page: 16 of 30

4.3 Occupied Bandwidth

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 4.2

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel, middle channel and high channel). The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

Remark: Reference test setup 1

Test Settings

- The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- 2. RBW = 1 5% of the expected OBW
- 3. VBW ≥ 3 x RBW
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep = auto couple
- 7. The trace was allowed to stabilize
- 8. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within
 - 1 5% of the 99% occupied bandwidth observed in Step 7





Report No.: HEWM2202000026RG01

Rev.: 01 Page: 17 of 30

4.4 Band Edge at Antenna Terminals

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at two frequencies (low channel and high channel).in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 100kHz or 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed. The EUT emission bandwidth is measured as the width of the signal between two points, outside of which all emission are attenuated at least 26dB below the transmitter power. The video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to rms.

Remark: Reference test setup 1

Test Settings

- 1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW > 1% of the emission bandwidth
- VBW > 3 x RBW
- 5. Detector = RMS
- Number of sweep points ≥ 2 x Span/RBW
- 7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
- 8. Sweep time = auto couple
- 9. The trace was allowed to stabilize





Report No.: HEWM2202000026RG01

Rev.: 01 Page: 18 of 30

4.5 Spurious And Harmonic Emissions at Antenna Terminal

Measurement Procedure: FCC KDB 971168 D01 V03r01

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyzer, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel). The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

Remark: Reference test setup 1

Test Settings

- Start frequency was set to 30MHz and stop frequency was set to at least 10 * the fundamental frequency (separated into at least two plots per channel)
- Detector = RMS
- Trace mode = trace average for continuous emissions, max hold for pulse emissions
- 4. Sweep time = auto couple
- 5. The trace was allowed to stabilize
- 6. Please see test notes below for RBW and VBW settings





Report No.: HEWM2202000026RG01

Rev.: 01 Page: 19 of 30

4.6 Peak-Average Ratio

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.7.1

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode.

Remark: Reference test setup 1

Test Settings

- 1. The signal analyzer's CCDF measurement profile is enabled
- 2. Frequency = carrier center frequency
- Measurement BW > Emission bandwidth of signal
- 4. The signal analyzer was set to collect one million samples to generate the CCDF curve
- 5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power





Report No.: HEWM2202000026RG01

Rev.: 01 Page: 20 of 30

4.7 Field Strength of Spurious Radiation

Measurement Procedure: FCC KDB 971168 D01 V03r01

Below 1GHz test procedure as below:

- 1). The EUT was powered ON and placed on a 80cm high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). Test the EUT in the lowest channel, the middle channel ,the Highest channel.
- 5). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 6). Repeat above procedures until all frequencies measured was complete.

E (dB μ V/m) = Measured amplitude level (dB μ V) + (Cable Loss (dB) + Antenna Factor (dB/m) – AMP(dB)) EIRP (dBm) = E (dB μ V/m) + 20 log D – 104.8; where D is the measurement distance in meters

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber
- 2) Calculate power in dBm by the following formula:

 $E (dB\mu V/m) = Measured \ amplitude \ level \ (dB\mu V) + (Cable \ Loss \ (dB) + Antenna \ Factor \ (dB/m) - AMP(dB)) \\ EIRP (dBm) = E (dB\mu V/m) + 20 \ log \ D - 104.8; \ where \ D \ is the measurement \ distance \ in meters$

- 3). Test the EUT in the lowest channel, the middle channel the Highest channel
- 4). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 5). Repeat above procedures until all frequencies measured was complete

Remark1: Reference test setup 2

Remark2: The emission below 18G were measured at a 3m test distance, while emissions above 18GHz were measured at a 1m test distance.

Remark: Reference test setup 2

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Factor(Antenna Factor + Cable Factor - Preamplifier Factor)

- 2) Scan from 9kHz to 40GHz, The disturbance between 9KHz to 30MHz and 18GHz to 40GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) All modes have been tested, but only the worst case data displayed in this report.





Report No.: HEWM2202000026RG01

Rev.: 01 Page: 21 of 30

4.8 Frequency Stability / Temperature Variation

Measurement Procedure:

Frequency stability testing is performed in accordance with the guidelines of FCC KDB 971168 D01 V03r01; ANSI/C63.26 (2015)

- . The frequency stability of the transmitter is measured by:
- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency.

Time Period and Procedure:

- 1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
- 2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Remark: Reference test setup 3



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Ferms-and-Conditions.aspx and for electronic Documents at http://www.sgs.com/en/Ferms-and-Conditions/Ferms-and-Condit




Report No.: HEWM2202000026RG01


Rev.: 01 Page: 22 of 30

4.9 Test Setups

4.9.1 Test Setup 1

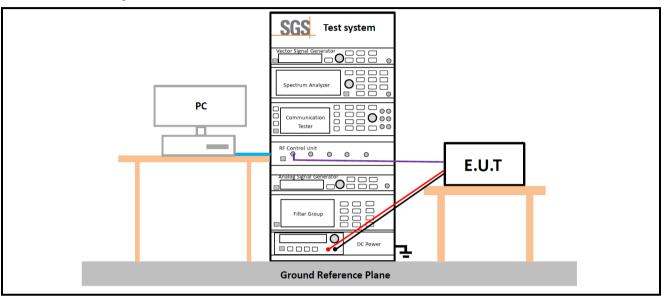

4.9.2 Test Setup 2

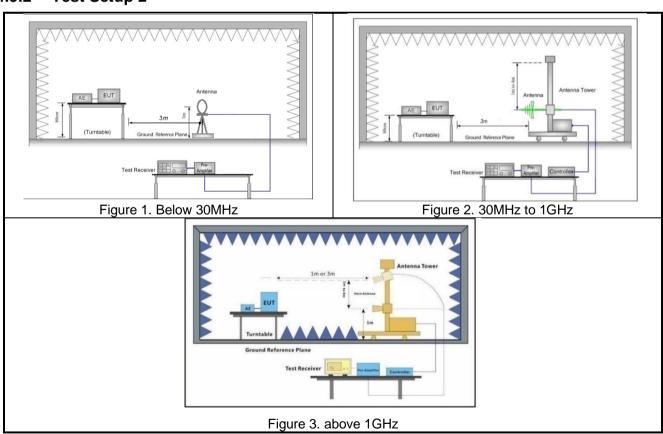



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic Documents at http://www.sgs.com/en/Terms-en/Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: Or check the authenticity of testing inspection records exertificate please contact us at telephone; (86-755) \$30.71443.


or email: <u>CN.Doccheck@sgs.com</u> Sound No. Flear, No. 1, Runsheng Rost, Subtou Idantie Park, Subtou Area, Chira (Jángsu) Pikt Free Trade Zone 215000 中国 - 苏州・中国 (江苏) 自由贸易试验区苏州 I 上国区河胜路1号的号厂房南部 鄭樂: 215000



Report No.: HEWM2202000026RG01

Rev.: 01 Page: 23 of 30

4.9.3 Test Setup 3

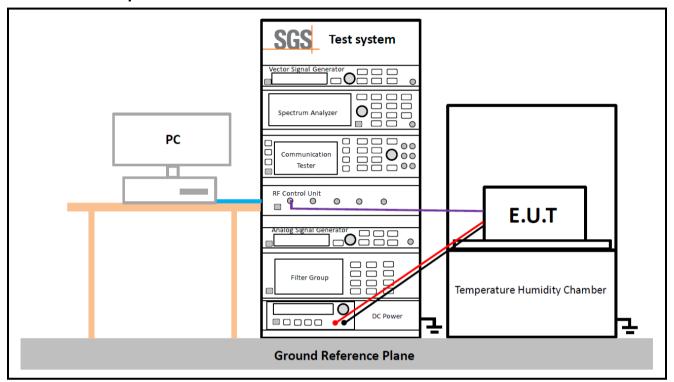



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.apx and, for electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.apx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extend of the law lunes stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention:Doceack the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, **Attention:**Doceack the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, **Termination:**Cannot and the such as the produced of the contact us at telephone: (86-755) 8307 1443, **Termination:**Cannot and the such as the produced of the such and the such as the produced of the such as the prod



Report No.: HEWM2202000026RG01

Rev.: 01 Page: 24 of 30

4.10Test Conditions

Test Case	•	Test Condi	tions
		Test Environm ent	Ambient Climate & Rated Voltage
	Average Power,		Test Setup 1
Transmit	Total	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
Output		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;LTE/TM1;LTE/TM2;
Power Data	Average Power,	Test Environm ent	Ambient Climate & Rated Voltage
	Spectral Density	Test Setup	Test Setup 1
	(if RF Channe (TX)		L, M, H (L= low channel, M= middle channel, H= high channel)
		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;LTE/TM1;LTE/TM2;
		Test Environm ent	Ambient Climate & Rated Voltage
Peak-to-A	verage	Test Setup	Test Setup 1
(if required	1)	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;LTE/TM1;LTE/TM2;
	Modulation Characteristics		Ambient Climate & Rated Voltage
			Test Setup 1
Characteri			M (M= middle channel)
		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;LTE/TM1;LTE/TM2;
Bandwid	Occupie	Test	Ambient Climate & Rated Voltage



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN Doccheck@ass.com

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: HEWM2202000026RG01

Rev.: 01 Page: 25 of 30

			rage. 25 01 30	
th	d Bandwid	Environm ent		
	th	Test Setup	Test Setup 1	
		RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)	
		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;LTE/TM1;LTE/TM2;	
	Emissio n	Test Environm ent	Ambient Climate & Rated Voltage	
	Bandwid th	Test Setup	Test Setup 1	
	(if required)	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)	
	Test Mode		GSM/TM1;GSM/TM2;UMTS/TM1;LTE/TM1;LTE/TM2;	
			Ambient Climate & Rated Voltage	
Band Edge Compliand		Test Setup	Test Setup 1	
Соттрпато	,e	RF Channels (TX)	L, H (L= low channel, H= high channel)	
		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;LTE/TM1;LTE/TM2;	
		Test Environm ent	Ambient Climate & Rated Voltage	
-	Spurious Emission at Antenna		Test Setup 1	
Terminals		RF Channels (TX)	L,M, H (L= low channel, M= middle channel, H= high channel)	
		Test Mode	GSM/TM1;UMTS/TM1;LTE/TM1;	
Field Strength of Spurious Radiation		Test Environm ent	Ambient Climate & Rated Voltage	
Эрипоиз Г		Test Setup	Test Setup 2	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sold responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) later eland such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN Doccheck@ass.com"

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区沟胜路1号的6号厂房南部 邮编: 215000



Report No.: HEWM2202000026RG01

Rev.: 01 Page: 26 of 30

	I	Ţ Ţ
	Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;LTE/TM1;LTE/TM2; Remark: If applicable, the EUT conf. that has maximum power density (based on the equivalent power level) is selected.
	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
	Test Environm ent	(1) -30 °C to +50 °C with step 10 °C at Rated Voltage; (2) VL, VN and VH of Rated Voltage at Ambient Climate.
Frequency Stability	Test Setup	Test Setup 3
	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
	Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;LTE/TM1;LTE/TM2;





Report No.: HEWM2202000026RG01

Rev.: 01 Page: 27 of 30

5 Main Test Instruments

RF Test Equipment (for original report)							
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date		
Shielding Room	Brilliant-emc	N/A	SUWI-04-01-06	2021/5/8	2024/5/7		
Temperature and	MingGao	TH101B	SUWI-01-01-07	2021/2/20	2022/2/19		
humidity meter	<u> </u>			2022/2/19	2023/2/18		
Signal Analyzer	ROHDE&SCHWARZ	FSV3030	SUWI-01-02-02	2021/5/28	2022/5/27		
DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	2021/2/20	2022/2/19		
DC Power Supply	HIELEC	П1300ЭБ	3011-01-10-01	2022/2/19	2023/2/18		
Measurement Software	Tonscend	JS1120-3 Test System V 2.6.88.0336	SUWI-02-09-09	NCR	NCR		
Radio Communication Analyzer	Anritsu	MT8821C	SUWI-01-26-03	2021/9/29	2022/9/28		
Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	SUWI-01-27-01	2021/9/28	2022/9/27		
Temperature	ESDEC	SI I-2/12	SUWI-01-13-01	2021/2/20	2022/2/19		
Chamber	LOF LO	ESPEC SU-242		2022/2/19	2023/2/18		





Report No.: HEWM2202000026RG01

Rev.: 01 Page: 28 of 30

RSE Test Equipment (for new report)							
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date		
Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-01	2021/5/8	2024/5/7		
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-05	2022/2/16	2023/2/15		
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	2021/5/28	2022/5/27		
Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	2022/2/16	2023/2/15		
Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	VULB 9163	SUWI-01-11-01	2021/5/16	2022/5/15		
Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	BBHA 9120D	SUWI-01-11-02	2021/5/16	2022/5/15		
Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	BBHA 9170	SUWI-01-11-03	2021/5/14	2022/5/13		
Amplifier	Tonscend	TAP9K3G40	SUWI-01-14-01	2022/2/16	2023/2/15		
Amplifier	Tonscend	TAP01018050	SUWI-01-14-02	2022/2/16	2023/2/15		
Amplifier	Tonscend	TAP18040048	SUWI-01-14-03	2022/2/16	2023/2/15		
Active Loop Antenna	SCHWRZBECK MESS-ELEKTRONIK	FMZB 1519B	SUWI-01-21-01	2021/6/10	2022/6/9		
Measurement Software	Tonscend	JS32-RE V3.0.0.3	SUWI-02-09-04	NCR	NCR		
Radio communication analyzer	Anritsu	MT8820C	SUWI-01-16-08	2022/2/16	2023/2/15		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN Doccheck@ass.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000中国 - 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路(号的6号厂房南部 邮编: 215000



Report No.: HEWM2202000026RG01

Rev.: 01 Page: 29 of 30

6 Measurement Uncertainty

For a 95% confidence level (k = 2), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

No.	Item	Measurement Uncertainty
1	Total RF power, conducted	±0.54dB
2	RF power density, conducted	±1.03dB
3	Spurious emissions, conducted	±0.54dB
4	Radio Frequency	±7.25 x 10 ⁻⁸
5	Duty Cycle	±0.37%
6	Occupied Bandwidth	±7.25 x 10 ⁻⁸
		± 3.13dB (9kHz - 30MHz)
7	Dedicted Faireign	± 4.8dB (30MHz - 1GHz)
/	Radiated Emission	± 4.8dB (1GHz to 18GHz)
		± 4.8dB (Above 18GHz)



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ags.com/en/Terms-and-Conditions.ags, and, for electronic Documents at http://www.ags.com/en/Terms-and-Conditions/Terms-en/Document.ags.
Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction forcement cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Attention: To check the authenticity of testing finspection report & certificate, please contact us at telephone: (86-755) \$3071443,



Report No.: HEWM2202000026RG01

Rev.: 01 Page: 30 of 30

7 Appendixes

Appendix A.3	WWAN Setup Photos
Appendix B.1	GSM 850 & 1900
Appendix B.2	WCDMA Band II & V
Appendix B.3	LTE Band 5
Appendix B.4	LTE Band 7

The End

