



FCC Test Report

APPLICANT : Honor Device Co., Ltd.
EQUIPMENT : Smart Band
BRAND NAME : HONOR
MODEL NAME : CRS-B39S
FCC ID : 2AYGCCRS-B39S
STANDARD : 47 CFR Part 15 Subpart B
CLASSIFICATION : Certification

The product was received on Dec. 02, 2020 and testing was completed on Dec. 21, 2020. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Jason Jia

Reviewed by: Jason Jia / Supervisor

James Huang

Approved by: James Huang / Manager



Sporton International (Kunshan) Inc.

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY 3

SUMMARY OF TEST RESULT 4

1. GENERAL DESCRIPTION 5

 1.1. Applicant 5

 1.2. Manufacturer 5

 1.3. Product Feature of Equipment Under Test 5

 1.4. Product Specification of Equipment Under Test 5

 1.5. Specification of Accessory 5

 1.6. Modification of EUT 6

 1.7. Test Location 6

 1.8. Test Software 6

 1.9. Applicable Standards 6

2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST 7

 2.1. Test Mode 7

 2.2. Connection Diagram of Test System 7

 2.3. Support Unit used in test configuration and system 8

 2.4. EUT Operation Test Setup 8

3. TEST RESULT 9

 3.1. Test of AC Conducted Emission Measurement 9

 3.2. Test of Radiated Emission Measurement 13

4. LIST OF MEASURING EQUIPMENT 18

5. UNCERTAINTY OF EVALUATION 19

APPENDIX A. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FC0D0206	Rev. 01	Initial issue of report	Dec. 28, 2020
FC0D0206	Rev. 02	Add FCC ID	Feb. 09, 2021



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 15.84 dB at 0.624 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 8.99 dB at 827.340 MHz for Quasi-Peak

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1. General Description

1.1. Applicant

Honor Device Co., Ltd.

Shum Yip Sky Park, No. 8089, Hongli West Road, Shenzhen, Guangdong, China

1.2. Manufacturer

Honor Device Co., Ltd.

Shum Yip Sky Park, No. 8089, Hongli West Road, Shenzhen, Guangdong, China

1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	Smart Band
Brand Name	HONOR
Model Name	CRS-B39S
EUT supports Radios application	Bluetooth LE
HW Version	R1
SW Version	1.1.0.166
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	Bluetooth: 2402 MHz ~ 2480 MHz
Rx Frequency	Bluetooth: 2402 MHz ~ 2480 MHz
Antenna Type	Bluetooth : Internal Antenna
Type of Modulation	Bluetooth LE : GFSK

1.5. Specification of Accessory

Specification of Accessory				
Charging Dock	Brand Name	HONOR	Model Name	AF33-3
USB Cable	Brand Name	HONOR	Model Name	N/A
Battery	Brand Name	HONOR	Model Name	HB351329ECW



1.6. Modification of EUT

No modifications are made to the EUT during all test items.

1.7. Test Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People’s Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH05-KS	CN1257	314309

1.8. Test Software

Item	Site	Manufacture	Name	Version
1.	03CH05-KS	AUDIX	E3	6.2009-8-24al
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.9. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart B
- ANSI C63.4-2014

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

2. Test Configuration of Equipment Under Test


2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1: Smart Band (Bluetooth Idle with Mobile Phone) + Charging Dock + USB Cable (Charging from Adapter)
Radiated Emissions	Mode 1: Smart Band (Bluetooth Idle with Mobile Phone) + Charging Dock + USB Cable (Charging from Adapter)

2.2. Connection Diagram of Test System

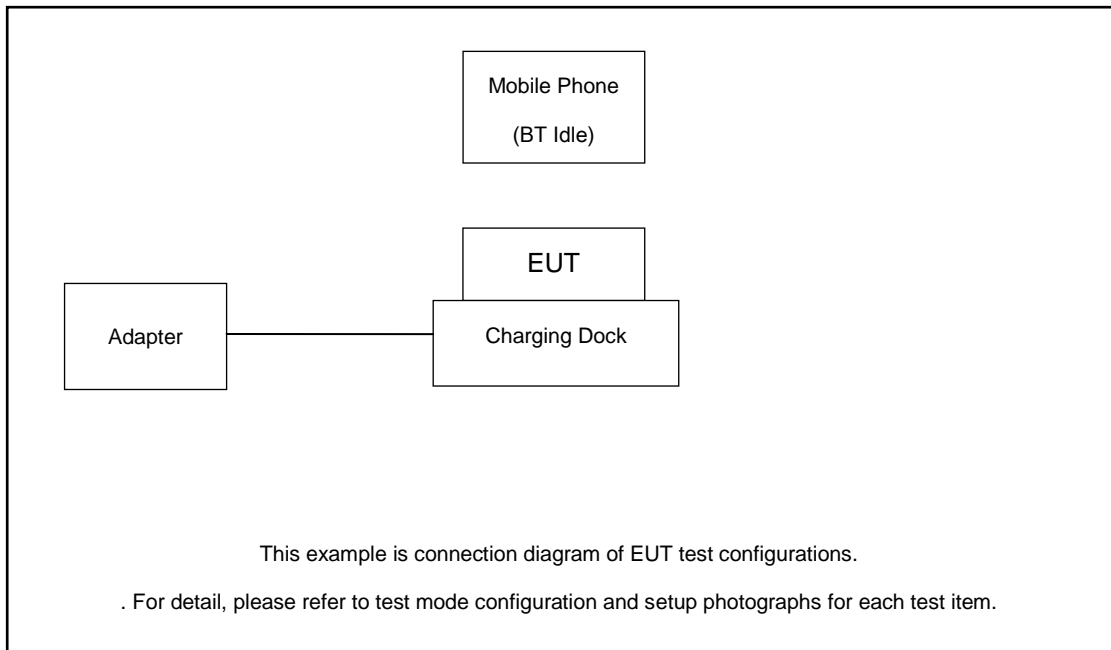

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application



2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Adapter	N/A	HW-050100U01	N/A	N/A	N/A
2.	Mobile Phone	Xiaomi	LYEJ02LM	N/A	N/A	N/A

2.4. EUT Operation Test Setup

The EUT was attached to the Bluetooth earphone, and the following programs installed in the EUT were programmed during the test.



3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.1.4 Test Setup

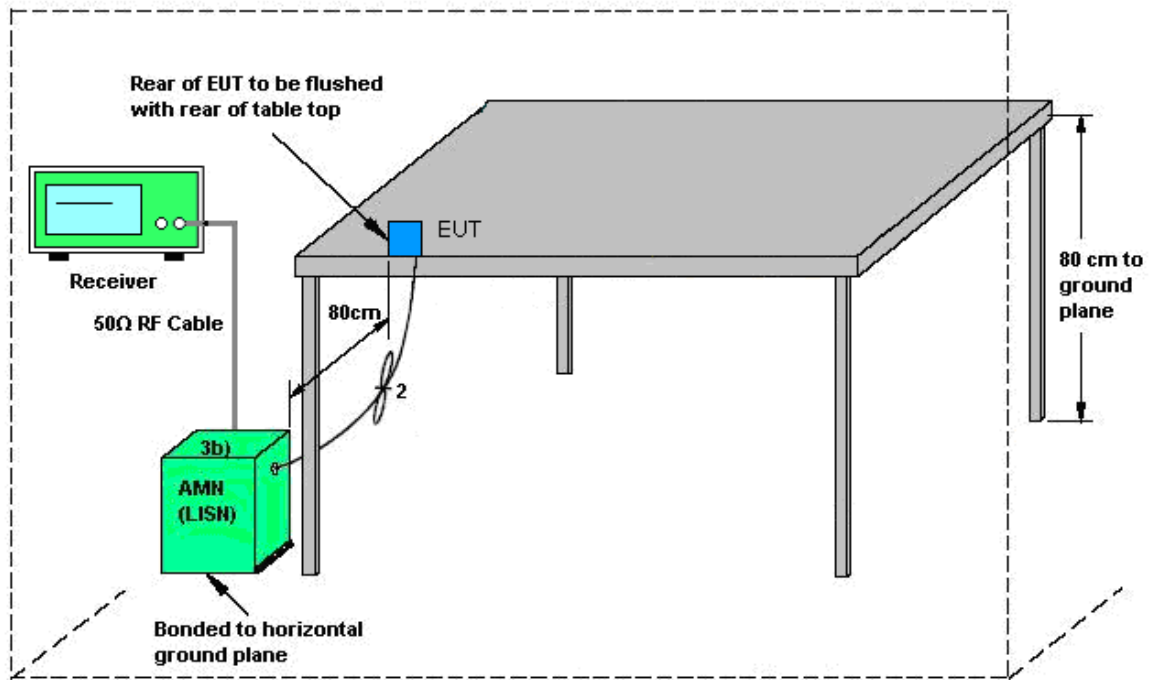


AMN = Artificial mains network (LISN)
AE = Associated equipment
EUT = Equipment under test
ISN = Impedance stabilization network



3.1.5 Test Result of AC Conducted Emission

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

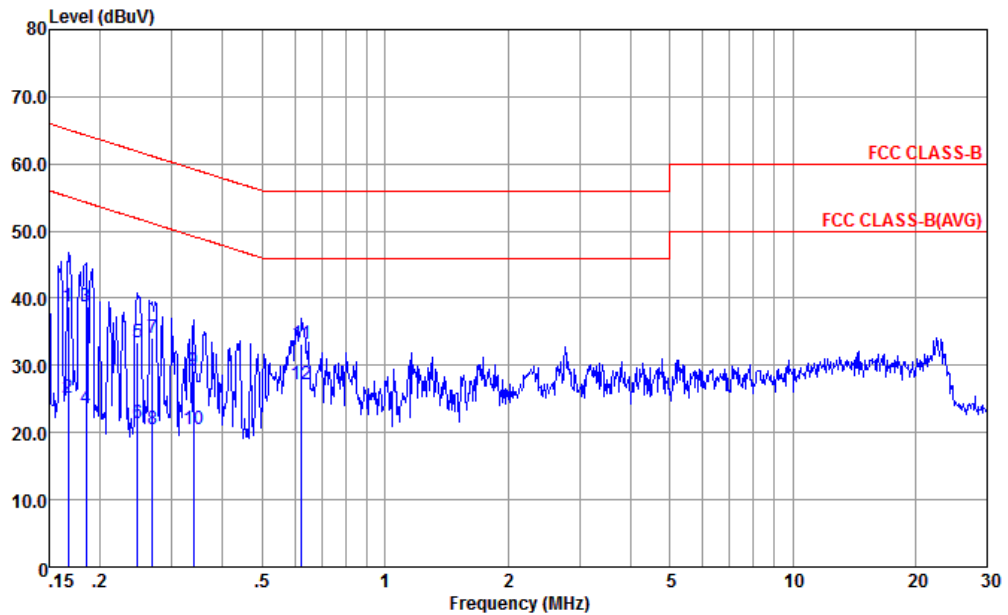


Site : CO01-KS
 Condition : FCC CLASS-B TWO-LISN-CN02-L LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.167	38.68	-26.44	65.12	18.60	9.64	10.44	QP
2	0.167	25.18	-29.94	55.12	5.10	9.64	10.44	Average
3	0.184	38.84	-25.44	64.28	18.80	9.64	10.40	QP
4	0.184	23.54	-30.74	54.28	3.50	9.64	10.40	Average
5	0.247	33.48	-28.38	61.86	13.50	9.64	10.34	QP
6	0.247	21.48	-30.38	51.86	1.50	9.64	10.34	Average
7	0.269	34.16	-27.00	61.16	14.20	9.64	10.32	QP
8	0.269	20.56	-30.60	51.16	0.60	9.64	10.32	Average
9	0.339	29.13	-30.09	59.22	9.20	9.64	10.29	QP
10	0.339	20.53	-28.69	49.22	0.60	9.64	10.29	Average
11	0.624	33.19	-22.81	56.00	13.29	9.66	10.24	QP
12 *	0.624	27.09	-18.91	46.00	7.19	9.66	10.24	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

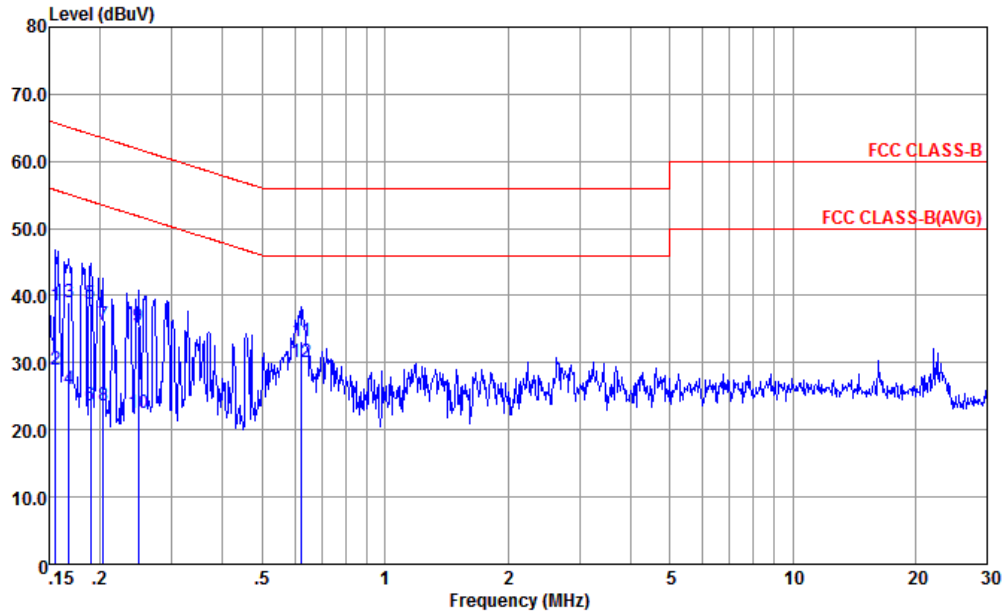

Site : CO01-KS
 Condition : FCC CLASS-B TWO-LISN-CN02-N NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.156	38.47	-27.22	65.69	18.19	9.81	10.47	QP
2	0.156	28.87	-26.82	55.69	8.59	9.81	10.47	Average
3	0.168	39.07	-26.01	65.08	18.80	9.84	10.43	QP
4	0.168	26.17	-28.91	55.08	5.90	9.84	10.43	Average
5	0.189	38.86	-25.20	64.06	18.60	9.88	10.38	QP
6	0.189	23.86	-30.50	54.06	3.30	9.88	10.38	Average
7	0.204	35.75	-27.70	63.45	15.50	9.89	10.36	QP
8	0.204	23.55	-29.90	53.45	3.30	9.89	10.36	Average
9	0.248	35.37	-26.45	61.82	15.20	9.84	10.33	QP
10	0.248	22.47	-29.35	51.82	2.30	9.84	10.33	Average
11	0.624	33.26	-22.74	56.00	13.29	9.73	10.24	QP
12 *	0.624	30.16	-15.84	46.00	10.19	9.73	10.24	Average

Note:

- Level(dBuV) = Read Level(dBuV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBuV) – Limit Line(dBuV)



3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2. Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.2.3. Test Procedures

1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB μ V/m) = 20 log Emission level (μ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

3.2.4. Test Setup of Radiated Emission


For radiated emissions from 30MHz to 1GHz

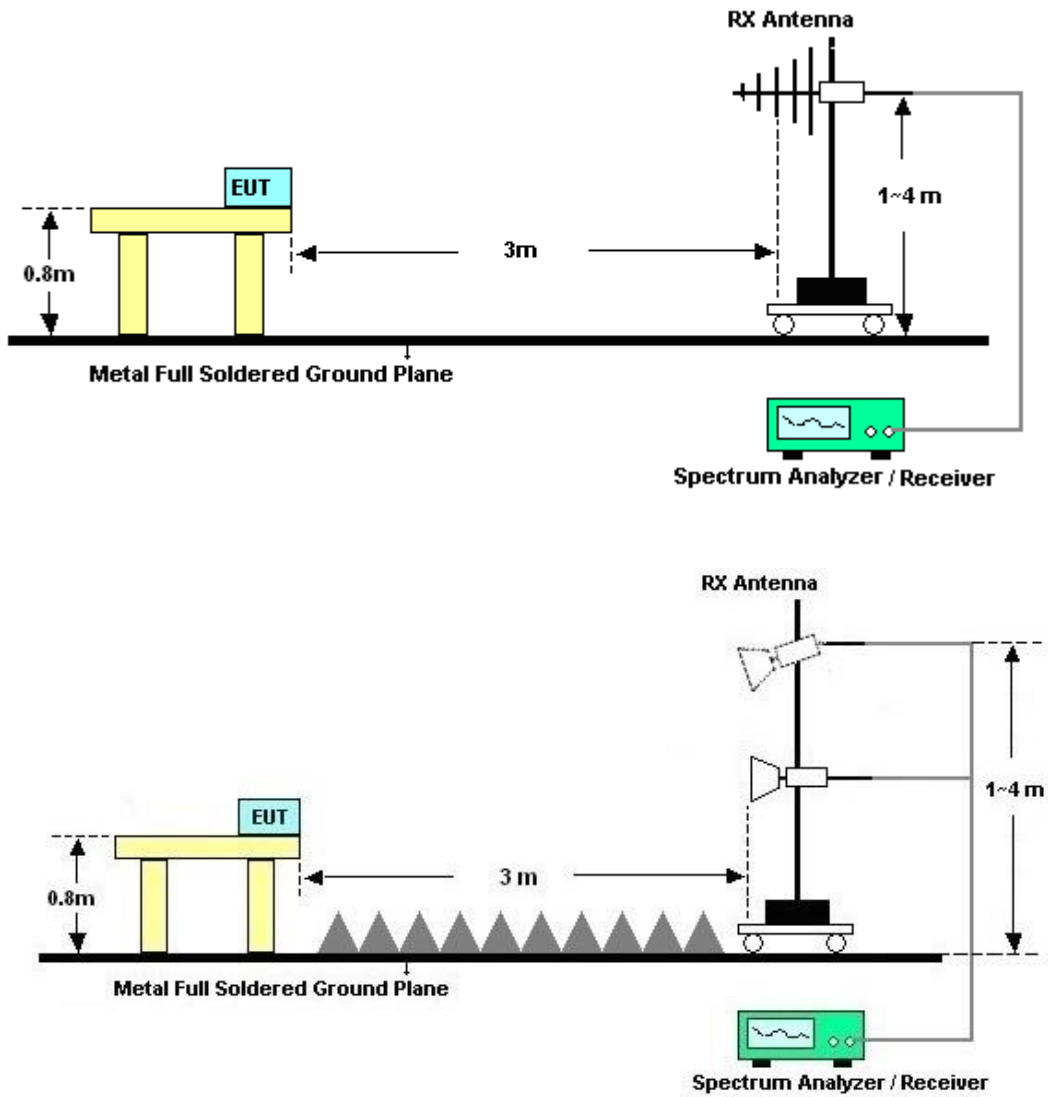



3.2.5. Test Result of Radiated Emission

Test Engineer :	Jack Zhao	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Horizontal

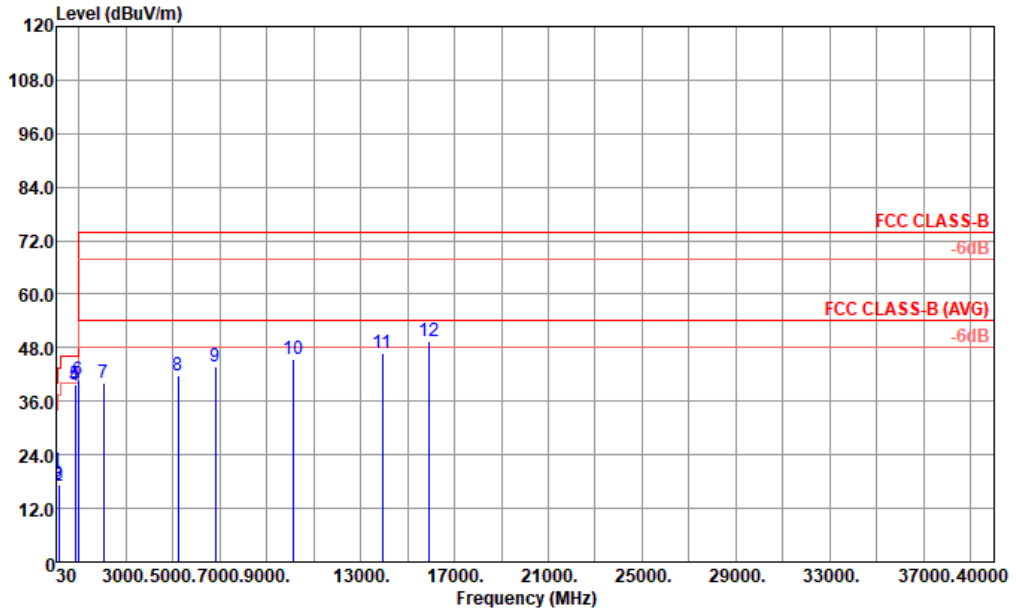


Site : 03CH05-KS
 Condition : FCC CLASS-B 3m 3117 SN 00227860 HORIZONTAL

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	31.94	20.47	-19.53	40.00	27.77	24.04	0.86	32.20	---	---	Peak HORIZONTAL
2	128.94	17.11	-26.39	43.50	29.67	17.60	1.98	32.14	---	---	Peak HORIZONTAL
3	157.07	17.42	-26.08	43.50	30.65	16.68	2.19	32.10	---	---	Peak HORIZONTAL
4	827.34	39.34	-6.66	46.00	37.89	28.80	5.00	32.35	---	---	Peak HORIZONTAL
5	831.22	39.83	-6.17	46.00	38.29	28.89	5.01	32.36	100	0	Peak HORIZONTAL
6	964.11	40.68	-13.32	54.00	36.58	30.88	5.39	32.17	---	---	Peak HORIZONTAL
7	2056.00	40.14	-33.86	74.00	61.10	31.55	6.93	59.44	---	---	Peak HORIZONTAL
8	5224.00	41.65	-32.35	74.00	55.75	34.70	11.25	60.05	---	---	Peak HORIZONTAL
9	6816.00	43.88	-30.12	74.00	55.32	35.92	12.89	60.25	---	---	Peak HORIZONTAL
10	10134.00	45.52	-28.48	74.00	52.76	37.41	16.08	60.73	---	---	Peak HORIZONTAL
11	13923.00	46.66	-27.34	74.00	48.93	38.82	18.97	60.06	---	---	Peak HORIZONTAL
12	15885.00	49.50	-24.50	74.00	48.14	40.81	20.24	59.69	---	---	Peak HORIZONTAL



Test Engineer :	Jack Zhao	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Vertical

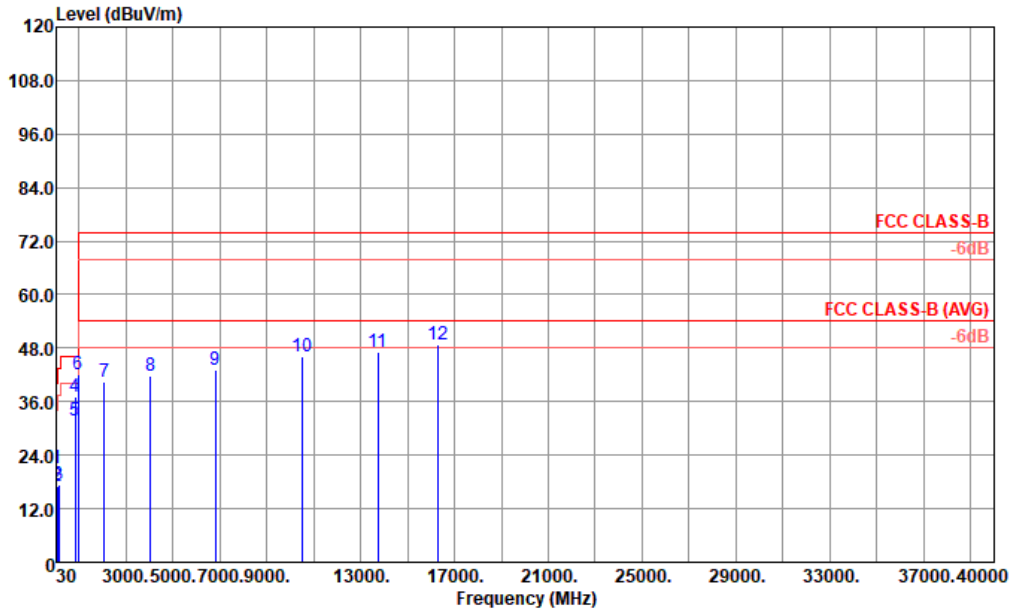

Site : 03CH05-KS
 Condition : FCC CLASS-B 3m 3117 SN 00227860 VERTICAL

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phas
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		
1	30.00	21.13	-18.87	40.00	27.42	25.10	0.81	32.20	---	---	Peak	VERTICAL
2	72.68	16.97	-23.03	40.00	34.91	12.80	1.46	32.20	---	---	Peak	VERTICAL
3	127.00	17.30	-26.20	43.50	29.89	17.60	1.96	32.15	---	---	Peak	VERTICAL
4	827.34	37.01	-8.99	46.00	35.56	28.80	5.00	32.35	200	147	QP	VERTICAL
5	831.22	31.83	-14.17	46.00	30.29	28.89	5.01	32.36	---	---	Peak	VERTICAL
6	967.02	42.05	-11.95	54.00	37.96	30.86	5.40	32.17	---	---	Peak	VERTICAL
7	2064.00	40.43	-33.57	74.00	61.40	31.57	6.95	59.49	---	---	Peak	VERTICAL
8	4064.00	41.80	-32.20	74.00	58.46	33.47	9.81	59.94	---	---	Peak	VERTICAL
9	6808.00	43.21	-30.79	74.00	54.65	35.92	12.89	60.25	---	---	Peak	VERTICAL
10	10485.00	46.00	-28.00	74.00	52.62	37.69	16.34	60.65	---	---	Peak	VERTICAL
11	13752.00	47.11	-26.89	74.00	49.53	38.85	18.81	60.08	---	---	Peak	VERTICAL
12	16326.00	48.86	-25.14	74.00	45.81	41.67	20.54	59.16	---	---	Peak	VERTICAL

Note:

- Level(dBμV/m) = Read Level(dBμV) + Antenna Factor(dB/m) + Cable Loss(dB) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	Apr. 14, 2020	Dec. 16, 2020	Apr. 13, 2021	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 17, 2020	Dec. 16, 2020	Oct. 16, 2021	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Oct. 27, 2020	Dec. 16, 2020	Oct. 26, 2021	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP0000008 11	AC 0V~300V, 45Hz~1000Hz	Oct. 17, 2020	Dec. 16, 2020	Oct. 16, 2021	Conduction (CO01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;M ax 30dBm	Oct. 17, 2020	Dec. 21, 2020	Oct. 16, 2021	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz-44G,MAX 30dB	Apr. 15, 2020	Dec. 21, 2020	Apr. 14, 2021	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz-1GHz	May 30, 2020	Dec. 21, 2020	May 29, 2021	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 26, 2020	Dec. 21, 2020	Apr. 25, 2021	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Nov. 09, 2020	Dec. 21, 2020	Nov. 08, 2021	Radiation (03CH05-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 08, 2020	Dec. 21, 2020	Jan. 07, 2021	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	187289	9KHz-1GHz	Apr. 14, 2020	Dec. 21, 2020	Apr. 13, 2021	Radiation (03CH05-KS)
Amplifier	Keysight	83017A	MY53270316	500MHz~26.5G Hz	Oct. 17, 2020	Dec. 21, 2020	Oct. 16, 2021	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Dec. 21, 2020	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Dec. 21, 2020	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Dec. 21, 2020	NCR	Radiation (03CH05-KS)

NCR: No Calibration Required



5. Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.94dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------