



SAR TEST REPORT

Applicant Honor Device Co., Ltd.
FCC ID 2AYGCHJC-LX3
Product Smart Phone
Model HJC-LX3
Report No. R2009H0246-S1V2
Issue Date February 7, 2021

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **IEEE 1528- 2013, ANSI C95.1: 1992, IEEE C95.1: 1991**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Yu Wang

Guangchang Fan

Prepared by: Yu Wang

Approved by: Guangchang Fan

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



Table of Contents

1	Test Laboratory.....	5
1.1	Notes of the Test Report	5
1.2	Test facility	5
1.3	Testing Location.....	5
1.4	Laboratory Environment.....	6
2	Statement of Compliance	7
3	Description of Equipment under Test.....	9
4	Test Specification, Methods and Procedures	12
5	Operational Conditions during Test	13
5.1	Test Positions.....	13
5.1.1	Against Phantom Head	13
5.1.2	Body Worn Configuration.....	13
5.1.3	Phablet SAR test considerations	14
5.2	Measurement Variability.....	15
5.3	Test Configuration	16
5.3.1	GSM Test Configuration	16
5.3.2	UMTS Test Configuration	16
5.3.3	LTE Test Configuration	20
5.3.4	Additional requirements for TDD LTE specification.....	21
5.3.5	Wi-Fi Test Configuration	25
5.3.6	BT Test Configuration	26
5.3.7	Uplink LTE CA specification.....	27
5.3.8	Dynamic antenna tuning description.....	28
5.3.9	Receiver detection mechanism specification.....	28
6	SAR Measurements System Configuration	30
6.1	SAR Measurement Set-up	30
6.2	DASY5 E-field Probe System.....	31
6.3	SAR Measurement Procedure	32
7	Main Test Equipment.....	34
8	Tissue Dielectric Parameter Measurements & System Verification	35
8.1	Tissue Verification	35
8.2	System Performance Check.....	37
8.3	SAR System Validation	39
9	Normal and Maximum Output Power	40
9.1	GSM Mode	40
9.2	WCDMA Mode	43
9.3	LTE Mode.....	47
9.4	WLAN Mode.....	143
9.5	Bluetooth Mode	150
10	Measured and Reported (Scaled) SAR Results	151
10.1	EUT Antenna Locations	151



10.2	Measured SAR Results	152
10.3	Simultaneous Transmission Analysis	204
11	Measurement Uncertainty	210
ANNEX A: Test Layout.....		211
ANNEX B: System Check Results.....		213
ANNEX C: Highest Graph Results.....		224
ANNEX D: Probe Calibration Certificate.....		319
ANNEX E: D750V3 Dipole Calibration Certificate.....		328
ANNEX F: D835V2 Dipole Calibration Certificate.....		337
ANNEX G: D1750V2 Dipole Calibration Certificate		345
ANNEX H: D1900V2 Dipole Calibration Certificate		353
ANNEX I: D2450V2 Dipole Calibration Certificate		361
ANNEX J: D2600V2 Dipole Calibration Certificate		369
ANNEX K: D5GHzV2 Dipole Calibration Certificate		377
ANNEX L: DAE4 Calibration Certificate.....		391
ANNEX M: The EUT Appearance.....		394
ANNEX N: Test Setup Photos.....		394



Version	Revision description	Issue Date
Rev.0	Initial issue of report.	December 18, 2020
Rev.1	Update description in Page 28, 34 and ANNEX B. Update data in Page 152.	January 8, 2021
Rev.2	Update information in Page 1. Update description in Page 27.	February 7, 2021
Note This revised report (Report No. R2009H0246-S1V2) supersedes and replaces the previously issued report (Report No. R2009H0246-S1V1). Please discard or destroy the previously issued report and dispose of it accordingly.		

1 Test Laboratory

1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2 Test facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

1.3 Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Fan Guangchang
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: fanguangchang@ta-shanghai.com



1.4 Laboratory Environment

Temperature	Min. = 18°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5 Ω
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

2 Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for the EUT are as follows:

Table 1: Highest Reported SAR

Mode	Highest Reported SAR (W/kg)			
	1g SAR Head	1g SAR Body-worn (Separation 15mm)	1g SAR Hotspot (Separation 10mm)	Product Specific 10-g SAR (Separation 0mm)
GSM 850	0.54	0.21	0.42	NA
GSM 1900	0.76	0.22	0.41	NA
WCDMA Band II	1.04	0.45	0.67	NA
WCDMA Band IV	0.99	0.42	0.70	NA
WCDMA Band V	0.65	0.25	0.50	NA
LTE FDD 2	0.85	0.28	0.69	NA
LTE FDD 4	0.75	0.41	0.85	NA
LTE FDD 5	0.67	0.26	0.58	NA
LTE FDD 7	0.58	0.33	0.65	NA
LTE FDD 12	0.64	0.22	0.38	NA
LTE TDD 38	0.73	0.31	0.59	NA
LTE TDD 41	0.76	0.35	0.48	NA
LTE FDD 66	0.77	0.51	0.80	NA
Wi-Fi (2.4G)	0.21	0.17	0.55	NA
Wi-Fi (5G)	0.42	0.24	0.45	1.11
BT	0.16	<0.1	<0.1	NA
Date of Testing: September 10, 2020 ~November 12, 2020				
Date of Sample Received: September 10, 2020				
Note: 1. The device is in compliance with SAR for Uncontrolled Environment /General Population exposure limits (1.6 W/kg and 4.0 W/kg) specified in ANSI C95.1: 1992/IEEE C95.1: 1991, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013. 2.All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.				

Note: 1) The highest Reported SAR for head, body-worn, hotspot, Product Specific 10-g SAR and simultaneous transmission exposure conditions are 1.04 W/kg, 0.51W/kg, 0.85W/kg, 1.11W/kg and 1.46W/kg.

3) For body worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and that positions the handset a minimum of 15mm from the body. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

4) According to TCB workshop October, 2014 RF Exposure Procedures Update (Overlapping LTE



Bands):

a) Main and Second Antenna SAR for LTE Band 17 (Frequency range: 704-716 MHz) is covered by LTE Band 12 (Frequency range 699-716 MHz) due to similar frequency range, same maximum tune up limit and same channel bandwidth.

The device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits according to the FCC rule §2.1093, the ANSI C95.1: 1992/IEEE C95.1: 1991, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013.

HJC-LX3 (Report No.: R2009H0246-S1V2) is a variant model of HJC-LX9 (Report No.: R2009H0243-S1V3). The variant adds LTE band12 /17/66/CA-7C, remove NFC function. Test items tested see the table below. The detailed product change description please refers to the Difference Declaration Letter.

Band	Original (R2009H0243-S1V3)	Variant (R2009H0246-S1V2)
GSM 850	Pass	Only tested the worst case of Original
GSM 1900	Pass	Only tested the worst case of Original
WCDMA Band II	Pass	Only tested the worst case of Original
WCDMA Band IV	Pass	Only tested the worst case of Original
WCDMA Band V	Pass	Only tested the worst case of Original
LTE FDD 2	Pass	Pass
LTE FDD 4	Pass	Only tested the worst case of Original
LTE FDD 5	Pass	Only tested the worst case of Original
LTE FDD 7	Pass	Pass
LTE FDD 12	Not support	Pass
LTE FDD 17	Not support	Pass
LTE TDD 38	Pass	Only tested the worst case of Original
LTE TDD 41	Pass	Only tested the worst case of Original
LTE FDD 66	Not support	Pass
Wi-Fi (2.4G)	Pass	Only tested the worst case of Original
Wi-Fi (5G)	Pass	Only tested the worst case of Original
Bluetooth	Pass	Only tested the worst case of Original

3 Description of Equipment under Test

Client Information

Applicant	Honor Device Co., Ltd.
Applicant address	Suite 3401, Unit A, Building 6, Shum Yip Sky Park, No. 8089, Hongli West Road, Xiangmihu Street, Futian District, Shenzhen, Guangdong 518040, People's Republic of China
Manufacturer	Honor Device Co., Ltd.
Manufacturer address	Suite 3401, Unit A, Building 6, Shum Yip Sky Park, No. 8089, Hongli West Road, Xiangmihu Street, Futian District, Shenzhen, Guangdong 518040, People's Republic of China

General Technologies

Application Purpose:	Class II Permissive Change
EUT Stage:	Identical Prototype
Model:	HJC-LX3
SN:	NBC0120818000419(Battery 1) 019BRD208E001414(Battery 2)
Hardware Version:	HL3JSCM
Software Version:	10.1.1.111(C900E01R1P1)
Antenna Type:	Internal Antenna
Device Class:	B
Wi-Fi Hotspot:	Wi-Fi 2.4G Wi-Fi 5G U-NII-1& U-NII-3
Power Class:	GSM 850:4 GSM 1900:1 UMTS Band II/IV/V:3 LTE FDD 2/4/5/7/12/17/66:3 LTE TDD 38/41:3
Power Level:	GSM 850:level 5 GSM 1900:level 0 UMTS Band II/IV/V:all up bits LTE FDD 2/4/5/7/12/17/66:max power LTE TDD 38/41:max power
EUT Accessory	
Battery 1	Manufacturer: Honor Device Co., Ltd. (Sunwoda Electronic Co.,LTD) Model: HB426589EEW
Battery 2	Manufacturer: Honor Device Co., Ltd. (SCUD (Fujian) Electronics Co., LTD.)



	Model: HB426589EEW
Earphone 1	Manufacturer: BOLUO COUNTY QUANCHENG ELECTRONIC CO.,LTD Model: 1293-3283-3.5mm-339
Earphone 2	Manufacturer: Jiangxi Lianchuang Hongsheng Electronic Co.,LTD Model: MEND1532B528A11
Earphone 3	Manufacturer: FOXCONN INTERCONNECT TECHNOLOGY LIMITED Model: EPAB542-2WH05-DH
Note: The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant.	

Wireless Technology and Frequency Range

Wireless Technology		Modulation	Operating mode	Tx (MHz)		
GSM	850	Voice(GMSK) GPRS(GMSK)	☐ Multi-slot Class:8-1UP ☐ Multi-slot Class:10-2UP	824 ~ 849		
	1900	EGPRS(GMSK,8PSK)	☒ Multi-slot Class:12-4UP ☐ Multi-slot Class:33-4UP	1850 ~ 1910		
	Does this device support DTM (Dual Transfer Mode)? ☐ Yes ☒ No					
UMTS	Band II	QPSK, 16QAM	HSDPA	1850 ~ 1910		
	Band IV		HSUPA	1710 ~ 1755		
	Band V		DC-HSDPA HSPA+	824 ~ 849		
LTE	FDD 2	QPSK, 16QAM, 64QAM	Rel.10	1850 ~ 1910		
	FDD 4			1710 ~ 1755		
	FDD 5			824 ~ 849		
	FDD 7			2500 ~ 2570		
	FDD 12			699 ~ 716		
	FDD 17			704 ~ 716		
	TDD 38			2570 ~ 2620		
	TDD 41			2496 ~ 2690		
	FDD 66			1710 ~ 1780		
	Does this device support Carrier Aggregation (CA) ☒ Yes ☐ No					
	Does this device support SV-LTE (1xRTT-LTE)? ☐ Yes ☒ No					
BT	2.4G	Version 5.1 LE		2402 ~2480		
Wi-Fi	2.4G	DSSS,OFDM	802.11b/g/n HT20	2412 ~ 2462		
		OFDM	802.11n HT40	2422 ~ 2452		
	5G	OFDM	802.11a/n HT20/ HT40/ ac VHT20/ VHT40/ VHT80	5150 ~ 5350 5470 ~ 5850		
			Does this device support MIMO ☐ Yes ☒ No			



4 Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE 1528- 2013, ANSI C95.1: 1992, IEEE C95.1: 1991, the following FCC Published RF exposure KDB procedures:

IEC 62209-1

Reference Standards

KDB 248227 D01 802.11Wi-Fi SAR v02r02

KDB 447498 D01 General RF Exposure Guidance v06

KDB 648474 D04 Handset SAR v01r03

KDB 690783 D01 SAR Listings on Grants v01r03

KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04

KDB 865664 D02 RF Exposure Reporting v01r02

KDB 941225 D01 3G SAR Procedures v03r01

KDB 941225 D05 SAR for LTE Devices v02r05

KDB 941225 D05A LTE Rel.10 KDB Inquiry Sheet v01r02

KDB 941225 D06 Hotspot Mode v02r01

5 Operational Conditions during Test

5.1 Test Positions

5.1.1 Against Phantom Head

Measurements were made in “cheek” and “tilt” positions on both the left hand and right hand sides of the phantom.

The positions used in the measurements were according to IEEE 1528 - 2013 "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate(SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques".

5.1.2 Body Worn Configuration

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations.

Per FCC KDB Publication 648474 D04, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented. Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

5.1.3 Phablet SAR test considerations

For smart phones, with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, that can provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets and support voice calls next to the ear, unless it is confirmed otherwise through KDB inquiries, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance.

- a) The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
- b) The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for product specific 10-g SAR according to the body-equivalent tissue dielectric parameters in KDB Publication 865664 D01 to address interactive hand use exposure conditions. The 1-g SAR at 5 mm for UMPC mini-tablets is not required. When hotspot mode applies, product specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold. The normal tablet procedures in KDB Publication 616217 are required when the overall diagonal dimension of the device is > 20.0 cm. Hotspot mode SAR is not required when normal tablet procedures are applied. Product specific 10-g SAR is also not required for the front (top) surface of larger form factor full size tablets. The more conservative normal tablet SAR results can be used to support phablet mode product specific 10-g SAR.
- c) The simultaneous transmission operating configurations applicable to voice and data transmissions for both phone and mini-tablet modes must be taken into consideration separately for 1-g and 10-g SAR to determine the simultaneous transmission SAR test exclusion and measurement requirements for the relevant wireless modes and exposure conditions.

5.2 Measurement Variability

Per FCC KDB Publication 865664 D01, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
- 4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

5.3 Test Configuration

5.3.1 GSM Test Configuration

According to specification 3GPP TS 51.010, the maximum power of the GSM can do the power reduction for the multi-slot. The allowed power reduction in the multi-slot configuration is as following:

Output power of reductions:

Table 2: The allowed power reduction in the multi-slot configuration

Number of timeslots in uplink assignment	Permissible nominal reduction of maximum output power,(dB)
1	0
2	0 to 3,0
3	1,8 to 4,8
4	3,0 to 6,0

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. GSM voice and GPRS data use GMSK, which is a constant amplitude modulation with minimal peak to average power difference within the time-slot burst. For EDGE, GMSK is used for MCS 1 – MCS 4 and 8-PSK is used for MCS 5 – MCS 9; where 8-PSK has an inherently higher peak-to-average power ratio. The GMSK and 8-PSK EDGE configurations are considered separately for SAR compliance. The GMSK EDGE configurations are grouped with GPRS and considered with respect to time-averaged maximum output power to determine compliance. The 3G SAR test reduction procedure is applied to 8-PSK EDGE with GMSK GPRS/EDGE as the primary mode.

5.3.2 UMTS Test Configuration

5.3.2.1 3G SAR Test Reduction Procedure

The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement channel) configured in Test Loop Mode 1. SAR is selectively confirmed for other physical channel configurations modes according to output power, exposure conditions and device operating capabilities. Maximum output power is verified by applying the applicable versions of 3GPP TS 34.121.

5.3.2.2 Head SAR

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest SAR configuration in 12.2 kbps RMC for head exposure.

5.3.2.3 Body-worn accessory SAR

SAR for body-worn accessory configurations is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the EUT with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCHn, for the highest reported body-worn accessory exposure SAR configuration in 12.2 kbps RMC. When more than 2 DPDCHn are supported by the EUT, it may be necessary to configure additional DPDCHn using FTM (Factory Test Mode) or other chipset based test approaches with parameters similar to those used in 384 kbps and 768 kbps RMC

5.3.2.4 Release 5 HSDPA Test Configuration

The 3G SAR test reduction procedure is applied to HSDPA body-worn accessory configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSDPA using the HSDPA body SAR procedures in the “Release 5 HSDPA Data Devices” section of this document, for the highest SAR body-worn accessory exposure configuration in 12.2 kbps RMC. EUT with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

HSDPA should be configured according to the UE category of a test device. The number of HSDSCH/ HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors (β_c , β_d), and HS-DPCCH power offset parameters (Δ_{ACK} , Δ_{NACK} , Δ_{CQI}) should be set according to values indicated in the Table below. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set.

Table 3: Subtests for UMTS Release 5 HSDPA

Sub-set	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (note 1, note 2)	CM(dB) (note 3)	MPR(dB)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (note 4)	15/15 (note 4)	64	12/15 (note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5
Note1: Δ_{ACK}, Δ_{NACK} and $\Delta_{CQI} = 8 \Rightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Rightarrow \beta_{hs} = 30/15 * \beta_c$ Note2: CM=1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. Note3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period(TF1,TF0) is achieved by setting the signaled gain factors for the reference TFC (TFC1,TF1) to $\beta_c=11/15$ and $\beta_d=15/15$.							

5.3.2.5 Release 6 HSUPA Test Configuration

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body-worn accessory configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSPA using the HSPA body SAR procedures in the “Release 6 HSPA Data Devices” section of this document, for the highest body-worn accessory exposure SAR configuration in 12.2 kbps RMC. When VOIP is applicable for next to the ear head exposure in HSPA, the 3G SAR test reduction procedure is applied to HSPA with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body-worn accessory measurements is tested for next to the ear head exposure.

Due to inner loop power control requirements in HSPA, a communication test set is required for output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSPA are configured according to the β values indicated in Table 2 and other applicable procedures described in the ‘WCDMA EUT and ‘Release 5 HSDPA Data Devices’ sections of this document

Table 4: Sub-Test 5 Setup for Release 6 HSUPA

Sub-set	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} 47/15 β_{ed2} 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS- DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Figure 5.1g.

Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Table 5: HSUPA UE category

UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	E-DCH TTI (ms)	Minimum Spreading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	1.4592
	2	4	10	4	14484	



3	2	4	10	4	14484	1.4592
4	2	8	2	2	5772	2.9185
	2	4	10	2	20000	2.00
5	2	4	10	2	20000	2.00
6 (No DPDCH)	4	8	2	2 SF2 & 2 SF4	11484	5.76
	4	4	10		20000	2.00
7 (No DPDCH)	4	8	2	2 SF2 & 2 SF4	22996	?
	4	4	10		20000	?
NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4. UE Categories 1 to 6 supports QPSK only. UE Category 7 supports QPSK and 16QAM. (TS25.306-7.3.0)						

5.3.2.6 HSPA, HSPA+ and DC-HSDPA Test Configuration

SAR test exclusion may apply to 3GPP Rel. 6 HSPA and Rel. 8 DC-HSDPA. When SAR measurement is required for HSPA or DC-HSDPA, a KDB inquiry is required to confirm that the wireless mode configurations in the test setup have remained stable throughout the SAR measurements. Without prior KDB confirmation to determine the SAR results are acceptable, a PAG is required for equipment approval.

SAR test exclusion for HSPA, HSPA+ and DC-HSDPA is determined according to the following:

- 1) The HSPA procedures are applied to configure 3GPP Rel. 6 HSPA devices in the required sub-test mode(s) to determine SAR test exclusion.
- 2) SAR is required for Rel. 7 HSPA+ when SAR is required for Rel. 6 HSPA; otherwise, the 3G SAR test reduction procedure is applied to (uplink) HSPA+ with 12.2 kbps RMC as the primary mode.³⁶ Power is measured for HSPA+ that supports uplink 16 QAM according to configurations in Table C.11.1.4 of 3GPP TS 34.121-1 to determine SAR test reduction.
- 3) SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.
- 4) Regardless of whether a PBA is required, the following information must be verified and included in the SAR report for devices supporting HSPA, HSPA+ or DC-HSDPA:
 - a) The output power measurement results and applicable release version(s) of 3GPP TS 34.121.
 - i) Power measurement difficulties due to test equipment setup or availability must be resolved between the grantee and its test lab.
 - b) The power measurement results are in agreement with the individual device implementation and specifications. When Enhanced MPR (E-MPR) applies, the normal MPR targets may be modified according to the Cubic Metric (CM) measured by the device, which must be taken into consideration.
 - c) The UE category, operating parameters, such as the β and Δ values used to configure the device for testing, power setback procedures described in 3GPP TS 34.121 for the power measurements, and HSPA/HSPA+ channel conditions (active and stable) for the entire duration of the measurement according to the required E-TFCI and AG index values.

5) When SAR measurement is required, the test configurations, procedures and power measurement results must be clearly described to confirm that the required test parameters are used, including E-TFCI and AG index stability and output power conditions.

Table 6: HS-DSCH UE category

Table 5.1a: FDD HS-DSCH physical layer categories

HS-DSCH category	Maximum number of HS-DSCH codes received	Minimum inter-TTI interval	Maximum number of bits of an HS-DSCH transport block received within an HS-DSCH TTI NOTE 1	Total number of soft channel bits	Supported modulations without MIMO operation or dual cell operation	Supported modulations with MIMO operation and without dual cell operation	Supported modulations with dual cell operation
Category 1	5	3	7298	19200	QPSK, 16QAM	Not applicable (MIMO not supported)	Not applicable (dual cell operation not supported)
Category 2	5	3	7298	28800			
Category 3	5	2	7298	28800			
Category 4	5	2	7298	38400			
Category 5	5	1	7298	57600			
Category 6	5	1	7298	67200			
Category 7	10	1	14411	115200			
Category 8	10	1	14411	134400			
Category 9	15	1	20251	172800			
Category 10	15	1	27952	172800			
Category 11	5	2	3630	14400	QPSK		
Category 12	5	1	3630	28800			
Category 13	15	1	35280	259200	QPSK, 16QAM, 64QAM		
Category 14	15	1	42192	259200			
Category 15	15	1	23370	345600	QPSK, 16QAM		
Category 16	15	1	27952	345600			
Category 17 NOTE 2	15	1	35280	259200	QPSK, 16QAM, 64QAM	—	
			23370	345600	—	QPSK, 16QAM	
Category 18 NOTE 3	15	1	42192	259200	QPSK, 16QAM, 64QAM	—	
			27952	345600	—	QPSK, 16QAM	
Category 19	15	1	35280	518400	QPSK, 16QAM, 64QAM		
Category 20	15	1	42192	518400			
Category 21	15	1	23370	345600	-	-	QPSK, 16QAM
Category 22	15	1	27952	345600			QPSK, 16QAM, 64QAM
Category 23	15	1	35280	518400			
Category 24	15	1	42192	518400			

5.3.3 LTE Test Configuration

LTE modes were tested according to FCC KDB 941225 D05 publication. Please see notes after the tabulated SAR data for required test configurations. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The R&S CMW500 was used for LTE output power measurements and SAR testing. Max power control was used so the UE transmits with maximum output power during SAR testing. SAR must be measured with the maximum TTI (transmit time interval) supported by the device in each LTE configuration.

A) Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

B) MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

C)A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

D) Largest channel bandwidth standalone SAR test requirements

1) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

2) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in 1) are applied to measure the SAR for QPSK with 50% RB allocation.

3) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 1) and 2) are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

4) Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

E) Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section A) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> \frac{1}{2}$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the *reported* SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.

5.3.4 Additional requirements for TDD LTE specification

For Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor

according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

TDD LTE Band supports 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table: Uplink-downlink configurations for uplink-downlink configurations and Table: Configuration of special subframe (lengths of DwPTS/GP/UpPTS) for Special subframe configurations.

Figure 1: Frame structure type 2

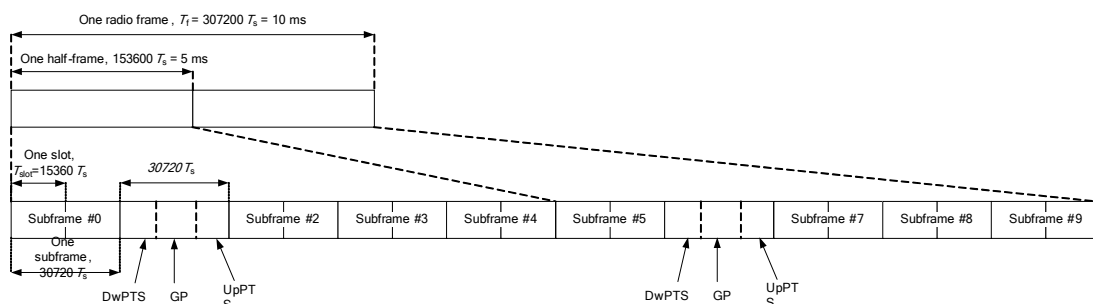


Table 7: Configuration of special subframe (lengths of DwPTS/GP/UpPTS)

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$	-	-
8	$24144 \cdot T_s$			-		
9	$13168 \cdot T_s$			-		

Table 8: Uplink-downlink configurations

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

According to Figure 1, one radio frame is configured by 10 subframes, which consist of Uplink-subframe, Downlink-subframe and Special subframe. For TDD-LTE, the Duty Cycle should be calculated on Uplink-subframes and Special subframes, due to Special subframe containing both Uplink transmissions. So for one radio frame, Duty Cycle can be calculated with formula as below. The count of Uplink subframes are according to Table: Uplink-downlink configurations:

$$\text{Duty cycle} = (30720\text{Ts} \times \text{Ups} + \text{Uplink Component} \times \text{Specials}) / (307200\text{Ts})$$

About the uplink component of Special subframes, we can figure out by Table: Configuration of special subframe (lengths of DwPTS/GP/UpPTS):

$$\text{Uplink Component} = \text{UpPTS}$$


In conclusion, for the TDD LTE Band, Duty Cycle can be calculated with formula as below. All these sets are ok when we test, or we can set as below.

$$\text{Duty cycle} = [(30720\text{Ts} \times \text{Ups}) + \text{UpPTS} \times \text{Specials}] / (307200\text{Ts})$$

And we can get different Duty cycles under different configurations:

Uplink-downlink configuration	Subframe number			Configuration of special subframe							
				Normal cyclic prefix in downlink				Extended cyclic prefix in downlink			
				Normal cyclic prefix in uplink		Extended cyclic prefix in uplink		Normal cyclic prefix in uplink		Extended cyclic prefix in uplink	
	D	S	U	configuration 0~4	configuration 5~9	configuration 0~4	configuration 5~9	configuration 0~3	configuration 4~7	configuration 0~3	configuration 4~7
0	2	2	6	61.43%	62.85%	61.67%	63.33%	61.43%	62.85%	61.67%	63.33%
1	4	2	4	41.43%	42.85%	41.67%	43.33%	41.43%	42.85%	41.67%	43.33%
2	6	2	2	21.43%	22.85%	21.67%	23.33%	21.43%	22.85%	21.67%	23.33%
3	6	1	3	30.71%	31.43%	30.83%	31.67%	30.71%	31.43%	30.83%	31.67%
4	7	1	2	20.71%	21.43%	20.83%	21.67%	20.71%	21.43%	20.83%	21.67%
5	8	1	1	10.71%	11.43%	10.83%	11.67%	10.71%	11.43%	10.83%	11.67%
6	3	2	5	51.43%	52.85%	51.67%	53.33%	51.43%	52.85%	51.67%	53.33%

SAR test Plan: For TDD LTE, SAR should be tested with the highest transmission duty factor (63.33%) using Uplink-downlink configuration 0 and Special subframe configuration 7 for Frame structure type

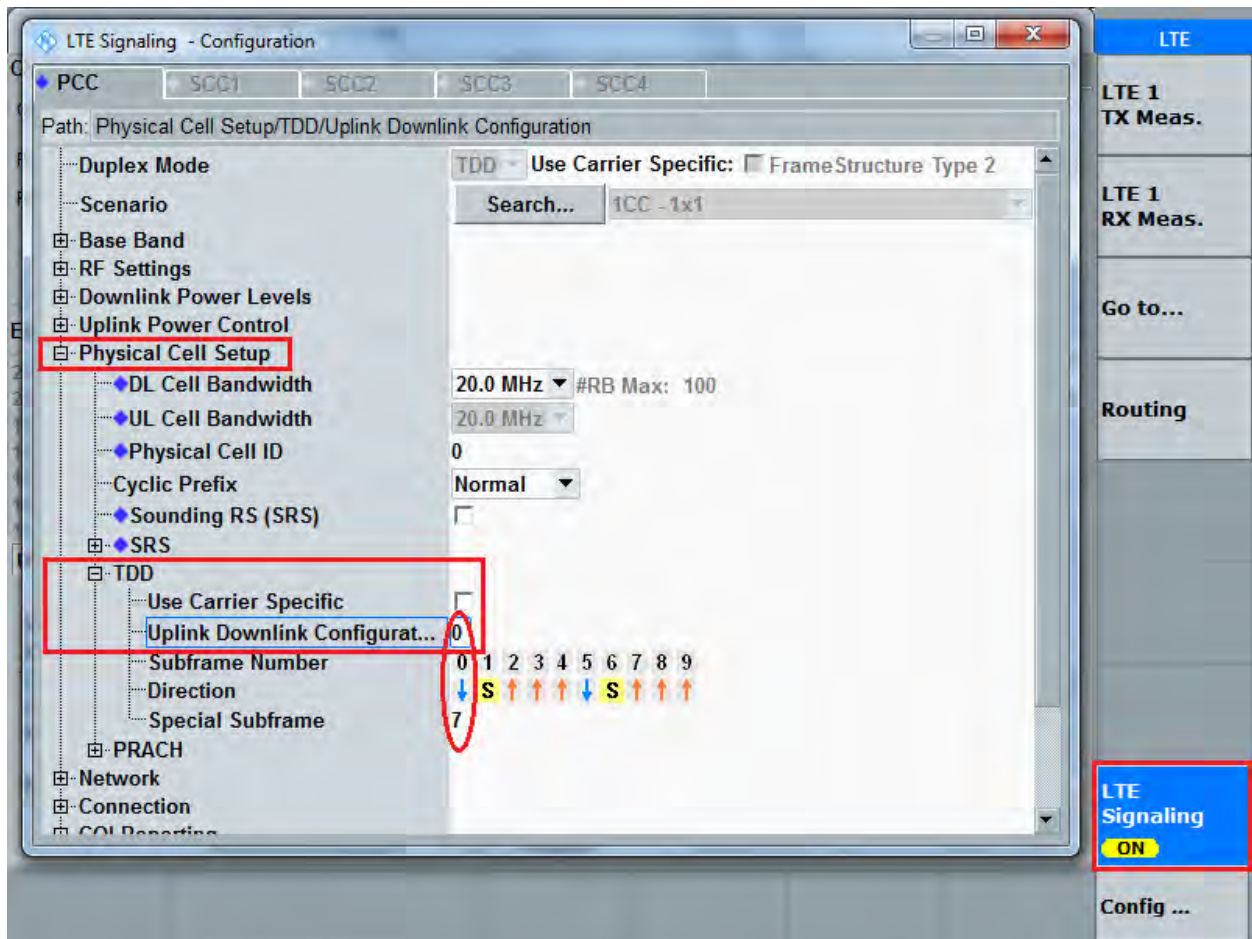

LTE Signaling - Configuration

Path: Physical Cell Setup/TDD/Uplink Downlink Configuration

Physical Cell Setup

- DL Cell Bandwidth: 20.0 MHz #RB Max: 100
- UL Cell Bandwidth: 20.0 MHz
- Physical Cell ID: 0
- Cyclic Prefix: Normal
- Sounding RS (SRS): ☐

TDD

- Use Carrier Specific: ☐
- Uplink Downlink Configurat...: 0

Subframe Number	Direction
0	↓ S
1	↑
2	↑
3	↑
4	↑
5	↓ S
6	↑
7	↑
8	↑
9	↑

LTE Signaling
ON

5.3.5 Wi-Fi Test Configuration

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the *initial test position(s)* by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The *initial test position(s)* is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the *reported SAR* for the *initial test position* is:

- ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the *initial test position* to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the *reported SAR* is ≤ 0.8 W/kg or all required test positions are tested.
 - ✧ For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
 - ✧ When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the *initial test position* and subsequent test positions, when the *reported SAR* is > 0.8 W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the *reported SAR* is ≤ 1.2 W/kg or all required test channels are considered.
 - ✧ The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.

To determine the initial test position, Area Scans were performed to determine the position with the Maximum Value of SAR (measured). The position that produced the highest Maximum Value of SAR is considered the worst case position; thus used as the initial test position.


A Wi-Fi device must be configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools for SAR measurement.



5.3.6 BT Test Configuration

For BT SAR testing, BT engineering testing software installed on the EUT can provide continuous transmitting RF signal with maximum output power. And the CBT control the EUT operating with hopping off and data rate set for DH5.

The SAR measurement takes full account of the BT duty cycle and is reflected in the report, and the duty factor of the device is as follow:

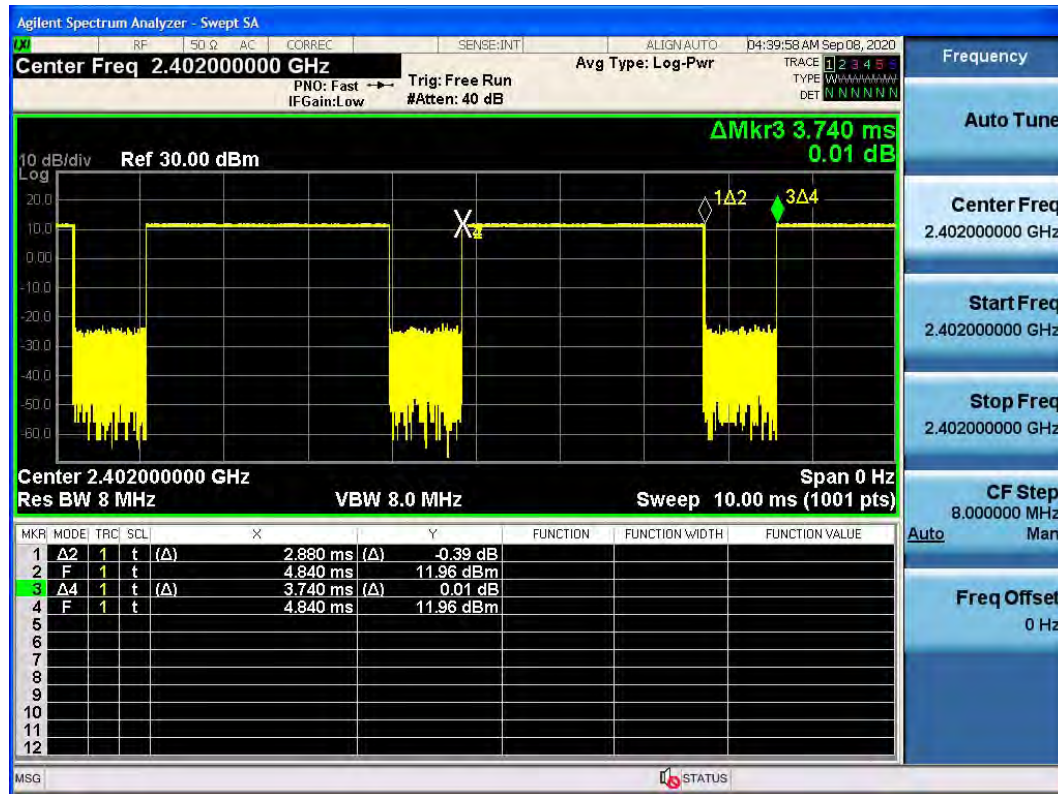

Note: Duty factor= Ton (ms)/ T(on+off) (ms)=2.880/3.740=77%

5.3.7 Uplink LTE CA specification

The device supports LTE advanced Rel. 10, Carrier Aggregation (CA) on downlink for Intra band and inter-band. Uplink CA is supported for Intra band only, more details information is provided in tables below:

E-UTRA CA configuration / Bandwidth combination set						
E-UTRA CA configuration	Uplink CA configurations	Component carriers in order of increasing carrier frequency			Bandwidth combination set	
		Channel bandwidths for carrier [MHz]	Channel bandwidths for carrier [MHz]	Channel bandwidths for carrier [MHz]		
CA_7C	CA_7C	15	15		40	0
		20	20			
		10	20		40	1
		15	15, 20			
		20	10, 15, 20		40	2
		15	10, 15			
		20	15, 20			
		15	15			
		20	10, 15, 20			
CA_38C	CA_38C	15	15		40	0
		20	20			
CA_41C	CA_41C	10	20		40	0
		15	15,20			
		20	10,15,20			
		5,10	20		40	1
		15	15,20			
		20	5,10,15,20			
		10	15,20		40	2
		15	10,15,20			
		20	10,15,20			
		10	20		40	3
		20	20			

NOTE 1: The CA configuration refers to an operating band and a CA bandwidth class specified in Table 5.6A-1 (the indexing letter). Absence of a CA bandwidth class for an operating band implies support of all classes.

5.3.8 Dynamic antenna tuning description

The device supports the dynamic antenna switching function to optimize transmission efficiency for wide range frequency operations. It has two 2G/3G/4G Tx antennas(Main Antenna and Secondary Antenna). It can transmit from either Main Antenna(Ant1、 2) or Secondary Antenna(Ant 3、 4、 10). The device used a DPDT(Double Pole Double Throw) switch to achieve a dynamic antenna switching which is based on the antennas RSSI(Received Signal Strength Indication) comparison and Switch Algorithm. The antenna switching threshold is set to a fixed value(3 dB). The software will choose the Antenna with better RSSI as the main operating Tx antenna by comparing the RSSI between Ant1、 2 and Ant 3、 4. When the RSSI of Ant3/4 is 3 dB higher than Ant1/2, then the Ant2 will be chosen as the main operating Tx antenna. The switching will refer to all of the 2G/3G/4G operation bands.

Summary test plan:

For Dynamic antenna switching SAR test, we will set the Main Antenna / Secondary Antenna to the MAX transmit power level respectively and test the SAR respectively in all applicable RF exposure conditions. Some AT commands or test scripts are supplied to fix the DPDT operation state and choose the antenna, so that only one TX antenna (the Main Antenna or Secondary Antenna) is chosen at a time. All independent antennas and modems will be completely covered by the appropriate SAR measurements and all simultaneous transmission possibilities will be fully considered.

5.3.9 Receiver detection mechanism specification

This device uses the receiver to indicate whether the user is making a call in head scenario or not. The selection between head and body power levels is based on the receiver detection mechanism. It can determine proximity to head or body and set the relevant power level for 2G&3G&4G and Wi-Fi antennas accordingly.

More details information followings:

Main antenna	Power Reduction Level Amount (dBm)								
Power Reduction Scenario	GSM850	GSM1900	UMTS B2	UMTS B4	UMTS B5	LTE B4	LTE B5	LTE B38	LTE B41
1)Receiver on	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2)Receiver off	0.00	0.00	0.50	1.25	0.00	1.00	0.00	0.00	0.00
3)WIFI and LTE In-Device Coexistence	0.00	0.00	0.50	1.25	0.00	1.00	0.00	0.00	0.00
5)hotspot	0.00	0.00	0.50	1.25	0.00	1.00	0.00	0.00	0.00

Main antenna	Power Reduction Level Amount (dBm)				
Power Reduction Scenario	LTE B2	LTE B7	LTE B12	LTE B17	LTE B66
2)Receiver off	0.75	1.00	0.00	0.00	1.00
3)WIFI and LTE In-Device Coexistence	0.75	1.00	0.00	0.00	1.00
5)hotspot	0.75	1.00	0.00	0.00	1.00
1)Receiver on	0.00	0.00	0.00	0.00	0.00

Second antenna	Power Reduction Level Amount (dBm)								
Power Reduction Scenario	GSM850	GSM1900	UMTS B2	UMTS B4	UMTS B5	LTE B4	LTE B5	LTE B38	LTE B41
1)Receiver on	0.00	1.75	3.00	3.50	1.00	4.00	1.00	3.25	3.25
2)Receiver off	0.00	0.00	0.50	0.50	0.00	0.50	0.00	1.00	0.50
3)WIFI and LTE In-Device Coexistence	0.00	2.00	3.50	4.50	0.00	4.50	0.00	3.25	1.50
5)hotspot	0.00	2.00	3.50	4.50	1.00	4.50	1.00	3.25	3.25



Second antenna	Power Reduction Level Amount (dBm)				
Power Reduction Scenario	LTE B2	LTE B7	LTE B12	LTE B17	LTE B66
2)Receiver off	0.50	3.00	0.50	0.50	0.50
3)WIFI and LTE In-Device Coexistence	4.00	5.00	1.50	1.50	4.50
5)hotspot	4.00	6.25	1.50	1.50	4.50
1)Receiver on	4.00	6.25	1.00	1.00	4.00

Wi-Fi Antenna	Power Reduction Level Amount (dBm)									
Power Reduction Scenario	WiFi 2.4G 11b	WiFi 2.4G 11g	WiFi 2.4G 11n 20M	WiFi 2.4G 11n 40M	WiFi 5G 11a	WiFi 5G 11n 20M	WiFi 5G 11n 40M	WiFi 5G 11ac 20M	WiFi 5G 11ac 40M	WiFi 5G 11ac 80M
1)Receiver on	6.5	7.0	6.0	4.0	6.0	6.0	6.0	6.0	6.0	6.0
2)Receiver off	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Table: Summary of Receiver detection mechanism

Antenna	Receiver on (head scenario)	Receiver off (Body/other scenario)
2G&3G&4G second ant	Power Level A1	Power Level B1
2G&3G&4G main ant	Power Level A2	Power Level B2
WiFi Ant	Power Level A3	Power Level B3

Based on the summary table of Receiver detection mechanism above,

For Head SAR test,

- 1) Standalone Head SAR of 2G&3G&4G second ant is evaluated at power level A1 (Receiver on) ;
- 2) Standalone Head SAR of 2G&3G&4G Main ant is evaluated at power level A2 (Receiver on) ;
- 3) Standalone Head SAR of Wifi ant is evaluated at power level A3 (Receiver on) ;


For Body SAR test,

- 1) Standalone Body SAR of 2G&3G&4G second ant is evaluated at power level B1 (Receiver off) ;
- 2) Standalone Body SAR of 2G&3G&4G Main ant is evaluated at power level B2 (Receiver off) ;
- 3) Standalone Body SAR of Wifi ant is evaluated at power level B3 (Receiver off) ;

6 SAR Measurements System Configuration

6.1 SAR Measurement Set-up

The DASY system for performing compliance tests consists of the following items:

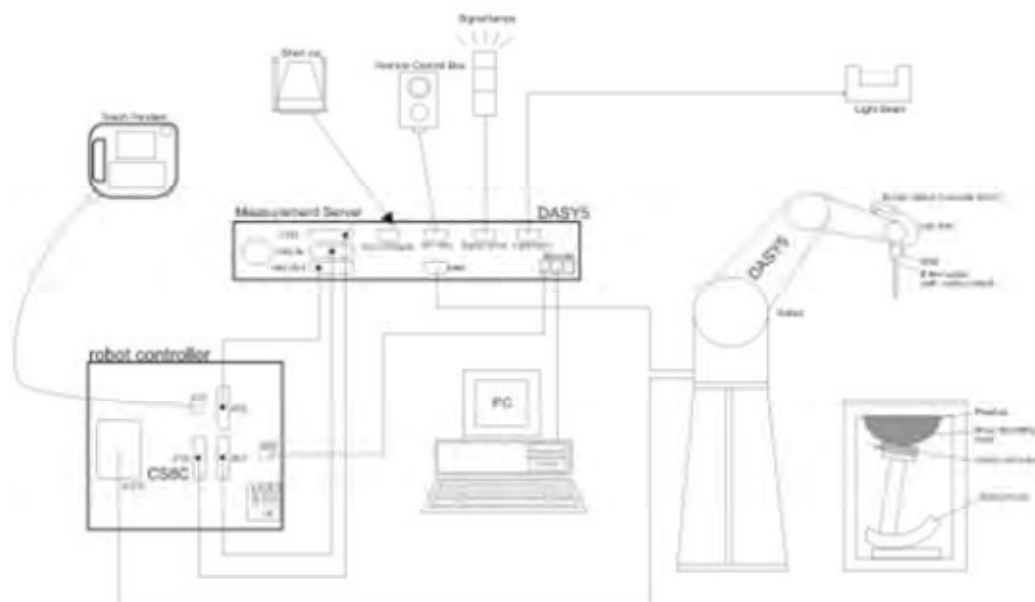

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

6.2 DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe EX3DV4(manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

EX3DV4 Probe Specification

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available
Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure Scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.



E-field Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy was evaluated and found to be better than ± 0.25 dB. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$SAR = C \Delta T / \Delta t$$

Where: Δt = Exposure time (30 seconds),
 C = Heat capacity of tissue (brain or muscle),
 ΔT = Temperature increase due to RF exposure.

Or

$$SAR = |E|^2 \sigma / \rho$$

Where: σ = Simulated tissue conductivity,
 ρ = Tissue density (kg/m^3).

6.3 SAR Measurement Procedure

Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

			≤3GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{zoom}}\Delta y_{\text{zoom}}$			≤2GHz: ≤8mm 2 – 3GHz: ≤5mm*	3 – 4GHz: ≤5mm* 4 – 6GHz: ≤4mm*
Maximum zoom scan spatial resolution, normal to phantom surface	Uniform grid: $\Delta z_{\text{zoom}}(n)$		≤5mm	3 – 4GHz: ≤4mm 4 – 5GHz: ≤3mm 5 – 6GHz: ≤2mm
	Graded grid	$\Delta z_{\text{zoom}}(1)$: between 1 st two points closest to phantom surface	≤4mm	3 – 4GHz: ≤3mm 4 – 5GHz: ≤2.5mm 5 – 6GHz: ≤2mm
		$\Delta z_{\text{zoom}}(n>1)$: between subsequent points	≤1.5• $\Delta z_{\text{zoom}}(n-1)$	
Minimum zoom scan volume	X, y, z		≥30mm	3 – 4GHz: ≥28mm 4 – 5GHz: ≥25mm 5 – 6GHz: ≥22mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4W/kg, ≤8mm, ≤7mm and ≤5mm zoom scan resolution may be applied, respectively, for 2GHz to 3GHz, 3GHz to 4GHz and 4GHz to 6GHz.				

Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



7 Main Test Equipment

Name of Equipment	Manufacturer	Type/Model	Serial Number	Last Cal.	Cal. Due Date
Network analyzer	Agilent	E5071B	MY42404014	2020-05-17	2021-05-16
Dielectric Probe Kit	HP	85070E	US44020115	2020-05-17	2021-05-16
Power meter	Agilent	E4417A	GB41291714	2020-05-17	2021-05-16
Power sensor	Agilent	N8481H	MY50350004	2020-05-17	2021-05-16
Power sensor	Agilent	E9327A	US40441622	2020-05-17	2021-05-16
Dual directional coupler	Agilent	778D-012	50519	/	/
Dual directional coupler	Agilent	777D	50146	/	/
Dual directional coupler	UCL	UCL-DDC0 56G-S	20010600118	/	/
Amplifier	INDEXSAR	IXA-020	0401	2020-05-17	2021-05-16
Wireless communication tester	Anritsu	MT8820C	6201342015	2020-05-17	2021-05-16
Wideband radio communication tester	R&S	CMW 500	113645	2020-05-17	2021-05-16
Base Station Simulator	R&S	CMW270	100673	2020-05-17	2021-05-16
E-field Probe	SPEAG	EX3DV4	3677	2020-07-06	2021-07-05
DAE	SPEAG	DAE4	1291	2020-02-24	2021-02-23
Validation Kit 750MHz	SPEAG	D750V3	1045	2020-08-28	2023-08-27
Validation Kit 835MHz	SPEAG	D835V2	4d020	2020-08-28	2023-08-27
Validation Kit 1750MHz	SPEAG	D1750V2	1033	2020-02-25	2023-02-24
Validation Kit 1900MHz	SPEAG	D1900V2	5d060	2020-08-27	2023-08-26
Validation Kit 2450MHz	SPEAG	D2450V2	786	2020-08-27	2023-08-26
Validation Kit 2600MHz	SPEAG	D2600V2	1025	2018-05-02	2021-05-01
Validation Kit 5GHz	SPEAG	D5GHzV2	1151	2020-02-27	2023-02-26
Temperature Probe	Tianjin jinming	JM222	381	2020-05-25	2021-05-24
Hygrothermograph	Anymetr	HTC-1	TY2020A043	2020-05-19	2021-05-18
Twin SAM Phantom	Speag	SAM1	1534	/	/
Software for Test	Speag	DASY52	/	/	/
Softwarefor Tissue	Agilent	85070	/	/	/

8 Tissue Dielectric Parameter Measurements & System Verification

8.1 Tissue Verification

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 24 hours of use; or earlier if the dielectric parameters can become out of tolerance.

Target values

Frequency (MHz)	Water (%)	Salt (%)	Sugar (%)	Glycol (%)	Preventol (%)	Cellulose (%)	ϵ_r	$\sigma(\text{s/m})$
750	41.448	1.452	56	0	0.1	1.0	41.9	0.89
835	41.450	1.450	56	0	0.1	1.0	41.5	0.90
1750	55.240	0.310	0	44.450	0	0	40.1	1.37
1900	55.242	0.306	0	44.452	0	0	40.0	1.40
2450	62.700	0.500	0	36.800	0	0	39.2	1.80
2600	55.242	0.306	0	44.452	0	0	39.0	1.96
Frequency (MHz)	Water (%)	Diethylenglycol monohexylether			Triton X-100		ϵ_r	$\sigma(\text{s/m})$
5250	65.53	17.24			17.23		35.9	4.71
5600	65.53	17.24			17.23		35.5	5.07
5750	65.53	17.24			17.23		35.4	5.22


Measurements results

Frequency (MHz)	Test Date	Temp ℃	Measured Dielectric Parameters		Target Dielectric Parameters		Limit (Within ±5%)	
			ϵ_r	σ (s/m)	ϵ_r	σ (s/m)	Dev ϵ_r (%)	Dev σ (%)
750	11/12/2020	21.5	41.5	0.92	41.9	0.89	-0.95	3.37
835	10/27/2020	21.5	41.7	0.93	41.5	0.90	0.48	3.33
1750	9/28/2020	21.5	39.8	1.35	40.1	1.37	-0.75	-1.46
	9/29/2020	21.5	40.3	1.39	40.1	1.37	0.50	1.46
1900	10/27/2020	21.5	38.9	1.40	40.0	1.40	-2.75	0.00
2450	9/10/2020	21.5	40.1	1.77	39.2	1.80	2.30	-1.67
2600	11/10/2020	21.5	39.5	1.92	39.0	1.96	1.28	-2.04
	11/11/2020	21.5	38.6	1.93	39.0	1.96	-1.03	-1.53
5250	9/10/2020	21.5	35.5	4.78	35.9	4.71	-1.11	1.49
5600	9/10/2020	21.5	35.2	5.02	35.5	5.07	-0.85	-0.99
5750	9/10/2020	21.5	35.1	5.23	35.4	5.22	-0.85	0.19
Note: The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm for measurements > 3 GHz.								

8.2 System Performance Check

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulates were measured using the dielectric probe kit and the network analyzer. A system check measurement for every day was made following the determination of the dielectric parameters of the Tissue simulates, using the dipole validation kit. The dipole antenna was placed under the flat section of the twin SAM phantom.

System check is performed regularly on all frequency bands where tests are performed with the DASY system.

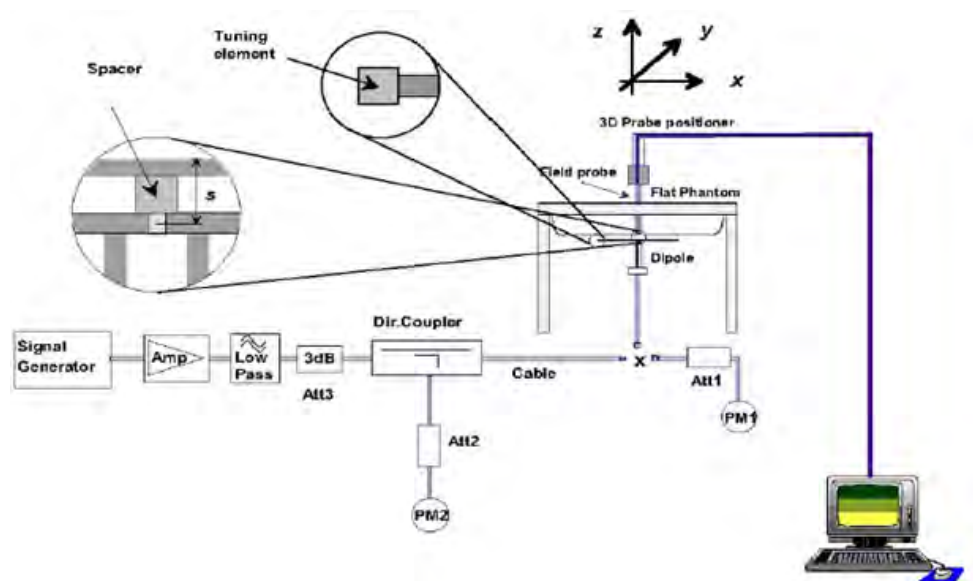

Picture 1 System Performance Check setup



Picture 2 Setup Photo

**Justification for Extended SAR Dipole Calibrations**

Usage of SAR dipoles calibrated less than 3 years ago but more than 1 year ago were confirmed in maintaining return loss (< -20 dB, within 20% of prior calibration) and impedance (within 5 ohm from prior calibration) requirements per extended calibrations in KDB 865664 D01:

Dipole		Date of Measurement	Return Loss(dB)	Δ %	Impedance (Ω)	$\Delta\Omega$
Dipole D2600V2 SN: 1025	Head Liquid	5/2/2018	-22.0	/	48.1	/
		5/1/2019	-22.5	-2.2	48.7	-0.6

System Check results

Frequency (MHz)	Test Date	Temp $^{\circ}\text{C}$	250mW /100mW Measured SAR _{1g} (W/kg)	1W Normalized SAR _{1g} (W/kg)	1W Target SAR _{1g} (W/kg)	Δ % (Limit $\pm 10\%$)	Plot No.
750	11/12/2020	21.5	2.10	8.40	8.37	0.36	1
835	10/27/2020	21.5	2.45	9.80	9.65	1.55	2
1750	9/28/2020	21.5	8.96	35.84	35.90	-0.17	3
	9/29/2020	21.5	9.20	36.80	35.90	2.51	4
1900	10/27/2020	21.5	9.85	39.40	39.50	-0.25	5
2450	9/10/2020	21.5	13.77	55.08	52.30	5.32	6
2600	11/10/2020	21.5	13.89	55.56	54.10	2.70	7
	11/11/2020	21.5	13.91	55.64	54.10	2.85	8
5250	9/10/2020	21.5	7.79	77.90	78.00	-0.13	9
5600	9/10/2020	21.5	7.68	76.80	80.50	-4.60	10
5750	9/10/2020	21.5	7.64	76.40	77.40	-1.29	11

Note: Target Values used derive from the calibration certificate Data Storage and Evaluation.

8.3 SAR System Validation

Per FCC KDB 865664 D02v01, SAR system verification is required to confirm measurement accuracy. The SAR systems (including SAR probes, system components and software versions) used for this device were validated against its performance specifications prior to the SAR measurements. Reference dipoles are used with the required tissue-equivalent media for system validation, according to the procedures outlined in FCC KDB 865664 D01 and IEEE 1528-2013. Since SAR probe calibrations are frequency dependent, each probe calibration point must be validated at a frequency within the valid frequency range of the probe calibration point, using the system that normally operates with the probe for routine SAR measurements and according to the required tissue-equivalent media.

a tabulated summary of the system validation status, measurement frequencies, SAR probes, calibrated signal type(s) and tissue dielectric parameters has been included.

Frequency [MHz]	Date	Probe SN	Probe Type	Probe Cal Point		PERM (Er)	COND (Σ)	CW Validation			Mod. Validation		
								Sensitivity	Probe Linearity	Probe Isotropy	Mod. Type	Duty Factor	PAR
750	7/06/2020	3677	EX3DV4	750	Head	42.81	0.85	PASS	PASS	PASS	FDD	PASS	N/A
835	7/06/2020	3677	EX3DV4	835	Head	42.22	0.90	PASS	PASS	PASS	GMSK	PASS	N/A
1750	7/06/2020	3677	EX3DV4	1750	Head	39.91	1.32	PASS	PASS	PASS	NA	N/A	N/A
1900	7/06/2020	3677	EX3DV4	1900	Head	39.43	1.42	PASS	PASS	PASS	GMSK	PASS	N/A
2450	7/06/2020	3677	EX3DV4	2450	Head	38.19	1.83	PASS	PASS	PASS	OFDM	PASS	PASS
2600	7/06/2020	3677	EX3DV4	2600	Head	37.60	1.99	PASS	PASS	PASS	TDD	PASS	N/A
5250	7/06/2020	3677	EX3DV4	5250	Head	35.36	4.83	PASS	PASS	PASS	OFDM	N/A	PASS
5600	7/06/2020	3677	EX3DV4	5600	Head	34.43	5.29	PASS	PASS	PASS	OFDM	N/A	PASS
5750	7/06/2020	3677	EX3DV4	5750	Head	34.07	5.47	PASS	PASS	PASS	OFDM	N/A	PASS

NOTE: While the probes have been calibrated for both CW and modulated signals, all measurements were performed using communication systems calibrated for CW signals only. Modulations in the table above represent test configurations for which the measurement system has been validated per FCC KDB Publication 865664D01v01 for scenarios when CW probe calibrations are used with other signal types. SAR systems were validated for modulated signals with a periodic duty cycle, such as GMSK, or with a high peak to average ratio (>5dB), such as OFDM according to KDB 865664.

9 Normal and Maximum Output Power

KDB 447498 D01 at the maximum rated output power and within the tune-up tolerance range specified for the product, but not more than 2 dB lower than the maximum tune-up tolerance limit.

9.1 GSM Mode

Main- Antenna

GSM 850 receiver on / Receiver off-body SAR Simultaneous WiFi +body SAR / Hotspot		Burst-Averaged output power(dBm)				Division Factors	Frame-Averaged output power(dBm)			
		Tune-up	Channel/Frenqucy(MHz)				Tune-up	Channel/Frenqucy(MHz)		
		MAX	128 /824.2	190 /836.6	251 /848.8		MAX	128 /824.2	190 /836.6	251 /848.8
GSM	CS	33.20	32.19	32.48	32.25	9.03	24.17	23.16	23.45	23.22
GPRS/ EGPRS (GMSK)	1 Tx Slot	33.20	32.00	32.55	32.37	9.03	24.17	22.97	23.52	23.34
	2 Tx Slots	30.70	29.27	29.92	29.75	6.02	24.68	23.25	23.90	23.73
	3 Tx Slots	28.70	27.15	27.82	27.53	4.26	24.44	22.89	23.56	23.27
	4 Tx Slots	27.20	25.93	26.25	25.92	3.01	24.19	22.92	23.24	22.91
EGPRS (8PSK)	1 Tx Slot	28.70	27.47	27.75	23.62	9.03	19.67	18.44	18.72	14.59
	2 Tx Slots	25.70	24.54	24.77	24.90	6.02	19.68	18.52	18.75	18.88
	3 Tx Slots	24.70	23.40	23.55	23.53	4.26	20.44	19.14	19.29	19.27
	4 Tx Slots	24.20	23.02	23.18	23.25	3.01	21.19	20.01	20.17	20.24
GSM 1900 receiver on / Receiver off-body SAR Simultaneous WiFi +body SAR / Hotspot		Burst-Averaged output power(dBm)				Division Factors	Frame-Averaged output power(dBm)			
		Tune-up	Channel/Frenqucy(MHz)				Tune-up	Channel/Frenqucy(MHz)		
		MAX	512 /1850.2	661 /1880	810 /1909.8		MAX	512 /1850.2	661 /1880	810 /1909.8
GSM	CS	30.20	29.55	29.56	29.55	9.03	21.17	20.52	20.53	20.52
GPRS/ EGPRS (GMSK)	1 Tx Slot	30.20	29.44	29.63	29.48	9.03	21.17	20.41	20.60	20.45
	2 Tx Slots	27.70	26.11	26.39	26.30	6.02	21.68	20.09	20.37	20.28
	3 Tx Slots	25.70	24.06	24.26	24.32	4.26	21.44	19.80	20.00	20.06
	4 Tx Slots	24.20	22.54	22.70	22.68	3.01	21.19	19.53	19.69	19.67
EGPRS (8PSK)	1 Tx Slot	27.20	25.71	25.67	25.58	9.03	18.17	16.68	16.64	16.55
	2 Tx Slots	24.20	22.36	22.33	22.43	6.02	18.18	16.34	16.31	16.41
	3 Tx Slots	21.70	20.62	20.50	20.49	4.26	17.44	16.36	16.24	16.23
	4 Tx Slots	20.70	19.30	19.26	19.33	3.01	17.69	16.29	16.25	16.32
Notes: The worst-case configuration and mode for SAR testing is determined to be as follows: 1. Standalone: GSM 850 GMSK (GPRS) mode with 2 time slots for Max power, GSM 1900 GMSK (GPRS) mode with 2 time slots for Max power, based on the output power measurements above.										



Second – Antenna

GSM 850 receiver on / Receiver off-body SAR Simultaneous WiFi +body SAR /Hotspot		Burst-Averaged output power(dBm)				Division Factors	Frame-Averaged output power(dBm)			
		Tune-up	Channel/Frenqucy(MHz)				Tune-up	Channel/Frenqucy(MHz)		
		MAX	128 /824.2	190 /836.6	251 /848.8		MAX	128 /824.2	190 /836.6	251 /848.8
GSM	CS	33.20	32.16	32.45	32.31	9.03	24.17	23.13	23.42	23.28
GPRS/ EGPRS (GMSK)	1 Tx Slot	33.20	32.30	32.56	32.33	9.03	24.17	23.27	23.53	23.30
	2 Tx Slots	30.70	29.69	29.90	29.70	6.02	24.68	23.67	23.88	23.68
	3 Tx Slots	28.70	27.67	27.85	27.46	4.26	24.44	23.41	23.59	23.20
	4 Tx Slots	27.20	26.39	26.30	25.66	3.01	24.19	23.38	23.29	22.65
EGPRS (8PSK)	1 Tx Slot	28.70	27.32	27.18	27.26	9.03	19.67	18.29	18.15	18.23
	2 Tx Slots	25.70	24.55	24.68	24.53	6.02	19.68	18.53	18.66	18.51
	3 Tx Slots	24.70	23.08	23.04	23.10	4.26	20.44	18.82	18.78	18.84
	4 Tx Slots	24.20	22.96	22.73	22.83	3.01	21.19	19.95	19.72	19.82

1. Standalone: GSM 850 GMSK (GPRS) mode with 2 time slots for Max power, based on the output power measurements above.

GSM 1900 Receiver off-body SAR		Burst-Averaged output power(dBm)				Division Factors	Frame-Averaged output power(dBm)			
		Tune-up	Channel/Frenqucy(MHz)				Tune-up	Channel/Frenqucy(MHz)		
		MAX	512 /1850.2	661 /1880	810 /1909.8		MAX	512 /1850.2	661 /1880	810 /1909.8
GSM	CS	30.20	28.97	29.31	29.15	9.03	21.17	19.94	20.28	20.12
GPRS/ EGPRS (GMSK)	1 Tx Slot	30.20	29.32	29.95	29.13	9.03	21.17	20.29	20.92	20.10
	2 Tx Slots	27.70	26.58	26.76	26.70	6.02	21.68	20.56	20.74	20.68
	3 Tx Slots	25.70	24.81	24.79	24.66	4.26	21.44	20.55	20.53	20.40
	4 Tx Slots	24.20	23.26	23.25	23.32	3.01	21.19	20.25	20.24	20.31
EGPRS (8PSK)	1 Tx Slot	27.20	26.18	26.20	26.13	9.03	18.17	17.15	17.17	17.10
	2 Tx Slots	24.20	23.07	23.19	23.10	6.02	18.18	17.05	17.17	17.08
	3 Tx Slots	21.70	20.85	20.81	20.67	4.26	17.44	16.59	16.55	16.41
	4 Tx Slots	20.70	19.83	19.97	19.90	3.01	17.69	16.82	16.96	16.89
GSM 1900 Receiver on		Burst-Averaged output power(dBm)				Division Factors	Frame-Averaged output power(dBm)			
		Tune-up	Channel/Frenqucy(MHz)				Tune-up	Channel/Frenqucy(MHz)		
		MAX	512 /1850.2	661 /1880	810 /1909.8		MAX	512 /1850.2	661 /1880	810 /1909.8
GSM	CS	28.45	28.25	28.31	28.30	9.03	19.42	19.22	19.28	19.27
GPRS/ EGPRS (GMSK)	1 Tx Slot	28.45	28.27	28.29	28.37	9.03	19.42	19.24	19.26	19.34
	2 Tx Slots	25.95	25.21	25.34	25.55	6.02	19.93	19.19	19.32	19.53
	3 Tx Slots	23.95	23.27	23.27	23.44	4.26	19.69	19.01	19.01	19.18
	4 Tx Slots	22.45	21.95	21.83	21.82	3.01	19.44	18.94	18.82	18.81



EGPRS (8PSK)	1 Tx Slot	25.45	24.85	24.98	24.95	9.03	16.42	15.82	15.95	15.92
	2 Tx Slots	22.45	21.97	21.96	22.01	6.02	16.43	15.95	15.94	15.99
	3 Tx Slots	19.95	19.81	19.90	19.86	4.26	15.69	15.55	15.64	15.60
	4 Tx Slots	18.95	18.58	18.66	18.82	3.01	15.94	15.57	15.65	15.81
GSM 1900 SimultaneousWiFi+ body SAR / Hotspot		Burst-Averaged output power(dBm)				Division Factors	Frame-Averaged output power(dBm)			
		Tune-up	Channel/Frenqucy(MHz)				Tune-up	Channel/Frenqucy(MHz)		
		MAX	512 /1850.2	661 /1880	810 /1909.8		MAX	512 /1850.2	661 /1880	810 /1909.8
GSM	CS	28.20	27.90	27.91	27.93	9.03	19.17	18.87	18.88	18.90
GPRS/ EGPRS (GMSK)	1 Tx Slot	28.20	27.86	27.98	27.80	9.03	19.17	18.83	18.95	18.77
	2 Tx Slots	25.70	24.98	25.15	25.27	6.02	19.68	18.96	19.13	19.25
	3 Tx Slots	23.70	23.06	23.12	23.15	4.26	19.44	18.80	18.86	18.89
	4 Tx Slots	22.20	21.80	21.74	21.66	3.01	19.19	18.79	18.73	18.65
EGPRS (8PSK)	1 Tx Slot	25.20	24.98	25.10	25.11	9.03	16.17	15.95	16.07	16.08
	2 Tx Slots	22.20	21.78	21.85	21.98	6.02	16.18	15.76	15.83	15.96
	3 Tx Slots	19.70	19.30	19.37	19.25	4.26	15.44	15.04	15.11	14.99
	4 Tx Slots	18.70	18.29	18.38	18.10	3.01	15.69	15.28	15.37	15.09

Notes: The worst-case configuration and mode for SAR testing is determined to be as follows:

1. Standalone: GSM 1900 GMSK (GPRS) mode with 2 time slots for Max power, based on the output power measurements above.

9.2 WCDMA Mode

The following tests were completed according to the test requirements outlined in the 3GPP TS34.121 specification.

Main- Antenna

WCDMA		Band II(dBm) Receiver on				Band IV(dBm) Receiver on				Band V(dBm) receiver on / Receiver off-body SAR Simultaneous Wi-Fi + body SAR / Hotspot			
Tx Channel		9262	9400	9538	Tune-up	1312	1413	1513	Tune-up	4132	4183	4233	Tune-up
Frequency(MHz)		1852.4	1880	1907.6	Limit	1712.4	1732.6	1752.6	Limit	826.4	836.6	846.6	Limit
RMC	12.2kbps	23.24	23.28	23.30	24.60	23.77	23.80	23.87	24.70	23.44	23.62	23.24	25.00
AMR	12.2kbps	23.14	23.19	23.17	24.60	23.67	23.71	23.74	24.70	23.34	23.53	23.11	25.00
HSDPA	Sub 1	22.66	22.70	22.72	24.10	23.19	23.22	23.29	24.20	22.86	23.04	22.66	24.50
	Sub 2	22.15	22.19	22.21	23.60	22.68	22.71	22.78	23.70	22.35	22.53	22.15	24.00
	Sub 3	21.64	21.68	21.70	23.10	22.17	22.20	22.27	23.20	21.84	22.02	21.64	23.50
	Sub 4	21.63	21.67	21.69	23.10	22.16	22.19	22.26	23.20	21.83	22.01	21.63	23.50
HSUPA	Sub 1	21.32	21.36	21.38	22.80	21.85	21.88	21.95	22.90	21.52	21.70	21.32	23.20
	Sub 2	18.61	18.65	18.67	20.10	19.14	19.17	19.24	20.20	18.81	18.99	18.61	20.50
	Sub 3	20.09	20.14	20.16	21.60	20.62	20.66	20.73	21.70	20.29	20.48	20.10	22.00
	Sub 4	19.08	19.13	19.15	20.60	19.61	19.65	19.72	20.70	19.28	19.47	19.09	21.00
	Sub 5	22.07	22.12	22.14	23.60	22.60	22.64	22.71	23.70	22.27	22.46	22.08	24.00
DC- HSDPA	Sub 1	22.58	22.64	22.64	24.10	23.11	23.16	23.21	24.20	22.78	22.98	22.58	24.50
	Sub 2	22.07	22.13	22.13	23.60	22.60	22.65	22.70	23.70	22.27	22.47	22.07	24.00
	Sub 3	21.65	21.62	21.64	23.10	22.18	22.14	22.21	23.20	21.85	21.96	21.58	23.50
	Sub 4	21.64	21.61	21.63	23.10	22.17	22.13	22.20	23.20	21.84	21.95	21.57	23.50
HSPA+	16QAM	21.13	21.19	21.21	22.10	21.66	21.71	21.78	22.20	21.33	21.53	21.15	22.50

Note: 1.Per KDB 941225 D01, SAR for each exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".



WCDMA		Band II(dBm) Receiver off-body SAR Simultaneous Wi-Fi + body SAR / Hotspot				Band IV(dBm) Receiver off-body SAR Simultaneous Wi-Fi + body SAR / Hotspot			
Tx Channel		9262	9400	9538	Tune-up	1312	1413	1513	Tune-u
Frequency(MHz)		1852.4	1880	1907.6	Limit	1712.4	1732.6	1752.6	p Limit
RMC	12.2kbps	22.61	22.58	22.68	24.10	22.29	22.36	22.18	23.45
AMR	12.2kbps	22.51	22.49	22.55	24.10	22.19	22.27	22.05	23.45
HSDPA	Sub 1	22.03	22.00	22.10	23.60	21.71	21.78	21.60	22.95
	Sub 2	21.52	21.49	21.59	23.10	21.20	21.27	21.09	22.45
	Sub 3	21.01	20.98	21.08	22.60	20.69	20.76	20.58	21.95
	Sub 4	21.00	20.97	21.07	22.60	20.68	20.75	20.57	21.95
HSUPA	Sub 1	20.69	20.66	20.76	22.30	20.37	20.44	20.26	21.65
	Sub 2	17.98	17.95	18.05	19.60	17.66	17.73	17.55	18.95
	Sub 3	19.46	19.44	19.54	21.10	19.14	19.22	19.04	20.45
	Sub 4	18.45	18.43	18.53	20.10	18.13	18.21	18.03	19.45
	Sub 5	21.44	21.42	21.52	23.10	21.12	21.20	21.02	22.45
DC-HSDPA	Sub 1	21.95	21.94	22.02	23.60	21.63	21.72	21.52	22.95
	Sub 2	21.44	21.43	21.51	23.10	21.12	21.21	21.01	22.45
	Sub 3	21.02	20.92	21.02	22.60	20.70	20.70	20.52	21.95
	Sub 4	21.01	20.91	21.01	22.60	20.69	20.69	20.51	21.95
HSPA+	16QAM	20.50	20.49	20.59	21.60	20.18	20.27	20.09	20.95

Note: 1.Per KDB 941225 D01, SAR for each exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".



Second - Antenna

WCDMA		Band II(dBm) Receiver on				Band IV(dBm) Receiver off-body SAR				Band V(dBm) Receiver off-body SAR Simultaneous Wi-Fi + body SAR			
Tx Channel		9262	9400	9538	Tune-up	1312	1413	1513	Tune-up	4132	4183	4233	Tune-up
Frequency(MHz)		1852.4	1880	1907.6	Limit	1712.4	1732.6	1752.6	Limit	826.4	836.6	846.6	Limit
RMC	12.2kbps	20.54	20.80	20.49	21.60	23.41	23.43	23.29	24.20	23.67	23.74	23.68	25.00
AMR	12.2kbps	20.44	20.71	20.36	21.60	23.31	23.34	23.16	24.20	23.57	23.65	23.55	25.00
HSDPA	Sub 1	19.96	20.22	19.91	21.10	22.83	22.85	22.71	23.70	23.09	23.16	23.10	24.50
	Sub 2	19.45	19.71	19.40	20.60	22.32	22.34	22.20	23.20	22.58	22.65	22.59	24.00
	Sub 3	18.94	19.20	18.89	20.10	21.81	21.83	21.69	22.70	22.07	22.14	22.08	23.50
	Sub 4	18.93	19.19	18.88	20.10	21.80	21.82	21.68	22.70	22.06	22.13	22.07	23.50
HSUPA	Sub 1	18.62	18.88	18.57	19.80	21.49	21.51	21.37	22.40	21.75	21.82	21.76	23.20
	Sub 2	15.91	16.17	15.86	17.10	18.78	18.80	18.66	19.70	19.04	19.11	19.05	20.50
	Sub 3	17.39	17.66	17.35	18.60	20.26	20.29	20.15	21.20	20.52	20.60	20.54	22.00
	Sub 4	16.38	16.65	16.34	17.60	19.25	19.28	19.14	20.20	19.51	19.59	19.53	21.00
	Sub 5	19.37	19.64	19.33	20.60	22.24	22.27	22.13	23.20	22.50	22.58	22.52	24.00
DC-HSDPA	Sub 1	19.88	20.16	19.83	21.10	22.75	22.79	22.63	23.70	23.01	23.10	23.02	24.50
	Sub 2	19.37	19.65	19.32	20.60	22.24	22.28	22.12	23.20	22.50	22.59	22.51	24.00
	Sub 3	18.95	19.14	18.83	20.10	21.82	21.77	21.63	22.70	22.08	22.08	22.02	23.50
	Sub 4	18.94	19.13	18.82	20.10	21.81	21.76	21.62	22.70	22.07	22.07	22.01	23.50
HSPA+	16QAM	18.43	18.71	18.40	19.10	21.30	21.34	21.20	21.70	21.56	21.65	21.59	22.50

Note: 1.Per KDB 941225 D01, SAR for each exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".

WCDMA		Band II(dBm) Simultaneous Wi-Fi + body SAR / Hotspot				Band IV(dBm) Receiver on				Band V(dBm) Receiver on/Hotspot			
Tx Channel		9262	9400	9538	Tune-up	1312	1413	1513	Tune-up	4132	4183	4233	Tune-up
Frequency(MHz)		1852.4	1880	1907.6	Limit	1712.4	1732.6	1752.6	Limit	826.4	836.6	846.6	Limit
RMC	12.2kbps	19.72	19.79	19.66	21.10	20.16	20.18	20.26	21.20	23.59	23.71	23.60	24.00
AMR	12.2kbps	19.62	19.70	19.53	21.10	20.06	20.09	20.13	21.20	23.49	23.62	23.47	24.00
HSDPA	Sub 1	19.14	19.21	19.08	20.60	19.58	19.60	19.68	20.70	23.01	23.13	23.02	23.50
	Sub 2	18.63	18.70	18.57	20.10	19.07	19.09	19.17	20.20	22.50	22.62	22.51	23.00
	Sub 3	18.12	18.19	18.06	19.60	18.56	18.58	18.66	19.70	21.99	22.11	22.00	22.50
	Sub 4	18.11	18.18	18.05	19.60	18.55	18.57	18.65	19.70	21.98	22.10	21.99	22.50
HSUPA	Sub 1	17.80	17.87	17.74	19.30	18.24	18.26	18.34	19.40	21.67	21.79	21.68	22.20
	Sub 2	15.09	15.16	15.03	16.60	15.53	15.55	15.63	16.70	18.96	19.08	18.97	19.50
	Sub 3	16.57	16.65	16.52	18.10	17.01	17.04	17.12	18.20	20.44	20.57	20.46	21.00
	Sub 4	15.56	15.64	15.51	17.10	16.00	16.03	16.11	17.20	19.43	19.56	19.45	20.00



	Sub 5	18.55	18.63	18.50	20.10	18.99	19.02	19.10	20.20	22.42	22.55	22.44	23.00
DC-HSDPA	Sub 1	19.06	19.15	19.00	20.60	19.50	19.54	19.60	20.70	22.93	23.07	22.94	23.50
	Sub 2	18.55	18.64	18.49	20.10	18.99	19.03	19.09	20.20	22.42	22.56	22.43	23.00
	Sub 3	18.13	18.13	18.00	19.60	18.57	18.52	18.60	19.70	22.00	22.05	21.94	22.50
	Sub 4	18.12	18.12	17.99	19.60	18.56	18.51	18.59	19.70	21.99	22.04	21.93	22.50
HSPA+	16QAM	17.61	17.70	17.57	18.60	18.05	18.09	18.17	18.70	21.34	21.40	21.28	21.50

Note: 1.Per KDB 941225 D01, SAR for each exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".

WCDMA		Band II(dBm) Receiver off-body SAR				Band IV(dBm) Simultaneous WiFi+body SAR / Hotspot			
Tx Channel		9262	9400	9538	Tune-up	1312	1413	1513	Tune-u
Frequency(MHz)		1852.4	1880	1907.6	Limit	1712.4	1732.6	1752.6	p Limit
RMC	12.2kbps	22.61	22.76	22.65	24.10	19.39	19.37	19.29	20.20
AMR	12.2kbps	22.51	22.67	22.52	24.10	19.29	19.28	19.16	20.20
HSDPA	Sub 1	22.03	22.18	22.07	23.60	18.81	18.79	18.71	19.70
	Sub 2	21.52	21.67	21.56	23.10	18.30	18.28	18.20	19.20
	Sub 3	21.01	21.16	21.05	22.60	17.79	17.77	17.69	18.70
	Sub 4	21.00	21.15	21.04	22.60	17.78	17.76	17.68	18.70
HSUPA	Sub 1	20.69	20.84	20.73	22.30	17.47	17.45	17.37	18.40
	Sub 2	17.98	18.13	18.02	19.60	14.76	14.74	14.66	15.70
	Sub 3	19.46	19.62	19.51	21.10	16.24	16.23	16.15	17.20
	Sub 4	18.45	18.61	18.50	20.10	15.23	15.22	15.14	16.20
	Sub 5	21.44	21.60	21.49	23.10	18.22	18.21	18.13	19.20
DC-HSDPA	Sub 1	21.95	22.12	21.99	23.60	18.73	18.73	18.63	19.70
	Sub 2	21.44	21.61	21.48	23.10	18.22	18.22	18.12	19.20
	Sub 3	21.02	21.10	20.99	22.60	17.80	17.71	17.63	18.70
	Sub 4	21.01	21.09	20.98	22.60	17.79	17.70	17.62	18.70
HSPA+	16QAM	20.50	20.67	20.56	21.60	17.28	17.28	17.20	17.70

Note: 1.Per KDB 941225 D01, SAR for each exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".

9.3 LTE Mode

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3

Main- Antenna

LTE FDD Band 2 Receiver on				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				18607/1850.7	18900/1880	19193/1909.3	
1.4MHz	QPSK	1	0	22.91	22.89	22.80	24.10
		1	2	23.03	23.05	23.00	24.10
		1	5	22.74	22.60	22.73	24.10
		3	0	22.96	23.00	22.96	24.10
		3	2	23.05	23.05	23.08	24.10
		3	3	22.92	22.87	22.85	24.10
		6	0	21.95	22.07	21.96	23.10
	16QAM	1	0	22.36	22.05	22.15	23.10
		1	2	22.34	22.24	22.27	23.10
		1	5	22.17	22.13	22.06	23.10
		3	0	21.79	21.78	21.83	23.10
		3	2	22.06	21.97	22.04	23.10
		3	3	21.92	21.82	21.94	23.10
		6	0	20.89	20.94	21.04	22.10
	64QAM	1	0	21.58	21.74	21.53	22.10
		1	2	21.74	21.64	21.63	22.10
		1	5	21.67	21.74	21.64	22.10
		3	0	21.64	21.68	21.60	22.10
		3	2	21.64	21.72	21.67	22.10
		3	3	21.64	21.65	21.49	22.10
		6	0	20.68	20.71	20.73	21.10
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				18615/1851.5	18900/1880	19185/1908.5	



3MHz	QPSK	1	0	22.91	22.88	22.80	24.10
		1	7	23.00	23.08	23.02	24.10
		1	14	22.73	22.59	22.72	24.10
		8	0	22.04	22.08	22.06	23.10
		8	4	22.15	22.11	22.15	23.10
		8	7	21.99	21.97	21.92	23.10
		15	0	21.97	22.08	21.96	23.10
	16QAM	1	0	22.33	22.04	22.15	23.10
		1	7	22.35	22.23	22.29	23.10
		1	14	22.16	22.13	22.05	23.10
		8	0	20.88	20.90	20.93	22.10
		8	4	21.13	21.04	21.11	22.10
		8	7	21.00	20.90	21.04	22.10
		15	0	20.90	20.94	21.02	22.10
	64QAM	1	0	21.55	21.73	21.53	22.10
		1	7	21.75	21.63	21.63	22.10
		1	14	21.70	21.72	21.67	22.10
		8	0	20.75	20.84	20.74	21.10
		8	4	20.72	20.81	20.77	21.10
		8	7	20.72	20.73	20.59	21.10
		15	0	20.69	20.71	20.71	21.10
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				18625/1852.5	18900/1880	19175/1907.5	
5MHz	QPSK	1	0	22.92	22.92	22.82	24.10
		1	13	23.02	23.09	23.05	24.10
		1	24	22.76	22.64	22.76	24.10
		12	0	22.06	22.12	22.09	23.10
		12	6	22.18	22.16	22.19	23.10
		12	13	22.02	22.00	21.96	23.10
		25	0	21.99	22.12	22.01	23.10
	16QAM	1	0	22.38	22.06	22.17	23.10
		1	13	22.37	22.26	22.31	23.10
		1	24	22.19	22.17	22.08	23.10
		12	0	20.91	20.92	20.96	22.10
		12	6	21.16	21.09	21.15	22.10
		12	13	21.02	20.94	21.07	22.10
		25	0	20.93	20.99	21.06	22.10
	64QAM	1	0	21.60	21.75	21.55	22.10
		1	13	21.77	21.66	21.65	22.10
		1	24	21.69	21.73	21.66	22.10
		12	0	20.76	20.82	20.73	21.10
		12	6	20.74	20.84	20.78	21.10
		12	13	20.74	20.77	20.62	21.10



		25	0	20.72	20.76	20.75	21.10
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				18650/1855	18900/1880	19150/1905	
10MHz	QPSK	1	0	22.90	22.91	22.79	24.10
		1	25	22.99	23.04	23.01	24.10
		1	49	22.74	22.60	22.73	24.10
		25	0	22.03	22.07	22.05	23.10
		25	13	22.15	22.11	22.15	23.10
		25	25	22.00	21.96	21.91	23.10
		50	0	21.95	22.10	21.97	23.10
	16QAM	1	0	22.36	22.03	22.15	23.10
		1	25	22.34	22.22	22.28	23.10
		1	49	22.16	22.15	22.05	23.10
		25	0	20.88	20.87	20.92	22.10
		25	13	21.14	21.05	21.12	22.10
		25	25	20.99	20.89	21.03	22.10
		50	0	20.90	20.94	21.02	22.10
	64QAM	1	0	21.58	21.76	21.53	22.10
		1	25	21.74	21.66	21.62	22.10
		1	49	21.70	21.71	21.63	22.10
		25	0	20.73	20.77	20.73	21.10
		25	13	20.72	20.80	20.75	21.10
		25	25	20.71	20.72	20.58	21.10
		50	0	20.69	20.71	20.71	21.10
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				18675/1857.5	18900/1880	19125/1902.5	
15MHz	QPSK	1	0	22.93	22.93	22.83	24.10
		1	38	23.01	23.08	23.04	24.10
		1	74	22.77	22.65	22.77	24.10
		36	0	22.06	22.12	22.09	23.10
		36	18	22.17	22.15	22.20	23.10
		36	39	22.02	21.98	21.95	23.10
		75	0	21.95	22.11	21.99	23.10
	16QAM	1	0	22.39	22.07	22.18	23.10
		1	38	22.37	22.24	22.31	23.10
		1	74	22.19	22.17	22.09	23.10
		36	0	20.90	20.91	20.95	22.10
		36	18	21.17	21.10	21.16	22.10
		36	39	21.02	20.94	21.07	22.10
		75	0	20.92	20.98	21.07	22.10
	64QAM	1	0	21.61	21.76	21.56	22.10
		1	38	21.77	21.64	21.65	22.10
		1	74	21.69	21.73	21.67	22.10



		36	0	20.75	20.81	20.72	21.10
		36	18	20.75	20.85	20.79	21.10
		36	39	20.74	20.77	20.62	21.10
		75	0	20.71	20.75	20.76	21.10
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				18700/1860	18900/1880	19100/1900	
20MHz	QPSK	1	0	22.88	22.84	22.77	24.10
		1	50	22.99	23.04	23.00	24.10
		1	99	22.71	22.58	22.69	24.10
		50	0	22.01	22.03	22.02	23.10
		50	25	22.13	22.07	22.12	23.10
		50	50	21.96	21.92	21.88	23.10
		100	0	21.94	22.03	21.92	23.10
	16QAM	1	0	22.06	22.00	22.10	23.10
		1	50	22.31	22.21	22.25	23.10
		1	99	22.14	22.10	22.03	23.10
		50	0	20.85	20.86	20.90	22.10
		50	25	21.10	21.02	21.08	22.10
		50	50	20.97	20.85	21.00	22.10
		100	0	20.88	20.90	20.99	22.10
	64QAM	1	0	21.53	21.69	21.48	22.10
		1	50	21.71	21.61	21.59	22.10
		1	99	21.64	21.66	21.61	22.10
		50	0	20.70	20.76	20.67	21.10
		50	25	20.68	20.77	20.71	21.10
		50	50	20.69	20.68	20.55	21.10
		100	0	20.67	20.67	20.68	21.10

LTE FDD Band 2 Receiver off-body SAR/ Simultaneous Wi-Fi +body SAR /Hotspot				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				18607/1850.7	18900/1880	19193/1909.3	
1.4MHz	QPSK	1	0	22.20	22.17	22.12	23.30
		1	2	22.28	22.38	22.35	23.30
		1	5	22.05	21.98	22.13	23.30
		3	0	22.89	23.08	23.02	23.30
		3	2	22.97	23.13	23.09	23.30
		3	3	23.00	22.87	22.92	23.30
		6	0	21.97	22.00	22.07	23.10
	16QAM	1	0	22.16	22.30	22.35	23.10
		1	2	22.14	22.21	22.22	23.10
		1	5	22.18	22.14	22.26	23.10



		3	0	21.95	22.00	22.00	23.10
		3	2	21.98	22.08	22.08	23.10
		3	3	21.83	21.97	21.88	23.10
		6	0	21.03	21.09	21.02	22.10
	64QAM	1	0	21.54	21.61	21.49	22.10
		1	2	21.74	21.69	21.71	22.10
		1	5	21.66	21.72	21.64	22.10
		3	0	21.62	21.64	21.51	22.10
		3	2	21.73	21.66	21.62	22.10
		3	3	21.56	21.65	21.47	22.10
		6	0	20.74	20.75	20.65	21.10
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				18615/1851.5	18900/1880	19185/1908.5	
3MHz	QPSK	1	0	22.19	22.19	22.11	23.35
		1	7	22.24	22.37	22.36	23.35
		1	14	22.05	21.98	22.13	23.35
		8	0	21.96	22.15	22.11	23.10
		8	4	22.07	22.19	22.16	23.10
		8	7	22.08	21.96	21.98	23.10
		15	0	21.97	22.03	22.08	23.10
	16QAM	1	0	22.16	22.28	22.35	23.10
		1	7	22.14	22.19	22.23	23.10
		1	14	22.17	22.16	22.25	23.10
		8	0	21.04	21.09	21.09	22.10
		8	4	21.06	21.16	21.16	22.10
		8	7	20.90	21.04	20.97	22.10
		15	0	21.04	21.09	21.00	22.10
	64QAM	1	0	21.54	21.63	21.49	22.10
		1	7	21.74	21.71	21.70	22.10
		1	14	21.69	21.69	21.63	22.10
		8	0	20.71	20.73	20.64	21.10
		8	4	20.81	20.74	20.70	21.10
		8	7	20.63	20.72	20.56	21.10
		15	0	20.75	20.75	20.63	21.10
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				18625/1852.5	18900/1880	19175/1907.5	
5MHz	QPSK	1	0	22.22	22.21	22.15	23.35
		1	13	22.26	22.41	22.39	23.35
		1	24	22.08	22.03	22.17	23.35
		12	0	21.99	22.20	22.15	23.10
		12	6	22.09	22.23	22.21	23.10
		12	13	22.10	21.98	22.02	23.10
		25	0	21.97	22.04	22.10	23.10



	16QAM	1	0	22.19	22.32	22.38	23.10
		1	13	22.17	22.21	22.26	23.10
		1	24	22.20	22.18	22.29	23.10
		12	0	21.06	21.13	21.12	22.10
		12	6	21.09	21.21	21.20	22.10
		12	13	20.93	21.09	21.01	22.10
		25	0	21.06	21.13	21.05	22.10
	64QAM	1	0	21.57	21.63	21.52	22.10
		1	13	21.77	21.69	21.73	22.10
		1	24	21.68	21.71	21.67	22.10
		12	0	20.73	20.77	20.63	21.10
		12	6	20.84	20.79	20.74	21.10
		12	13	20.66	20.77	20.60	21.10
		25	0	20.77	20.79	20.68	21.10
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				18650/1855	18900/1880	19150/1905	
10MHz	QPSK	1	0	22.20	22.16	22.12	23.35
		1	25	22.25	22.41	22.37	23.35
		1	49	22.04	21.97	22.12	23.35
		25	0	21.97	22.16	22.12	23.10
		25	13	22.07	22.19	22.16	23.10
		25	25	22.07	21.97	21.99	23.10
		50	0	21.99	22.01	22.07	23.10
	16QAM	1	0	22.13	22.29	22.35	23.10
		1	25	22.15	22.20	22.24	23.10
		1	49	22.17	22.14	22.25	23.10
		25	0	21.04	21.12	21.10	22.10
		25	13	21.05	21.15	21.15	22.10
		25	25	20.91	21.05	20.98	22.10
		50	0	21.04	21.09	21.00	22.10
	64QAM	1	0	21.51	21.60	21.49	22.10
		1	25	21.75	21.68	21.71	22.10
		1	49	21.69	21.70	21.67	22.10
		25	0	20.73	20.80	20.65	21.10
		25	13	20.81	20.75	20.72	21.10
		25	25	20.64	20.73	20.57	21.10
		50	0	20.75	20.75	20.63	21.10
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				18675/1857.5	18900/1880	19125/1902.5	
15MHz	QPSK	1	0	22.21	22.20	22.14	23.35
		1	38	22.27	22.42	22.40	23.35
		1	74	22.07	22.02	22.16	23.35
		36	0	21.99	22.20	22.15	23.10



		36	18	22.10	22.24	22.20	23.10
		36	39	22.10	22.00	22.03	23.10
		75	0	22.01	22.05	22.12	23.10
	16QAM	1	0	22.18	22.31	22.37	23.10
		1	38	22.17	22.23	22.26	23.10
		1	74	22.20	22.18	22.28	23.10
		36	0	21.07	21.14	21.13	22.10
		36	18	21.08	21.20	21.19	22.10
		36	39	20.93	21.09	21.01	22.10
		75	0	21.07	21.14	21.04	22.10
	64QAM	1	0	21.56	21.62	21.51	22.10
		1	38	21.77	21.71	21.73	22.10
		1	74	21.68	21.71	21.66	22.10
		36	0	20.74	20.78	20.64	21.10
		36	18	20.83	20.78	20.73	21.10
		36	39	20.66	20.77	20.60	21.10
		75	0	20.78	20.80	20.67	21.10
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				18700/1860	18900/1880	19100/1900	
20MHz	QPSK	1	0	22.17	22.12	22.09	23.35
		1	50	22.24	22.37	22.35	23.35
		1	99	22.02	21.96	22.09	23.35
		50	0	21.94	22.11	22.08	23.10
		50	25	22.05	22.15	22.13	23.10
		50	50	22.04	21.92	21.95	23.10
		100	0	21.96	21.96	22.03	23.10
	16QAM	1	0	22.21	22.25	22.30	23.10
		1	50	22.11	22.18	22.20	23.10
		1	99	22.15	22.11	22.23	23.10
		50	0	21.01	21.08	21.07	22.10
		50	25	21.02	21.13	21.12	22.10
		50	50	20.88	21.00	20.94	22.10
		100	0	21.02	21.05	20.97	22.10
	64QAM	1	0	21.49	21.56	21.44	22.10
		1	50	21.71	21.66	21.67	22.10
		1	99	21.63	21.64	21.61	22.10
		50	0	20.68	20.72	20.58	21.10
		50	25	20.77	20.71	20.66	21.10
		50	50	20.61	20.68	20.53	21.10
		100	0	20.73	20.71	20.60	21.10



LTE FDD Band 4 Receiver on				Maximum Output Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				19957/1710.7	20175/1732.5	20393/1754.3	
1.4MHz	QPSK	1	0	23.49	23.53	23.49	24.50
		1	2	23.55	23.61	23.59	24.50
		1	5	23.34	23.22	23.34	24.50
		3	0	23.51	23.52	23.48	24.50
		3	2	23.60	23.57	23.58	24.50
		3	3	23.59	23.49	23.46	24.50
		6	0	22.57	22.61	22.55	23.50
	16QAM	1	0	22.66	22.77	22.55	23.50
		1	2	22.64	22.81	22.69	23.50
		1	5	22.38	22.65	22.63	23.50
		3	0	22.56	22.46	22.52	23.50
		3	2	22.56	22.52	22.44	23.50
		3	3	22.52	22.49	22.67	23.50
		6	0	21.47	21.57	21.57	22.50
	64QAM	1	0	21.87	21.91	21.82	22.50
		1	2	22.04	21.95	21.98	22.50
		1	5	21.94	21.72	21.68	22.50
		3	0	21.91	21.94	21.85	22.50
		3	2	22.03	21.90	22.02	22.50
		3	3	21.98	21.98	21.96	22.50
		6	0	21.01	20.99	21.01	21.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				19965/1711.5	20175/1732.5	20385/1753.5	
3MHz	QPSK	1	0	23.51	23.57	23.52	24.50
		1	7	23.53	23.64	23.63	24.50
		1	14	23.37	23.27	23.38	24.50
		8	0	22.61	22.64	22.61	23.50
		8	4	22.72	22.67	22.70	23.50
		8	7	22.69	22.60	22.56	23.50
		15	0	22.57	22.65	22.58	23.50
	16QAM	1	0	22.69	22.79	22.58	23.50
		1	7	22.67	22.81	22.73	23.50
		1	14	22.40	22.69	22.66	23.50
		8	0	21.67	21.59	21.64	22.50
		8	4	21.67	21.65	21.56	22.50
		8	7	21.62	21.61	21.80	22.50
		15	0	21.50	21.61	21.60	22.50
	64QAM	1	0	21.90	21.93	21.85	22.50
1		7	22.07	21.95	22.00	22.50	



		1	14	21.96	21.71	21.71	22.50
		8	0	21.02	21.07	20.97	21.50
		8	4	21.14	21.03	21.14	21.50
		8	7	21.08	21.10	21.09	21.50
		15	0	21.04	21.03	21.04	21.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				19975/1712.5	20175/1732.5	20375/1752.5	
5MHz	QPSK	1	0	23.48	23.55	23.48	24.50
		1	13	23.51	23.60	23.60	24.50
		1	24	23.34	23.22	23.34	24.50
		12	0	22.58	22.59	22.57	23.50
		12	6	22.70	22.63	22.65	23.50
		12	13	22.67	22.58	22.52	23.50
		25	0	22.57	22.64	22.56	23.50
	16QAM	1	0	22.66	22.75	22.55	23.50
		1	13	22.64	22.79	22.70	23.50
		1	24	22.37	22.67	22.62	23.50
		12	0	21.65	21.55	21.61	22.50
		12	6	21.64	21.60	21.52	22.50
		12	13	21.59	21.56	21.76	22.50
		25	0	21.48	21.57	21.55	22.50
	64QAM	1	0	21.87	21.93	21.82	22.50
		1	13	22.04	21.97	21.97	22.50
		1	24	21.97	21.69	21.67	22.50
		12	0	21.00	21.03	20.98	21.50
		12	6	21.11	20.98	21.10	21.50
		12	13	21.05	21.05	21.05	21.50
		25	0	21.02	20.99	20.99	21.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20000/1715	20175/1732.5	20350/1750	
10MHz	QPSK	1	0	23.50	23.56	23.51	24.50
		1	25	23.54	23.65	23.64	24.50
		1	49	23.36	23.26	23.37	24.50
		25	0	22.61	22.64	22.61	23.50
		25	13	22.73	22.68	22.69	23.50
		25	25	22.69	22.62	22.57	23.50
		50	0	22.61	22.66	22.60	23.50
	16QAM	1	0	22.68	22.78	22.57	23.50
		1	25	22.67	22.83	22.73	23.50
		1	49	22.40	22.69	22.65	23.50
		25	0	21.68	21.60	21.65	22.50
		25	13	21.66	21.64	21.55	22.50
		25	25	21.62	21.61	21.80	22.50



	64QAM	50	0	21.51	21.62	21.59	22.50
		1	0	21.89	21.92	21.84	22.50
		1	25	22.07	21.97	22.00	22.50
		1	49	21.96	21.71	21.70	22.50
		25	0	21.03	21.08	20.98	21.50
		25	13	21.13	21.02	21.13	21.50
		25	25	21.08	21.10	21.09	21.50
		50	0	21.05	21.04	21.03	21.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20025/1717.5	20175/1732.5	20325/1747.5	
15MHz	QPSK	1	0	23.49	23.52	23.49	24.50
		1	38	23.52	23.64	23.61	24.50
		1	74	23.33	23.21	23.33	24.50
		36	0	22.59	22.60	22.58	23.50
		36	18	22.70	22.63	22.65	23.50
		36	39	22.66	22.59	22.53	23.50
		75	0	22.59	22.62	22.55	23.50
	16QAM	1	0	22.63	22.76	22.55	23.50
		1	38	22.65	22.80	22.71	23.50
		1	74	22.37	22.65	22.62	23.50
		36	0	21.65	21.58	21.62	22.50
		36	18	21.63	21.59	21.51	22.50
		36	39	21.60	21.57	21.77	22.50
		75	0	21.48	21.57	21.55	22.50
	64QAM	1	0	21.84	21.90	21.82	22.50
		1	38	22.05	21.94	21.98	22.50
		1	74	21.97	21.70	21.71	22.50
		36	0	21.02	21.10	20.99	21.50
		36	18	21.11	20.99	21.12	21.50
		36	39	21.06	21.06	21.06	21.50
		75	0	21.02	20.99	20.99	21.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20050/1720	20175/1732.5	20300/1745	
20MHz	QPSK	1	0	23.46	23.48	23.46	24.50
		1	50	23.51	23.60	23.59	24.50
		1	99	23.31	23.20	23.30	24.50
		50	0	22.56	22.55	22.54	23.50
		50	25	22.68	22.59	22.62	23.50
		50	50	22.63	22.54	22.49	23.50
		100	0	22.56	22.57	22.51	23.50
	16QAM	1	0	22.49	22.72	22.50	23.50
		1	50	22.61	22.78	22.67	23.50
		1	99	22.35	22.62	22.60	23.50



		50	0	21.62	21.54	21.59	22.50
		50	25	21.60	21.57	21.48	22.50
		50	50	21.57	21.52	21.73	22.50
		100	0	21.46	21.53	21.52	22.50
	64QAM	1	0	21.82	21.86	21.77	22.50
		1	50	22.01	21.92	21.94	22.50
		1	99	21.91	21.64	21.65	22.50
		50	0	20.97	21.02	20.92	21.50
		50	25	21.07	20.95	21.06	21.50
		50	50	21.03	21.01	21.02	21.50
		100	0	21.00	20.95	20.96	21.50

LTE FDD Band 4 Receiver off-body SAR / Simultaneous Wi-Fi+ body SAR /Hotspot				Maximum Output Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				19957/1710.7	20175/1732.5	20393/1754.3	
1.4MHz	QPSK	1	0	22.43	22.47	22.49	23.50
		1	2	22.47	22.46	22.50	23.50
		1	5	22.31	22.29	22.34	23.50
		3	0	22.53	22.47	22.54	23.50
		3	2	22.41	22.46	22.46	23.50
		3	3	22.42	22.38	22.41	23.50
		6	0	22.60	22.51	22.49	23.50
	16QAM	1	0	22.72	22.54	22.56	23.50
		1	2	22.70	22.69	22.48	23.50
		1	5	22.73	22.60	22.70	23.50
		3	0	22.42	22.51	22.41	23.50
		3	2	22.45	22.38	22.49	23.50
		3	3	22.41	22.46	22.40	23.50
		6	0	21.56	21.54	21.55	22.50
	64QAM	1	0	22.07	21.93	22.04	22.50
		1	2	22.11	22.09	22.10	22.50
		1	5	21.94	21.93	21.82	22.50
		3	0	21.89	21.90	21.92	22.50
		3	2	22.00	21.97	22.03	22.50
		3	3	21.96	22.03	21.81	22.50
		6	0	20.97	20.99	20.96	21.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				19965/1711.5	20175/1732.5	20385/1753.5	
3MHz	QPSK	1	0	22.45	22.51	22.52	23.50
		1	7	22.45	22.49	22.54	23.50
		1	14	22.34	22.34	22.38	23.50



		8	0	22.63	22.59	22.67	23.50
		8	4	22.53	22.56	22.58	23.50
		8	7	22.52	22.49	22.51	23.50
		15	0	22.60	22.55	22.52	23.50
	16QAM	1	0	22.75	22.56	22.59	23.50
		1	7	22.73	22.69	22.52	23.50
		1	14	22.75	22.64	22.73	23.50
		8	0	21.53	21.64	21.53	22.50
		8	4	21.56	21.51	21.61	22.50
		8	7	21.51	21.58	21.53	22.50
		15	0	21.59	21.58	21.58	22.50
	64QAM	1	0	22.10	21.95	22.07	22.50
		1	7	22.14	22.09	22.12	22.50
		1	14	21.96	21.92	21.85	22.50
		8	0	21.00	21.03	21.04	21.50
		8	4	21.11	21.10	21.15	21.50
		8	7	21.06	21.15	20.94	21.50
		15	0	21.00	21.03	20.99	21.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				19975/1712.5	20175/1732.5	20375/1752.5	
5MHz	QPSK	1	0	22.42	22.49	22.48	23.50
		1	13	22.43	22.45	22.51	23.50
		1	24	22.31	22.29	22.34	23.50
		12	0	22.60	22.54	22.63	23.50
		12	6	22.51	22.52	22.53	23.50
		12	13	22.50	22.47	22.47	23.50
		25	0	22.60	22.54	22.50	23.50
	16QAM	1	0	22.72	22.52	22.56	23.50
		1	13	22.70	22.67	22.49	23.50
		1	24	22.72	22.62	22.69	23.50
		12	0	21.51	21.60	21.50	22.50
		12	6	21.53	21.46	21.57	22.50
		12	13	21.48	21.53	21.49	22.50
		25	0	21.57	21.54	21.53	22.50
	64QAM	1	0	22.07	21.95	22.04	22.50
		1	13	22.11	22.11	22.09	22.50
		1	24	21.97	21.90	21.81	22.50
		12	0	20.98	20.99	21.05	21.50
		12	6	21.08	21.05	21.11	21.50
		12	13	21.03	21.10	20.90	21.50
		25	0	20.98	20.99	20.94	21.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20000/1715	20175/1732.5	20350/1750	



10MHz	QPSK	1	0	22.44	22.50	22.51	23.50
		1	25	22.46	22.50	22.55	23.50
		1	49	22.33	22.33	22.37	23.50
		25	0	22.63	22.59	22.67	23.50
		25	13	22.54	22.57	22.57	23.50
		25	25	22.52	22.51	22.52	23.50
		50	0	22.64	22.56	22.54	23.50
	16QAM	1	0	22.74	22.55	22.58	23.50
		1	25	22.73	22.71	22.52	23.50
		1	49	22.75	22.64	22.72	23.50
		25	0	21.54	21.65	21.54	22.50
		25	13	21.55	21.50	21.60	22.50
		25	25	21.51	21.58	21.53	22.50
		50	0	21.60	21.59	21.57	22.50
	64QAM	1	0	22.09	21.94	22.06	22.50
		1	25	22.14	22.11	22.12	22.50
		1	49	21.96	21.92	21.84	22.50
		25	0	21.01	21.04	21.05	21.50
		25	13	21.10	21.09	21.14	21.50
		25	25	21.06	21.15	20.94	21.50
		50	0	21.01	21.04	20.98	21.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20025/1717.5	20175/1732.5	20325/1747.5	
15MHz	QPSK	1	0	22.43	22.46	22.49	23.50
		1	38	22.44	22.49	22.52	23.50
		1	74	22.30	22.28	22.33	23.50
		36	0	22.61	22.55	22.64	23.50
		36	18	22.51	22.52	22.53	23.50
		36	39	22.49	22.48	22.48	23.50
		75	0	22.62	22.52	22.49	23.50
	16QAM	1	0	22.69	22.53	22.56	23.50
		1	38	22.71	22.68	22.50	23.50
		1	74	22.72	22.60	22.69	23.50
		36	0	21.51	21.63	21.51	22.50
		36	18	21.52	21.45	21.56	22.50
		36	39	21.49	21.54	21.50	22.50
		75	0	21.57	21.54	21.53	22.50
	64QAM	1	0	22.04	21.92	22.04	22.50
		1	38	22.12	22.08	22.10	22.50
		1	74	21.97	21.91	21.85	22.50
		36	0	21.00	21.06	21.06	21.50
		36	18	21.08	21.06	21.13	21.50
		36	39	21.04	21.11	20.91	21.50



		75	0	20.98	20.99	20.94	21.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20050/1720	20175/1732.5	20300/1745	
20MHz	QPSK	1	0	22.40	22.42	22.46	23.50
		1	50	22.43	22.45	22.50	23.50
		1	99	22.28	22.27	22.30	23.50
		50	0	22.58	22.50	22.60	23.50
		50	25	22.49	22.48	22.50	23.50
		50	50	22.46	22.43	22.44	23.50
		100	0	22.59	22.47	22.45	23.50
	16QAM	1	0	22.45	22.49	22.51	23.50
		1	50	22.67	22.66	22.46	23.50
		1	99	22.70	22.57	22.67	23.50
		50	0	21.48	21.59	21.48	22.50
		50	25	21.49	21.43	21.53	22.50
		50	50	21.46	21.49	21.46	22.50
		100	0	21.55	21.50	21.50	22.50
	64QAM	1	0	22.02	21.88	21.99	22.50
		1	50	22.08	22.06	22.06	22.50
		1	99	21.91	21.85	21.79	22.50
		50	0	20.95	20.98	20.99	21.50
		50	25	21.04	21.02	21.07	21.50
		50	50	21.01	21.06	20.87	21.50
		100	0	20.96	20.95	20.91	21.50

LTE FDD Band 5 receiver on / Receiver off-body SAR Simultaneous Wi-Fi+ body SAR / Hotspot				Maximum Output Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				20407/824.7	20525/836.5	20643/848.3	
1.4MHz	QPSK	1	0	23.59	23.62	23.55	25.00
		1	2	23.73	23.74	23.64	25.00
		1	5	23.57	23.63	23.57	25.00
		3	0	23.64	23.56	23.64	25.00
		3	2	23.63	23.63	23.60	25.00
		3	3	23.58	23.58	23.62	25.00
		6	0	22.67	22.68	22.71	24.00
	16QAM	1	0	23.06	23.04	23.03	24.00
		1	2	23.04	23.11	22.86	24.00
		1	5	23.01	23.03	22.98	24.00
		3	0	22.64	22.56	22.59	24.00
		3	2	22.52	22.55	22.54	24.00



		3	3	22.65	22.63	22.48	24.00
		6	0	21.73	21.74	21.83	23.00
	64QAM	1	0	22.58	22.59	22.69	23.00
		1	2	22.66	22.55	22.47	23.00
		1	5	22.47	22.58	22.41	23.00
		3	0	22.37	22.34	22.50	23.00
		3	2	22.48	22.50	22.54	23.00
		3	3	22.44	22.37	22.40	23.00
		6	0	21.56	21.47	21.56	22.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20415/825.5	20525/836.5	20635/847.5	
3MHz	QPSK	1	0	23.59	23.61	23.55	25.00
		1	7	23.70	23.77	23.66	25.00
		1	14	23.56	23.62	23.56	25.00
		8	0	22.72	22.64	22.74	24.00
		8	4	22.73	22.69	22.67	24.00
		8	7	22.65	22.68	22.69	24.00
		15	0	22.69	22.69	22.71	24.00
	16QAM	1	0	23.03	23.03	23.03	24.00
		1	7	23.05	23.10	22.88	24.00
		1	14	23.00	23.03	22.97	24.00
		8	0	21.73	21.68	21.69	23.00
		8	4	21.59	21.62	21.61	23.00
		8	7	21.73	21.71	21.58	23.00
		15	0	21.74	21.74	21.81	23.00
	64QAM	1	0	22.55	22.58	22.69	23.00
		1	7	22.67	22.54	22.47	23.00
		1	14	22.50	22.56	22.44	23.00
		8	0	21.48	21.50	21.64	22.00
		8	4	21.56	21.59	21.64	22.00
		8	7	21.52	21.45	21.50	22.00
		15	0	21.57	21.47	21.54	22.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20425/826.5	20525/836.5	20625/846.5	
5MHz	QPSK	1	0	23.61	23.66	23.58	25.00
		1	13	23.71	23.77	23.68	25.00
		1	24	23.60	23.68	23.61	25.00
		12	0	22.74	22.68	22.77	24.00
		12	6	22.75	22.73	22.72	24.00
		12	13	22.68	22.69	22.72	24.00
		25	0	22.67	22.72	22.74	24.00
	16QAM	1	0	23.09	23.06	23.06	24.00
		1	13	23.07	23.11	22.90	24.00



		1	24	23.03	23.07	23.01	24.00
		12	0	21.75	21.69	21.71	23.00
		12	6	21.63	21.68	21.66	23.00
		12	13	21.75	21.75	21.61	23.00
		25	0	21.76	21.78	21.86	23.00
	64QAM	1	0	22.61	22.61	22.72	23.00
		1	13	22.69	22.55	22.49	23.00
		1	24	22.49	22.57	22.44	23.00
		12	0	21.48	21.47	21.62	22.00
		12	6	21.59	21.63	21.66	22.00
		12	13	21.54	21.49	21.53	22.00
		25	0	21.59	21.51	21.59	22.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20450/829	20525/836.5	20600/844	
10MHz	QPSK	1	0	23.56	23.57	23.52	25.00
		1	25	23.69	23.73	23.64	25.00
		1	49	23.54	23.61	23.53	25.00
		25	0	22.69	22.59	22.70	24.00
		25	13	22.71	22.65	22.64	24.00
		25	25	22.62	22.63	22.65	24.00
		50	0	22.66	22.64	22.67	24.00
	16QAM	1	0	22.89	22.99	22.98	24.00
		1	25	23.01	23.08	22.84	24.00
		1	49	22.98	23.00	22.95	24.00
		25	0	21.70	21.64	21.66	23.00
		25	13	21.56	21.60	21.58	23.00
		25	25	21.70	21.66	21.54	23.00
		50	0	21.72	21.70	21.78	23.00
	64QAM	1	0	22.53	22.54	22.64	23.00
		1	25	22.63	22.52	22.43	23.00
		1	49	22.44	22.50	22.38	23.00
		25	0	21.43	21.42	21.57	22.00
		25	13	21.52	21.55	21.58	22.00
		25	25	21.49	21.40	21.46	22.00
		50	0	21.55	21.43	21.51	22.00

LTE FDD Band 7 Receiver on				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				20775/2502.5	21100/2535	21425/2567.5	
5MHz	QPSK	1	0	23.39	23.61	23.31	24.50
		1	13	23.23	23.61	23.61	24.50
		1	24	23.42	23.44	23.38	24.50



		12	0	22.60	22.67	22.39	23.50
		12	6	22.67	22.70	22.46	23.50
		12	13	22.70	22.71	22.58	23.50
		25	0	22.63	22.75	22.57	23.50
	16QAM	1	0	22.89	22.55	22.70	23.50
		1	13	22.87	22.77	22.89	23.50
		1	24	22.97	22.86	22.95	23.50
		12	0	21.78	21.65	21.73	22.50
		12	6	21.82	21.66	21.77	22.50
		12	13	21.86	21.70	21.82	22.50
		25	0	21.79	21.64	21.76	22.50
	64QAM	1	0	22.27	22.46	22.25	22.50
		1	13	22.44	22.33	22.32	22.50
		1	24	22.41	22.44	22.34	22.50
		12	0	21.44	21.51	21.46	21.50
		12	6	21.42	21.51	21.48	21.50
		12	13	21.39	21.46	21.29	21.50
		25	0	21.36	21.44	21.41	21.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20800/2505	21100/2535	21400/2565	
10MHz	QPSK	1	0	23.42	23.63	23.35	24.50
		1	25	23.25	23.65	23.64	24.50
		1	49	23.45	23.49	23.42	24.50
		25	0	22.63	22.72	22.43	23.50
		25	13	22.69	22.74	22.51	23.50
		25	25	22.72	22.73	22.62	23.50
		50	0	22.63	22.76	22.59	23.50
	16QAM	1	0	22.92	22.59	22.73	23.50
		1	25	22.90	22.79	22.92	23.50
		1	49	23.00	22.88	22.99	23.50
		25	0	21.80	21.69	21.76	22.50
		25	13	21.85	21.71	21.81	22.50
		25	25	21.89	21.75	21.86	22.50
		50	0	21.81	21.68	21.81	22.50
	64QAM	1	0	22.30	22.46	22.28	22.50
		1	25	22.47	22.31	22.35	22.50
		1	49	22.40	22.46	22.38	22.50
		25	0	21.46	21.55	21.45	21.50
		25	13	21.45	21.56	21.52	21.50
		25	25	21.42	21.51	21.33	21.50
		50	0	21.38	21.48	21.46	21.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20825/2507.5	21100/2535	21375/2562.5	



15MHz	QPSK	1	0	23.40	23.58	23.32	24.50
		1	38	23.24	23.65	23.62	24.50
		1	74	23.41	23.43	23.37	24.50
		36	0	22.61	22.68	22.40	23.50
		36	18	22.67	22.70	22.46	23.50
		36	39	22.69	22.72	22.59	23.50
		75	0	22.65	22.73	22.56	23.50
	16QAM	1	0	22.86	22.56	22.70	23.50
		1	38	22.88	22.78	22.90	23.50
		1	74	22.97	22.84	22.95	23.50
		36	0	21.78	21.68	21.74	22.50
		36	18	21.81	21.65	21.76	22.50
		36	39	21.87	21.71	21.83	22.50
		75	0	21.79	21.64	21.76	22.50
	64QAM	1	0	22.24	22.43	22.25	22.50
		1	38	22.45	22.30	22.33	22.50
		1	74	22.41	22.45	22.38	22.50
		36	0	21.46	21.58	21.47	21.50
		36	18	21.42	21.52	21.50	21.50
		36	39	21.40	21.47	21.30	21.50
		75	0	21.36	21.44	21.41	21.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20850/2510	21100/2535	21350/2560	
20MHz	QPSK	1	0	23.37	23.54	23.29	24.50
		1	50	23.23	23.61	23.60	24.50
		1	99	23.39	23.42	23.34	24.50
		50	0	22.58	22.63	22.36	23.50
		50	25	22.65	22.66	22.43	23.50
		50	50	22.66	22.67	22.55	23.50
		100	0	22.62	22.68	22.52	23.50
	16QAM	1	0	22.65	22.52	22.65	23.50
		1	50	22.84	22.76	22.86	23.50
		1	99	22.95	22.81	22.93	23.50
		50	0	21.75	21.64	21.71	22.50
		50	25	21.78	21.63	21.73	22.50
		50	50	21.84	21.66	21.79	22.50
		100	0	21.77	21.60	21.73	22.50
	64QAM	1	0	22.22	22.39	22.20	22.50
		1	50	22.41	22.28	22.29	22.50
		1	99	22.35	22.39	22.32	22.50
		50	0	21.41	21.50	21.40	21.50
		50	25	21.38	21.48	21.44	21.50
		50	50	21.37	21.42	21.26	21.50



		100	0	21.34	21.40	21.38	21.50
--	--	-----	---	-------	-------	-------	-------

LTE FDD Band 7 Receiver off-body SAR/ Simultaneous Wi-Fi +body SAR /Hotspot				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				20775/2502.5	21100/2535	21425/2567.5	
5MHz	QPSK	1	0	22.62	22.59	22.53	23.50
		1	13	22.81	22.80	22.86	23.50
		1	24	22.59	22.55	22.55	23.50
		12	0	22.74	22.80	22.78	23.50
		12	6	22.85	22.79	22.72	23.50
		12	13	22.79	22.76	22.77	23.50
		25	0	22.75	22.70	22.80	23.50
	16QAM	1	0	22.95	22.72	22.59	23.50
		1	13	22.94	22.83	22.95	23.50
		1	24	22.84	22.89	22.50	23.50
		12	0	21.76	21.82	21.67	22.50
		12	6	21.92	21.82	21.80	22.50
		12	13	21.67	21.78	21.83	22.50
		25	0	21.78	21.76	21.72	22.50
	64QAM	1	0	22.20	22.36	22.18	22.50
		1	13	22.32	22.14	22.20	22.50
		1	24	22.26	22.35	22.21	22.50
		12	0	21.30	21.37	21.32	21.50
		12	6	21.32	21.44	21.41	21.50
		12	13	21.24	21.43	21.20	21.50
		25	0	21.19	21.39	21.34	21.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20800/2505	21100/2535	21400/2565	
10MHz	QPSK	1	0	22.60	22.58	22.50	23.50
		1	25	22.78	22.75	22.82	23.50
		1	49	22.57	22.51	22.52	23.50
		25	0	22.71	22.75	22.74	23.50
		25	13	22.82	22.74	22.68	23.50
		25	25	22.77	22.72	22.72	23.50
		50	0	22.71	22.68	22.76	23.50
	16QAM	1	0	22.93	22.69	22.57	23.50
		1	25	22.91	22.79	22.92	23.50
		1	49	22.81	22.87	22.47	23.50
		25	0	21.73	21.77	21.63	22.50
		25	13	21.90	21.78	21.77	22.50
		25	25	21.64	21.73	21.79	22.50



	64QAM	50	0	21.75	21.71	21.68	22.50
		1	0	22.18	22.37	22.16	22.50
		1	25	22.29	22.14	22.17	22.50
		1	49	22.27	22.33	22.18	22.50
		25	0	21.27	21.32	21.32	21.50
		25	13	21.30	21.40	21.38	21.50
		25	25	21.21	21.38	21.16	21.50
		50	0	21.16	21.34	21.30	21.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20825/2507.5	21100/2535	21375/2562.5	
15MHz	QPSK	1	0	22.63	22.60	22.54	23.50
		1	38	22.80	22.79	22.85	23.50
		1	74	22.60	22.56	22.56	23.50
		36	0	22.74	22.80	22.78	23.50
		36	18	22.84	22.78	22.73	23.50
		36	39	22.79	22.74	22.76	23.50
		75	0	22.71	22.69	22.78	23.50
	16QAM	1	0	22.96	22.73	22.60	23.50
		1	38	22.94	22.81	22.95	23.50
		1	74	22.84	22.89	22.51	23.50
		36	0	21.75	21.81	21.66	22.50
		36	18	21.93	21.83	21.81	22.50
		36	39	21.67	21.78	21.83	22.50
		75	0	21.77	21.75	21.73	22.50
	64QAM	1	0	22.21	22.37	22.19	22.50
		1	38	22.32	22.12	22.20	22.50
		1	74	22.26	22.35	22.22	22.50
		36	0	21.29	21.36	21.31	21.50
		36	18	21.33	21.45	21.42	21.50
		36	39	21.24	21.43	21.20	21.50
		75	0	21.18	21.38	21.35	21.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20850/2510	21100/2535	21350/2560	
20MHz	QPSK	1	0	22.58	22.51	22.48	23.50
		1	50	22.78	22.75	22.81	23.50
		1	99	22.54	22.49	22.48	23.50
		50	0	22.69	22.71	22.71	23.50
		50	25	22.80	22.70	22.65	23.50
		50	50	22.73	22.68	22.69	23.50
		100	0	22.70	22.61	22.71	23.50
	16QAM	1	0	22.76	22.66	22.52	23.50
		1	50	22.88	22.78	22.89	23.50
		1	99	22.79	22.82	22.45	23.50



		50	0	21.70	21.76	21.61	22.50
		50	25	21.86	21.75	21.73	22.50
		50	50	21.62	21.69	21.76	22.50
		100	0	21.73	21.67	21.65	22.50
	64QAM	1	0	22.13	22.30	22.11	22.50
		1	50	22.26	22.09	22.14	22.50
		1	99	22.21	22.28	22.16	22.50
		50	0	21.24	21.31	21.26	21.50
		50	25	21.26	21.37	21.34	21.50
		50	50	21.19	21.34	21.13	21.50
		100	0	21.14	21.30	21.27	21.50

LTE FDD Band 12 Receiver on /Receiver off-body SAR/ Simultaneous Wi-Fi +body SAR /Hotspot				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				23017/699.7	23095/707.5	23173/715.3	
1.4MHz	QPSK	1	0	23.23	23.19	23.25	24.70
		1	2	23.32	23.36	23.28	24.70
		1	5	23.37	23.28	23.29	24.70
		3	0	23.26	23.34	23.20	24.70
		3	2	23.29	23.31	23.24	24.70
		3	3	23.28	23.44	23.20	24.70
		6	0	22.36	22.46	22.32	23.70
	16QAM	1	0	22.59	22.39	22.67	23.70
		1	2	22.57	22.51	22.62	23.70
		1	5	22.49	22.44	22.54	23.70
		3	0	22.35	22.26	22.40	23.70
		3	2	22.41	22.35	22.47	23.70
		3	3	22.46	22.40	22.51	23.70
		6	0	21.49	21.46	21.59	22.70
	64QAM	1	0	21.85	21.79	21.95	22.70
		1	2	21.99	21.93	22.06	22.70
		1	5	21.97	21.90	22.02	22.70
		3	0	21.81	21.66	21.88	22.70
		3	2	21.87	21.78	21.95	22.70
		3	3	21.85	21.79	21.90	22.70
		6	0	20.92	20.89	21.02	21.70
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				23025/700.5	23095/707.5	23165/714.5	
3MHz	QPSK	1	0	23.24	23.22	23.27	24.70
		1	7	23.31	23.40	23.33	24.70
		1	14	23.39	23.32	23.32	24.70



		8	0	22.36	22.46	22.33	23.70
		8	4	22.42	22.42	22.35	23.70
		8	7	22.38	22.57	22.31	23.70
		15	0	22.40	22.51	22.37	23.70
	16QAM	1	0	22.61	22.40	22.69	23.70
		1	7	22.60	22.53	22.66	23.70
		1	14	22.51	22.48	22.56	23.70
		8	0	21.47	21.40	21.53	22.70
		8	4	21.51	21.47	21.58	22.70
		8	7	21.56	21.52	21.64	22.70
		15	0	21.53	21.51	21.61	22.70
	64QAM	1	0	21.87	21.80	21.97	22.70
		1	7	22.02	21.95	22.08	22.70
		1	14	21.99	21.89	22.04	22.70
		8	0	20.93	20.80	21.01	21.70
		8	4	20.97	20.90	21.06	21.70
		8	7	20.95	20.91	21.03	21.70
		15	0	20.96	20.94	21.04	21.70
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				23035/701.5	23095/707.5	23155/713.5	
5MHz	QPSK	1	0	23.23	23.18	23.25	24.70
		1	13	23.29	23.39	23.30	24.70
		1	24	23.36	23.27	23.28	24.70
		12	0	22.34	22.42	22.30	23.70
		12	6	22.39	22.37	22.31	23.70
		12	13	22.35	22.54	22.27	23.70
		25	0	22.38	22.47	22.32	23.70
	16QAM	1	0	22.56	22.38	22.67	23.70
		1	13	22.58	22.50	22.64	23.70
		1	24	22.48	22.44	22.53	23.70
		12	0	21.44	21.38	21.50	22.70
		12	6	21.48	21.42	21.54	22.70
		12	13	21.54	21.48	21.61	22.70
		25	0	21.50	21.46	21.57	22.70
	64QAM	1	0	21.82	21.78	21.95	22.70
		1	13	22.00	21.92	22.06	22.70
		1	24	22.00	21.88	22.05	22.70
		12	0	20.92	20.82	21.02	21.70
		12	6	20.95	20.87	21.05	21.70
		12	13	20.93	20.87	21.00	21.70
		25	0	20.93	20.89	21.00	21.70
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				23060/704	23095/707.5	23130/711	



10MHz	QPSK	1	0	23.20	23.14	23.22	24.70
		1	25	23.28	23.35	23.28	24.70
		1	49	23.34	23.26	23.25	24.70
		25	0	22.31	22.37	22.26	23.70
		25	13	22.37	22.33	22.28	23.70
		25	25	22.32	22.49	22.23	23.70
		50	0	22.35	22.42	22.28	23.70
	16QAM	1	0	22.52	22.34	22.62	23.70
		1	25	22.54	22.48	22.60	23.70
		1	49	22.46	22.41	22.51	23.70
		25	0	21.41	21.34	21.47	22.70
		25	13	21.45	21.40	21.51	22.70
		25	25	21.51	21.43	21.57	22.70
		50	0	21.48	21.42	21.54	22.70
	64QAM	1	0	21.80	21.74	21.90	22.70
		1	25	21.96	21.90	22.02	22.70
		1	49	21.94	21.82	21.99	22.70
		25	0	20.87	20.74	20.95	21.70
		25	13	20.91	20.83	20.99	21.70
		25	25	20.90	20.82	20.96	21.70
		50	0	20.91	20.85	20.97	21.70

LTE FDD Band 17 Receiver on /Receiver off-body SAR/ Simultaneous Wi-Fi +body SAR /Hotspot				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				23755/706.5	23790/710	23825/713.5	
5MHz	QPSK	1	0	23.02	23.03	22.97	24.70
		1	13	23.05	23.14	23.19	24.70
		1	24	23.05	23.04	23.02	24.70
		12	0	22.13	22.19	22.14	23.70
		12	6	22.18	22.20	22.15	23.70
		12	13	22.28	22.23	22.13	23.70
		25	0	22.17	22.13	22.17	23.70
	16QAM	1	0	22.31	22.31	22.41	23.70
		1	13	22.33	22.23	22.30	23.70
		1	24	22.48	22.40	22.44	23.70
		12	0	21.17	21.09	21.14	22.70
		12	6	21.26	21.14	21.21	22.70
		12	13	21.30	21.21	21.28	22.70
		25	0	21.26	21.17	21.23	22.70
	64QAM	1	0	21.93	21.84	21.94	22.70
		1	13	21.82	21.72	21.79	22.70



		1	24	21.71	21.58	21.66	22.70
		12	0	20.89	20.83	20.96	21.70
		12	6	20.93	20.82	20.92	21.70
		12	13	20.95	20.86	20.93	21.70
		25	0	20.85	20.76	20.82	21.70
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				23780/709	23790/710	23800/711	
10MHz	QPSK	1	0	22.99	22.99	22.94	24.70
		1	25	23.04	23.10	23.17	24.70
		1	49	23.03	23.03	22.99	24.70
		25	0	22.10	22.14	22.10	23.70
		25	13	22.16	22.16	22.12	23.70
		25	25	22.25	22.18	22.09	23.70
		50	0	22.14	22.08	22.13	23.70
	16QAM	1	0	22.31	22.27	22.36	23.70
		1	25	22.29	22.21	22.26	23.70
		1	49	22.46	22.37	22.42	23.70
		25	0	21.14	21.05	21.11	22.70
		25	13	21.23	21.12	21.18	22.70
		25	25	21.27	21.16	21.24	22.70
		50	0	21.24	21.13	21.20	22.70
	64QAM	1	0	21.91	21.80	21.89	22.70
		1	25	21.78	21.70	21.75	22.70
		1	49	21.65	21.52	21.60	22.70
		25	0	20.84	20.75	20.89	21.70
		25	13	20.89	20.78	20.86	21.70
		25	25	20.92	20.81	20.89	21.70
		50	0	20.83	20.72	20.79	21.70

LTE TDD Band 38 receiver on / Receiver off-body SAR Simultaneous Wi-Fi + body SAR / Hotspot				Maximum Output Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				37775/2572.5	38000/2595	38225/2617.5	
5MHz	QPSK	1	0	23.22	23.30	23.28	24.50
		1	13	23.44	23.51	23.42	24.50
		1	24	23.26	23.43	23.36	24.50
		12	0	22.43	22.41	22.38	23.50
		12	6	22.42	22.46	22.39	23.50
		12	13	22.50	22.43	22.46	23.50
		25	0	22.40	22.55	22.52	23.50
	16QAM	1	0	22.58	22.39	22.43	23.50



		1	13	22.56	22.52	22.56	23.50
		1	24	22.51	22.44	22.47	23.50
		12	0	21.39	21.32	22.34	22.50
		12	6	21.46	21.47	21.45	22.50
		12	13	21.48	21.47	21.42	22.50
		25	0	21.53	21.52	21.47	22.50
	64QAM	1	0	21.94	21.90	21.85	22.50
		1	13	22.18	22.22	22.14	22.50
		1	24	21.92	21.93	21.85	22.50
		12	0	21.00	20.99	20.93	21.50
		12	6	21.09	21.11	21.06	21.50
		12	13	21.02	21.06	20.98	21.50
		25	0	21.10	21.09	21.03	21.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				37800/2575	38000/2595	38200/2615	
10MHz	QPSK	1	0	23.24	23.31	23.31	24.50
		1	25	23.47	23.56	23.46	24.50
		1	49	23.28	23.47	23.39	24.50
		25	0	22.46	22.46	22.42	23.50
		25	13	22.45	22.51	22.43	23.50
		25	25	22.52	22.47	22.51	23.50
		50	0	22.44	22.57	22.56	23.50
	16QAM	1	0	22.60	22.42	22.45	23.50
		1	25	22.59	22.56	22.59	23.50
		1	49	22.54	22.46	22.50	23.50
		25	0	21.42	21.37	22.38	22.50
		25	13	21.48	21.51	21.48	22.50
		25	25	21.51	21.52	21.46	22.50
		50	0	21.56	21.57	21.51	22.50
	64QAM	1	0	21.96	21.89	21.87	22.50
		1	25	22.21	22.22	22.17	22.50
		1	49	21.91	21.95	21.88	22.50
		25	0	21.03	21.04	20.93	21.50
		25	13	21.11	21.15	21.09	21.50
		25	25	21.05	21.11	21.02	21.50
		50	0	21.13	21.14	21.07	21.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				37825/2577.5	38000/2595	38175/2612.5	
15MHz	QPSK	1	0	23.23	23.27	23.29	24.50
		1	38	23.45	23.55	23.43	24.50
		1	74	23.25	23.42	23.35	24.50
		36	0	22.44	22.42	22.39	23.50
		36	18	22.42	22.46	22.39	23.50



		36	39	22.49	22.44	22.47	23.50
		75	0	22.42	22.53	22.51	23.50
	16QAM	1	0	22.55	22.40	22.43	23.50
		1	38	22.57	22.53	22.57	23.50
		1	74	22.51	22.42	22.47	23.50
		36	0	21.39	21.35	22.35	22.50
		36	18	21.45	21.46	21.44	22.50
		36	39	21.49	21.48	21.43	22.50
		75	0	21.53	21.52	21.47	22.50
	64QAM	1	0	21.91	21.87	21.85	22.50
		1	38	22.19	22.19	22.15	22.50
		1	74	21.92	21.94	21.89	22.50
		36	0	21.02	21.06	20.94	21.50
		36	18	21.09	21.12	21.08	21.50
		36	39	21.03	21.07	20.99	21.50
		75	0	21.10	21.09	21.03	21.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				37850/2580	38000/2595	38150/2610	
20MHz	QPSK	1	0	23.20	23.23	23.26	24.50
		1	50	23.44	23.51	23.41	24.50
		1	99	23.23	23.41	23.32	24.50
		50	0	22.41	22.37	22.35	23.50
		50	25	22.40	22.42	22.36	23.50
		50	50	22.46	22.39	22.43	23.50
		100	0	22.39	22.48	22.47	23.50
	16QAM	1	0	22.35	22.36	22.38	23.50
		1	50	22.53	22.51	22.53	23.50
		1	99	22.49	22.39	22.45	23.50
		50	0	21.36	21.31	22.32	22.50
		50	25	21.42	21.44	21.41	22.50
		50	50	21.46	21.43	21.39	22.50
		100	0	21.51	21.48	21.44	22.50
	64QAM	1	0	21.89	21.83	21.80	22.50
		1	50	22.15	22.17	22.11	22.50
		1	99	21.86	21.88	21.83	22.50
		50	0	20.97	20.98	20.87	21.50
		50	25	21.05	21.08	21.02	21.50
		50	50	21.00	21.02	20.95	21.50
		100	0	21.08	21.05	21.00	21.50

LTE TDD Band 41 receiver on / Receiver off-body SAR Simultaneous Wi-Fi + body SAR / Hotspot		Maximum Output Power(dBm)	Tune-up Limit
--	--	----------------------------------	----------------------



Bandwidth	Modulation	RB size	RB offset	Channel/Frequency(MHz)					
				39675/ 2498.5	40148/ 2545.8	40620/ 2593	41093/ 2640.3	41565/ 2687.5	
5MHz	QPSK	1	0	23.46	23.30	23.24	23.33	23.06	24.50
		1	13	23.62	23.53	23.48	23.53	23.25	24.50
		1	24	23.41	23.38	23.27	23.25	22.99	24.50
		12	0	22.51	22.45	22.30	22.35	22.15	23.50
		12	6	22.51	22.47	22.44	22.45	22.13	23.50
		12	13	22.59	22.44	22.49	22.44	22.13	23.50
		25	0	22.55	22.51	22.47	22.43	22.16	23.50
	16QAM	1	0	22.72	22.37	22.35	22.57	22.16	23.50
		1	13	22.74	22.58	22.57	22.59	22.30	23.50
		1	24	22.50	22.47	22.37	22.34	22.04	23.50
		12	0	21.44	21.38	21.30	21.38	21.24	22.50
		12	6	21.51	21.54	21.33	21.44	21.33	22.50
		12	13	21.43	21.43	21.45	21.42	21.15	22.50
		25	0	21.46	21.52	21.45	21.40	21.29	22.50
	64QAM	1	0	22.18	22.13	22.43	22.17	21.66	22.50
		1	13	22.34	22.27	22.26	22.40	22.32	22.50
		1	24	22.20	22.16	21.13	22.25	22.14	22.50
		12	0	21.14	21.12	21.31	21.16	21.18	21.50
		12	6	21.29	21.20	21.35	21.29	21.23	21.50
		12	13	21.28	21.26	21.39	21.30	21.27	21.50
		25	0	21.33	21.33	21.35	21.36	21.40	21.50
Bandwidth	Modulation	RB allocation	offset	Channel/Frequency(MHz)					Tune-up Limit
				39700/ 2501	40160/ 2547	40620/ 2593	41080/ 2639	41540/ 2685	
10MHz	QPSK	1	0	23.47	23.34	23.26	23.32	23.09	24.50
		1	25	23.64	23.54	23.51	23.52	23.21	24.50
		1	49	23.44	23.43	23.31	23.26	23.00	24.50
		25	0	22.53	22.49	22.33	22.34	22.14	23.50
		25	13	22.54	22.52	22.48	22.45	22.13	23.50
		25	25	22.62	22.47	22.53	22.45	22.12	23.50
		50	0	22.57	22.55	22.52	22.41	22.18	23.50
	16QAM	1	0	22.77	22.39	22.37	22.60	22.15	23.50
		1	25	22.76	22.61	22.59	22.58	22.29	23.50
		1	49	22.53	22.51	22.40	22.34	22.06	23.50
		25	0	21.47	21.40	21.33	21.38	21.21	22.50
		25	13	21.54	21.59	21.37	21.45	21.34	22.50
		25	25	21.45	21.47	21.48	21.41	21.14	22.50
		50	0	21.49	21.57	21.49	21.40	21.29	22.50
	64QAM	1	0	22.23	22.15	22.45	22.20	21.69	22.50
		1	25	22.36	22.30	22.28	22.39	22.35	22.50



		1	49	22.19	22.17	21.12	22.25	22.13	22.50
		25	0	21.15	21.10	21.30	21.14	21.11	21.50
		25	13	21.31	21.23	21.36	21.29	21.22	21.50
		25	25	21.30	21.30	21.42	21.29	21.26	21.50
		50	0	21.36	21.38	21.39	21.36	21.40	21.50
Bandwidth	Modulation	RB allocation	offset	Channel/Frequency(MHz)					Tune-up Limit
				39725/ 2503.5	40173/ 2548.3	40620/ 2593	41068/ 2637.8	41515/ 2682.5	
15MHz	QPSK	1	0	23.45	23.33	23.23	23.35	23.11	24.50
		1	38	23.61	23.49	23.47	23.54	23.25	24.50
		1	74	23.42	23.39	23.28	23.29	23.05	24.50
		36	0	22.50	22.44	22.29	22.37	22.19	23.50
		36	18	22.51	22.47	22.44	22.47	22.17	23.50
		36	39	22.60	22.43	22.48	22.47	22.14	23.50
		75	0	22.53	22.53	22.48	22.41	22.19	23.50
	16QAM	1	0	22.75	22.36	22.35	22.63	22.19	23.50
		1	38	22.73	22.57	22.56	22.61	22.31	23.50
		1	74	22.50	22.49	22.37	22.37	22.08	23.50
		36	0	21.44	21.35	21.29	21.40	21.25	22.50
		36	18	21.52	21.55	21.34	21.48	21.39	22.50
		36	39	21.42	21.42	21.44	21.44	21.19	22.50
		75	0	21.46	21.52	21.45	21.42	21.33	22.50
	64QAM	1	0	22.21	22.16	22.43	22.23	21.69	22.50
		1	38	22.33	22.30	22.25	22.42	22.33	22.50
		1	74	22.20	22.15	21.09	22.24	22.15	22.50
		36	0	21.12	21.05	21.30	21.16	21.15	21.50
		36	18	21.29	21.19	21.33	21.32	21.27	21.50
		36	39	21.27	21.25	21.38	21.32	21.31	21.50
		75	0	21.33	21.33	21.35	21.38	21.44	21.50
Bandwidth	Modulation	RB allocation	offset	Channel/Frequency(MHz)					Tune-up Limit
				39750/ 2506	40185/ 2549.5	40620/ 2593	41055/ 2636.5	41490/ 2680	
	QPSK	1	0	23.43	23.26	23.21	23.30	23.02	24.50
		1	50	23.61	23.49	23.46	23.52	23.21	24.50
		1	99	23.39	23.37	23.24	23.23	22.98	24.50
		50	0	22.48	22.40	22.26	22.32	22.10	23.50
		50	25	22.49	22.43	22.41	22.43	22.09	23.50
		50	50	22.56	22.39	22.45	22.41	22.08	23.50
		100	0	22.52	22.46	22.43	22.40	22.11	23.50
	16QAM	1	0	22.42	22.33	22.30	22.35	22.12	23.50
		1	50	22.70	22.56	22.53	22.55	22.28	23.50
		1	99	22.48	22.44	22.35	22.32	22.01	23.50
		50	0	21.41	21.34	21.27	21.35	21.20	22.50



		50	25	21.48	21.52	21.30	21.41	21.31	22.50
		50	50	21.40	21.38	21.41	21.39	21.10	22.50
		100	0	21.44	21.48	21.42	21.38	21.25	22.50
	64QAM	1	0	22.16	22.09	22.38	22.15	21.62	22.50
		1	50	22.30	22.25	22.22	22.36	22.30	22.50
		1	99	22.14	22.10	21.07	22.19	22.08	22.50
		50	0	21.09	21.04	21.24	21.11	21.10	21.50
		50	25	21.25	21.16	21.29	21.25	21.19	21.50
		50	50	21.25	21.21	21.35	21.27	21.22	21.50
		100	0	21.31	21.29	21.32	21.34	21.36	21.50

LTE FDD Band 66 Receiver on				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				131979/1710. 7	132322/1745	132665/1779. 3	
1.4MHz	QPSK	1	0	22.64	22.54	22.48	24.30
		1	2	22.81	22.74	22.73	24.30
		1	5	22.55	22.48	22.46	24.30
		3	0	22.57	22.71	22.70	24.30
		3	2	22.52	22.66	22.59	24.30
		3	3	22.55	22.57	22.51	24.30
		6	0	21.59	21.69	21.66	23.30
	16QAM	1	0	21.66	21.85	21.85	23.30
		1	2	21.64	21.75	21.68	23.30
		1	5	21.66	21.69	21.63	23.30
		3	0	21.81	21.95	21.95	23.30
		3	2	21.78	21.87	21.83	23.30
		3	3	21.80	21.86	21.76	23.30
		6	0	20.91	21.11	21.10	22.30
	64QAM	1	0	20.88	21.01	20.94	22.30
		1	2	20.90	20.93	20.89	22.30
		1	5	20.92	21.01	20.91	22.30
		3	0	21.59	21.75	21.64	22.30
		3	2	21.63	21.65	21.62	22.30
		3	3	21.67	21.72	21.66	22.30
		6	0	20.76	20.84	20.81	21.30
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				131987/1711. 5	132322/1745	132657/1778. 5	
3MHz	QPSK	1	0	22.64	22.53	22.48	24.30
		1	7	22.78	22.77	22.75	24.30
		1	14	22.54	22.47	22.45	24.30



		8	0	21.65	21.79	21.80	23.30
		8	4	21.62	21.72	21.66	23.30
		8	7	21.62	21.67	21.58	23.30
		15	0	21.61	21.70	21.66	23.30
	16QAM	1	0	21.63	21.84	21.85	23.30
		1	7	21.65	21.74	21.70	23.30
		1	14	21.65	21.69	21.62	23.30
		8	0	20.90	21.07	21.05	22.30
		8	4	20.85	20.94	20.90	22.30
		8	7	20.88	20.94	20.86	22.30
		15	0	20.92	21.11	21.08	22.30
	64QAM	1	0	20.85	21.00	20.94	22.30
		1	7	20.91	20.92	20.89	22.30
		1	14	20.95	20.99	20.94	22.30
		8	0	20.70	20.91	20.78	21.30
		8	4	20.71	20.74	20.72	21.30
		8	7	20.75	20.80	20.76	21.30
		15	0	20.77	20.84	20.79	21.30
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				131997/1712.5	132322/1745	132647/1777.5	
5MHz	QPSK	1	0	22.65	22.57	22.50	24.30
		1	13	22.80	22.78	22.78	24.30
		1	24	22.57	22.52	22.49	24.30
		12	0	21.67	21.83	21.83	23.30
		12	6	21.65	21.77	21.70	23.30
		12	13	21.65	21.70	21.62	23.30
		25	0	21.63	21.74	21.71	23.30
	16QAM	1	0	21.68	21.86	21.87	23.30
		1	13	21.67	21.77	21.72	23.30
		1	24	21.68	21.73	21.65	23.30
		12	0	20.93	21.09	21.08	22.30
		12	6	20.88	20.99	20.94	22.30
		12	13	20.90	20.98	20.89	22.30
		25	0	20.95	21.16	21.12	22.30
	64QAM	1	0	20.90	21.02	20.96	22.30
		1	13	20.93	20.95	20.91	22.30
		1	24	20.94	21.00	20.93	22.30
		12	0	20.71	20.89	20.77	21.30
		12	6	20.73	20.77	20.73	21.30
		12	13	20.77	20.84	20.79	21.30
		25	0	20.80	20.89	20.83	21.30
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up



				132022/1715	132322/1745	132622/1775	Limit
10MHz	QPSK	1	0	22.63	22.56	22.47	24.30
		1	25	22.77	22.73	22.74	24.30
		1	49	22.55	22.48	22.46	24.30
		25	0	21.64	21.78	21.79	23.30
		25	13	21.62	21.72	21.66	23.30
		25	25	21.63	21.66	21.57	23.30
		50	0	21.59	21.72	21.67	23.30
	16QAM	1	0	21.66	21.83	21.85	23.30
		1	25	21.64	21.73	21.69	23.30
		1	49	21.65	21.71	21.62	23.30
		25	0	20.90	21.04	21.04	22.30
		25	13	20.86	20.95	20.91	22.30
		25	25	20.87	20.93	20.85	22.30
		50	0	20.92	21.11	21.08	22.30
	64QAM	1	0	20.88	21.03	20.94	22.30
		1	25	20.90	20.95	20.88	22.30
		1	49	20.95	20.98	20.90	22.30
		25	0	20.68	20.84	20.77	21.30
		25	13	20.71	20.73	20.70	21.30
		25	25	20.74	20.79	20.75	21.30
		50	0	20.77	20.84	20.79	21.30
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				132047/1717.5	132322/1745	132597/1772.5	
15MHz	QPSK	1	0	22.66	22.58	22.51	24.30
		1	38	22.79	22.77	22.77	24.30
		1	74	22.58	22.53	22.50	24.30
		36	0	21.67	21.83	21.83	23.30
		36	18	21.64	21.76	21.71	23.30
		36	39	21.65	21.68	21.61	23.30
		75	0	21.59	21.73	21.69	23.30
	16QAM	1	0	21.69	21.87	21.88	23.30
		1	38	21.67	21.75	21.72	23.30
		1	74	21.68	21.73	21.66	23.30
		36	0	20.92	21.08	21.07	22.30
		36	18	20.89	21.00	20.95	22.30
		36	39	20.90	20.98	20.89	22.30
		75	0	20.94	21.15	21.13	22.30
	64QAM	1	0	20.91	21.03	20.97	22.30
		1	38	20.93	20.93	20.91	22.30
		1	74	20.94	21.00	20.94	22.30
		36	0	20.70	20.88	20.76	21.30



		36	18	20.74	20.78	20.74	21.30
		36	39	20.77	20.84	20.79	21.30
		75	0	20.79	20.88	20.84	21.30
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				132072/1720	132322/1745	132572/1770	
20MHz	QPSK	1	0	22.61	22.49	22.45	24.30
		1	50	22.77	22.73	22.73	24.30
		1	99	22.52	22.46	22.42	24.30
		50	0	21.62	21.74	21.76	23.30
		50	25	21.60	21.68	21.63	23.30
		50	50	21.59	21.62	21.54	23.30
		100	0	21.58	21.65	21.62	23.30
	16QAM	1	0	21.65	21.80	21.80	23.30
		1	50	21.61	21.72	21.66	23.30
		1	99	21.63	21.66	21.60	23.30
		50	0	20.87	21.03	21.02	22.30
		50	25	20.82	20.92	20.87	22.30
		50	50	20.85	20.89	20.82	22.30
		100	0	20.90	21.07	21.05	22.30
	64QAM	1	0	20.83	20.96	20.89	22.30
		1	50	20.87	20.90	20.85	22.30
		1	99	20.89	20.93	20.88	22.30
		50	0	20.65	20.83	20.71	21.30
		50	25	20.67	20.70	20.66	21.30
		50	50	20.72	20.75	20.72	21.30
		100	0	20.75	20.80	20.76	21.30

LTE FDD Band 66 Receiver off-body SAR/ Simultaneous Wi-Fi +body SAR /Hotspot				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				131979/1710. 7	132322/1745	132665/1779. 3	
1.4MHz	QPSK	1	0	21.72	21.62	21.53	23.30
		1	2	21.87	21.85	21.81	23.30
		1	5	21.62	21.56	21.62	23.30
		3	0	22.57	22.64	22.72	23.30
		3	2	22.50	22.60	22.67	23.30
		3	3	22.66	22.67	22.59	23.30
		6	0	21.68	21.74	21.76	23.30
	16QAM	1	0	21.75	21.95	21.98	23.30
		1	2	21.73	21.79	21.77	23.30
		1	5	21.73	21.81	21.71	23.30



		3	0	21.89	22.01	22.02	23.30
		3	2	21.89	21.98	21.95	23.30
		3	3	21.87	21.99	21.86	23.30
		6	0	20.97	21.23	21.21	22.30
	64QAM	1	0	21.01	21.11	21.07	22.30
		1	2	20.99	20.97	20.98	22.30
		1	5	20.99	21.13	20.99	22.30
		3	0	21.57	21.71	21.61	22.30
		3	2	21.64	21.66	21.64	22.30
		3	3	21.64	21.75	21.66	22.30
		6	0	20.72	20.86	20.82	21.30
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				1319871711. 5	132322/1745	132657/1778. 5	
3MHz	QPSK	1	0	21.74	21.66	21.56	23.30
		1	7	21.85	21.88	21.85	23.30
		1	14	21.65	21.61	21.66	23.30
		8	0	21.67	21.76	21.85	23.30
		8	4	21.62	21.70	21.79	23.30
		8	7	21.76	21.78	21.69	23.30
		15	0	21.68	21.78	21.79	23.30
	16QAM	1	0	21.78	21.97	22.01	23.30
		1	7	21.76	21.79	21.81	23.30
		1	14	21.75	21.85	21.74	23.30
		8	0	21.00	21.14	21.14	22.30
		8	4	21.00	21.11	21.07	22.30
		8	7	20.97	21.11	20.99	22.30
		15	0	21.00	21.27	21.24	22.30
	64QAM	1	0	21.04	21.13	21.10	22.30
		1	7	21.02	20.97	21.00	22.30
		1	14	21.01	21.12	21.02	22.30
		8	0	20.68	20.84	20.73	21.30
		8	4	20.75	20.79	20.76	21.30
		8	7	20.74	20.87	20.79	21.30
		15	0	20.75	20.90	20.85	21.30
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				131997/1712. 5	132322/1745	132647/1777. 5	
5MHz	QPSK	1	0	21.72	21.61	21.53	23.30
		1	13	21.84	21.88	21.83	23.30
		1	24	21.61	21.55	21.61	23.30
		12	0	21.65	21.72	21.82	23.30
		12	6	21.60	21.66	21.74	23.30



		12	13	21.73	21.77	21.66	23.30
		25	0	21.70	21.75	21.76	23.30
	16QAM	1	0	21.72	21.94	21.98	23.30
		1	13	21.74	21.78	21.79	23.30
		1	24	21.72	21.81	21.70	23.30
		12	0	20.98	21.13	21.12	22.30
		12	6	20.96	21.05	21.02	22.30
		12	13	20.95	21.07	20.96	22.30
		25	0	20.98	21.23	21.19	22.30
		25	0	20.98	21.10	21.07	22.30
	64QAM	1	0	20.98	21.10	21.07	22.30
		1	13	21.00	20.96	20.98	22.30
		1	24	21.02	21.11	21.02	22.30
		12	0	20.68	20.87	20.75	21.30
		12	6	20.72	20.75	20.74	21.30
		12	13	20.72	20.83	20.76	21.30
		25	0	20.73	20.86	20.80	21.30
		25	0	20.73	20.86	20.80	21.30
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				132022/1715	132322/1745	132622/1775	
10MHz	QPSK	1	0	21.71	21.64	21.52	23.30
		1	25	21.83	21.84	21.82	23.30
		1	49	21.62	21.56	21.62	23.30
		25	0	21.64	21.71	21.81	23.30
		25	13	21.60	21.66	21.74	23.30
		25	25	21.74	21.76	21.65	23.30
		50	0	21.68	21.77	21.77	23.30
		50	0	21.68	21.77	21.77	23.30
	16QAM	1	0	21.75	21.93	21.98	23.30
		1	25	21.73	21.77	21.78	23.30
		1	49	21.72	21.83	21.70	23.30
		25	0	20.98	21.10	21.11	22.30
		25	13	20.97	21.06	21.03	22.30
		25	25	20.94	21.06	20.95	22.30
		50	0	20.98	21.23	21.19	22.30
		50	0	20.98	21.23	21.19	22.30
	64QAM	1	0	21.01	21.13	21.07	22.30
		1	25	20.99	20.99	20.97	22.30
		1	49	21.02	21.10	20.98	22.30
		25	0	20.66	20.80	20.74	21.30
		25	13	20.72	20.74	20.72	21.30
		25	25	20.71	20.82	20.75	21.30
		50	0	20.73	20.86	20.80	21.30
		50	0	20.73	20.86	20.80	21.30
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				132047/1717.5	132322/1745	132597/1772.5	
15MHz	QPSK	1	0	21.73	21.65	21.55	23.30



		1	38	21.86	21.89	21.86	23.30
		1	74	21.64	21.60	21.65	23.30
		36	0	21.67	21.76	21.85	23.30
		36	18	21.63	21.71	21.78	23.30
		36	39	21.76	21.80	21.70	23.30
		75	0	21.72	21.79	21.81	23.30
	16QAM	1	0	21.77	21.96	22.00	23.30
		1	38	21.76	21.81	21.81	23.30
		1	74	21.75	21.85	21.73	23.30
		36	0	21.01	21.15	21.15	22.30
		36	18	20.99	21.10	21.06	22.30
		36	39	20.97	21.11	20.99	22.30
		75	0	21.01	21.28	21.23	22.30
	64QAM	1	0	21.03	21.12	21.09	22.30
		1	38	21.02	20.99	21.00	22.30
		1	74	21.01	21.12	21.01	22.30
		36	0	20.69	20.85	20.74	21.30
		36	18	20.74	20.78	20.75	21.30
		36	39	20.74	20.87	20.79	21.30
		75	0	20.76	20.91	20.84	21.30
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				132072/1720	132322/1745	132572/1770	
20MHz	QPSK	1	0	21.69	21.57	21.50	23.30
		1	50	21.83	21.94	21.81	23.30
		1	99	21.59	21.54	21.58	23.30
		50	0	21.62	21.67	22.05	23.30
		50	25	21.58	21.62	21.71	23.30
		50	50	21.70	21.72	21.62	23.30
		100	0	21.67	21.70	21.72	23.30
	16QAM	1	0	21.78	21.90	21.93	23.30
		1	50	21.70	21.76	21.75	23.30
		1	99	21.70	21.78	21.68	23.30
		50	0	20.95	21.09	21.09	22.30
		50	25	20.93	21.03	20.99	22.30
		50	50	20.92	21.02	20.92	22.30
		100	0	20.96	21.19	21.16	22.30
	64QAM	1	0	20.96	21.06	21.02	22.30
		1	50	20.96	20.94	20.94	22.30
		1	99	20.96	21.05	20.96	22.30
		50	0	20.63	20.79	20.68	21.30
		50	25	20.68	20.71	20.68	21.30
		50	50	20.69	20.78	20.72	21.30
		100	0	20.71	20.82	20.77	21.30



Second - Antenna

LTE FDD Band 2 Receiver off-body SAR				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				18607/1850.7	18900/1880	19193/1909.3	
1.4MHz	QPSK	1	0	22.65	22.64	22.59	23.60
		1	2	22.84	22.76	22.60	23.60
		1	5	22.37	22.46	22.61	23.60
		3	0	23.15	23.22	23.17	23.60
		3	2	23.22	23.18	23.16	23.60
		3	3	23.22	23.07	23.06	23.60
		6	0	22.20	22.17	22.24	23.10
	16QAM	1	0	22.42	22.42	22.35	23.10
		1	2	22.40	22.56	22.43	23.10
		1	5	22.44	22.40	22.36	23.10
		3	0	22.04	22.12	22.08	23.10
		3	2	22.06	22.19	22.16	23.10
		3	3	22.05	22.10	22.00	23.10
		6	0	21.10	21.23	21.20	22.10
	64QAM	1	0	21.49	21.58	21.44	22.10
		1	2	21.67	21.64	21.64	22.10
		1	5	21.62	21.67	21.56	22.10
		3	0	21.55	21.55	21.47	22.10
		3	2	21.67	21.59	21.56	22.10
		3	3	21.48	21.59	21.40	22.10
		6	0	20.66	20.69	20.58	21.10
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				18615/1851.5	18900/1880	19185/1908.5	
3MHz	QPSK	1	0	22.66	22.67	22.61	23.60
		1	7	22.83	22.80	22.65	23.60
		1	14	22.39	22.50	22.64	23.60
		8	0	22.25	22.34	22.30	23.10
		8	4	22.35	22.29	22.27	23.10
		8	7	22.32	22.20	22.17	23.10
		15	0	22.24	22.22	22.29	23.10
	16QAM	1	0	22.44	22.43	22.37	23.10
		1	7	22.43	22.58	22.47	23.10
		1	14	22.46	22.44	22.38	23.10
		8	0	21.16	21.26	21.21	22.10
		8	4	21.16	21.31	21.27	22.10
		8	7	21.15	21.22	21.13	22.10
		15	0	21.14	21.28	21.22	22.10
	64QAM	1	0	21.51	21.59	21.46	22.10



		1	7	21.70	21.66	21.66	22.10
		1	14	21.64	21.66	21.58	22.10
		8	0	20.67	20.69	20.60	21.10
		8	4	20.77	20.71	20.67	21.10
		8	7	20.58	20.71	20.53	21.10
		15	0	20.70	20.74	20.60	21.10
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				18625/1852.5	18900/1880	19175/1907.5	
5MHz	QPSK	1	0	22.65	22.63	22.59	23.60
		1	13	22.81	22.79	22.62	23.60
		1	24	22.36	22.45	22.60	23.60
		12	0	22.23	22.30	22.27	23.10
		12	6	22.32	22.24	22.23	23.10
		12	13	22.29	22.17	22.13	23.10
		25	0	22.22	22.18	22.24	23.10
	16QAM	1	0	22.39	22.41	22.35	23.10
		1	13	22.41	22.55	22.45	23.10
		1	24	22.43	22.40	22.35	23.10
		12	0	21.13	21.24	21.18	22.10
		12	6	21.13	21.26	21.23	22.10
		12	13	21.13	21.18	21.10	22.10
		25	0	21.11	21.23	21.18	22.10
	64QAM	1	0	21.46	21.57	21.44	22.10
		1	13	21.68	21.63	21.64	22.10
		1	24	21.65	21.65	21.59	22.10
		12	0	20.66	20.71	20.61	21.10
		12	6	20.75	20.68	20.66	21.10
		12	13	20.56	20.67	20.50	21.10
		25	0	20.67	20.69	20.56	21.10
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				18650/1855	18900/1880	19150/1905	
10MHz	QPSK	1	0	22.67	22.68	22.62	23.60
		1	25	22.82	22.79	22.64	23.60
		1	49	22.40	22.51	22.65	23.60
		25	0	22.25	22.34	22.30	23.10
		25	13	22.34	22.28	22.28	23.10
		25	25	22.32	22.18	22.16	23.10
		50	0	22.20	22.21	22.27	23.10
	16QAM	1	0	22.45	22.44	22.38	23.10
		1	25	22.43	22.56	22.47	23.10
		1	49	22.46	22.44	22.39	23.10
		25	0	21.15	21.25	21.20	22.10
		25	13	21.17	21.32	21.28	22.10



		25	25	21.15	21.22	21.13	22.10
		50	0	21.13	21.27	21.23	22.10
	64QAM	1	0	21.52	21.60	21.47	22.10
		1	25	21.70	21.64	21.66	22.10
		1	49	21.64	21.66	21.59	22.10
		25	0	20.66	20.68	20.59	21.10
		25	13	20.78	20.72	20.68	21.10
		25	25	20.58	20.71	20.53	21.10
		50	0	20.69	20.73	20.61	21.10
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				18675/1857.5	18900/1880	19125/1902.5	
15MHz	QPSK	1	0	22.64	22.66	22.58	23.60
		1	38	22.80	22.75	22.61	23.60
		1	74	22.37	22.46	22.61	23.60
		36	0	22.22	22.29	22.26	23.10
		36	18	22.32	22.24	22.23	23.10
		36	39	22.30	22.16	22.12	23.10
		75	0	22.20	22.20	22.25	23.10
	16QAM	1	0	22.42	22.40	22.35	23.10
		1	38	22.40	22.54	22.44	23.10
		1	74	22.43	22.42	22.35	23.10
		36	0	21.13	21.21	21.17	22.10
		36	18	21.14	21.27	21.24	22.10
		36	39	21.12	21.17	21.09	22.10
		75	0	21.11	21.23	21.18	22.10
	64QAM	1	0	21.49	21.60	21.44	22.10
		1	38	21.67	21.66	21.63	22.10
		1	74	21.65	21.64	21.55	22.10
		36	0	20.64	20.64	20.60	21.10
		36	18	20.75	20.67	20.64	21.10
		36	39	20.55	20.66	20.49	21.10
		75	0	20.67	20.69	20.56	21.10
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				18700/1860	18900/1880	19100/1900	
20MHz	QPSK	1	0	22.62	22.59	22.56	23.60
		1	50	22.80	22.75	22.60	23.60
		1	99	22.34	22.44	22.57	23.60
		50	0	22.20	22.25	22.23	23.10
		50	25	22.30	22.20	22.20	23.10
		50	50	22.26	22.12	22.09	23.10
		100	0	22.19	22.13	22.20	23.10
	16QAM	1	0	22.28	22.37	22.30	23.10
		1	50	22.37	22.53	22.41	23.10



		1	99	22.41	22.37	22.33	23.10
		50	0	21.10	21.20	21.15	22.10
		50	25	21.10	21.24	21.20	22.10
		50	50	21.10	21.13	21.06	22.10
		100	0	21.09	21.19	21.15	22.10
	64QAM	1	0	21.44	21.53	21.39	22.10
		1	50	21.64	21.61	21.60	22.10
		1	99	21.59	21.59	21.53	22.10
		50	0	20.61	20.63	20.54	21.10
		50	25	20.71	20.64	20.60	21.10
		50	50	20.53	20.62	20.46	21.10
		100	0	20.65	20.65	20.53	21.10

LTE FDD Band 2 Receiver on / Simultaneous Wi-Fi+ body SAR /Hotspot				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				18607/1850.7	18900/1880	19193/1909.3	
1.4MHz	QPSK	1	0	19.32	19.18	19.25	20.10
		1	2	19.43	19.52	19.40	20.10
		1	5	19.20	19.16	19.18	20.10
		3	0	19.25	19.43	19.03	20.10
		3	2	19.35	19.36	19.38	20.10
		3	3	19.28	19.32	19.39	20.10
		6	0	19.33	19.38	19.19	20.10
	16QAM	1	0	19.10	19.15	19.18	20.10
		1	2	19.23	19.22	19.30	20.10
		1	5	19.03	19.15	19.09	20.10
		3	0	19.21	19.26	19.36	20.10
		3	2	19.20	19.16	19.27	20.10
		3	3	19.11	19.11	19.14	20.10
		6	0	19.16	19.24	19.26	20.10
	64QAM	1	0	19.24	19.32	19.30	20.10
		1	2	19.44	19.35	19.35	20.10
		1	5	19.41	19.27	19.33	20.10
		3	0	19.32	19.38	19.37	20.10
		3	2	19.38	19.39	19.31	20.10
		3	3	19.43	19.39	19.37	20.10
		6	0	19.41	19.35	19.42	20.10
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				18615/1851.5	18900/1880	19185/1908.5	
3MHz	QPSK	1	0	19.31	19.20	19.24	20.10
		1	7	19.41	19.50	19.41	20.10



		1	14	19.20	19.16	19.18	20.10
		8	0	19.26	19.45	19.06	20.10
		8	4	19.36	19.40	19.39	20.10
		8	7	19.30	19.35	19.39	20.10
		15	0	19.33	19.41	19.20	20.10
	16QAM	1	0	19.10	19.13	19.18	20.10
		1	7	19.23	19.22	19.31	20.10
		1	14	19.02	19.17	19.08	20.10
		8	0	19.24	19.26	19.36	20.10
		8	4	19.22	19.18	19.29	20.10
		8	7	19.12	19.12	19.17	20.10
		15	0	19.17	19.24	19.24	20.10
	64QAM	1	0	19.24	19.30	19.30	20.10
		1	7	19.44	19.35	19.36	20.10
		1	14	19.40	19.29	19.32	20.10
		8	0	19.35	19.38	19.37	20.10
		8	4	19.40	19.41	19.33	20.10
		8	7	19.44	19.40	19.40	20.10
		15	0	19.41	19.37	19.42	20.10
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				18625/1852.5	18900/1880	19175/1907.5	
5MHz	QPSK	1	0	19.34	19.22	19.28	20.10
		1	13	19.43	19.54	19.44	20.10
		1	24	19.23	19.21	19.22	20.10
		12	0	19.29	19.50	19.10	20.10
		12	6	19.38	19.44	19.44	20.10
		12	13	19.32	19.37	19.43	20.10
		25	0	19.35	19.42	19.22	20.10
	16QAM	1	0	19.13	19.17	19.21	20.10
		1	13	19.26	19.24	19.34	20.10
		1	24	19.05	19.19	19.12	20.10
		12	0	19.26	19.30	19.39	20.10
		12	6	19.25	19.23	19.33	20.10
		12	13	19.15	19.17	19.21	20.10
		25	0	19.19	19.28	19.29	20.10
	64QAM	1	0	19.27	19.34	19.33	20.10
		1	13	19.47	19.37	19.39	20.10
		1	24	19.43	19.31	19.36	20.10
		12	0	19.37	19.42	19.40	20.10
		12	6	19.43	19.46	19.37	20.10
		12	13	19.47	19.45	19.44	20.10
		25	0	19.43	19.41	19.47	20.10
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up



				18650/1855	18900/1880	19150/1905	Limit
10MHz	QPSK	1	0	19.32	19.19	19.26	20.10
		1	25	19.42	19.54	19.43	20.10
		1	49	19.21	19.18	19.20	20.10
		25	0	19.27	19.49	19.08	20.10
		25	13	19.38	19.43	19.42	20.10
		25	25	19.30	19.35	19.43	20.10
		50	0	19.33	19.42	19.21	20.10
	16QAM	1	0	19.09	19.11	19.18	20.10
		1	25	19.25	19.25	19.29	20.10
		1	49	19.03	19.15	19.10	20.10
		25	0	19.22	19.30	19.37	20.10
		25	13	19.21	19.17	19.30	20.10
		25	25	19.14	19.16	19.16	20.10
		50	0	19.16	19.26	19.24	20.10
	64QAM	1	0	19.24	19.29	19.31	20.10
		1	25	19.46	19.37	19.36	20.10
		1	49	19.40	19.26	19.33	20.10
		25	0	19.37	19.42	19.36	20.10
		25	13	19.38	19.42	19.32	20.10
		25	25	19.45	19.41	19.43	20.10
		50	0	19.43	19.40	19.43	20.10
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				18675/1857.5	18900/1880	19125/1902.5	
15MHz	QPSK	1	0	19.32	19.17	19.25	20.10
		1	38	19.42	19.54	19.42	20.10
		1	74	19.19	19.15	19.17	20.10
		36	0	19.27	19.46	19.07	20.10
		36	18	19.36	19.40	19.39	20.10
		36	39	19.29	19.36	19.40	20.10
		75	0	19.36	19.39	19.19	20.10
	16QAM	1	0	19.07	19.14	19.18	20.10
		1	38	19.24	19.23	19.32	20.10
		1	74	19.02	19.15	19.08	20.10
		36	0	19.24	19.29	19.37	20.10
		36	18	19.21	19.17	19.28	20.10
		36	39	19.13	19.13	19.18	20.10
		75	0	19.17	19.24	19.24	20.10
	64QAM	1	0	19.21	19.31	19.30	20.10
		1	38	19.45	19.36	19.37	20.10
		1	74	19.40	19.27	19.32	20.10
		36	0	19.35	19.41	19.38	20.10
		36	18	19.39	19.40	19.32	20.10



		36	39	19.45	19.41	19.41	20.10
		75	0	19.41	19.37	19.42	20.10
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				18700/1860	18900/1880	19100/1900	
20MHz	QPSK	1	0	19.29	19.13	19.22	20.10
		1	50	19.41	19.50	19.40	20.10
		1	99	19.17	19.14	19.14	20.10
		50	0	19.24	19.41	19.03	20.10
		50	25	19.34	19.36	19.36	20.10
		50	50	19.26	19.31	19.36	20.10
		100	0	19.33	19.34	19.15	20.10
	16QAM	1	0	19.05	19.10	19.13	20.10
		1	50	19.20	19.21	19.28	20.10
		1	99	19.00	19.12	19.06	20.10
		50	0	19.21	19.25	19.34	20.10
		50	25	19.18	19.15	19.25	20.10
		50	50	19.10	19.08	19.14	20.10
		100	0	19.15	19.20	19.21	20.10
	64QAM	1	0	19.19	19.27	19.25	20.10
		1	50	19.41	19.34	19.33	20.10
		1	99	19.38	19.24	19.30	20.10
		50	0	19.32	19.37	19.35	20.10
		50	25	19.36	19.38	19.29	20.10
		50	50	19.42	19.36	19.37	20.10
		100	0	19.39	19.33	19.39	20.10

LTE FDD Band 4 Receiver off-body SAR				Maximum Output Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				19957/1710.7	20175/1732.5	20393/1754.3	
1.4MHz	QPSK	1	0	23.23	23.31	23.24	24.00
		1	2	23.36	23.38	23.35	24.00
		1	5	23.14	23.12	23.17	24.00
		3	0	23.78	23.90	23.81	24.00
		3	2	23.84	23.94	23.91	24.00
		3	3	23.89	23.76	23.85	24.00
		6	0	22.85	22.92	22.97	23.50
	16QAM	1	0	23.05	23.00	22.96	23.50
		1	2	23.03	23.10	23.04	23.50
		1	5	22.93	22.87	22.89	23.50
		3	0	22.78	22.82	22.85	23.50
		3	2	22.86	22.93	22.90	23.50



		3	3	22.75	22.72	22.77	23.50
		6	0	21.86	21.87	21.93	22.50
	64QAM	1	0	22.00	22.05	21.95	22.50
		1	2	22.13	22.03	22.07	22.50
		1	5	22.05	21.84	21.76	22.50
		3	0	21.99	22.00	21.96	22.50
		3	2	22.14	22.01	22.14	22.50
		3	3	22.05	22.11	22.06	22.50
		6	0	21.07	21.11	21.12	21.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				19965/1711.5	20175/1732.5	20385/1753.5	
3MHz	QPSK	1	0	23.23	23.30	23.24	24.00
		1	7	23.33	23.41	23.37	24.00
		1	14	23.13	23.11	23.16	24.00
		8	0	22.86	22.98	22.91	23.50
		8	4	22.94	23.00	22.98	23.50
		8	7	22.96	22.86	22.92	23.50
		15	0	22.87	22.93	22.97	23.50
	16QAM	1	0	23.02	22.99	22.96	23.50
		1	7	23.04	23.09	23.06	23.50
		1	14	22.92	22.87	22.88	23.50
		8	0	21.87	21.94	21.95	22.50
		8	4	21.93	22.00	21.97	22.50
		8	7	21.83	21.80	21.87	22.50
		15	0	21.87	21.87	21.91	22.50
	64QAM	1	0	21.97	22.04	21.95	22.50
		1	7	22.14	22.02	22.07	22.50
		1	14	22.08	21.82	21.79	22.50
		8	0	21.10	21.16	21.10	21.50
		8	4	21.22	21.10	21.24	21.50
		8	7	21.13	21.19	21.16	21.50
		15	0	21.08	21.11	21.10	21.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				19975/1712.5	20175/1732.5	20375/1752.5	
5MHz	QPSK	1	0	23.24	23.34	23.26	24.00
		1	13	23.35	23.42	23.40	24.00
		1	24	23.16	23.16	23.20	24.00
		12	0	22.88	23.02	22.94	23.50
		12	6	22.97	23.05	23.02	23.50
		12	13	22.99	22.89	22.96	23.50
		25	0	22.89	22.97	23.02	23.50
	16QAM	1	0	23.07	23.01	22.98	23.50
		1	13	23.06	23.12	23.08	23.50



		1	24	22.95	22.91	22.91	23.50
		12	0	21.90	21.96	21.98	22.50
		12	6	21.96	22.05	22.01	22.50
		12	13	21.85	21.84	21.90	22.50
		25	0	21.90	21.92	21.95	22.50
	64QAM	1	0	22.02	22.06	21.97	22.50
		1	13	22.16	22.05	22.09	22.50
		1	24	22.07	21.83	21.78	22.50
		12	0	21.11	21.14	21.09	21.50
		12	6	21.24	21.13	21.25	21.50
		12	13	21.15	21.23	21.19	21.50
		25	0	21.11	21.16	21.14	21.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20000/1715	20175/1732.5	20350/1750	
10MHz	QPSK	1	0	23.22	23.33	23.23	24.00
		1	25	23.32	23.37	23.36	24.00
		1	49	23.14	23.12	23.17	24.00
		25	0	22.85	22.97	22.90	23.50
		25	13	22.94	23.00	22.98	23.50
		25	25	22.97	22.85	22.91	23.50
		50	0	22.85	22.95	22.98	23.50
	16QAM	1	0	23.05	22.98	22.96	23.50
		1	25	23.03	23.08	23.05	23.50
		1	49	22.92	22.89	22.88	23.50
		25	0	21.87	21.91	21.94	22.50
		25	13	21.94	22.01	21.98	22.50
		25	25	21.82	21.79	21.86	22.50
		50	0	21.87	21.87	21.91	22.50
	64QAM	1	0	22.00	22.07	21.95	22.50
		1	25	22.13	22.05	22.06	22.50
		1	49	22.08	21.81	21.75	22.50
		25	0	21.08	21.09	21.09	21.50
		25	13	21.22	21.09	21.22	21.50
		25	25	21.12	21.18	21.15	21.50
		50	0	21.08	21.11	21.10	21.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20025/1717.5	20175/1732.5	20325/1747.5	
15MHz	QPSK	1	0	23.25	23.35	23.27	24.00
		1	38	23.34	23.41	23.39	24.00
		1	74	23.17	23.17	23.21	24.00
		36	0	22.88	23.02	22.94	23.50
		36	18	22.96	23.04	23.03	23.50
		36	39	22.99	22.87	22.95	23.50



	16QAM	75	0	22.85	22.96	23.00	23.50
		1	0	23.08	23.02	22.99	23.50
		1	38	23.06	23.10	23.08	23.50
		1	74	22.95	22.91	22.92	23.50
		36	0	21.89	21.95	21.97	22.50
		36	18	21.97	22.06	22.02	22.50
		36	39	21.85	21.84	21.90	22.50
		75	0	21.89	21.91	21.96	22.50
	64QAM	1	0	22.03	22.07	21.98	22.50
		1	38	22.16	22.03	22.09	22.50
		1	74	22.07	21.83	21.79	22.50
		36	0	21.10	21.13	21.08	21.50
		36	18	21.25	21.14	21.26	21.50
		36	39	21.15	21.23	21.19	21.50
		75	0	21.10	21.15	21.15	21.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20050/1720	20175/1732.5	20300/1745	
20MHz	QPSK	1	0	23.20	23.26	23.21	24.00
		1	50	23.32	23.37	23.35	24.00
		1	99	23.11	23.10	23.13	24.00
		50	0	22.83	22.93	22.87	23.50
		50	25	22.92	22.96	22.95	23.50
		50	50	22.93	22.81	22.88	23.50
		100	0	22.84	22.88	22.93	23.50
	16QAM	1	0	22.98	22.95	22.91	23.50
		1	50	23.00	23.07	23.02	23.50
		1	99	22.90	22.84	22.86	23.50
		50	0	21.84	21.90	21.92	22.50
		50	25	21.90	21.98	21.94	22.50
		50	50	21.80	21.75	21.83	22.50
		100	0	21.85	21.83	21.88	22.50
	64QAM	1	0	21.95	22.00	21.90	22.50
		1	50	22.10	22.00	22.03	22.50
		1	99	22.02	21.76	21.73	22.50
		50	0	21.05	21.08	21.03	21.50
		50	25	21.18	21.06	21.18	21.50
		50	50	21.10	21.14	21.12	21.50
		100	0	21.06	21.07	21.07	21.50

LTE FDD Band 4 Receiver on				Maximum Output Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				19957/1710.7	20175/1732.5	20393/1754.3	



1.4MHz	QPSK	1	0	19.88	19.99	19.97	20.50
		1	2	19.94	20.05	20.01	20.50
		1	5	19.73	19.69	19.62	20.50
		3	0	19.89	20.07	19.91	20.50
		3	2	19.56	19.93	20.00	20.50
		3	3	19.99	19.96	19.97	20.50
		6	0	19.90	20.00	20.01	20.50
	16QAM	1	0	20.06	20.10	20.07	20.50
		1	2	20.02	20.18	20.12	20.50
		1	5	19.85	19.90	19.85	20.50
		3	0	19.86	19.96	19.95	20.50
		3	2	19.99	19.95	20.03	20.50
		3	3	19.93	19.89	19.96	20.50
		6	0	19.95	19.95	20.02	20.50
	64QAM	1	0	20.09	20.12	20.10	20.50
		1	2	20.01	20.12	20.10	20.50
		1	5	19.83	19.90	19.84	20.50
		3	0	19.81	19.92	19.92	20.50
		3	2	19.98	19.94	20.03	20.50
		3	3	19.89	19.91	19.93	20.50
		6	0	19.92	19.93	20.01	20.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				19965/1711.5	20175/1732.5	20385/1753.5	
3MHz	QPSK	1	0	19.90	20.03	20.00	20.50
		1	7	19.94	20.07	20.05	20.50
		1	14	19.76	19.74	19.66	20.50
		8	0	19.93	20.14	19.98	20.50
		8	4	19.59	20.01	20.06	20.50
		8	7	20.03	20.01	20.01	20.50
		15	0	19.92	20.04	20.04	20.50
	16QAM	1	0	20.09	20.12	20.10	20.50
		1	7	20.05	20.20	20.16	20.50
		1	14	19.87	19.94	19.88	20.50
		8	0	19.91	20.00	19.98	20.50
		8	4	20.04	20.02	20.09	20.50
		8	7	19.97	19.95	20.03	20.50
		15	0	19.98	19.99	20.05	20.50
	64QAM	1	0	20.12	20.14	20.13	20.50
		1	7	20.04	20.14	20.14	20.50
		1	14	19.85	19.94	19.87	20.50
		8	0	19.86	19.96	19.95	20.50
		8	4	20.03	20.01	20.09	20.50
		8	7	19.93	19.97	20.00	20.50



		15	0	19.94	19.99	20.06	20.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				19975/1712.5	20175/1732.5	20375/1752.5	
5MHz	QPSK	1	0	19.87	20.01	19.96	20.50
		1	13	19.92	20.03	20.02	20.50
		1	24	19.73	19.69	19.62	20.50
		12	0	19.90	20.09	19.94	20.50
		12	6	19.57	19.97	20.01	20.50
		12	13	20.01	19.99	19.97	20.50
		25	0	19.90	20.03	20.02	20.50
	16QAM	1	0	20.06	20.08	20.07	20.50
		1	13	20.02	20.18	20.13	20.50
		1	24	19.84	19.92	19.84	20.50
		12	0	19.89	19.96	19.95	20.50
		12	6	20.01	19.97	20.05	20.50
		12	13	19.94	19.90	19.99	20.50
		25	0	19.96	19.95	20.00	20.50
	64QAM	1	0	20.09	20.10	20.10	20.50
		1	13	20.01	20.12	20.11	20.50
		1	24	19.82	19.92	19.83	20.50
		12	0	19.84	19.92	19.92	20.50
		12	6	20.00	19.96	20.05	20.50
		12	13	19.90	19.92	19.96	20.50
		25	0	19.92	19.95	20.01	20.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20000/1715	20175/1732.5	20350/1750	
10MHz	QPSK	1	0	19.88	20.00	19.98	20.50
		1	25	19.93	20.07	20.04	20.50
		1	49	19.74	19.71	19.64	20.50
		25	0	19.91	20.13	19.96	20.50
		25	13	19.59	20.00	20.04	20.50
		25	25	20.01	19.99	20.01	20.50
		50	0	19.90	20.04	20.03	20.50
	16QAM	1	0	20.05	20.06	20.07	20.50
		1	25	20.04	20.21	20.11	20.50
		1	49	19.85	19.90	19.86	20.50
		25	0	19.87	20.00	19.96	20.50
		25	13	20.00	19.96	20.06	20.50
		25	25	19.96	19.94	19.98	20.50
		50	0	19.95	19.97	20.00	20.50
	64QAM	1	0	20.09	20.09	20.11	20.50
		1	25	20.03	20.14	20.11	20.50
		1	49	19.82	19.89	19.84	20.50



		25	0	19.86	19.96	19.91	20.50
		25	13	19.98	19.97	20.04	20.50
		25	25	19.91	19.93	19.99	20.50
		50	0	19.94	19.98	20.02	20.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20025/1717.5	20175/1732.5	20325/1747.5	
15MHz	QPSK	1	0	19.88	19.98	19.97	20.50
		1	38	19.93	20.07	20.03	20.50
		1	74	19.72	19.68	19.61	20.50
		36	0	19.91	20.10	19.95	20.50
		36	18	19.57	19.97	20.01	20.50
		36	39	20.00	20.00	19.98	20.50
		75	0	19.93	20.01	20.01	20.50
	16QAM	1	0	20.03	20.09	20.07	20.50
		1	38	20.03	20.19	20.14	20.50
		1	74	19.84	19.90	19.84	20.50
		36	0	19.89	19.99	19.96	20.50
		36	18	20.00	19.96	20.04	20.50
		36	39	19.95	19.91	20.00	20.50
		75	0	19.96	19.95	20.00	20.50
	64QAM	1	0	20.06	20.11	20.10	20.50
		1	38	20.02	20.13	20.12	20.50
		1	74	19.82	19.90	19.83	20.50
		36	0	19.84	19.95	19.93	20.50
		36	18	19.99	19.95	20.04	20.50
		36	39	19.91	19.93	19.97	20.50
		75	0	19.92	19.95	20.01	20.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20050/1720	20175/1732.5	20300/1745	
20MHz	QPSK	1	0	19.85	19.94	19.94	20.50
		1	50	19.92	20.03	20.01	20.50
		1	99	19.70	19.67	19.58	20.50
		50	0	19.88	20.05	19.91	20.50
		50	25	19.55	19.93	19.98	20.50
		50	50	19.97	19.95	19.94	20.50
		100	0	19.90	19.96	19.97	20.50
	16QAM	1	0	20.01	20.05	20.02	20.50
		1	50	19.99	20.17	20.10	20.50
		1	99	19.82	19.87	19.82	20.50
		50	0	19.86	19.95	19.93	20.50
		50	25	19.97	19.94	20.01	20.50
		50	50	19.92	19.86	19.96	20.50
		100	0	19.94	19.91	19.97	20.50



	64QAM	1	0	20.04	20.07	20.05	20.50
		1	50	19.98	20.11	20.08	20.50
		1	99	19.80	19.87	19.81	20.50
		50	0	19.81	19.91	19.90	20.50
		50	25	19.96	19.93	20.01	20.50
		50	50	19.88	19.88	19.93	20.50
		100	0	19.90	19.91	19.98	20.50

LTE FDD Band 4 Simultaneous Wi-Fi+body SAR /Hotspot				Maximum Output Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				19957/1710.7	20175/1732.5	20393/1754.3	
1.4MHz	QPSK	1	0	19.41	19.47	19.37	20.00
		1	2	19.43	19.45	19.50	20.00
		1	5	19.28	19.20	19.27	20.00
		3	0	19.47	19.53	19.43	20.00
		3	2	19.44	19.45	19.54	20.00
		3	3	19.42	19.36	19.40	20.00
		6	0	19.43	19.38	19.45	20.00
	16QAM	1	0	19.51	19.58	19.41	20.00
		1	2	19.47	19.43	19.48	20.00
		1	5	19.55	19.47	19.40	20.00
		3	0	19.50	19.53	19.43	20.00
		3	2	19.49	19.49	19.46	20.00
		3	3	19.53	19.58	19.36	20.00
		6	0	19.39	19.45	19.44	20.00
	64QAM	1	0	19.56	19.59	19.53	20.00
		1	2	19.49	19.47	19.57	20.00
		1	5	19.45	19.43	19.42	20.00
		3	0	19.46	19.36	19.45	20.00
		3	2	19.52	19.57	19.42	20.00
		3	3	19.47	19.49	19.49	20.00
		6	0	19.56	19.50	19.43	20.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				19965/1711.5	20175/1732.5	20385/1753.5	
3MHz	QPSK	1	0	19.41	19.46	19.37	20.00
		1	7	19.42	19.47	19.52	20.00
		1	14	19.27	19.19	19.26	20.00
		8	0	19.49	19.56	19.47	20.00
		8	4	19.45	19.49	19.55	20.00
		8	7	19.43	19.40	19.41	20.00
		15	0	19.46	19.39	19.45	20.00
	16QAM	1	0	19.48	19.57	19.41	20.00



		1	7	19.48	19.44	19.50	20.00
		1	14	19.54	19.47	19.39	20.00
		8	0	19.53	19.56	19.44	20.00
		8	4	19.50	19.50	19.47	20.00
		8	7	19.55	19.60	19.40	20.00
		15	0	19.40	19.45	19.42	20.00
	64QAM	1	0	19.53	19.58	19.53	20.00
		1	7	19.50	19.48	19.59	20.00
		1	14	19.44	19.43	19.41	20.00
		8	0	19.49	19.39	19.46	20.00
		8	4	19.53	19.58	19.43	20.00
		8	7	19.49	19.51	19.53	20.00
		15	0	19.56	19.52	19.43	20.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				19975/1712.5	20175/1732.5	20375/1752.5	
5MHz	QPSK	1	0	19.41	19.48	19.38	20.00
		1	13	19.42	19.47	19.53	20.00
		1	24	19.29	19.22	19.29	20.00
		12	0	19.49	19.59	19.48	20.00
		12	6	19.47	19.52	19.58	20.00
		12	13	19.44	19.39	19.44	20.00
		25	0	19.43	19.42	19.47	20.00
	16QAM	1	0	19.50	19.54	19.41	20.00
		1	13	19.49	19.46	19.47	20.00
		1	24	19.55	19.47	19.41	20.00
		12	0	19.51	19.57	19.44	20.00
		12	6	19.50	19.50	19.49	20.00
		12	13	19.56	19.63	19.38	20.00
		25	0	19.39	19.47	19.42	20.00
	64QAM	1	0	19.56	19.56	19.54	20.00
		1	13	19.51	19.49	19.58	20.00
		1	24	19.44	19.42	19.42	20.00
		12	0	19.51	19.40	19.44	20.00
		12	6	19.52	19.60	19.43	20.00
		12	13	19.49	19.51	19.55	20.00
		25	0	19.58	19.55	19.44	20.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20000/1715	20175/1732.5	20350/1750	
10MHz	QPSK	1	0	19.40	19.49	19.36	20.00
		1	25	19.41	19.43	19.51	20.00
		1	49	19.28	19.20	19.27	20.00
		25	0	19.48	19.55	19.46	20.00
		25	13	19.45	19.49	19.55	20.00



		25	25	19.44	19.39	19.40	20.00
		50	0	19.43	19.41	19.46	20.00
	16QAM	1	0	19.51	19.56	19.41	20.00
		1	25	19.47	19.43	19.49	20.00
		1	49	19.54	19.49	19.39	20.00
		25	0	19.53	19.53	19.43	20.00
		25	13	19.51	19.51	19.48	20.00
		25	25	19.54	19.59	19.39	20.00
		50	0	19.40	19.45	19.42	20.00
		1	0	19.56	19.57	19.53	20.00
	64QAM	1	25	19.49	19.47	19.58	20.00
		1	49	19.44	19.45	19.41	20.00
		25	0	19.49	19.36	19.45	20.00
		25	13	19.54	19.59	19.44	20.00
		25	25	19.48	19.50	19.52	20.00
		50	0	19.56	19.52	19.43	20.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20025/1717.5	20175/1732.5	20325/1747.5	
15MHz	QPSK	1	0	19.43	19.51	19.40	20.00
		1	38	19.43	19.47	19.54	20.00
		1	74	19.31	19.25	19.31	20.00
		36	0	19.51	19.60	19.50	20.00
		36	18	19.47	19.53	19.60	20.00
		36	39	19.46	19.41	19.44	20.00
		75	0	19.45	19.42	19.48	20.00
	16QAM	1	0	19.54	19.60	19.44	20.00
		1	38	19.50	19.45	19.52	20.00
		1	74	19.57	19.51	19.43	20.00
		36	0	19.55	19.57	19.46	20.00
		36	18	19.54	19.56	19.52	20.00
		36	39	19.57	19.64	19.43	20.00
		75	0	19.42	19.49	19.47	20.00
	64QAM	1	0	19.59	19.61	19.56	20.00
		1	38	19.52	19.49	19.61	20.00
		1	74	19.47	19.47	19.45	20.00
		36	0	19.51	19.40	19.48	20.00
		36	18	19.57	19.64	19.48	20.00
		36	39	19.51	19.55	19.56	20.00
		75	0	19.58	19.56	19.48	20.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20050/1720	20175/1732.5	20300/1745	
20MHz	QPSK	1	0	19.38	19.42	19.34	20.00
		1	50	19.41	19.43	19.50	20.00



		1	99	19.25	19.18	19.23	20.00
		50	0	19.46	19.51	19.43	20.00
		50	25	19.43	19.45	19.52	20.00
		50	50	19.40	19.35	19.37	20.00
		100	0	19.43	19.34	19.41	20.00
	16QAM	1	0	19.46	19.53	19.36	20.00
		1	50	19.44	19.42	19.46	20.00
		1	99	19.52	19.44	19.37	20.00
		50	0	19.50	19.52	19.41	20.00
		50	25	19.47	19.48	19.44	20.00
		50	50	19.52	19.55	19.36	20.00
		100	0	19.38	19.41	19.39	20.00
	64QAM	1	0	19.51	19.54	19.48	20.00
		1	50	19.46	19.46	19.55	20.00
		1	99	19.42	19.40	19.39	20.00
		50	0	19.46	19.35	19.43	20.00
		50	25	19.50	19.56	19.40	20.00
		50	50	19.46	19.46	19.49	20.00
		100	0	19.54	19.48	19.40	20.00

LTE FDD Band 5 Receiver off-body SAR Simultaneous Wi-Fi+body SAR				Maximum Output Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				20407/824.7	20525/836.5	20643/848.3	
1.4MHz	QPSK	1	0	23.85	23.90	24.01	25.00
		1	2	23.97	24.06	24.07	25.00
		1	5	23.89	23.89	23.94	25.00
		3	0	23.89	23.91	23.92	25.00
		3	2	23.92	23.95	23.97	25.00
		3	3	23.93	23.90	23.95	25.00
		6	0	23.00	23.04	23.03	24.00
	16QAM	1	0	23.12	23.11	23.12	24.00
		1	2	23.10	23.06	23.07	24.00
		1	5	23.05	23.22	23.04	24.00
		3	0	22.79	22.89	22.89	24.00
		3	2	22.94	22.80	23.01	24.00
		3	3	22.92	22.88	22.92	24.00
		6	0	21.95	22.02	22.05	23.00
	64QAM	1	0	22.54	22.53	22.55	23.00
		1	2	22.43	22.40	22.43	23.00
		1	5	22.55	22.67	22.62	23.00
		3	0	22.52	22.39	22.43	23.00



		3	2	22.48	22.44	22.53	23.00
		3	3	22.40	22.38	22.43	23.00
		6	0	21.49	21.56	21.49	22.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20415/825.5	20525/836.5	20635/847.5	
3MHz	QPSK	1	0	23.86	23.93	24.03	25.00
		1	7	23.96	24.10	24.12	25.00
		1	14	23.91	23.93	23.97	25.00
		8	0	22.99	23.03	23.05	24.00
		8	4	23.05	23.06	23.08	24.00
		8	7	23.03	23.03	23.06	24.00
		15	0	23.04	23.09	23.08	24.00
	16QAM	1	0	23.14	23.12	23.14	24.00
		1	7	23.13	23.08	23.11	24.00
		1	14	23.07	23.26	23.06	24.00
		8	0	21.91	22.03	22.02	23.00
		8	4	22.04	21.92	22.12	23.00
		8	7	22.02	22.00	22.05	23.00
		15	0	21.99	22.07	22.07	23.00
	64QAM	1	0	22.56	22.54	22.57	23.00
		1	7	22.46	22.42	22.45	23.00
		1	14	22.57	22.66	22.64	23.00
		8	0	21.64	21.53	21.56	22.00
		8	4	21.58	21.56	21.64	22.00
		8	7	21.50	21.50	21.56	22.00
		15	0	21.53	21.61	21.51	22.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20425/826.5	20525/836.5	20625/846.5	
5MHz	QPSK	1	0	23.87	23.94	24.04	25.00
		1	13	23.95	24.09	24.11	25.00
		1	24	23.92	23.94	23.98	25.00
		12	0	22.99	23.03	23.05	24.00
		12	6	23.04	23.05	23.09	24.00
		12	13	23.03	23.01	23.05	24.00
		25	0	23.00	23.08	23.06	24.00
	16QAM	1	0	23.15	23.13	23.15	24.00
		1	13	23.13	23.06	23.11	24.00
		1	24	23.07	23.26	23.07	24.00
		12	0	21.90	22.02	22.01	23.00
		12	6	22.05	21.93	22.13	23.00
		12	13	22.02	22.00	22.05	23.00
		25	0	21.98	22.06	22.08	23.00
	64QAM	1	0	22.57	22.55	22.58	23.00



		1	13	22.46	22.40	22.45	23.00
		1	24	22.57	22.66	22.65	23.00
		12	0	21.63	21.52	21.55	22.00
		12	6	21.59	21.57	21.65	22.00
		12	13	21.50	21.50	21.56	22.00
		25	0	21.52	21.60	21.52	22.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20450/829	20525/836.5	20600/844	
10MHz	QPSK	1	0	23.82	23.85	23.98	25.00
		1	25	23.93	24.05	24.07	25.00
		1	49	23.86	23.87	23.90	25.00
		25	0	22.94	22.94	22.98	24.00
		25	13	23.00	22.97	23.01	24.00
		25	25	22.97	22.95	22.98	24.00
		50	0	22.99	23.00	22.99	24.00
	16QAM	1	0	23.00	23.06	23.07	24.00
		1	25	23.07	23.03	23.05	24.00
		1	49	23.02	23.19	23.01	24.00
		25	0	21.85	21.97	21.96	23.00
		25	13	21.98	21.85	22.05	23.00
		25	25	21.97	21.91	21.98	23.00
		50	0	21.94	21.98	22.00	23.00
	64QAM	1	0	22.49	22.48	22.50	23.00
		1	25	22.40	22.37	22.39	23.00
		1	49	22.52	22.59	22.59	23.00
		25	0	21.58	21.47	21.50	22.00
		25	13	21.52	21.49	21.57	22.00
		25	25	21.45	21.41	21.49	22.00
		50	0	21.48	21.52	21.44	22.00

LTE FDD Band 5 Receiver on / Hotspot				Maximum Output Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				20407/824.7	20525/836.5	20643/848.3	
1.4MHz	QPSK	1	0	22.95	23.02	22.97	24.00
		1	2	23.19	23.19	22.98	24.00
		1	5	22.91	22.91	22.87	24.00
		3	0	23.92	23.95	23.90	24.00
		3	2	23.87	23.93	23.91	24.00
		3	3	23.98	23.85	23.84	24.00
		6	0	23.00	22.97	23.01	24.00
	16QAM	1	0	23.29	23.11	23.09	24.00
		1	2	23.27	23.21	23.18	24.00



		1	5	23.05	23.23	23.16	24.00
		3	0	22.98	22.86	22.95	24.00
		3	2	22.88	22.92	22.94	24.00
		3	3	22.91	22.90	22.84	24.00
		6	0	21.91	21.93	22.04	23.00
	64QAM	1	0	22.40	22.45	22.43	23.00
		1	2	22.54	22.56	22.50	23.00
		1	5	22.43	22.44	22.41	23.00
		3	0	22.42	22.42	22.49	23.00
		3	2	22.41	22.37	22.34	23.00
		3	3	22.47	22.45	22.39	23.00
		6	0	21.49	21.47	21.45	22.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20415/825.5	20525/836.5	20635/847.5	
3MHz	QPSK	1	0	22.94	23.04	22.96	24.00
		1	7	23.15	23.18	22.99	24.00
		1	14	22.91	22.91	22.87	24.00
		8	0	22.99	23.02	22.99	24.00
		8	4	22.97	22.99	22.98	24.00
		8	7	23.06	22.94	22.90	24.00
		15	0	23.00	23.00	23.02	24.00
	16QAM	1	0	23.29	23.09	23.09	24.00
		1	7	23.27	23.19	23.19	24.00
		1	14	23.04	23.25	23.15	24.00
		8	0	22.07	21.95	22.04	23.00
		8	4	21.96	22.00	22.02	23.00
		8	7	21.98	21.97	21.93	23.00
		15	0	21.92	21.93	22.02	23.00
	64QAM	1	0	22.40	22.47	22.43	23.00
		1	7	22.54	22.58	22.49	23.00
		1	14	22.46	22.41	22.40	23.00
		8	0	21.51	21.51	21.62	22.00
		8	4	21.49	21.45	21.42	22.00
		8	7	21.54	21.52	21.48	22.00
		15	0	21.50	21.47	21.43	22.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20425/826.5	20525/836.5	20625/846.5	
5MHz	QPSK	1	0	22.95	23.01	22.97	24.00
		1	13	23.16	23.22	23.00	24.00
		1	24	22.90	22.90	22.86	24.00
		12	0	23.00	23.03	23.00	24.00
		12	6	22.97	22.99	22.98	24.00
		12	13	23.05	22.95	22.91	24.00



	16QAM	25	0	23.02	22.98	23.01	24.00
		1	0	23.26	23.10	23.09	24.00
		1	13	23.28	23.20	23.20	24.00
		1	24	23.04	23.23	23.15	24.00
		12	0	22.07	21.98	22.05	23.00
		12	6	21.95	21.99	22.01	23.00
		12	13	21.99	21.98	21.94	23.00
		25	0	21.92	21.93	22.02	23.00
	64QAM	1	0	22.37	22.44	22.43	23.00
		1	13	22.55	22.55	22.50	23.00
		1	24	22.46	22.42	22.44	23.00
		12	0	21.53	21.58	21.63	22.00
		12	6	21.49	21.46	21.44	22.00
		12	13	21.55	21.53	21.49	22.00
		25	0	21.50	21.47	21.43	22.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20450/829	20525/836.5	20600/844	
10MHz	QPSK	1	0	22.92	22.97	22.94	24.00
		1	25	23.15	23.18	22.98	24.00
		1	49	22.88	22.89	22.83	24.00
		25	0	22.97	22.98	22.96	24.00
		25	13	22.95	22.95	22.95	24.00
		25	25	23.02	22.90	22.87	24.00
		50	0	22.99	22.93	22.97	24.00
	16QAM	1	0	23.02	23.06	23.04	24.00
		1	25	23.24	23.18	23.16	24.00
		1	49	23.02	23.20	23.13	24.00
		25	0	22.04	21.94	22.02	23.00
		25	13	21.92	21.97	21.98	23.00
		25	25	21.96	21.93	21.90	23.00
		50	0	21.90	21.89	21.99	23.00
	64QAM	1	0	22.35	22.40	22.38	23.00
		1	25	22.51	22.53	22.46	23.00
		1	49	22.40	22.36	22.38	23.00
		25	0	21.48	21.50	21.56	22.00
		25	13	21.45	21.42	21.38	22.00
		25	25	21.52	21.48	21.45	22.00
		50	0	21.48	21.43	21.40	22.00

LTE FDD Band 7 Receiver off-body SAR				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				20775/2502.5	21100/2535	21425/2567.5	



5MHz	QPSK	1	0	21.18	21.23	21.17	21.50
		1	13	21.37	21.34	21.38	21.50
		1	24	21.26	21.32	21.25	21.50
		12	0	21.34	21.38	21.40	21.50
		12	6	21.41	21.46	21.40	21.50
		12	13	21.37	21.38	21.41	21.50
		25	0	21.34	21.37	21.33	21.50
	16QAM	1	0	21.35	21.38	21.24	21.50
		1	13	21.26	21.36	21.31	21.50
		1	24	21.35	21.32	21.24	21.50
		12	0	21.36	21.32	21.27	21.50
		12	6	21.35	21.41	21.38	21.50
		12	13	21.27	21.38	21.32	21.50
		25	0	21.37	21.36	21.28	21.50
	64QAM	1	0	21.36	21.43	21.38	21.50
		1	13	21.44	21.43	21.50	21.50
		1	24	21.48	21.56	21.48	21.50
		12	0	21.45	21.47	21.49	21.50
		12	6	21.44	21.47	21.44	21.50
		12	13	21.43	21.52	21.35	21.50
		25	0	21.32	21.48	21.42	21.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20800/2505	21100/2535	21400/2565	
10MHz	QPSK	1	0	21.16	21.20	21.15	21.50
		1	25	21.36	21.34	21.37	21.50
		1	49	21.24	21.29	21.23	21.50
		25	0	21.32	21.37	21.38	21.50
		25	13	21.41	21.45	21.38	21.50
		25	25	21.35	21.36	21.41	21.50
		50	0	21.32	21.37	21.32	21.50
	16QAM	1	0	21.31	21.32	21.21	21.50
		1	25	21.25	21.37	21.26	21.50
		1	49	21.33	21.28	21.22	21.50
		25	0	21.32	21.32	21.25	21.50
		25	13	21.31	21.35	21.35	21.50
		25	25	21.26	21.37	21.27	21.50
		50	0	21.34	21.34	21.23	21.50
	64QAM	1	0	21.33	21.38	21.36	21.50
		1	25	21.43	21.43	21.47	21.50
		1	49	21.45	21.51	21.45	21.50
		25	0	21.45	21.47	21.45	21.50
		25	13	21.39	21.43	21.39	21.50
		25	25	21.41	21.48	21.34	21.50



		50	0	21.32	21.47	21.38	21.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20825/2507.5	21100/2535	21375/2562.5	
15MHz	QPSK	1	0	21.15	21.21	21.13	21.50
		1	38	21.35	21.30	21.35	21.50
		1	74	21.23	21.27	21.21	21.50
		36	0	21.31	21.33	21.36	21.50
		36	18	21.39	21.42	21.35	21.50
		36	39	21.35	21.36	21.37	21.50
		75	0	21.32	21.36	21.31	21.50
	16QAM	1	0	21.32	21.34	21.21	21.50
		1	38	21.23	21.34	21.28	21.50
		1	74	21.32	21.30	21.20	21.50
		36	0	21.34	21.28	21.24	21.50
		36	18	21.32	21.36	21.34	21.50
		36	39	21.24	21.33	21.28	21.50
		75	0	21.35	21.32	21.23	21.50
	64QAM	1	0	21.33	21.39	21.35	21.50
		1	38	21.41	21.41	21.47	21.50
		1	74	21.45	21.54	21.44	21.50
		36	0	21.43	21.43	21.46	21.50
		36	18	21.41	21.42	21.40	21.50
		36	39	21.40	21.47	21.31	21.50
		75	0	21.30	21.44	21.37	21.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20850/2510	21100/2535	21350/2560	
20MHz	QPSK	1	0	21.13	21.14	21.11	21.50
		1	50	21.35	21.30	21.34	21.50
		1	99	21.20	21.25	21.17	21.50
		50	0	21.29	21.29	21.33	21.50
		50	25	21.37	21.38	21.32	21.50
		50	50	21.31	21.32	21.34	21.50
		100	0	21.32	21.29	21.26	21.50
	16QAM	1	0	21.27	21.31	21.16	21.50
		1	50	21.20	21.33	21.25	21.50
		1	99	21.30	21.25	21.18	21.50
		50	0	21.31	21.27	21.22	21.50
		50	25	21.28	21.33	21.30	21.50
		50	50	21.22	21.29	21.25	21.50
		100	0	21.33	21.28	21.20	21.50
	64QAM	1	0	21.28	21.36	21.30	21.50
		1	50	21.38	21.40	21.44	21.50
		1	99	21.43	21.49	21.42	21.50



		50	0	21.40	21.42	21.44	21.50
		50	25	21.37	21.39	21.36	21.50
		50	50	21.38	21.43	21.28	21.50
		100	0	21.28	21.40	21.34	21.50

LTE FDD Band 7 Simultaneous Wi-Fi + body SAR /Hotspot				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				20775/2502.5	21100/2535	21425/2567.5	
5MHz	QPSK	1	0	18.53	18.47	18.58	19.50
		1	13	18.78	18.76	18.80	19.50
		1	24	18.39	18.35	18.47	19.50
		12	0	18.63	18.57	18.69	19.50
		12	6	18.56	18.52	18.62	19.50
		12	13	18.61	18.55	18.64	19.50
		25	0	18.66	18.60	18.71	19.50
	16QAM	1	0	18.67	18.63	18.76	19.50
		1	13	19.23	19.15	19.24	19.50
		1	24	18.83	18.79	18.87	19.50
		12	0	18.71	18.65	18.72	19.50
		12	6	18.63	18.57	18.69	19.50
		12	13	18.56	18.50	18.62	19.50
		25	0	18.51	18.47	18.57	19.50
	64QAM	1	0	18.29	18.25	18.38	19.50
		1	13	18.73	18.65	18.74	19.50
		1	24	18.86	18.82	18.90	19.50
		12	0	18.65	18.59	18.66	19.50
		12	6	18.65	18.59	18.71	19.50
		12	13	18.48	18.42	18.54	19.50
		25	0	18.56	18.52	18.62	19.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20800/2505	21100/2535	21400/2565	
10MHz	QPSK	1	0	18.52	18.50	18.57	19.50
		1	25	18.77	18.72	18.79	19.50
		1	49	18.40	18.36	18.48	19.50
		25	0	18.62	18.56	18.68	19.50
		25	13	18.56	18.52	18.62	19.50
		25	25	18.62	18.54	18.63	19.50
		50	0	18.63	18.62	18.72	19.50
	16QAM	1	0	18.70	18.62	18.76	19.50
		1	25	19.22	19.14	19.23	19.50
		1	49	18.83	18.81	18.87	19.50
		25	0	18.71	18.62	18.71	19.50



		25	13	18.64	18.58	18.70	19.50
		25	25	18.55	18.49	18.61	19.50
		50	0	18.51	18.47	18.57	19.50
	64QAM	1	0	18.32	18.24	18.38	19.50
		1	25	18.72	18.64	18.73	19.50
		1	49	18.86	18.84	18.90	19.50
		25	0	18.65	18.56	18.65	19.50
		25	13	18.66	18.60	18.72	19.50
		25	25	18.47	18.41	18.53	19.50
		50	0	18.56	18.52	18.62	19.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20825/2507.5	21100/2535	21375/2562.5	
15MHz	QPSK	1	0	18.53	18.49	18.59	19.50
		1	38	18.78	18.76	18.81	19.50
		1	74	18.41	18.38	18.50	19.50
		36	0	18.63	18.60	18.70	19.50
		36	18	18.58	18.55	18.65	19.50
		36	39	18.62	18.54	18.67	19.50
		75	0	18.63	18.63	18.73	19.50
	16QAM	1	0	18.69	18.60	18.76	19.50
		1	38	19.24	19.17	19.21	19.50
		1	74	18.84	18.79	18.89	19.50
		36	0	18.69	18.66	18.72	19.50
		36	18	18.63	18.57	18.71	19.50
		36	39	18.57	18.53	18.60	19.50
		75	0	18.50	18.49	18.57	19.50
	64QAM	1	0	18.32	18.23	18.39	19.50
		1	38	18.74	18.66	18.73	19.50
		1	74	18.86	18.81	18.91	19.50
		36	0	18.67	18.60	18.64	19.50
		36	18	18.64	18.61	18.71	19.50
		36	39	18.48	18.42	18.56	19.50
		75	0	18.58	18.55	18.63	19.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20850/2510	21100/2535	21350/2560	
20MHz	QPSK	1	0	18.50	18.43	18.55	19.50
		1	50	18.77	18.72	18.78	19.50
		1	99	18.37	18.34	18.44	19.50
		50	0	18.60	18.52	18.65	19.50
		50	25	18.54	18.48	18.59	19.50
		50	50	18.58	18.50	18.60	19.50
		100	0	18.63	18.55	18.67	19.50
	16QAM	1	0	18.65	18.59	18.71	19.50



		1	50	19.19	19.13	19.20	19.50
		1	99	18.81	18.76	18.85	19.50
		50	0	18.68	18.61	18.69	19.50
		50	25	18.60	18.55	18.66	19.50
		50	50	18.53	18.45	18.58	19.50
		100	0	18.49	18.43	18.54	19.50
	64QAM	1	0	18.27	18.21	18.33	19.50
		1	50	18.69	18.63	18.70	19.50
		1	99	18.84	18.79	18.88	19.50
		50	0	18.62	18.55	18.63	19.50
		50	25	18.62	18.57	18.68	19.50
		50	50	18.45	18.37	18.50	19.50
		100	0	18.54	18.48	18.59	19.50

LTE FDD Band 7 Receiver on / Hotspot				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				20775/2502.5	21100/2535	21425/2567.5	
5MHz	QPSK	1	0	17.96	18.06	17.86	18.25
		1	13	18.06	18.13	18.10	18.25
		1	24	17.98	18.02	17.96	18.25
		12	0	18.04	18.14	18.10	18.25
		12	6	18.17	18.22	18.16	18.25
		12	13	18.11	18.16	18.14	18.25
		25	0	18.04	18.21	18.17	18.25
	16QAM	1	0	17.99	17.94	17.93	18.25
		1	13	18.05	18.07	18.06	18.25
		1	24	18.04	18.08	18.08	18.25
		12	0	18.08	18.15	18.14	18.25
		12	6	18.12	18.14	18.09	18.25
		12	13	18.15	18.21	18.15	18.25
		25	0	18.09	18.21	18.20	18.25
	64QAM	1	0	18.06	18.03	18.05	18.25
		1	13	18.14	18.17	18.15	18.25
		1	24	18.19	18.23	18.19	18.25
		12	0	18.20	18.27	18.13	18.25
		12	6	18.11	18.26	18.21	18.25
		12	13	18.03	18.07	18.05	18.25
		25	0	18.12	18.19	18.17	18.25
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20800/2505	21100/2535	21400/2565	
10MHz	QPSK	1	0	17.98	18.09	17.88	18.25
		1	25	18.07	18.13	18.11	18.25



		1	49	18.00	18.05	17.98	18.25
		25	0	18.06	18.15	18.12	18.25
		25	13	18.17	18.23	18.18	18.25
		25	25	18.13	18.18	18.14	18.25
		50	0	18.06	18.21	18.18	18.25
	16QAM	1	0	18.03	18.00	17.96	18.25
		1	25	18.06	18.06	18.11	18.25
		1	49	18.06	18.12	18.10	18.25
		25	0	18.12	18.15	18.16	18.25
		25	13	18.16	18.20	18.12	18.25
		25	25	18.16	18.22	18.20	18.25
		50	0	18.12	18.23	18.25	18.25
	64QAM	1	0	18.09	18.08	18.07	18.25
		1	25	18.15	18.17	18.18	18.25
		1	49	18.22	18.28	18.22	18.25
		25	0	18.20	18.27	18.17	18.25
		25	13	18.16	18.30	18.26	18.25
		25	25	18.05	18.11	18.06	18.25
		50	0	18.12	18.20	18.21	18.25
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20825/2507.5	21100/2535	21375/2562.5	
15MHz	QPSK	1	0	17.95	18.07	17.84	18.25
		1	38	18.05	18.09	18.08	18.25
		1	74	17.97	18.00	17.94	18.25
		36	0	18.03	18.10	18.08	18.25
		36	18	18.15	18.19	18.13	18.25
		36	39	18.11	18.16	18.10	18.25
		75	0	18.04	18.20	18.16	18.25
	16QAM	1	0	18.00	17.96	17.93	18.25
		1	38	18.03	18.04	18.08	18.25
		1	74	18.03	18.10	18.06	18.25
		36	0	18.10	18.11	18.13	18.25
		36	18	18.13	18.15	18.08	18.25
		36	39	18.13	18.17	18.16	18.25
		75	0	18.10	18.19	18.20	18.25
	64QAM	1	0	18.06	18.04	18.04	18.25
		1	38	18.12	18.15	18.15	18.25
		1	74	18.19	18.26	18.18	18.25
		36	0	18.18	18.23	18.14	18.25
		36	18	18.13	18.25	18.22	18.25
		36	39	18.02	18.06	18.02	18.25
		75	0	18.10	18.16	18.16	18.25
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up



				20850/2510	21100/2535	21350/2560	Limit
20MHz	QPSK	1	0	17.93	18.00	17.82	18.25
		1	50	18.05	18.09	18.07	18.25
		1	99	17.94	17.98	17.90	18.25
		50	0	18.01	18.06	18.05	18.25
		50	25	18.13	18.15	18.10	18.25
		50	50	18.07	18.12	18.07	18.25
		100	0	18.04	18.13	18.11	18.25
	16QAM	1	0	17.95	17.93	17.88	18.25
		1	50	18.00	18.03	18.05	18.25
		1	99	18.01	18.05	18.04	18.25
		50	0	18.07	18.10	18.11	18.25
		50	25	18.09	18.12	18.04	18.25
		50	50	18.11	18.13	18.13	18.25
		100	0	18.08	18.15	18.17	18.25
	64QAM	1	0	18.01	18.01	17.99	18.25
		1	50	18.09	18.14	18.12	18.25
		1	99	18.17	18.21	18.16	18.25
		50	0	18.15	18.22	18.12	18.25
		50	25	18.09	18.22	18.18	18.25
		50	50	18.00	18.02	17.99	18.25
		100	0	18.08	18.12	18.13	18.25

LTE FDD Band 12 Simultaneous Wi-Fi + body SAR /Hotspot				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				23017/699.7	23095/707.5	23173/715.3	
1.4MHz	QPSK	1	0	22.30	22.27	22.28	23.20
		1	2	22.37	22.58	22.40	23.20
		1	5	22.44	22.36	22.45	23.20
		3	0	22.49	22.53	22.50	23.20
		3	2	22.42	22.60	22.48	23.20
		3	3	22.57	22.63	22.55	23.20
		6	0	22.39	22.47	22.44	23.20
	16QAM	1	0	22.62	22.46	22.57	23.20
		1	2	22.60	22.55	22.62	23.20
		1	5	22.46	22.41	22.50	23.20
		3	0	22.81	22.72	22.81	23.20
		3	2	22.81	22.74	22.86	23.20
		3	3	22.91	22.86	22.95	23.20
		6	0	21.99	21.96	22.09	22.70
	64QAM	1	0	22.45	22.36	22.47	22.70
		1	2	22.45	22.40	22.49	22.70



		1	5	22.42	22.35	22.39	22.70
		3	0	22.15	22.02	22.15	22.70
		3	2	22.28	22.19	22.31	22.70
		3	3	22.11	22.06	22.15	22.70
		6	0	21.18	21.15	21.28	21.70
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				23025/700.5	23095/707.5	23165/714.5	
3MHz	QPSK	1	0	22.31	22.30	22.30	23.20
		1	7	22.36	22.62	22.45	23.20
		1	14	22.46	22.40	22.48	23.20
		8	0	22.39	22.45	22.43	23.20
		8	4	22.35	22.51	22.39	23.20
		8	7	22.47	22.56	22.46	23.20
		15	0	22.43	22.52	22.49	23.20
	16QAM	1	0	22.64	22.47	22.59	23.20
		1	7	22.63	22.57	22.66	23.20
		1	14	22.48	22.45	22.52	23.20
		8	0	21.93	21.86	21.94	22.70
		8	4	21.91	21.86	21.97	22.70
		8	7	22.01	21.98	22.08	22.70
		15	0	22.03	22.01	22.11	22.70
	64QAM	1	0	22.47	22.37	22.49	22.70
		1	7	22.48	22.42	22.51	22.70
		1	14	22.44	22.34	22.41	22.70
		8	0	21.27	21.16	21.28	21.70
		8	4	21.38	21.31	21.42	21.70
		8	7	21.21	21.18	21.28	21.70
		15	0	21.22	21.20	21.30	21.70
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				23035/701.5	23095/707.5	23155/713.5	
5MHz	QPSK	1	0	22.30	22.26	22.28	23.20
		1	13	22.34	22.61	22.42	23.20
		1	24	22.43	22.35	22.44	23.20
		12	0	22.37	22.41	22.40	23.20
		12	6	22.32	22.46	22.35	23.20
		12	13	22.44	22.53	22.42	23.20
		25	0	22.41	22.48	22.44	23.20
	16QAM	1	0	22.59	22.45	22.57	23.20
		1	13	22.61	22.54	22.64	23.20
		1	24	22.45	22.41	22.49	23.20
		12	0	21.90	21.84	21.91	22.70
		12	6	21.88	21.81	21.93	22.70
		12	13	21.99	21.94	22.05	22.70



	64QAM	25	0	22.00	21.96	22.07	22.70
		1	0	22.42	22.35	22.47	22.70
		1	13	22.46	22.39	22.49	22.70
		1	24	22.45	22.33	22.42	22.70
		12	0	21.26	21.18	21.29	21.70
		12	6	21.36	21.28	21.41	21.70
		12	13	21.19	21.14	21.25	21.70
		25	0	21.19	21.15	21.26	21.70
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				23060/704	23095/707.5	23130/711	
10MHz	QPSK	1	0	22.27	22.22	22.25	23.20
		1	25	22.33	22.57	22.40	23.20
		1	49	22.41	22.34	22.41	23.20
		25	0	22.34	22.36	22.36	23.20
		25	13	22.30	22.42	22.32	23.20
		25	25	22.41	22.48	22.38	23.20
		50	0	22.38	22.43	22.40	23.20
	16QAM	1	0	22.59	22.41	22.52	23.20
		1	25	22.57	22.52	22.60	23.20
		1	49	22.43	22.38	22.47	23.20
		25	0	21.87	21.80	21.88	22.70
		25	13	21.85	21.79	21.90	22.70
		25	25	21.96	21.89	22.01	22.70
		50	0	21.98	21.92	22.04	22.70
	64QAM	1	0	22.40	22.31	22.42	22.70
		1	25	22.42	22.37	22.45	22.70
		1	49	22.39	22.27	22.36	22.70
		25	0	21.21	21.10	21.22	21.70
		25	13	21.32	21.24	21.35	21.70
		25	25	21.16	21.09	21.21	21.70
		50	0	21.17	21.11	21.23	21.70

LTE FDD Band 12 Receiver off-body SAR				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				23017/699.7	23095/707.5	23173/715.3	
1.4MHz	QPSK	1	0	23.33	23.33	23.25	24.20
		1	2	23.53	23.38	23.34	24.20
		1	5	23.36	23.42	23.42	24.20
		3	0	23.74	23.84	23.86	24.20
		3	2	23.85	23.86	23.84	24.20
		3	3	23.86	23.87	23.82	24.20
		6	0	22.92	22.94	22.91	23.70



	16QAM	1	0	23.12	22.92	23.22	23.70
		1	2	23.10	23.02	23.15	23.70
		1	5	23.01	22.99	23.06	23.70
		3	0	22.88	22.77	22.92	23.70
		3	2	22.95	22.88	23.01	23.70
		3	3	22.98	22.94	23.04	23.70
		6	0	22.01	22.00	22.12	22.70
	64QAM	1	0	21.90	21.86	22.00	22.70
		1	2	22.02	21.98	22.09	22.70
		1	5	22.03	21.95	22.04	22.70
		3	0	21.84	21.67	21.94	22.70
		3	2	21.91	21.81	21.99	22.70
		3	3	21.87	21.83	21.93	22.70
		6	0	20.94	20.93	21.05	21.70
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				23025/700.5	23095/707.5	23165/714.5	
3MHz	QPSK	1	0	23.34	23.36	23.27	24.20
		1	7	23.52	23.42	23.39	24.20
		1	14	23.38	23.46	23.45	24.20
		8	0	22.84	22.96	22.99	23.70
		8	4	22.98	22.97	22.95	23.70
		8	7	22.96	23.00	22.93	23.70
		15	0	22.96	22.99	22.96	23.70
	16QAM	1	0	23.14	22.93	23.24	23.70
		1	7	23.13	23.04	23.19	23.70
		1	14	23.03	23.03	23.08	23.70
		8	0	22.00	21.91	22.05	22.70
		8	4	22.05	22.00	22.12	22.70
		8	7	22.08	22.06	22.17	22.70
		15	0	22.05	22.05	22.14	22.70
	64QAM	1	0	21.92	21.87	22.02	22.70
		1	7	22.05	22.00	22.11	22.70
		1	14	22.05	21.94	22.06	22.70
		8	0	20.96	20.81	21.07	21.70
		8	4	21.01	20.93	21.10	21.70
		8	7	20.97	20.95	21.06	21.70
		15	0	20.98	20.98	21.07	21.70
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				23035/701.5	23095/707.5	23155/713.5	
5MHz	QPSK	1	0	23.33	23.32	23.25	24.20
		1	13	23.50	23.41	23.36	24.20
		1	24	23.35	23.41	23.41	24.20
		12	0	22.82	22.92	22.96	23.70



		12	6	22.95	22.92	22.91	23.70
		12	13	22.93	22.97	22.89	23.70
		25	0	22.94	22.95	22.91	23.70
	16QAM	1	0	23.09	22.91	23.22	23.70
		1	13	23.11	23.01	23.17	23.70
		1	24	23.00	22.99	23.05	23.70
		12	0	21.97	21.89	22.02	22.70
		12	6	22.02	21.95	22.08	22.70
		12	13	22.06	22.02	22.14	22.70
		25	0	22.02	22.00	22.10	22.70
		1	0	21.87	21.85	22.00	22.70
	64QAM	1	13	22.03	21.97	22.09	22.70
		1	24	22.06	21.93	22.07	22.70
		12	0	20.95	20.83	21.08	21.70
		12	6	20.99	20.90	21.09	21.70
		12	13	20.95	20.91	21.03	21.70
		25	0	20.95	20.93	21.03	21.70
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				23060/704	23095/707.5	23130/711	
10MHz	QPSK	1	0	23.30	23.28	23.22	24.20
		1	25	23.49	23.37	23.34	24.20
		1	49	23.33	23.40	23.38	24.20
		25	0	22.79	22.87	22.92	23.70
		25	13	22.93	22.88	22.88	23.70
		25	25	22.90	22.92	22.85	23.70
		50	0	22.91	22.90	22.87	23.70
	16QAM	1	0	23.09	22.87	23.17	23.70
		1	25	23.07	22.99	23.13	23.70
		1	49	22.98	22.96	23.03	23.70
		25	0	21.94	21.85	21.99	22.70
		25	13	21.99	21.93	22.05	22.70
		25	25	22.03	21.97	22.10	22.70
		50	0	22.00	21.96	22.07	22.70
	64QAM	1	0	21.85	21.81	21.95	22.70
		1	25	21.99	21.95	22.05	22.70
		1	49	22.00	21.87	22.01	22.70
		25	0	20.90	20.75	21.01	21.70
		25	13	20.95	20.86	21.03	21.70
		25	25	20.92	20.86	20.99	21.70
		50	0	20.93	20.89	21.00	21.70

LTE FDD Band 12 Receiver on	Conducted Power(dBm)	Tune-up Limit
--------------------------------	----------------------	---------------



Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				23017/699.7	23095/707.5	23173/715.3	
1.4MHz	QPSK	1	0	22.78	22.87	22.75	23.70
		1	2	22.87	22.96	22.81	23.70
		1	5	22.88	22.84	22.81	23.70
		3	0	22.91	22.95	22.94	23.70
		3	2	22.90	22.98	22.91	23.70
		3	3	22.93	22.96	22.89	23.70
		6	0	22.87	23.03	22.82	23.70
	16QAM	1	0	22.99	22.77	22.86	23.70
		1	2	22.97	22.93	22.97	23.70
		1	5	22.87	22.80	22.85	23.70
		3	0	22.82	22.76	22.83	23.70
		3	2	23.01	22.93	23.00	23.70
		3	3	22.98	22.94	22.99	23.70
		6	0	21.90	21.87	21.95	22.70
	64QAM	1	0	22.06	21.94	22.03	22.70
		1	2	21.84	21.76	21.82	22.70
		1	5	21.85	21.79	21.82	22.70
		3	0	21.76	21.70	21.85	22.70
		3	2	21.85	21.77	21.86	22.70
		3	3	21.94	21.90	21.95	22.70
		6	0	20.91	20.88	20.96	21.70
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				23025/700.5	23095/707.5	23165/714.5	
3MHz	QPSK	1	0	22.77	22.89	22.74	23.70
		1	7	22.83	22.95	22.82	23.70
		1	14	22.88	22.84	22.81	23.70
		8	0	22.88	22.92	22.93	23.70
		8	4	22.90	22.94	22.88	23.70
		8	7	22.91	22.95	22.85	23.70
		15	0	22.87	23.06	22.83	23.70
	16QAM	1	0	22.99	22.75	22.86	23.70
		1	7	22.97	22.91	22.98	23.70
		1	14	22.86	22.82	22.84	23.70
		8	0	21.91	21.85	21.92	22.70
		8	4	22.09	22.01	22.08	22.70
		8	7	22.05	22.01	22.08	22.70
		15	0	21.91	21.87	21.93	22.70
	64QAM	1	0	22.06	21.96	22.03	22.70
		1	7	21.84	21.78	21.81	22.70
		1	14	21.88	21.76	21.81	22.70
		8	0	20.85	20.79	20.98	21.70



		8	4	20.93	20.85	20.94	21.70
		8	7	21.01	20.97	21.04	21.70
		15	0	20.92	20.88	20.94	21.70
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				23035/701.5	23095/707.5	23155/713.5	
5MHz	QPSK	1	0	22.79	22.90	22.77	23.70
		1	13	22.86	23.00	22.86	23.70
		1	24	22.90	22.88	22.84	23.70
		12	0	22.91	22.97	22.97	23.70
		12	6	22.93	22.99	22.92	23.70
		12	13	22.93	22.99	22.90	23.70
		25	0	22.91	23.08	22.87	23.70
	16QAM	1	0	23.01	22.78	22.88	23.70
		1	13	23.00	22.95	23.01	23.70
		1	24	22.89	22.84	22.87	23.70
		12	0	21.94	21.90	21.96	22.70
		12	6	22.11	22.05	22.11	22.70
		12	13	22.08	22.06	22.12	22.70
		25	0	21.94	21.92	21.97	22.70
	64QAM	1	0	22.08	21.95	22.05	22.70
		1	13	21.87	21.78	21.84	22.70
		1	24	21.87	21.78	21.84	22.70
		12	0	20.88	20.84	20.98	21.70
		12	6	20.95	20.89	20.97	21.70
		12	13	21.04	21.02	21.08	21.70
		25	0	20.95	20.93	20.98	21.70
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				23060/704	23095/707.5	23130/711	
10MHz	QPSK	1	0	22.75	22.82	22.72	23.70
		1	25	22.83	22.95	22.81	23.70
		1	49	22.85	22.82	22.77	23.70
		25	0	22.86	22.88	22.90	23.70
		25	13	22.88	22.90	22.85	23.70
		25	25	22.87	22.91	22.82	23.70
		50	0	22.86	22.99	22.78	23.70
	16QAM	1	0	22.96	22.72	22.81	23.70
		1	25	22.94	22.90	22.95	23.70
		1	49	22.84	22.77	22.82	23.70
		25	0	21.88	21.84	21.90	22.70
		25	13	22.05	21.98	22.04	22.70
		25	25	22.03	21.97	22.05	22.70
		50	0	21.89	21.83	21.90	22.70
	64QAM	1	0	22.01	21.89	21.98	22.70



		1	25	21.81	21.73	21.78	22.70
		1	49	21.82	21.71	21.79	22.70
		25	0	20.82	20.78	20.92	21.70
		25	13	20.89	20.82	20.90	21.70
		25	25	20.99	20.93	21.01	21.70
		50	0	20.90	20.84	20.91	21.70

LTE FDD Band 17 Receiver off-body SAR				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				23755/706.5	23790/710	23825/713.5	
5MHz	QPSK	1	0	23.30	23.36	23.25	24.20
		1	13	23.41	23.47	23.49	24.20
		1	24	23.37	23.37	23.41	24.20
		12	0	22.93	23.02	22.92	23.70
		12	6	22.92	23.03	22.94	23.70
		12	13	22.97	22.97	22.93	23.70
		25	0	23.02	22.99	22.98	23.70
	16QAM	1	0	23.02	23.00	23.11	23.70
		1	13	23.01	22.89	22.98	23.70
		1	24	23.16	23.11	23.13	23.70
		12	0	21.85	21.76	21.82	22.70
		12	6	21.96	21.87	21.93	22.70
		12	13	21.97	21.94	21.98	22.70
		25	0	21.93	21.90	21.95	22.70
	64QAM	1	0	22.06	21.93	22.04	22.70
		1	13	21.90	21.78	21.87	22.70
		1	24	21.75	21.66	21.71	22.70
		12	0	20.95	20.86	21.00	21.70
		12	6	21.02	20.93	21.01	21.70
		12	13	21.02	20.99	21.03	21.70
		25	0	20.92	20.89	20.94	21.70
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				23780/709	23790/710	23800/711	
10MHz	QPSK	1	0	23.26	23.28	23.20	24.20
		1	25	23.38	23.42	23.44	24.20
		1	49	23.32	23.31	23.34	24.20
		25	0	22.88	22.93	22.85	23.70
		25	13	22.87	22.94	22.87	23.70
		25	25	22.91	22.89	22.85	23.70
		50	0	22.97	22.90	22.89	23.70
	16QAM	1	0	22.97	22.94	23.04	23.70
		1	25	22.95	22.84	22.92	23.70



		1	49	23.11	23.04	23.08	23.70
		25	0	21.79	21.70	21.76	22.70
		25	13	21.90	21.80	21.86	22.70
		25	25	21.92	21.85	21.91	22.70
		50	0	21.88	21.81	21.88	22.70
	64QAM	1	0	21.99	21.87	21.97	22.70
		1	25	21.84	21.73	21.81	22.70
		1	49	21.70	21.59	21.66	22.70
		25	0	20.89	20.80	20.94	21.70
		25	13	20.96	20.86	20.94	21.70
		25	25	20.97	20.90	20.96	21.70
		50	0	20.87	20.80	20.87	21.70

LTE FDD Band 17 Simultaneous Wi-Fi + body SAR /Hotspot				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				23755/706.5	23790/710	23825/713.5	
5MHz	QPSK	1	0	22.30	22.38	22.37	23.20
		1	13	22.35	22.35	22.49	23.20
		1	24	22.29	22.40	22.38	23.20
		12	0	22.43	22.51	22.43	23.20
		12	6	22.39	22.49	22.51	23.20
		12	13	22.45	22.46	22.41	23.20
		25	0	22.38	22.50	22.46	23.20
	16QAM	1	0	22.72	22.78	22.71	23.20
		1	13	22.70	22.71	22.62	23.20
		1	24	22.63	22.71	22.60	23.20
		12	0	21.91	21.98	21.85	22.70
		12	6	21.97	22.03	21.92	22.70
		12	13	21.99	22.10	21.94	22.70
		25	0	21.97	22.08	21.96	22.70
	64QAM	1	0	22.49	22.57	22.42	22.70
		1	13	22.44	22.45	22.36	22.70
		1	24	22.38	22.45	22.27	22.70
		12	0	21.53	21.62	21.41	21.70
		12	6	21.51	21.58	21.42	21.70
		12	13	21.35	21.46	21.30	21.70
		25	0	21.37	21.48	21.36	21.70
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				23780/709	23790/710	23800/711	
10MHz	QPSK	1	0	22.25	22.29	22.31	23.20
		1	25	22.33	22.31	22.45	23.20
		1	49	22.23	22.33	22.30	23.20



		25	0	22.38	22.42	22.36	23.20
		25	13	22.35	22.41	22.43	23.20
		25	25	22.39	22.40	22.34	23.20
		50	0	22.37	22.42	22.39	23.20
	16QAM	1	0	22.62	22.71	22.63	23.20
		1	25	22.64	22.68	22.56	23.20
		1	49	22.58	22.64	22.54	23.20
		25	0	21.86	21.93	21.80	22.70
		25	13	21.90	21.95	21.84	22.70
		25	25	21.94	22.01	21.87	22.70
		50	0	21.93	22.00	21.88	22.70
	64QAM	1	0	22.41	22.50	22.34	22.70
		1	25	22.38	22.42	22.30	22.70
		1	49	22.33	22.38	22.21	22.70
		25	0	21.48	21.57	21.36	21.70
		25	13	21.44	21.50	21.34	21.70
		25	25	21.30	21.37	21.23	21.70
		50	0	21.33	21.40	21.28	21.70

LTE FDD Band 17 receiver on				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				23755/706.5	23790/710	23825/713.5	
5MHz	QPSK	1	0	22.76	22.83	22.81	23.70
		1	13	22.91	22.89	22.87	23.70
		1	24	22.87	22.79	22.77	23.70
		12	0	22.92	22.95	22.93	23.70
		12	6	22.95	22.89	22.87	23.70
		12	13	22.98	22.93	22.89	23.70
		25	0	22.97	22.95	22.92	23.70
	16QAM	1	0	22.93	22.71	22.96	23.70
		1	13	22.91	22.83	22.95	23.70
		1	24	22.93	22.91	22.95	23.70
		12	0	21.89	21.80	21.91	22.70
		12	6	21.96	21.90	21.99	22.70
		12	13	21.90	21.84	21.95	22.70
		25	0	21.97	21.93	22.01	22.70
	64QAM	1	0	22.04	22.00	22.09	22.70
		1	13	22.19	22.15	22.23	22.70
		1	24	22.33	22.20	22.35	22.70
		12	0	21.51	21.36	21.61	21.70
		12	6	21.53	21.44	21.59	21.70
		12	13	21.49	21.43	21.54	21.70



Bandwidth	Modulation	25	0	21.52	21.48	21.56	21.70
		RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				23780/709	23790/710	23800/711	
10MHz	QPSK	1	0	22.74	22.76	22.79	23.70
		1	25	22.91	22.89	22.86	23.70
		1	49	22.84	22.77	22.73	23.70
		25	0	22.90	22.91	22.90	23.70
		25	13	22.93	22.85	22.84	23.70
		25	25	22.94	22.89	22.86	23.70
		50	0	22.96	22.88	22.87	23.70
	16QAM	1	0	22.86	22.68	22.91	23.70
		1	25	22.88	22.82	22.92	23.70
		1	49	22.91	22.86	22.93	23.70
		25	0	21.86	21.79	21.89	22.70
		25	13	21.92	21.87	21.95	22.70
		25	25	21.88	21.80	21.92	22.70
		50	0	21.95	21.89	21.98	22.70
	64QAM	1	0	21.99	21.93	22.04	22.70
		1	25	22.16	22.10	22.20	22.70
		1	49	22.27	22.15	22.33	22.70
		25	0	21.48	21.35	21.55	21.70
		25	13	21.49	21.41	21.55	21.70
		25	25	21.47	21.39	21.51	21.70
		50	0	21.50	21.44	21.53	21.70

LTE TDD Band 38 Receiver off-body SAR				Maximum Output Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				37775/2572.5	38000/2595	38225/2617.5	
5MHz	QPSK	1	0	20.83	20.89	20.83	22.25
		1	13	21.11	21.07	21.13	22.25
		1	24	20.91	20.90	20.88	22.25
		12	0	22.63	22.62	22.60	23.50
		12	6	22.69	22.75	22.69	23.50
		12	13	22.76	22.76	22.73	23.50
		25	0	22.68	22.83	22.78	23.50
	16QAM	1	0	20.82	20.60	20.57	22.00
		1	13	20.80	20.85	21.00	22.00
		1	24	20.67	20.75	20.63	22.00
		12	0	21.62	21.56	21.53	22.50
		12	6	21.63	21.72	21.55	22.50
		12	13	21.65	21.75	21.58	22.50



	64QAM	25	0	21.72	21.76	21.59	22.50
		1	0	20.27	20.44	20.21	21.00
		1	13	20.21	20.45	20.19	21.00
		1	24	20.33	20.47	20.19	21.00
		12	0	20.73	20.92	20.74	21.50
		12	6	20.86	21.04	20.80	21.50
		12	13	21.12	21.28	21.05	21.50
		25	0	21.16	21.34	21.09	21.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				37800/2575	38000/2595	38200/2615	
10MHz	QPSK	1	0	20.85	20.90	20.86	22.25
		1	25	21.14	21.12	21.17	22.25
		1	49	20.93	20.94	20.91	22.25
		25	0	22.66	22.67	22.64	23.50
		25	13	22.72	22.80	22.73	23.50
		25	25	22.78	22.80	22.78	23.50
		50	0	22.72	22.85	22.82	23.50
	16QAM	1	0	20.84	20.63	20.59	22.00
		1	25	20.83	20.89	21.03	22.00
		1	49	20.70	20.77	20.66	22.00
		25	0	21.65	21.61	21.57	22.50
		25	13	21.65	21.76	21.58	22.50
		25	25	21.68	21.80	21.62	22.50
		50	0	21.75	21.81	21.63	22.50
	64QAM	1	0	20.29	20.43	20.23	21.00
		1	25	20.24	20.45	20.22	21.00
		1	49	20.32	20.49	20.22	21.00
		25	0	20.76	20.97	20.74	21.50
		25	13	20.88	21.08	20.83	21.50
		25	25	21.15	21.33	21.09	21.50
		50	0	21.19	21.39	21.13	21.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				37825/2577.5	38000/2595	38175/2612.5	
15MHz	QPSK	1	0	20.84	20.86	20.84	22.25
		1	38	21.12	21.11	21.14	22.25
		1	74	20.90	20.89	20.87	22.25
		36	0	22.64	22.63	22.61	23.50
		36	18	22.69	22.75	22.69	23.50
		36	39	22.75	22.77	22.74	23.50
		75	0	22.70	22.81	22.77	23.50
	16QAM	1	0	20.79	20.61	20.57	22.00
		1	38	20.81	20.86	21.01	22.00
		1	74	20.67	20.73	20.63	22.00



		36	0	21.62	21.59	21.54	22.50
		36	18	21.62	21.71	21.54	22.50
		36	39	21.66	21.76	21.59	22.50
		75	0	21.72	21.76	21.59	22.50
	64QAM	1	0	20.24	20.41	20.21	21.00
		1	38	20.22	20.42	20.20	21.00
		1	74	20.33	20.48	20.23	21.00
		36	0	20.75	20.99	20.75	21.50
		36	18	20.86	21.05	20.82	21.50
		36	39	21.13	21.29	21.06	21.50
		75	0	21.16	21.34	21.09	21.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				37850/2580	38000/2595	38150/2610	
20MHz	QPSK	1	0	20.81	20.82	20.81	22.25
		1	50	21.11	21.17	21.12	22.25
		1	99	20.88	20.88	20.84	22.25
		50	0	22.61	22.58	22.57	23.50
		50	25	22.67	22.71	22.66	23.50
		50	50	22.72	22.72	22.70	23.50
		100	0	22.67	22.76	22.73	23.50
	16QAM	1	0	20.66	20.57	20.52	22.00
		1	50	20.77	20.84	20.97	22.00
		1	99	20.65	20.70	20.61	22.00
		50	0	21.59	21.55	21.51	22.50
		50	25	21.59	21.69	21.51	22.50
		50	50	21.63	21.71	21.55	22.50
		100	0	21.70	21.72	21.56	22.50
	64QAM	1	0	20.22	20.37	20.16	21.00
		1	50	20.18	20.40	20.16	21.00
		1	99	20.27	20.42	20.17	21.00
		50	0	20.70	20.91	20.68	21.50
		50	25	20.82	21.01	20.76	21.50
		50	50	21.10	21.24	21.02	21.50
		100	0	21.14	21.30	21.06	21.50

LTE TDD Band 38 Receiver on/ Hotspot/ Simultaneous Wi-Fi +body SAR				Maximum Output Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				37775/2572.5	38000/2595	38225/2617.5	
5MHz	QPSK	1	0	18.38	18.47	18.33	19.75
		1	13	18.66	18.62	18.47	19.75
		1	24	18.51	18.43	18.37	19.75



		12	0	20.44	20.51	20.49	21.25
		12	6	20.52	20.55	20.56	21.25
		12	13	20.62	20.58	20.22	21.25
		25	0	20.58	20.66	20.62	21.25
	16QAM	1	0	18.84	18.22	18.38	19.75
		1	13	18.82	18.75	18.77	19.75
		1	24	18.60	18.53	18.54	19.75
		12	0	20.65	20.46	20.55	21.25
		12	6	20.69	20.51	20.60	21.25
		12	13	20.74	20.60	20.67	21.25
		25	0	20.85	20.64	20.77	21.25
	64QAM	1	0	18.37	18.27	18.31	19.75
		1	13	18.59	18.54	18.54	19.75
		1	24	18.61	18.43	18.50	19.75
		12	0	20.50	20.40	20.47	21.25
		12	6	20.66	20.52	20.59	21.25
		12	13	20.70	20.55	20.62	21.25
		25	0	20.71	20.56	20.63	21.25
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				37800/2575	38000/2595	38200/2615	
10MHz	QPSK	1	0	18.40	18.48	18.36	19.75
		1	25	18.69	18.67	18.51	19.75
		1	49	18.53	18.47	18.40	19.75
		25	0	20.47	20.56	20.53	21.25
		25	13	20.55	20.60	20.60	21.25
		25	25	20.64	20.62	20.27	21.25
		50	0	20.62	20.68	20.66	21.25
	16QAM	1	0	18.86	18.25	18.40	19.75
		1	25	18.85	18.79	18.80	19.75
		1	49	18.63	18.55	18.57	19.75
		25	0	20.68	20.51	20.59	21.25
		25	13	20.71	20.55	20.63	21.25
		25	25	20.77	20.65	20.71	21.25
		50	0	20.88	20.69	20.81	21.25
	64QAM	1	0	18.39	18.26	18.33	19.75
		1	25	18.62	18.54	18.57	19.75
		1	49	18.60	18.45	18.53	19.75
		25	0	20.53	20.45	20.47	21.25
		25	13	20.68	20.56	20.62	21.25
		25	25	20.73	20.60	20.66	21.25
		50	0	20.74	20.61	20.67	21.25
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				37825/2577.5	38000/2595	38175/2612.5	



15MHz	QPSK	1	0	18.39	18.44	18.34	19.75
		1	38	18.67	18.66	18.48	19.75
		1	74	18.50	18.42	18.36	19.75
		36	0	20.45	20.52	20.50	21.25
		36	18	20.52	20.55	20.56	21.25
		36	39	20.61	20.59	20.23	21.25
		75	0	20.60	20.64	20.61	21.25
	16QAM	1	0	18.81	18.23	18.38	19.75
		1	38	18.83	18.76	18.78	19.75
		1	74	18.60	18.51	18.54	19.75
		36	0	20.65	20.49	20.56	21.25
		36	18	20.68	20.50	20.59	21.25
		36	39	20.75	20.61	20.68	21.25
		75	0	20.85	20.64	20.77	21.25
	64QAM	1	0	18.34	18.24	18.31	19.75
		1	38	18.60	18.51	18.55	19.75
		1	74	18.61	18.44	18.54	19.75
		36	0	20.52	20.47	20.48	21.25
		36	18	20.66	20.53	20.61	21.25
		36	39	20.71	20.56	20.63	21.25
		75	0	20.71	20.56	20.63	21.25
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				37850/2580	38000/2595	38150/2610	
20MHz	QPSK	1	0	18.36	18.40	18.31	19.75
		1	50	18.60	18.62	18.46	19.75
		1	99	18.48	18.41	18.33	19.75
		50	0	20.42	20.47	20.46	21.25
		50	25	20.50	20.51	20.53	21.25
		50	50	20.58	20.59	20.19	21.25
		100	0	20.57	20.59	20.57	21.25
	16QAM	1	0	18.41	18.19	18.33	19.75
		1	50	18.79	18.74	18.74	19.75
		1	99	18.58	18.48	18.52	19.75
		50	0	20.62	20.45	20.53	21.25
		50	25	20.65	20.48	20.56	21.25
		50	50	20.72	20.56	20.64	21.25
		100	0	20.83	20.60	20.74	21.25
	64QAM	1	0	18.32	18.20	18.26	19.75
		1	50	18.56	18.49	18.51	19.75
		1	99	18.55	18.38	18.48	19.75
		50	0	20.47	20.39	20.41	21.25
		50	25	20.62	20.49	20.55	21.25
		50	50	20.68	20.51	20.59	21.25



		100	0	20.69	20.52	20.60	21.25
--	--	-----	---	-------	-------	-------	-------

LTE TDD Band 41 Receiver off-body SAR				Maximum Output Power(dBm)					Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency(MHz)					
				39675/ 2498.5	40148/ 2545.8	40620/ 2593	41093/ 2640.3	41565/ 2687.5	
5MHz	QPSK	1	0	23.01	22.96	22.80	22.97	22.59	24.00
		1	13	23.17	23.12	23.13	23.12	22.78	24.00
		1	24	23.05	23.04	22.93	22.93	22.46	24.00
		12	0	22.62	22.59	22.47	22.52	22.18	23.50
		12	6	22.64	22.61	22.54	22.52	22.16	23.50
		12	13	22.67	22.63	22.59	22.49	21.99	23.50
		25	0	22.70	22.68	22.55	22.59	22.13	23.50
	16QAM	1	0	22.71	22.30	22.45	22.68	22.12	23.50
		1	13	22.70	22.41	22.57	22.66	22.28	23.50
		1	24	22.55	22.46	22.47	22.50	22.26	23.50
		12	0	21.57	21.55	21.54	21.46	21.16	22.50
		12	6	21.51	21.57	21.47	21.53	21.18	22.50
		12	13	21.53	21.61	21.53	21.50	21.07	22.50
		25	0	21.59	21.64	21.58	21.59	21.15	22.50
	64QAM	1	0	21.72	21.65	21.59	21.86	21.83	22.50
		1	13	21.87	21.78	21.78	21.71	21.54	22.50
		1	24	21.64	21.67	21.57	20.58	20.61	22.50
		12	0	20.64	20.59	20.55	20.74	20.67	21.50
		12	6	20.78	20.75	20.68	20.79	20.71	21.50
		12	13	20.73	20.79	20.69	20.83	20.84	21.50
		25	0	20.81	20.86	20.78	20.80	20.85	21.50
Bandwidth	Modulation	RB allocation	offset	Channel/Frequency(MHz)					Tune-up Limit
				39700/ 2501	40160/ 2547	40620/ 2593	41080/ 2639	41540/ 2685	
10MHz	QPSK	1	0	22.99	22.95	22.77	22.96	22.58	24.00
		1	25	23.14	23.07	23.09	23.13	22.79	24.00
		1	49	23.03	23.00	22.90	22.92	22.45	24.00
		25	0	22.59	22.54	22.43	22.52	22.18	23.50
		25	13	22.61	22.56	22.50	22.53	22.17	23.50
		25	25	22.65	22.59	22.54	22.49	22.01	23.50
		50	0	22.66	22.66	22.51	22.63	22.14	23.50
	16QAM	1	0	22.69	22.27	22.43	22.67	22.11	23.50
		1	25	22.67	22.37	22.54	22.66	22.30	23.50
		1	49	22.52	22.44	22.44	22.50	22.26	23.50
		25	0	21.54	21.50	21.50	21.47	21.17	22.50



		25	13	21.49	21.53	21.44	21.52	21.17	22.50
		25	25	21.50	21.56	21.49	21.50	21.07	22.50
		50	0	21.56	21.59	21.54	21.60	21.16	22.50
	64QAM	1	0	21.70	21.66	21.57	21.85	21.82	22.50
		1	25	21.84	21.78	21.75	21.71	21.56	22.50
		1	49	21.65	21.65	21.54	20.58	20.61	22.50
		25	0	20.61	20.54	20.55	20.75	20.68	21.50
		25	13	20.76	20.71	20.65	20.78	20.70	21.50
		25	25	20.70	20.74	20.65	20.83	20.84	21.50
		50	0	20.78	20.81	20.74	20.81	20.86	21.50
Bandwidth	Modulation	RB allocation	offset	Channel/Frequency(MHz)					Tune-up Limit
				39725/ 2503.5	40173/ 2548.3	40620/ 2593	41068/ 2637.8	41515/ 2682.5	
15MHz	QPSK	1	0	23.00	22.92	22.78	22.94	22.57	24.00
		1	38	23.15	23.11	23.10	23.10	22.74	24.00
		1	74	23.02	22.99	22.89	22.90	22.41	24.00
		36	0	22.60	22.55	22.44	22.49	22.13	23.50
		36	18	22.61	22.56	22.50	22.50	22.12	23.50
		36	39	22.64	22.60	22.55	22.47	21.97	23.50
		75	0	22.68	22.64	22.50	22.59	22.12	23.50
	16QAM	1	0	22.66	22.28	22.43	22.65	22.08	23.50
		1	38	22.68	22.38	22.55	22.63	22.26	23.50
		1	74	22.52	22.42	22.44	22.47	22.24	23.50
		36	0	21.54	21.53	21.51	21.44	21.12	22.50
		36	18	21.48	21.52	21.43	21.50	21.13	22.50
		36	39	21.51	21.57	21.50	21.47	21.02	22.50
		75	0	21.56	21.59	21.54	21.57	21.11	22.50
	64QAM	1	0	21.67	21.63	21.57	21.83	21.83	22.50
		1	38	21.85	21.75	21.76	21.68	21.56	22.50
		1	74	21.65	21.66	21.58	20.59	20.59	22.50
		36	0	20.63	20.61	20.56	20.72	20.63	21.50
		36	18	20.76	20.72	20.67	20.76	20.66	21.50
		36	39	20.71	20.75	20.66	20.80	20.79	21.50
		75	0	20.78	20.81	20.74	20.78	20.81	21.50
Bandwidth	Modulation	RB allocation	offset	Channel/Frequency(MHz)					Tune-up Limit
				39750/ 2506	40185/ 2549.5	40620/ 2593	41055/ 2636.5	41490/ 2680	
	QPSK	1	0	22.97	22.88	22.75	22.92	22.50	24.00
		1	50	23.14	23.07	23.08	23.10	22.74	24.00
		1	99	23.00	22.98	22.86	22.87	22.39	24.00
		50	0	22.57	22.50	22.40	22.47	22.09	23.50
		50	25	22.59	22.52	22.47	22.48	22.08	23.50
		50	50	22.61	22.55	22.51	22.43	21.93	23.50



		100	0	22.65	22.59	22.46	22.58	22.05	23.50
	16QAM	1	0	22.49	22.24	22.38	22.45	22.05	23.50
		1	50	22.64	22.36	22.51	22.60	22.25	23.50
		1	99	22.50	22.39	22.42	22.45	22.19	23.50
		50	0	21.51	21.49	21.48	21.41	21.11	22.50
		50	25	21.45	21.50	21.40	21.46	21.10	22.50
		50	50	21.48	21.52	21.46	21.45	20.98	22.50
		100	0	21.54	21.55	21.51	21.55	21.07	22.50
	64QAM	1	0	21.65	21.59	21.52	21.78	21.76	22.50
		1	50	21.81	21.73	21.72	21.65	21.51	22.50
		1	99	21.59	21.60	21.52	20.53	20.54	22.50
		50	0	20.58	20.53	20.49	20.69	20.62	21.50
		50	25	20.72	20.68	20.61	20.72	20.63	21.50
		50	50	20.68	20.70	20.62	20.78	20.75	21.50
		100	0	20.76	20.77	20.71	20.76	20.77	21.50

LTE TDD Band 41 Simultaneous Wi-Fi + body SAR				Maximum Output Power(dBm)					Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency(MHz)					
				39675/ 2498.5	40148/ 2545.8	40620/ 2593	41093/ 2640.3	41565/ 2687.5	
5MHz	QPSK	1	0	21.96	22.07	21.98	22.00	21.94	23.00
		1	13	22.22	22.25	22.17	22.15	22.13	23.00
		1	24	22.03	22.03	22.22	22.15	21.91	23.00
		12	0	22.09	21.63	22.02	21.97	22.05	23.00
		12	6	22.03	22.17	22.17	22.06	22.08	23.00
		12	13	22.10	22.19	22.11	22.11	21.95	23.00
		25	0	22.17	22.21	22.09	22.12	22.13	23.00
	16QAM	1	0	22.32	22.06	21.98	22.31	22.06	23.00
		1	13	22.30	22.25	22.21	22.29	22.25	23.00
		1	24	22.22	22.21	22.14	22.28	22.21	23.00
		12	0	21.50	21.45	21.41	21.49	21.44	22.50
		12	6	21.69	21.64	21.57	21.71	21.64	22.50
		12	13	21.68	21.66	21.60	21.72	21.67	22.50
		25	0	21.72	21.69	21.63	21.75	21.70	22.50
	64QAM	1	0	21.57	21.56	21.44	21.60	21.56	22.50
		1	13	21.75	21.74	21.66	21.74	21.74	22.50
		1	24	21.58	21.53	21.46	21.64	21.53	22.50
		12	0	21.03	20.98	20.98	21.02	20.97	21.50
		12	6	21.15	21.10	21.03	21.17	21.10	21.50
		12	13	21.13	21.11	21.05	21.17	21.12	21.50
		25	0	21.22	21.19	21.13	21.25	21.20	21.50
Bandwidth	Modulation	RB	offset	Channel/Frequency(MHz)					Tune-up



		allocation		39700/ 2501	40160/ 2547	40620/ 2593	41080/ 2639	41540/ 2685	Limit
10MHz	QPSK	1	0	21.98	22.08	22.01	22.02	21.95	23.00
		1	25	22.25	22.30	22.21	22.18	22.18	23.00
		1	49	22.05	22.07	22.25	22.17	21.95	23.00
		25	0	22.12	21.68	22.06	22.00	22.10	23.00
		25	13	22.06	22.22	22.21	22.09	22.13	23.00
		25	25	22.12	22.23	22.16	22.13	21.99	23.00
		50	0	22.21	22.23	22.13	22.16	22.15	23.00
	16QAM	1	0	22.34	22.09	22.00	22.33	22.09	23.00
		1	25	22.33	22.29	22.24	22.32	22.29	23.00
		1	49	22.25	22.23	22.17	22.31	22.23	23.00
		25	0	21.53	21.50	21.45	21.52	21.49	22.50
		25	13	21.71	21.68	21.60	21.73	21.68	22.50
		25	25	21.71	21.71	21.64	21.75	21.72	22.50
		50	0	21.75	21.74	21.67	21.78	21.75	22.50
	64QAM	1	0	21.59	21.55	21.46	21.62	21.55	22.50
		1	25	21.78	21.74	21.69	21.77	21.74	22.50
		1	49	21.57	21.55	21.49	21.63	21.55	22.50
		25	0	21.06	21.03	20.98	21.05	21.02	21.50
		25	13	21.17	21.14	21.06	21.19	21.14	21.50
		25	25	21.16	21.16	21.09	21.20	21.17	21.50
		50	0	21.25	21.24	21.17	21.28	21.25	21.50
Bandwidth	Modulation	RB allocation	offset	Channel/Frequency(MHz)					Tune-up Limit
				39725/ 2503.5	40173/ 2548.3	40620/ 2593	41068/ 2637.8	41515/ 2682.5	
15MHz	QPSK	1	0	21.97	22.04	21.99	22.01	21.91	23.00
		1	38	22.23	22.29	22.18	22.16	22.17	23.00
		1	74	22.02	22.02	22.21	22.14	21.90	23.00
		36	0	22.10	21.64	22.03	21.98	22.06	23.00
		36	18	22.03	22.17	22.17	22.06	22.08	23.00
		36	39	22.09	22.20	22.12	22.10	21.96	23.00
		75	0	22.19	22.19	22.08	22.14	22.11	23.00
	16QAM	1	0	22.29	22.07	21.98	22.28	22.07	23.00
		1	38	22.31	22.26	22.22	22.30	22.26	23.00
		1	74	22.22	22.19	22.14	22.28	22.19	23.00
		36	0	21.50	21.48	21.42	21.49	21.47	22.50
		36	18	21.68	21.63	21.56	21.70	21.63	22.50
		36	39	21.69	21.67	21.61	21.73	21.68	22.50
		75	0	21.72	21.69	21.63	21.75	21.70	22.50
	64QAM	1	0	21.54	21.53	21.44	21.57	21.53	22.50
		1	38	21.76	21.71	21.67	21.75	21.71	22.50
		1	74	21.58	21.54	21.50	21.64	21.54	22.50



		36	0	21.05	21.05	20.99	21.04	21.04	21.50
		36	18	21.15	21.11	21.05	21.17	21.11	21.50
		36	39	21.14	21.12	21.06	21.18	21.13	21.50
		75	0	21.22	21.19	21.13	21.25	21.20	21.50
Bandwidth	Modulation	RB allocation	offset	Channel/Frequency(MHz)					Tune-up Limit
				39750/ 2506	40185/ 2549.5	40620/ 2593	41055/ 2636.5	41490/ 2680	
	QPSK	1	0	21.99	22.05	22.05	22.08	21.99	23.00
		1	50	22.27	22.33	22.32	22.19	22.17	23.00
		1	99	22.12	22.21	22.11	22.05	22.03	23.00
		50	0	22.13	22.14	22.09	22.08	22.05	23.00
		50	25	22.18	22.24	22.15	22.13	22.06	23.00
		50	50	22.15	22.19	22.23	22.12	22.01	23.00
		100	0	22.21	22.25	22.24	22.19	22.09	23.00
	16QAM	1	0	22.09	22.13	22.14	22.05	22.04	23.00
		1	50	22.30	22.37	22.31	22.33	22.19	23.00
		1	99	22.11	22.26	22.17	22.12	22.06	23.00
		50	0	21.60	21.61	21.57	21.50	21.94	22.50
		50	25	21.65	21.70	21.63	21.58	21.74	22.50
		50	50	21.62	21.61	21.67	21.60	21.65	22.50
		100	0	21.67	21.80	21.83	21.73	21.76	22.50
	64QAM	1	0	21.81	21.72	21.90	21.81	21.63	22.50
		1	50	22.02	21.98	22.09	21.97	22.22	22.50
		1	99	21.87	21.27	21.08	21.13	22.17	22.50
		50	0	21.22	21.14	21.23	21.17	21.22	21.50
		50	25	21.23	21.12	21.18	21.24	21.31	21.50
		50	50	21.20	21.24	21.17	20.94	21.02	21.50
		100	0	21.37	21.18	21.13	21.14	21.13	21.50

LTE TDD Band 41 Receiver on/ Hotspot				Maximum Output Power(dBm)					Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency(MHz)					
				39675/ 2498.5	40148/ 2545.8	40620/ 2593	41093/ 2640.3	41565/ 2687.5	
5MHz	QPSK	1	0	20.79	20.79	20.70	20.73	20.44	21.25
		1	13	20.99	20.95	20.86	20.57	20.59	21.25
		1	24	20.86	20.83	20.76	20.66	20.48	21.25
		12	0	20.88	20.77	20.63	20.77	20.39	21.25
		12	6	20.81	20.81	20.67	20.75	20.42	21.25
		12	13	20.80	20.76	20.75	20.77	20.49	21.25
		25	0	20.92	20.94	20.76	20.77	20.53	21.25
	16QAM	1	0	20.85	20.78	20.59	20.52	20.27	21.25
		1	13	21.01	20.83	20.90	20.74	20.59	21.25



		1	24	20.89	20.82	20.79	20.73	20.50	21.25
		12	0	20.85	20.72	20.64	20.67	20.37	21.25
		12	6	20.84	20.79	20.75	20.62	20.44	21.25
		12	13	20.74	20.81	20.75	20.68	20.48	21.25
		25	0	20.92	20.84	20.73	20.59	20.44	21.25
	64QAM	1	0	20.98	20.97	20.81	20.55	20.32	21.25
		1	13	20.88	20.79	20.62	20.78	20.60	21.25
		1	24	21.03	20.88	20.92	20.74	20.52	21.25
		12	0	20.92	20.83	20.81	20.74	20.41	21.25
		12	6	20.87	20.76	20.69	20.64	20.48	21.25
		12	13	20.84	20.81	20.76	20.70	20.50	21.25
		25	0	20.74	20.83	20.76	20.64	20.49	21.25
Bandwidth	Modulation	RB allocation	offset	Channel/Frequency(MHz)					Tune-up Limit
				39700/ 2501	40160/ 2547	40620/ 2593	41080/ 2639	41540/ 2685	
10MHz	QPSK	1	0	20.76	20.77	20.66	20.72	20.45	21.25
		1	25	20.97	20.91	20.83	20.56	20.55	21.25
		1	49	20.83	20.78	20.72	20.65	20.46	21.25
		25	0	20.85	20.72	20.59	20.76	20.35	21.25
		25	13	20.79	20.77	20.62	20.73	20.39	21.25
		25	25	20.78	20.74	20.71	20.77	20.49	21.25
		50	0	20.90	20.93	20.74	20.77	20.52	21.25
	16QAM	1	0	20.82	20.74	20.56	20.53	20.29	21.25
		1	25	20.98	20.81	20.87	20.72	20.56	21.25
		1	49	20.86	20.80	20.75	20.72	20.52	21.25
		25	0	20.83	20.68	20.61	20.69	20.33	21.25
		25	13	20.81	20.74	20.71	20.63	20.45	21.25
		25	25	20.71	20.76	20.71	20.66	20.44	21.25
		50	0	20.90	20.80	20.68	20.60	20.42	21.25
	64QAM	1	0	20.95	20.93	20.78	20.55	20.33	21.25
		1	25	20.85	20.77	20.59	20.76	20.58	21.25
		1	49	21.00	20.86	20.88	20.74	20.55	21.25
		25	0	20.90	20.79	20.78	20.72	20.37	21.25
		25	13	20.84	20.71	20.65	20.66	20.47	21.25
		25	25	20.81	20.76	20.72	20.69	20.49	21.25
		50	0	20.72	20.79	20.71	20.62	20.46	21.25
Bandwidth	Modulation	RB allocation	offset	Channel/Frequency(MHz)					Tune-up Limit
				39725/ 2503.5	40173/ 2548.3	40620/ 2593	41068/ 2637.8	41515/ 2682.5	
15MHz	QPSK	1	0	20.77	20.74	20.67	20.73	20.42	21.25
		1	38	20.98	20.95	20.84	20.57	20.59	21.25
		1	74	20.82	20.77	20.71	20.64	20.45	21.25
		36	0	20.86	20.73	20.60	20.77	20.36	21.25



		36	18	20.79	20.77	20.62	20.73	20.39	21.25
		36	39	20.77	20.75	20.72	20.76	20.50	21.25
		75	0	20.93	20.91	20.73	20.80	20.50	21.25
	16QAM	1	0	20.79	20.75	20.56	20.50	20.30	21.25
		1	38	20.99	20.82	20.88	20.73	20.57	21.25
		1	74	20.86	20.78	20.75	20.72	20.50	21.25
		36	0	20.83	20.71	20.62	20.69	20.36	21.25
		36	18	20.80	20.73	20.70	20.62	20.44	21.25
		36	39	20.72	20.77	20.72	20.67	20.45	21.25
		75	0	20.90	20.80	20.68	20.60	20.42	21.25
	64QAM	1	0	20.92	20.94	20.78	20.52	20.34	21.25
		1	38	20.86	20.78	20.60	20.77	20.59	21.25
		1	74	21.00	20.84	20.88	20.74	20.53	21.25
		36	0	20.90	20.82	20.79	20.72	20.40	21.25
		36	18	20.83	20.70	20.64	20.65	20.46	21.25
		36	39	20.82	20.77	20.73	20.70	20.50	21.25
		75	0	20.72	20.79	20.71	20.62	20.46	21.25
Bandwidth	Modulation	RB allocation	offset	Channel/Frequency(MHz)					Tune-up Limit
				39750/ 2506	40185/ 2549.5	40620/ 2593	41055/ 2636.5	41490/ 2680	
20MHz	QPSK	1	0	20.74	20.70	20.64	20.70	20.38	21.25
		1	50	20.97	20.91	20.82	20.56	20.55	21.25
		1	99	20.80	20.76	20.68	20.62	20.44	21.25
		50	0	20.83	20.68	20.56	20.74	20.31	21.25
		50	25	20.77	20.73	20.59	20.71	20.35	21.25
		50	50	20.74	20.70	20.68	20.73	20.45	21.25
		100	0	20.90	20.86	20.69	20.77	20.45	21.25
	16QAM	1	0	20.77	20.71	20.51	20.48	20.26	21.25
		1	50	20.95	20.80	20.84	20.69	20.55	21.25
		1	99	20.84	20.75	20.73	20.70	20.47	21.25
		50	0	20.80	20.67	20.59	20.66	20.32	21.25
		50	25	20.77	20.71	20.67	20.59	20.42	21.25
		50	50	20.69	20.72	20.68	20.64	20.40	21.25
		100	0	20.88	20.76	20.65	20.58	20.38	21.25
	64QAM	1	0	20.90	20.90	20.73	20.50	20.30	21.25
		1	50	20.82	20.76	20.56	20.73	20.57	21.25
		1	99	20.98	20.81	20.86	20.72	20.50	21.25
		50	0	20.87	20.78	20.76	20.69	20.36	21.25
		50	25	20.80	20.68	20.61	20.62	20.44	21.25
		50	50	20.79	20.72	20.69	20.67	20.45	21.25
		100	0	20.70	20.75	20.68	20.60	20.42	21.25

LTE FDD Band 66	Conducted Power(dBm)	Tune-up
-----------------	----------------------	---------



Receiver off-body SAR				Channel/Frequency (MHz)			Limit
Bandwidth	Modulation	RB size	RB offset	131979/1710.	132322/1745	132665/1779.	
				7		3	
1.4MHz	QPSK	1	0	21.98	21.99	21.93	23.80
		1	2	22.18	22.19	22.07	23.80
		1	5	22.05	21.97	21.96	23.80
		3	0	22.42	22.62	22.48	23.80
		3	2	22.43	22.57	22.46	23.80
		3	3	22.52	22.45	22.43	23.80
		6	0	21.50	21.57	21.52	23.30
	16QAM	1	0	22.09	22.29	22.33	23.30
		1	2	22.07	22.11	22.11	23.30
		1	5	22.05	22.14	22.03	23.30
		3	0	22.22	22.35	22.35	23.30
		3	2	22.22	22.30	22.28	23.30
		3	3	22.20	22.34	22.20	23.30
		6	0	21.29	21.57	21.54	22.30
	64QAM	1	0	21.33	21.45	21.42	22.30
		1	2	21.33	21.29	21.32	22.30
		1	5	21.31	21.46	21.31	22.30
		3	0	21.90	22.05	21.94	22.30
		3	2	21.97	21.98	21.97	22.30
		3	3	21.97	22.10	22.00	22.30
		6	0	21.04	21.20	21.15	21.30
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				131987/1711.	132322/1745	132657/1778.	
				5		5	
3MHz	QPSK	1	0	21.97	22.01	21.92	23.80
		1	7	22.14	22.18	22.08	23.80
		1	14	22.05	21.97	21.96	23.80
		8	0	21.49	21.69	21.57	23.30
		8	4	21.53	21.63	21.53	23.30
		8	7	21.60	21.54	21.49	23.30
		15	0	21.50	21.60	21.53	23.30
	16QAM	1	0	22.09	22.27	22.33	23.30
		1	7	22.07	22.09	22.12	23.30
		1	14	22.04	22.16	22.02	23.30
		8	0	21.31	21.44	21.44	22.30
		8	4	21.30	21.38	21.36	22.30
		8	7	21.27	21.41	21.29	22.30
		15	0	21.30	21.57	21.52	22.30
	64QAM	1	0	21.33	21.47	21.42	22.30



		1	7	21.33	21.31	21.31	22.30
		1	14	21.34	21.43	21.30	22.30
		8	0	20.99	21.14	21.07	21.30
		8	4	21.05	21.06	21.05	21.30
		8	7	21.04	21.17	21.09	21.30
		15	0	21.05	21.20	21.13	21.30
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				131997/1712.5	132322/1745	132647/1777.5	
5MHz	QPSK	1	0	22.00	22.03	21.96	23.80
		1	13	22.16	22.22	22.11	23.80
		1	24	22.08	22.02	22.00	23.80
		12	0	21.52	21.74	21.61	23.30
		12	6	21.55	21.67	21.58	23.30
		12	13	21.62	21.56	21.53	23.30
		25	0	21.50	21.61	21.55	23.30
	16QAM	1	0	22.12	22.31	22.36	23.30
		1	13	22.10	22.11	22.15	23.30
		1	24	22.07	22.18	22.06	23.30
		12	0	21.33	21.48	21.47	22.30
		12	6	21.33	21.43	21.40	22.30
		12	13	21.30	21.46	21.33	22.30
		25	0	21.32	21.61	21.57	22.30
	64QAM	1	0	21.36	21.47	21.45	22.30
		1	13	21.36	21.29	21.34	22.30
		1	24	21.33	21.45	21.34	22.30
		12	0	21.01	21.18	21.06	21.30
		12	6	21.08	21.11	21.09	21.30
		12	13	21.07	21.22	21.13	21.30
		25	0	21.07	21.24	21.18	21.30
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				132022/1715	132322/1745	132622/1775	
10MHz	QPSK	1	0	21.98	21.98	21.93	23.80
		1	25	22.15	22.22	22.09	23.80
		1	49	22.04	21.96	21.95	23.80
		25	0	21.50	21.70	21.58	23.30
		25	13	21.53	21.63	21.53	23.30
		25	25	21.59	21.55	21.50	23.30
		50	0	21.52	21.58	21.52	23.30
	16QAM	1	0	22.06	22.28	22.33	23.30
		1	25	22.08	22.10	22.13	23.30
		1	49	22.04	22.14	22.02	23.30
		25	0	21.31	21.47	21.45	22.30



	64QAM	25	13	21.29	21.37	21.35	22.30
		25	25	21.28	21.42	21.30	22.30
		50	0	21.30	21.57	21.52	22.30
		1	0	21.30	21.44	21.42	22.30
		1	25	21.34	21.28	21.32	22.30
		1	49	21.34	21.44	21.34	22.30
		25	0	21.01	21.21	21.08	21.30
		25	13	21.05	21.07	21.07	21.30
		25	25	21.05	21.18	21.10	21.30
		50	0	21.05	21.20	21.13	21.30
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				132047/1717.5	132322/1745	132597/1772.5	
15MHz	QPSK	1	0	21.99	22.02	21.95	23.80
		1	38	22.17	22.23	22.12	23.80
		1	74	22.07	22.01	21.99	23.80
		36	0	21.52	21.74	21.61	23.30
		36	18	21.56	21.68	21.57	23.30
		36	39	21.62	21.58	21.54	23.30
		75	0	21.54	21.62	21.57	23.30
	16QAM	1	0	22.11	22.30	22.35	23.30
		1	38	22.10	22.13	22.15	23.30
		1	74	22.07	22.18	22.05	23.30
		36	0	21.34	21.49	21.48	22.30
		36	18	21.32	21.42	21.39	22.30
		36	39	21.30	21.46	21.33	22.30
		75	0	21.33	21.62	21.56	22.30
	64QAM	1	0	21.35	21.46	21.44	22.30
		1	38	21.36	21.31	21.34	22.30
		1	74	21.33	21.45	21.33	22.30
		36	0	21.02	21.19	21.07	21.30
		36	18	21.07	21.10	21.08	21.30
		36	39	21.07	21.22	21.13	21.30
		75	0	21.08	21.25	21.17	21.30
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				132072/1720	132322/1745	132572/1770	
20MHz	QPSK	1	0	21.95	21.94	21.90	23.80
		1	50	22.14	22.18	22.07	23.80
		1	99	22.02	21.95	21.92	23.80
		50	0	21.47	21.65	21.54	23.30
		50	25	21.51	21.59	21.50	23.30
		50	50	21.56	21.50	21.46	23.30
		100	0	21.49	21.53	21.48	23.30



	16QAM	1	0	22.10	22.24	22.28	23.30
		1	50	22.04	22.08	22.09	23.30
		1	99	22.02	22.11	22.00	23.30
		50	0	21.28	21.43	21.42	22.30
		50	25	21.26	21.35	21.32	22.30
		50	50	21.25	21.37	21.26	22.30
		100	0	21.28	21.53	21.49	22.30
	64QAM	1	0	21.28	21.40	21.37	22.30
		1	50	21.30	21.26	21.28	22.30
		1	99	21.28	21.38	21.28	22.30
		50	0	20.76	20.93	20.81	21.30
		50	25	20.81	20.83	20.81	21.30
		50	50	20.82	20.93	20.86	21.30
		100	0	20.83	20.96	20.90	21.30

LTE FDD Band 66 Simultaneous Wi-Fi + body SAR /Hotspot				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				131979/1710. 7	132322/1745	132665/1779. 3	
1.4MHz	QPSK	1	0	18.07	18.01	17.87	19.80
		1	2	18.31	18.26	18.15	19.80
		1	5	18.05	17.94	17.87	19.80
		3	0	18.09	18.11	18.05	19.80
		3	2	18.11	18.08	18.03	19.80
		3	3	18.15	18.07	18.01	19.80
		6	0	18.11	18.17	18.08	19.80
	16QAM	1	0	18.14	18.09	17.97	19.80
		1	2	18.37	18.31	18.23	19.80
		1	5	18.09	17.99	17.91	19.80
		3	0	18.14	18.19	18.14	19.80
		3	2	18.17	18.15	18.09	19.80
		3	3	18.20	18.19	18.06	19.80
		6	0	18.17	18.26	18.16	19.80
	64QAM	1	0	18.18	18.10	18.02	19.80
		1	2	18.42	18.35	18.24	19.80
		1	5	18.12	18.02	17.95	19.80
		3	0	18.15	18.24	18.17	19.80
		3	2	18.20	18.17	18.14	19.80
		3	3	18.24	18.27	18.08	19.80
		6	0	18.19	18.30	18.17	19.80
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				1319871711.	132322/1745	132657/1778.	



				5		5	
3MHz	QPSK	1	0	18.06	18.03	17.86	19.80
		1	7	18.29	18.24	18.16	19.80
		1	14	18.05	17.94	17.87	19.80
		8	0	18.10	18.13	18.08	19.80
		8	4	18.12	18.12	18.04	19.80
		8	7	18.17	18.10	18.01	19.80
		15	0	18.11	18.20	18.09	19.80
	16QAM	1	0	18.14	18.07	17.97	19.80
		1	7	18.37	18.31	18.24	19.80
		1	14	18.08	18.01	17.90	19.80
		8	0	18.17	18.19	18.14	19.80
		8	4	18.19	18.17	18.11	19.80
		8	7	18.21	18.20	18.09	19.80
		15	0	18.18	18.26	18.14	19.80
	64QAM	1	0	18.18	18.08	18.02	19.80
		1	7	18.42	18.35	18.25	19.80
		1	14	18.11	18.04	17.94	19.80
		8	0	18.18	18.24	18.17	19.80
		8	4	18.22	18.19	18.16	19.80
		8	7	18.25	18.28	18.11	19.80
		15	0	18.19	18.32	18.17	19.80
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				131997/1712. 5	132322/1745	132647/1777. 5	
5MHz	QPSK	1	0	18.09	18.05	17.90	19.80
		1	13	18.31	18.28	18.19	19.80
		1	24	18.08	17.99	17.91	19.80
		12	0	18.13	18.18	18.12	19.80
		12	6	18.14	18.16	18.09	19.80
		12	13	18.19	18.12	18.05	19.80
		25	0	18.13	18.21	18.11	19.80
	16QAM	1	0	18.17	18.11	18.00	19.80
		1	13	18.40	18.33	18.27	19.80
		1	24	18.11	18.03	17.94	19.80
		12	0	18.19	18.23	18.17	19.80
		12	6	18.22	18.22	18.15	19.80
		12	13	18.24	18.25	18.13	19.80
		25	0	18.20	18.30	18.19	19.80
	64QAM	1	0	18.21	18.12	18.05	19.80
		1	13	18.45	18.37	18.28	19.80
		1	24	18.14	18.06	17.98	19.80
		12	0	18.20	18.28	18.20	19.80



		12	6	18.25	18.24	18.20	19.80
		12	13	18.28	18.33	18.15	19.80
		25	0	18.21	18.36	18.22	19.80
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				132022/1715	132322/1745	132622/1775	
10MHz	QPSK	1	0	18.07	18.00	17.87	19.80
		1	25	18.30	18.28	18.17	19.80
		1	49	18.04	17.93	17.86	19.80
		25	0	18.11	18.14	18.09	19.80
		25	13	18.12	18.12	18.04	19.80
		25	25	18.16	18.11	18.02	19.80
		50	0	18.14	18.18	18.08	19.80
	16QAM	1	0	18.11	18.08	17.97	19.80
		1	25	18.38	18.32	18.25	19.80
		1	49	18.08	17.99	17.90	19.80
		25	0	18.17	18.22	18.15	19.80
		25	13	18.18	18.16	18.10	19.80
		25	25	18.22	18.21	18.10	19.80
		50	0	18.18	18.26	18.14	19.80
	64QAM	1	0	18.15	18.09	18.02	19.80
		1	25	18.43	18.36	18.26	19.80
		1	49	18.11	18.02	17.94	19.80
		25	0	18.18	18.27	18.18	19.80
		25	13	18.21	18.18	18.15	19.80
		25	25	18.26	18.29	18.12	19.80
		50	0	18.19	18.32	18.17	19.80
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				132047/1717.5	132322/1745	132597/1772.5	
15MHz	QPSK	1	0	18.07	18.02	17.88	19.80
		1	38	18.30	18.28	18.18	19.80
		1	74	18.06	17.96	17.89	19.80
		36	0	18.11	18.17	18.10	19.80
		36	18	18.14	18.15	18.07	19.80
		36	39	18.17	18.10	18.05	19.80
		75	0	18.11	18.21	18.10	19.80
	16QAM	1	0	18.13	18.05	17.97	19.80
		1	38	18.39	18.34	18.22	19.80
		1	74	18.09	17.99	17.92	19.80
		36	0	18.15	18.23	18.15	19.80
		36	18	18.18	18.16	18.12	19.80
		36	39	18.23	18.24	18.08	19.80
		75	0	18.17	18.28	18.14	19.80



	64QAM	1	0	18.18	18.07	18.03	19.80
		1	38	18.44	18.37	18.25	19.80
		1	74	18.11	18.01	17.95	19.80
		36	0	18.20	18.28	18.16	19.80
		36	18	18.20	18.20	18.15	19.80
		36	39	18.26	18.29	18.14	19.80
		75	0	18.21	18.35	18.18	19.80
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				132072/1720	132322/1745	132572/1770	
20MHz	QPSK	1	0	18.04	17.96	17.84	19.80
		1	50	18.59	18.24	18.15	19.80
		1	99	18.02	17.92	17.83	19.80
		50	0	18.08	18.09	18.05	19.80
		50	25	18.10	18.08	18.01	19.80
		50	50	18.43	18.06	17.98	19.80
		100	0	18.11	18.13	18.04	19.80
		100	0	18.11	18.13	18.04	19.80
	16QAM	1	0	18.09	18.04	17.92	19.80
		1	50	18.34	18.30	18.21	19.80
		1	99	18.06	17.96	17.88	19.80
		50	0	18.14	18.18	18.12	19.80
		50	25	18.15	18.14	18.07	19.80
		50	50	18.19	18.16	18.06	19.80
		100	0	18.16	18.22	18.11	19.80
		100	0	18.16	18.22	18.11	19.80
	64QAM	1	0	18.13	18.05	17.97	19.80
		1	50	18.39	18.34	18.22	19.80
		1	99	18.09	17.99	17.92	19.80
		50	0	18.15	18.23	18.15	19.80
		50	25	18.18	18.16	18.12	19.80
		50	50	18.23	18.24	18.08	19.80
		100	0	18.17	18.28	18.14	19.80
		100	0	18.17	18.28	18.14	19.80

LTE FDD Band 66 Receiver on				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				131979/1710. 7	132322/1745	132665/1779. 3	
1.4MHz	QPSK	1	0	18.55	18.54	18.43	20.30
		1	2	18.78	18.75	18.66	20.30
		1	5	18.50	18.52	18.40	20.30
		3	0	18.54	18.61	18.56	20.30
		3	2	18.56	18.56	18.54	20.30
		3	3	18.60	18.55	18.51	20.30
		6	0	18.59	18.66	18.59	20.30



	16QAM	1	0	18.60	18.60	18.49	20.30
		1	2	18.80	18.78	18.71	20.30
		1	5	18.54	18.57	18.45	20.30
		3	0	18.56	18.68	18.63	20.30
		3	2	18.61	18.64	18.60	20.30
		3	3	18.63	18.61	18.55	20.30
		6	0	18.60	18.74	18.66	20.30
	64QAM	1	0	18.62	18.64	18.54	20.30
		1	2	18.84	18.80	18.75	20.30
		1	5	18.56	18.60	18.47	20.30
		3	0	18.59	18.72	18.66	20.30
		3	2	18.64	18.66	18.63	20.30
		3	3	18.66	18.66	18.59	20.30
		6	0	18.63	18.76	18.67	20.30
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				1319871711. 5	132322/1745	132657/1778. 5	
3MHz	QPSK	1	0	18.57	18.58	18.46	20.30
		1	7	18.78	18.77	18.70	20.30
		1	14	18.53	18.57	18.44	20.30
		8	0	18.58	18.68	18.63	20.30
		8	4	18.59	18.64	18.60	20.30
		8	7	18.64	18.60	18.55	20.30
		15	0	18.61	18.70	18.62	20.30
	16QAM	1	0	18.63	18.62	18.52	20.30
		1	7	18.83	18.80	18.75	20.30
		1	14	18.56	18.61	18.48	20.30
		8	0	18.61	18.72	18.66	20.30
		8	4	18.66	18.71	18.66	20.30
		8	7	18.67	18.67	18.62	20.30
		15	0	18.63	18.78	18.69	20.30
	64QAM	1	0	18.65	18.66	18.57	20.30
		1	7	18.87	18.82	18.79	20.30
		1	14	18.58	18.64	18.50	20.30
		8	0	18.64	18.76	18.69	20.30
		8	4	18.69	18.73	18.69	20.30
		8	7	18.70	18.72	18.66	20.30
		15	0	18.65	18.82	18.72	20.30
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				131997/1712. 5	132322/1745	132647/1777. 5	
5MHz	QPSK	1	0	18.54	18.56	18.42	20.30
		1	13	18.76	18.73	18.67	20.30



		1	24	18.50	18.52	18.40	20.30
		12	0	18.55	18.63	18.59	20.30
		12	6	18.57	18.60	18.55	20.30
		12	13	18.62	18.58	18.51	20.30
		25	0	18.59	18.69	18.60	20.30
		1	0	18.60	18.58	18.49	20.30
		1	13	18.80	18.78	18.72	20.30
	16QAM	1	24	18.53	18.59	18.44	20.30
		12	0	18.59	18.68	18.63	20.30
		12	6	18.63	18.66	18.62	20.30
		12	13	18.64	18.62	18.58	20.30
		25	0	18.61	18.74	18.64	20.30
		1	0	18.62	18.62	18.54	20.30
		1	13	18.84	18.80	18.76	20.30
	64QAM	1	24	18.55	18.62	18.46	20.30
		12	0	18.62	18.72	18.66	20.30
		12	6	18.66	18.68	18.65	20.30
		12	13	18.67	18.67	18.62	20.30
		25	0	18.63	18.78	18.67	20.30
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				132022/1715	132322/1745	132622/1775	
10MHz	QPSK	1	0	18.55	18.55	18.44	20.30
		1	25	18.77	18.77	18.69	20.30
		1	49	18.51	18.54	18.42	20.30
		25	0	18.56	18.67	18.61	20.30
		25	13	18.59	18.63	18.58	20.30
		25	25	18.62	18.58	18.55	20.30
		50	0	18.59	18.70	18.61	20.30
	16QAM	1	0	18.59	18.56	18.49	20.30
		1	25	18.82	18.81	18.70	20.30
		1	49	18.54	18.57	18.46	20.30
		25	0	18.57	18.72	18.64	20.30
		25	13	18.62	18.65	18.63	20.30
		25	25	18.66	18.66	18.57	20.30
		50	0	18.60	18.76	18.64	20.30
	64QAM	1	0	18.62	18.61	18.55	20.30
		1	25	18.86	18.82	18.76	20.30
		1	49	18.55	18.59	18.47	20.30
		25	0	18.64	18.76	18.65	20.30
		25	13	18.64	18.69	18.64	20.30
		25	25	18.68	18.68	18.65	20.30
		50	0	18.65	18.81	18.68	20.30
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up



				132047/1717. 5	132322/1745	132597/1772. 5	Limit
15MHz	QPSK	1	0	18.55	18.53	18.43	20.30
		1	38	18.77	18.77	18.68	20.30
		1	74	18.49	18.51	18.39	20.30
		36	0	18.56	18.64	18.60	20.30
		36	18	18.57	18.60	18.55	20.30
		36	39	18.61	18.59	18.52	20.30
		75	0	18.62	18.67	18.59	20.30
	16QAM	1	0	18.57	18.59	18.49	20.30
		1	38	18.81	18.79	18.73	20.30
		1	74	18.53	18.57	18.44	20.30
		36	0	18.59	18.71	18.64	20.30
		36	18	18.62	18.65	18.61	20.30
		36	39	18.65	18.63	18.59	20.30
		75	0	18.61	18.74	18.64	20.30
	64QAM	1	0	18.59	18.63	18.54	20.30
		1	38	18.85	18.81	18.77	20.30
		1	74	18.55	18.60	18.46	20.30
		36	0	18.62	18.75	18.67	20.30
		36	18	18.65	18.67	18.64	20.30
		36	39	18.68	18.68	18.63	20.30
		75	0	18.63	18.78	18.67	20.30
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				132072/1720	132322/1745	132572/1770	
20MHz	QPSK	1	0	18.52	18.49	18.40	20.30
		1	50	18.76	18.73	18.66	20.30
		1	99	18.47	18.50	18.36	20.30
		50	0	18.53	18.59	18.56	20.30
		50	25	18.55	18.56	18.52	20.30
		50	50	18.58	18.54	18.48	20.30
		100	0	18.59	18.62	18.55	20.30
	16QAM	1	0	18.55	18.55	18.44	20.30
		1	50	18.77	18.77	18.69	20.30
		1	99	18.51	18.54	18.42	20.30
		50	0	18.56	18.67	18.61	20.30
		50	25	18.59	18.63	18.58	20.30
		50	50	18.62	18.58	18.55	20.30
		100	0	18.59	18.70	18.61	20.30
	64QAM	1	0	18.57	18.59	18.49	20.30
		1	50	18.81	18.79	18.73	20.30
		1	99	18.53	18.57	18.44	20.30
		50	0	18.59	18.71	18.64	20.30



		50	25	18.62	18.65	18.61	20.30
		50	50	18.65	18.63	18.59	20.30
		100	0	18.61	18.74	18.64	20.30

Antenna	CA Combanation	Test Scenario	Modulation	PCC (UL)						SCC1 (UL)					Conducted Power (dbm)	Tune up (dbm)
				PCC Band	PCC BW (MHz)	PCC UL RB size	PCC UL RB offset	PCC UL Channel	PCC DL Channel	SCC Band	SCC BW (MHz)	SCC UL Channel	SCC UL RB size	SCC UL RB offset		
Main Antenna	CA_7C	Receiver on	QPSK	7	20	1	99	20850	2850	7	20	21048	1	0	23.44	24.50
			QPSK	7	20	1	0	21100	3100	7	20	20902	1	99	23.38	24.50
			QPSK	7	20	1	99	21100	3100	7	20	21298	1	0	23.35	24.50
			QPSK	7	20	1	0	21350	3350	7	20	21152	1	99	23.29	24.50
	CA_7C	Receiver off-body SAR / Simultaneous Wi-Fi +body SAR / Hotspot	QPSK	7	20	1	99	20850	2850	7	20	21048	1	0	22.59	23.50
			QPSK	7	20	1	0	21100	3100	7	20	20902	1	99	22.46	23.50
			QPSK	7	20	1	99	21100	3100	7	20	21298	1	0	22.42	23.50
			QPSK	7	20	1	0	21350	3350	7	20	21152	1	99	22.45	23.50
Second Antenna	CA_7C	Receiver off-body SAR	QPSK	7	20	1	99	20850	2850	7	20	21048	1	0	20.88	21.50
			QPSK	7	20	1	0	21100	3100	7	20	20902	1	99	20.75	21.50
			QPSK	7	20	1	99	21100	3100	7	20	21298	1	0	20.94	21.50
			QPSK	7	20	1	0	21350	3350	7	20	21152	1	99	20.81	21.50
	CA_7C	Simultaneous Wi-Fi+body SAR	QPSK	7	20	1	99	20850	2850	7	20	21048	1	0	18.55	19.50
			QPSK	7	20	1	0	21100	3100	7	20	20902	1	99	18.36	19.50
			QPSK	7	20	1	99	21100	3100	7	20	21298	1	0	18.45	19.50
			QPSK	7	20	1	0	21350	3350	7	20	21152	1	99	18.42	19.50
	CA_7C	Receiver on/ Hotspot	QPSK	7	20	1	99	20850	2850	7	20	21048	1	0	17.78	18.25
			QPSK	7	20	1	0	21100	3100	7	20	20902	1	99	17.73	18.25
			QPSK	7	20	1	99	21100	3100	7	20	21298	1	0	17.66	18.25
			QPSK	7	20	1	0	21350	3350	7	20	21152	1	99	17.65	18.25
Main Antenna	CA_38C	Receiver on /	QPSK	38	20	1	99	37850	37850	38	20	38048	1	0	23.28	24.50
		Receiver off-body	QPSK	38	20	1	99	38000	38000	38	20	38198	1	0	23.10	24.50
		SAR / With earphone	QPSK	38	20	1	0	38150	38150	38	20	37952	1	99	23.13	24.50
Second Antenna	CA_38C	Receiver off-body SAR	QPSK	38	20	50	50	37850	37850	38	20	38048	50	0	22.59	23.75
			QPSK	38	20	50	50	38000	38000	38	20	38198	50	0	22.38	23.75
			QPSK	38	20	50	0	38150	38150	38	20	37952	50	50	22.46	23.75
	CA_38C	Receiver on/ Hotspot/ Simultaneous Wi-Fi + body SAR	QPSK	38	20	50	50	37850	37850	38	20	38048	50	0	20.13	21.25
			QPSK	38	20	50	50	38000	38000	38	20	38198	50	0	20.27	21.25
			QPSK	38	20	50	0	38150	38150	38	20	37952	50	50	20.22	21.25



Antenna	CA Combination	Test Scenario	Modulation	PCC (UL)						SCC1 (UL)					Conducted Power (dbm)	Tune up (dbm)
				PCC Band	PCC BW (MHz)	PCC UL RB size	PCC UL RB offset	PCC UL Channel	PCC DL Channel	SCC Band	SCC BW (MHz)	SCC UL Channel	SCC UL RB size	SCC UL RB offset		
Main Antenna	CA_41C	receiver on /	QPSK	41	20	1	99	39750	39750	41	20	39948	1	0	23.31	24.50
			QPSK	41	20	1	99	40185	40185	41	20	40383	1	0	23.38	24.50
		Receiver off-body	QPSK	41	20	1	0	40185	40185	41	20	39987	1	99	23.23	24.50
		SAR /	QPSK	41	20	1	99	40620	40620	41	20	40818	1	0	23.27	24.50
			Simultaneous	QPSK	41	20	1	0	40620	40620	41	20	40422	1	99	23.25
		Wi-Fi + body SAR	QPSK	41	20	1	99	41055	41055	41	20	41253	1	0	23.21	24.50
			/ Hotspot	QPSK	41	20	1	0	41055	41055	41	20	40857	1	99	23.29
		QPSK	41	20	1	0	41490	41490	41	20	41292	1	99	23.20	24.50	
Second Antenna	CA_41C	Receiver off-body	QPSK	41	20	1	99	39750	39750	41	20	39948	1	0	22.89	24.00
			QPSK	41	20	1	99	40185	40185	41	20	40383	1	0	22.82	24.00
			QPSK	41	20	1	0	40185	40185	41	20	39987	1	99	22.76	24.00
			QPSK	41	20	1	99	40620	40620	41	20	40818	1	0	22.85	24.00
			QPSK	41	20	1	0	40620	40620	41	20	40422	1	99	22.69	24.00
			QPSK	41	20	1	99	41055	41055	41	20	41253	1	0	22.72	24.00
			QPSK	41	20	1	0	41055	41055	41	20	40857	1	99	22.80	24.00
			QPSK	41	20	1	0	41490	41490	41	20	41292	1	99	22.75	24.00
	CA_41C	Simultaneous	QPSK	41	20	1	99	39750	39750	41	20	39948	1	0	22.11	23.00
			QPSK	41	20	1	99	40185	40185	41	20	40383	1	0	22.03	23.00
			QPSK	41	20	1	0	40185	40185	41	20	39987	1	99	22.06	23.00
			QPSK	41	20	1	99	40620	40620	41	20	40818	1	0	22.14	23.00
			QPSK	41	20	1	0	40620	40620	41	20	40422	1	99	22.09	23.00
			QPSK	41	20	1	99	41055	41055	41	20	41253	1	0	22.12	23.00
			QPSK	41	20	1	0	41055	41055	41	20	40857	1	99	22.10	23.00
			QPSK	41	20	1	0	41490	41490	41	20	41292	1	99	22.03	23.00
	CA_41C	Receiver on/ Hotspot	QPSK	41	20	1	99	39750	39750	41	20	39948	1	0	20.69	21.25
			QPSK	41	20	1	99	40185	40185	41	20	40383	1	0	20.61	21.25
			QPSK	41	20	1	0	40185	40185	41	20	39987	1	99	20.58	21.25
			QPSK	41	20	1	99	40620	40620	41	20	40818	1	0	20.63	21.25
			QPSK	41	20	1	0	40620	40620	41	20	40422	1	99	20.55	21.25
			QPSK	41	20	1	99	41055	41055	41	20	41253	1	0	20.65	21.25
			QPSK	41	20	1	0	41055	41055	41	20	40857	1	99	20.54	21.25
			QPSK	41	20	1	0	41490	41490	41	20	41292	1	99	20.59	21.25

9.4 WLAN Mode

Wi-Fi 2.4G	Channel /Frequency(MHz)	Maximum Output Power (dBm)	
		Tune-up	Meas.
Receiver off			
802.11b (1M)	1/2412	19.50	18.10
	6/2437	19.50	18.01
	11/2462	19.50	18.08
802.11g (6M)	1/2412	15.00	13.33
	2/2417	17.50	16.02
	3/2422	19.00	17.43
	5/2432	20.00	18.09
	6/2437	20.00	18.08
	9/2452	20.00	18.03
	10/2457	17.00	15.33
	11/2462	15.00	13.36
802.11n-HT20 (MCS0)	1/2412	15.00	13.35
	2/2417	17.50	15.78
	6/2437	19.00	17.31
	9/2452	19.00	17.19
	10/2457	17.00	15.25
	11/2462	15.00	13.03
802.11n-HT40 (MCS0)	3/2422	14.00	12.31
	4/2427	15.00	13.44
	5/2432	17.00	15.01
	6/2437	17.00	15.48
	7/2442	13.00	11.80
	9/2452	14.00	12.26

Note: Initial test configuration is 802.11b mode.

Wi-Fi 2.4G	Channel /Frequency(MHz)	Maximum Output Power (dBm)	
		Tune-up	Meas.
Receiver on			
802.11b (1M)	1/2412	13.00	11.65
	6/2437	13.00	11.67
	11/2462	13.00	11.80
802.11g (6M)	1/2412	13.00	11.43
	6/2437	13.00	11.42



	11/2462	13.00	11.31
802.11n-HT20 (MCS0)	1/2412	13.00	11.27
	6/2437	13.00	11.30
	11/2462	13.00	11.40
802.11n-HT40 (MCS0)	3/2422	13.00	11.45
	6/2437	13.00	11.60
	9/2452	13.00	11.25
Note: Initial test configuration is 802.11b mode.			

Wi-Fi 5G (U-NII-1)	Channel /Frequency(MHz)	Maximum Output Power (dBm)	
		Tune-up	Meas.
Receiver off			
802.11a (6M)	36/5180	14.00	12.70
	40/5200	16.00	14.83
	44/5220	16.00	14.44
	48/5240	16.00	14.53
802.11n-HT20 (MCS0)	36/5180	14.00	12.10
	40/5200	16.00	14.21
	44/5220	16.00	14.26
	48/5240	16.00	14.37
802.11n-HT40 (MCS0)	38/5190	11.00	9.03
	46/5230	17.00	15.01
802.11ac-VHT20 (MCS0)	36/5180	14.00	12.07
	40/5200	16.00	14.27
	44/5220	16.00	14.35
	48/5240	16.00	14.43
802.11ac-VHT40 (MCS0)	38/5190	11.00	9.31
	46/5230	17.00	15.42
802.11ac-VHT80 (MCS0)	42/5210	11.00	9.02
Note. Initial test configuration is 802.11ac-VHT40 mode, since the highest maximum output power.			

Wi-Fi 5G (U-NII-1)	Channel /Frequency(MHz)	Maximum Output Power (dBm)	
		Tune-up	Meas.
Receiver on			
802.11a (6M)	36/5180	11.00	9.37
	40/5200	11.00	9.41
	44/5220	11.00	9.67
	48/5240	11.00	9.76
802.11n-HT20	36/5180	11.00	9.15



(MCS0)	40/5200	11.00	9.08
	44/5220	11.00	9.12
	48/5240	11.00	9.05
802.11n-HT40 (MCS0)	38/5190	11.00	9.11
	46/5230	11.00	9.14
802.11ac-VHT20 (MCS0)	36/5180	11.00	9.50
	40/5200	11.00	9.45
	44/5220	11.00	9.56
	48/5240	11.00	9.62
802.11ac-VHT40 (MCS0)	38/5190	11.00	9.17
	46/5230	11.00	9.22
802.11ac-VHT80 (MCS0)	42/5210	11.00	9.05
Note. Initial test configuration is 802.11a mode, since the highest maximum output power.			

Wi-Fi 5G (U-NII-2A)	Channel /Frequency(MHz)	Maximum Output Power (dBm)	
		Tune-up	Meas.
Receiver off			
802.11a (6M)	52/5260	16.00	14.60
	56/5280	16.00	14.66
	60/5300	16.00	14.74
	64/5320	15.00	13.70
802.11n-HT20 (MCS0)	52/5260	16.00	14.51
	56/5280	16.00	14.54
	60/5300	16.00	14.63
	64/5320	15.00	13.58
802.11n-HT40 (MCS0)	54/5270	17.00	15.52
	62/5310	12.00	10.33
802.11ac-HT20 (MCS0)	52/5260	16.00	15.05
	56/5280	16.00	15.03
	60/5300	16.00	15.06
	64/5320	15.00	14.11
802.11ac-HT40 (MCS0)	54/5270	17.00	15.53
	62/5310	12.00	10.30
802.11ac-HT80 (MCS0)	58/5290	12.00	10.21
Note. Initial test configuration is 802.11ac-HT40 mode, since the highest maximum output power.			



Wi-Fi 5G (U-NII-2A)	Channel /Frequency(MHz)	Maximum Output Power (dBm)	
		Tune-up	Meas.
Receiver on			
802.11a (6M)	52/5260	11.00	9.46
	56/5280	11.00	9.35
	60/5300	11.00	9.49
	64/5320	11.00	9.54
802.11n-HT20 (MCS0)	52/5260	11.00	8.53
	56/5280	11.00	8.56
	60/5300	11.00	8.59
	64/5320	11.00	8.64
802.11n-HT40 (MCS0)	54/5270	11.00	8.80
	62/5310	11.00	8.84
802.11ac-HT20 (MCS0)	52/5260	11.00	8.67
	56/5280	11.00	8.67
	60/5300	11.00	8.72
	64/5320	11.00	8.60
802.11ac-HT40 (MCS0)	54/5270	11.00	8.83
	62/5310	11.00	8.94
802.11ac-HT80 (MCS0)	58/5290	11.00	8.62

Note. Initial test configuration is 802.11a mode, since the highest maximum output power.

Wi-Fi 5G (U-NII-2C)	Channel /Frequency(MHz)	Maximum Output Power (dBm)	
		Tune-up	Meas.
Receiver off			
802.11a (6M)	100/5500	14.00	12.51
	104/5520	17.00	15.70
	108/5540	17.00	15.85
	116/5580	17.00	15.82
	132/5660	17.00	15.80
	140/5700	12.00	10.56
802.11n-HT20 (MCS0)	100/5500	14.00	12.62
	104/5520	17.00	15.82
	108/5540	17.00	15.80
	116/5580	17.00	15.77
	132/5660	17.00	15.71
	140/5700	12.00	10.54
802.11n-HT40	102/5510	12.00	10.56



(MCS0)	110/5550	17.00	15.81
	118/5590	17.00	15.77
	134/5670	15.00	13.74
802.11ac-HT20 (MCS0)	100/5500	14.00	12.65
	104/5520	17.00	15.75
	108/5540	17.00	15.92
	116/5580	17.00	15.79
	132/5660	17.00	15.72
	140/5700	12.00	10.51
802.11ac-HT40 (MCS0)	102/5510	12.00	10.66
	110/5550	17.00	15.93
	118/5590	17.00	15.88
	134/5670	15.00	13.76
802.11ac-HT80 (MCS0)	106/5530	11.00	9.56
	122/5610	16.00	14.85
Note. Initial test configuration is 802.11ac-HT40 mode, since the highest maximum output power			

Wi-Fi 5G (U-NII-2C)	Channel /Frequency(MHz)	Maximum Output Power (dBm)	
		Tune-up	Meas.
Receiver on			
802.11a (6M)	100/5500	11.00	9.12
	116/5580	11.00	9.05
	132/5660	11.00	9.13
	140/5700	11.00	9.27
802.11n-HT20 (MCS0)	100/5500	11.00	8.60
	116/5580	11.00	8.74
	132/5660	11.00	8.62
	140/5700	11.00	8.72
802.11n-HT40 (MCS0)	102/5510	11.00	8.75
	110/5550	11.00	8.67
	118/5590	11.00	8.78
	134/5670	11.00	8.73
802.11ac-HT20 (MCS0)	100/5500	11.00	8.65
	116/5580	11.00	8.75
	132/5660	11.00	8.70
	140/5700	11.00	8.73
802.11ac-HT40 (MCS0)	102/5510	11.00	8.80
	110/5550	11.00	8.77
	118/5590	11.00	8.92



	134/5670	11.00	8.74
802.11ac-HT80 (MCS0)	106/5530	11.00	8.63
	122/5610	11.00	8.68

Note. Initial test configuration is 802.11a mode, since the highest maximum output power.

Wi-Fi 5G (U-NII-3)	Channel /Frequency(MHz)	Maximum Output Power (dBm)	
		Tune-up	Meas.
Receiver off			
802.11a (6M)	149/5745	17.00	16.33
	157/5785	17.00	16.32
	165/5825	17.00	16.21
802.11n-HT20 (MCS0)	149/5745	17.00	16.20
	157/5785	17.00	16.16
	165/5825	17.00	16.12
802.11n-HT40 (MCS0)	151/5755	17.00	16.22
	159/5795	17.00	16.15
802.11ac-HT20 (MCS0)	149/5745	17.00	16.30
	157/5785	17.00	16.20
	165/5825	17.00	16.13
802.11ac-HT40 (MCS0)	151/5755	17.00	16.25
	159/5795	17.00	16.16
802.11ac-HT80 (MCS0)	155/5775	17.00	15.81

Note. Initial test configuration is 802.11a mode, since the highest maximum output power.

Wi-Fi 5G (U-NII-3)	Channel /Frequency(MHz)	Maximum Output Power (dBm)	
		Tune-up	Meas.
Receiver on			
802.11a (6M)	149/5745	11.00	9.77
	157/5785	11.00	9.34
	165/5825	11.00	9.33
802.11n-HT20 (MCS0)	149/5745	11.00	9.21
	157/5785	11.00	9.27
	165/5825	11.00	9.20
802.11n-HT40 (MCS0)	151/5755	11.00	9.44
	159/5795	11.00	9.33
802.11ac-HT20 (MCS0)	149/5745	11.00	9.24
	157/5785	11.00	9.37



	165/5825	11.00	9.30
802.11ac-HT40 (MCS0)	151/5755	11.00	9.37
	159/5795	11.00	9.27
802.11ac-HT80 (MCS0)	155/5775	11.00	9.16
Note. Initial test configuration is 802.11a mode, since the highest maximum output power.			

9.5 Bluetooth Mode

BT	Maximum Output Power (dBm)			Tune-up Limit (dBm)
	Channel/Frequency(MHz)			
	Ch 0/2402 MHz	Ch 39/2441 MHz	Ch 78/2480 MHz	
GFSK	10.56	10.84	10.64	12.50
$\pi/4$ DQPSK	10.36	10.43	10.31	12.50
8DPSK	10.04	10.51	10.36	12.50
BLE	Ch 0/2402 MHz	Ch 19/2440 MHz	Ch 39/2480 MHz	Tune-up Limit (dBm)
GFSK(1M)	5.81	7.22	6.49	8.50
GFSK(2M)	5.59	7.56	6.14	8.50

10 Measured and Reported (Scaled) SAR Results

10.1 EUT Antenna Locations

The Detailed Antenna Locations refer to *Antenna Locations*.

Overall (Length x Width): 161.46 mm x74.76 mm						
Overall Diagonal: 171.15 mm/Display Diagonal: 161mm						
Distance of the Antenna to the EUT surface/edge						
Antenna	Back Side	Front side	Left Edge	Right Edge	Top Edge	Bottom Edge
Main-Antenna (Ant1 and Ant2)	<25mm	<25mm	<25mm	<25mm	>25mm	<25mm
Second-Antenna (Ant3, Ant4 and Ant10)	<25mm	<25mm	<25mm	>25mm	<25mm	>25mm
BT/Wi-Fi 2.4G Antenna (Ant 7)	<25mm	<25mm	>25mm	<25mm	<25mm	>25mm
Wi-Fi 5G Antenna (Ant 6)	<25mm	<25mm	>25mm	<25mm	<25mm	>25mm
Hotspot mode, Positions for SAR tests						
Mode	Back Side	Front side	Left Edge	Right Edge	Top Edge	Bottom Edge
Main-Antenna(Ant1and Ant2)	Yes	Yes	Yes	Yes	N/A	Yes
Second-Antenna (Ant3,Ant4and Ant10)	Yes	Yes	Yes	N/A	Yes	N/A
BT/Wi-Fi 2.4G Antenna	Yes	Yes	N/A	Yes	Yes	N/A
Wi-Fi 5G Antenna	Yes	Yes	N/A	Yes	Yes	N/A
Note: 1. Per KDB 941225 D06, when the overall device length and width are $\geq 9\text{cm} \times 5\text{cm}$, the test distance is 10mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge. 2. For smart phones with an overall diagonal dimension is 171.15mm. Per KDB 648474 D04, for smart phones with a display diagonal dimension $> 15.0\text{ cm}$ or an overall diagonal dimension $> 16.0\text{ cm}$, product specific 10-g SAR must be tested as a phablet to determine SAR compliance. For Phablet, Since hotspot mode 1-g <i>reported</i> SAR $< 1.2\text{ W/kg}$, product specific 10-g SAR is no required. 3. Per FCC KDB 447498 D01, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is: a) $\leq 0.8\text{ W/kg}$ or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is $\leq 100\text{MHz}$ b) $\leq 0.6\text{ W/kg}$ or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz. c) $\leq 0.4\text{ W/kg}$ or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$. 4. When the original highest measured SAR is $\geq 0.80\text{ W/kg}$, the measurement was repeated once. 5. Per FCC KDB Publication 648474 D04, SAR was evaluated without a headset connected to the device. Since the reported SAR was $\leq 1.2\text{ W/kg}$, no additional SAR evaluations using a headset cable were required.						

10.2 Measured SAR Results

Table 9: GSM 850 (Main-antenna)

Original

Test Position	Cover Type	Time slot	Duty Cycle	Channel/ Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
							Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	
Head SAR											
Left Cheek	standard	GSM	1:8.3	190/836.6	33.20	32.48	0.170	0.140	1.18	0.201	/
Left Tilt	standard	GSM	1:8.3	190/836.6	33.20	32.48	0.089	0.030	1.18	0.105	/
Right Cheek	standard	GSM	1:8.3	190/836.6	33.20	32.48	0.166	0.190	1.18	0.196	/
Right Tilt	standard	GSM	1:8.3	190/836.6	33.20	32.48	0.100	0.060	1.18	0.118	/
Left Cheek	Battery2	GSM	1:8.3	190/836.6	33.20	32.48	0.161	-0.030	1.18	0.190	/
Body-worn SAR (Distance 15mm)											
Back Side	standard	GSM	1:8.3	190/836.6	33.20	32.48	0.165	0.010	1.18	0.195	/
Front Side	standard	GSM	1:8.3	190/836.6	33.20	32.48	0.139	-0.035	1.18	0.164	/
Back Side	Battery2	GSM	1:8.3	190/836.6	33.20	32.48	0.125	0.023	1.18	0.148	/
Hotspot SAR(Distance 10mm)											
Back Side	standard	2Txslots	1:4.15	190/836.6	30.70	29.92	0.349	0.040	1.20	0.418	/
Front Side	standard	2Txslots	1:4.15	190/836.6	30.70	29.92	0.201	0.030	1.20	0.241	/
Left Edge	standard	2Txslots	1:4.15	190/836.6	30.70	29.92	0.068	0.015	1.20	0.081	/
Right Edge	standard	2Txslots	1:4.15	190/836.6	30.70	29.92	0.253	-0.037	1.20	0.303	/
Top Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Bottom Edge	standard	2Txslots	1:4.15	190/836.6	30.70	29.92	0.109	0.048	1.20	0.130	/
Back Side	Battery2	2Txslots	1:4.15	190/836.6	30.70	29.92	0.296	0.021	1.20	0.354	/
Note: 1.The value with blue color is the maximum SAR Value of each test band.											
2.When multiple slots are used, SAR should be tested to account for the maximum source-based time-averaged output power.											

Variant

Test Position	Cover Type	Time slot	Duty Cycle	Channel/ Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
							Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	
Head SAR											
Left Cheek	standard	GSM	1:8.3	190/836.6	33.20	32.48	0.163	-0.021	1.18	0.192	12
Body-worn SAR (Distance 15mm)											
Back Side	standard	GSM	1:8.3	190/836.6	33.20	32.48	0.175	0.110	1.18	0.207	13
Hotspot SAR(Distance 10mm)											
Back Side	standard	2Txslots	1:4.15	190/836.6	30.70	29.92	0.305	-0.022	1.20	0.365	14
Note: 1.The value with blue color is the maximum SAR Value of each test band.											



Table 10: GSM 1900(Main-antenna)

Original

Test Position	Cover Type	Time slot	Duty Cycle	Channel/ Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
							Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	
Head SAR											
Left Cheek	standard	GSM	1:8.3	661/1880	30.20	29.56	0.060	0.039	1.16	0.069	/
Left Tilt	standard	GSM	1:8.3	661/1880	30.20	29.56	0.037	0.024	1.16	0.043	/
Right Cheek	standard	GSM	1:8.3	661/1880	30.20	29.56	0.055	0.022	1.16	0.063	/
Right Tilt	standard	GSM	1:8.3	661/1880	30.20	29.56	0.033	0.040	1.16	0.038	/
Left Cheek	Battery2	GSM	1:8.3	661/1880	30.20	29.56	0.058	0.011	1.16	0.067	/
Body-worn SAR (Distance 15mm)											
Back Side	standard	GSM	1:8.3	661/1880	30.20	29.56	0.093	-0.027	1.16	0.108	/
Front Side	standard	GSM	1:8.3	661/1880	30.20	29.56	0.076	0.038	1.16	0.088	/
Back Side	Battery2	GSM	1:8.3	661/1880	30.20	29.56	0.075	0.020	1.16	0.087	/
Hotspot SARSAR (Distance 10mm)											
Back Side	standard	2Txslots	1:4.15	661/1880	27.70	26.39	0.175	0.041	1.35	0.237	/
Front Side	standard	2Txslots	1:4.15	661/1880	27.70	26.39	0.149	0.025	1.35	0.201	/
Left Edge	standard	2Txslots	1:4.15	661/1880	27.70	26.39	0.050	-0.010	1.35	0.068	/
Right Edge	standard	2Txslots	1:4.15	661/1880	27.70	26.39	0.012	-0.036	1.35	0.016	/
Top Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Bottom Edge	standard	2Txslots	1:4.15	661/1880	27.70	26.39	0.254	-0.017	1.35	0.343	/
Bottom Edge	Battery2	2Txslots	1:4.15	661/1880	27.70	26.39	0.229	-0.025	1.35	0.310	/
Note: 1.The value with blue color is the maximum SAR Value of each test band.											
2.When multiple slots are used, SAR should be tested to account for the maximum source-based time-averaged output power.											

Variant

Test Position	Cover Type	Time slot	Duty Cycle	Channel/ Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
							Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	
Head SAR											
Left Cheek	standard	GSM	1:8.3	661/1880	30.20	29.56	0.080	0.074	1.16	0.093	15
Body-worn SAR (Distance 15mm)											
Back Side	standard	GSM	1:8.3	661/1880	30.20	29.56	0.090	0.090	1.16	0.104	16
Hotspot SARSAR (Distance 10mm)											
Bottom Edge	standard	2Txslots	1:4.15	661/1880	27.70	26.39	0.287	-0.150	1.35	0.388	17
Note: 1.The value with blue color is the maximum SAR Value of each test band.											



Table 11: UMTS Band II (Main-antenna)

Original

Test Position	Cover Type	Channel Type	Duty Cycle	Channel/ Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
							Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	
Head SAR											
Left Cheek	standard	RMC 12.2K	1:1	9400/1880	24.60	23.28	0.105	0.057	1.36	0.142	/
Left Tilt	standard	RMC 12.2K	1:1	9400/1880	24.60	23.28	0.055	0.030	1.36	0.074	/
Right Cheek	standard	RMC 12.2K	1:1	9400/1880	24.60	23.28	0.100	0.090	1.36	0.135	/
Right Tilt	standard	RMC 12.2K	1:1	9400/1880	24.60	23.28	0.050	0.130	1.36	0.068	/
Left Cheek	Battery2	RMC 12.2K	1:1	9400/1880	24.60	23.28	0.089	0.090	1.36	0.121	/
Body-worn SAR (Distance 15mm)											
Back Side	standard	RMC 12.2K	1:1	9400/1880	24.10	22.58	0.213	-0.029	1.42	0.302	/
Front Side	standard	RMC 12.2K	1:1	9400/1880	24.10	22.58	0.165	0.035	1.42	0.234	/
Back Side	Battery2	RMC 12.2K	1:1	9400/1880	24.10	22.58	0.195	-0.052	1.42	0.277	/
Hotspot SAR(Distance 10mm)											
Back Side	standard	RMC 12.2K	1:1	9400/1880	24.10	22.58	0.436	0.060	1.42	0.619	/
Front Side	standard	RMC 12.2K	1:1	9400/1880	24.10	22.58	0.312	-0.021	1.42	0.443	/
Left Edge	standard	RMC 12.2K	1:1	9400/1880	24.10	22.58	0.108	-0.039	1.42	0.153	/
Right Edge	standard	RMC 12.2K	1:1	9400/1880	24.10	22.58	0.042	0.071	1.42	0.060	/
Top Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Bottom Edge	standard	RMC 12.2K	1:1	9400/1880	24.10	22.58	0.452	0.070	1.42	0.641	/
Bottom Edge	Battery2	RMC 12.2K	1:1	9400/1880	24.10	22.58	0.436	-0.015	1.42	0.619	/
Note: 1.The value with blue color is the maximum SAR Value of each test band.											
2. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is ≤ ¼ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.											

Variant

Test Position	Cover Type	Channel Type	Duty Cycle	Channel/ Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
							Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	
Head SAR											
Left Cheek	standard	RMC 12.2K	1:1	9400/1880	24.60	23.28	0.113	0.042	1.36	0.153	18
Body-worn SAR (Distance 15mm)											
Back Side	standard	RMC 12.2K	1:1	9400/1880	24.10	22.58	0.286	0.120	1.42	0.406	19
Hotspot SAR(Distance 10mm)											
Bottom Edge	standard	RMC 12.2K	1:1	9400/1880	24.10	22.58	0.469	0.030	1.42	0.666	20
Note: 1.The value with blue color is the maximum SAR Value of each test band.											



Table 12: UMTS Band IV (Main-antenna)

Original

Test Position	Cover Type	Channel Type	Duty Cycle	Channel/ Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
							Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	
Head SAR											
Left Cheek	standard	RMC 12.2K	1:1	1413/1732.6	24.70	23.80	0.140	0.042	1.23	0.172	/
Left Tilt	standard	RMC 12.2K	1:1	1413/1732.6	24.70	23.80	0.093	0.170	1.23	0.115	/
Right Cheek	standard	RMC 12.2K	1:1	1413/1732.6	24.70	23.80	0.145	-0.070	1.23	0.178	/
Right Tilt	standard	RMC 12.2K	1:1	1413/1732.6	24.70	23.80	0.083	0.030	1.23	0.102	/
Right Cheek	Battery2	RMC 12.2K	1:1	1413/1732.6	24.70	23.80	0.113	0.027	1.23	0.139	/
Body-worn SAR (Distance 15mm)											
Back Side	standard	RMC 12.2K	1:1	1413/1732.6	23.45	22.36	0.250	-0.140	1.29	0.321	/
Front Side	standard	RMC 12.2K	1:1	1413/1732.6	23.45	22.36	0.187	0.056	1.29	0.240	/
Back Side	Battery2	RMC 12.2K	1:1	1413/1732.6	23.45	22.36	0.208	-0.027	1.29	0.267	/
Hotspot SAR(Distance 10mm)											
Back Side	standard	RMC 12.2K	1:1	1413/1732.6	23.45	22.36	0.430	-0.039	1.29	0.553	/
Front Side	standard	RMC 12.2K	1:1	1413/1732.6	23.45	22.36	0.422	0.021	1.29	0.542	/
Left Edge	standard	RMC 12.2K	1:1	1413/1732.6	23.45	22.36	0.131	0.001	1.29	0.168	/
Right Edge	standard	RMC 12.2K	1:1	1413/1732.6	23.45	22.36	0.071	-0.074	1.29	0.091	/
Top Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Bottom Edge	standard	RMC 12.2K	1:1	1413/1732.6	23.45	22.36	0.543	-0.030	1.29	0.698	/
Bottom Edge	Battery2	RMC 12.2K	1:1	1413/1732.6	23.45	22.36	0.475	0.039	1.29	0.611	/
Note: 1.The value with blue color is the maximum SAR Value of each test band.											
2. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is ≤ ¼ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.											

Variant

Test Position	Cover Type	Channel Type	Duty Cycle	Channel/ Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
							Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	
Head SAR											
Right Cheek	standard	RMC 12.2K	1:1	1413/1732.6	24.70	23.80	0.123	0.020	1.23	0.151	21
Body-worn SAR (Distance 15mm)											
Back Side	standard	RMC 12.2K	1:1	1413/1732.6	23.45	22.36	0.303	0.010	1.29	0.389	22
Hotspot SAR(Distance 10mm)											
Bottom Edge	standard	RMC 12.2K	1:1	1413/1732.6	23.45	22.36	0.490	0.170	1.29	0.630	23
Note: 1.The value with blue color is the maximum SAR Value of each test band.											



Table 13: UMTS Band V (Main-antenna)

Original

Test Position	Cover Type	Channel Type	Duty Cycle	Channel/ Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
							Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	
Head SAR											
Left Cheek	standard	RMC 12.2K	1:1	4183/836.6	25.00	23.62	0.033	0.085	1.37	0.045	/
Left Tilt	standard	RMC 12.2K	1:1	4183/836.6	25.00	23.62	0.034	0.081	1.37	0.046	/
Right Cheek	standard	RMC 12.2K	1:1	4183/836.6	25.00	23.62	0.068	0.020	1.37	0.093	/
Right Tilt	standard	RMC 12.2K	1:1	4183/836.6	25.00	23.62	0.069	-0.020	1.37	0.095	/
Right Tilt	Battery2	RMC 12.2K	1:1	4183/836.6	25.00	23.62	0.062	0.010	1.37	0.085	/
Body-worn SAR (Distance 15mm)											
Back Side	standard	RMC 12.2K	1:1	4183/836.6	25.00	23.62	0.185	0.050	1.37	0.254	/
Front Side	standard	RMC 12.2K	1:1	4183/836.6	25.00	23.62	0.119	0.081	1.37	0.164	/
Back Side	Battery2	RMC 12.2K	1:1	4183/836.6	25.00	23.62	0.146	0.036	1.37	0.201	/
Hotspot SAR(Distance 10mm)											
Back Side	standard	RMC 12.2K	1:1	4183/836.6	25.00	23.62	0.323	-0.031	1.37	0.444	/
Front Side	standard	RMC 12.2K	1:1	4183/836.6	25.00	23.62	0.213	0.097	1.37	0.293	/
Left Edge	standard	RMC 12.2K	1:1	4183/836.6	25.00	23.62	0.065	0.023	1.37	0.089	/
Right Edge	standard	RMC 12.2K	1:1	4183/836.6	25.00	23.62	0.190	-0.167	1.37	0.261	/
Top Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Bottom Edge	standard	RMC 12.2K	1:1	4183/836.6	25.00	23.62	0.107	0.131	1.37	0.147	/
Back Side	Battery2	RMC 12.2K	1:1	4183/836.6	25.00	23.62	0.318	-0.020	1.37	0.437	/
Note: 1.The value with blue color is the maximum SAR Value of each test band.											
2. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is ≤ ¼ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.											

Variant

Test Position	Cover Type	Channel Type	Duty Cycle	Channel/ Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
							Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	
Head SAR											
Right Tilt	standard	RMC 12.2K	1:1	4183/836.6	25.00	23.62	0.095	0.180	1.37	0.130	24
Body-worn SAR (Distance 15mm)											
Back Side	standard	RMC 12.2K	1:1	4183/836.6	25.00	23.62	0.166	-0.025	1.37	0.228	25
Hotspot SAR(Distance 10mm)											
Back Side	standard	RMC 12.2K	1:1	4183/836.6	25.00	23.62	0.273	-0.150	1.37	0.375	26
Note: 1.The value with blue color is the maximum SAR Value of each test band.											



Table 14: LTE Band 2 (20MHz, Main-antenna)
Variant

Test Position	Cover Type	Duty Cycle	RB allocation	RB offset	Channel/ Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
								Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	
Head SAR (QPSK)												
Left Cheek	standard	1:1	1	50	18900/1880	24.10	23.04	0.118	0.060	1.28	0.151	27
Left Tilt	standard	1:1	1	50	18900/1880	24.10	23.04	0.049	0.030	1.28	0.062	/
Right Cheek	standard	1:1	1	50	18900/1880	24.10	23.04	0.118	-0.024	1.28	0.151	/
Right Tilt	standard	1:1	1	50	18900/1880	24.10	23.04	0.060	0.090	1.28	0.076	/
Left Cheek	standard	1:1	50%	25	18700/1860	23.10	22.13	0.086	0.053	1.25	0.108	/
Left Tilt	standard	1:1	50%	25	18700/1860	23.10	22.13	0.034	0.034	1.25	0.043	/
Right Cheek	standard	1:1	50%	25	18700/1860	23.10	22.13	0.069	0.050	1.25	0.086	/
Right Tilt	standard	1:1	50%	25	18700/1860	23.10	22.13	0.045	0.070	1.25	0.056	/
Right Cheek	Battery2	1:1	1	50	18900/1880	24.10	23.04	0.092	0.012	1.28	0.117	/
Body-worn SAR (QPSK, Distance 15mm)												
Back Side	standard	1:1	1	50	18900/1880	23.35	22.37	0.220	-0.020	1.25	0.276	28
Front Side	standard	1:1	1	50	18900/1880	23.35	22.37	0.163	0.038	1.25	0.204	/
Back Side	standard	1:1	50%	25	18900/1880	23.10	22.15	0.186	0.016	1.24	0.231	/
Front Side	standard	1:1	50%	25	18900/1880	23.10	22.15	0.152	0.022	1.24	0.189	/
Back Side	Battery2	1:1	1	50	18900/1880	23.35	22.37	0.184	0.024	1.25	0.231	/
Hotspot SAR(QPSK, Distance 10mm)												
Back Side	standard	1:1	1	50	18900/1880	23.35	22.37	0.403	0.050	1.25	0.505	/
Front Side	standard	1:1	1	50	18900/1880	23.35	22.37	0.317	-0.047	1.25	0.397	/
Left Edge	standard	1:1	1	50	18900/1880	23.35	22.37	0.114	0.060	1.25	0.143	/
Right Edge	standard	1:1	1	50	18900/1880	23.35	22.37	0.048	0.011	1.25	0.060	/
Top Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Bottom Edge	standard	1:1	1	50	18900/1880	23.35	22.37	0.552	-0.020	1.25	0.692	29
Back Side	standard	1:1	50%	25	18900/1880	23.10	22.15	0.363	0.035	1.24	0.452	/
Front Side	standard	1:1	50%	25	18900/1880	23.10	22.15	0.285	0.024	1.24	0.355	/
Left Edge	standard	1:1	50%	25	18900/1880	23.10	22.15	0.145	0.029	1.24	0.180	/
Right Edge	standard	1:1	50%	25	18900/1880	23.10	22.15	0.029	0.033	1.24	0.036	/
Top Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Bottom Edge	standard	1:1	50%	25	18900/1880	23.10	22.15	0.441	0.064	1.24	0.549	/
Bottom Edge	Battery2	1:1	1	50	18900/1880	23.35	22.37	0.519	0.033	1.25	0.650	/

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. For QPSK with 100% RB allocation, SAR is required when and the highest reported SAR for 1 RB and 50% RB allocation in are $\geq 50\%$ limit(1g).



Table 15: LTE Band 4 (20MHz, Main-antenna)

Original

Test Position	Cover Type	Duty Cycle	RB allocation	RB offset	Channel/ Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
								Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	
Head SAR (QPSK)												
Left Cheek	standard	1:1	1	50	20175/1732.5	24.50	23.60	0.140	0.042	1.23	0.172	/
Left Tilt	standard	1:1	1	50	20175/1732.5	24.50	23.60	0.093	0.170	1.23	0.115	/
Right Cheek	standard	1:1	1	50	20175/1732.5	24.50	23.60	0.138	0.130	1.23	0.170	/
Right Tilt	standard	1:1	1	50	20175/1732.5	24.50	23.60	0.080	0.060	1.23	0.099	/
Left Cheek	standard	1:1	50%	25	20050/1720	23.50	22.68	0.095	0.037	1.21	0.115	/
Left Tilt	standard	1:1	50%	25	20050/1720	23.50	22.68	0.055	0.090	1.21	0.066	/
Right Cheek	standard	1:1	50%	25	20050/1720	23.50	22.68	0.111	0.036	1.21	0.134	/
Right Tilt	standard	1:1	50%	25	20050/1720	23.50	22.68	0.058	0.180	1.21	0.070	/
Left Cheek	Battery2	1:1	1	50	20175/1732.5	24.50	23.60	0.119	-0.025	1.23	0.146	/
Body-worn SAR (QPSK, Distance 15mm)												
Back Side	standard	1:1	1	50	20300/1745	23.50	22.50	0.240	-0.100	1.26	0.302	/
Front Side	standard	1:1	1	50	20300/1745	23.50	22.50	0.190	0.139	1.26	0.239	/
Back Side	standard	1:1	50%	0	20300/1745	23.50	22.60	0.216	-0.102	1.23	0.266	/
Front Side	standard	1:1	50%	0	20300/1745	23.50	22.60	0.182	0.037	1.23	0.224	/
Back Side	Battery2	1:1	1	50	20300/1745	23.50	22.50	0.218	0.068	1.26	0.274	/
Hotspot SAR(QPSK, Distance 10mm)												
Back Side	standard	1:1	1	50	20300/1745	23.50	22.50	0.440	-0.021	1.26	0.554	/
Front Side	standard	1:1	1	50	20300/1745	23.50	22.50	0.380	0.073	1.26	0.478	/
Left Edge	standard	1:1	1	50	20300/1745	23.50	22.50	0.164	0.036	1.26	0.206	/
Right Edge	standard	1:1	1	50	20300/1745	23.50	22.50	0.085	0.091	1.26	0.107	/
Top Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Bottom Edge	standard	1:1	1	50	20050/1720	23.50	22.43	0.638	-0.022	1.28	0.816	/
	standard	1:1	1	50	20175/1732.5	23.50	22.45	0.652	0.038	1.27	0.830	/
	standard	1:1	1	50	20300/1745	23.50	22.50	0.676	0.010	1.26	0.851	/
Back Side	standard	1:1	50%	0	20300/1745	23.50	22.60	0.446	-0.036	1.23	0.549	/
Front Side	standard	1:1	50%	0	20300/1745	23.50	22.60	0.365	-0.012	1.23	0.449	/
Left Edge	standard	1:1	50%	0	20300/1745	23.50	22.60	0.161	0.039	1.23	0.198	/
Right Edge	standard	1:1	50%	0	20300/1745	23.50	22.60	0.080	0.017	1.23	0.098	/
Top Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Bottom Edge	standard	1:1	50%	0	20050/1720	23.50	22.58	0.685	0.026	1.24	0.847	/
	standard	1:1	50%	0	20175/1732.5	23.50	22.50	0.637	-0.018	1.26	0.802	/
	standard	1:1	50%	0	20300/1745	23.50	22.60	0.662	-0.143	1.23	0.814	/
Bottom Edge	standard	1:1	100%	0	20050/1720	23.50	22.59	0.625	-0.015	1.23	0.771	/
Bottom Edge	Battery2	1:1	1	50	20300/1745	23.50	22.50	0.628	0.080	1.26	0.791	/



Bottom Edge	SIM 2	1:1	1	50	20300/1745	23.50	22.50	0.635	0.021	1.26	0.799	/
Note: 1. The value with blue color is the maximum SAR Value of each test band. 2. For QPSK with 100% RB allocation, SAR is required when and the highest reported SAR for 1 RB and 50% RB allocation in are $\geq$ 50% limit(1g).												

Variant

Test Position	Cover Type	Duty Cycle	RB allocation	RB offset	Channel/ Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
								Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	
Head SAR (QPSK)												
Left Cheek	standard	1:1	1	50	20175/1732.5	24.50	23.60	0.091	-0.074	1.23	0.112	30
Body-worn SAR (QPSK, Distance 15mm)												
Back Side	standard	1:1	1	50	20300/1745	23.50	22.50	0.325	-0.080	1.26	0.409	31
Hotspot SAR(QPSK, Distance 10mm)												
Bottom Edge	standard	1:1	50%	0	20300/1745	23.50	22.50	0.472	0.029	1.26	0.594	32
Note: 1.The value with blue color is the maximum SAR Value of each test band.												



Table 16: LTE Band 5 (10MHz, Main-antenna)

Original

Test Position	Cover Type	Duty Cycle	RB allocation	RB offset	Channel/Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
								Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	
Head SAR (QPSK)												
Left Cheek	standard	1:1	1	25	20525/836.5	25.00	23.73	0.174	0.150	1.34	0.233	/
Left Tilt	standard	1:1	1	25	20525/836.5	25.00	23.73	0.093	0.090	1.34	0.125	/
Right Cheek	standard	1:1	1	25	20525/836.5	25.00	23.73	0.190	0.055	1.34	0.255	/
Right Tilt	standard	1:1	1	25	20525/836.5	25.00	23.73	0.107	0.100	1.34	0.143	/
Left Cheek	standard	1:1	50%	13	20450/829	24.00	22.71	0.139	0.032	1.35	0.187	/
Left Tilt	standard	1:1	50%	13	20450/829	24.00	22.71	0.077	0.180	1.35	0.103	/
Right Cheek	standard	1:1	50%	13	20450/829	24.00	22.71	0.154	0.041	1.35	0.207	/
Right Tilt	standard	1:1	50%	13	20450/829	24.00	22.71	0.086	0.070	1.35	0.116	/
Right Cheek	Battery2	1:1	1	25	20525/836.5	25.00	23.73	0.163	0.013	1.34	0.218	/
Right Cheek	SIM 2	1:1	1	25	20525/836.5	25.00	23.73	0.185	0.030	1.34	0.248	/
Body-worn SAR (QPSK, Distance 15mm)												
Back Side	standard	1:1	1	25	20525/836.5	25.00	23.73	0.190	-0.023	1.34	0.255	/
Front Side	standard	1:1	1	25	20525/836.5	25.00	23.73	0.147	0.039	1.34	0.197	/
Back Side	standard	1:1	50%	13	20450/829	24.00	22.71	0.146	0.017	1.35	0.196	/
Front Side	standard	1:1	50%	13	20450/829	24.00	22.71	0.114	0.132	1.35	0.153	/
Back Side	Battery2	1:1	1	25	20525/836.5	25.00	23.73	0.142	-0.092	1.34	0.190	/
Hotspot SAR(QPSK, Distance 10mm)												
Back Side	standard	1:1	1	25	20525/836.5	25.00	23.73	0.329	-0.011	1.34	0.441	/
Front Side	standard	1:1	1	25	20525/836.5	25.00	23.73	0.259	0.072	1.34	0.347	/
Left Edge	standard	1:1	1	25	20525/836.5	25.00	23.73	0.111	-0.021	1.34	0.149	/
Right Edge	standard	1:1	1	25	20525/836.5	25.00	23.73	0.224	0.164	1.34	0.300	/
Top Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Bottom Edge	standard	1:1	1	25	20525/836.5	25.00	23.73	0.138	0.060	1.34	0.185	/
Back Side	standard	1:1	50%	13	20450/829	24.00	22.71	0.253	-0.067	1.35	0.341	/
Front Side	standard	1:1	50%	13	20450/829	24.00	22.71	0.202	0.023	1.35	0.272	/
Left Edge	standard	1:1	50%	13	20450/829	24.00	22.71	0.042	0.091	1.35	0.057	/
Right Edge	standard	1:1	50%	13	20450/829	24.00	22.71	0.166	-0.072	1.35	0.223	/
Top Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Bottom Edge	standard	1:1	50%	13	20450/829	24.00	22.71	0.101	0.039	1.35	0.136	/
Back Side	Battery2	1:1	1	13	20525/836.5	25.00	23.73	0.325	0.065	1.34	0.435	/
Note: 1.The value with blue color is the maximum SAR Value of each test band.												
2.For QPSK with 100% RB allocation, SAR is required when and the highest reported SAR for 1 RB and 50% RB allocation in are $\geq 50\%$ limit(1g).												



Variant

Test Position	Cover Type	Duty Cycle	RB allocation	RB offset	Channel/ Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
								Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	
Head SAR (QPSK)												
Right Cheek	standard	1:1	1	25	20525/836.5	25.00	23.73	0.142	0.077	1.34	0.190	33
Body-worn SAR (QPSK, Distance 15mm)												
Back Side	standard	1:1	1	25	20525/836.5	25.00	23.73	0.168	0.030	1.34	0.225	34
Hotspot SAR(QPSK, Distance 10mm)												
Back Side	standard	1:1	1	25	20525/836.5	25.00	23.73	0.320	0.050	1.34	0.429	35
Note: 1.The value with blue color is the maximum SAR Value of each test band.												



Table 17: LTE Band 7 (20MHz, Main-antenna)

Variant

Test Position	Cover Type	Duty Cycle	RB allocation	RB offset	Channel/Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
								Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	
Head SAR (QPSK)												
Left Cheek	standard	1:1	1	50	21100/2535	24.50	23.61	0.109	0.070	1.23	0.134	36
Left Tilt	standard	1:1	1	50	21100/2535	24.50	23.61	0.031	0.057	1.23	0.038	/
Right Cheek	standard	1:1	1	50	21100/2535	24.50	23.61	0.076	-0.088	1.23	0.094	/
Right Tilt	standard	1:1	1	50	21100/2535	24.50	23.61	0.044	0.175	1.23	0.054	/
Left Cheek	standard	1:1	50%	50	21100/2535	23.50	22.67	0.103	0.022	1.21	0.125	/
Left Tilt	standard	1:1	50%	50	21100/2535	23.50	22.67	0.031	0.010	1.21	0.038	/
Right Cheek	standard	1:1	50%	50	21100/2535	23.50	22.67	0.060	0.118	1.21	0.073	/
Right Tilt	standard	1:1	50%	50	21100/2535	23.50	22.67	0.045	0.118	1.21	0.054	/
Left Cheek	Battery2	1:1	1	50	21100/2535	24.50	23.61	0.105	-0.062	1.23	0.129	/
Left Cheek	standard	1:1	1	99	20850/2510	24.50	23.44	0.081	-0.030	1.28	0.103	/
			1	0	21048/2529.8							
Body-worn SAR (QPSK, Distance 15mm)												
Back Side	standard	1:1	1	50	21350/2560	23.50	22.81	0.278	-0.055	1.17	0.326	37
Front Side	standard	1:1	1	50	21350/2560	23.50	22.81	0.216	0.029	1.17	0.253	/
Back Side	standard	1:1	50%	25	20850/2510	23.50	22.80	0.210	0.030	1.17	0.247	/
Front Side	standard	1:1	50%	25	20850/2510	23.50	22.80	0.190	-0.010	1.17	0.223	/
Back Side	Battery2	1:1	1	50	21350/2560	23.50	22.81	0.241	0.052	1.17	0.282	/
Back Side	standard	1:1	1	99	20850/2510	23.50	22.52	0.195	0.016	1.25	0.244	/
			1	0	21048/2529.8							
Hotspot SAR(QPSK, Distance 10mm)												
Back Side	standard	1:1	1	50	21350/2560	23.50	22.81	0.486	0.017	1.17	0.570	/
Front Side	standard	1:1	1	50	21350/2560	23.50	22.81	0.432	0.032	1.17	0.506	/
Left Edge	standard	1:1	1	50	21350/2560	23.50	22.81	0.055	-0.089	1.17	0.064	/
Right Edge	standard	1:1	1	50	21350/2560	23.50	22.81	0.046	0.026	1.17	0.054	/
Top Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Bottom Edge	standard	1:1	1	50	21350/2560	23.50	22.81	0.542	0.011	1.17	0.635	/
Back Side	standard	1:1	50%	25	20850/2510	23.50	22.80	0.456	0.080	1.17	0.536	/
Front Side	standard	1:1	50%	25	20850/2510	23.50	22.80	0.406	0.032	1.17	0.477	/
Left Edge	standard	1:1	50%	25	20850/2510	23.50	22.80	0.067	0.000	1.17	0.079	/
Right Edge	standard	1:1	50%	25	20850/2510	23.50	22.80	0.031	0.064	1.17	0.036	/
Top Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Bottom Edge	standard	1:1	50%	25	20850/2510	23.50	22.80	0.553	0.180	1.17	0.650	38
Bottom Edge	Battery2	1:1	50%	25	20850/2510	23.50	22.80	0.529	0.029	1.17	0.622	/
Bottom Edge	standard	1:1	1	99	20850/2510	23.50	22.52	0.362	0.130	1.25	0.454	/
			1	0	21048/2529.8							



Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. For QPSK with 100% RB allocation, SAR is required when and the highest reported SAR for 1 RB and 50% RB allocation in are $\geq$ 50% limit(1g).



Table 18: LTE Band 12 (10MHz, Main-antenna)

Variant

Test Position	Cover Type	Duty Cycle	RB allocation	RB offset	Channel/ Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
								Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	
Head SAR (QPSK)												
Left Cheek	standard	1:1	1	25	23095/707.5	24.70	23.35	0.066	0.041	1.36	0.090	/
Left Tilt	standard	1:1	1	25	23095/707.5	24.70	23.35	0.031	0.040	1.36	0.042	/
Right Cheek	standard	1:1	1	25	23095/707.5	24.70	23.35	0.070	0.043	1.36	0.095	39
Right Tilt	standard	1:1	1	25	23095/707.5	24.70	23.35	0.037	0.190	1.36	0.050	/
Left Cheek	standard	1:1	50%	25	23095/707.5	23.70	22.49	0.050	0.063	1.32	0.066	/
Left Tilt	standard	1:1	50%	25	23095/707.5	23.70	22.49	0.023	0.056	1.32	0.030	/
Right Cheek	standard	1:1	50%	25	23095/707.5	23.70	22.49	0.054	0.133	1.32	0.071	/
Right Tilt	standard	1:1	50%	25	23095/707.5	23.70	22.49	0.031	0.040	1.32	0.041	/
Right Cheek	Battery2	1:1	1	25	23095/707.5	24.70	23.35	0.058	0.082	1.36	0.079	/
Body-worn SAR (QPSK, Distance 15mm)												
Back Side	standard	1:1	1	25	23095/707.5	24.70	23.35	0.105	-0.060	1.36	0.143	40
Front Side	standard	1:1	1	25	23095/707.5	24.70	23.35	0.082	0.013	1.36	0.112	/
Back Side	standard	1:1	50%	25	23095/707.5	23.70	22.49	0.091	0.028	1.32	0.120	/
Front Side	standard	1:1	50%	25	23095/707.5	23.70	22.49	0.077	-0.070	1.32	0.102	/
Back Side	Battery2	1:1	1	25	23095/707.5	24.70	23.35	0.086	0.013	1.36	0.117	/
Hotspot SAR(QPSK, Distance 10mm)												
Back Side	standard	1:1	1	25	23095/707.5	24.70	23.35	0.149	0.092	1.36	0.203	/
Front Side	standard	1:1	1	25	23095/707.5	24.70	23.35	0.111	-0.011	1.36	0.151	/
Left Edge	standard	1:1	1	25	23095/707.5	24.70	23.35	0.060	0.035	1.36	0.082	/
Right Edge	standard	1:1	1	25	23095/707.5	24.70	23.35	0.165	0.030	1.36	0.225	41
Top Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Bottom Edge	standard	1:1	1	25	23095/707.5	24.70	23.35	0.035	0.020	1.36	0.048	/
Back Side	standard	1:1	50%	25	23095/707.5	23.70	22.49	0.116	0.047	1.32	0.153	/
Front Side	standard	1:1	50%	25	23095/707.5	23.70	22.49	0.084	0.026	1.32	0.111	/
Left Edge	standard	1:1	50%	25	23095/707.5	23.70	22.49	0.047	-0.130	1.32	0.062	/
Right Edge	standard	1:1	50%	25	23095/707.5	23.70	22.49	0.139	0.028	1.32	0.184	/
Top Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Bottom Edge	standard	1:1	50%	25	23095/707.5	23.70	22.49	0.028	0.035	1.32	0.037	/
Bottom Edge	Battery2	1:1	1	25	23095/707.5	24.70	23.35	0.142	0.052	1.36	0.194	/
Note: 1.The value with blue color is the maximum SAR Value of each test band.												
2.For QPSK with 100% RB allocation, SAR is required when and the highest reported SAR for 1 RB and 50% RB allocation in are≥ 50% limit(1g).												



Table 19: LTE Band 38 (20MHz, Main-antenna)

Original

Test Position	Cover Type	Duty Cycle	RB allocation	RB offset	Channel/ Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
								Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	
Head SAR (QPSK)												
Left Cheek	standard	1:1.58	1	50	38000/2595	24.50	23.51	0.109	0.152	1.26	0.137	/
Left Tilt	standard	1:1.58	1	50	38000/2595	24.50	23.51	0.028	0.080	1.26	0.035	/
Right Cheek	standard	1:1.58	1	50	38000/2595	24.50	23.51	0.050	0.068	1.26	0.063	/
Right Tilt	standard	1:1.58	1	50	38000/2595	24.50	23.51	0.051	0.060	1.26	0.064	/
Left Cheek	standard	1:1.58	50%	50	37850/2580	23.50	22.46	0.078	-0.030	1.27	0.099	/
Left Tilt	standard	1:1.58	50%	50	37850/2580	23.50	22.46	0.025	-0.140	1.27	0.031	/
Right Cheek	standard	1:1.58	50%	50	37850/2580	23.50	22.46	0.041	0.076	1.27	0.052	/
Right Tilt	standard	1:1.58	50%	50	37850/2580	23.50	22.46	0.032	0.023	1.27	0.041	/
Left Cheek	standard	1:1.58	1	99	37850/2580	24.50	23.28	0.068	-0.010	1.32	0.090	/
			1	0	38048/2599.8							
Left Cheek	Battery2	1:1.58	1	50	38000/2595	24.50	23.51	0.092	-0.064	1.26	0.116	/
Body-worn SAR (QPSK, Distance 15mm)												
Back Side	standard	1:1.58	1	50	38000/2595	24.50	23.51	0.189	-0.022	1.26	0.237	/
Front Side	standard	1:1.58	1	50	38000/2595	24.50	23.51	0.110	0.039	1.26	0.138	/
Back Side	standard	1:1.58	50%	50	37850/2580	23.50	22.46	0.152	0.137	1.27	0.193	/
Front Side	standard	1:1.58	50%	50	37850/2580	23.50	22.46	0.087	-0.029	1.27	0.111	/
Back Side	standard	1:1.58	1	99	37850/2580	24.50	23.28	0.115	0.030	1.32	0.152	/
			1	0	38048/2599.8							
Back Side	Battery2	1:1.58	1	50	38000/2595	24.50	23.51	0.153	0.090	1.26	0.192	/
Hotspot SAR(QPSK, Distance 10mm)												
Back Side	standard	1:1.58	1	50	38000/2595	24.50	23.51	0.384	0.069	1.26	0.482	/
Front Side	standard	1:1.58	1	50	38000/2595	24.50	23.51	0.285	0.022	1.26	0.358	/
Left Edge	standard	1:1.58	1	50	38000/2595	24.50	23.51	0.046	-0.097	1.26	0.058	/
Right Edge	standard	1:1.58	1	50	38000/2595	24.50	23.51	0.032	0.161	1.26	0.040	/
Top Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Bottom Edge	standard	1:1.58	1	50	38000/2595	24.50	23.51	0.432	-0.060	1.26	0.543	/
Back Side	standard	1:1.58	50%	50	37850/2580	23.50	22.46	0.373	-0.196	1.27	0.474	/
Front Side	standard	1:1.58	50%	50	37850/2580	23.50	22.46	0.297	0.039	1.27	0.377	/
Left Edge	standard	1:1.58	50%	50	37850/2580	23.50	22.46	0.044	0.071	1.27	0.056	/
Right Edge	standard	1:1.58	50%	50	37850/2580	23.50	22.46	0.033	-0.067	1.27	0.042	/
Top Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Bottom Edge	standard	1:1.58	50%	50	37850/2580	23.50	22.46	0.368	0.033	1.27	0.468	/
Bottom Edge	standard	1:1.58	1	99	37850/2580	24.50	23.28	0.296	0.015	1.32	0.392	/
			1	0	38048/2599.8							
Bottom Edge	Battery2	1:1.58	1	50	38000/2595	24.50	23.51	0.405	-0.046	1.26	0.509	/



Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. For QPSK with 100% RB allocation, SAR is required when and the highest reported SAR for 1 RB and 50% RB allocation in are $\geq$ 50% limit(1g).

Variant

Test Position	Cover Type	Duty Cycle	RB allocation	RB offset	Channel/ Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
								Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	
Head SAR (QPSK)												
Left Cheek	standard	1:1.58	1	50	38000/2595	24.50	23.51	0.095	-0.167	1.26	0.119	42
Body-worn SAR (QPSK, Distance 15mm)												
Back Side	standard	1:1.58	1	50	38000/2595	24.50	23.51	0.193	-0.030	1.26	0.242	43
Hotspot SAR(QPSK, Distance 10mm)												
Bottom Edge	standard	1:1.58	1	50	38000/2595	24.40	23.51	0.481	-0.020	1.23	0.590	44
Note: 1.The value with blue color is the maximum SAR Value of each test band.												



Table 20: LTE Band 41 (20MHz, Main-antenna)

Original

Test Position	Cover Type	Duty Cycle	RB allocation	RB offset	Channel/ Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
								Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	
Head SAR (QPSK)												
Left Cheek	standard	1:1.58	1	50	39750/2506	24.50	23.61	0.120	0.053	1.23	0.147	/
Left Tilt	standard	1:1.58	1	50	39750/2506	24.50	23.61	0.043	0.036	1.23	0.053	/
Right Cheek	standard	1:1.58	1	50	39750/2506	24.50	23.61	0.068	0.051	1.23	0.084	/
Right Tilt	standard	1:1.58	1	50	39750/2506	24.50	23.61	0.061	0.043	1.23	0.075	/
Left Cheek	standard	1:1.58	50%	50	39750/2506	23.50	22.56	0.083	0.082	1.24	0.103	/
Left Tilt	standard	1:1.58	50%	50	39750/2506	23.50	22.56	0.035	0.041	1.24	0.043	/
Right Cheek	standard	1:1.58	50%	50	39750/2506	23.50	22.56	0.057	0.036	1.24	0.071	/
Right Tilt	standard	1:1.58	50%	50	39750/2506	23.50	22.56	0.044	0.029	1.24	0.055	/
Left Cheek	standard	1:1.58	1	99	40185/2549.5	24.40	23.38	0.075	-0.010	1.26	0.095	/
			1	0	40383/2569.3							
Left Cheek	Battery2	1:1.58	1	50	39750/2506	24.50	23.61	0.098	0.073	1.23	0.120	/
Body-worn SAR (QPSK, Distance 15mm)												
Back Side	standard	1:1.58	1	50	39750/2506	24.50	23.61	0.140	0.110	1.23	0.172	/
Front Side	standard	1:1.58	1	50	39750/2506	24.50	23.61	0.104	0.021	1.23	0.128	/
Back Side	standard	1:1.58	50%	50	39750/2506	23.50	22.56	0.094	-0.033	1.24	0.117	/
Front Side	standard	1:1.58	50%	50	39750/2506	23.50	22.56	0.080	0.025	1.24	0.099	/
Back Side	standard	1:1.58	1	99	40185/2549.5	24.40	23.38	0.075	-0.010	1.26	0.095	/
			1	0	40383/2569.3							
Back Side	Battery2	1:1.58	1	50	39750/2506	24.50	23.61	0.132	0.028	1.23	0.162	/
Hotspot SAR(QPSK, Distance 10mm)												
Back Side	standard	1:1.58	1	50	39750/2506	24.50	23.61	0.325	-0.026	1.23	0.399	/
Front Side	standard	1:1.58	1	50	39750/2506	24.50	23.61	0.272	0.000	1.23	0.333	/
Left Edge	standard	1:1.58	1	50	39750/2506	24.50	23.61	0.082	0.011	1.23	0.101	/
Right Edge	standard	1:1.58	1	50	39750/2506	24.50	23.61	0.031	0.039	1.23	0.038	/
Top Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Bottom Edge	standard	1:1.58	1	50	39750/2506	24.50	23.61	0.300	0.048	1.23	0.368	/
Back Side	standard	1:1.58	50%	50	39750/2506	23.50	22.56	0.385	0.000	1.24	0.478	/
Front Side	standard	1:1.58	50%	50	39750/2506	23.50	22.56	0.215	0.059	1.24	0.266	/
Left Edge	standard	1:1.58	50%	50	39750/2506	23.50	22.56	0.049	-0.026	1.24	0.061	/
Right Edge	standard	1:1.58	50%	50	39750/2506	23.50	22.56	0.027	0.031	1.24	0.034	/
Top Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Bottom Edge	standard	1:1.58	50%	50	39750/2506	23.50	22.56	0.297	-0.056	1.24	0.369	/
Back Side	standard	1:1.58	1	99	40185/2549.5	24.40	23.38	0.237	0.090	1.26	0.300	/
			1	0	40383/2569.3							
Back Side	Battery2	1:1.58	50%	50	39750/2506	23.50	22.56	0.362	-0.080	1.24	0.449	/



Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. For QPSK with 100% RB allocation, SAR is required when and the highest reported SAR for 1 RB and 50% RB allocation in are $\geq$ 50% limit(1g).

Variant

Test Position	Cover Type	Duty Cycle	RB alloc ation	RB offset	Channel/ Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
								Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	
Head SAR (QPSK)												
Left Cheek	standard	1:1.58	1	50	39750/2506	24.50	23.61	0.102	-0.027	1.23	0.125	45
Body-worn SAR (QPSK, Distance 15mm)												
Back Side	standard	1:1.58	1	50	39750/2506	24.50	23.61	0.167	0.064	1.23	0.205	46
Hotspot SAR(QPSK, Distance 10mm)												
Back Side	standard	1:1.58	50%	50	39750/2506	23.50	22.56	0.269	0.023	1.24	0.334	47

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. For QPSK with 100% RB allocation, SAR is required when and the highest reported SAR for 1 RB and 50% RB allocation in are $\geq$ 50% limit(1g).



Table 21: LTE Band 66 (20MHz, Main-antenna)

Variant

Test Position	Cover Type	Duty Cycle	RB allocation	RB offset	Channel/ Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
								Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	
Head SAR (QPSK)												
Left Cheek	standard	1:1.58	1	50	132072/1720	24.30	22.77	0.084	0.021	1.42	0.119	/
Left Tilt	standard	1:1.58	1	50	132072/1720	24.30	22.77	0.057	0.029	1.42	0.081	/
Right Cheek	standard	1:1.58	1	50	132072/1720	24.30	22.77	0.099	0.083	1.42	0.140	48
Right Tilt	standard	1:1.58	1	50	132072/1720	24.30	22.77	0.047	0.140	1.42	0.067	/
Left Cheek	standard	1:1.58	50%	0	132572/1770	23.30	21.76	0.065	0.086	1.43	0.093	/
Left Tilt	standard	1:1.58	50%	0	132572/1770	23.30	21.76	0.056	0.020	1.43	0.080	/
Right Cheek	standard	1:1.58	50%	0	132572/1770	23.30	21.76	0.088	0.110	1.43	0.125	/
Right Tilt	standard	1:1.58	50%	0	132572/1770	23.30	21.76	0.044	0.030	1.43	0.063	/
Right Cheek	Battery2	1:1.58	1	50	132072/1720	24.30	22.77	0.092	0.029	1.42	0.131	/
Body-worn SAR (QPSK, Distance 15mm)												
Back Side	standard	1:1.58	1	50	132322/1745	23.30	21.94	0.215	0.030	1.37	0.294	49
Front Side	standard	1:1.58	1	50	132322/1745	23.30	21.94	0.170	0.051	1.37	0.233	/
Back Side	standard	1:1.58	50%	0	132572/1770	23.30	22.05	0.190	-0.026	1.33	0.253	/
Front Side	standard	1:1.58	50%	0	132572/1770	23.30	22.05	0.174	0.048	1.33	0.232	/
Back Side	Battery2	1:1.58	1	50	132322/1745	23.30	21.94	0.184	0.043	1.37	0.252	/
Hotspot SAR(QPSK, Distance 10mm)												
Back Side	standard	1:1.58	1	50	132322/1745	23.30	21.94	0.343	0.031	1.37	0.469	/
Front Side	standard	1:1.58	1	50	132322/1745	23.30	21.94	0.288	-0.046	1.37	0.394	/
Left Edge	standard	1:1.58	1	50	132322/1745	23.30	21.94	0.142	0.022	1.37	0.194	/
Right Edge	standard	1:1.58	1	50	132322/1745	23.30	21.94	0.102	0.070	1.37	0.140	/
Top Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Bottom Edge	standard	1:1.58	1	50	132322/1745	23.30	21.94	0.549	-0.020	1.37	0.751	/
Back Side	standard	1:1.58	50%	0	132572/1770	23.30	22.05	0.400	0.015	1.33	0.533	/
Front Side	standard	1:1.58	50%	0	132572/1770	23.30	22.05	0.324	0.060	1.33	0.432	/
Left Edge	standard	1:1.58	50%	0	132572/1770	23.30	22.05	0.166	0.092	1.33	0.221	/
Right Edge	standard	1:1.58	50%	0	132572/1770	23.30	22.05	0.071	0.023	1.33	0.095	/
Top Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Bottom Edge	standard	1:1.58	50%	0	132572/1770	23.30	22.05	0.598	-0.030	1.33	0.797	50
Back Side	Battery2	1:1.58	50%	0	132572/1770	23.30	22.05	0.552	-0.040	1.33	0.736	/
Note: 1.The value with blue color is the maximum SAR Value of each test band.												
2.For QPSK with 100% RB allocation, SAR is required when and the highest reported SAR for 1 RB and 50% RB allocation in are≥ 50% limit(1g).												



Table 22: GSM 850 (Second-antenna)

Original

Test Position	Cover Type	Time slot	Duty Cycle	Channel/ Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
							Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	
Head SAR											
Left Cheek	standard	GSM	1:8.3	190/836.6	33.20	32.45	0.371	0.110	1.19	0.441	/
Left Tilt	standard	GSM	1:8.3	190/836.6	33.20	32.45	0.066	0.079	1.19	0.079	/
Right Cheek	standard	GSM	1:8.3	190/836.6	33.20	32.45	0.206	0.033	1.19	0.245	/
Right Tilt	standard	GSM	1:8.3	190/836.6	33.20	32.45	0.053	0.033	1.19	0.063	/
Left Cheek	Battery2	GSM	1:8.3	190/836.6	33.20	32.45	0.369	-0.060	1.19	0.439	/
Body-worn SAR (Distance 15mm)											
Back Side	standard	GSM	1:8.3	190/836.6	33.20	32.45	0.106	-0.031	1.19	0.126	/
Front Side	standard	GSM	1:8.3	190/836.6	33.20	32.45	0.123	-0.010	1.19	0.146	/
Front Side	Battery2	GSM	1:8.3	190/836.6	33.20	32.45	0.092	0.033	1.19	0.109	/
Hotspot SAR(Distance 10mm)											
Back Side	standard	2Txslots	1:4.15	190/836.6	30.70	29.90	0.189	0.034	1.20	0.227	/
Front Side	standard	2Txslots	1:4.15	190/836.6	30.70	29.90	0.197	-0.021	1.20	0.237	/
Left Edge	standard	2Txslots	1:4.15	190/836.6	30.70	29.90	0.303	0.010	1.20	0.364	/
Right Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Top Edge	standard	2Txslots	1:4.15	190/836.6	30.70	29.90	0.021	0.028	1.20	0.025	/
Bottom Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Back Side	Battery2	2Txslots	1:4.15	190/836.6	30.70	29.90	0.274	-0.015	1.20	0.329	/
Note: 1.The value with blue color is the maximum SAR Value of each test band.											
2.When multiple slots are used, SAR should be tested to account for the maximum source-based time-averaged output power.											

Variant

Test Position	Cover Type	Time slot	Duty Cycle	Channel/ Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
							Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	
Head SAR											
Left Cheek	standard	GSM	1:8.3	190/836.6	33.20	32.45	0.454	0.030	1.19	0.540	51
Body-worn SAR (Distance 15mm)											
Front Side	standard	GSM	1:8.3	190/836.6	33.20	32.45	0.144	0.055	1.19	0.171	52
Hotspot SAR(Distance 10mm)											
Left Edge	standard	2Txslots	1:4.15	190/836.6	30.70	29.90	0.343	0.022	1.20	0.412	53
Note: 1.The value with blue color is the maximum SAR Value of each test band.											



Table 23: GSM 1900(Second-antenna)

Original

Test Position	Cover Type	Time slot	Duty Cycle	Channel/ Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
							Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	
Head SAR											
Left Cheek	standard	GSM	1:8.3	661/1880	28.45	28.31	0.578	0.033	1.03	0.597	/
Left Tilt	standard	GSM	1:8.3	512/1850.2	28.45	28.25	0.692	0.018	1.05	0.725	/
	standard	GSM	1:8.3	661/1880	28.45	28.31	0.731	0.070	1.03	0.755	/
	standard	GSM	1:8.3	810/1909.8	28.45	28.30	0.705	-0.032	1.04	0.730	/
Right Cheek	standard	GSM	1:8.3	661/1880	28.45	28.31	0.653	0.090	1.03	0.674	/
Right Tilt	standard	GSM	1:8.3	512/1850.2	28.45	28.25	0.685	0.018	1.05	0.717	/
	standard	GSM	1:8.3	661/1880	28.45	28.31	0.713	0.040	1.03	0.736	/
	standard	GSM	1:8.3	810/1909.8	28.45	28.30	0.662	0.090	1.04	0.685	/
Left Tilt	Battery2	GSM	1:8.3	661/1880	28.45	28.31	0.715	0.022	1.03	0.738	/
Body-worn SAR (Distance 15mm)											
Back Side	standard	GSM	1:8.3	661/1880	28.45	28.31	0.213	0.120	1.03	0.220	/
Front Side	standard	GSM	1:8.3	661/1880	28.45	28.31	0.111	0.023	1.03	0.115	/
Back Side	Battery2	GSM	1:8.3	661/1880	28.45	28.31	0.138	-0.021	1.03	0.143	/
Hotspot SARSAR (Distance 10mm)											
Back Side	standard	2Txslots	1:4.15	661/1880	25.70	25.15	0.187	-0.016	1.14	0.212	/
Front Side	standard	2Txslots	1:4.15	661/1880	25.70	25.15	0.148	0.054	1.14	0.168	/
Left Edge	standard	2Txslots	1:4.15	661/1880	25.70	25.15	0.064	-0.039	1.14	0.073	/
Right Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Top Edge	standard	2Txslots	1:4.15	661/1880	25.70	25.15	0.301	-0.051	1.14	0.342	/
Bottom Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Top Edge	Battery2	2Txslots	1:4.15	661/1880	25.70	25.15	0.264	0.019	1.14	0.300	/
Note: 1.The value with blue color is the maximum SAR Value of each test band.											
2.When multiple slots are used, SAR should be tested to account for the maximum source-based time-averaged output power.											



MAX Adjusted SAR								
Test Position	Cover Type	Channel/ Frequency (MHz)	Full power (dBm)	Tune-up (dBm)	Report SAR1g (mW/g)	Scaling Factor	Full power Report SAR1g (mW/g)	0mm SAR
Back Side	standard	661/1880	27.70	25.70	0.212	1.58	0.336	No
Front Side	standard	661/1880	27.70	25.70	0.168	1.58	0.266	No
Left Edge	standard	661/1880	27.70	25.70	0.073	1.58	0.115	No
Top Edge	standard	661/1880	27.70	25.70	0.342	1.58	0.541	No
Note: According to 648474 D04 Handset SAR v01r03, For Phablet, Since hotspot mode 1-g reported SAR < 1.2 W/kg, Product Specific 10-g SAR is not required.								

Variant

Test Position	Cover Type	Time slot	Duty Cycle	Channel/ Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
							Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	
Head SAR											
Left Tilt	standard	GSM	1:8.3	661/1880	28.45	28.31	0.560	0.100	1.03	0.578	54
Body-worn SAR (Distance 15mm)											
Back Side	standard	GSM	1:8.3	661/1880	28.45	28.31	0.163	-0.090	1.03	0.168	55
Hotspot Sarsar (Distance 10mm)											
Top Edge	standard	2Txslots	1:4.15	661/1880	25.70	25.15	0.357	0.028	1.14	0.405	56
Note: 1.The value with blue color is the maximum SAR Value of each test band.											
2.When multiple slots are used, SAR should be tested to account for the maximum source-based time-averaged output power.											



Table 24: UMTS Band II (Second-antenna)

Original

Test Position	Cover Type	Channel Type	Duty Cycle	Channel/ Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
							Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	
Head SAR											
Left Cheek	standard	RMC 12.2K	1:1	9400/1880	21.60	20.80	0.646	0.120	1.20	0.777	/
Left Tilt	standard	RMC 12.2K	1:1	9262/1852.4	21.60	20.54	0.795	0.021	1.28	1.015	/
	standard	RMC 12.2K	1:1	9400/1880	21.60	20.80	0.847	0.060	1.20	1.018	/
	standard	RMC 12.2K	1:1	9538/1907.6	21.60	20.49	0.784	-0.038	1.29	1.012	/
Right Cheek	standard	RMC 12.2K	1:1	9262/1852.4	21.60	20.54	0.746	0.019	1.28	0.952	/
	standard	RMC 12.2K	1:1	9400/1880	21.60	20.80	0.737	-0.037	1.20	0.886	/
	standard	RMC 12.2K	1:1	9538/1907.6	21.60	20.49	0.692	-0.140	1.29	0.894	/
Right Tilt	standard	RMC 12.2K	1:1	9262/1852.4	21.60	20.54	0.774	0.030	1.28	0.988	/
	standard	RMC 12.2K	1:1	9400/1880	21.60	20.80	0.816	-0.070	1.20	0.981	/
	standard	RMC 12.2K	1:1	9538/1907.6	21.60	20.49	0.783	-0.025	1.29	1.011	/
Left Tilt	Repeated	RMC 12.2K	1:1	9400/1880	21.60	20.80	0.843	0.090	1.20	1.014	/
Left Tilt	Battery2	RMC 12.2K	1:1	9400/1880	21.60	20.80	0.862	0.010	1.20	1.036	/
Left Tilt	SIM 2	RMC 12.2K	1:1	9400/1880	21.60	20.80	0.839	0.028	1.20	1.009	/
Body-worn SAR (Distance 15mm)											
Back Side	standard	RMC 12.2K	1:1	9400/1880	24.10	22.76	0.333	-0.070	1.36	0.453	/
Front Side	standard	RMC 12.2K	1:1	9400/1880	24.10	22.76	0.192	-0.034	1.36	0.261	/
Back Side	Battery2	RMC 12.2K	1:1	9400/1880	24.10	22.76	0.304	0.012	1.36	0.414	/
Back Side	SIM 2	RMC 12.2K	1:1	9400/1880	24.10	22.76	0.309	0.039	1.36	0.421	/
Hotspot SAR(Distance 10mm)											
Back Side	standard	RMC 12.2K	1:1	9400/1880	21.10	19.79	0.219	0.069	1.35	0.296	/
Front Side	standard	RMC 12.2K	1:1	9400/1880	21.10	19.79	0.173	0.010	1.35	0.234	/
Left Edge	standard	RMC 12.2K	1:1	9400/1880	21.10	19.79	0.085	-0.019	1.35	0.115	/
Right Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Top Edge	standard	RMC 12.2K	1:1	9400/1880	21.10	19.79	0.425	0.117	1.35	0.575	/
Bottom Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Top Edge	Battery2	RMC 12.2K	1:1	9400/1880	21.10	19.79	0.379	0.060	1.35	0.512	/
Note: 1.The value with blue color is the maximum SAR Value of each test band.											
2. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is ≤ ¼ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.											



Measurement Variability				
Test Position	Channel/ Frequency(MHz)	MAX Measured SAR _{1g} (W/kg)	1 st Repeated SAR _{1g} (W/kg)	Ratio
Left Tilt	9400/1880	0.862	0.843	1.02
Note: 1) A second repeated measurement was preformed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit). 2) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.				

MAX Adjusted SAR								
Test Position	Cover Type	Channel/ Frequency (MHz)	Full power (dBm)	Tune-up (dBm)	Report SAR _{1g} (mW/g)	Scaling Factor	Full power Report SAR _{1g} (mW/g)	0mm SAR
Back Side	standard	9400/1880	24.10	21.10	0.296	2.00	0.591	No
Front Side	standard	9400/1880	24.10	21.10	0.234	2.00	0.467	No
Left Edge	standard	9400/1880	24.10	21.10	0.115	2.00	0.229	No
Top Edge	standard	9400/1880	24.10	21.10	0.575	2.00	1.147	No
Note: According to 648474 D04 Handset SAR v01r03, For Phablet, Since hotspot mode 1-g reported SAR < 1.2 W/kg, Product Specific 10-g SAR is not required.								

Variant

Test Position	Cover Type	Channel Type	Duty Cycle	Channel/ Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
							Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	
Head SAR											
Left Tilt	Battery2	RMC 12.2K	1:1	9400/1880	21.60	20.50	0.792	0.120	1.29	1.020	57
Body-worn SAR (Distance 15mm)											
Back Side	standard	RMC 12.2K	1:1	9400/1880	24.10	22.76	0.292	0.026	1.36	0.398	58
Hotspot SAR(Distance 10mm)											
Top Edge	standard	RMC 12.2K	1:1	9400/1880	21.10	19.79	0.498	-0.050	1.35	0.673	59
Note: 1.The value with blue color is the maximum SAR Value of each test band.											



Table 25: UMTS Band IV (Second-antenna)

Original

Test Position	Cover Type	Channel Type	Duty Cycle	Channel/ Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
							Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	
Head SAR											
Left Cheek	standard	RMC 12.2K	1:1	1413/1732.6	21.20	20.18	0.395	0.160	1.26	0.500	/
Left Tilt	standard	RMC 12.2K	1:1	1413/1732.6	21.20	20.18	0.597	-0.030	1.26	0.755	/
Right Cheek	standard	RMC 12.2K	1:1	1312/1712.4	21.20	20.16	0.635	0.014	1.27	0.807	/
	standard	RMC 12.2K	1:1	1413/1732.6	21.20	20.18	0.679	-0.020	1.26	0.859	/
	standard	RMC 12.2K	1:1	1513/1752.6	21.20	20.26	0.618	0.092	1.24	0.767	/
Right Tilt	standard	RMC 12.2K	1:1	1312/1712.4	21.20	20.16	0.639	-0.022	1.27	0.812	/
	standard	RMC 12.2K	1:1	1413/1732.6	21.20	20.18	0.680	0.000	1.26	0.860	/
	standard	RMC 12.2K	1:1	1513/1752.6	21.20	20.26	0.662	0.017	1.24	0.822	/
Right Tilt	Battery2	RMC 12.2K	1:1	1413/1732.6	21.20	20.18	0.639	-0.042	1.26	0.808	/
Body-worn SAR (Distance 15mm)											
Back Side	standard	RMC 12.2K	1:1	1413/1732.6	24.20	23.43	0.291	0.070	1.19	0.347	/
Front Side	standard	RMC 12.2K	1:1	1413/1732.6	24.20	23.43	0.192	0.060	1.19	0.229	/
Back Side	Battery2	RMC 12.2K	1:1	1413/1732.6	24.20	23.43	0.256	-0.024	1.19	0.306	/
Hotspot SAR(Distance 10mm)											
Back Side	standard	RMC 12.2K	1:1	1413/1732.6	20.20	19.37	0.183	0.073	1.21	0.222	/
Front Side	standard	RMC 12.2K	1:1	1413/1732.6	20.20	19.37	0.129	-0.029	1.21	0.156	/
Left Edge	standard	RMC 12.2K	1:1	1413/1732.6	20.20	19.37	0.071	0.012	1.21	0.086	/
Right Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Top Edge	standard	RMC 12.2K	1:1	1413/1732.6	20.20	19.37	0.332	0.039	1.21	0.402	/
Bottom Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Top Edge	Battery2	RMC 12.2K	1:1	1413/1732.6	20.20	19.37	0.295	-0.060	1.21	0.357	/
Note: 1.The value with blue color is the maximum SAR Value of each test band.											
2. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is ≤ ¼ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.											

MAX Adjusted SAR

Test Position	Cover Type	Channel/Frequency (MHz)	Full power (dBm)	Tune-up (dBm)	Report SAR1g (mW/g)	Scaling Factor	Full power Report SAR1g (mW/g)	0mm SAR
Back Side	standard	1413/1732.6	24.20	20.20	0.222	2.51	0.556	No
Front Side	standard	1413/1732.6	24.20	20.20	0.156	2.51	0.392	No
Left Edge	standard	1413/1732.6	24.20	20.20	0.086	2.51	0.216	No
Top Edge	standard	1413/1732.6	24.20	20.20	0.402	2.51	1.010	No



Note: According to 648474 D04 Handset SAR v01r03, For Phablet, Since hotspot mode 1-g reported SAR < 1.2 W/kg, Product Specific 10-g SAR is not required.

Variant

Test Position	Cover Type	Channel Type	Duty Cycle	Channel/ Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
							Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	
Head SAR											
Right Tilt	standard	RMC 12.2K	1:1	1413/1732.6	21.20	20.18	0.784	0.010	1.26	0.992	60
Body-worn SAR (Distance 15mm)											
Back Side	standard	RMC 12.2K	1:1	1413/1732.6	24.20	23.43	0.355	-0.090	1.19	0.424	61
Hotspot SAR(Distance 10mm)											
Top Edge	standard	RMC 12.2K	1:1	1413/1732.6	20.20	19.37	0.411	-0.180	1.21	0.498	62
Note: 1.The value with blue color is the maximum SAR Value of each test band.											



Table 26: UMTS Band V (Second-antenna)

Original

Test Position	Cover Type	Channel Type	Duty Cycle	Channel/ Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
							Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	
Head SAR											
Left Cheek	standard	RMC 12.2K	1:1	4183/836.6	24.00	23.71	0.604	-0.130	1.07	0.646	/
Left Tilt	standard	RMC 12.2K	1:1	4183/836.6	24.00	23.71	0.075	0.021	1.07	0.080	/
Right Cheek	standard	RMC 12.2K	1:1	4183/836.6	24.00	23.71	0.332	0.066	1.07	0.355	/
Right Tilt	standard	RMC 12.2K	1:1	4183/836.6	24.00	23.71	0.066	0.030	1.07	0.070	/
Left Cheek	Battery2	RMC 12.2K	1:1	4183/836.6	24.00	23.71	0.528	-0.014	1.07	0.564	/
Body-worn SAR (Distance 15mm)											
Back Side	standard	RMC 12.2K	1:1	4183/836.6	25.00	23.74	0.158	-0.060	1.34	0.211	/
Front Side	standard	RMC 12.2K	1:1	4183/836.6	25.00	23.74	0.147	0.021	1.34	0.196	/
Back Side	Battery2	RMC 12.2K	1:1	4183/836.6	25.00	23.74	0.125	-0.052	1.34	0.167	/
Hotspot SAR(Distance 10mm)											
Back Side	standard	RMC 12.2K	1:1	4183/836.6	24.00	23.71	0.281	-0.073	1.07	0.300	/
Front Side	standard	RMC 12.2K	1:1	4183/836.6	24.00	23.71	0.271	-0.062	1.07	0.290	/
Left Edge	standard	RMC 12.2K	1:1	4183/836.6	24.00	23.71	0.464	0.028	1.07	0.496	/
Right Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Top Edge	standard	RMC 12.2K	1:1	4183/836.6	24.00	23.71	0.015	0.157	1.07	0.016	/
Bottom Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Left Edge	Battery2	RMC 12.2K	1:1	4183/836.6	24.00	23.71	0.453	-0.018	1.07	0.484	/
Left Edge	SIM 2	RMC 12.2K	1:1	4183/836.6	24.00	23.71	0.438	0.090	1.07	0.468	/

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

MAX Adjusted SAR								
Test Position	Cover Type	Channel/Frequency (MHz)	Full power (dBm)	Tune-up (dBm)	Report SAR1g (mW/g)	Scaling Factor	Full power Report SAR1g (mW/g)	0mm SAR
Back Side	standard	4183/836.6	25.00	24.00	0.300	1.26	0.378	No
Front Side	standard	4183/836.6	25.00	24.00	0.290	1.26	0.365	No
Left Edge	standard	4183/836.6	25.00	24.00	0.496	1.26	0.624	No
Top Edge	standard	4183/836.6	25.00	24.00	0.016	1.26	0.020	No

Note: According to 648474 D04 Handset SAR v01r03, For Phablet, Since hotspot mode 1-g reported SAR < 1.2 W/kg, Product Specific 10-g SAR is not required.



Variant

Test Position	Cover Type	Channel Type	Duty Cycle	Channel/ Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
							Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	
Head SAR											
Left Cheek	standard	RMC 12.2K	1:1	4183/836.6	24.00	23.71	0.552	0.038	1.07	0.590	63
Body-worn SAR (Distance 15mm)											
Back Side	standard	RMC 12.2K	1:1	4183/836.6	25.00	23.74	0.140	-0.029	1.34	0.187	64
Hotspot SAR(Distance 10mm)											
Left Edge	standard	RMC 12.2K	1:1	4183/836.6	24.00	23.71	0.420	0.027	1.07	0.449	65
Note: 1.The value with blue color is the maximum SAR Value of each test band.											



Table 27: LTE Band 2 (20MHz, Second-antenna)
Variant

Test Position	Cover Type	Duty Cycle	RB alloc ation	RB offset	Channel/ Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
								Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	
Head SAR (QPSK)												
Left Cheek	standard	1:1	1	50	18900/1880	20.10	19.50	0.516	0.021	1.15	0.592	/
Left Tilt	standard	1:1	1	50	18900/1880	20.10	19.50	0.663	0.030	1.15	0.761	/
Right Cheek	standard	1:1	1	50	18900/1880	20.10	19.50	0.559	0.010	1.15	0.642	/
Right Tilt	standard	1:1	1	50	18700/1860	20.10	19.41	0.721	0.010	1.17	0.845	/
	standard	1:1	1	50	18900/1880	20.10	19.50	0.724	0.020	1.15	0.831	66
	standard	1:1	1	50	19100/1900	20.10	19.40	0.716	0.000	1.17	0.841	/
Left Cheek	standard	1:1	50%	0	18900/1880	20.10	19.41	0.494	0.030	1.17	0.579	/
Left Tilt	standard	1:1	50%	0	18900/1880	20.10	19.41	0.637	0.000	1.17	0.747	/
Right Cheek	standard	1:1	50%	0	18900/1880	20.10	19.41	0.541	0.010	1.17	0.634	/
Right Tilt	standard	1:1	50%	25	18700/1860	20.10	19.34	0.679	0.020	1.19	0.809	/
	standard	1:1	50%	0	18900/1880	20.10	19.41	0.697	0.020	1.17	0.817	/
	standard	1:1	50%	25	19100/1900	20.10	19.36	0.693	0.010	1.19	0.822	/
Right Tilt	standard	1:1	100%	0	18700/1860	20.10	19.33	0.662	-0.060	1.19	0.790	/
	standard	1:1	100%	0	18900/1880	20.10	19.34	0.689	0.032	1.19	0.821	/
	standard	1:1	100%	0	19100/1900	20.10	19.15	0.645	0.018	1.24	0.803	/
Right Tilt	Battery2	1:1	1	50	18700/1860	20.10	19.41	0.695	-0.051	1.17	0.815	/
Body-worn SAR (QPSK, Distance 15mm)												
Back Side	standard	1:1	1	50	18700/1860	23.60	22.80	0.206	0.032	1.20	0.248	/
Front Side	standard	1:1	1	50	18700/1860	23.60	22.80	0.178	0.010	1.20	0.214	/
Back Side	standard	1:1	50%	25	18700/1860	23.10	22.30	0.210	0.050	1.20	0.252	67
Front Side	standard	1:1	50%	25	18700/1860	23.10	22.30	0.172	-0.090	1.20	0.207	/
Back Side	Battery2	1:1	50%	25	18700/1860	23.10	22.30	0.176	0.040	1.20	0.212	/
Hotspot SAR(QPSK, Distance 10mm)												
Back Side	standard	1:1	1	50	18900/1880	20.10	19.50	0.196	0.021	1.15	0.225	/
Front Side	standard	1:1	1	50	18900/1880	20.10	19.50	0.162	0.038	1.15	0.186	/
Left Edge	standard	1:1	1	50	18900/1880	20.10	19.50	0.070	0.072	1.15	0.080	/
Right Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Top Edge	standard	1:1	1	50	18900/1880	20.10	19.50	0.362	0.150	1.15	0.416	68
Bottom Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Back Side	standard	1:1	50%	0	18900/1880	20.10	19.41	0.185	-0.060	1.17	0.217	/
Front Side	standard	1:1	50%	0	18900/1880	20.10	19.41	0.162	0.014	1.17	0.190	/
Left Edge	standard	1:1	50%	0	18900/1880	20.10	19.41	0.073	0.032	1.17	0.086	/
Right Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A



Top Edge	standard	1:1	50%	0	18900/1880	20.10	19.41	0.331	0.040	1.17	0.388	/
Bottom Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Top Edge	Battery2	1:1	1	50	18900/1880	20.10	19.50	0.338	-0.072	1.15	0.388	/

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. For QPSK with 100% RB allocation, SAR is required when and the highest reported SAR for 1 RB and 50% RB allocation in are $\geq$ 50% limit(1g).

MAX Adjusted SAR

Test Position	Cover Type	RB allocation	Channel/Frequency (MHz)	Full power (dBm)	Tune-up (dBm)	Report SAR1g (mW/g)	Scaling Factor	Full power Report SAR1g (mW/g)	0mm SAR
Back Side	standard	1	18900/1880	23.60	20.10	0.225	2.24	0.504	No
Front Side	standard	1	18900/1880	23.60	20.10	0.186	2.24	0.416	No
Left Edge	standard	1	18900/1880	23.60	20.10	0.080	2.24	0.180	No
Top Edge	standard	1	18900/1880	23.60	20.10	0.416	2.24	0.930	No
Back Side	standard	50%	18900/1880	23.10	20.10	0.217	2.00	0.433	No
Front Side	standard	50%	18900/1880	23.10	20.10	0.190	2.00	0.379	No
Left Edge	standard	50%	18900/1880	23.10	20.10	0.086	2.00	0.171	No
Top Edge	standard	50%	18900/1880	23.10	20.10	0.388	2.00	0.774	No

Note: According to 648474 D04 Handset SAR v01r03, For Phablet, Since hotspot mode 1-g reported SAR < 1.2 W/kg, Product Specific 10-g SAR is not required.



Table 28: LTE Band 4 (20MHz, Second-antenna)

Original

Test Position	Cover Type	Duty Cycle	RB allocation	RB offset	Channel/ Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
								Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	
Head SAR (QPSK)												
Left Cheek	standard	1:1	1	50	20175/1732.5	20.50	20.03	0.395	0.030	1.11	0.440	/
Left Tilt	standard	1:1	1	50	20175/1732.5	20.50	20.03	0.550	0.030	1.11	0.613	/
Right Cheek	standard	1:1	1	50	20175/1732.5	20.50	20.03	0.484	0.050	1.11	0.539	/
Right Tilt	standard	1:1	1	50	20175/1732.5	20.50	20.03	0.672	0.050	1.11	0.749	/
Left Cheek	standard	1:1	50%	0	20175/1732.5	20.50	20.05	0.400	0.040	1.11	0.444	/
Left Tilt	standard	1:1	50%	0	20175/1732.5	20.50	20.05	0.545	0.050	1.11	0.605	/
Right Cheek	standard	1:1	50%	0	20175/1732.5	20.50	20.05	0.556	0.030	1.11	0.617	/
Right Tilt	standard	1:1	50%	0	20175/1732.5	20.50	20.05	0.672	0.030	1.11	0.745	/
Right Tilt	Battery2	1:1	1	50	20175/1732.5	20.50	20.03	0.658	-0.080	1.11	0.733	/
Body-worn SAR (QPSK, Distance 15mm)												
Back Side	standard	1:1	1	50	20175/1732.5	24.00	23.37	0.353	0.050	1.16	0.408	/
Front Side	standard	1:1	1	50	20175/1732.5	24.00	23.37	0.266	0.007	1.16	0.308	/
Back Side	standard	1:1	50%	25	20175/1732.5	23.50	22.96	0.301	-0.031	1.13	0.341	/
Front Side	standard	1:1	50%	25	20175/1732.5	23.50	22.96	0.224	0.027	1.13	0.254	/
Back Side	Battery2	1:1	1	50	20175/1732.5	24.00	23.37	0.308	0.024	1.16	0.356	/
Hotspot SAR(QPSK, Distance 10mm)												
Back Side	standard	1:1	1	50	20300/1745	20.00	19.50	0.167	-0.036	1.12	0.187	/
Front Side	standard	1:1	1	50	20300/1745	20.00	19.50	0.130	0.011	1.12	0.146	/
Left Edge	standard	1:1	1	50	20300/1745	20.00	19.50	0.060	-0.017	1.12	0.067	/
Right Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Top Edge	standard	1:1	1	50	20300/1745	20.00	19.50	0.278	-0.023	1.12	0.312	/
Bottom Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Back Side	standard	1:1	50%	25	20300/1745	20.00	19.52	0.165	0.171	1.12	0.184	/
Front Side	standard	1:1	50%	25	20300/1745	20.00	19.52	0.138	-0.129	1.12	0.154	/
Left Edge	standard	1:1	50%	25	20300/1745	20.00	19.52	0.059	0.061	1.12	0.066	/
Right Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Top Edge	standard	1:1	50%	25	20300/1745	20.00	19.52	0.289	0.160	1.12	0.323	/
Bottom Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Top Edge	Battery2	1:1	50%	25	20300/1745	20.00	19.52	0.235	-0.064	1.12	0.262	/
Note: 1.The value with blue color is the maximum SAR Value of each test band.												
2.For QPSK with 100% RB allocation, SAR is required when and the highest reported SAR for 1 RB and 50% RB allocation in are ≥ 50% limit(1g).												



MAX Adjusted SAR									
Test Position	Cover Type	RB allocation	Channel/ Frequency (MHz)	Full power (dBm)	Tune-up (dBm)	Report SAR1g (mW/g)	Scaling Factor	Full power Report SAR1g (mW/g)	0mm SAR
Back Side	standard	1	20300/1745	24.00	20.00	0.187	2.51	0.471	No
Front Side	standard	1	20300/1745	24.00	20.00	0.146	2.51	0.366	No
Left Edge	standard	1	20300/1745	24.00	20.00	0.067	2.51	0.169	No
Top Edge	standard	1	20300/1745	24.00	20.00	0.312	2.51	0.784	No
Back Side	standard	50%	20300/1745	23.50	20.00	0.184	2.24	0.413	No
Front Side	standard	50%	20300/1745	23.50	20.00	0.154	2.24	0.345	No
Left Edge	standard	50%	20300/1745	23.50	20.00	0.066	2.24	0.148	No
Top Edge	standard	50%	20300/1745	23.50	20.00	0.323	2.24	0.723	No
Note: According to 648474 D04 Handset SAR v01r03, For Phablet, Since hotspot mode 1-g reported SAR < 1.2 W/kg, Product Specific 10-g SAR is not required.									

Variant

Test Position	Cover Type	Duty Cycle	RB allocation	RB offset	Channel/ Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
								Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	
Head SAR (QPSK)												
Right Tilt	standard	1:1	1	50	20175/1732.5	20.50	20.03	0.662	0.140	1.11	0.738	69
Body-worn SAR (QPSK, Distance 15mm)												
Back Side	standard	1:1	1	50	20175/1732.5	24.00	23.37	0.337	0.010	1.16	0.390	70
Hotspot SAR(QPSK, Distance 10mm)												
Top Edge	standard	1:1	50%	25	20300/1745	20.00	19.52	0.258	0.024	1.12	0.288	71
Note: 1.The value with blue color is the maximum SAR Value of each test band.												



Table 29: LTE Band 5 (10MHz, Second-antenna)

Original

Test Position	Cover Type	Duty Cycle	RB allocation	RB offset	Channel/ Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
								Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	
Head SAR (QPSK)												
Left Cheek	standard	1:1	1	25	20525/836.5	24.00	23.18	0.533	0.037	1.21	0.644	/
Left Tilt	standard	1:1	1	25	20525/836.5	24.00	23.18	0.090	0.037	1.21	0.109	/
Right Cheek	standard	1:1	1	25	20525/836.5	24.00	23.18	0.336	0.055	1.21	0.406	/
Right Tilt	standard	1:1	1	25	20525/836.5	24.00	23.18	0.071	0.023	1.21	0.085	/
Left Cheek	standard	1:1	50%	25	20450/829	24.00	23.02	0.534	0.180	1.25	0.669	/
Left Tilt	standard	1:1	50%	25	20450/829	24.00	23.02	0.078	0.024	1.25	0.098	/
Right Cheek	standard	1:1	50%	25	20450/829	24.00	23.02	0.335	0.022	1.25	0.420	/
Right Tilt	standard	1:1	50%	25	20450/829	24.00	23.02	0.069	0.028	1.25	0.086	/
Left Cheek	Battery2	1:1	50%	25	20450/829	24.00	23.02	0.528	-0.040	1.25	0.662	/
Body-worn SAR (QPSK, Distance 15mm)												
Back Side	standard	1:1	1	25	20600/844	25.00	24.07	0.174	0.040	1.24	0.216	/
Front Side	standard	1:1	1	25	20600/844	25.00	24.07	0.156	0.059	1.24	0.193	/
Back Side	standard	1:1	50%	13	20600/844	24.00	23.01	0.158	-0.151	1.26	0.198	/
Front Side	standard	1:1	50%	13	20600/844	24.00	23.01	0.149	0.076	1.26	0.187	/
Back Side	Battery2	1:1	1	25	20600/844	25.00	24.07	0.139	0.025	1.24	0.172	/
Hotspot SAR(QPSK, Distance 10mm)												
Back Side	standard	1:1	1	25	20525/836.5	24.00	23.18	0.274	-0.095	1.21	0.331	/
Front Side	standard	1:1	1	25	20525/836.5	24.00	23.18	0.278	0.173	1.21	0.336	/
Left Edge	standard	1:1	1	25	20525/836.5	24.00	23.18	0.482	0.023	1.21	0.582	/
Right Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Top Edge	standard	1:1	1	25	20525/836.5	24.00	23.18	0.019	-0.019	1.21	0.023	/
Bottom Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Back Side	standard	1:1	50%	25	20450/829	24.00	23.02	0.265	0.133	1.25	0.332	/
Front Side	standard	1:1	50%	25	20450/829	24.00	23.02	0.268	-0.021	1.25	0.336	/
Left Edge	standard	1:1	50%	25	20450/829	24.00	23.02	0.448	0.017	1.25	0.561	/
Right Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Top Edge	standard	1:1	50%	25	20450/829	24.00	23.02	0.026	0.093	1.25	0.033	/
Bottom Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Left Edge	Battery2	1:1	1	25	20525/836.5	24.00	23.18	0.446	0.010	1.21	0.539	/
Note: 1.The value with blue color is the maximum SAR Value of each test band.												
2.For QPSK with 100% RB allocation, SAR is required when and the highest reported SAR for 1 RB and 50% RB allocation in are $\geq 50\%$ limit(1g).												



MAX Adjusted SAR									
Test Position	Cover Type	RB allocation	Channel/ Frequency (MHz)	Full power (dBm)	Tune-up (dBm)	Report SAR1g (mW/g)	Scaling Factor	Full power Report SAR1g (mW/g)	0mm SAR
Back Side	standard	1	20525/836.5	25.00	24.00	0.331	1.26	0.417	No
Front Side	standard	1	20525/836.5	25.00	24.00	0.336	1.26	0.423	No
Left Edge	standard	1	20525/836.5	25.00	24.00	0.582	1.26	0.733	No
Top Edge	standard	1	20525/836.5	25.00	24.00	0.023	1.26	0.029	No
Back Side	standard	50%	20450/829	24.00	24.00	0.332	1.00	0.332	No
Front Side	standard	50%	20450/829	24.00	24.00	0.336	1.00	0.336	No
Left Edge	standard	50%	20450/829	24.00	24.00	0.561	1.00	0.561	No
Top Edge	standard	50%	20450/829	24.00	24.00	0.033	1.00	0.033	No
Note: According to 648474 D04 Handset SAR v01r03, For Phablet, Since hotspot mode 1-g reported SAR < 1.2 W/kg, Product Specific 10-g SAR is not required.									

Variant

Test Position	Cover Type	Duty Cycle	RB allocation	RB offset	Channel/ Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
								Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	
Head SAR (QPSK)												
Left Cheek	standard	1:1	50%	25	20450/829	24.00	23.02	0.502	0.170	1.25	0.629	72
Body-worn SAR (QPSK, Distance 15mm)												
Back Side	standard	1:1	1	25	20600/844	25.00	24.07	0.134	0.020	1.24	0.166	73
Hotspot SAR(QPSK, Distance 10mm)												
Left Edge	standard	1:1	1	25	20525/836.5	24.00	23.18	0.379	0.030	1.21	0.458	74
Note: 1.The value with blue color is the maximum SAR Value of each test band.												



Table 30: LTE Band 7 (20MHz, Second-antenna)

Variant

Test Position	Cover Type	Duty Cycle	RB allocation	RB offset	Channel/Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
								Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	
Head SAR (QPSK)												
Left Cheek	standard	1:1	1	50	21100/2535	18.25	18.09	0.165	0.070	1.04	0.171	/
Left Tilt	standard	1:1	1	50	21100/2535	18.25	18.09	0.105	0.035	1.04	0.109	/
Right Cheek	standard	1:1	1	50	21100/2535	18.25	18.09	0.563	0.074	1.04	0.584	/
Right Tilt	standard	1:1	1	50	21100/2535	18.25	18.09	0.278	0.074	1.04	0.288	/
Left Cheek	standard	1:1	50%	25	21100/2535	18.25	18.15	0.155	0.130	1.02	0.159	/
Left Tilt	standard	1:1	50%	25	21100/2535	18.25	18.15	0.104	0.130	1.02	0.106	/
Right Cheek	standard	1:1	50%	25	21100/2535	18.25	18.15	0.566	0.040	1.02	0.579	75
Right Tilt	standard	1:1	50%	25	21100/2535	18.25	18.15	0.277	0.071	1.02	0.283	/
Right Cheek	Battery2	1:1	1	50	21100/2535	18.25	18.09	0.558	-0.100	1.04	0.579	/
Right Cheek	standard	1:1	1	99	20850/2510	18.25	17.78	0.452	0.038	1.11	0.504	/
			1	0	21048/2529.8							
Body-worn SAR (QPSK, Distance 15mm)												
Back Side	standard	1:1	1	50	20850/2510	21.50	21.35	0.250	-0.087	1.04	0.259	76
Front Side	standard	1:1	1	50	20850/2510	21.50	21.35	0.155	0.029	1.04	0.160	/
Back Side	standard	1:1	50%	25	21100/2535	21.50	21.38	0.200	0.012	1.03	0.206	/
Front Side	standard	1:1	50%	25	21100/2535	21.50	21.38	0.149	0.060	1.03	0.153	/
Back Side	Battery2	1:1	1	50	20850/2510	21.50	21.35	0.219	0.047	1.04	0.227	/
Back Side	standard	1:1	1	99	21100/2535	21.50	20.98	0.164	0.012	1.13	0.185	/
			1	0	21298/2554.8							
Hotspot SAR(QPSK, Distance 10mm)												
Back Side	standard	1:1	1	50	21100/2535	18.25	18.09	0.190	0.026	1.04	0.197	/
Front Side	standard	1:1	1	50	21100/2535	18.25	18.09	0.152	0.050	1.04	0.158	/
Left Edge	standard	1:1	1	50	21100/2535	18.25	18.09	0.308	0.071	1.04	0.320	/
Right Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Top Edge	standard	1:1	1	50	21100/2535	18.25	18.09	0.066	0.032	1.04	0.068	/
Bottom Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Back Side	standard	1:1	50%	25	21100/2535	18.25	18.15	0.182	-0.055	1.02	0.186	/
Front Side	standard	1:1	50%	25	21100/2535	18.25	18.15	0.141	0.024	1.02	0.144	/
Left Edge	standard	1:1	50%	25	21100/2535	18.25	18.15	0.311	0.010	1.02	0.318	77
Right Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Top Edge	standard	1:1	50%	25	21100/2535	18.25	18.15	0.058	0.040	1.02	0.059	/
Bottom Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Left Edge	Battery2	1:1	50%	25	21100/2535	18.25	18.15	0.285	-0.036	1.02	0.292	/
Left Edge	standard	1:1	1	99	20850/2510	18.25	17.78	0.225	0.092	1.11	0.251	/
			1	0	21048/2529.8							



Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. For QPSK with 100% RB allocation, SAR is required when and the highest reported SAR for 1 RB and 50% RB allocation in are $\geq$ 50% limit(1g).

MAX Adjusted SAR

Test Position	Cover Type	RB allocation	Channel/ Frequency (MHz)	Full power (dBm)	Tune-up (dBm)	Report SAR1g (mW/g)	Scaling Factor	Full power Report SAR1g (mW/g)	0mm SAR
Back Side	standard	1	21100/2535	21.50	18.25	0.197	2.11	0.417	No
Front Side	standard	1	21100/2535	21.50	18.25	0.158	2.11	0.333	No
Left Edge	standard	1	21100/2535	21.50	18.25	0.320	2.11	0.675	No
Top Edge	standard	1	21100/2535	21.50	18.25	0.068	2.11	0.145	No
Back Side	standard	50%	21100/2535	21.50	18.25	0.186	2.11	0.394	No
Front Side	standard	50%	21100/2535	21.50	18.25	0.144	2.11	0.305	No
Left Edge	standard	50%	21100/2535	21.50	18.25	0.318	2.11	0.673	No
Top Edge	standard	50%	21100/2535	21.50	18.25	0.059	2.11	0.125	No

Note: According to 648474 D04 Handset SAR v01r03, For Phablet, Since hotspot mode 1-g reported SAR < 1.2 W/kg, Product Specific 10-g SAR is not required.



Table 31: LTE Band 12 (10MHz, Second-antenna)

Variant

Test Position	Cover Type	Duty Cycle	RB allocation	RB offset	Channel/ Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
								Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	
Head SAR (QPSK)												
Left Cheek	standard	1:1.58	1	25	23095/707.5	23.70	22.95	0.485	0.096	1.19	0.576	/
Left Tilt	standard	1:1.58	1	25	23095/707.5	23.70	22.95	0.082	0.043	1.19	0.097	/
Right Cheek	standard	1:1.58	1	25	23095/707.5	23.70	22.95	0.296	0.027	1.19	0.352	/
Right Tilt	standard	1:1.58	1	25	23095/707.5	23.70	22.95	0.058	0.021	1.19	0.069	/
Left Cheek	standard	1:1.58	50%	25	23095/707.5	23.70	22.91	0.535	0.106	1.20	0.642	78
Left Tilt	standard	1:1.58	50%	25	23095/707.5	23.70	22.91	0.051	0.160	1.20	0.061	/
Right Cheek	standard	1:1.58	50%	25	23095/707.5	23.70	22.91	0.332	0.180	1.20	0.398	/
Right Tilt	standard	1:1.58	50%	25	23095/707.5	23.70	22.91	0.072	0.031	1.20	0.086	/
Left Cheek	Battery2	1:1.58	50%	25	23095/707.5	23.70	22.91	0.518	0.180	1.20	0.621	/
Body-worn SAR (QPSK, Distance 15mm)												
Back Side	standard	1:1.58	1	50	23060/704	24.20	23.49	0.183	0.020	1.18	0.216	79
Front Side	standard	1:1.58	1	50	23060/704	24.20	23.49	0.176	0.036	1.18	0.207	/
Back Side	standard	1:1.58	50%	50	23060/704	23.70	22.93	0.161	-0.012	1.19	0.192	/
Front Side	standard	1:1.58	50%	50	23060/704	23.70	22.93	0.153	0.080	1.19	0.183	/
Back Side	Battery2	1:1.58	1	50	23060/704	24.20	23.49	0.147	0.023	1.18	0.173	/
Hotspot SAR(QPSK, Distance 10mm)												
Back Side	standard	1:1.58	1	50	23095/707.5	23.20	22.57	0.225	0.130	1.16	0.260	/
Front Side	standard	1:1.58	1	50	23095/707.5	23.20	22.57	0.189	0.026	1.16	0.219	/
Left Edge	standard	1:1.58	1	50	23095/707.5	23.20	22.57	0.327	0.070	1.16	0.378	80
Right Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Top Edge	standard	1:1.58	1	50	23095/707.5	23.20	22.57	0.024	-0.058	1.16	0.028	/
Bottom Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Back Side	standard	1:1.58	50%	50	23095/707.5	23.20	22.48	0.214	0.021	1.18	0.253	/
Front Side	standard	1:1.58	50%	50	23095/707.5	23.20	22.48	0.165	-0.047	1.18	0.195	/
Left Edge	standard	1:1.58	50%	50	23095/707.5	23.20	22.48	0.304	0.030	1.18	0.359	/
Right Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Top Edge	standard	1:1.58	50%	50	23095/707.5	23.20	22.48	0.019	0.051	1.18	0.022	/
Bottom Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Left Edge	Battery2	1:1.58	1	50	23095/707.5	23.20	22.57	0.319	0.043	1.16	0.369	/
Note: 1.The value with blue color is the maximum SAR Value of each test band.												
2.For QPSK with 100% RB allocation, SAR is required when and the highest reported SAR for 1 RB and 50% RB allocation in are≥ 50% limit(1g).												



MAX Adjusted SAR									
Test Position	Cover Type	RB allocation	Channel/Frequency (MHz)	Full power (dBm)	Tune-up (dBm)	Report SAR1g (mW/g)	Scaling Factor	Full power Report SAR1g (mW/g)	0mm SAR
Back Side	standard	1	23095/707.5	24.20	23.20	0.260	1.26	0.327	No
Front Side	standard	1	23095/707.5	24.20	23.20	0.219	1.26	0.275	No
Left Edge	standard	1	23095/707.5	24.20	23.20	0.378	1.26	0.476	No
Top Edge	standard	1	23095/707.5	24.20	23.20	0.028	1.26	0.035	No
Back Side	standard	50%	23095/707.5	23.70	23.20	0.253	1.12	0.283	No
Front Side	standard	50%	23095/707.5	23.70	23.20	0.195	1.12	0.219	No
Left Edge	standard	50%	23095/707.5	23.70	23.20	0.359	1.12	0.403	No
Top Edge	standard	50%	23095/707.5	23.70	23.20	0.022	1.12	0.025	No
Note: According to 648474 D04 Handset SAR v01r03, For Phablet, Since hotspot mode 1-g reported SAR < 1.2 W/kg, Product Specific 10-g SAR is not required.									



Table 32: LTE Band 38 (20MHz, Second-antenna)

Original

Test Position	Cover Type	Duty Cycle	RB allocation	RB offset	Channel/ Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
								Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	
Head SAR (QPSK)												
Left Cheek	standard	1:1.58	1	50	38000/2595	19.75	18.62	0.231	-0.130	1.30	0.300	/
Left Tilt	standard	1:1.58	1	50	38000/2595	19.75	18.62	0.119	0.080	1.30	0.154	/
Right Cheek	standard	1:1.58	1	50	38000/2595	19.75	18.62	0.559	0.029	1.30	0.725	/
Right Tilt	standard	1:1.58	1	50	38000/2595	19.75	18.62	0.256	0.180	1.30	0.332	/
Left Cheek	standard	1:1.58	50%	50	38000/2595	21.25	20.59	0.238	0.029	1.16	0.277	/
Left Tilt	standard	1:1.58	50%	50	38000/2595	21.25	20.59	0.113	-0.020	1.16	0.132	/
Right Cheek	standard	1:1.58	50%	50	38000/2595	21.25	20.59	0.554	0.029	1.16	0.645	/
Right Tilt	standard	1:1.58	50%	50	38000/2595	21.25	20.59	0.254	0.180	1.16	0.296	/
Right Cheek	standard	1:1.58	50%	50	38000/2595	21.15	20.27	0.412	0.012	1.22	0.505	/
			50%	0	38198/2614.8							
Right Cheek	Battery2	1:1.58	1	50	38000/2595	19.75	18.62	0.537	-0.080	1.30	0.697	/
Body-worn SAR (QPSK, Distance 15mm)												
Back Side	standard	1:1.58	1	50	38000/2595	22.25	21.17	0.243	-0.051	1.28	0.312	/
Front Side	standard	1:1.58	1	50	38000/2595	22.25	21.17	0.177	0.007	1.28	0.227	/
Back Side	standard	1:1.58	50%	50	37850/2580	23.50	22.72	0.208	-0.055	1.20	0.249	/
Front Side	standard	1:1.58	50%	50	37850/2580	23.50	22.72	0.161	0.113	1.20	0.193	/
Back Side	standard	1:1.58	50%	50	37850/2580	24.40	22.59	0.159	-0.026	1.52	0.241	/
			50%	0	38048/2599.8							
Back Side	Battery2	1:1.58	1	50	38000/2595	22.25	21.17	0.232	-0.030	1.28	0.298	/
Hotspot SAR(QPSK, Distance 10mm)												
Back Side	standard	1:1.58	1	50	38000/2595	19.75	18.62	0.203	-0.031	1.30	0.263	/
Front Side	standard	1:1.58	1	50	38000/2595	19.75	18.62	0.166	-0.143	1.30	0.215	/
Left Edge	standard	1:1.58	1	50	38000/2595	19.75	18.62	0.342	0.030	1.30	0.444	/
Right Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Top Edge	standard	1:1.58	1	50	38000/2595	19.75	18.62	0.038	0.041	1.30	0.049	/
Bottom Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Back Side	standard	1:1.58	50%	50	38000/2595	21.25	20.59	0.186	0.058	1.16	0.217	/
Front Side	standard	1:1.58	50%	50	38000/2595	21.25	20.59	0.167	-0.173	1.16	0.194	/
Left Edge	standard	1:1.58	50%	50	38000/2595	21.25	20.59	0.321	-0.032	1.16	0.374	/
Right Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Top Edge	standard	1:1.58	50%	50	38000/2595	21.25	20.59	0.027	0.017	1.16	0.031	/
Bottom Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Left Edge	standard	1:1.58	50%	50	38000/2595	21.15	20.27	0.227	0.026	1.22	0.278	/
			50%	0	38198/2614.8							
Left Edge	Battery2	1:1.58	1	50	38000/2595	19.75	18.62	0.286	0.030	1.30	0.371	/



Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. For QPSK with 100% RB allocation, SAR is required when and the highest reported SAR for 1 RB and 50% RB allocation in are $\geq$ 50% limit(1g).

MAX Adjusted SAR

Test Position	Cover Type	RB allocation	Channel/ Frequency (MHz)	Full power (dBm)	Tune-up (dBm)	Report SAR1g (mW/g)	Scaling Factor	Full power Report SAR1g (mW/g)	0mm SAR
Back Side	standard	1	38000/2595	22.25	19.75	0.263	1.78	0.468	No
Front Side	standard	1	38000/2595	22.25	19.75	0.215	1.78	0.383	No
Left Edge	standard	1	38000/2595	22.25	19.75	0.444	1.78	0.789	No
Top Edge	standard	1	38000/2595	22.25	19.75	0.049	1.78	0.088	No
Back Side	standard	50%	38000/2595	23.50	21.25	0.217	1.68	0.364	No
Front Side	standard	50%	38000/2595	23.50	21.25	0.194	1.68	0.326	No
Left Edge	standard	50%	38000/2595	23.50	21.25	0.374	1.68	0.627	No
Top Edge	standard	50%	38000/2595	23.50	21.25	0.031	1.68	0.053	No

Note: According to 648474 D04 Handset SAR v01r03, For Phablet, Since hotspot mode 1-g reported SAR < 1.2 W/kg, Product Specific 10-g SAR is not required.

Variant

Test Position	Cover Type	Duty Cycle	RB allocation	RB offset	Channel/ Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
								Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	
Head SAR (QPSK)												
Right Cheek	standard	1:1.58	1	50	38000/2595	21.25	20.59	0.603	-0.036	1.16	0.702	81
Body-worn SAR (QPSK, Distance 15mm)												
Back Side	standard	1:1.58	1	50	38000/2595	22.25	21.17	0.244	-0.026	1.28	0.313	82
Hotspot SAR(QPSK, Distance 10mm)												
Left Edge	standard	1:1.58	1	50	38000/2595	19.75	18.62	0.366	0.140	1.30	0.475	83

Note: 1. The value with blue color is the maximum SAR Value of each test band.



Table 33: LTE Band 41 (20MHz, Second-antenna)

Original

Test Position	Cover Type	Duty Cycle	RB allocation	RB offset	Channel/ Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
								Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	
Head SAR (QPSK)												
Left Cheek	standard	1:1.58	1	50	39750/2506	21.25	20.97	0.195	0.070	1.07	0.208	/
Left Tilt	standard	1:1.58	1	50	39750/2506	21.25	20.97	0.153	0.024	1.07	0.163	/
Right Cheek	standard	1:1.58	1	50	39750/2506	21.25	20.97	0.691	0.010	1.07	0.737	/
Right Tilt	standard	1:1.58	1	50	39750/2506	21.25	20.97	0.360	0.120	1.07	0.384	/
Left Cheek	standard	1:1.58	50%	0	39750/2506	21.25	20.83	0.189	0.100	1.10	0.208	/
Left Tilt	standard	1:1.58	50%	0	39750/2506	21.25	20.83	0.138	0.180	1.10	0.152	/
Right Cheek	standard	1:1.58	50%	0	39750/2506	21.25	20.83	0.688	0.140	1.10	0.758	/
Right Tilt	standard	1:1.58	50%	0	39750/2506	21.25	20.83	0.352	0.000	1.10	0.388	/
Right Cheek	standard	1:1.58	1	99	39750/2506	21.25	20.69	0.494	0.026	1.14	0.562	/
			1	0	39948/2525.8							
Right Cheek	Battery2	1:1.58	50%	0	39750/2506	21.25	20.83	0.635	-0.180	1.10	0.699	/
Body-worn SAR (QPSK, Distance 15mm)												
Back Side	standard	1:1.58	1	50	39750/2506	24.00	23.14	0.233	0.071	1.22	0.284	/
Front Side	standard	1:1.58	1	50	39750/2506	24.00	23.14	0.184	0.021	1.22	0.224	/
Back Side	standard	1:1.58	50%	50	39750/2506	23.50	22.61	0.198	-0.029	1.23	0.243	/
Front Side	standard	1:1.58	50%	50	39750/2506	23.50	22.61	0.140	0.035	1.23	0.172	/
Back Side	standard	1:1.58	1	99	39750/2506	24.00	22.89	0.142	0.021	1.29	0.183	/
			1	0	39948/2525.8							
Back Side	Battery2	1:1.58	1	50	39750/2506	24.00	23.14	0.215	0.022	1.22	0.262	/
Hotspot SAR(QPSK, Distance 10mm)												
Back Side	standard	1:1.58	1	50	39750/2506	21.25	20.97	0.176	-0.068	1.07	0.188	/
Front Side	standard	1:1.58	1	50	39750/2506	21.25	20.97	0.095	0.023	1.07	0.101	/
Left Edge	standard	1:1.58	1	50	39750/2506	21.25	20.97	0.269	0.021	1.07	0.287	/
Right Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Top Edge	standard	1:1.58	1	50	39750/2506	21.25	20.97	0.034	0.010	1.07	0.036	/
Bottom Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Back Side	standard	1:1.58	50%	0	39750/2506	21.25	20.83	0.155	0.000	1.10	0.171	/
Front Side	standard	1:1.58	50%	0	39750/2506	21.25	20.83	0.095	0.021	1.10	0.105	/
Left Edge	standard	1:1.58	50%	0	39750/2506	21.25	20.83	0.260	0.030	1.10	0.286	/
Right Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Top Edge	standard	1:1.58	50%	0	39750/2506	21.25	20.83	0.030	-0.010	1.10	0.033	/
Bottom Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Left Edge	standard	1:1.58	1	99	39750/2506	21.25	20.69	0.138	0.060	1.14	0.157	/
			1	0	39948/2525.8							
Left Edge	Battery2	1:1.58	1	50	39750/2506	21.25	20.97	0.245	0.082	1.07	0.261	/



Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. For QPSK with 100% RB allocation, SAR is required when and the highest reported SAR for 1 RB and 50% RB allocation in are $\geq$ 50% limit(1g).

MAX Adjusted SAR

Test Position	Cover Type	RB allocation	Channel/Frequency (MHz)	Full power (dBm)	Tune-up (dBm)	Report SAR1g (mW/g)	Scaling Factor	Full power Report SAR1g (mW/g)	0mm SAR
Back Side	standard	1	39750/2506	24.00	21.25	0.188	1.88	0.354	No
Front Side	standard	1	39750/2506	24.00	21.25	0.101	1.88	0.191	No
Left Edge	standard	1	39750/2506	24.00	21.25	0.287	1.88	0.540	No
Top Edge	standard	1	39750/2506	24.00	21.25	0.036	1.88	0.068	No
Back Side	standard	50%	39750/2506	23.50	21.25	0.171	1.68	0.287	No
Front Side	standard	50%	39750/2506	23.50	21.25	0.105	1.68	0.176	No
Left Edge	standard	50%	39750/2506	23.50	21.25	0.286	1.68	0.481	No
Top Edge	standard	50%	39750/2506	23.50	21.25	0.033	1.68	0.055	No

Note: According to 648474 D04 Handset SAR v01r03, For Phablet, Since hotspot mode 1-g reported SAR < 1.2 W/kg, Product Specific 10-g SAR is not required.

Variant

Test Position	Cover Type	Duty Cycle	RB allocation	RB offset	Channel/ Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
								Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	
Head SAR (QPSK)												
Right Cheek	standard	1:1.58	50%	0	39750/2506	21.25	20.83	0.474	-0.190	1.10	0.522	84
Body-worn SAR (QPSK, Distance 15mm)												
Back Side	standard	1:1.58	1	50	39750/2506	24.00	23.14	0.286	0.150	1.22	0.349	85
Hotspot SAR(QPSK, Distance 10mm)												
Left Edge	standard	1:1.58	1	50	39750/2506	21.25	20.97	0.374	0.100	1.07	0.399	86

Note: 1. The value with blue color is the maximum SAR Value of each test band.



Table 34: LTE Band 66 (20MHz, Second-antenna)

Variant

Test Position	Cover Type	Duty Cycle	RB allocation	RB offset	Channel/ Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
								Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR1g	
Head SAR (QPSK)												
Left Cheek	standard	1:1	1	50	132072/1720	20.30	18.76	0.367	0.060	1.43	0.523	/
Left Tilt	standard	1:1	1	50	132072/1720	20.30	18.76	0.452	-0.020	1.43	0.644	/
Right Cheek	standard	1:1	1	50	132072/1720	20.30	18.76	0.490	0.030	1.43	0.699	/
Right Tilt	standard	1:1	1	50	132072/1720	20.30	18.76	0.537	-0.030	1.43	0.766	87
Left Cheek	standard	1:1	50%	0	132322/1745	20.30	18.59	0.329	-0.050	1.48	0.488	/
Left Tilt	standard	1:1	50%	0	132322/1745	20.30	18.59	0.470	-0.010	1.48	0.697	/
Right Cheek	standard	1:1	50%	0	132322/1745	20.30	18.59	0.443	0.020	1.48	0.657	/
Right Tilt	standard	1:1	50%	0	132322/1745	20.30	18.59	0.497	-0.020	1.48	0.737	/
Right Tilt	Battery2	1:1	1	50	132072/1720	20.30	18.76	0.521	0.055	1.43	0.743	/
Body-worn SAR (QPSK, Distance 15mm)												
Back Side	standard	1:1	1	50	132322/1745	23.80	22.18	0.349	0.090	1.45	0.507	88
Front Side	standard	1:1	1	50	132322/1745	23.80	22.18	0.196	-0.010	1.45	0.285	/
Back Side	standard	1:1	50%	50	132322/1745	23.30	21.65	0.306	0.070	1.46	0.447	/
Front Side	standard	1:1	50%	50	132322/1745	23.30	21.65	0.171	0.070	1.46	0.250	/
Back Side	Battery2	1:1	1	50	132322/1745	23.80	22.18	0.338	0.090	1.45	0.491	/
Hotspot SAR(QPSK, Distance 10mm)												
Back Side	standard	1:1	1	50	132072/1720	19.80	18.59	0.211	0.022	1.32	0.279	/
Front Side	standard	1:1	1	50	132072/1720	19.80	18.59	0.175	-0.036	1.32	0.231	/
Left Edge	standard	1:1	1	50	132072/1720	19.80	18.59	0.069	0.190	1.32	0.091	/
Right Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Top Edge	standard	1:1	1	50	132072/1720	19.80	18.59	0.359	0.030	1.32	0.474	/
Bottom Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Back Side	standard	1:1	50%	50	132072/1720	19.80	18.43	0.190	0.090	1.37	0.260	/
Front Side	standard	1:1	50%	50	132072/1720	19.80	18.43	0.139	0.025	1.37	0.191	/
Left Edge	standard	1:1	50%	50	132072/1720	19.80	18.43	0.062	0.030	1.37	0.085	/
Right Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Top Edge	standard	1:1	50%	50	132072/1720	19.80	18.43	0.367	0.100	1.37	0.503	89
Bottom Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Top Edge	Battery2	1:1	1	50	132072/1720	19.80	18.59	0.348	-0.021	1.32	0.460	/
Note: 1.The value with blue color is the maximum SAR Value of each test band.												
2.For QPSK with 100% RB allocation, SAR is required when and the highest reported SAR for 1 RB and 50% RB allocation in are≥ 50% limit(1g).												



MAX Adjusted SAR									
Test Position	Cover Type	RB allocation	Channel/Frequency (MHz)	Full power (dBm)	Tune-up (dBm)	Report SAR1g (mW/g)	Scaling Factor	Full power Report SAR1g (mW/g)	0mm SAR
Back Side	standard	1	132072/1720	23.80	19.80	0.279	2.51	0.700	No
Front Side	standard	1	132072/1720	23.80	19.80	0.231	2.51	0.581	No
Left Edge	standard	1	132072/1720	23.80	19.80	0.091	2.51	0.228	No
Top Edge	standard	1	132072/1720	23.80	19.80	0.474	2.51	1.192	No
Back Side	standard	50%	132072/1720	23.30	19.80	0.260	2.24	0.583	No
Front Side	standard	50%	132072/1720	23.30	19.80	0.191	2.24	0.427	No
Left Edge	standard	50%	132072/1720	23.30	19.80	0.085	2.24	0.190	No
Top Edge	standard	50%	132072/1720	23.30	19.80	0.503	2.24	1.126	No
Note: According to 648474 D04 Handset SAR v01r03, For Phablet, Since hotspot mode 1-g reported SAR < 1.2 W/kg, Product Specific 10-g SAR is not required.									



Table 35: Wi-Fi (2.4G)

Original

Test Position	Cover Type	Mode	Duty Cycle	Channel/ Frequency (MHz)	Tune-up dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
							Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR 1g	
Head SAR											
Left Cheek	standard	802.11b	1:1	11/2462	13.00	11.80	0.123	-0.064	1.32	0.162	/
Left Tilt	standard	802.11b	1:1	11/2462	13.00	11.80	0.035	-0.020	1.32	0.046	/
Right Cheek	standard	802.11b	1:1	11/2462	13.00	11.80	0.029	-0.095	1.32	0.038	/
Right Tilt	standard	802.11b	1:1	11/2462	13.00	11.80	0.012	-0.022	1.32	0.016	/
Left Cheek	Battery2	802.11b	1:1	11/2462	13.00	11.80	0.105	0.026	1.32	0.138	/
Body-worn SAR (Distance 15mm)											
Back Side	standard	802.11b	1:1	1/2412	19.50	18.10	0.069	0.020	1.38	0.095	/
Front Side	standard	802.11b	1:1	1/2412	19.50	18.10	0.094	-0.082	1.38	0.130	/
Front Side	Battery2	802.11b	1:1	1/2412	19.50	18.10	0.073	0.031	1.38	0.101	/
Hotspot SAR(Distance 10mm)											
Back Side	standard	802.11b	1:1	1/2412	19.50	18.10	0.139	0.190	1.38	0.192	/
Front Side	standard	802.11b	1:1	1/2412	19.50	18.10	0.157	0.062	1.38	0.217	/
Left Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Right Edge	standard	802.11b	1:1	1/2412	19.50	18.10	0.341	-0.035	1.38	0.471	/
Top Edge	standard	802.11b	1:1	1/2412	19.50	18.10	0.062	0.011	1.38	0.086	/
Bottom Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Right Edge	Battery2	802.11b	1:1	1/2412	19.50	18.10	0.335	-0.064	1.38	0.462	/
Note: 1. The value with blue color is the maximum SAR Value of each test band.											

MAX Adjusted SAR							
Mode	Test Position	Channel/Frequency (MHz)	MAX Reported SAR _{1g} (W/kg)	802.11b Tune-up limit (dBm)	Tune-up limit (dBm)	Scaling Factor	Adjusted SAR _{1g} (W/kg)
802.11g	Right Edge	1/2412	0.471	19.5	20.0	1.12	0.528
802.11n HT20	Right Edge	1/2412	0.471	19.5	19.0	0.89	0.420
802.11n HT40	Right Edge	1/2412	0.471	19.5	17.0	0.56	0.265
Note: SAR is not required for OFDM when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.							



Variant

Test Position	Cover Type	Mode	Duty Cycle	Channel/ Frequency (MHz)	Tune-up dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
							Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR 1g	
Head SAR											
Left Cheek	standard	802.11b	1:1	11/2462	13.00	11.80	0.161	0.060	1.32	0.212	90
Body-worn SAR (Distance 15mm)											
Front Side	standard	802.11b	1:1	1/2412	19.50	18.10	0.120	-0.035	1.38	0.166	91
Hotspot SAR(Distance 10mm)											
Right Edge	standard	802.11b	1:1	1/2412	19.50	18.10	0.397	-0.170	1.38	0.548	92
Note: 1. The value with blue color is the maximum SAR Value of each test band.											



Table 36: Wi-Fi (5G,U-NII-1)

Original

Test Position	Cover Type	Mode	Duty Cycle	Channel/ Frequency (MHz)	Tune-up dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
							Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR 1g	
Head SAR											
Left Cheek	standard	802.11a	1:1	48/5240	11.00	9.76	0.177	-0.059	1.33	0.235	/
Left Tilt	standard	802.11a	1:1	48/5240	11.00	9.76	0.181	-0.150	1.33	0.241	/
Right Cheek	standard	802.11a	1:1	48/5240	11.00	9.76	0.130	-0.077	1.33	0.173	/
Right Tilt	standard	802.11a	1:1	48/5240	11.00	9.76	0.133	-0.031	1.33	0.177	/
Left Tilt	Battery2	802.11a	1:1	48/5240	11.00	9.76	0.175	0.030	1.33	0.233	/
Body-worn SAR (Distance 15mm)											
Back Side	standard	802.11ac-VHT40	1:1	46/5230	17.00	15.42	0.142	0.021	1.44	0.204	/
Front Side	standard	802.11ac-VHT40	1:1	46/5230	17.00	15.42	0.133	0.031	1.44	0.191	/
Back Side	Battery2	802.11ac-VHT40	1:1	46/5230	17.00	15.42	0.117	0.020	1.44	0.168	/
Hotspot SAR(Distance 10mm)											
Back Side	standard	802.11ac-VHT40	1:1	46/5230	17.00	15.42	0.248	0.028	1.44	0.357	/
Front Side	standard	802.11ac-VHT40	1:1	46/5230	17.00	15.42	0.198	0.011	1.44	0.285	/
Left Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Right Edge	standard	802.11ac-VHT40	1:1	46/5230	17.00	15.42	0.162	0.050	1.44	0.233	/
Top Edge	standard	802.11ac-VHT40	1:1	46/5230	17.00	15.42	0.294	0.013	1.44	0.423	/
Bottom Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Top Edge	Battery2	802.11ac-VHT40		46/5230	17.00	15.42	0.268	-0.052	1.44	0.386	/
Note: 1. The value with blue color is the maximum SAR Value of each test band.											
the highest reported SAR for a test configuration is > 1.2 W/kg, SAR is required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, each band is tested independently for SAR.											
Since the band U-NII-2A does not support hotspot function, hotspot SAR for U-NII-1 is required.											

Variant

Test Position	Cover Type	Mode	Duty Cycle	Channel/ Frequency (MHz)	Tune-up dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
							Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR 1g	
Head SAR											
Left Tilt	standard	802.11a	1:1	48/5240	11.00	9.76	0.207	0.150	1.33	0.275	93
Body-worn SAR (Distance 15mm)											
Back Side	standard	802.11ac-VHT40	1:1	46/5230	17.00	15.42	0.139	-0.041	1.44	0.200	94
Hotspot SAR(Distance 10mm)											
Top Edge	standard	802.11ac-VHT40	1:1	46/5230	17.00	15.42	0.264	0.039	1.44	0.380	95
Note: 1. The value with blue color is the maximum SAR Value of each test band.											

Table 37: Wi-Fi (5G,U-NII-2A)

Per 248227, for band U-NII-1 and U-NII-2A, when the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, each band is tested independently for SAR.

Original

Test Position	Cover Type	Mode	Duty Cycle	Channel/Frequency (MHz)	Tune-up dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
							MeasuredSAR1g	Power Drift (dB)	Scaling Factor	Report SAR 1g	
Head SAR											
Left Cheek	standard	802.11a	1:1	64/5320	11.00	9.54	0.205	-0.035	1.40	0.287	/
Left Tilt	standard	802.11a	1:1	64/5320	11.00	9.54	0.215	0.060	1.40	0.301	/
Right Cheek	standard	802.11a	1:1	64/5320	11.00	9.54	0.117	-0.067	1.40	0.164	/
Right Tilt	standard	802.11a	1:1	64/5320	11.00	9.54	0.139	-0.030	1.40	0.195	/
Left Tilt	Battery2	802.11a	1:1	64/5320	11.00	9.54	0.182	-0.025	1.40	0.255	/
Body-worn SAR (Distance 15mm)											
Back Side	standard	802.11ac-VHT40	1:1	54/5270	17.00	15.53	0.141	-0.020	1.40	0.198	/
Front Side	standard	802.11ac-VHT40	1:1	54/5270	17.00	15.53	0.109	-0.056	1.40	0.153	/
Back Side	Battery2	802.11ac-VHT40	1:1	54/5270	17.00	15.53	0.139	-0.068	1.40	0.195	/
Test Position	Cover Type	Mode	Duty Cycle	Channel/Frequency (MHz)	Tune-up dBm)	Measured power (dBm)	Limit of SAR 4 W/kg (mW/g)				Plot No.
							MeasuredSAR10g	Power Drift (dB)	Scaling Factor	Report SAR 10g	
Product Specific 10-g SAR (Distance 0mm)											
Back Side	standard	802.11ac-VHT40	1:1	54/5270	17.00	15.53	0.370	0.010	1.40	0.519	/
Front Side	standard	802.11ac-VHT40	1:1	54/5270	17.00	15.53	0.531	0.020	1.40	0.745	/
Left Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Right Edge	standard	802.11ac-VHT40	1:1	54/5270	17.00	15.53	0.379	0.022	1.40	0.532	/
Top Edge	standard	802.11ac-VHT40	1:1	54/5270	17.00	15.53	0.721	0.038	1.40	1.011	/
Bottom Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Top Edge	Battery2	802.11ac-VHT40	1:1	54/5270	17.00	15.53	0.582	0.025	1.40	0.816	/
Note: 1. The value with blue color is the maximum SAR Value of each test band.											



Variant

Test Position	Cover Type	Mode	Duty Cycle	Channel/Frequency (MHz)	Tune-up dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No
							Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR 1g	
Head SAR											
Left Tilt	standard	802.11a	1:1	64/5320	11.00	9.54	0.194	0.060	1.40	0.272	96
Body-worn SAR (Distance 15mm)											
Back Side	standard	802.11ac-VHT40	1:1	54/5270	17.00	15.53	0.144	-0.039	1.40	0.202	97
Test Position	Cover Type	Mode	Duty Cycle	Channel/Frequency (MHz)	Tune-up dBm)	Measured power (dBm)	Limit of SAR 4 W/kg (mW/g)				Plot No.
							Measured SAR10g	Power Drift (dB)	Scaling Factor	Report SAR 10g	
Product Specific 10-g SAR (Distance 0mm)											
Top Edge	standard	802.11ac-VHT40	1:1	54/5270	17.00	15.53	2.100	0.076	1.40	0.809	98
Note: 1. The value with blue color is the maximum SAR Value of each test band.											



Table 38: Wi-Fi (5G,U-NII-2C)

Original

Test Position	Cover Type	Mode	Duty Cycle	Channel/ Frequency (MHz)	Tune-up dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
							Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR 1g	
Head SAR											
Left Cheek	standard	802.11a	1:1	140/5700	11.00	9.27	0.233	-0.082	1.49	0.347	/
Left Tilt	standard	802.11a	1:1	140/5700	11.00	9.27	0.240	-0.023	1.49	0.357	/
Right Cheek	standard	802.11a	1:1	140/5700	11.00	9.27	0.156	-0.064	1.49	0.232	/
Right Tilt	standard	802.11a	1:1	140/5700	11.00	9.27	0.173	-0.027	1.49	0.258	/
Left Tilt	Battery2	802.11a	1:1	140/5700	11.00	9.27	0.226	0.010	1.49	0.337	/
Body-worn SAR (Distance 15mm)											
Back Side	standard	802.11ac-VHT40	1:1	110/5550	17.00	15.93	0.157	0.029	1.28	0.201	/
Front Side	standard	802.11ac-VHT40	1:1	110/5550	17.00	15.93	0.112	0.026	1.28	0.143	/
Back Side	Battery2	802.11ac-VHT40	1:1	110/5550	17.00	15.93	0.128	-0.028	1.28	0.164	/
Test Position	Cover Type	Mode	Duty Cycle	Channel/ Frequency (MHz)	Tune-up dBm)	Measured power (dBm)	Limit of SAR 4 W/kg (mW/g)				Plot No.
							Measured SAR10g	Power Drift (dB)	Scaling Factor	Report SAR 10g	
Product Specific 10-g SAR (Distance 0mm)											
Back Side	standard	802.11ac-VHT40	1:1	110/5550	17.00	15.93	0.566	0.025	1.28	0.724	/
Front Side	standard	802.11ac-VHT40	1:1	110/5550	17.00	15.93	0.686	0.039	1.28	0.878	/
Left Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Right Edge	standard	802.11ac-VHT40	1:1	110/5550	17.00	15.93	0.479	0.011	1.28	0.613	/
Top Edge	standard	802.11ac-VHT40	1:1	110/5550	17.00	15.93	0.761	-0.190	1.28	0.974	/
Bottom Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Top Edge	Battery2	802.11ac-VHT40	1:1	110/5550	17.00	15.93	0.613	0.090	1.28	0.784	/
Note: 1. The value with blue color is the maximum SAR Value of each test band.											

Note: 1. The value with blue color is the maximum SAR Value of each test band.



Variant

Test Position	Cover Type	Mode	Duty Cycle	Channel/ Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No
							Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR 1g	
Head SAR											
Left Tilt	standard	802.11a	1:1	140/5700	11.00	9.27	0.284	-0.022	1.49	0.423	99
Body-worn SAR (Distance 15mm)											
Back Side	standard	802.11ac-VHT40	1:1	110/5550	17.00	15.93	0.190	-0.027	1.28	0.243	100
Test Position	Cover Type	Mode	Duty Cycle	Channel/ Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of SAR 4 W/kg (mW/g)				Plot No.
							Measured SAR10g	Power Drift (dB)	Scaling Factor	Report SAR 10g	
Product Specific 10-g SAR (Distance 0mm)											
Top Edge	standard	802.11ac-VHT40	1:1	110/5550	17.00	15.93	0.865	0.111	1.28	1.107	101
Note: 1. The value with blue color is the maximum SAR Value of each test band.											



Table 39: Wi-Fi (5G,U-NII-3)

Original

Test Position	Cover Type	Mode	Duty Cycle	Channel/ Frequency (MHz)	Tune-up dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
							Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR 1g	
Head SAR											
Left Cheek	standard	802.11a	1:1	149/5745	11.00	9.77	0.259	-0.108	1.33	0.344	/
Left Tilt	standard	802.11a	1:1	149/5745	11.00	9.77	0.264	0.080	1.33	0.350	/
Right Cheek	standard	802.11a	1:1	149/5745	11.00	9.77	0.169	-0.150	1.33	0.224	/
Right Tilt	standard	802.11a	1:1	149/5745	11.00	9.77	0.195	0.120	1.33	0.259	/
Left Tilt	Battery2	802.11a	1:1	149/5745	11.00	9.77	0.235	0.030	1.33	0.312	/
Body-worn SAR (Distance 15mm)											
Back Side	standard	802.11a	1:1	149/5745	17.00	16.33	0.196	0.044	1.17	0.229	/
Front Side	standard	802.11a	1:1	149/5745	17.00	16.33	0.116	-0.021	1.17	0.135	/
Back Side	Battery2	802.11a	1:1	149/5745	17.00	16.33	0.148	0.038	1.17	0.173	/
Hotspot SAR(Distance 10mm)											
Back Side	standard	802.11a	1:1	149/5745	17.00	16.33	0.345	0.059	1.17	0.403	/
Front Side	standard	802.11a	1:1	149/5745	17.00	16.33	0.335	0.010	1.17	0.391	/
Left Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Right Edge	standard	802.11a	1:1	149/5745	17.00	16.33	0.381	0.100	1.17	0.445	/
Top Edge	standard	802.11a	1:1	149/5745	17.00	16.33	0.384	0.000	1.17	0.448	/
Bottom Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Top Edge	Battery2	802.11a	1:1	149/5745	17.00	16.33	0.305	-0.100	1.17	0.356	/
Note: 1. The value with blue color is the maximum SAR Value of each test band.											

Variant

Test Position	Cover Type	Mode	Duty Cycle	Channel/ Frequency (MHz)	Tune-up dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
							Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR 1g	
Head SAR											
Left Tilt	standard	802.11a	1:1	149/5745	11.00	9.77	0.280	0.082	1.33	0.372	102
Body-worn SAR (Distance 15mm)											
Back Side	standard	802.11a	1:1	149/5745	17.00	16.33	0.172	0.052	1.17	0.201	103
Hotspot SAR(Distance 10mm)											
Top Edge	standard	802.11a	1:1	149/5745	17.00	16.33	0.347	-0.039	1.17	0.405	104
Note: 1. The value with blue color is the maximum SAR Value of each test band.											



Table 40: BT
Original

Test Position	Cover Type	Mode	Duty Cycle	Channel/ Frequency (MHz)	Tune-up dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
							Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR 1g	
Head SAR											
Left Cheek	standard	GFSK	76.0%	39/2441	12.50	10.84	0.068	-0.098	1.93	0.131	/
Left Tilt	standard	GFSK	76.0%	39/2441	12.50	10.84	0.018	-0.110	1.93	0.034	/
Right Cheek	standard	GFSK	76.0%	39/2441	12.50	10.84	0.024	-0.095	1.93	0.047	/
Right Tilt	standard	GFSK	76.0%	39/2441	12.50	10.84	0.008	-0.120	1.93	0.015	/
Left Cheek	standard	GFSK	76.0%	39/2441	12.50	10.84	0.043	0.022	1.93	0.083	/
Body SAR(Distance 10mm)											
Back Side	standard	GFSK	76.0%	39/2441	12.50	10.84	0.016	-0.092	1.93	0.032	/
Front Side	standard	GFSK	76.0%	39/2441	12.50	10.84	0.017	-0.056	1.93	0.033	/
Left Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Right Edge	standard	GFSK	76.0%	39/2441	12.50	10.84	0.018	0.115	1.93	0.035	/
Top Edge	standard	GFSK	76.0%	39/2441	12.50	10.84	0.006	-0.036	1.93	0.011	/
Bottom Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Right Edge	Battery2	GFSK	76.0%	39/2441	12.50	10.84	0.015	0.030	1.93	0.029	/
Note: 1. The value with blue color is the maximum SAR Value of each test band.											

Variant

Test Position	Cover Type	Mode	Duty Cycle	Channel/ Frequency (MHz)	Tune-up dBm)	Measured power (dBm)	Limit of SAR 1.6 W/kg (mW/g)				Plot No.
							Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR 1g	
Head SAR											
Left Cheek	standard	GFSK	76.0%	39/2441	12.50	10.84	0.085	0.140	1.93	0.164	105
Body SAR(Distance 10mm)											
Right Edge	standard	GFSK	76.0%	39/2441	12.50	10.84	0.011	-0.056	1.93	0.021	106
Note: 1. The value with blue color is the maximum SAR Value of each test band.											

10.3 Simultaneous Transmission Analysis

NO.	Simultaneous Tx Combination	Head	Body-worn	Hotspot
1	GSM Voice(Ant 1) + BT	N/A	Yes	N/A
2	GSM DATA(Ant 1) + BT	N/A	Yes	N/A
3	GSM Voice(Ant 3) + BT	N/A	Yes	N/A
4	GSM DATA (Ant 3)+ BT	N/A	Yes	N/A
5	GSM Voice(Ant 1) +WiFi2.4G (Ant 7)	Yes	Yes	N/A
6	GSM DATA(Ant 1) +WiFi 2.4G (Ant 7)	N/A	Yes	Yes
7	GSM Voice(Ant 3) + Wi-Fi 2.4G (Ant 7)	Yes	Yes	N/A
8	GSM DATA(Ant 3) + Wi-Fi 2.4G (Ant 7)	N/A	Yes	Yes
9	UMTS Voice(Ant 2) + BT	N/A	Yes	N/A
10	UMTS Data(Ant 2) + BT	N/A	Yes	N/A
11	UMTS Voice(Ant 4) + BT	N/A	Yes	N/A
12	UMTS Data(Ant 4) + BT	N/A	Yes	N/A
13	UMTS Voice(Ant 2) + Wi-Fi 2.4G (Ant 7)	Yes	Yes	N/A
14	UMTS Data (Ant 2) + Wi-Fi 2.4G (Ant 7)	N/A	Yes	Yes
15	UMTS Voice (Ant 4) + Wi-Fi 2.4G (Ant 7)	Yes	Yes	N/A
16	UMTS Data (Ant 4)+ Wi-Fi 2.4G (Ant 7)	N/A	Yes	Yes
17	LTE (Ant 2) + Wi-Fi 2.4G (Ant 7)	Yes	Yes	Yes
18	LTE(Ant 2) + BT	N/A	Yes	N/A
19	LTE (Ant 4 or ANT10) + Wi-Fi 2.4G (Ant 7)	Yes	Yes	Yes
20	LTE (Ant 4 or ANT10) + BT	N/A	Yes	N/A
21	GSM Voice(Ant 1) + Wi-Fi5G	Yes	Yes	N/A
22	GSM DATA(Ant 1) +Wi-Fi5G	N/A	Yes	Yes
23	GSM Voice(Ant 3) + Wi-Fi5G	Yes	Yes	N/A
24	GSM DATA(Ant 3) + Wi-Fi5G	N/A	Yes	Yes
25	UMTS Voice(Ant 2) + Wi-Fi5G	Yes	Yes	N/A
26	UMTS Data (Ant 2) + Wi-Fi5G	N/A	Yes	Yes
27	UMTS Voice (Ant 4) + Wi-Fi5G	Yes	Yes	N/A
28	UMTS Data (Ant 4)+ Wi-Fi5G	N/A	Yes	Yes
29	LTE (Ant 2) + Wi-Fi5G	Yes	Yes	Yes
30	LTE (Ant 4 or ANT10) + Wi-Fi5G	Yes	Yes	Yes

General Note:

- The Scaled SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D01, simultaneous transmission SAR is compliant if,
 - Scalar SAR summation < 1.6W/kg, simultaneously transmission SAR measurement is not necessary.
 - $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.

The maximum SAR_{1g} Value for Main-Antenna

SAR _{1g} (W/kg)		GSM	GSM	WCD	WCD	WCD	LTE	LTE	LTE	LTE	LTE	LTE	LTE	LTE	MAX.
Test Position		850	1900	MA	MA	MA	FDD	FDD	FDD	FDD	FDD	TDD	TDD	FDD	SAR _{1g}
				Band	Band	Band	2	4	5	7	12	38	41	66	
				II	IV	V									
Left Cheek		0.201	0.093	0.153	0.172	0.045	0.151	0.172	0.233	0.134	0.090	0.137	0.147	0.119	0.233
Left Tilt		0.105	0.043	0.074	0.115	0.046	0.062	0.115	0.125	0.038	0.042	0.035	0.053	0.081	0.125
Right Cheek		0.196	0.063	0.135	0.178	0.093	0.151	0.170	0.255	0.094	0.095	0.063	0.084	0.140	0.255
Right Tilt		0.118	0.038	0.068	0.102	0.130	0.076	0.099	0.143	0.054	0.050	0.064	0.075	0.067	0.143
Body worn	Back Side	0.207	0.108	0.406	0.389	0.254	0.276	0.409	0.255	0.326	0.143	0.242	0.205	0.294	0.409
	Front Side	0.164	0.088	0.234	0.240	0.164	0.204	0.239	0.197	0.253	0.112	0.138	0.128	0.233	0.253
Hotspot	Back Side	0.418	0.237	0.619	0.553	0.444	0.505	0.554	0.441	0.570	0.203	0.482	0.478	0.533	0.619
	Front Side	0.241	0.201	0.443	0.542	0.293	0.397	0.478	0.347	0.506	0.151	0.377	0.333	0.432	0.542
	Left Edge	0.081	0.068	0.153	0.168	0.089	0.180	0.206	0.149	0.079	0.082	0.058	0.101	0.221	0.221
	Right Edge	0.303	0.016	0.060	0.091	0.261	0.060	0.107	0.300	0.054	0.225	0.042	0.038	0.140	0.303
	Top Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	Bottom Edge	0.130	0.388	0.666	0.698	0.147	0.692	0.851	0.185	0.650	0.048	0.590	0.369	0.797	0.851

The maximum SAR_{1g} Value for Second-Antenna

SAR _{1g} (W/kg)		GSM	GSM	WCD	WCD	WCD	LTE	LTE	LTE	LTE	LTE	LTE	LTE	LTE	MAX.
Test Position		850	1900	MA	MA	MA	FDD	FDD	FDD	FDD	FDD	TDD	TDD	FDD	SAR _{1g}
				Band	Band	Band	2	4	5	7	12	38	41	66	
				II	IV	V									
Left Cheek		0.540	0.597	0.777	0.500	0.646	0.592	0.444	0.669	0.171	0.642	0.300	0.208	0.523	0.777
Left Tilt		0.079	0.755	1.036	0.755	0.080	0.761	0.613	0.109	0.109	0.097	0.154	0.163	0.697	1.036
Right Cheek		0.245	0.674	0.952	0.859	0.355	0.642	0.617	0.420	0.584	0.398	0.725	0.758	0.699	0.952
Right Tilt		0.063	0.736	1.011	0.992	0.070	0.847	0.749	0.086	0.288	0.086	0.332	0.388	0.766	1.011
Body worn	Back Side	0.126	0.220	0.453	0.424	0.211	0.252	0.408	0.216	0.259	0.216	0.313	0.349	0.507	0.507
	Front Side	0.171	0.115	0.261	0.229	0.196	0.214	0.308	0.193	0.160	0.207	0.227	0.224	0.285	0.308
Hotspot	Back Side	0.227	0.212	0.296	0.222	0.300	0.225	0.187	0.332	0.197	0.260	0.263	0.188	0.279	0.332
	Front Side	0.237	0.168	0.234	0.156	0.290	0.190	0.154	0.336	0.158	0.219	0.215	0.105	0.231	0.336
	Left Edge	0.412	0.073	0.115	0.086	0.496	0.086	0.067	0.582	0.320	0.378	0.475	0.399	0.091	0.582
	Right Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	Top Edge	0.025	0.405	0.673	0.498	0.016	0.416	0.323	0.033	0.068	0.028	0.049	0.036	0.503	0.673
	Bottom Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

About BT and Main- Antenna

SAR _{1g} (W/kg)		Main-antenna	BT	MAX. Σ SAR _{1g}
Test Position				
Head	Left, Cheek	0.233	0.164	0.397
	Left, Tilt	0.125	0.034	0.159
	Right, Cheek	0.255	0.047	0.302
	Right, Tilt	0.143	0.015	0.158
Body worn	Back Side	0.409	0.032	0.441
	Front Side	0.253	0.033	0.286
Hotspot	Back Side	0.619	0.032	0.651
	Front Side	0.542	0.033	0.575
	Left Edge	0.221	NA	0.221
	Right Edge	0.303	0.035	0.338
	Top Edge	N/A	0.011	0.011
	Bottom Edge	0.851	NA	0.851
Note: 1.The value with blue color is the maximum Σ SAR _{1g} Value. 2.MAX. Σ SAR _{1g} =Unlicensed SAR _{MAX} +Licensed SAR _{MAX}				

MAX. Σ SAR_{1g} =0.851W/kg<1.6W/kg, so the Simultaneous transimition SAR with volum scan are not required for BT and Main-Antenna.

About BT and Second-Antenna

SAR _{1g} (W/kg)		Second-Antenna	BT	MAX. Σ SAR _{1g}
Test Position				
Head	Left, Cheek	0.777	0.164	0.941
	Left, Tilt	1.036	0.034	1.070
	Right, Cheek	0.952	0.047	0.999
	Right, Tilt	1.011	0.015	1.026
Body worn	Back Side	0.507	0.032	0.539
	Front Side	0.308	0.033	0.341
Hotspot	Back Side	0.332	0.032	0.364
	Front Side	0.336	0.033	0.369
	Left Edge	0.582	NA	0.582
	Right Edge	N/A	0.035	0.035
	Top Edge	0.673	0.011	0.684
	Bottom Edge	N/A	NA	NA
Note: 1.The value with blue color is the maximum Σ SAR _{1g} Value. 2.MAX. Σ SAR _{1g} =Unlicensed SAR _{MAX} +Licensed SAR _{MAX}				

MAX. Σ SAR_{1g} =1.070W/kg<1.6W/kg, so the Simultaneous transimition SAR with volum scan are not required for BT and Second-Antenna.

About Wi-Fi 2.4G and Main-Antenna

SAR _{1g} (W/kg)		Main-antenna	Wi-Fi 2.4G	MAX. Σ SAR _{1g}
Test Position				
Head	Left, Cheek	0.233	0.212	0.445
	Left, Tilt	0.125	0.046	0.171
	Right, Cheek	0.255	0.038	0.293
	Right, Tilt	0.143	0.016	0.159
Body worn	Back Side	0.409	0.095	0.504
	Front Side	0.253	0.166	0.419
Hotspot	Back Side	0.619	0.192	0.811
	Front Side	0.542	0.217	0.759
	Left Edge	0.221	N/A	0.221
	Right Edge	0.303	0.548	0.851
	Top Edge	N/A	0.086	0.086
	Bottom Edge	0.851	N/A	0.851

Note: 1.The value with blue color is the maximum Σ SAR_{1g} Value.
2.MAX. Σ SAR_{1g} =Unlicensed SAR_{MAX} +Licensed SAR_{MAX}

MAX. Σ SAR_{1g} = 0.851W/kg<1.6W/kg, so the Simultaneous transimition SAR with volum scan are not required for Wi-Fi 2.4G and Main-Antenna.

About Wi-Fi 2.4G and Second- Antenna

SAR _{1g} (W/kg)		Second- Antenna	Wi-Fi 2.4G	MAX. Σ SAR _{1g}
Test Position				
Head	Left, Cheek	0.777	0.212	0.989
	Left, Tilt	1.036	0.046	1.082
	Right, Cheek	0.952	0.038	0.990
	Right, Tilt	1.011	0.016	1.027
Body worn	Back Side	0.507	0.095	0.602
	Front Side	0.308	0.166	0.474
Hotspot	Back Side	0.332	0.192	0.524
	Front Side	0.336	0.217	0.553
	Left Edge	0.582	N/A	0.582
	Right Edge	N/A	0.548	0.548
	Top Edge	0.673	0.086	0.759
	Bottom Edge	N/A	N/A	N/A

Note: 1.The value with blue color is the maximum Σ SAR_{1g} Value.
2.MAX. Σ SAR_{1g} =Unlicensed SAR_{MAX} +Licensed SAR_{MAX}

MAX. Σ SAR_{1g} = 1.082W/kg<1.6W/kg, so the Simultaneous transimition SAR with volum scan are not required for Wi-Fi 2.4G and Second-Antenna.



About Wi-Fi 5G and Main-Antenna

SAR _{1g/10g} (W/kg)		Main- antenna	Wi-Fi (U-NII-1)	Wi-Fi (U-NII-2A)	Wi-Fi (U-NII-2C)	Wi-Fi (U-NII-3)	MAX. ΣSAR _{1g/10g}
Test Position							
Head	Left, Cheek	0.233	0.235	0.287	0.347	0.344	0.580
	Left, Tilt	0.125	0.275	0.301	0.423	0.372	0.548
	Right, Cheek	0.255	0.173	0.164	0.232	0.224	0.487
	Right, Tilt	0.143	0.177	0.195	0.258	0.259	0.402
Body worn	Back Side	0.409	0.204	0.202	0.243	0.229	0.652
	Front Side	0.253	0.191	0.153	0.143	0.135	0.444
Hotspot	Back Side	0.619	0.357	N/A	N/A	0.403	1.022
	Front Side	0.542	0.285	N/A	N/A	0.391	0.933
	Left Edge	0.221	N/A	N/A	N/A	N/A	0.221
	Right Edge	0.303	0.233	N/A	N/A	0.445	0.748
	Top Edge	N/A	0.423	N/A	N/A	0.448	0.448
	Bottom Edge	0.851	N/A	N/A	N/A	N/A	0.851
Product Specific 10-g SAR	Back Side	N/A	N/A	0.519	0.724	N/A	0.724
	Front Side	N/A	N/A	0.745	0.878	N/A	0.878
	Left Edge	N/A	N/A	N/A	N/A	N/A	N/A
	Right Edge	N/A	N/A	0.532	0.613	N/A	0.613
	Top Edge	N/A	N/A	1.011	1.107	N/A	1.107
	Bottom Edge	N/A	N/A	N/A	N/A	N/A	N/A

Note: 1. The value with blue color is the maximum ΣSAR_{1g/10g} Value.
2. MAX. ΣSAR_{1g/10g} = Unlicensed SAR_{MAX} + Licensed SAR_{MAX}

MAX. ΣSAR_{1g} = 1.022W/kg < 1.6W/kg and MAX. ΣSAR_{10g} = 1.107W/kg < 4 W/kg, so the Simultaneous transimition SAR with volum scan are not required for Wi-Fi 5G and Main-Antenna.



About Wi-Fi 5G and Second- Antenna

SAR _{1g/10g} (W/kg) Test Position		Second-an tenna	Wi-Fi (U-NII-1)	Wi-Fi (U-NII-2A)	Wi-Fi (U-NII-2C)	Wi-Fi (U-NII-3)	MAX. ΣSAR _{1g/10g}
Head	Left, Cheek	0.777	0.235	0.287	0.347	0.344	1.124
	Left, Tilt	1.036	0.275	0.301	0.423	0.372	1.459
	Right, Cheek	0.952	0.173	0.164	0.232	0.224	1.184
	Right, Tilt	1.011	0.177	0.195	0.258	0.259	1.270
Body worn	Back Side	0.507	0.204	0.202	0.243	0.229	0.750
	Front Side	0.308	0.191	0.153	0.143	0.135	0.499
Hotspot	Back Side	0.332	0.357	N/A	N/A	0.403	0.735
	Front Side	0.336	0.285	N/A	N/A	0.391	0.727
	Left Edge	0.582	N/A	N/A	N/A	N/A	0.582
	Right Edge	N/A	0.233	N/A	N/A	0.445	0.445
	Top Edge	0.673	0.423	N/A	N/A	0.448	1.121
	Bottom Edge	N/A	N/A	N/A	N/A	N/A	N/A
Product Specific 10-g SAR	Back Side	N/A	N/A	0.519	0.724	N/A	0.724
	Front Side	N/A	N/A	0.745	0.878	N/A	0.878
	Left Edge	N/A	N/A	N/A	N/A	N/A	N/A
	Right Edge	N/A	N/A	0.532	0.613	N/A	0.613
	Top Edge	N/A	N/A	1.011	1.107	N/A	1.107
	Bottom Edge	N/A	N/A	N/A	N/A	N/A	N/A

Note: 1.The value with blue color is the maximum ΣSAR_{1g/10g} Value.
2.MAX. ΣSAR_{1g/10g} =Unlicensed SAR_{MAX} +Licensed SAR_{MAX}

MAX. ΣSAR_{1g} = 1.459W/kg<1.6W/kg and MAX. ΣSAR_{10g} = 1.107W/kg<4 W/kg, so the Simultaneous transimition SAR with volum scan are not required for Wi-Fi 5G and Second-Antenna.

Conclusion:

According to the KDB 690783 D01 section 1) d) i), when the sum of 1-g SAR applies for simultaneous transmission SAR test exclusion, the highest sum of 1-g SAR according to the highest reported stand-alone SAR values is used, and the highest Reported SAR for simultaneous transmission exposure conditions is 1.46 W/kg



11 Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528- 2013 is not required in SAR reports submitted for equipment approval. This also applies to the 10-g SAR required for phablets in KDB Publication 648474.

ANNEX A: Test Layout




Tissue Simulating Liquids

For the measurement of the field distribution inside the flat phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For Head and Body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Picture 3 and Picture 4.



Picture 3: liquid depth in the head Phantom

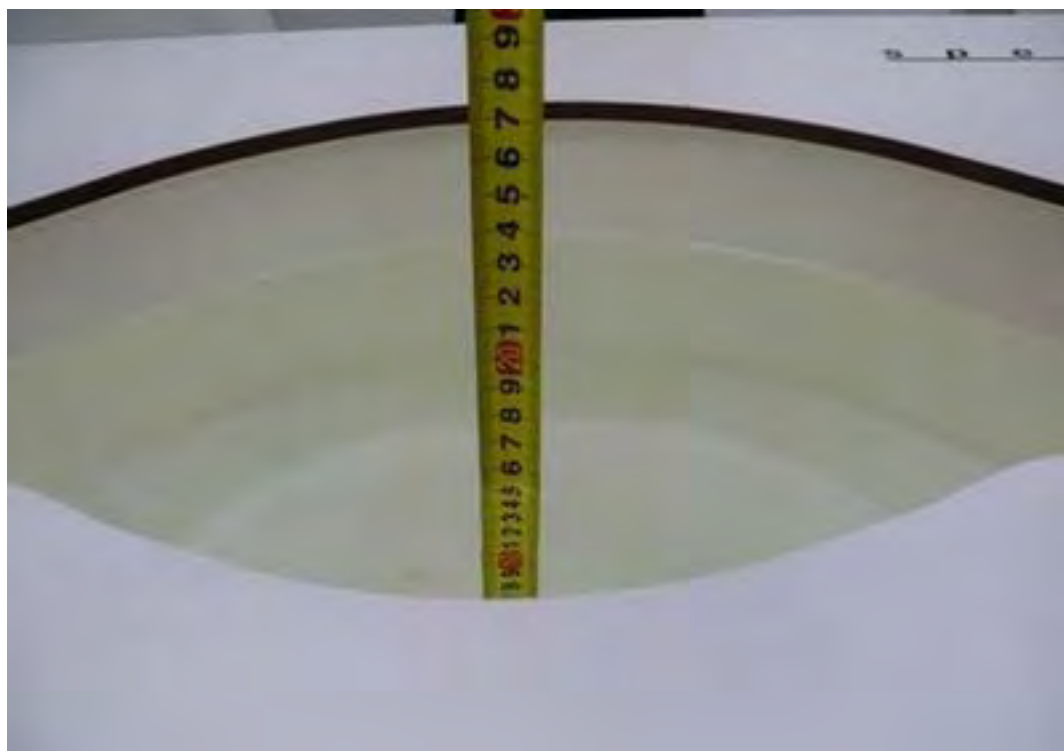

Picture 4: Liquid depth in the flat Phantom

ANNEX B: System Check Results

Plot 1 System Performance Check at 750 MHz TSL

DUT: Dipole 750 MHz; Type: D750V3; Serial: 4d020

Date: 11/12/2020

Communication System: CW (0); Frequency: 750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.92 \text{ S/m}$; $\epsilon_r = 41.5$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.78, 9.78, 9.78); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

d=15mm, Pin=250mW/Area Scan (4x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.31 W/kg


d=15mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 50.557 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 3.14 W/kg

SAR(1 g) = 2.10 W/kg; SAR(10 g) = 1.37 W/kg

Maximum value of SAR (measured) = 2.264 W/kg

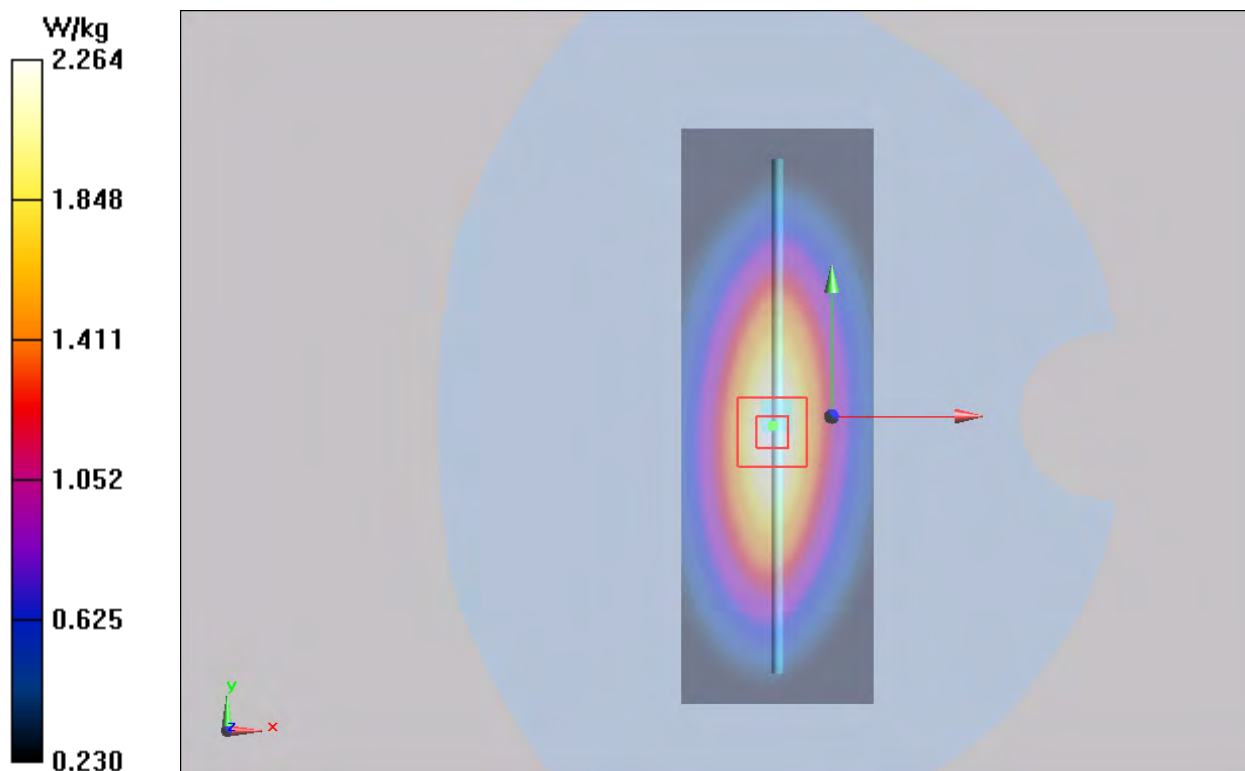

Plot 2 System Performance Check at 835 MHz TSL

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d020

Date: 10/27/2020

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.93 \text{ S/m}$; $\epsilon_r = 41.7$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.3°C

Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.38, 9.38, 9.38); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

d=15mm, Pin=250mW/Area Scan (4x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.64 mW/g


d=15mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 54.4 V/m; Power Drift = -0.076 dB

Peak SAR (extrapolated) = 3.67 W/kg

SAR(1 g) = 2.45 mW/g; SAR(10 g) = 1.6 mW/g

Maximum value of SAR (measured) = 2.64 mW/g

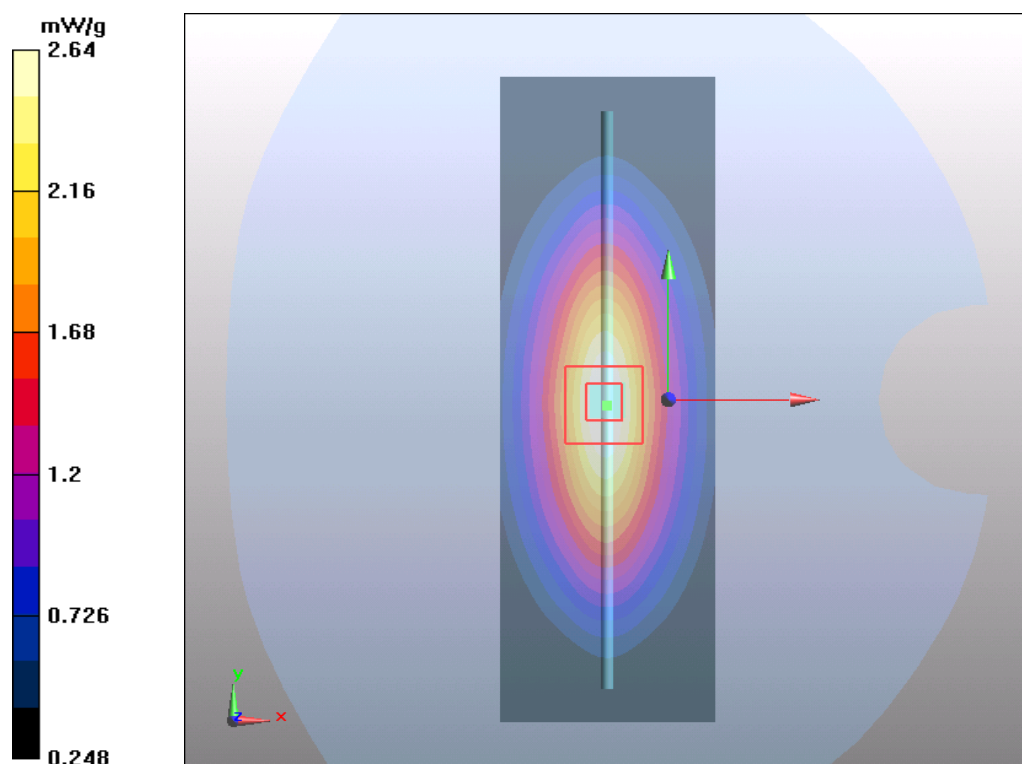

Plot 3 System Performance Check at 1750 MHz TSL

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1033

Date: 9/28/2020

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.25, 8.25, 8.25); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

d=10mm, Pin=250mW/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 9.78 mW/g


d=10mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 80 V/m; Power Drift = 0.075 dB

Peak SAR (extrapolated) = 15.5 W/kg

SAR(1 g) = 8.96 mW/g; SAR(10 g) = 4.5 mW/g

Maximum value of SAR (measured) = 9.46 mW/g

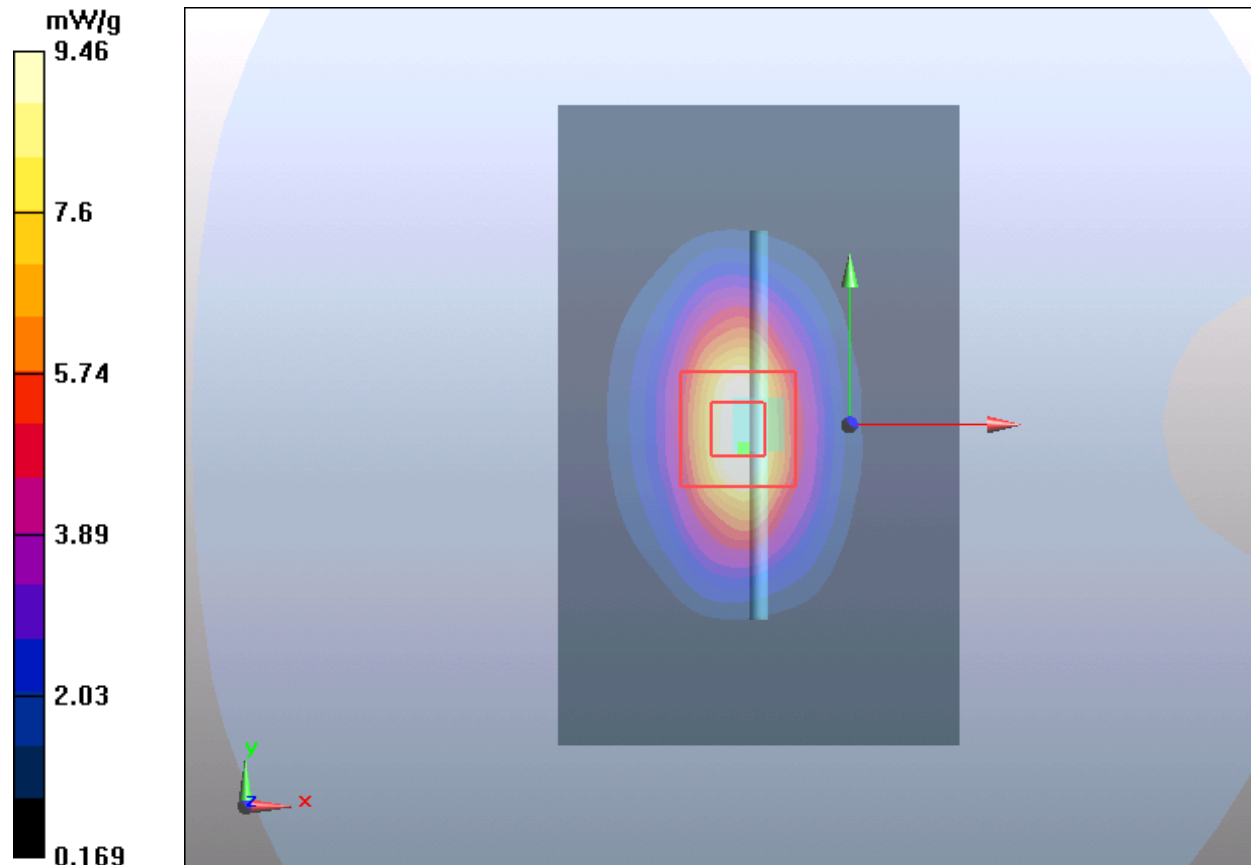

Plot 4 System Performance Check at 1750 MHz TSL

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1033

Date: 9/29/2020

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C

Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.25, 8.25, 8.25); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

d=10mm, Pin=250mW/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 9.77 mW/g


d=10mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 80 V/m; Power Drift = 0.055 dB

Peak SAR (extrapolated) = 15.51 W/kg

SAR(1 g) = 9.20 mW/g; SAR(10 g) = 4.77 mW/g

Maximum value of SAR (measured) = 9.87 mW/g

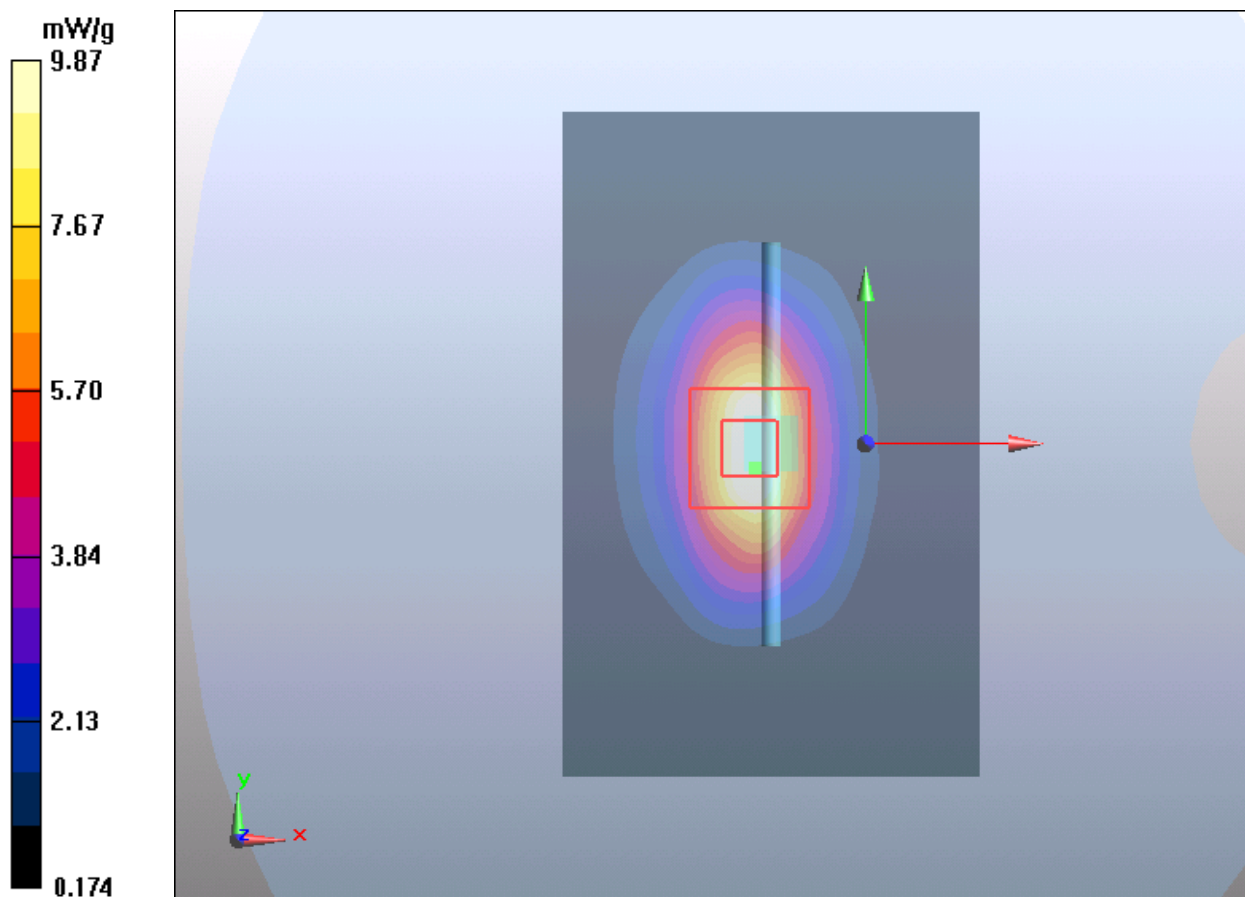

Plot 5 System Performance Check at 1900 MHz TSL

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d060

Date: 10/27/2020

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.40$ S/m; $\epsilon_r = 38.9$ $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C

Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.90, 7.90, 7.90); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

d=10mm, Pin=250mW/Area Scan (4x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 11.3 mW/g


d=10mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 85.5 V/m; Power Drift = 0.028 dB

Peak SAR (extrapolated) = 17.8 W/kg

SAR(1 g) = 9.85 mW/g; SAR(10 g) = 4.9 mW/g

Maximum value of SAR (measured) = 10.7 mW/g

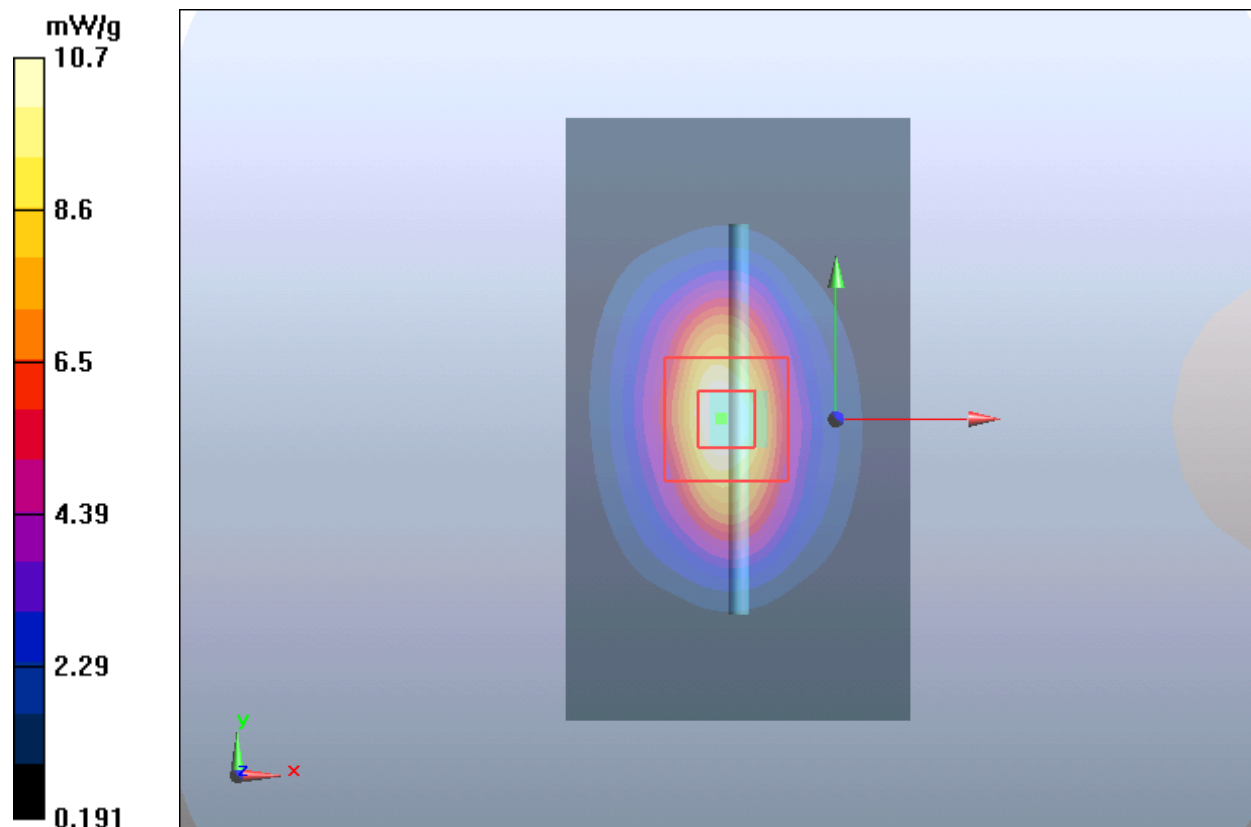

Plot 6 System Performance Check at 2450 MHz TSL

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 786

Date: 9/10/2020

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.77$ S/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C

Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.54, 7.54, 7.54); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

d=10mm, Pin=250mW/Area Scan (4x7x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 18.2 mW/g


d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 88.8 V/m; Power Drift = 0.075 dB

Peak SAR (extrapolated) = 30 W/kg

SAR(1 g) = 13.77 mW/g; SAR(10 g) = 6.22 mW/g

Maximum value of SAR (measured) = 15.9 mW/g

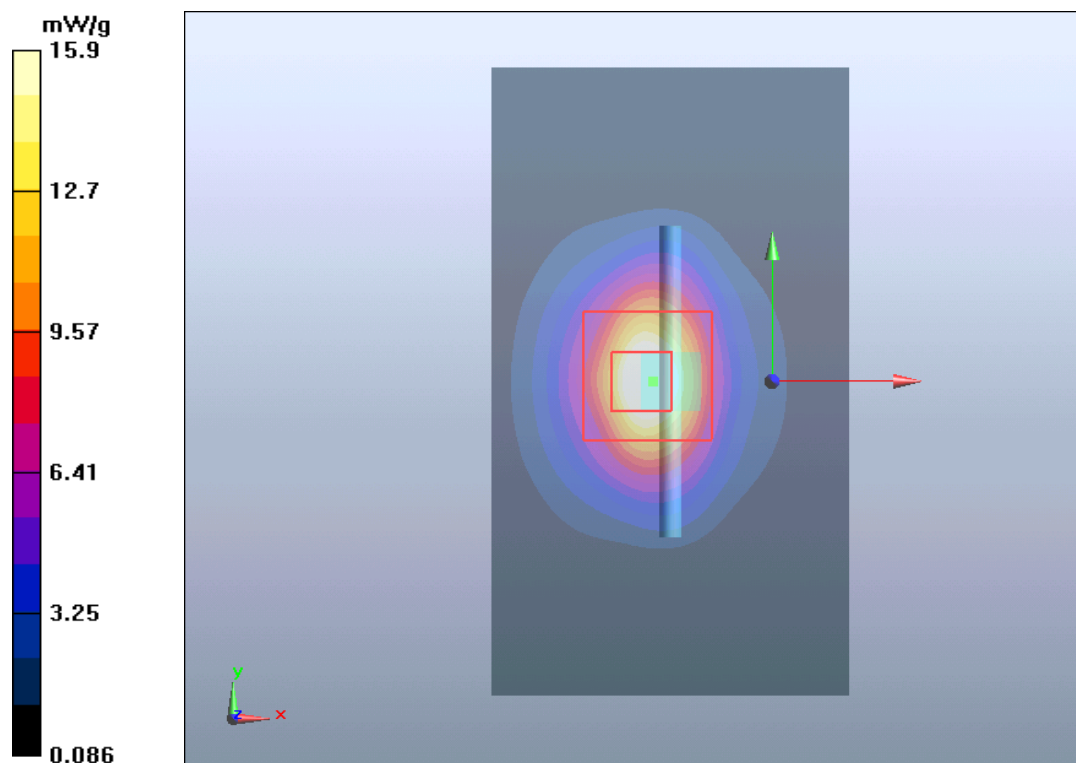

Plot 7 System Performance Check at 2600 MHz TSL

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1025

Date: 11/10/2020

Communication System: CW; Frequency: 2600 MHz

Medium parameters used: $f = 2600$ MHz; $\sigma = 1.92$ S/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.26, 7.26, 7.26); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

d=10mm, Pin=250mW/Area Scan (4x7x1): Measurement grid:dx=12mm, dy=12mm

Maximum value of SAR (measured) = 17.439 mW/g


d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 87.998 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 31.858 W/kg

SAR(1 g) = 13.89 mW/g; SAR(10 g) = 6.07 mW/g

Maximum value of SAR (measured) = 15.617 mW/g

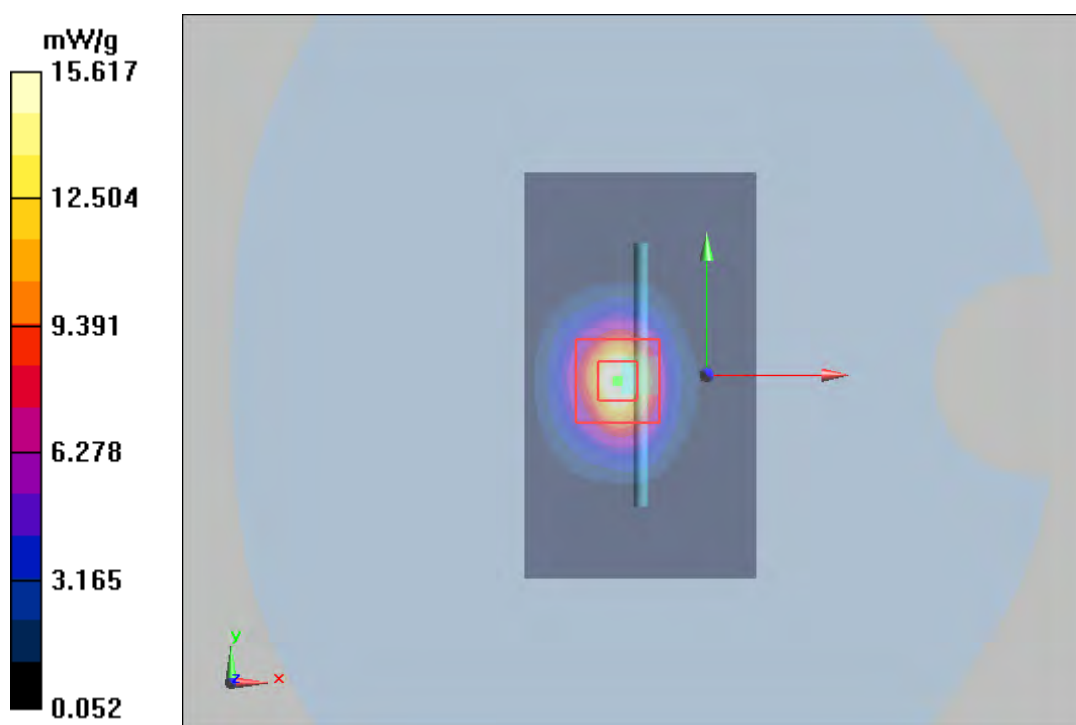

Plot 8 System Performance Check at 2600 MHz TSL

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1025

Date: 11/11/2020

Communication System: CW; Frequency: 2600 MHz

Medium parameters used: $f = 2600$ MHz; $\sigma = 1.93$ S/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.26, 7.26, 7.26); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

d=10mm, Pin=250mW/Area Scan (4x7x1): Measurement grid:dx=12mm, dy=12mm

Maximum value of SAR (measured) = 17.59 mW/g


d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 87.998 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 31.858 W/kg

SAR(1 g) = 13.91 mW/g; SAR(10 g) = 6.09 mW/g

Maximum value of SAR (measured) = 15.66 mW/g

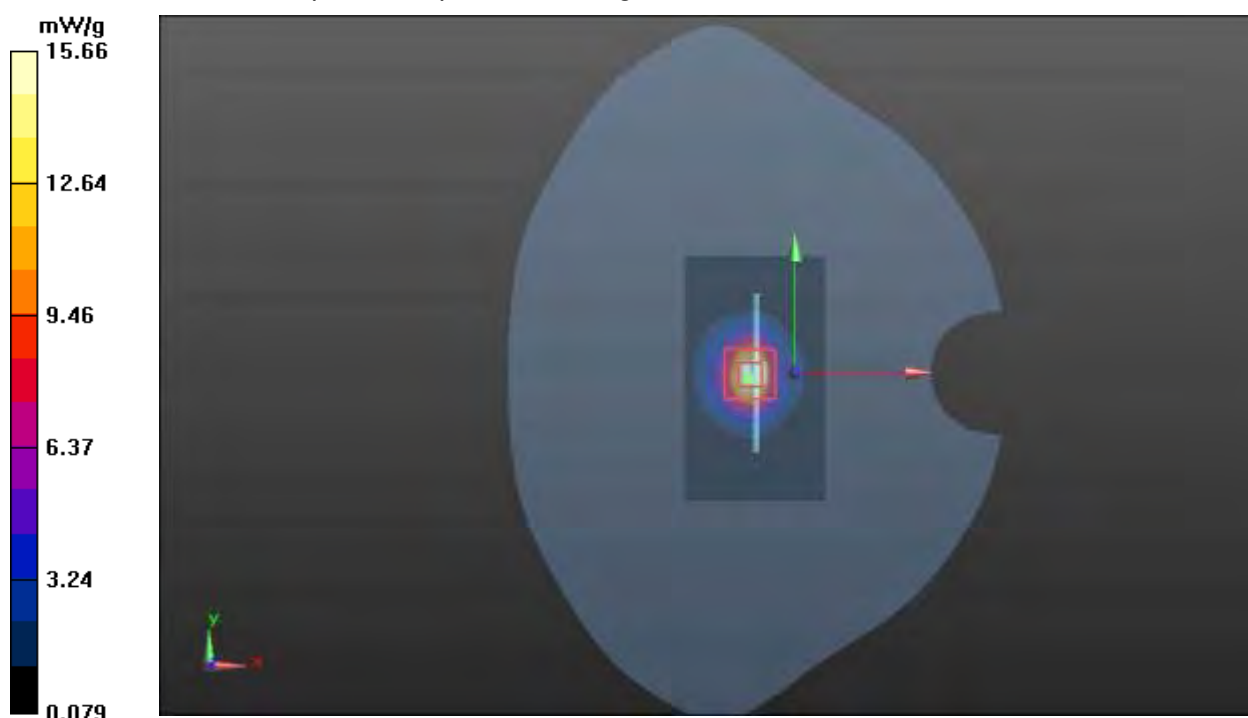

Plot 9 System Performance Check at 5250 MHz TSL

DUT: Dipole 5250 MHz; Type: D5GHzV2; Serial: 1151

Date: 9/10/2020

Communication System: CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5250$ MHz; $\sigma = 4.78$ S/m; $\epsilon_r = 35.5$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(5.55, 5.55, 5.55); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

d=10mm, Pin=100mW/Area Scan (6x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 9.14 mW/g


d=10mm, Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 33.6 V/m; Power Drift = -0.095 dB

Peak SAR (extrapolated) = 52.2 W/kg

SAR(1 g) = 7.79 mW/g; SAR(10 g) = 2.25 mW/g

Maximum value of SAR (measured) = 9.73 mW/g

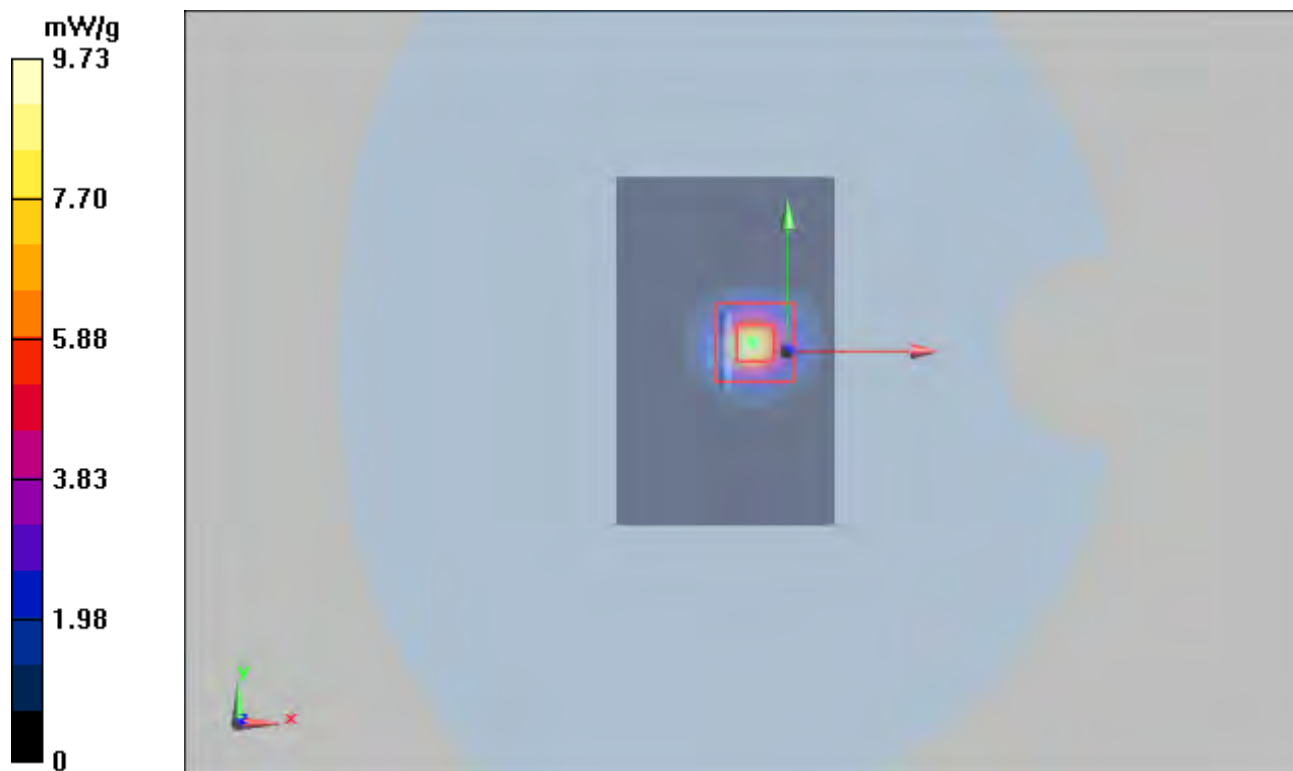

Plot 10 System Performance Check at 5600 MHz TSL

DUT: Dipole 5600 MHz; Type: D5GHzV2; Serial: 1151

Date: 9/10/2020

Communication System: CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.02$ S/m; $\epsilon_r = 35.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(4.97, 4.97, 4.97); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

d=10mm, Pin=100mW/Area Scan (6x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 8.25 mW/g


d=10mm, Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 23.1 V/m; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 22.9 W/kg

SAR(1 g) = 7.68 mW/g; SAR(10 g) = 2.27 mW/g

Maximum value of SAR (measured) = 8.67 mW/g

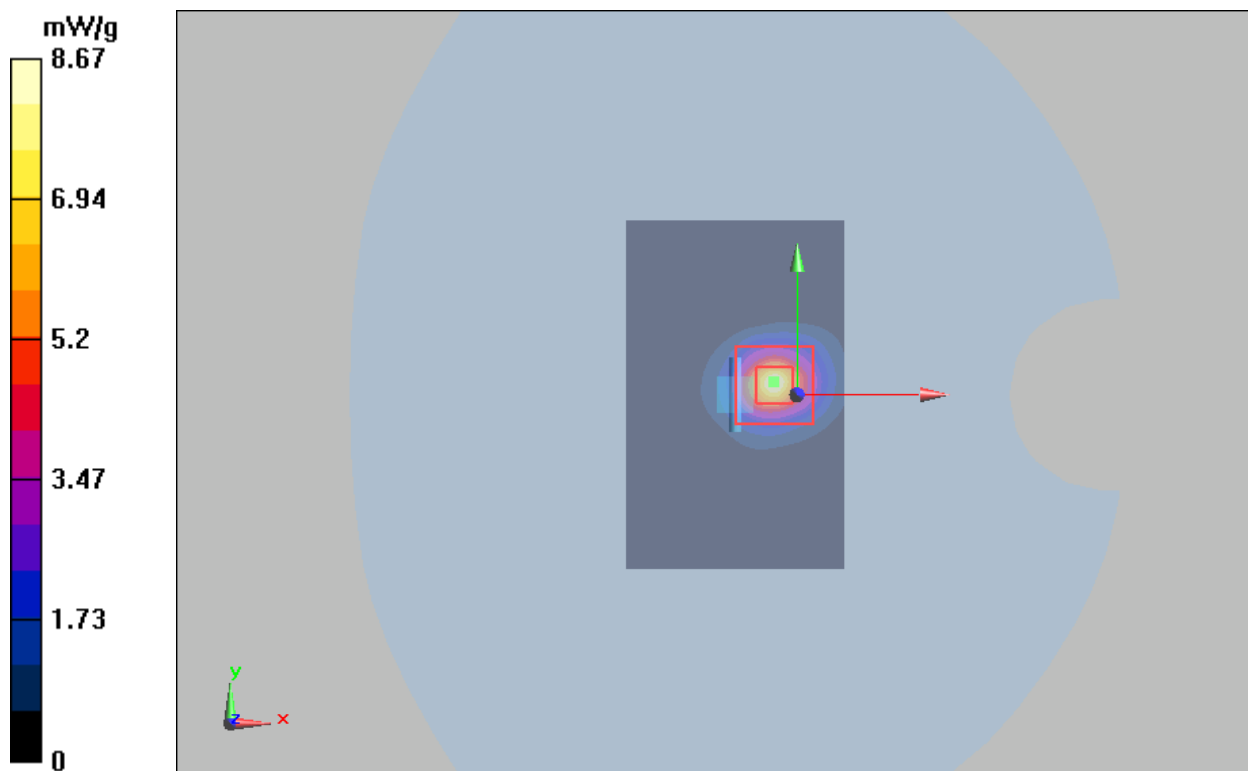

Plot 11 System Performance Check at 5750 MHz TSL

DUT: Dipole 5750 MHz; Type: D5GHzV2; Serial: 1151

Date: 9/10/2020

Communication System: CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5750$ MHz; $\sigma = 5.23$ S/m; $\epsilon_r = 35.1$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(5.00, 5.00, 5.00); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

d=10mm, Pin=100mW/Area Scan (6x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 8.31 mW/g


d=10mm, Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 23.1 V/m; Power Drift = 0.044 dB

Peak SAR (extrapolated) = 23.4 W/kg

SAR(1 g) = 7.64 mW/g; SAR(10 g) = 2.27 mW/g

Maximum value of SAR (measured) = 8.976 mW/g

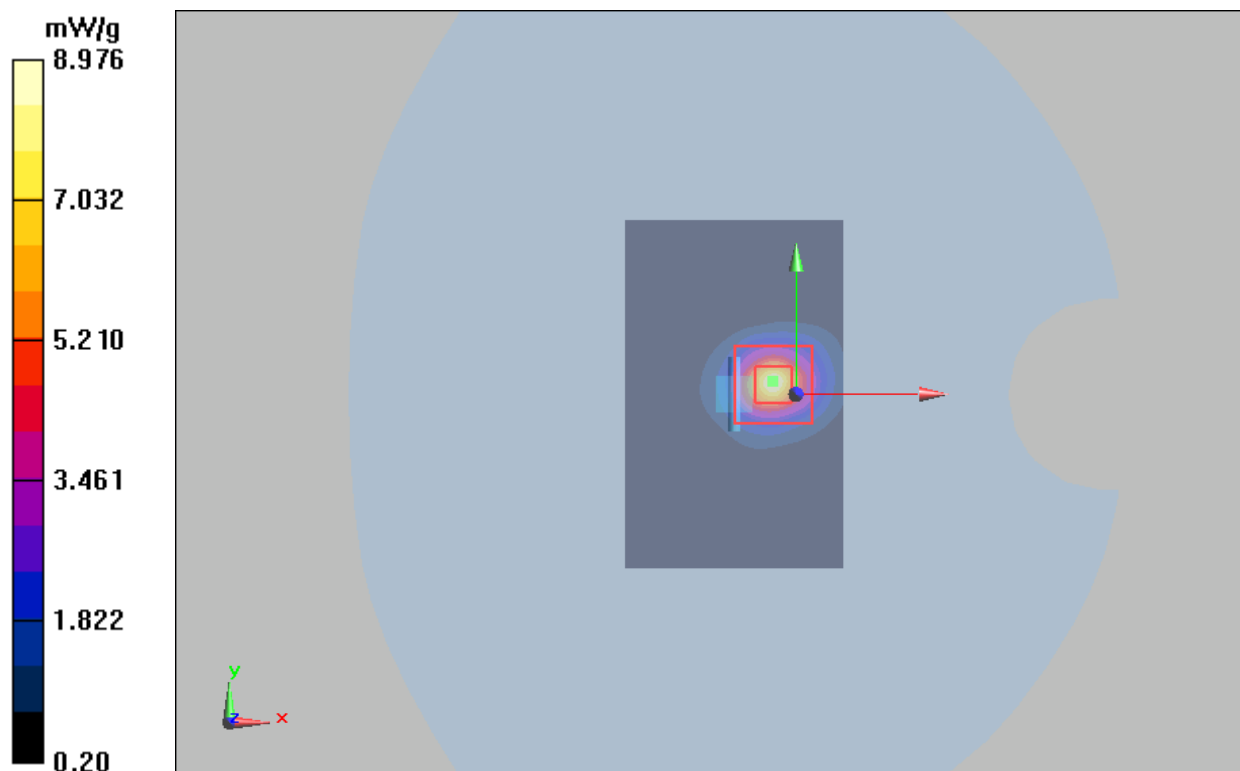

ANNEX C: Highest Graph Results

Main-Antenna

Plot 12 GSM 850 Left Cheek Middle

Date: 10/27/2020

Communication System: UID 0, GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 837$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 42.201$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.38, 9.38, 9.38); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Left Cheek Middle/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.173 W/kg


Left Cheek Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.742 V/m; Power Drift = -0.021 dB

Peak SAR (extrapolated) = 0.218 W/kg

SAR(1 g) = 0.163 W/kg; SAR(10 g) = 0.119 W/kg

Maximum value of SAR (measured) = 0.173 W/kg

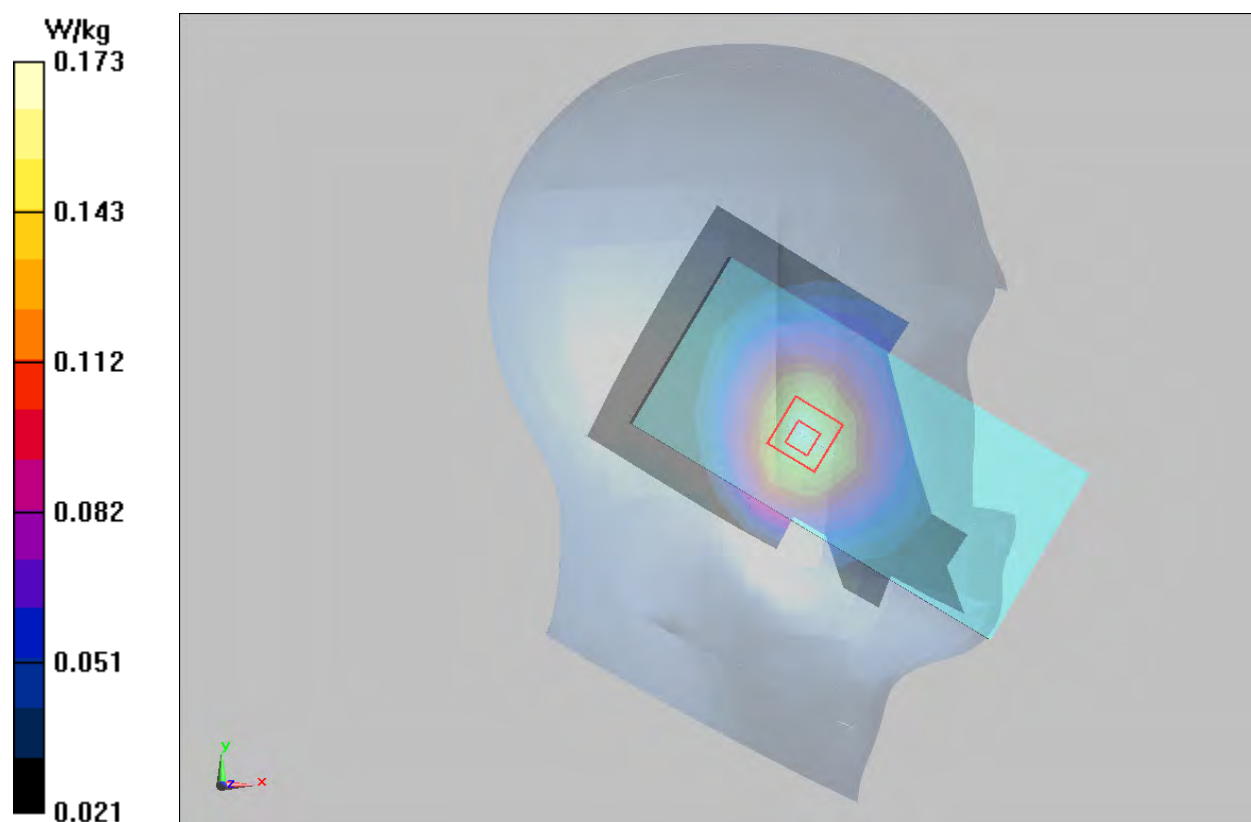

Plot 13 GSM 850 Back Side Middle (Distance 15mm)

Date: 10/27/2020

Communication System: UID 0, GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 837$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 42.201$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.38, 9.38, 9.38); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Back Side Middle/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.180 W/kg


Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.287 V/m; Power Drift = 0.110 dB

Peak SAR (extrapolated) = 0.265 W/kg

SAR(1 g) = 0.175 W/kg; SAR(10 g) = 0.113 W/kg

Maximum value of SAR (measured) = 0.190 W/kg

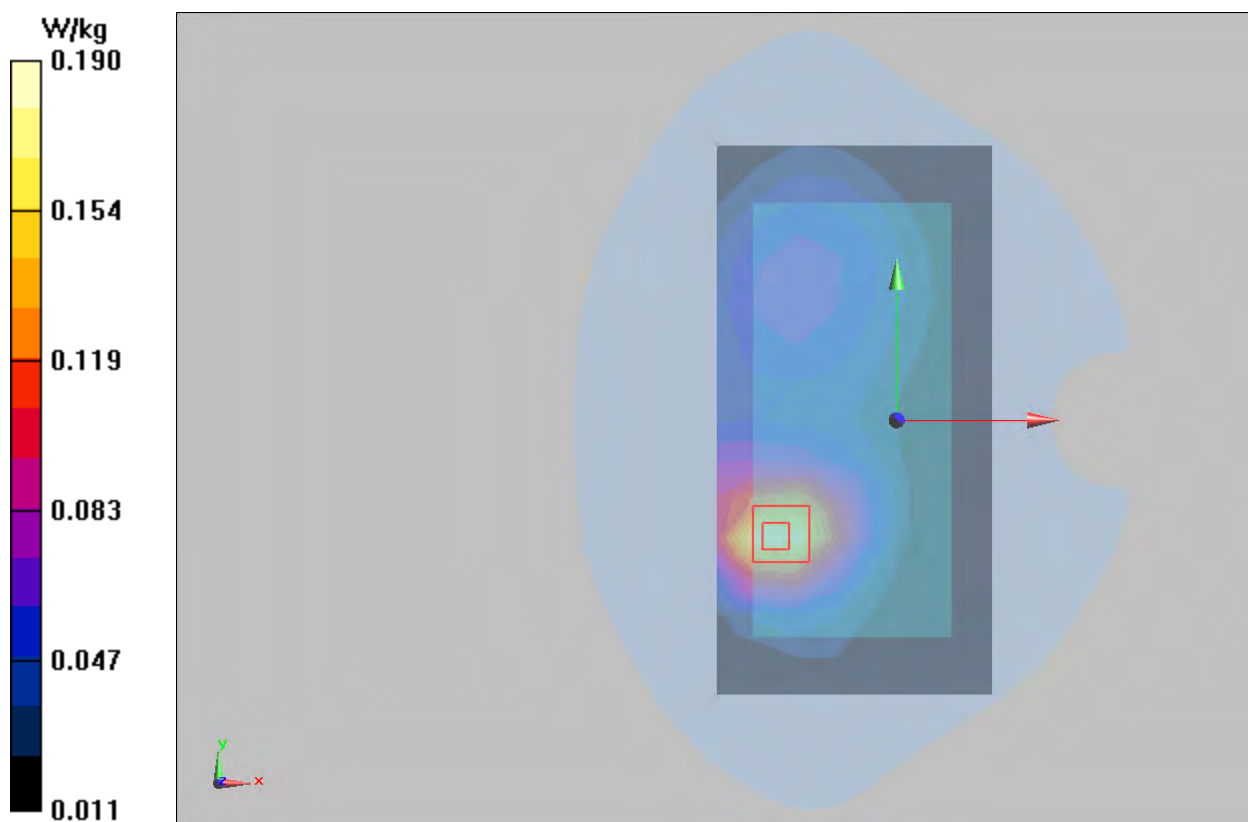

Plot 14 GSM 850 GPRS (2Txslots) Back Side Middle (Distance 10mm)

Date: 10/27/2020

Communication System: UID 0, GPRS 2TX (0); Frequency: 836.6 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 837$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 42.201$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.38, 9.38, 9.38); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Back Side Middle/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.326 W/kg


Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.51 V/m; Power Drift = -0.022 dB

Peak SAR (extrapolated) = 0.490 W/kg

SAR(1 g) = 0.305 W/kg; SAR(10 g) = 0.189 W/kg

Maximum value of SAR (measured) = 0.327 W/kg

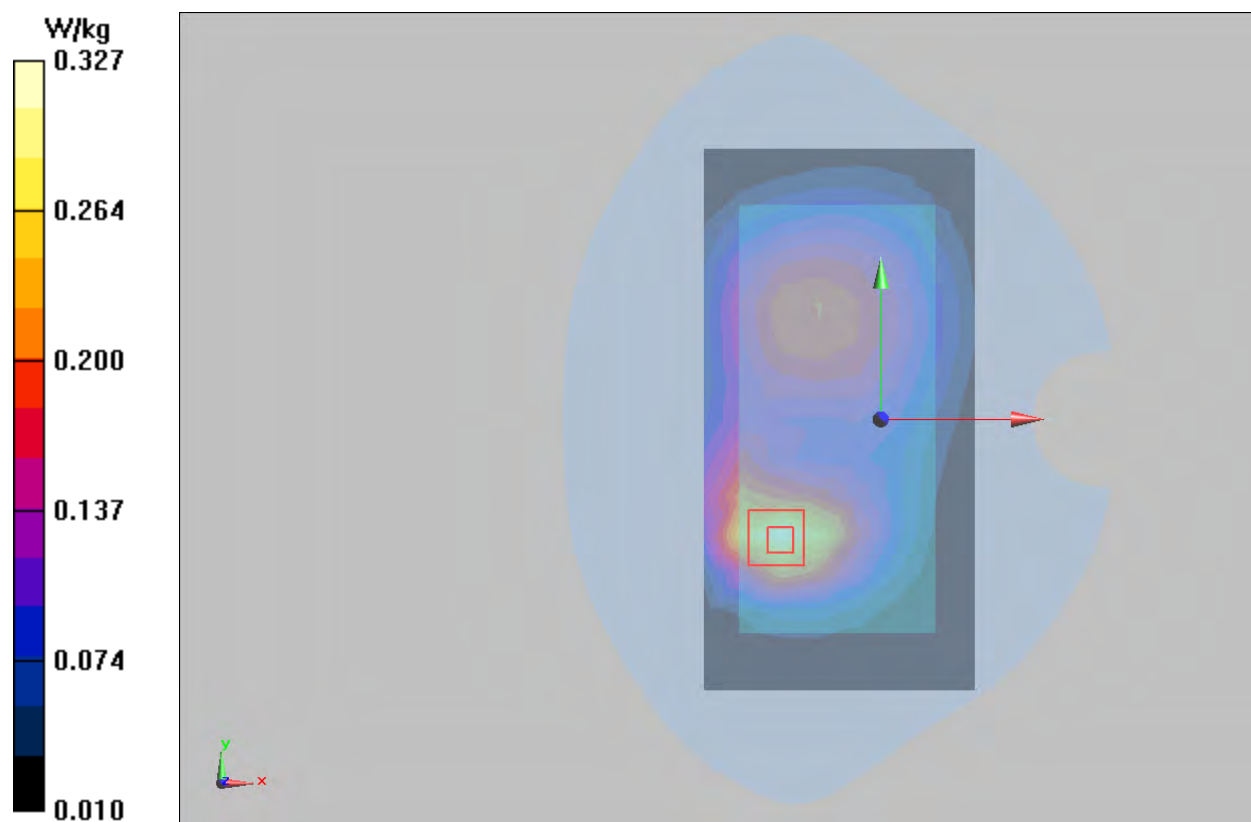

Plot 15 GSM 1900 Left Cheek Middle

Date: 10/27/2020

Communication System: UID 0, GSM1900 (0); Frequency: 1880 MHz; Duty Cycle: 1:1.99986

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 38.948$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.38, 9.38, 9.38); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Left Cheek Middle/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0845 W/kg


Left Cheek Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.960 V/m; Power Drift = 0.074 dB

Peak SAR (extrapolated) = 0.127 W/kg

SAR(1 g) = 0.080 W/kg; SAR(10 g) = 0.049 W/kg

Maximum value of SAR (measured) = 0.086 W/kg

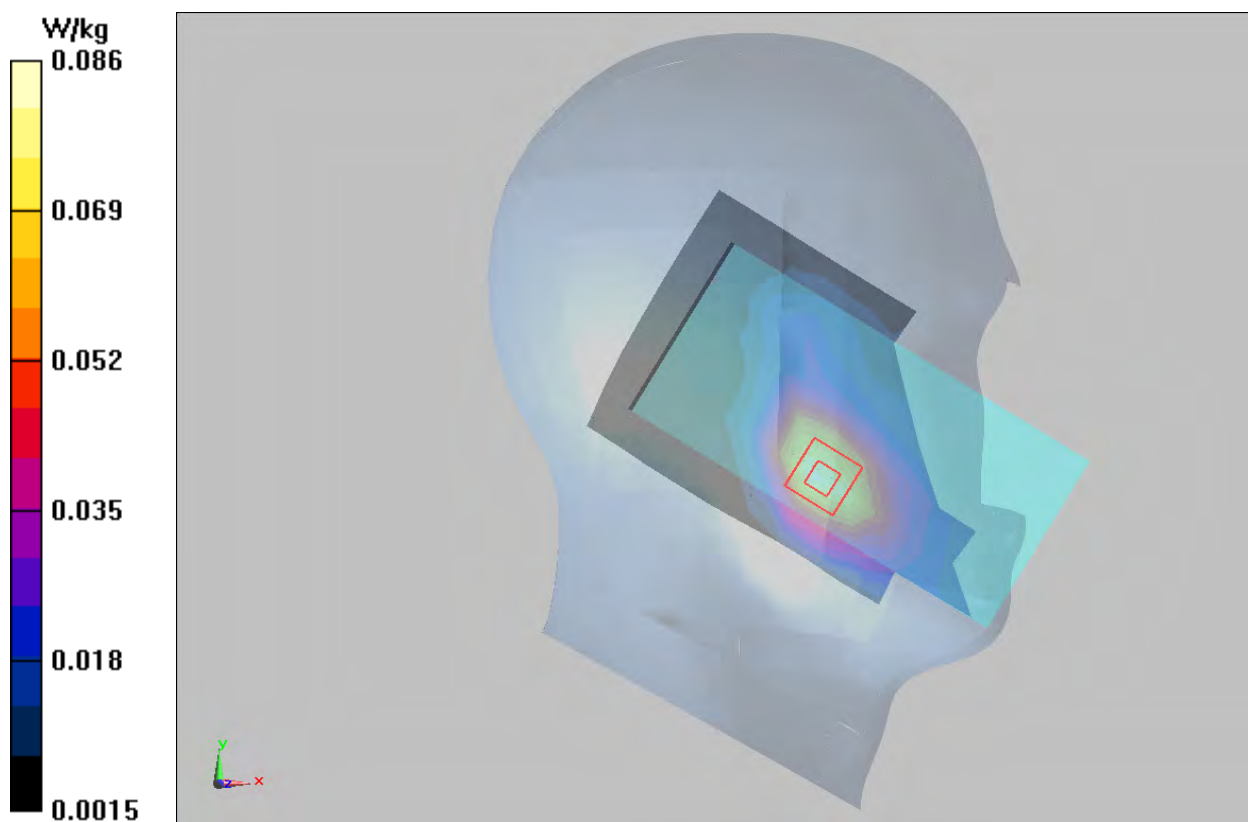

Plot 16 GSM 1900 Back Side High (Distance 15mm)

Date: 10/27/2020

Communication System: UID 0, GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 38.948$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.90, 7.90, 7.90); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Back Side High/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0961 W/kg


Back Side High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.455 V/m; Power Drift = 0.090 dB

Peak SAR (extrapolated) = 0.144 W/kg

SAR(1 g) = 0.090 W/kg; SAR(10 g) = 0.053 W/kg

Maximum value of SAR (measured) = 0.096 W/kg

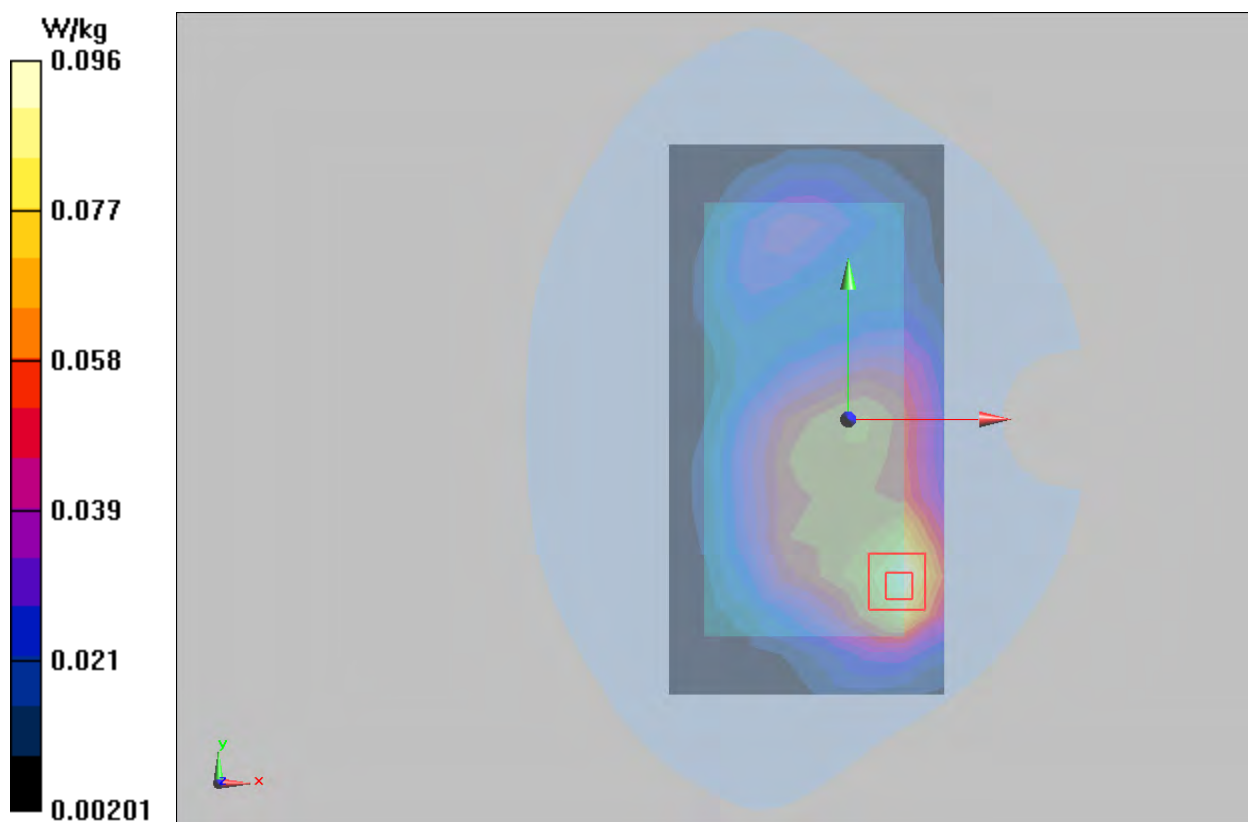

Plot 17 GSM 1900 GPRS (2Txslots) Bottom Edge Middle (Distance 10mm)

Date: 10/27/2020

Communication System: UID 0, GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 38.948$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.90, 7.90, 7.90); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Bottom Edge Middle/Area Scan (4x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.304 W/kg


Bottom Edge Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.82 V/m; Power Drift = -0.150 dB

Peak SAR (extrapolated) = 0.497 W/kg

SAR(1 g) = 0.287 W/kg; SAR(10 g) = 0.161 W/kg

Maximum value of SAR (measured) = 0.315 W/kg

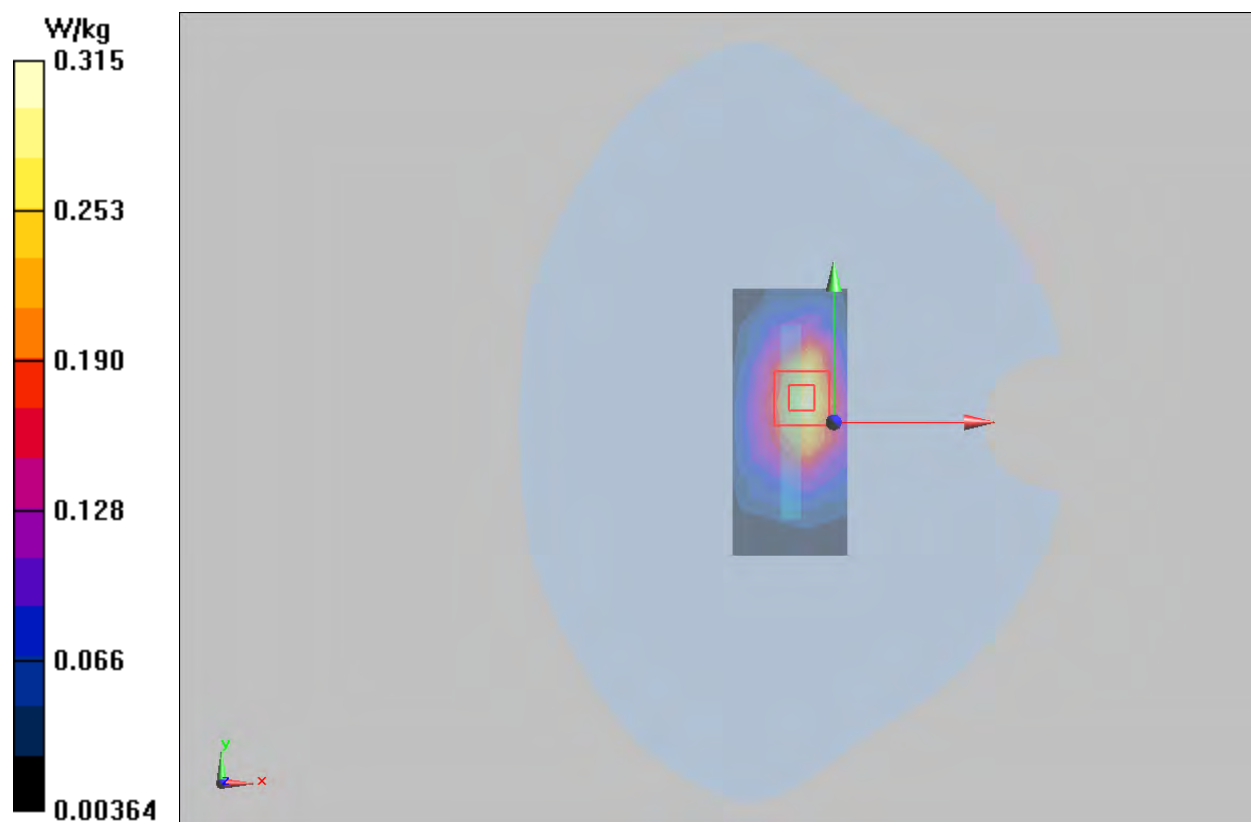

Plot 18 UMTS Band II Left Cheek Middle

Date: 10/27/2020

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 38.948$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.90, 7.90, 7.90); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Left Cheek Middle/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.123 W/kg


Left Cheek Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.488 V/m; Power Drift = 0.042 dB

Peak SAR (extrapolated) = 0.174 W/kg

SAR(1 g) = 0.113 W/kg; SAR(10 g) = 0.072 W/kg

Maximum value of SAR (measured) = 0.120 W/kg

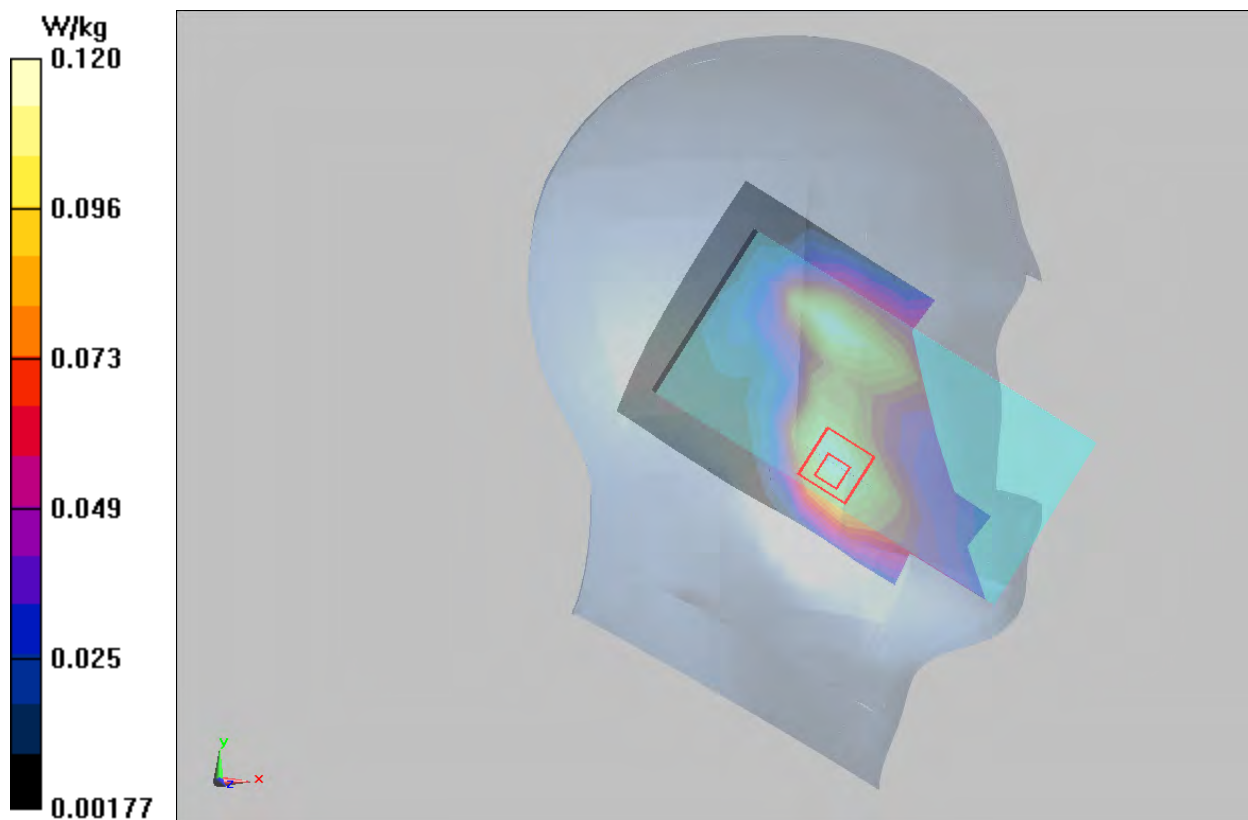

Plot 19 UMTS Band II Back Side Middle (Distance 15mm)

Date: 10/27/2020

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 38.948$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.90, 7.90, 7.90); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Back Side Middle/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.289 W/kg


Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.94 V/m; Power Drift = 0.120 dB

Peak SAR (extrapolated) = 0.473 W/kg

SAR(1 g) = 0.286 W/kg; SAR(10 g) = 0.169 W/kg

Maximum value of SAR (measured) = 0.307 W/kg

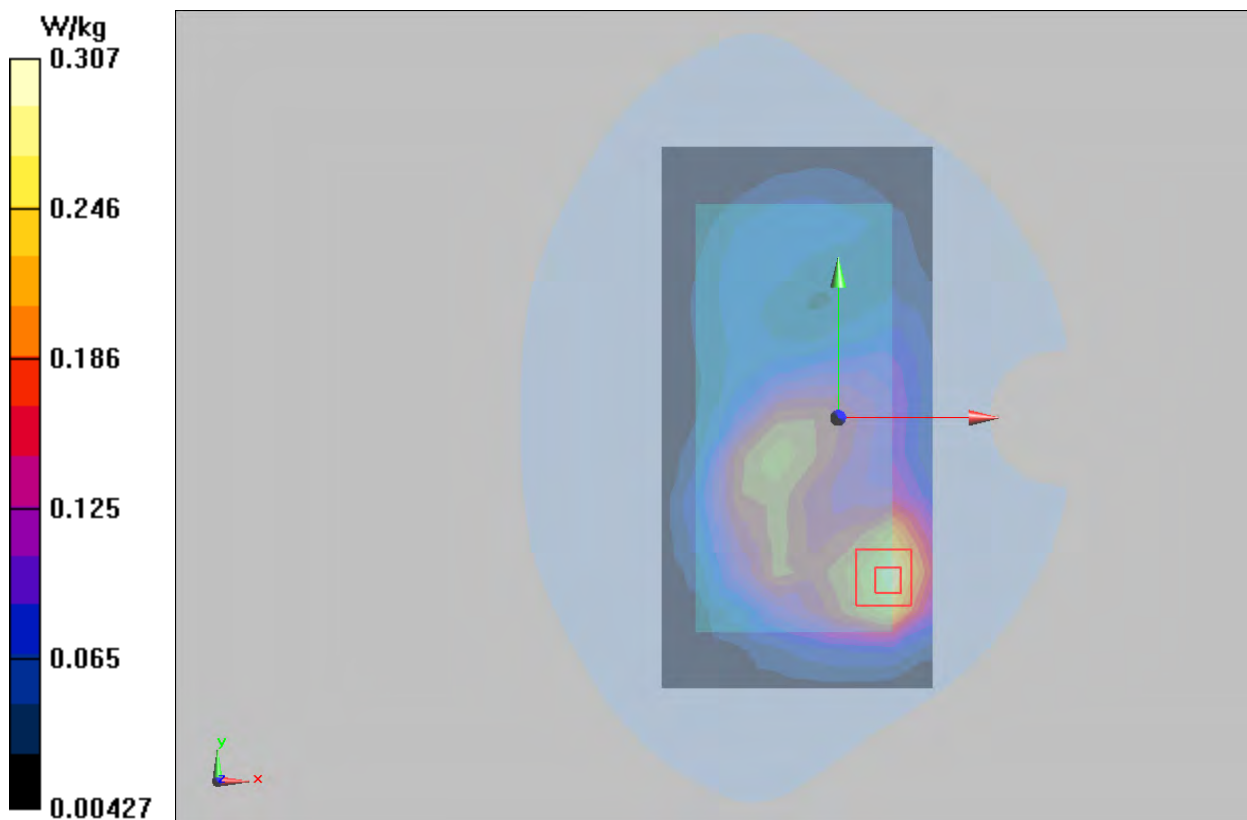

Plot 20 UMTS Band II Bottom Edge Middle (Distance 10mm)

Date: 10/27/2020

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 38.948$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.90, 7.90, 7.90); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Bottom Edge Middle/Area Scan (4x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.416 W/kg


Bottom Edge Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.07 V/m; Power Drift = 0.030 dB

Peak SAR (extrapolated) = 0.833 W/kg

SAR(1 g) = 0.469 W/kg; SAR(10 g) = 0.262 W/kg

Maximum value of SAR (measured) = 0.517 W/kg

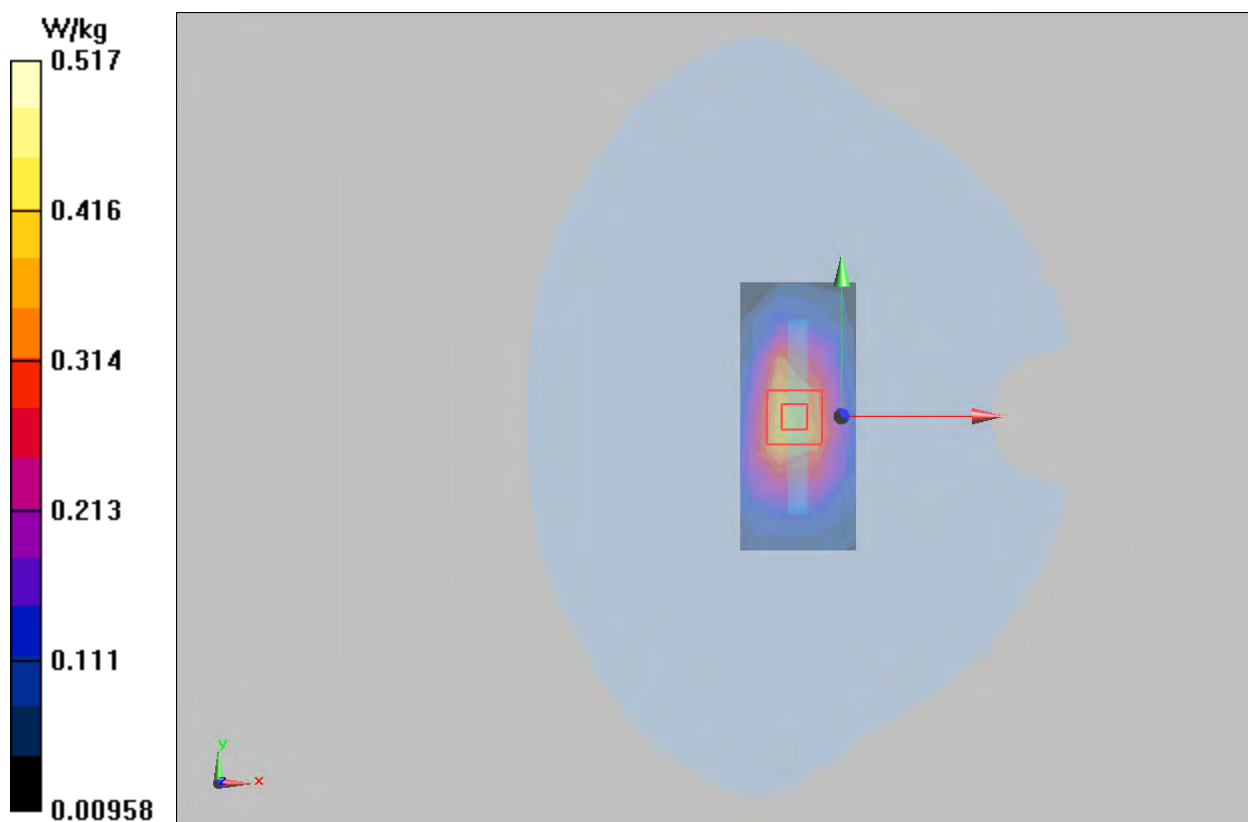

Plot 21 UMTS Band IV Right Cheek Middle

Date: 9/28/2020

Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.312$ S/m; $\epsilon_r = 39.365$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.25, 8.25, 8.25); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Right Cheek Middle/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.130 W/kg


Right Cheek Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.718 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.182 W/kg

SAR(1 g) = 0.123 W/kg; SAR(10 g) = 0.080 W/kg

Maximum value of SAR (measured) = 0.135 W/kg

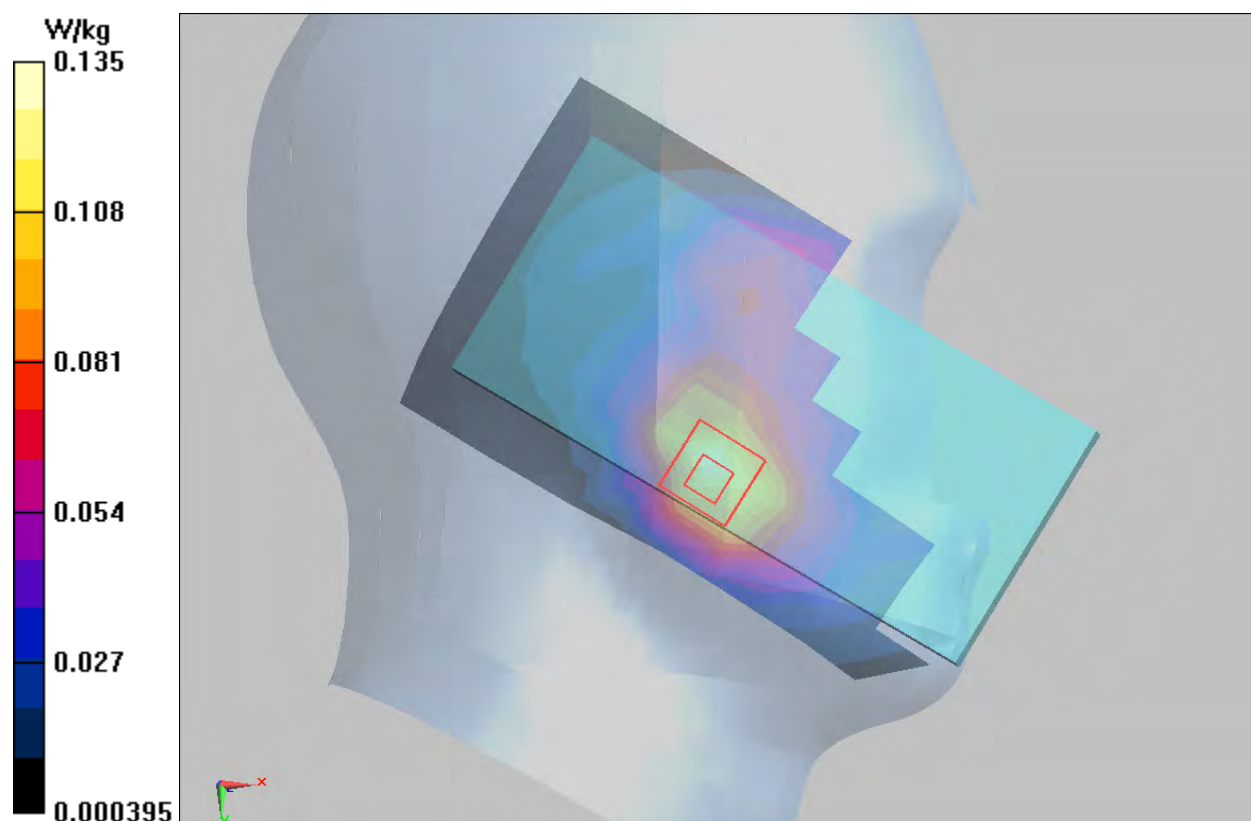

Plot 22 UMTS Band IV Back Side Middle(Distance 15mm)

Date: 9/28/2020

Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.312$ S/m; $\epsilon_r = 39.365$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.25, 8.25, 8.25); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Back Side Middle/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.328 W/kg


Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.51 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.490 W/kg

SAR(1 g) = 0.303 W/kg; SAR(10 g) = 0.187 W/kg

Maximum value of SAR (measured) = 0.330 W/kg

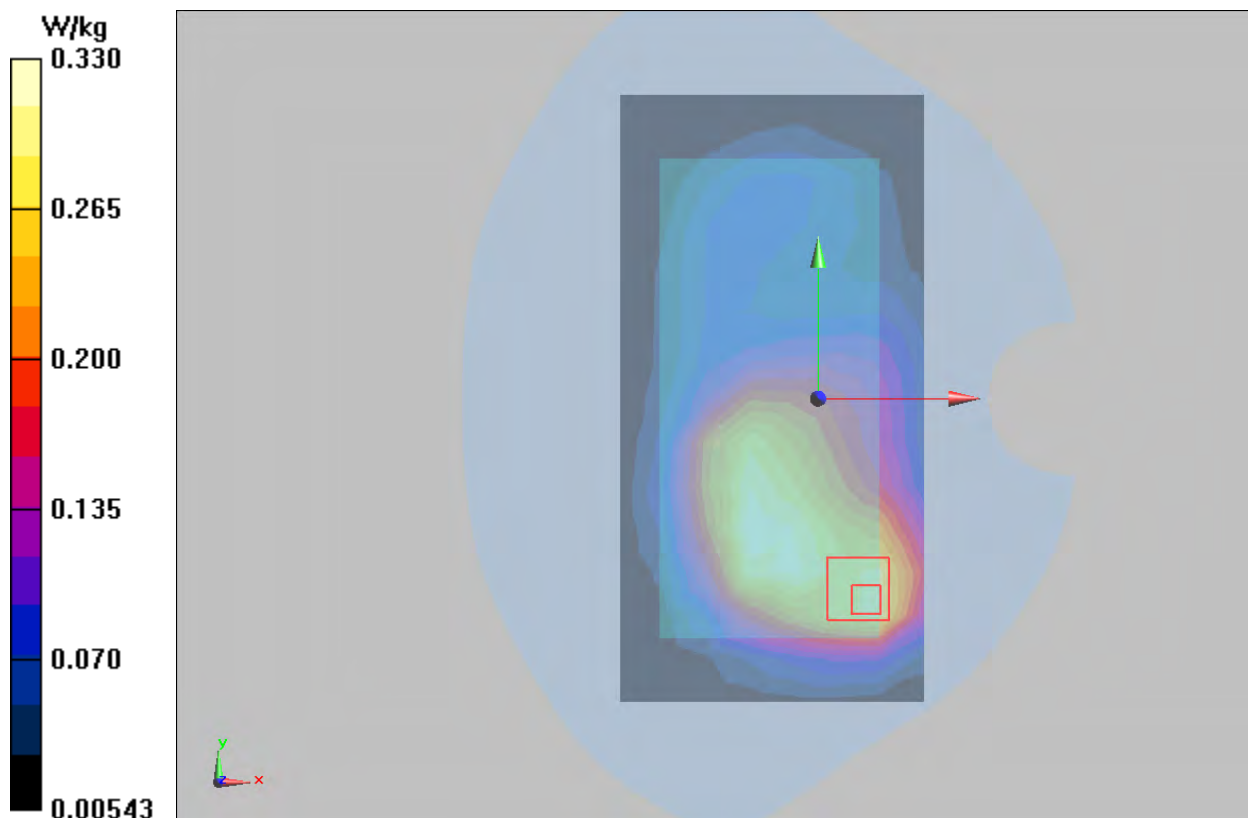

Plot 23 UMTS Band IV Bottom Edge Middle (Distance 10mm)

Date: 9/28/2020

Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.312$ S/m; $\epsilon_r = 39.365$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.25, 8.25, 8.25); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Bottom Edge Middle/Area Scan (4x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.493 W/kg


Bottom Edge Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.28 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.849 W/kg

SAR(1 g) = 0.490 W/kg; SAR(10 g) = 0.278 W/kg

Maximum value of SAR (measured) = 0.539 W/kg

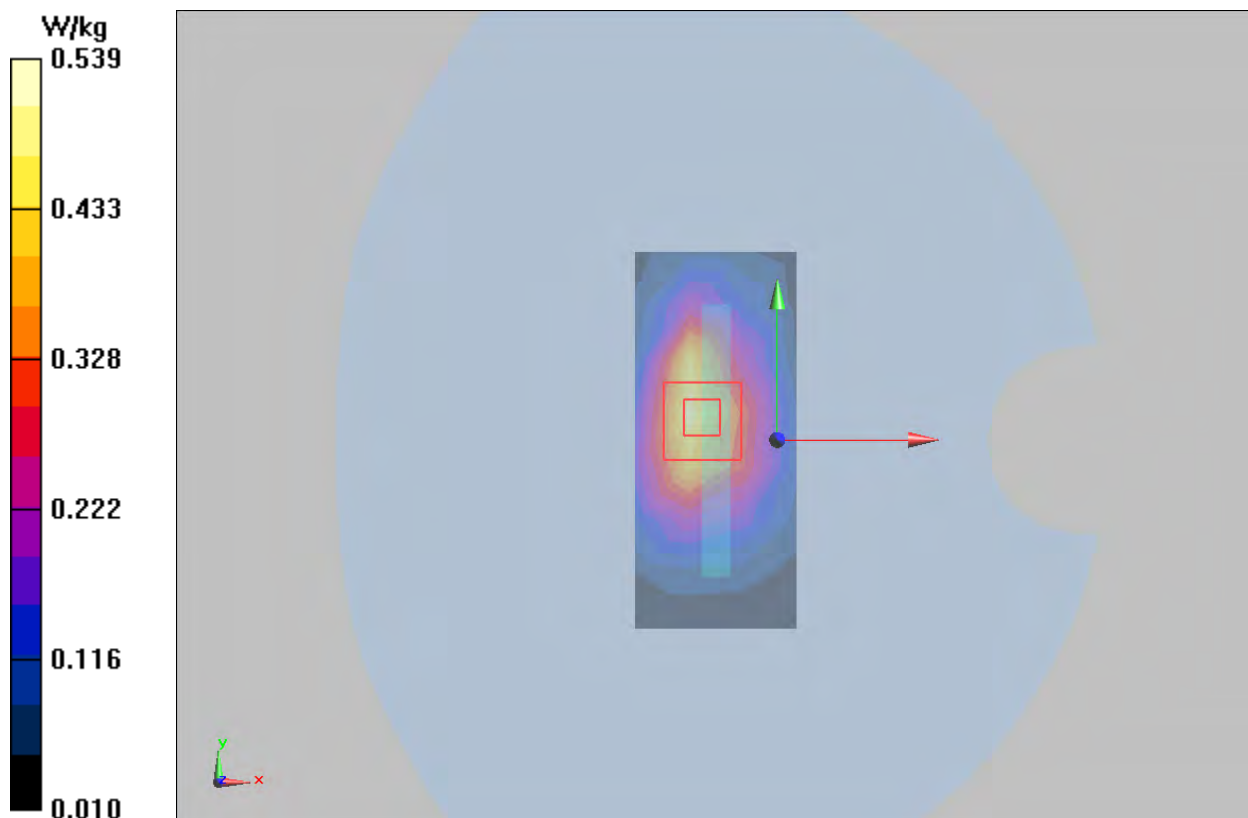

Plot 24 UMTS Band V Right Tilt Middle

Date: 10/27/2020

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 837$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 42.201$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.38, 9.38, 9.38); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Right Tilt Middle/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0990 W/kg


Right Tilt Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.263 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.116 W/kg

SAR(1 g) = 0.095 W/kg; SAR(10 g) = 0.073 W/kg

Maximum value of SAR (measured) = 0.0992 W/kg

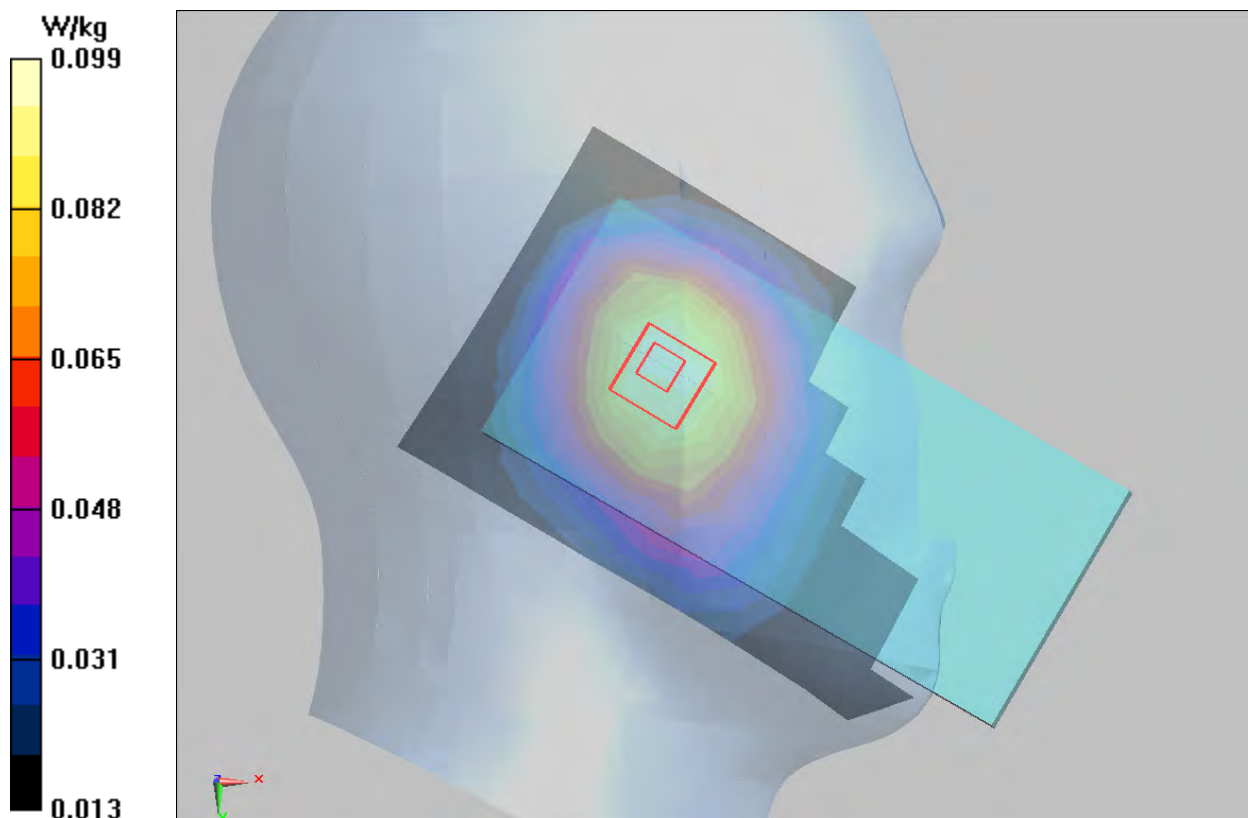

Plot 25 UMTS Band V Back Side Middle(Distance 15mm)

Date: 10/27/2020

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 837$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 42.201$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.38, 9.38, 9.38); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Back Side Middle/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.181 W/kg


Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.77 V/m; Power Drift = -0.025 dB

Peak SAR (extrapolated) = 0.254 W/kg

SAR(1 g) = 0.166 W/kg; SAR(10 g) = 0.108 W/kg

Maximum value of SAR (measured) = 0.177 W/kg

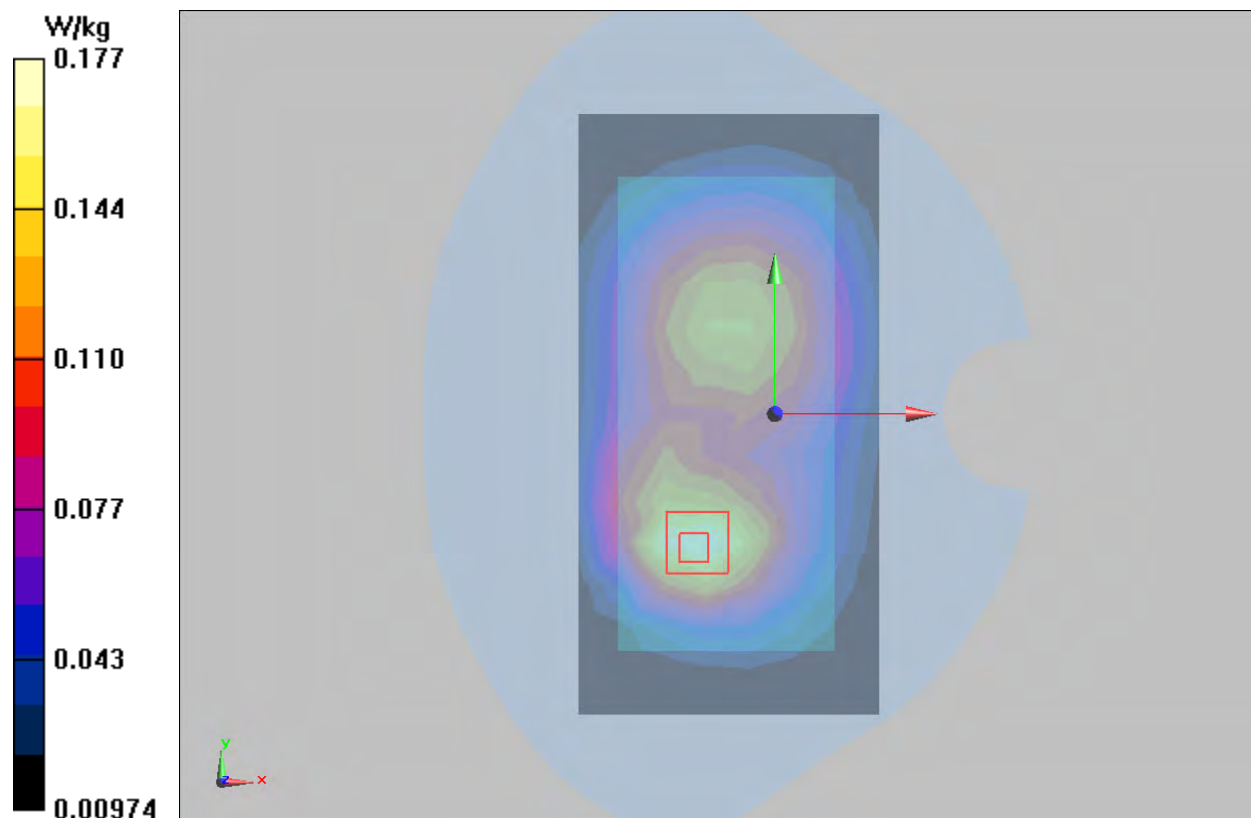

Plot 26 UMTS Band V Back Side Middle (Distance 10mm)

Date: 10/27/2020

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 837$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 42.201$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.38, 9.38, 9.38); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Back Side Middle/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.289 W/kg


Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.356 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.435 W/kg

SAR(1 g) = 0.273 W/kg; SAR(10 g) = 0.171 W/kg

Maximum value of SAR (measured) = 0.298 W/kg

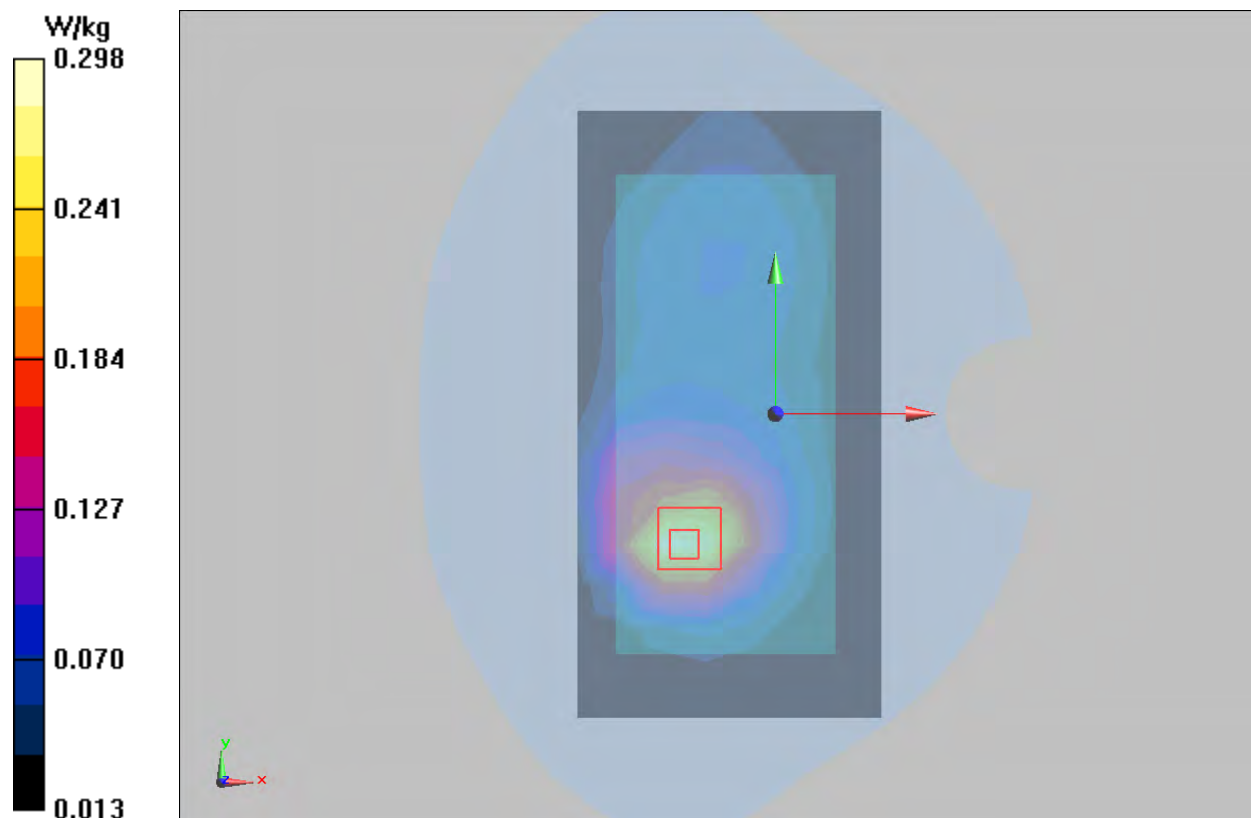

Plot 27 LTE Band 2 1RB Left Cheek Middle

Date: 10/27/2020

Communication System: UID 0, LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 38.948$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.90, 7.90, 7.90); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Left Cheek Middle/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.123 W/kg


Left Cheek Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.025 V/m; Power Drift = 0.060 dB

Peak SAR (extrapolated) = 0.190 W/kg

SAR(1 g) = 0.118 W/kg; SAR(10 g) = 0.072 W/kg

Maximum value of SAR (measured) = 0.128 W/kg

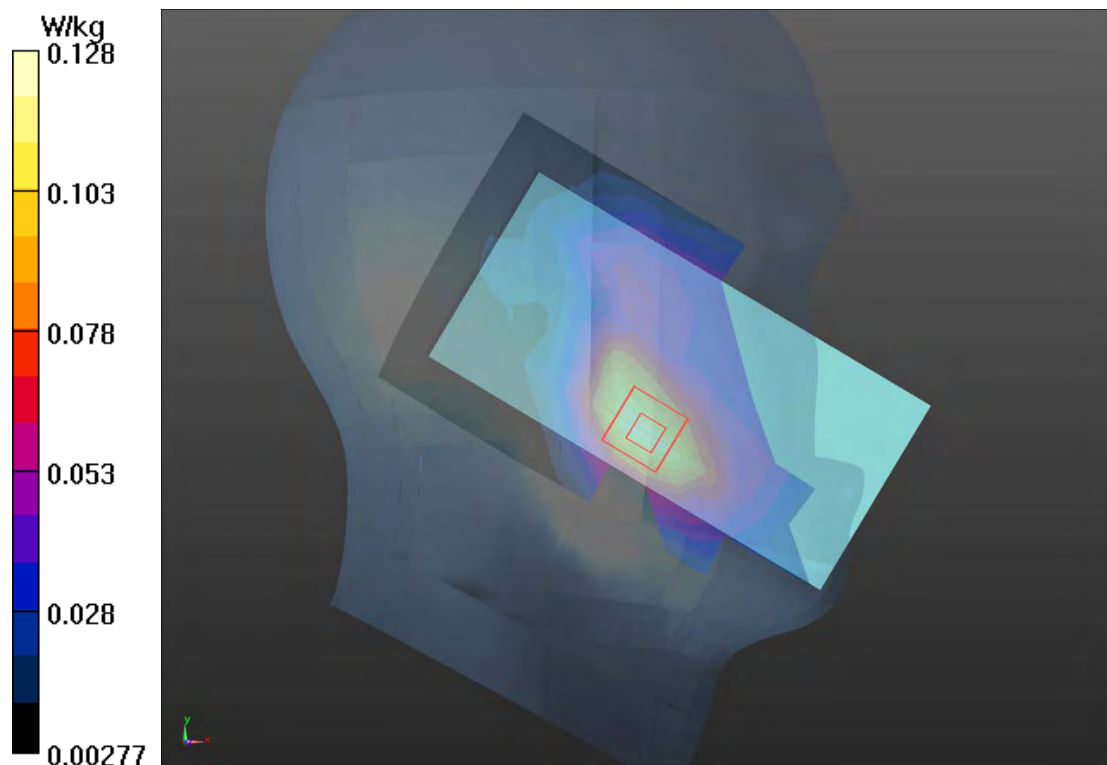

Plot 28 LTE Band 2 1RB Back Side Middle (Distance 15mm)

Date: 10/27/2020

Communication System: UID 0, LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 38.948$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.90, 7.90, 7.90); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Back Side Middle/Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.236 W/kg


Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.28 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.344 W/kg

SAR(1 g) = 0.220 W/kg; SAR(10 g) = 0.137 W/kg

Maximum value of SAR (measured) = 0.237 W/kg

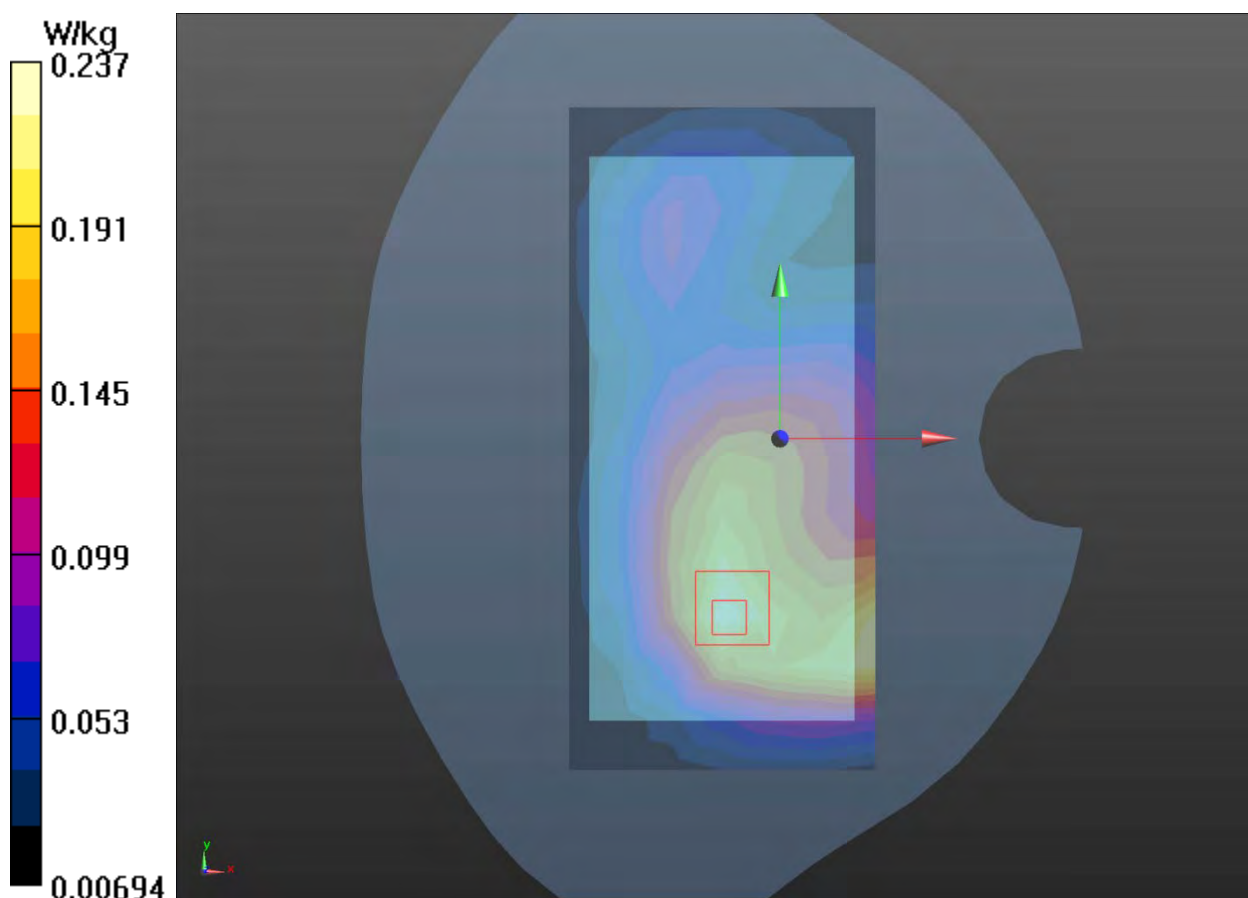

Plot 29 LTE Band 2 50%RB Bottom Edge Middle (Distance 10mm)

Date: 10/27/2020

Communication System: UID 0, LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 38.948$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.90, 7.90, 7.90); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Bottom Edge Middle/Area Scan (4x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.517 W/kg


Bottom Edge Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.62 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.954 W/kg

SAR(1 g) = 0.552 W/kg; SAR(10 g) = 0.311 W/kg

Maximum value of SAR (measured) = 0.605 W/kg

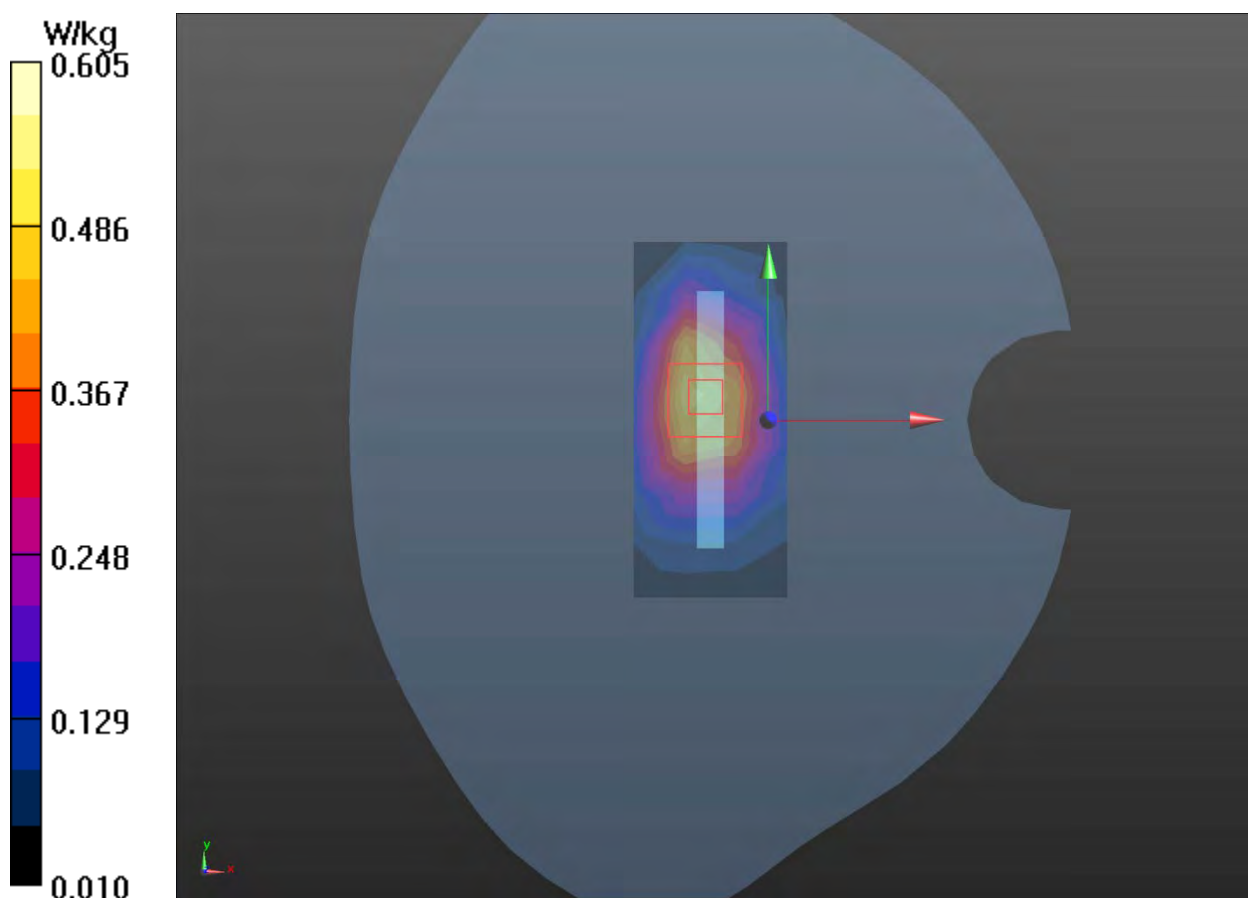

Plot 30 LTE Band 4 1RB Left Cheek Middle

Date: 9/29/2020

Communication System: UID 0, LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.313$ S/m; $\epsilon_r = 39.384$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.25, 8.25, 8.25); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Left Cheek Middle/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0941 W/kg


Left Cheek Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.827 V/m; Power Drift = -0.074 dB

Peak SAR (extrapolated) = 0.132 W/kg

SAR(1 g) = 0.091 W/kg; SAR(10 g) = 0.062 W/kg

Maximum value of SAR (measured) = 0.097 W/kg

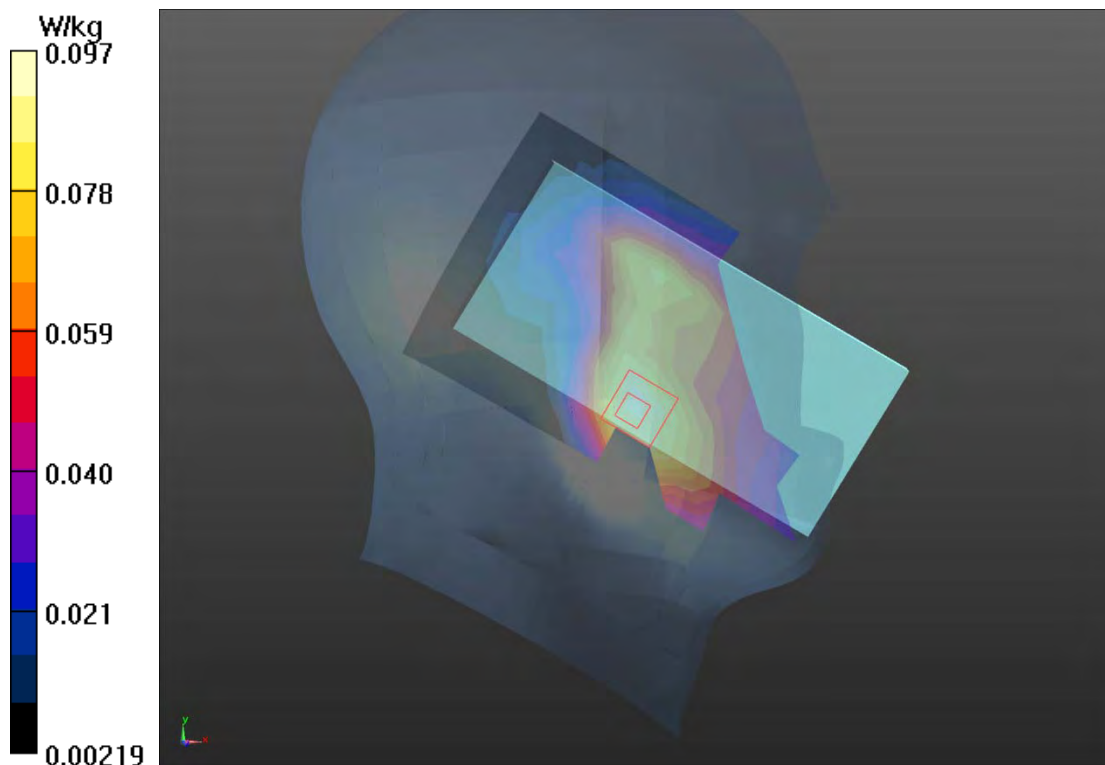

Plot 31 LTE Band 4 1RB Back Side High (Distance 15mm)

Date: 9/29/2020

Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.323$ S/m; $\epsilon_r = 39.378$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.25, 8.25, 8.25); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Back Side High/Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.340 W/kg


Back Side High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.10 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.491 W/kg

SAR(1 g) = 0.325 W/kg; SAR(10 g) = 0.210 W/kg

Maximum value of SAR (measured) = 0.346 W/kg

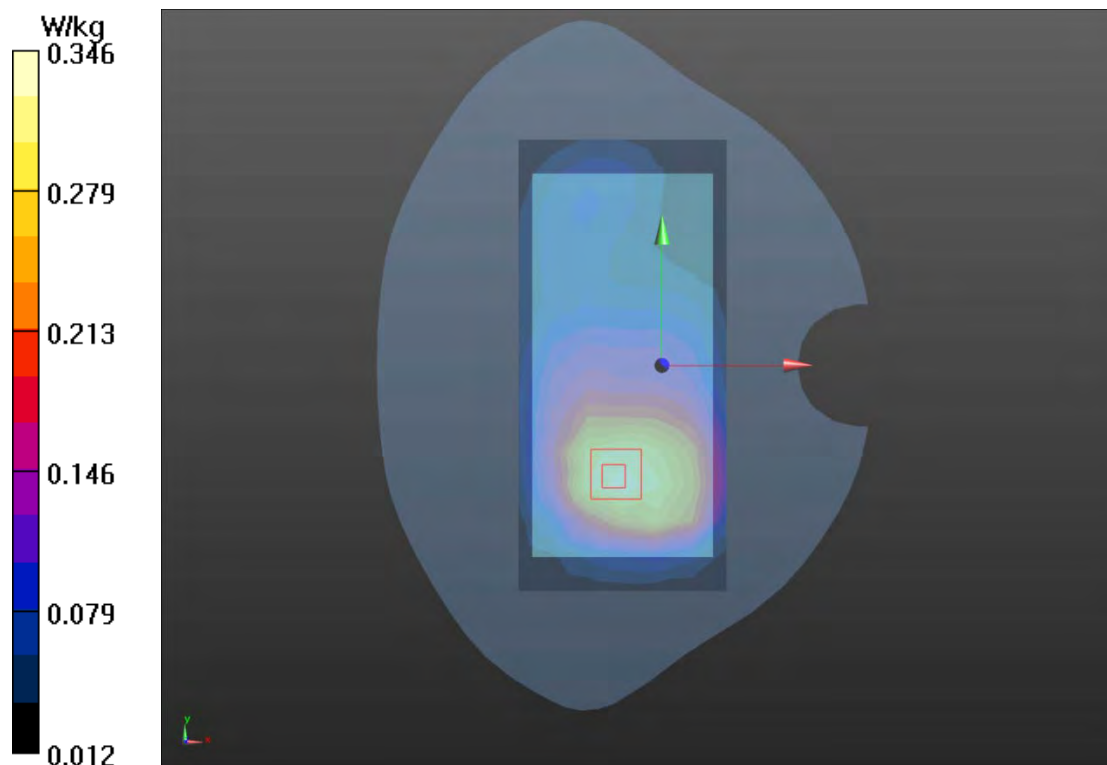

Plot 32 LTE Band 4 1RB Bottom Edge High (Distance 10mm)

Date: 9/29/2020

Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.323$ S/m; $\epsilon_r = 39.378$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.25, 8.25, 8.25); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Bottom Edge High/Area Scan (4x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.515 W/kg


Bottom Edge High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.19 V/m; Power Drift = 0.029 dB

Peak SAR (extrapolated) = 0.818 W/kg

SAR(1 g) = 0.472 W/kg; SAR(10 g) = 0.269 W/kg

Maximum value of SAR (measured) = 0.522 W/kg

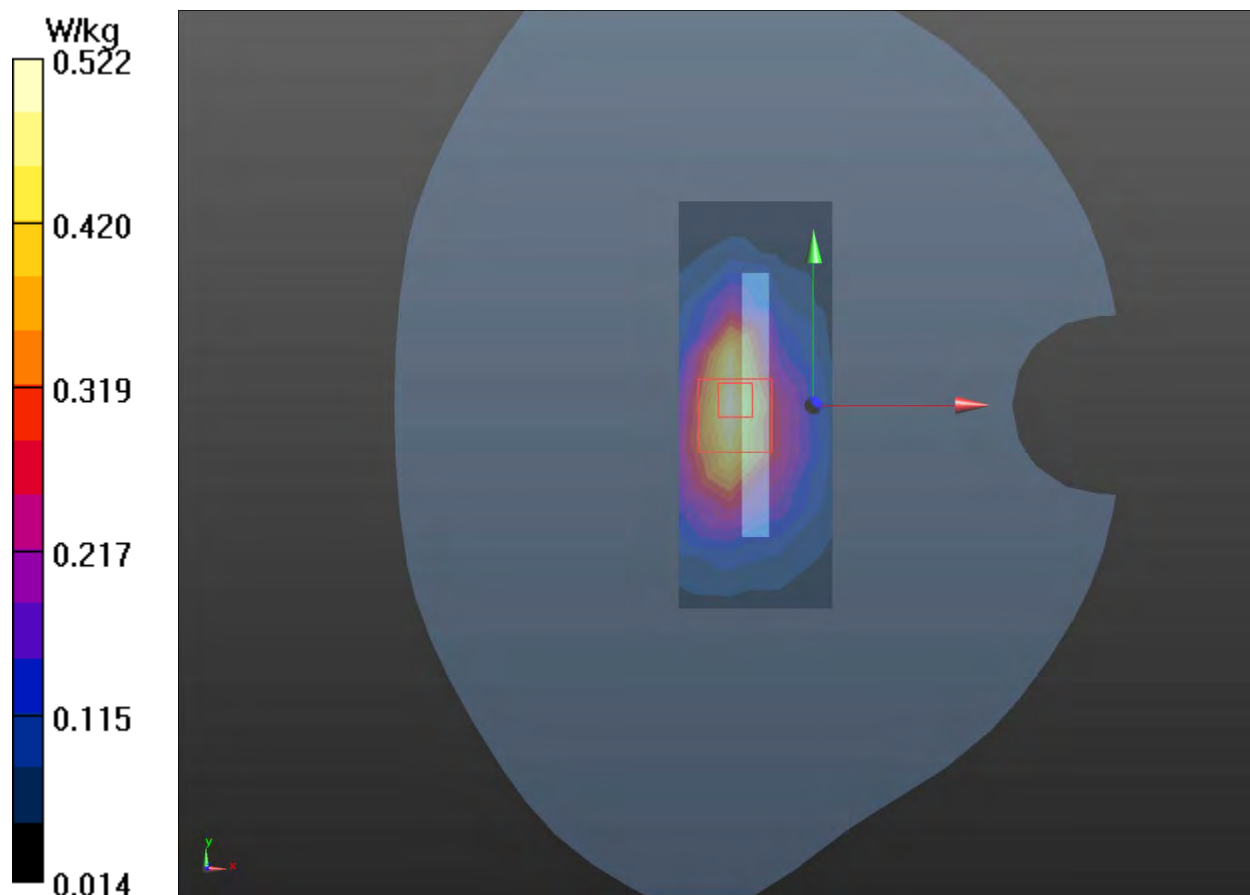

Plot 33 LTE Band 5 1RB Right Cheek Middle

Date: 10/27/2020

Communication System: UID 0, LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 42.199$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.38, 9.38, 9.38); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Right Cheek Middle/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.149 W/kg


Right Cheek Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.877 V/m; Power Drift = 0.077 dB

Peak SAR (extrapolated) = 0.174 W/kg

SAR(1 g) = 0.142 W/kg; SAR(10 g) = 0.110 W/kg

Maximum value of SAR (measured) = 0.148 W/kg

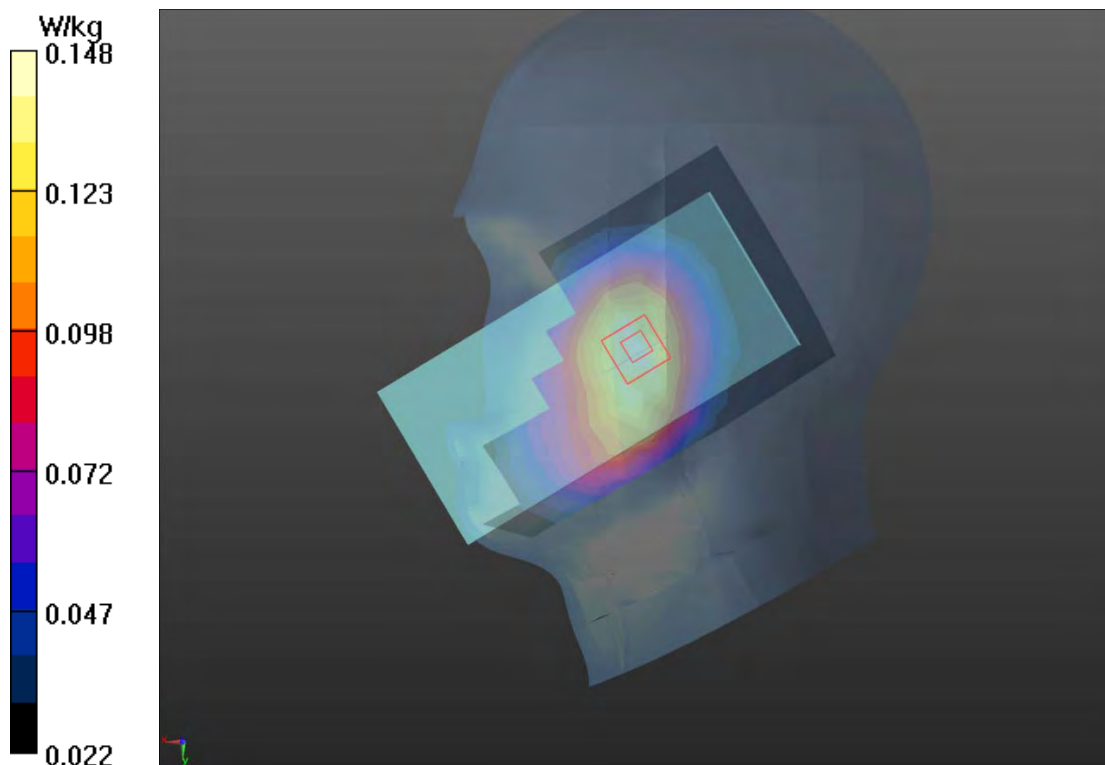

Plot 34 LTE Band 5 1RB Back Side Middle(Distance 15mm)

Date: 10/27/2020

Communication System: UID 0, LTE (0); Frequency: 836.5 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 42.199$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN7543; ConvF(10.05, 10.05, 10.05) @ 836.5 MHz; Calibrated: 2020/9/7

Electronics: DAE4 Sn1317; Calibrated: 2019/10/23

Phantom: SAM 2; Type: SAM

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Back Side Middle/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.181 W/kg


Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.950 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.254 W/kg

SAR(1 g) = 0.168 W/kg; SAR(10 g) = 0.109 W/kg

Maximum value of SAR (measured) = 0.181 W/kg

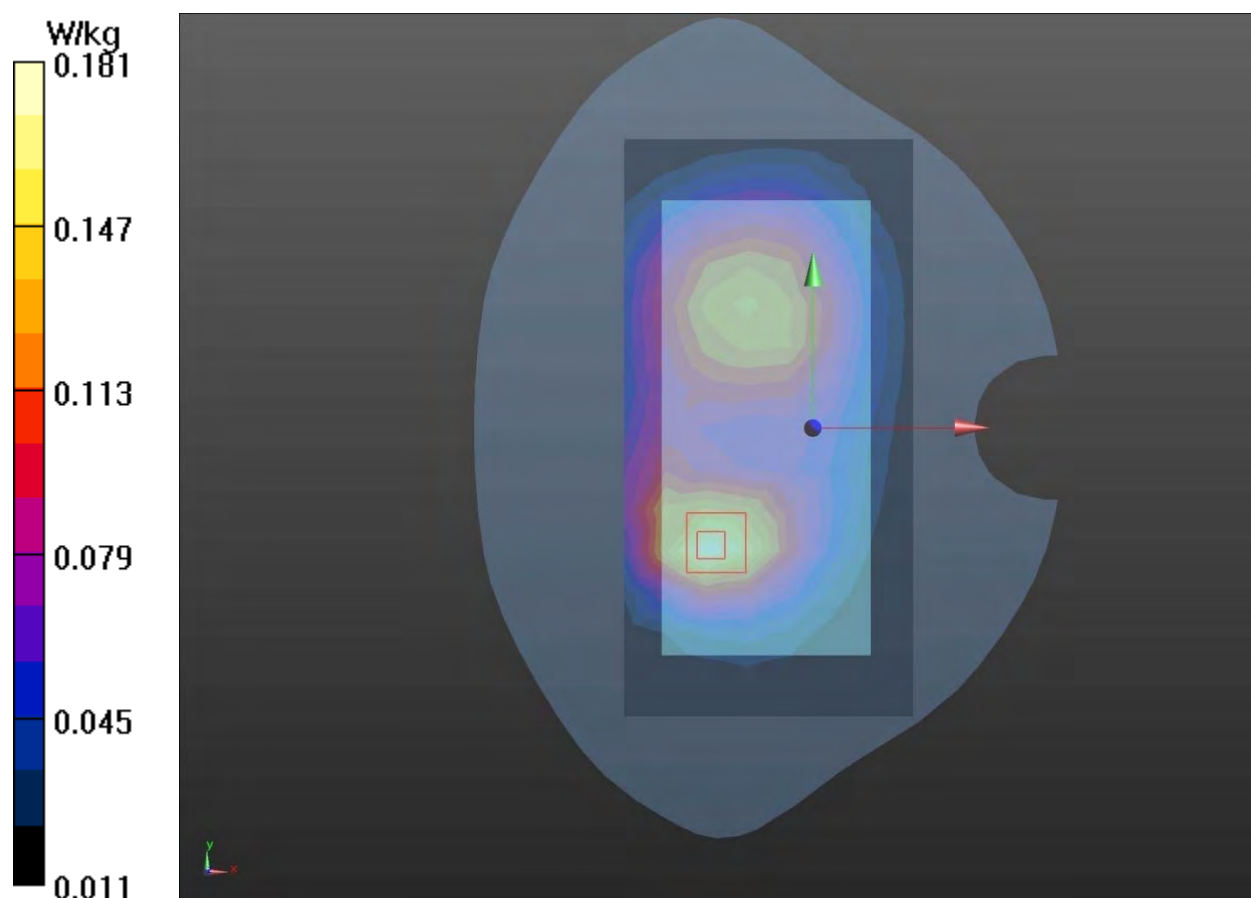

Plot 35 LTE Band 5 1RB Back Side Middle (Distance 10mm)

Date: 10/27/2020

Communication System: UID 0, LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 42.199$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.38, 9.38, 9.38); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Back Side Middle/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.340 W/kg


Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.37 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.502 W/kg

SAR(1 g) = 0.320 W/kg; SAR(10 g) = 0.202 W/kg

Maximum value of SAR (measured) = 0.347 W/kg

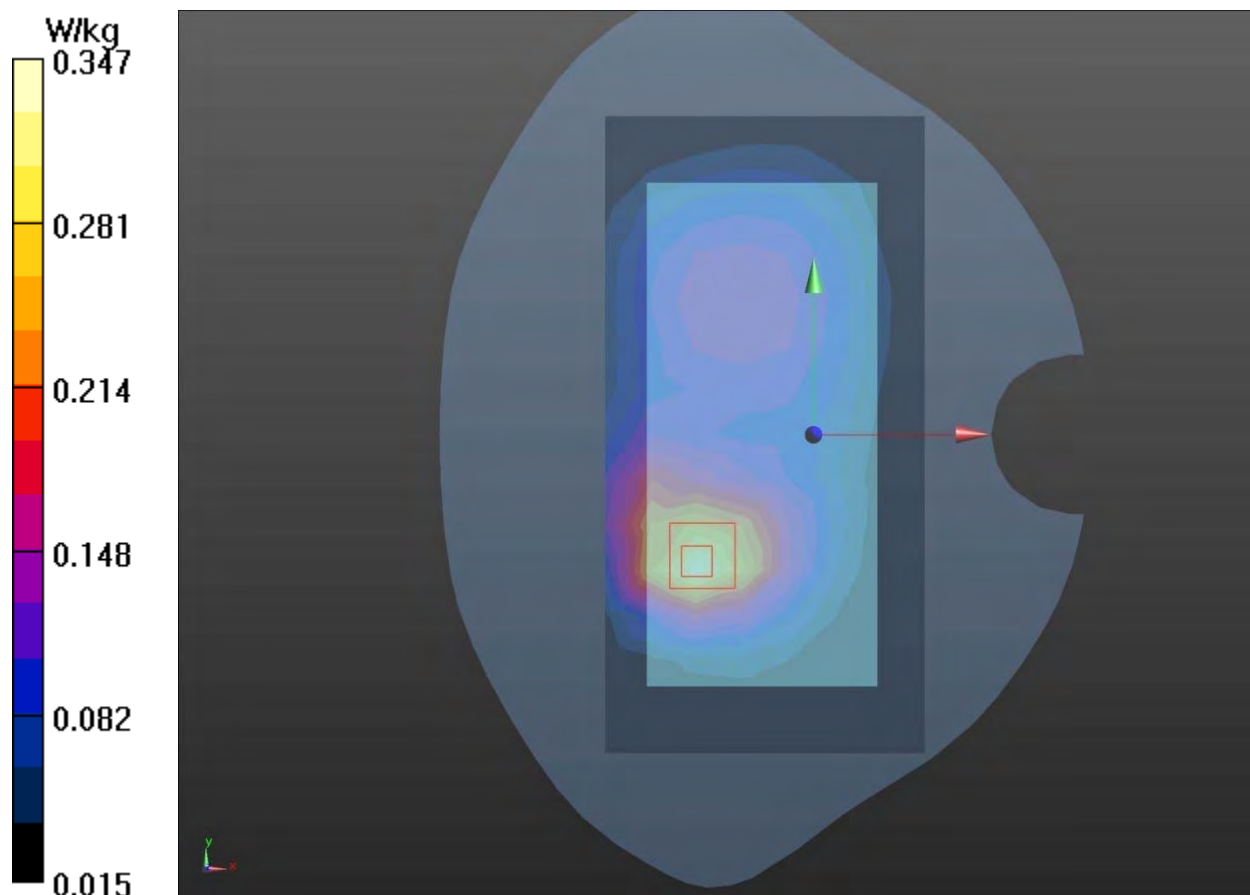

Plot 36 LTE Band 7 1RB Left Cheek Middle

Date: 11/10/2020

Communication System: UID 0, LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 1.905$ S/m; $\epsilon_r = 38.267$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.26, 7.26, 7.26); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Left Cheek Middle/Area Scan (10x18x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.119 W/kg


Left Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.596 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.206 W/kg

SAR(1 g) = 0.109 W/kg; SAR(10 g) = 0.059 W/kg

Maximum value of SAR (measured) = 0.117 W/kg

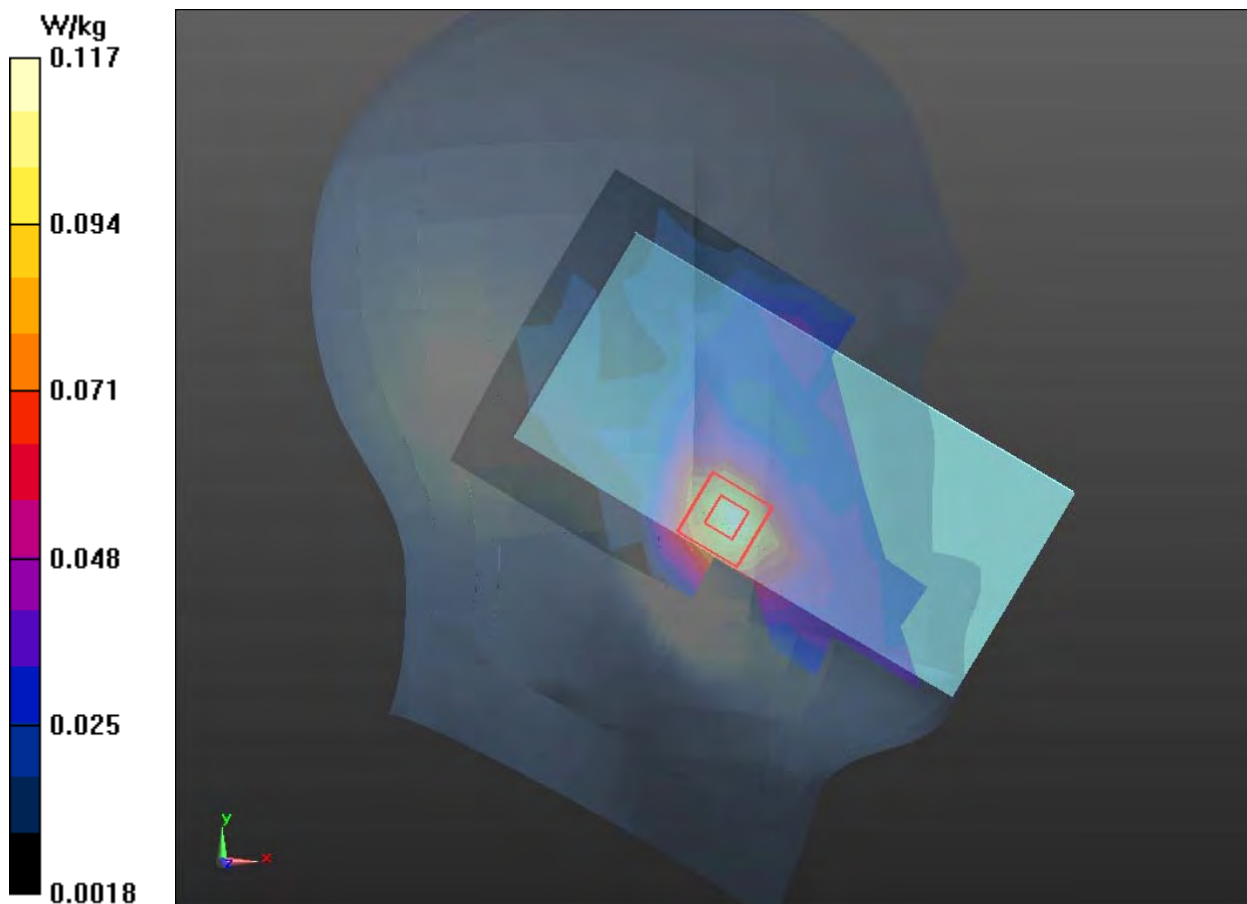

Plot 37 LTE Band 7 1RB Back Side High(Distance 15mm)

Date: 11/10/2020

Communication System: UID 0, LTE (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2560$ MHz; $\sigma = 1.932$ S/m; $\epsilon_r = 38.175$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.26, 7.26, 7.26); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Back Side High/Area Scan (10x18x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.280 W/kg


Back Side High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.691 V/m; Power Drift = -0.055 dB

Peak SAR (extrapolated) = 0.563 W/kg

SAR(1 g) = 0.278 W/kg; SAR(10 g) = 0.144 W/kg

Maximum value of SAR (measured) = 0.303 W/kg

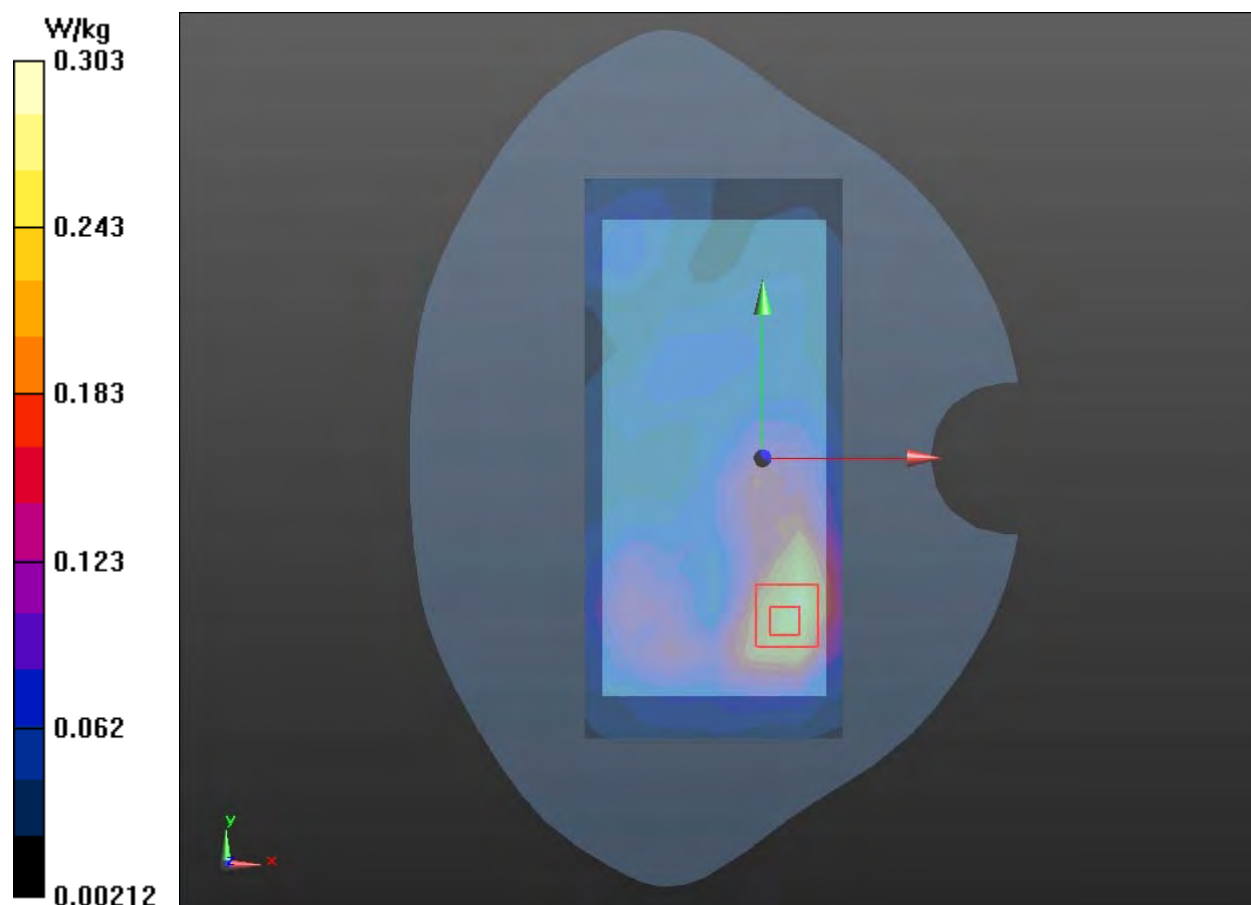

Plot 38 LTE Band 7 50%RB Bottom Edge Low (Distance 10mm)

Date: 11/10/2020

Communication System: UID 0, LTE (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2510$ MHz; $\sigma = 1.876$ S/m; $\epsilon_r = 38.352$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.26, 7.26, 7.26); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Bottom Edge Low/Area Scan (5x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.522 W/kg


Bottom Edge Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.47 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.858 W/kg

SAR(1 g) = 0.553 W/kg; SAR(10 g) = 0.295 W/kg

Maximum value of SAR (measured) = 0.578 W/kg

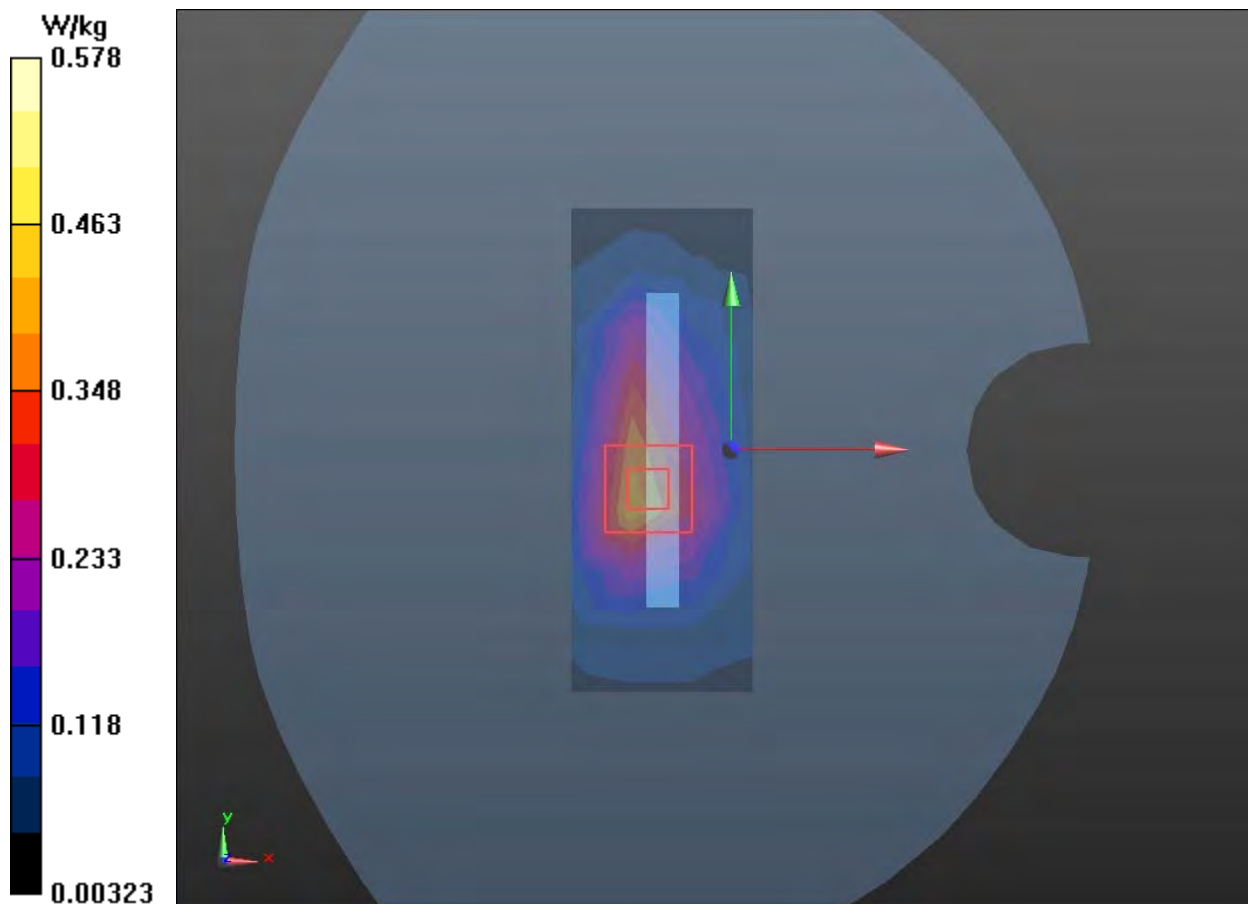

Plot 39 LTE Band 12 1RB Right Cheek Low

Date: 11/12/2020

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.848$ S/m; $\epsilon_r = 42.763$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.78, 9.78, 9.78); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Right Cheek Low/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0720 W/kg


Right Cheek Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.898 V/m; Power Drift = 0.043 dB

Peak SAR (extrapolated) = 0.0860 W/kg

SAR(1 g) = 0.070 W/kg; SAR(10 g) = 0.055 W/kg

Maximum value of SAR (measured) = 0.073 W/kg

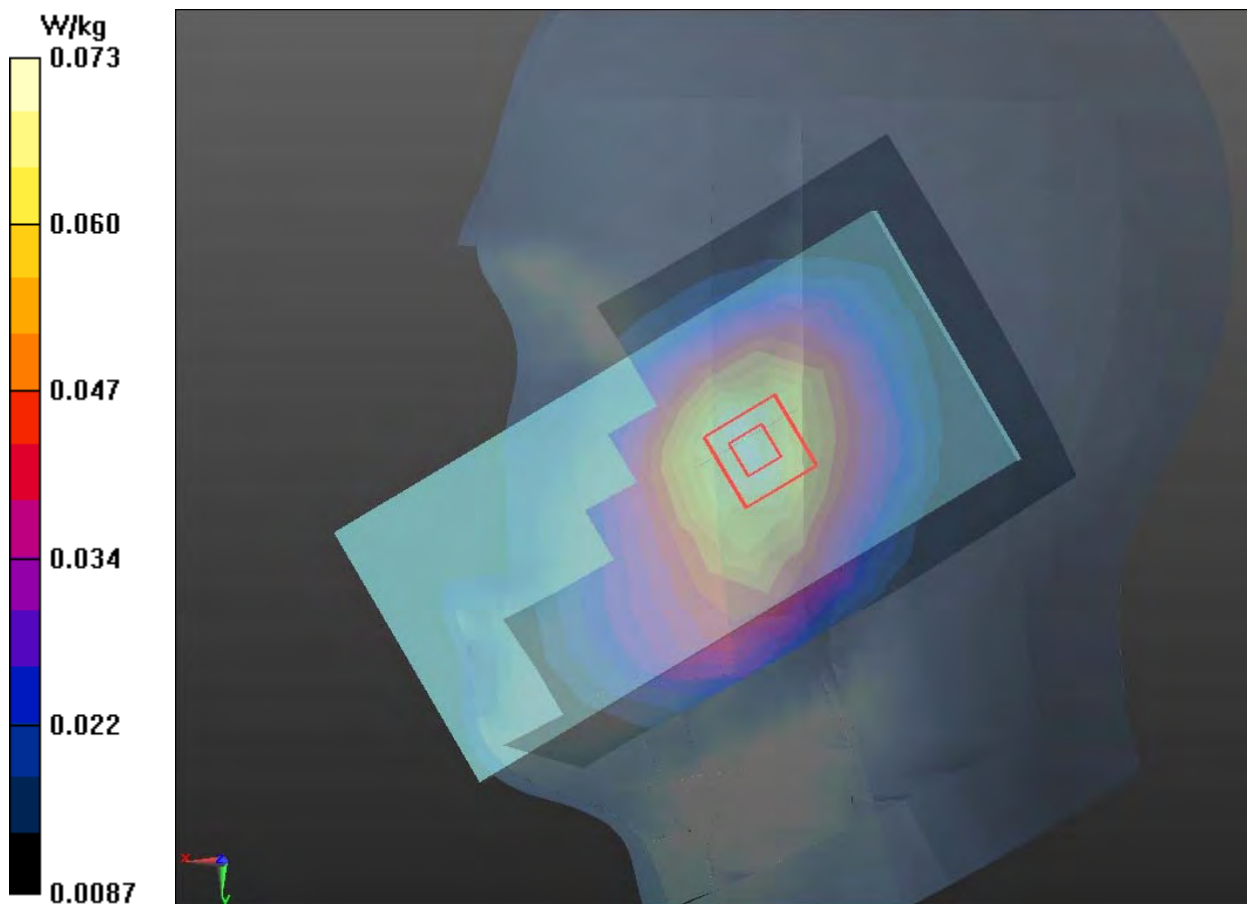

Plot 40 LTE Band 12 1RB Back Side Middle (Distance 15mm)

Date: 11/12/2020

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.848$ S/m; $\epsilon_r = 42.763$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.78, 9.78, 9.78); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Back Side Middle/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0700 W/kg


Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.081 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.0930 W/kg

SAR(1 g) = 0.105 W/kg; SAR(10 g) = 0.076 W/kg

Maximum value of SAR (measured) = 0.121 W/kg

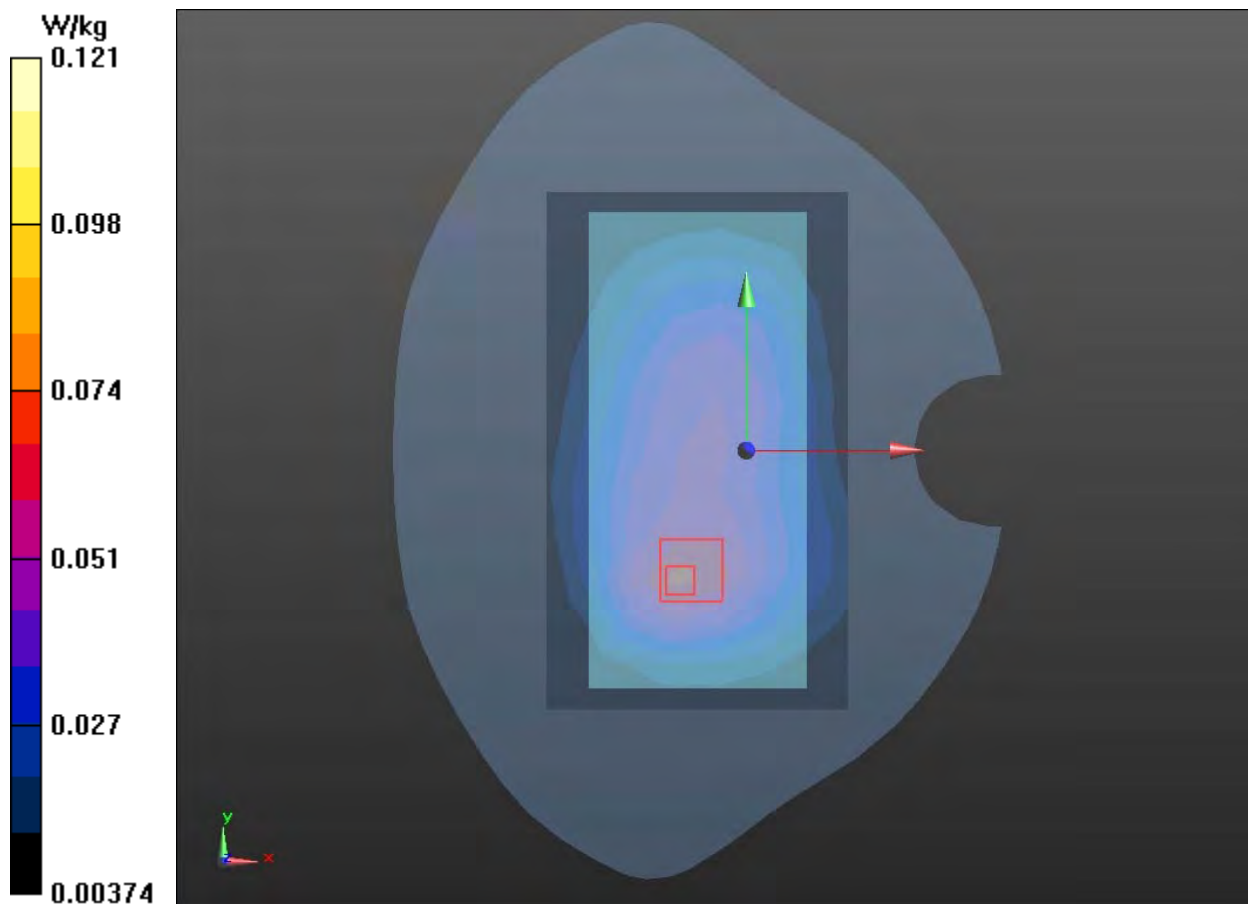

Plot 41 LTE Band 12 1RB Right Edge Middle (Distance 10mm)

Date: 11/12/2020

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.848$ S/m; $\epsilon_r = 42.763$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.78, 9.78, 9.78); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Right Edge Middle/Area Scan (4x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.130 W/kg


Right Edge Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.36 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.173 W/kg

SAR(1 g) = 0.165 W/kg; SAR(10 g) = 0.107 W/kg

Maximum value of SAR (measured) = 0.195 W/kg

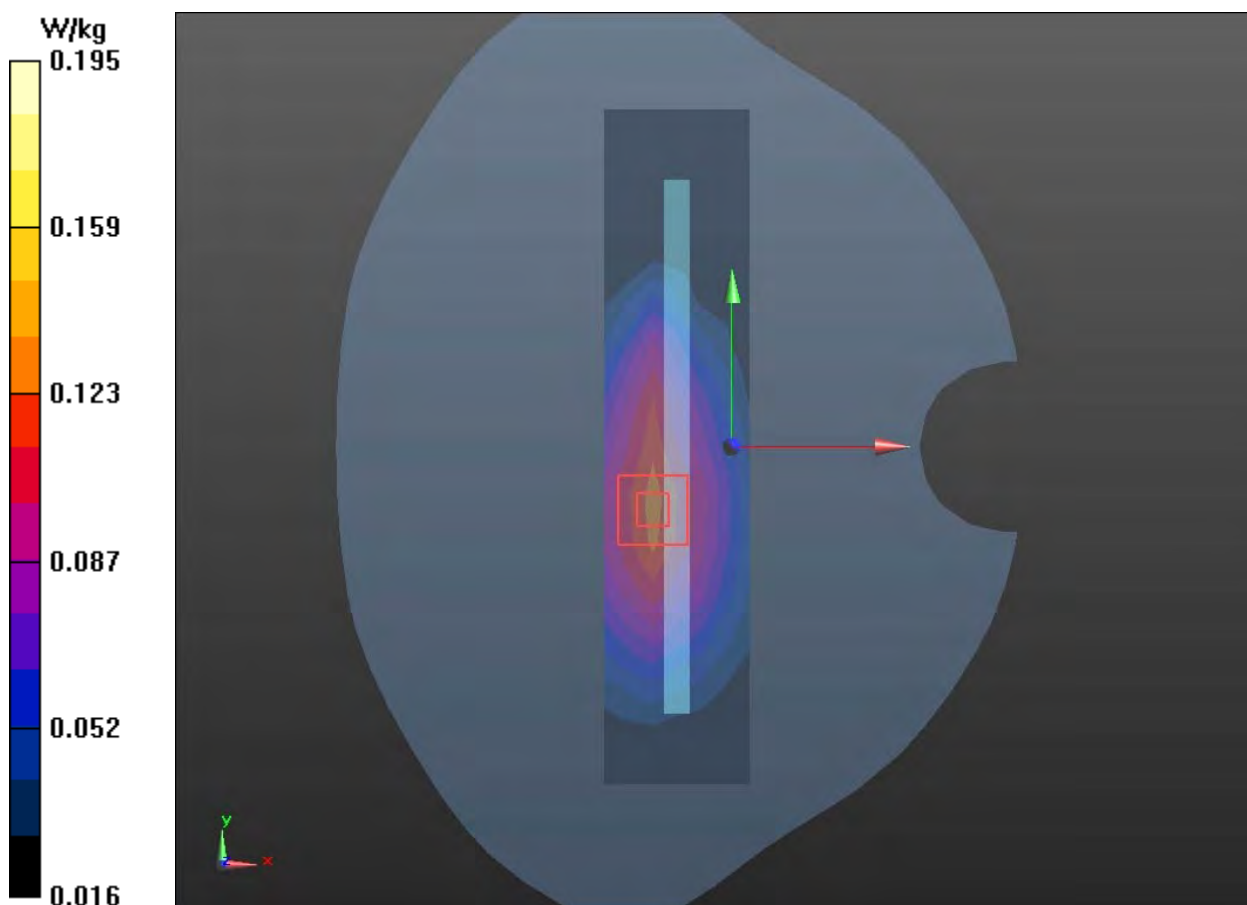

Plot 42 LTE Band 38 1RB Left Cheek Middle

Date: 11/10/2020

Communication System: UID 0, LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.973$ S/m; $\epsilon_r = 38.008$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.26, 7.26, 7.26); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Left Cheek Middle/Area Scan (10x18x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.111 W/kg


Left Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.458 V/m; Power Drift = -0.167 dB

Peak SAR (extrapolated) = 0.196 W/kg

SAR(1 g) = 0.095 W/kg; SAR(10 g) = 0.047 W/kg

Maximum value of SAR (measured) = 0.098 W/kg

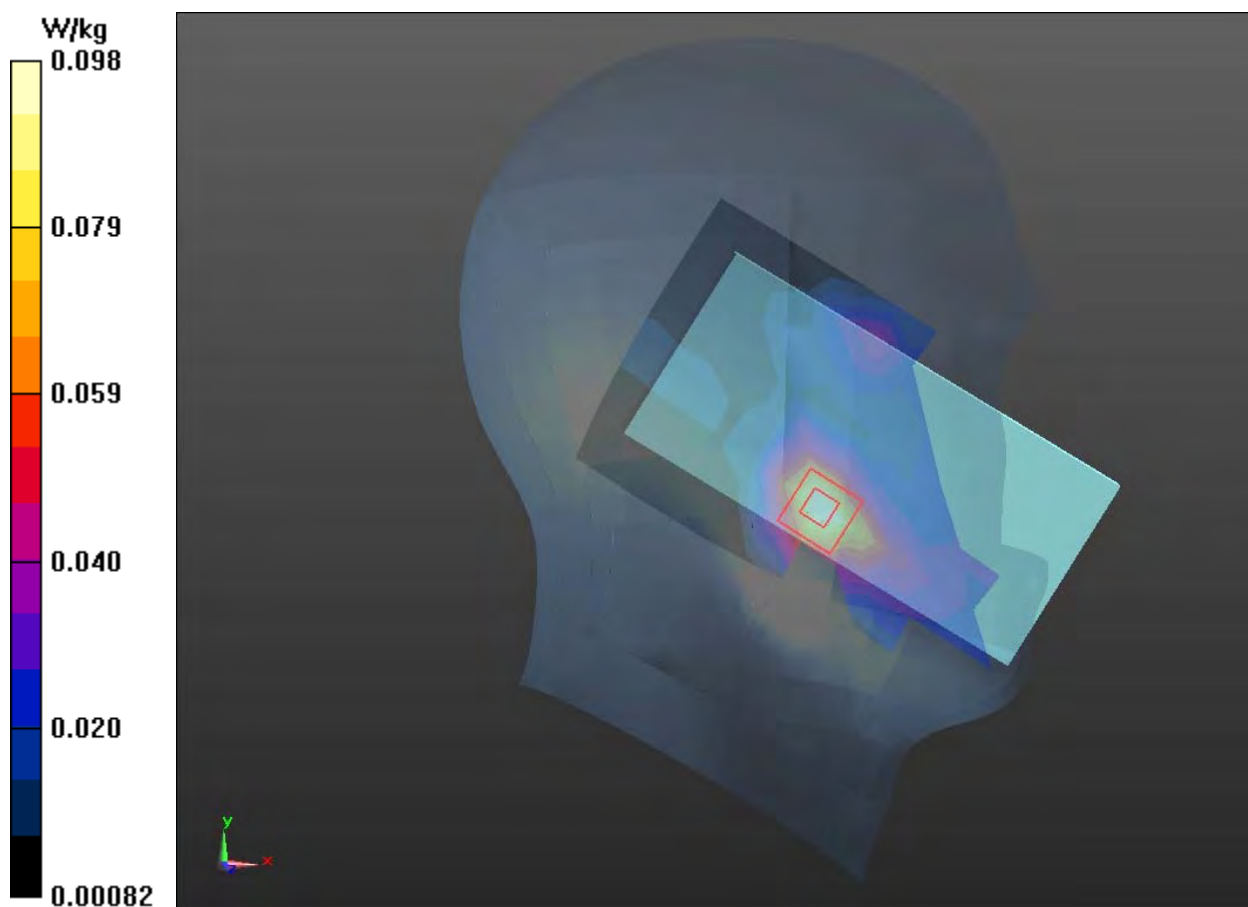

Plot 43 LTE Band 38 1RB Back Side Middle (Distance 15mm)

Date: 11/10/2020

Communication System: UID 0, LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.973$ S/m; $\epsilon_r = 38.008$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.26, 7.26, 7.26); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Back Side Middle/Area Scan(10x18x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.199 W/kg


Back Side Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.345 V/m; Power Drift = -0.030 dB

Peak SAR (extrapolated) = 0.411 W/kg

SAR(1 g) = 0.193 W/kg; SAR(10 g) = 0.096 W/kg

Maximum value of SAR (measured) = 0.211 W/kg

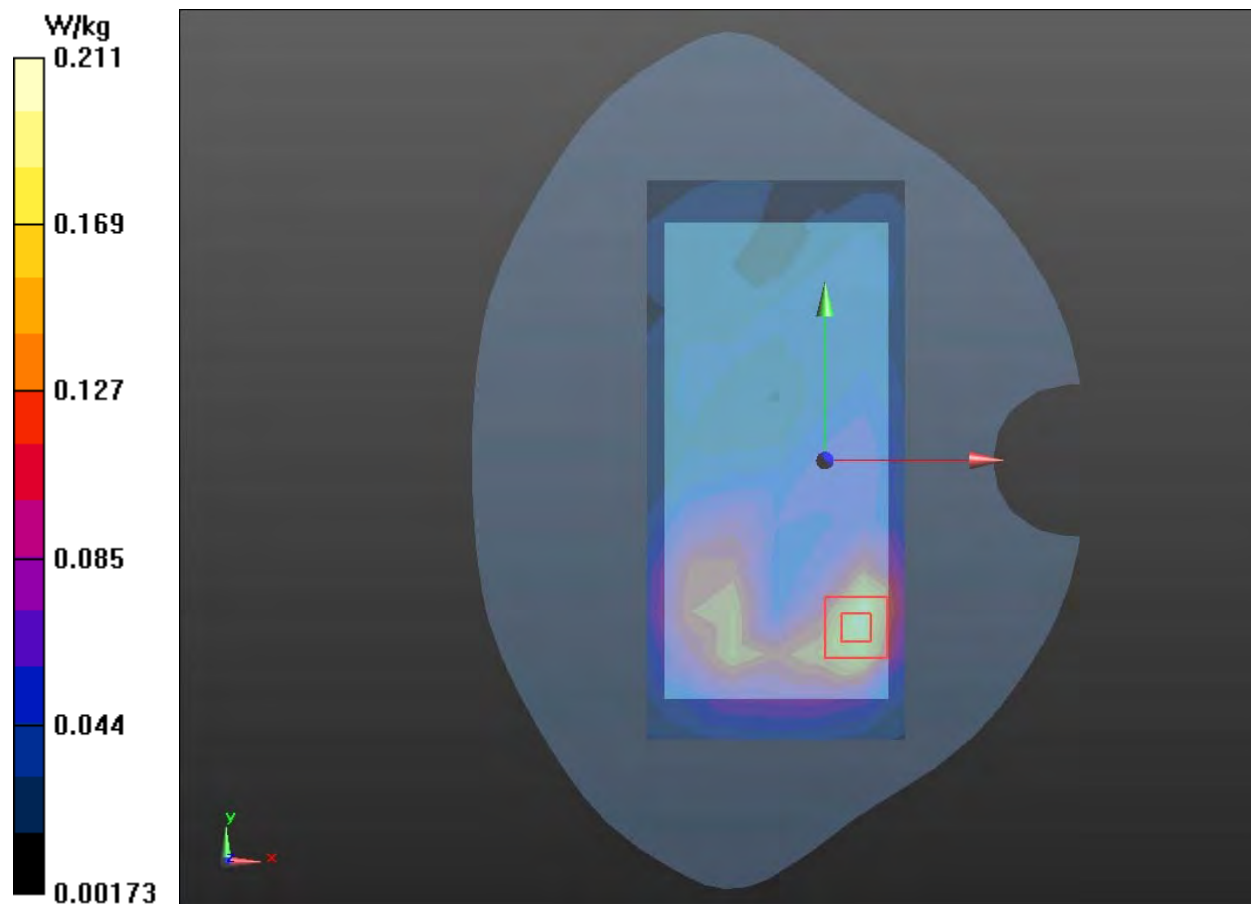

Plot 44 LTE Band 38 1RB Bottom Edge Middle (Distance 10mm)

Date: 11/10/2020

Communication System: UID 0, LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.973$ S/m; $\epsilon_r = 38.008$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.26, 7.26, 7.26); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Bottom Edge Middle/Area Scan (5x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.394 W/kg


Bottom Edge Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.84 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.989 W/kg

SAR(1 g) = 0.481 W/kg; SAR(10 g) = 0.238 W/kg

Maximum value of SAR (measured) = 0.535 W/kg

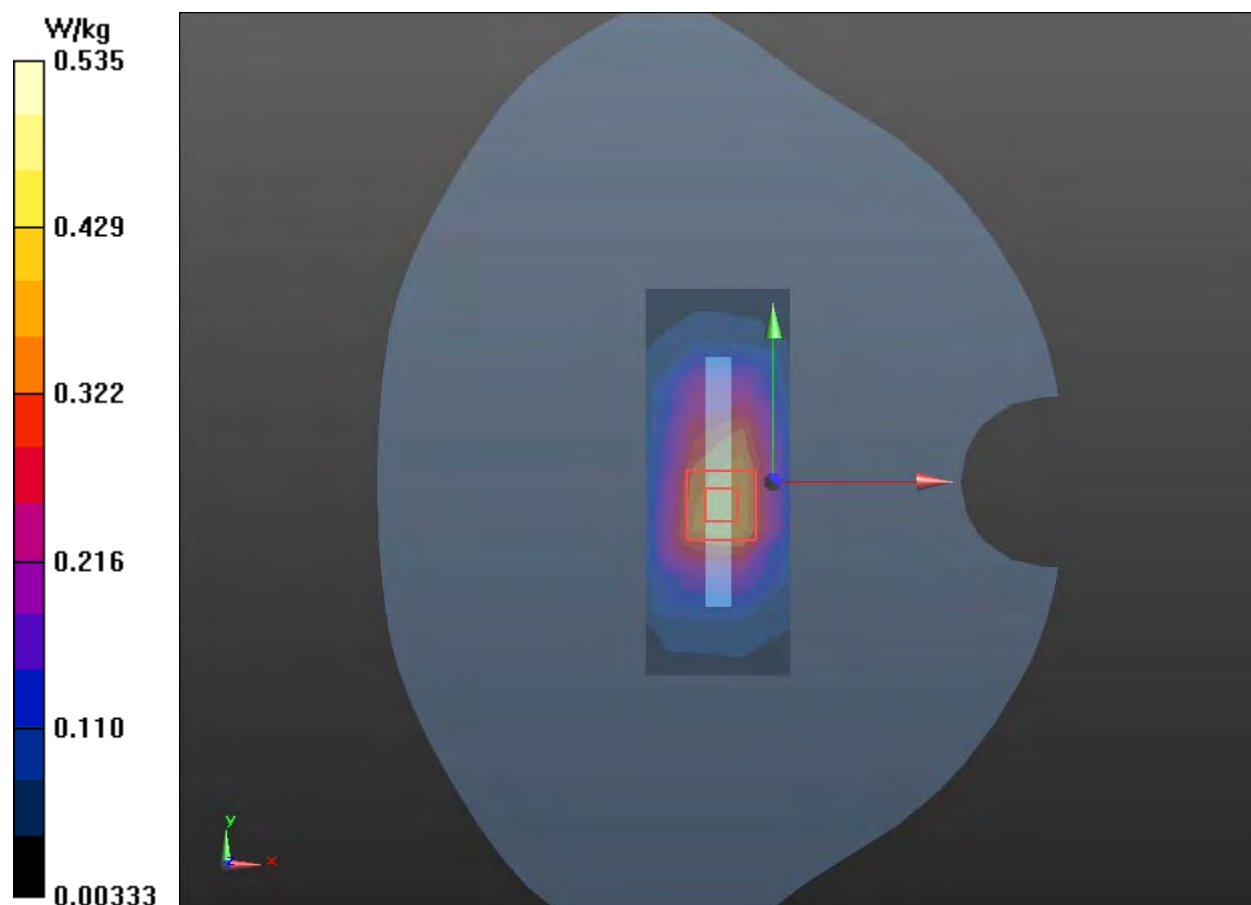

Plot 45 LTE Band 41 1RB Left Cheek Low

Date: 11/10/2020

Communication System: UID 0, LTE (0); Frequency: 2506 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2506$ MHz; $\sigma = 1.871$ S/m; $\epsilon_r = 38.365$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.26, 7.26, 7.26); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Left Cheek Low/Area Scan (10x18x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.116 W/kg


Left Cheek Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.587 V/m; Power Drift = -0.027 dB

Peak SAR (extrapolated) = 0.203 W/kg

SAR(1 g) = 0.102 W/kg; SAR(10 g) = 0.052 W/kg

Maximum value of SAR (measured) = 0.112 W/kg

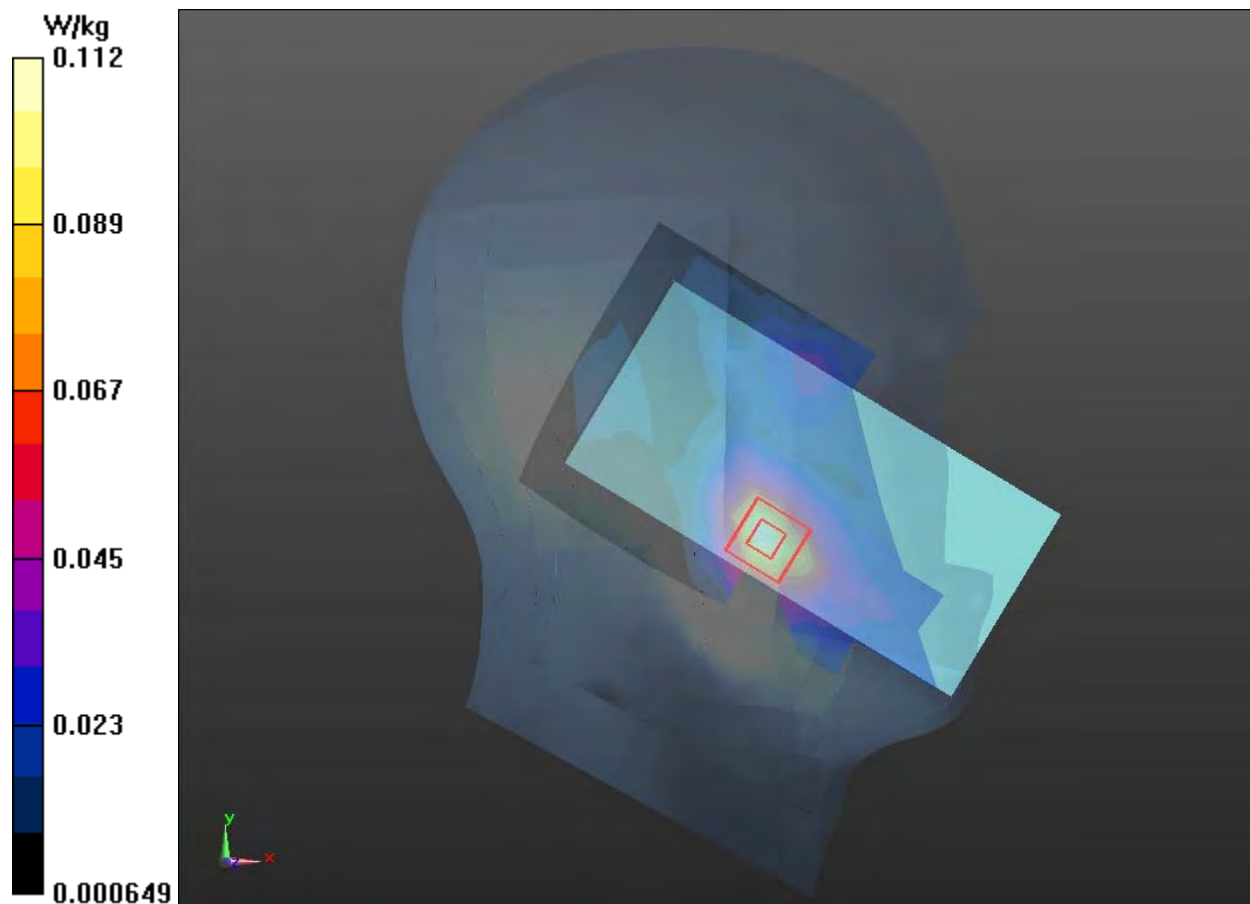

Plot 46 LTE Band 41 1RB Back Side Low (Distance 15mm)

Date: 11/10/2020

Communication System: UID 0, LTE (0); Frequency: 2506 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2506$ MHz; $\sigma = 1.871$ S/m; $\epsilon_r = 38.365$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.26, 7.26, 7.26); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Back Side Low/Area Scan (10x18x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.153 W/kg


Back Side Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.752 V/m; Power Drift = 0.064 dB

Peak SAR (extrapolated) = 0.338 W/kg

SAR(1 g) = 0.167 W/kg; SAR(10 g) = 0.085 W/kg

Maximum value of SAR (measured) = 0.183 W/kg

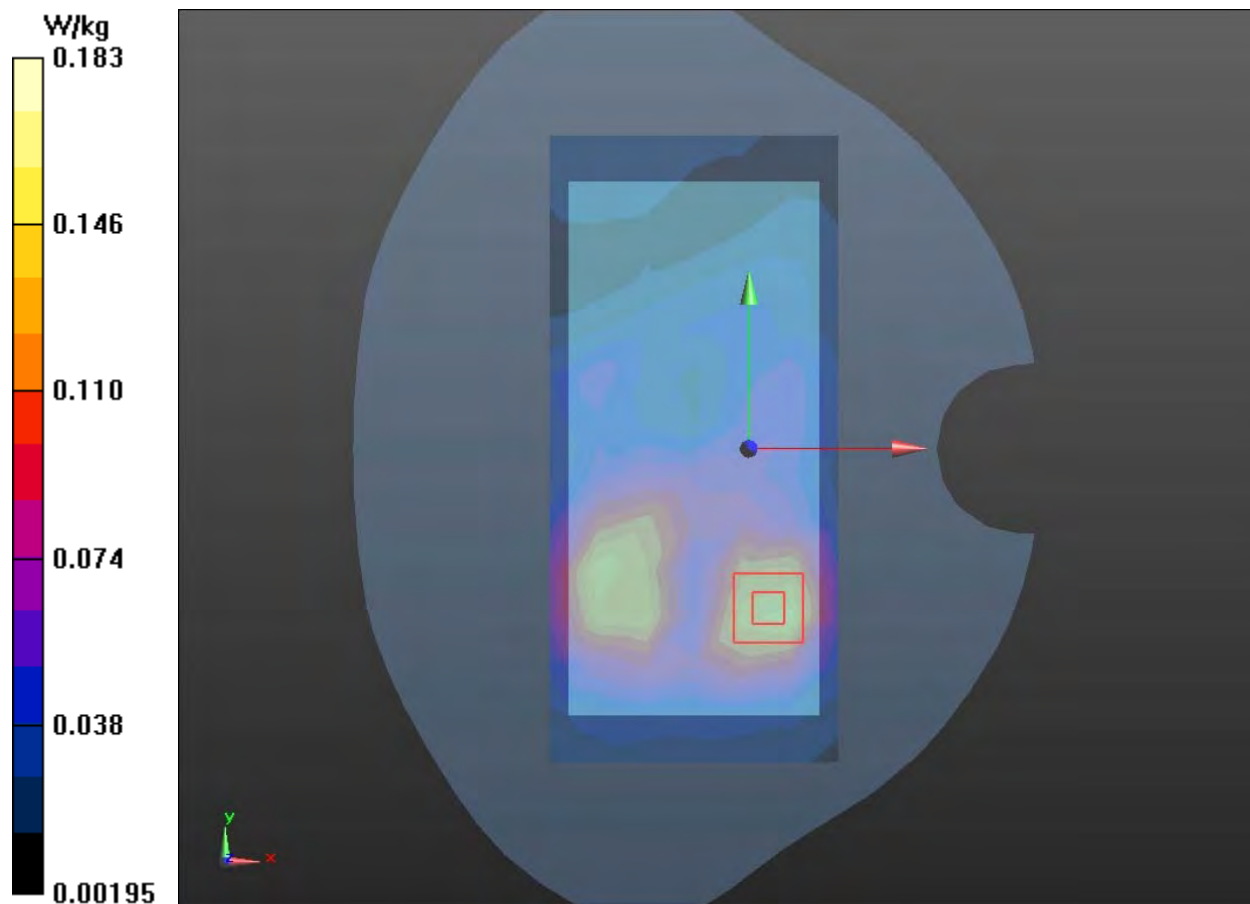

Plot 47 LTE Band 41 50%RB Back Side Low (Distance 10mm)

Date: 11/10/2020

Communication System: UID 0, LTE (0); Frequency: 2506 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2506$ MHz; $\sigma = 1.871$ S/m; $\epsilon_r = 38.365$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.26, 7.26, 7.26); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Back Side Low/Area Scan(10x18x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.229 W/kg


Back Side Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.808 V/m; Power Drift = 0.023 dB

Peak SAR (extrapolated) = 0.581 W/kg

SAR(1 g) = 0.269 W/kg; SAR(10 g) = 0.131 W/kg

Maximum value of SAR (measured) = 0.294 W/kg

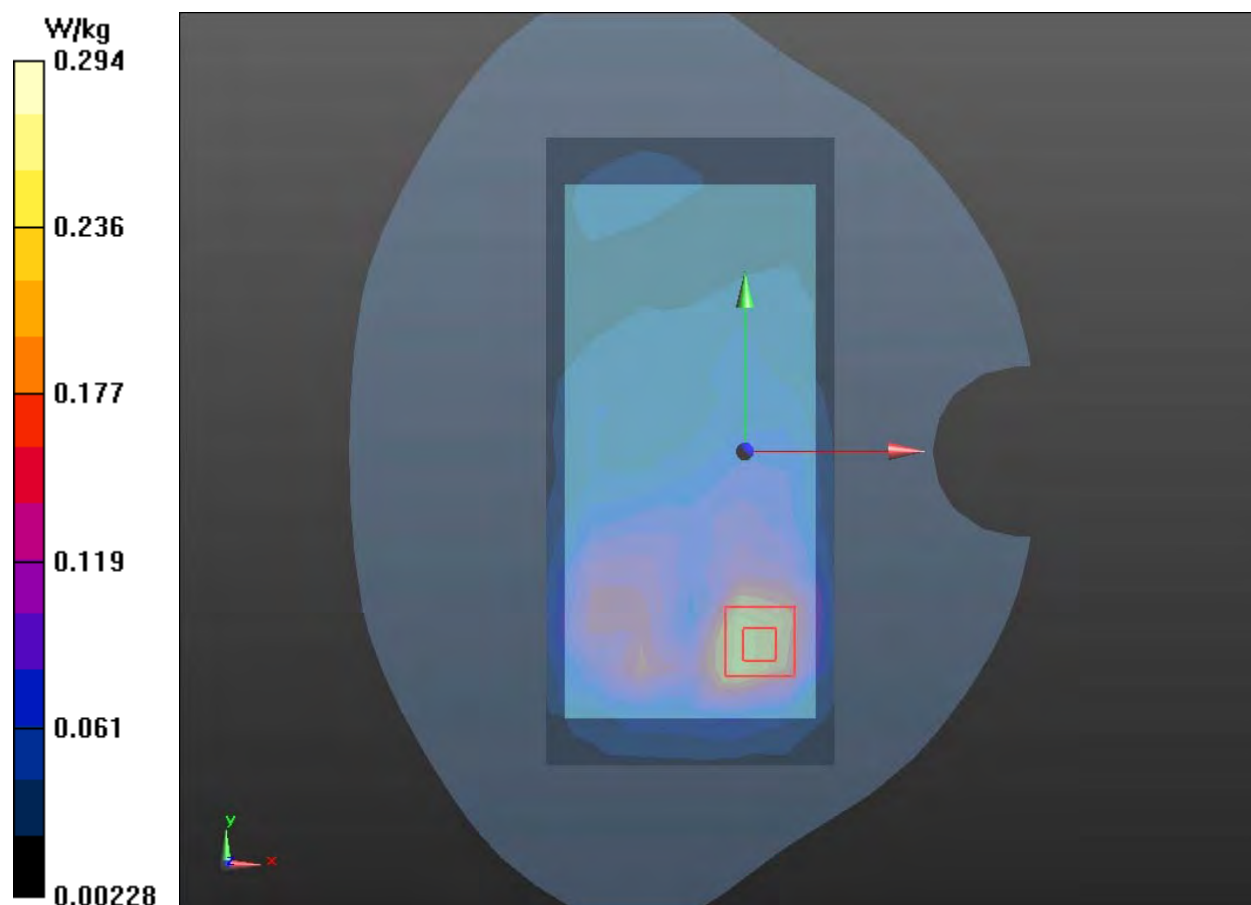

Plot 48 LTE Band 66 1RB Right Cheek Low

Date: 9/29/2020

Communication System: UID 0, LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.303$ S/m; $\epsilon_r = 39.467$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.25, 8.25, 8.25); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Right Cheek Low/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0985 W/kg


Right Cheek Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.523 V/m; Power Drift = 0.083 dB

Peak SAR (extrapolated) = 0.142 W/kg

SAR(1 g) = 0.099 W/kg; SAR(10 g) = 0.063 W/kg

Maximum value of SAR (measured) = 0.108 W/kg

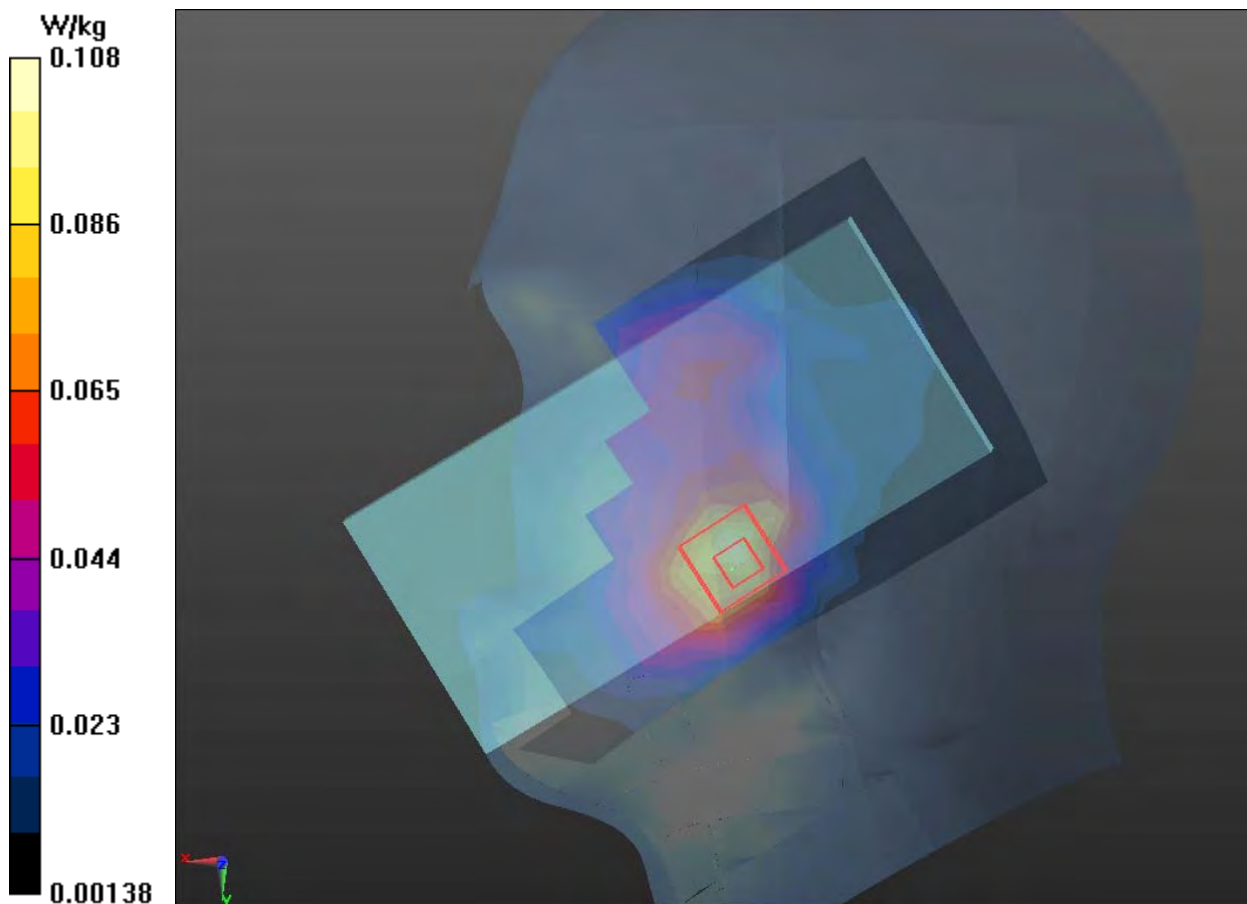

Plot 49 LTE Band 66 1RB Back Side Middle (Distance 15mm)

Date: 9/29/2020

Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.323$ S/m; $\epsilon_r = 39.378$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.25, 8.25, 8.25); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Back Side Middle/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.230 W/kg


Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.64 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.315 W/kg

SAR(1 g) = 0.215 W/kg; SAR(10 g) = 0.141 W/kg

Maximum value of SAR (measured) = 0.229 W/kg

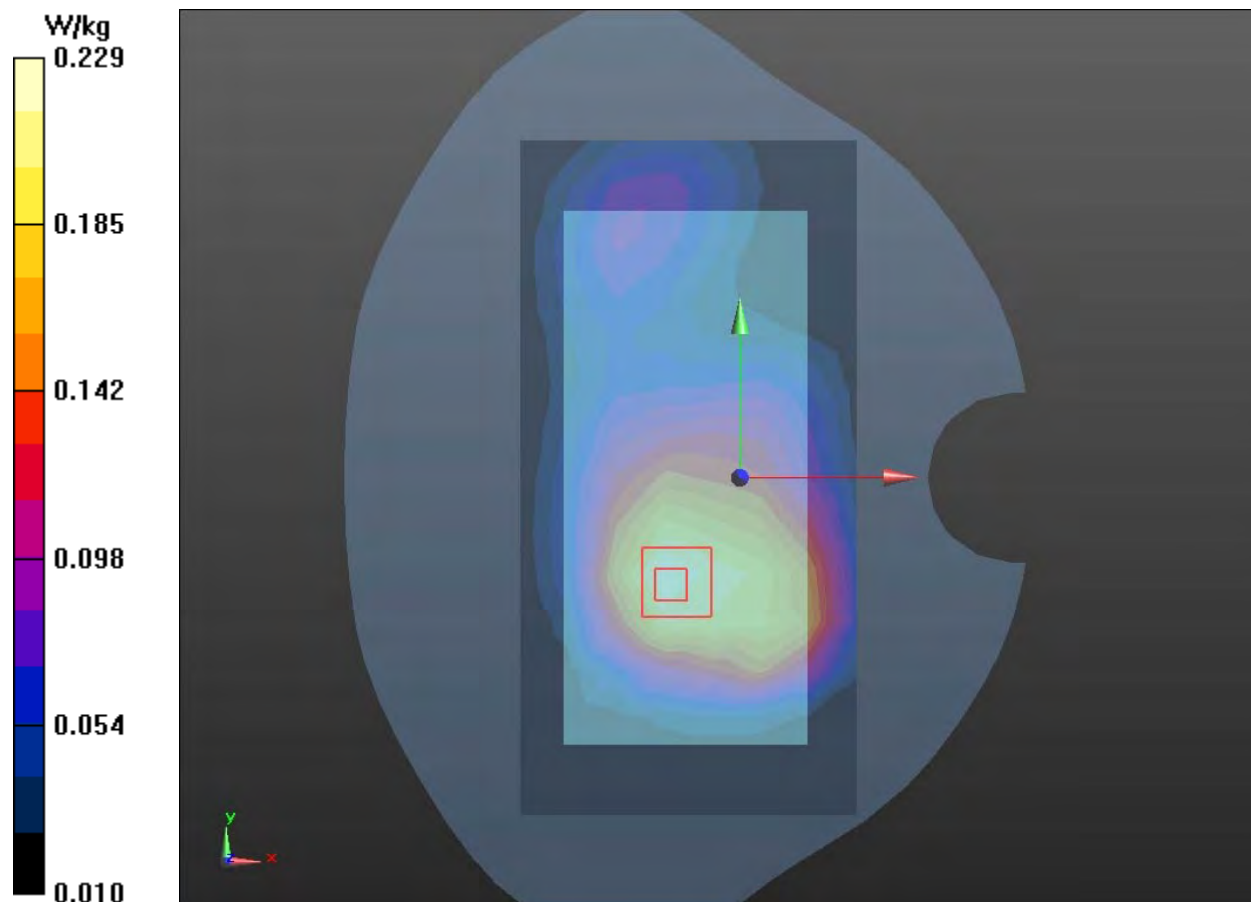

Plot 50 LTE Band 66 50%RB Bottom Edge High (Distance 10mm)

Date: 9/29/2020

Communication System: UID 0, LTE (0); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1770$ MHz; $\sigma = 1.341$ S/m; $\epsilon_r = 39.287$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.25, 8.25, 8.25); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Bottom Edge High/Area Scan (4x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.508 W/kg


Bottom Edge High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.16 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.598 W/kg; SAR(10 g) = 0.344 W/kg

Maximum value of SAR (measured) = 0.656 W/kg

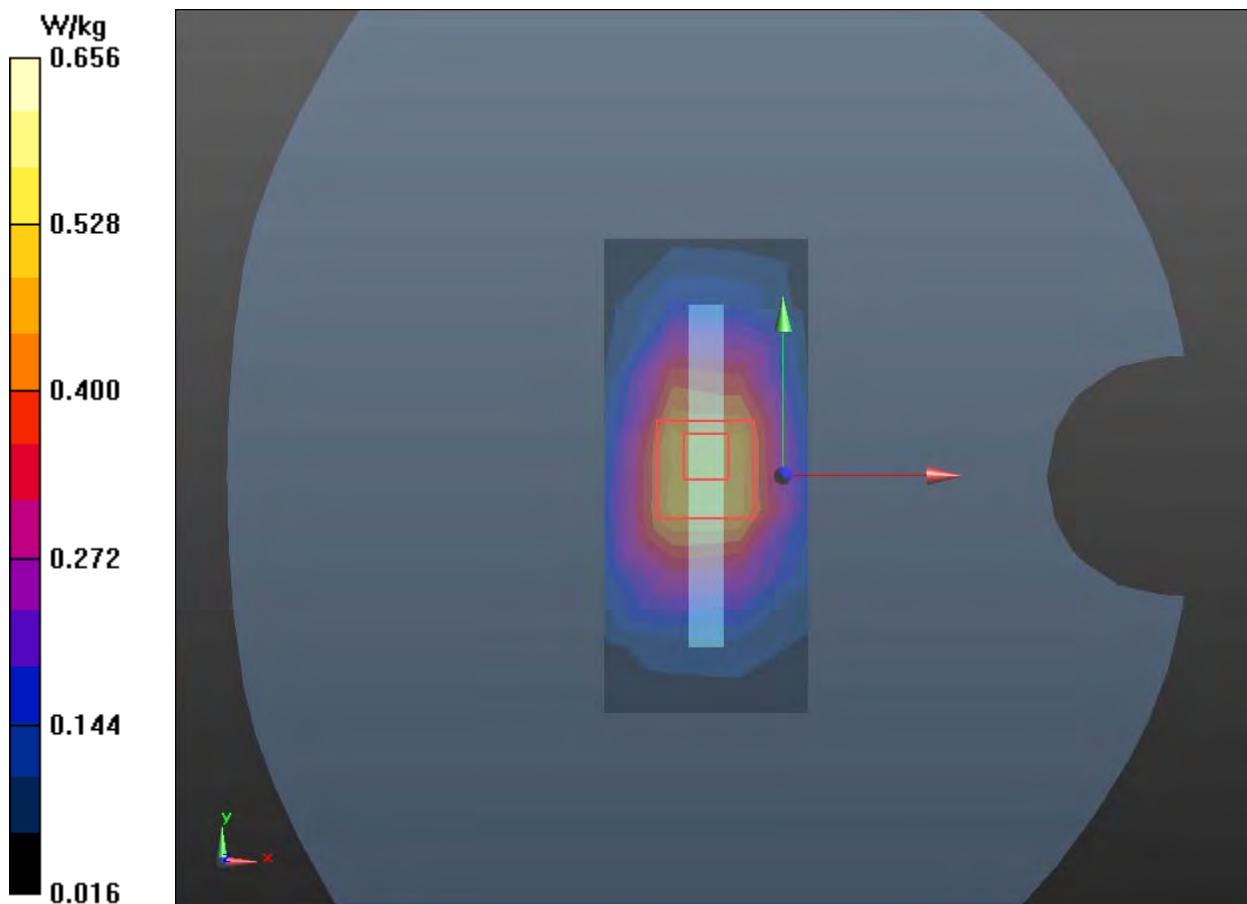

Second-Antenna

Plot 51 GSM 850 Left Cheek Middle

Date: 10/27/2020

Communication System: UID 0, GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 837$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 42.201$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.38, 9.38, 9.38); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Left Cheek Middle/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.496 W/kg


Left Cheek Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.612 V/m; Power Drift = 0.030 dB

Peak SAR (extrapolated) = 0.941 W/kg

SAR(1 g) = 0.454 W/kg; SAR(10 g) = 0.241 W/kg

Maximum value of SAR (measured) = 0.475 W/kg

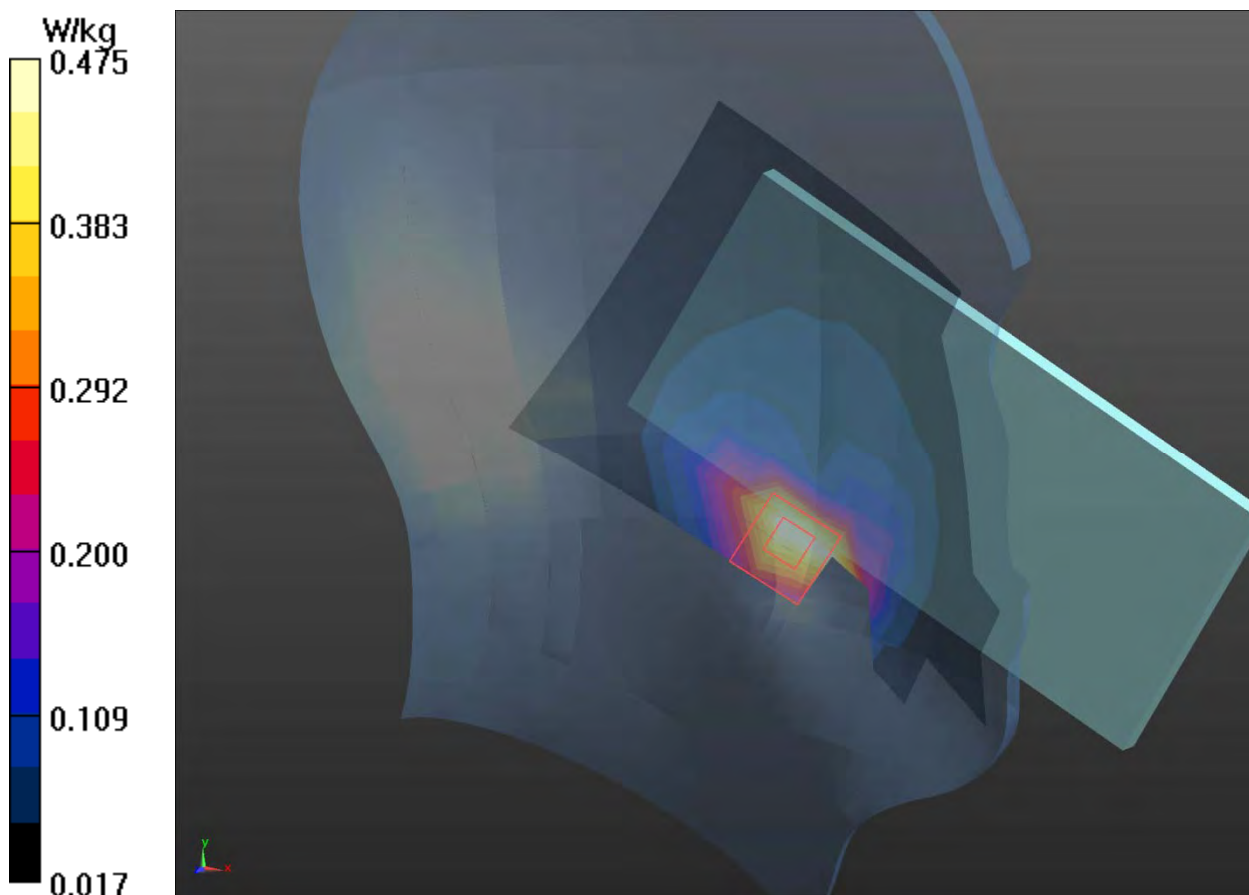

Plot 52 GSM 850 Front Side Middle (Distance 15mm)

Date: 10/27/2020

Communication System: UID 0, GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 837$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 42.201$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.38, 9.38, 9.38); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Front Side Middle/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.154 W/kg


Front Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.363 V/m; Power Drift = 0.055 dB

Peak SAR (extrapolated) = 0.223 W/kg

SAR(1 g) = 0.144 W/kg; SAR(10 g) = 0.091 W/kg

Maximum value of SAR (measured) = 0.156 W/kg

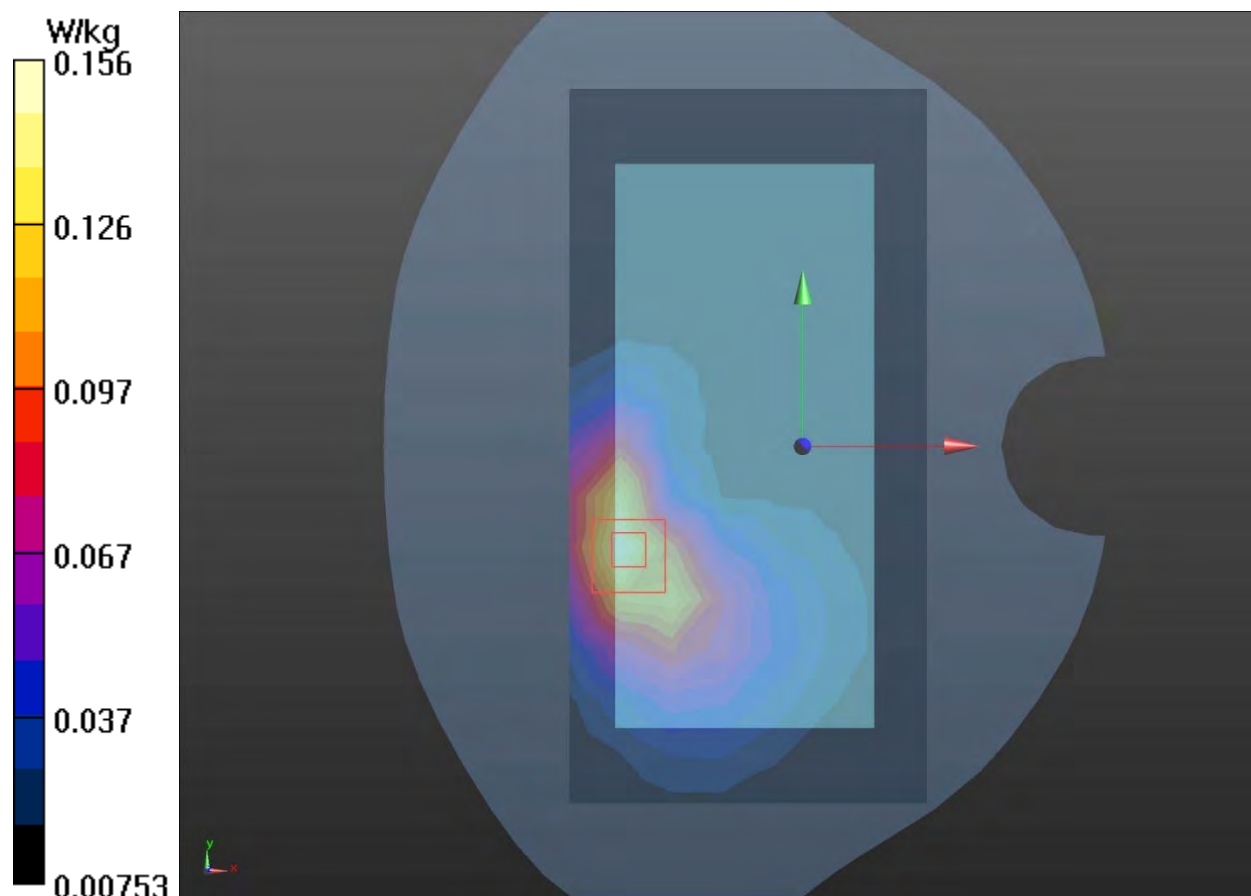

Plot 53 GSM 850 GPRS (2Txslots) Left Edge Middle (Distance 10mm)

Date: 10/27/2020

Communication System: UID 0, GPRS 2TX (0); Frequency: 836.6 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 837$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 42.201$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.38, 9.38, 9.38); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Left Edge Middle/Area Scan (4x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.359 W/kg


Left Edge Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.67 V/m; Power Drift = 0.022 dB

Peak SAR (extrapolated) = 0.606 W/kg

SAR(1 g) = 0.343 W/kg; SAR(10 g) = 0.190 W/kg

Maximum value of SAR (measured) = 0.383 W/kg

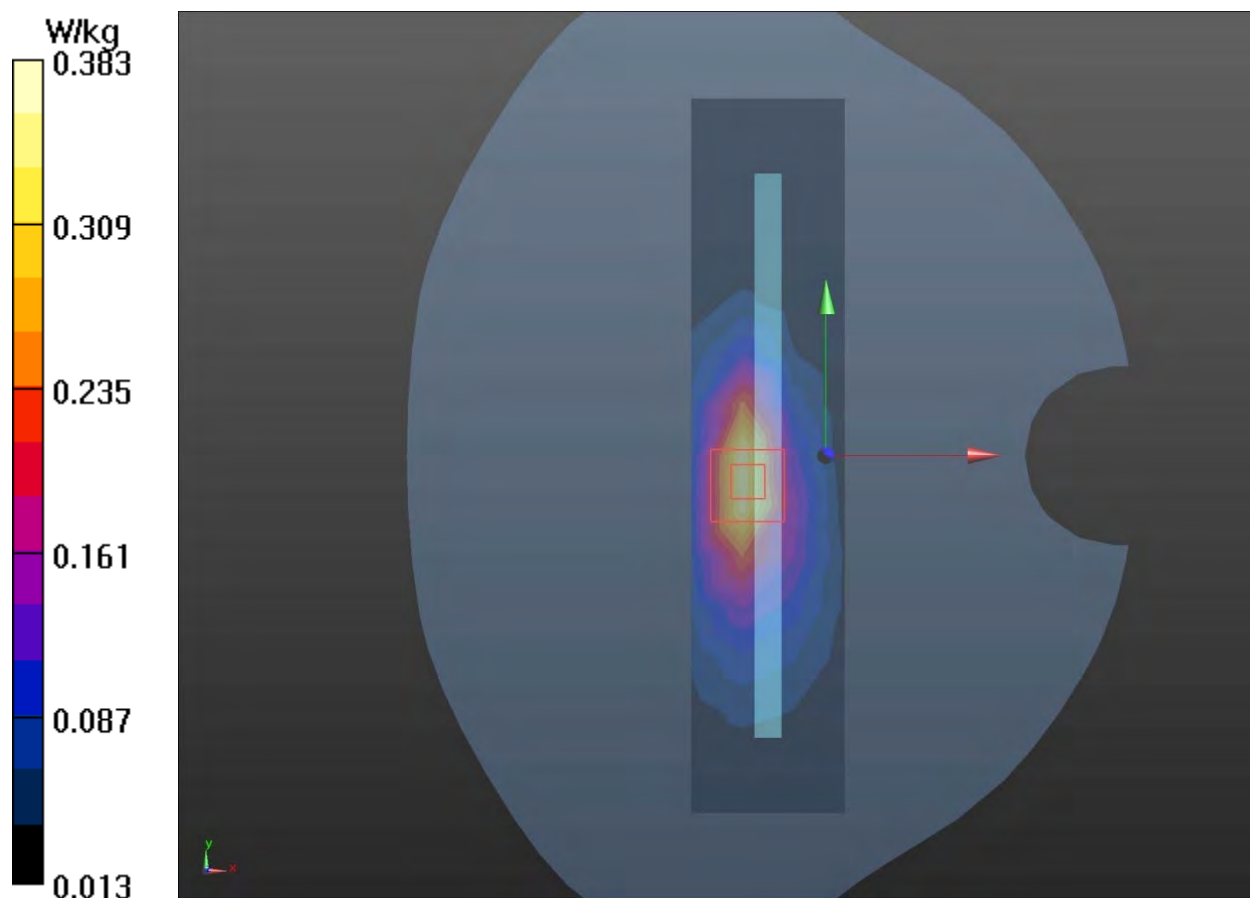

Plot 54 GSM 1900 Left Tilt Middle

Date: 10/27/2020

Communication System: UID 0, GSM1900 (0); Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 38.948$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.90, 7.90, 7.90); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Left Tilt Middle/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.506 W/kg


Left Tilt Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.34 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.974 W/kg

SAR(1 g) = 0.560 W/kg; SAR(10 g) = 0.301 W/kg

Maximum value of SAR (measured) = 0.629 W/kg

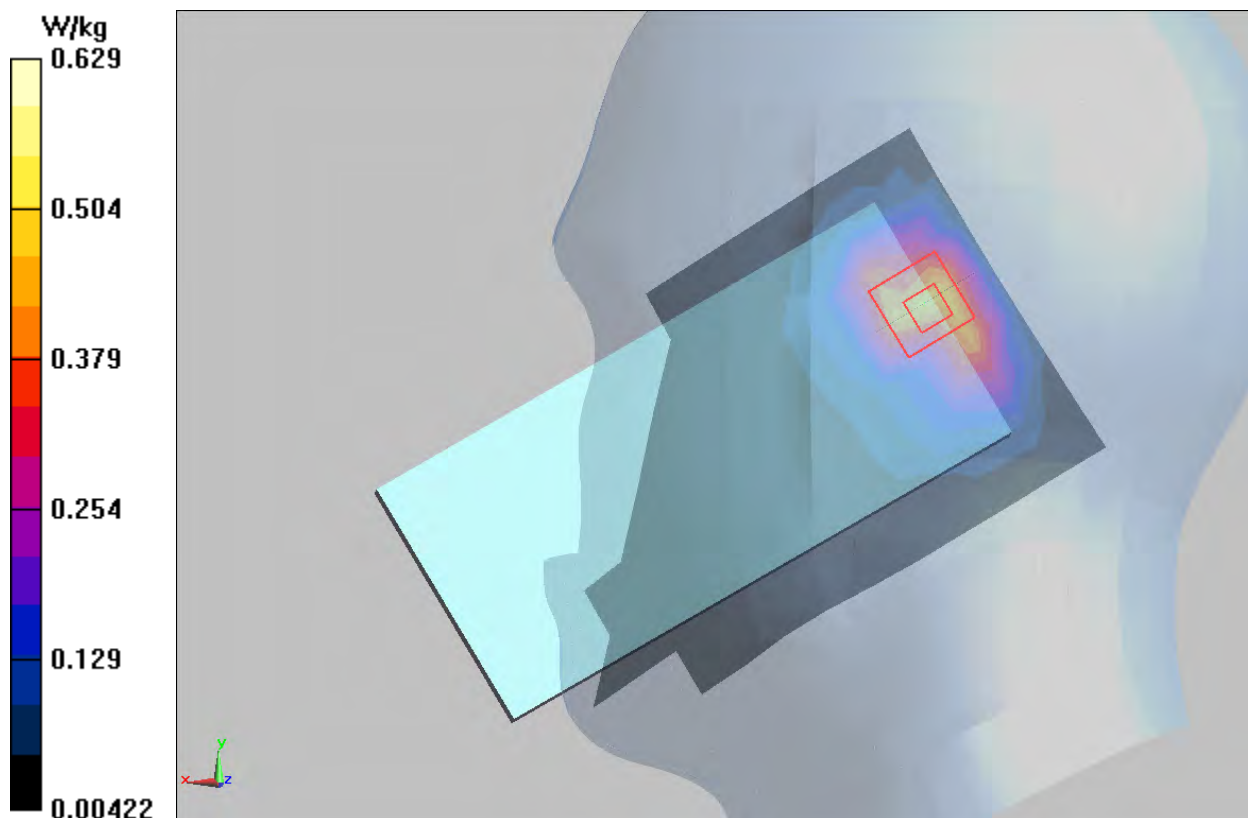

Plot 55 GSM 1900 Back Side Middle (Distance 15mm)

Date: 10/27/2020

Communication System: UID 0, GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 38.948$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.90, 7.90, 7.90); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Back Side Middle/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.167 W/kg


Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.894 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.262 W/kg

SAR(1 g) = 0.163 W/kg; SAR(10 g) = 0.098 W/kg

Maximum value of SAR (measured) = 0.176 W/kg

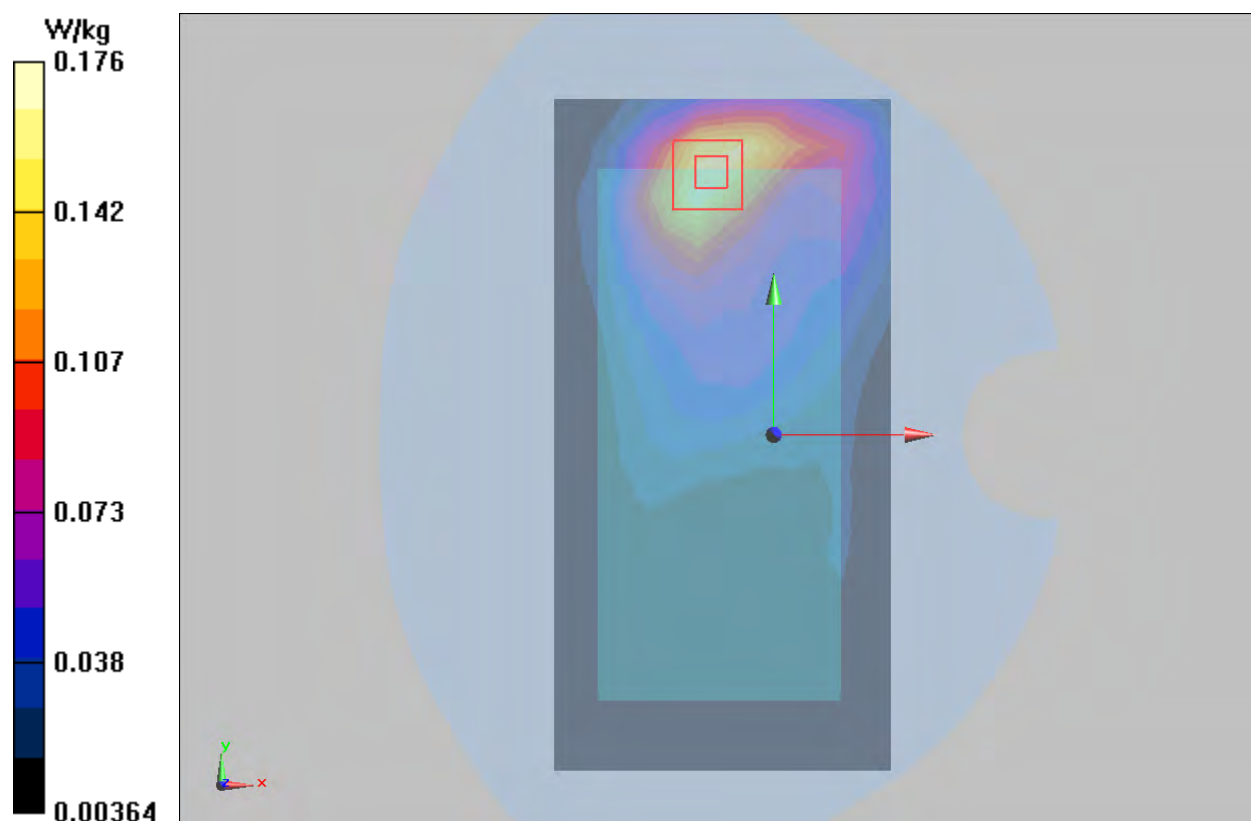

Plot 56 GSM 1900 GPRS (2Txslots) Top Edge Middle (Distance 10mm)

Date: 10/27/2020

Communication System: UID 0, GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 38.948$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.90, 7.90, 7.90); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Top Edge Middle/Area Scan (4x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.363 W/kg


Top Edge Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.01 V/m; Power Drift = 0.028 dB

Peak SAR (extrapolated) = 0.598 W/kg

SAR(1 g) = 0.357 W/kg; SAR(10 g) = 0.199 W/kg

Maximum value of SAR (measured) = 0.396 W/kg

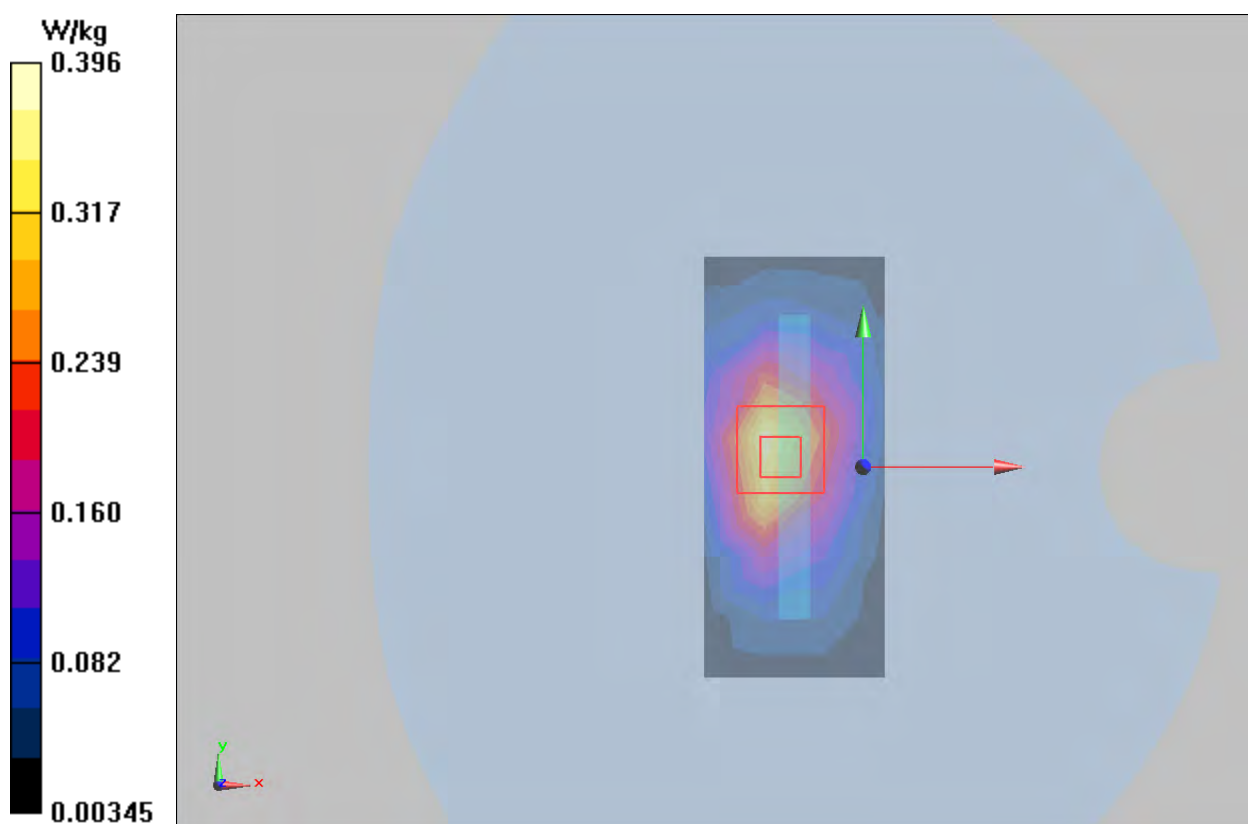

Plot 57 UMTS Band II Left Tilt Middle

Date: 10/27/2020

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 38.948$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.90, 7.90, 7.90); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Left Tilt Middle/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.717 W/kg


Left Tilt Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.73 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 0.792 W/kg; SAR(10 g) = 0.420 W/kg

Maximum value of SAR (measured) = 0.879 W/kg

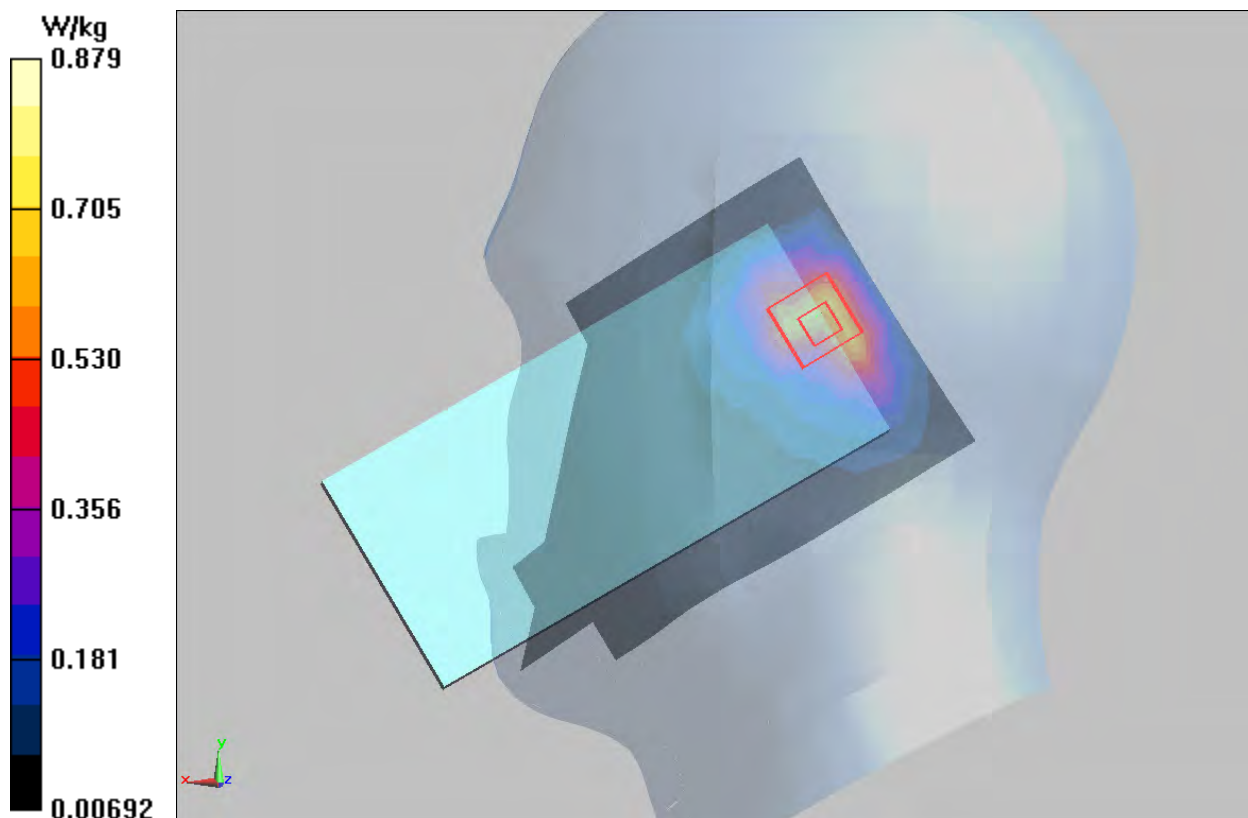

Plot 58 UMTS Band II Back Side Middle (Distance 15mm)

Date: 10/27/2020

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 38.948$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.90, 7.90, 7.90); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Back Side Middle/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.300 W/kg


Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.907 V/m; Power Drift = 0.026 dB

Peak SAR (extrapolated) = 0.475 W/kg

SAR(1 g) = 0.292 W/kg; SAR(10 g) = 0.176 W/kg

Maximum value of SAR (measured) = 0.309 W/kg

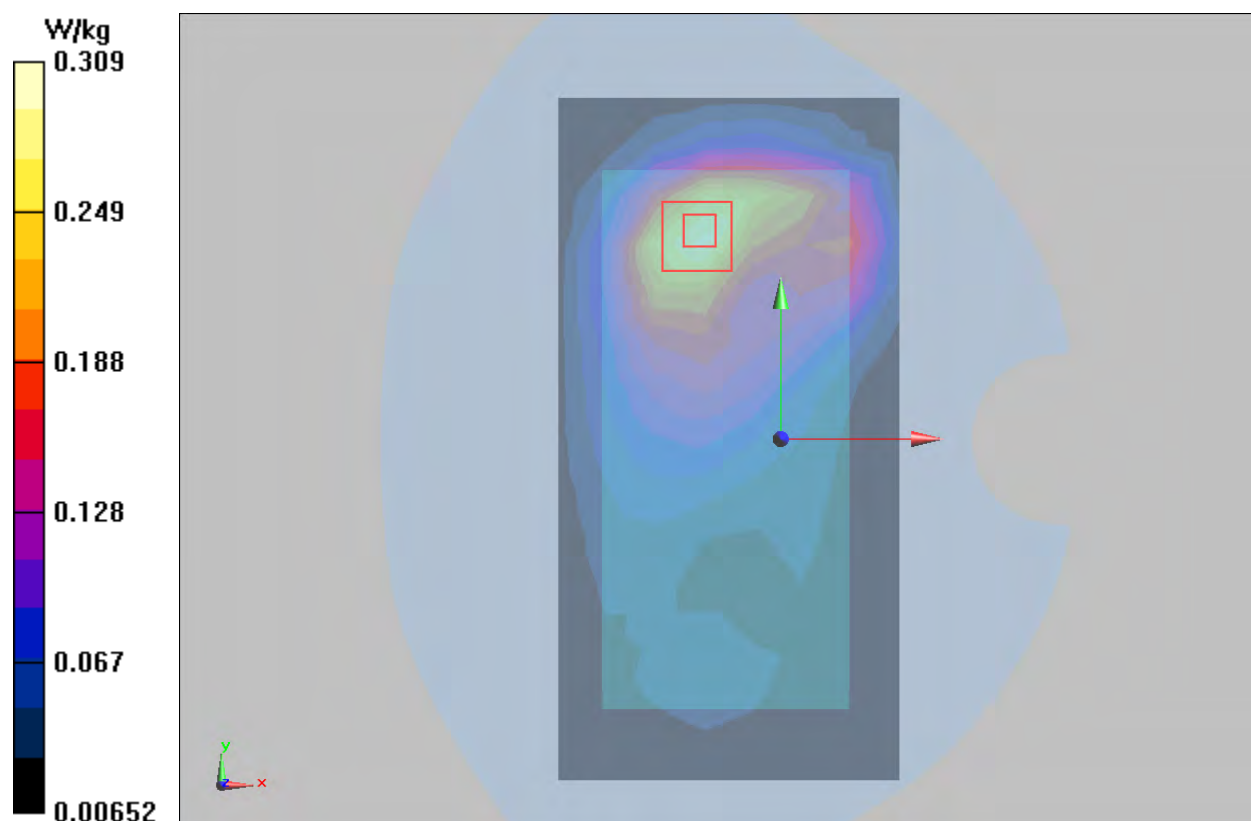

Plot 59 UMTS Band II Top Edge Middle (Distance 10mm)

Date: 10/27/2020

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 38.948$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.90, 7.90, 7.90); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Top Edge Middle/Area Scan (4x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.427 W/kg


Top Edge Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.86 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.843 W/kg

SAR(1 g) = 0.498 W/kg; SAR(10 g) = 0.278 W/kg

Maximum value of SAR (measured) = 0.556 W/kg

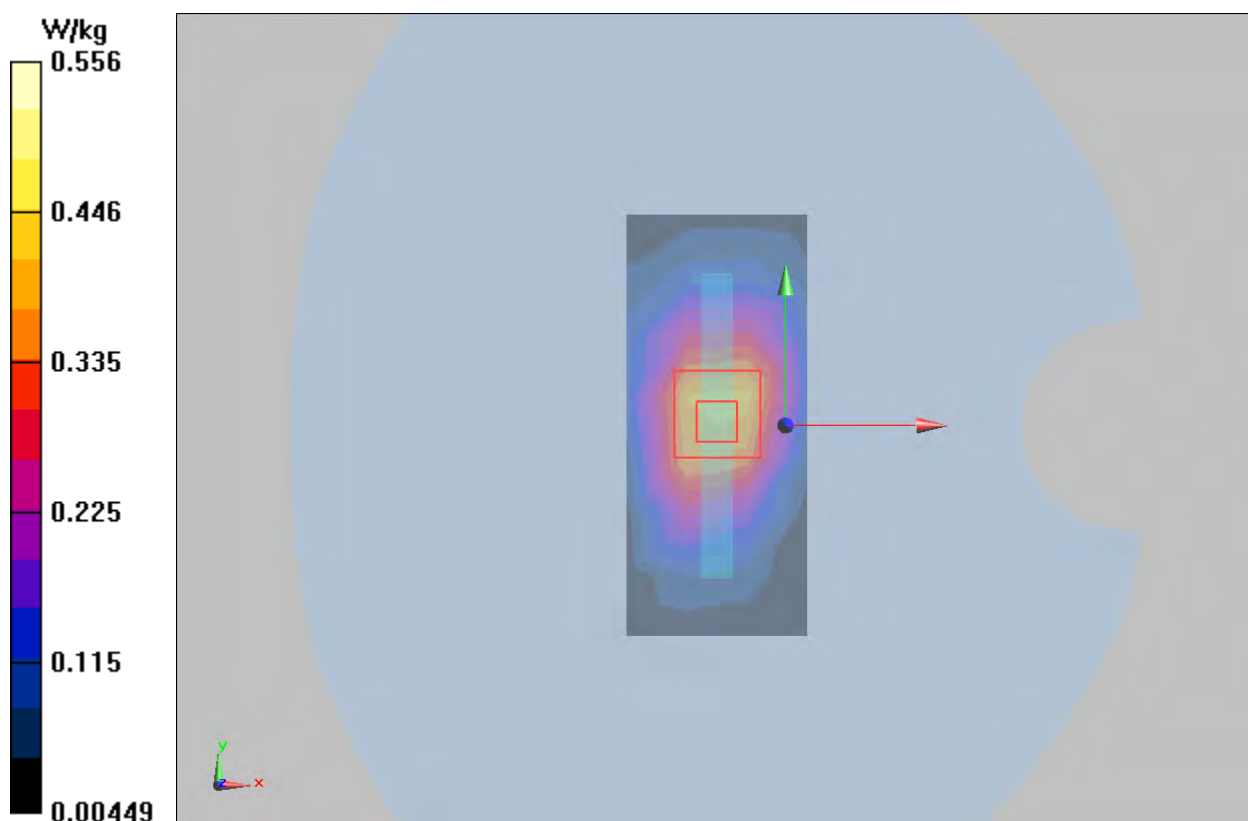

Plot 60 UMTS Band IV Right Tilt Middle

Date: 9/28/2020

Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.312$ S/m; $\epsilon_r = 39.365$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.25, 8.25, 8.25); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Right Tilt Middle/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.909 W/kg


Right Tilt Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.51 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.64 W/kg

SAR(1 g) = 0.784 W/kg; SAR(10 g) = 0.386 W/kg

Maximum value of SAR (measured) = 0.862 W/kg

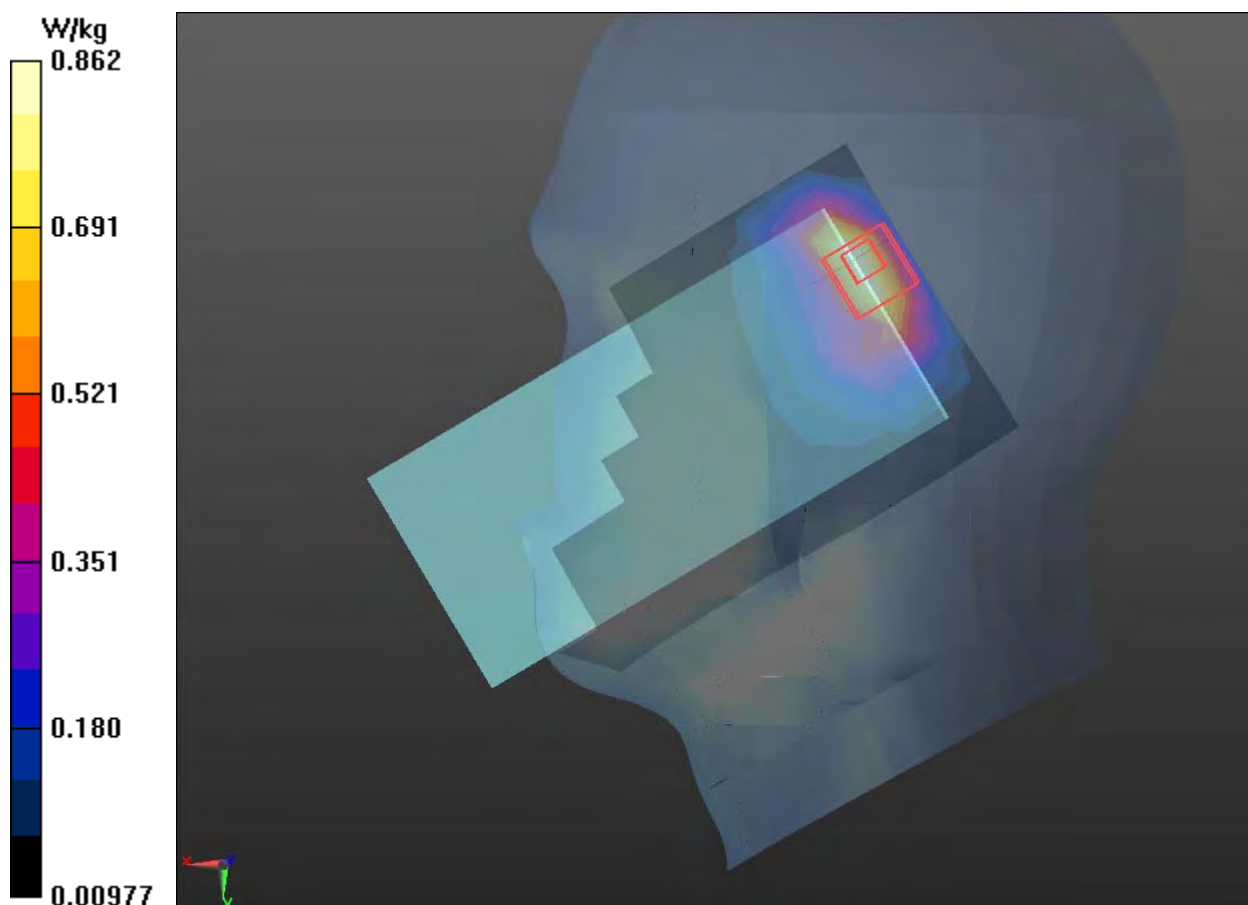

Plot 61 UMTS Band IV Back Side Middle (Distance 15mm)

Date: 9/28/2020

Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.312$ S/m; $\epsilon_r = 39.365$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.25, 8.25, 8.25); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Back Side Middle/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.386 W/kg


Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.327 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.545 W/kg

SAR(1 g) = 0.355 W/kg; SAR(10 g) = 0.224 W/kg

Maximum value of SAR (measured) = 0.378 W/kg

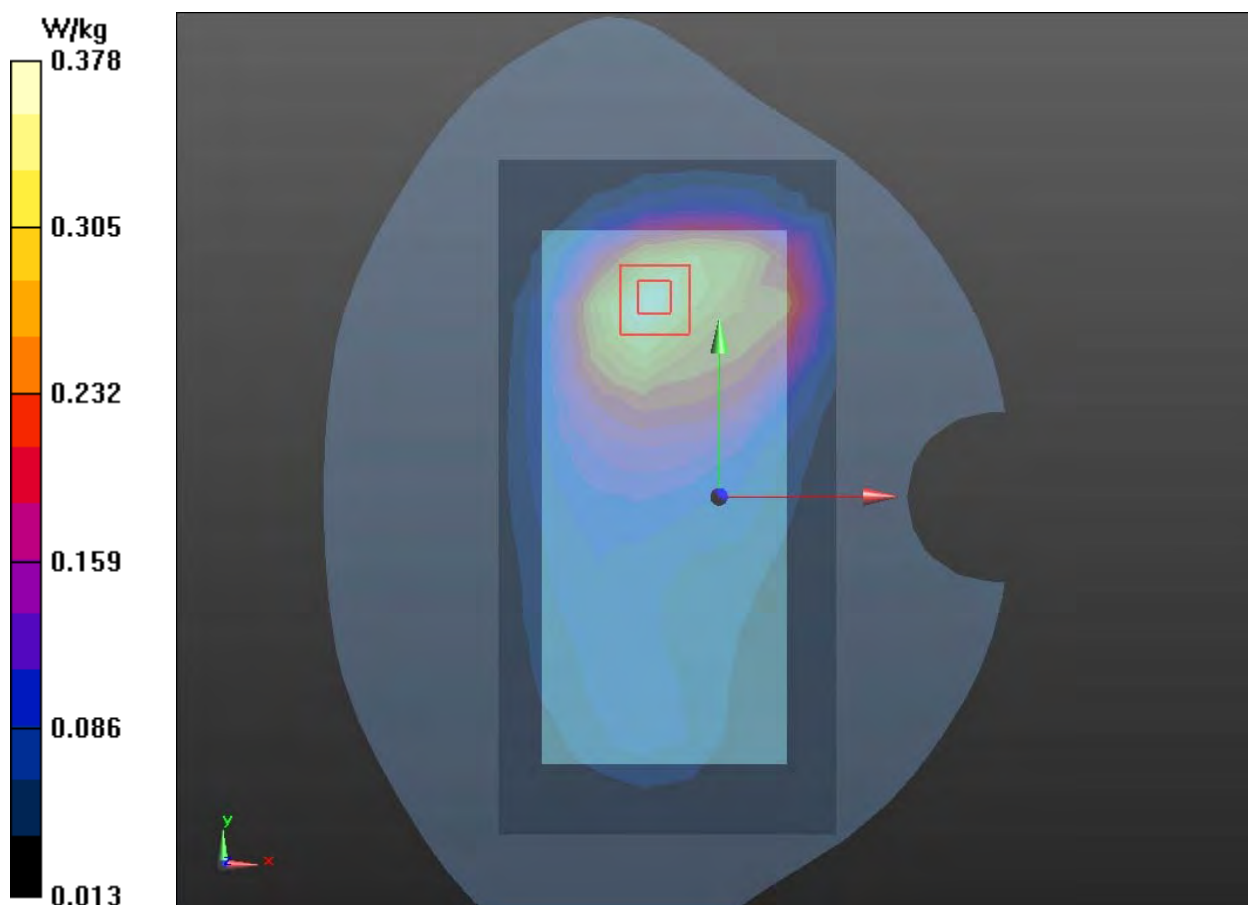

Plot 62 UMTS Band IV Top Edge Middle (Distance 10mm)

Date: 9/28/2020

Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.312$ S/m; $\epsilon_r = 39.365$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.25, 8.25, 8.25); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Top Edge Middle/Area Scan (4x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.370 W/kg


Top Edge Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.72 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.689 W/kg

SAR(1 g) = 0.411 W/kg; SAR(10 g) = 0.232 W/kg

Maximum value of SAR (measured) = 0.456 W/kg

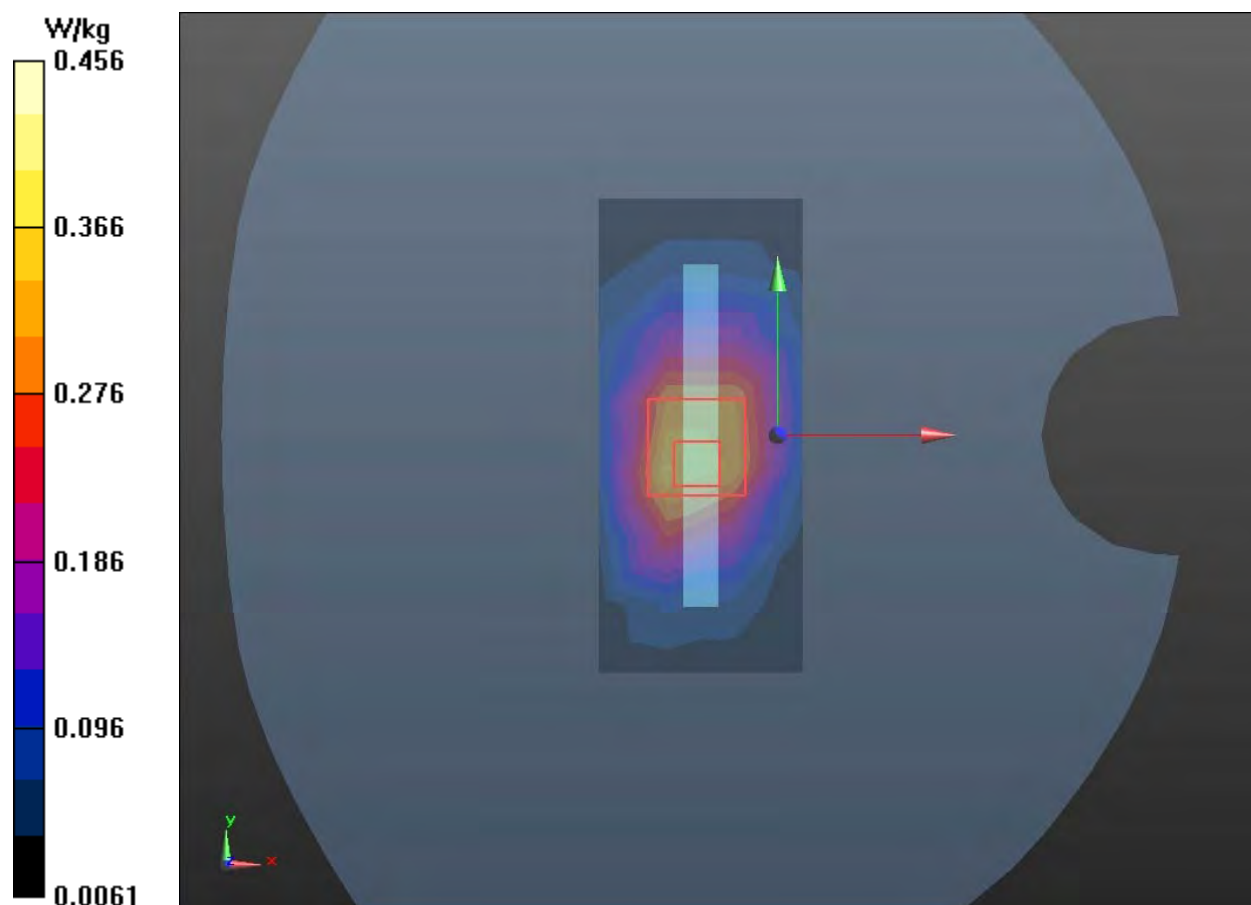

Plot 63 UMTS Band V Left Cheek Middle

Date: 10/27/2020

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 837$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 42.201$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.38, 9.38, 9.38); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Left Cheek Middle 2/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.510 W/kg


Left Cheek Middle 2/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.548 V/m; Power Drift = 0.038 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.552 W/kg; SAR(10 g) = 0.312 W/kg

Maximum value of SAR (measured) = 0.632 W/kg

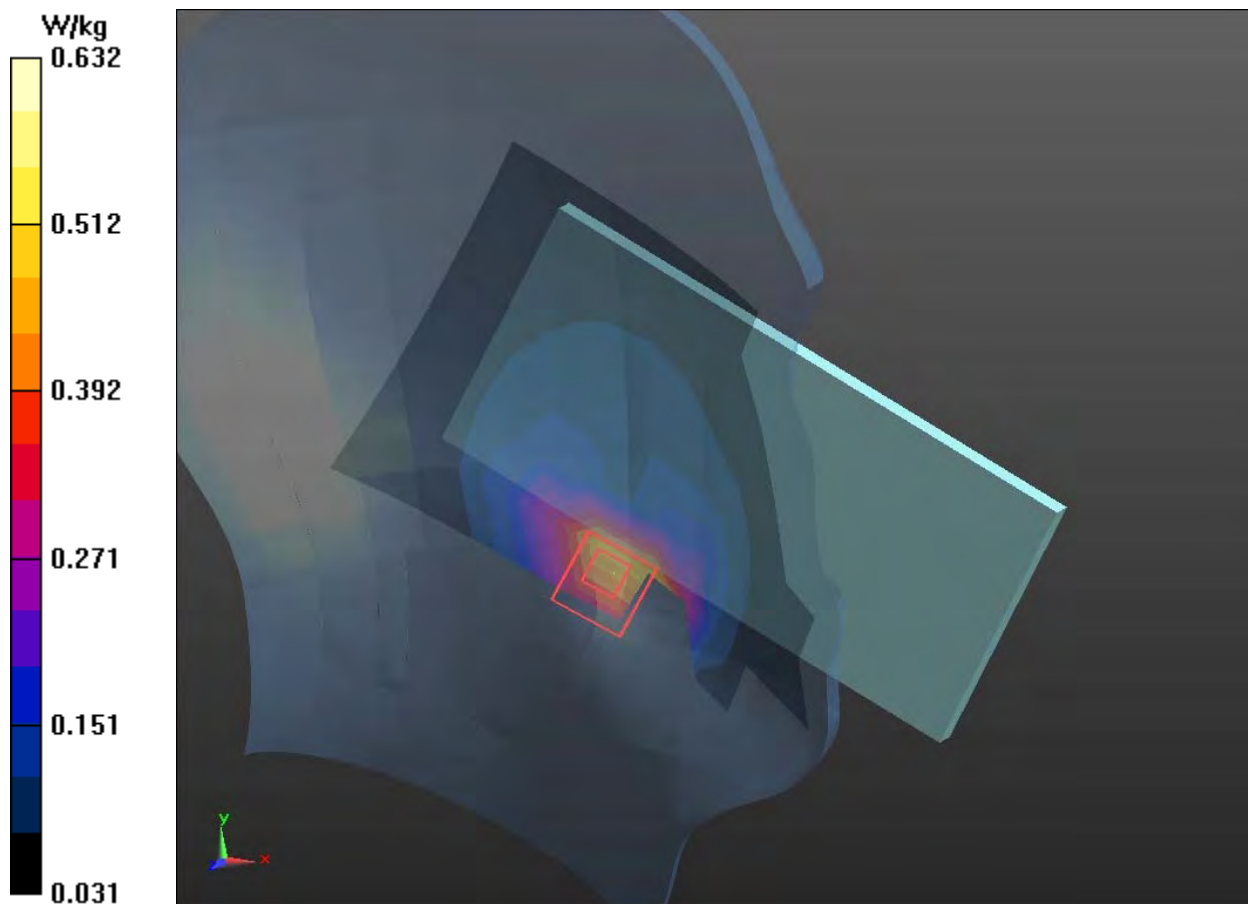

Plot 64 UMTS Band V Back Side Middle (Distance 15mm)

Date: 10/27/2020

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 837$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 42.201$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.38, 9.38, 9.38); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Back Side Middle/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.151 W/kg


Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.143 V/m; Power Drift = -0.029 dB

Peak SAR (extrapolated) = 0.212 W/kg

SAR(1 g) = 0.140 W/kg; SAR(10 g) = 0.090 W/kg

Maximum value of SAR (measured) = 0.153 W/kg

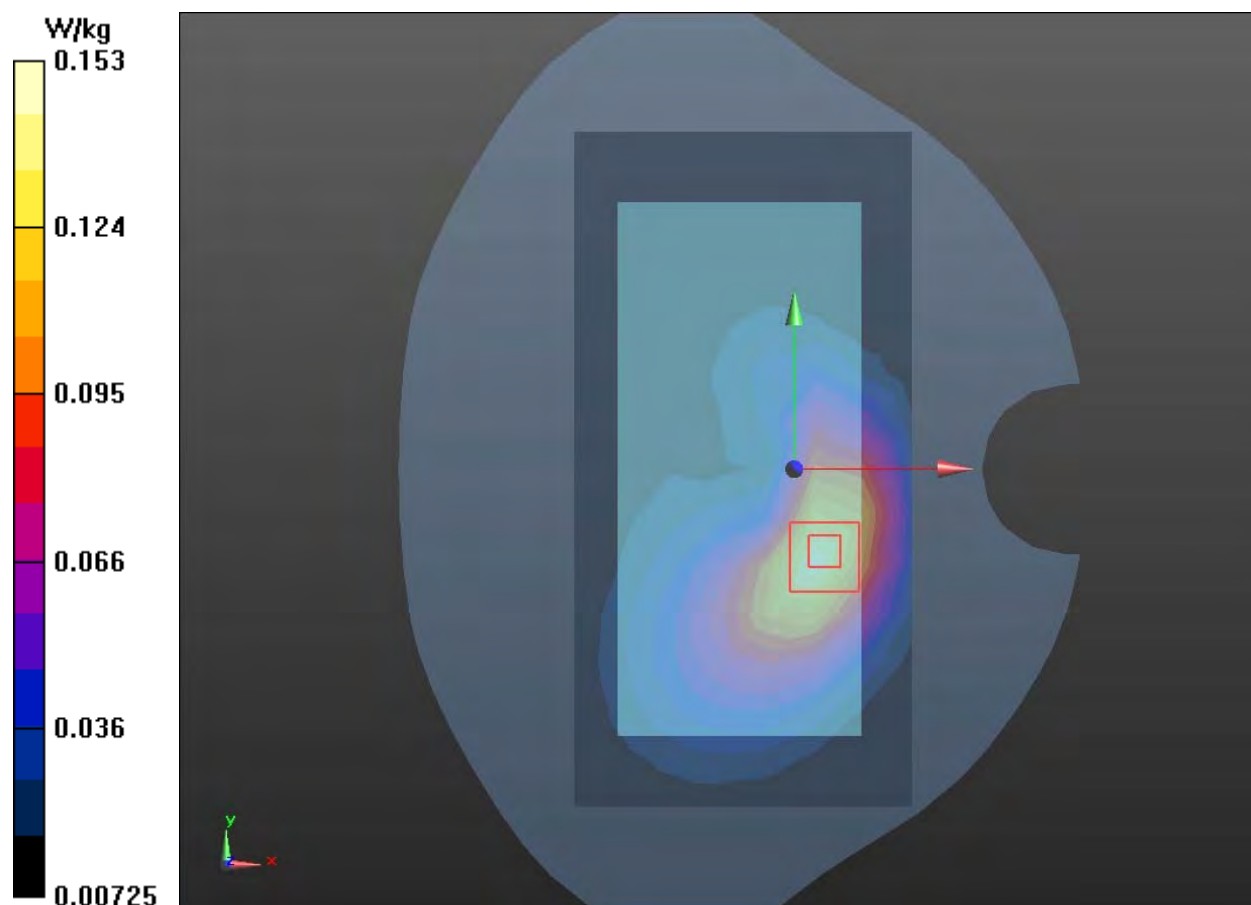

Plot 65 UMTS Band V Left Edge Middle (Distance 10mm)

Date: 10/27/2020

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 837$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 42.201$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.38, 9.38, 9.38); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Left Edge Middle/Area Scan (4x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.431 W/kg


Left Edge Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.27 V/m; Power Drift = 0.027 dB

Peak SAR (extrapolated) = 0.745 W/kg

SAR(1 g) = 0.420 W/kg; SAR(10 g) = 0.232 W/kg

Maximum value of SAR (measured) = 0.472 W/kg

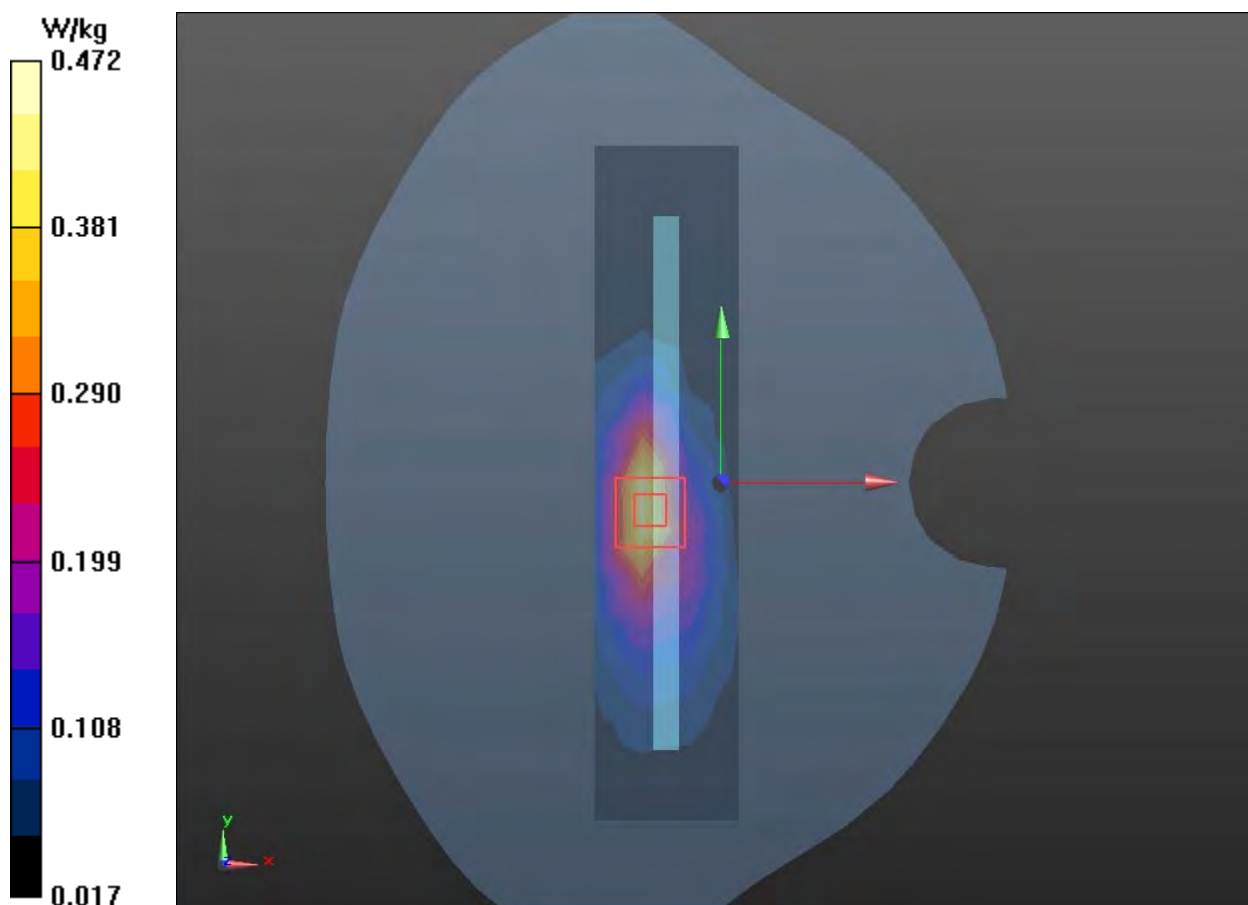

Plot 66 LTE Band 2 1RB Right Tilt Middle

Date: 10/27/2020

Communication System: UID 0, LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 38.948$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.90, 7.90, 7.90); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Right Tilt Middle/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.847 W/kg


Right Tilt Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.98 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 0.724 W/kg; SAR(10 g) = 0.374 W/kg

Maximum value of SAR (measured) = 0.834 W/kg

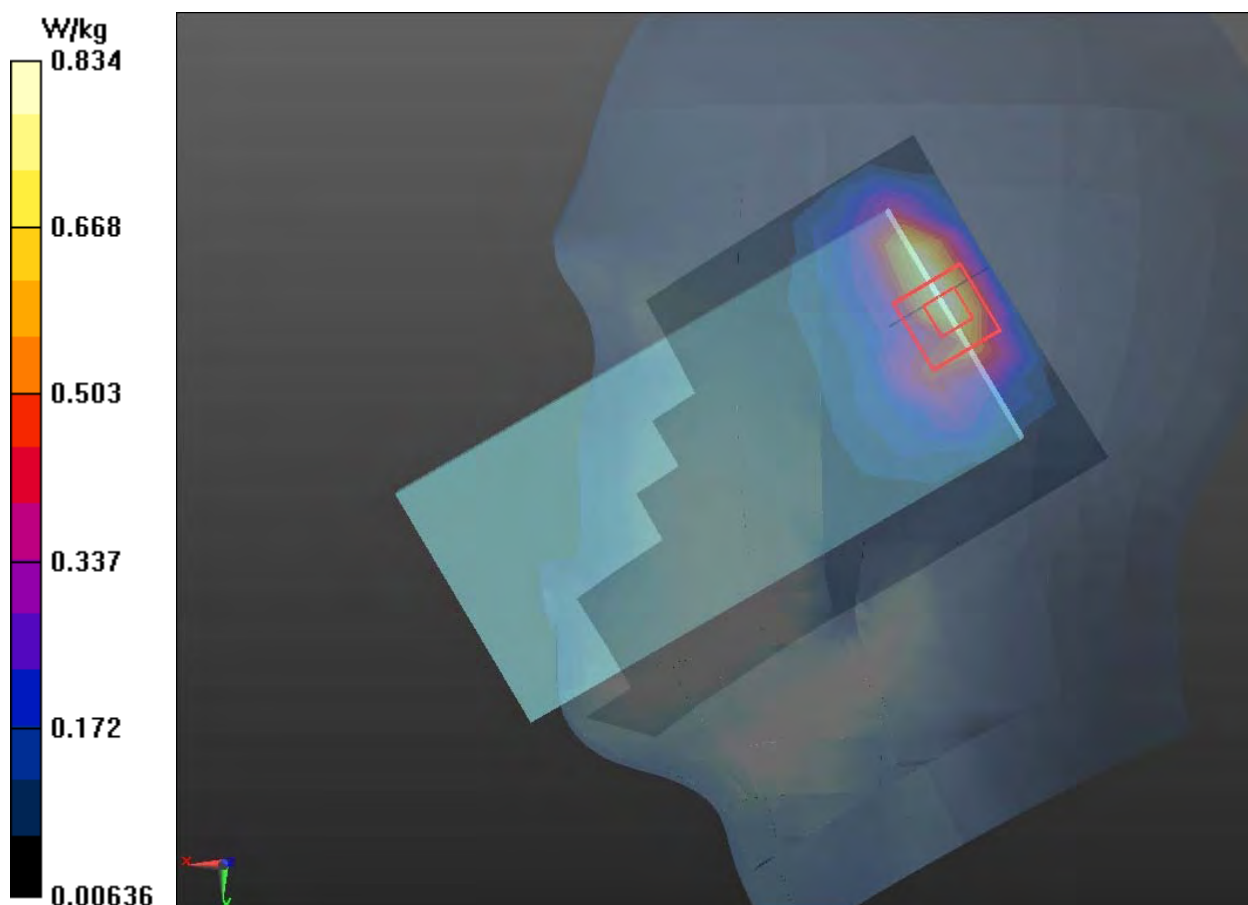

Plot 67 LTE Band 2 1RB Back Side Low (Distance 15mm)

Date: 10/27/2020

Communication System: UID 0, LTE (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.407$ S/m; $\epsilon_r = 39.071$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.90, 7.90, 7.90); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Back Side Low/Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.199 W/kg


Back Side Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.635 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.294 W/kg

SAR(1 g) = 0.210 W/kg; SAR(10 g) = 0.128 W/kg

Maximum value of SAR (measured) = 0.231 W/kg

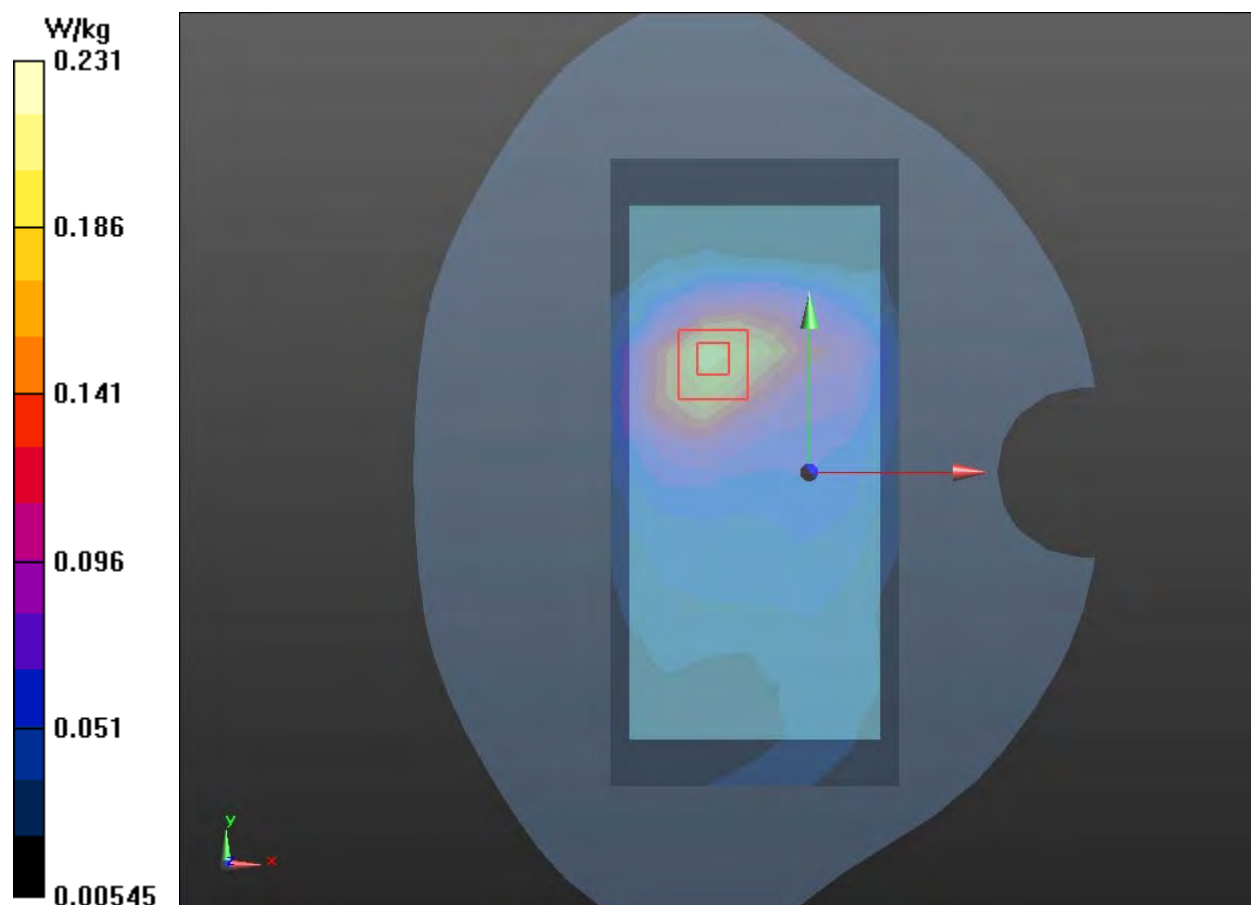

Plot 68 LTE Band 2 1RB Top Edge Middle (Distance 10mm)

Date: 10/27/2020

Communication System: UID 0, LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 38.948$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.90, 7.90, 7.90); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Top Edge Middle/Area Scan (4x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.384 W/kg


Top Edge Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.15 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.599 W/kg

SAR(1 g) = 0.362 W/kg; SAR(10 g) = 0.202 W/kg

Maximum value of SAR (measured) = 0.403 W/kg

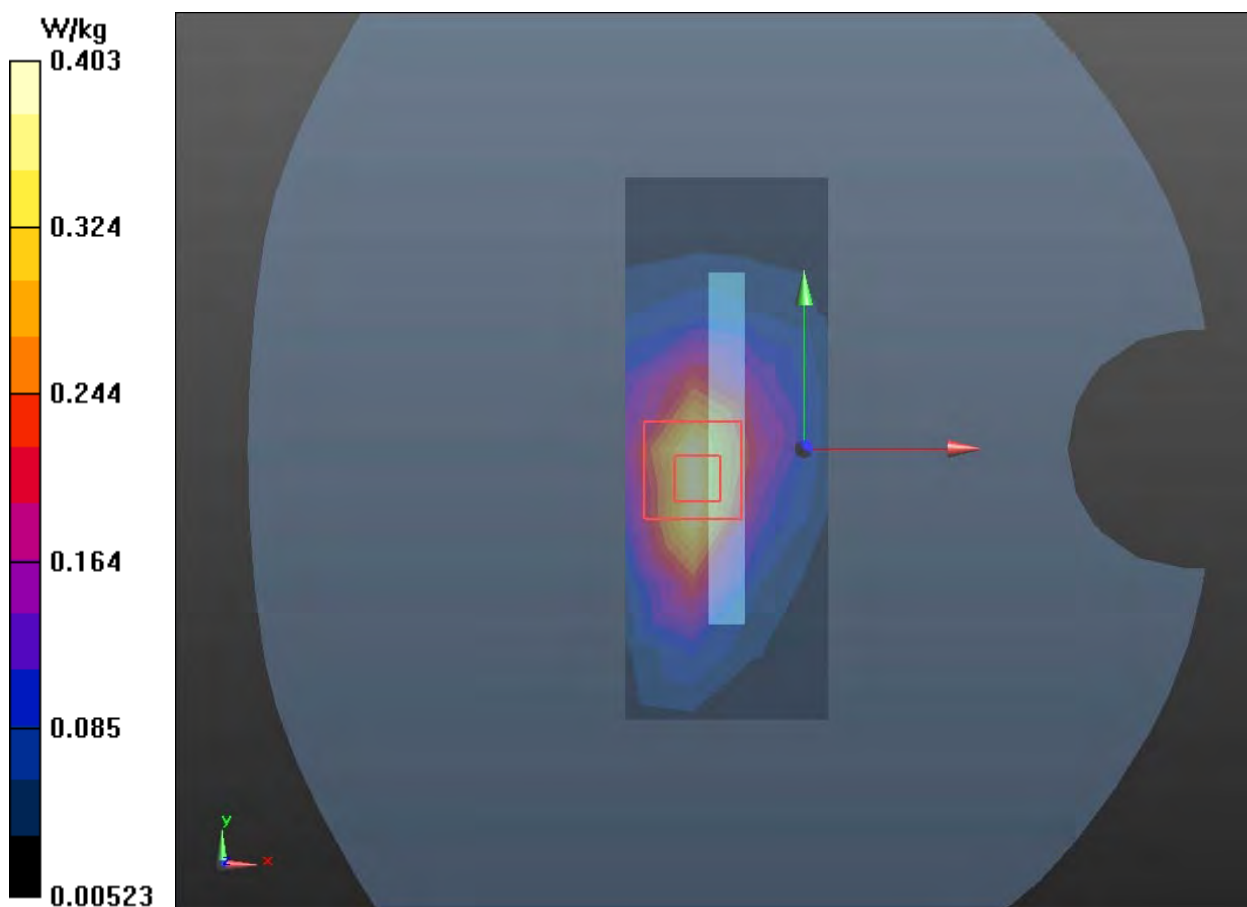

Plot 69 LTE Band 4 1RB Right Tilt Middle

Date: 9/28/2020

Communication System: UID 0, LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.313$ S/m; $\epsilon_r = 39.384$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.25, 8.25, 8.25); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Right Tilt Middle/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.745 W/kg


Right Tilt Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.35 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.662 W/kg; SAR(10 g) = 0.326 W/kg

Maximum value of SAR (measured) = 0.743 W/kg

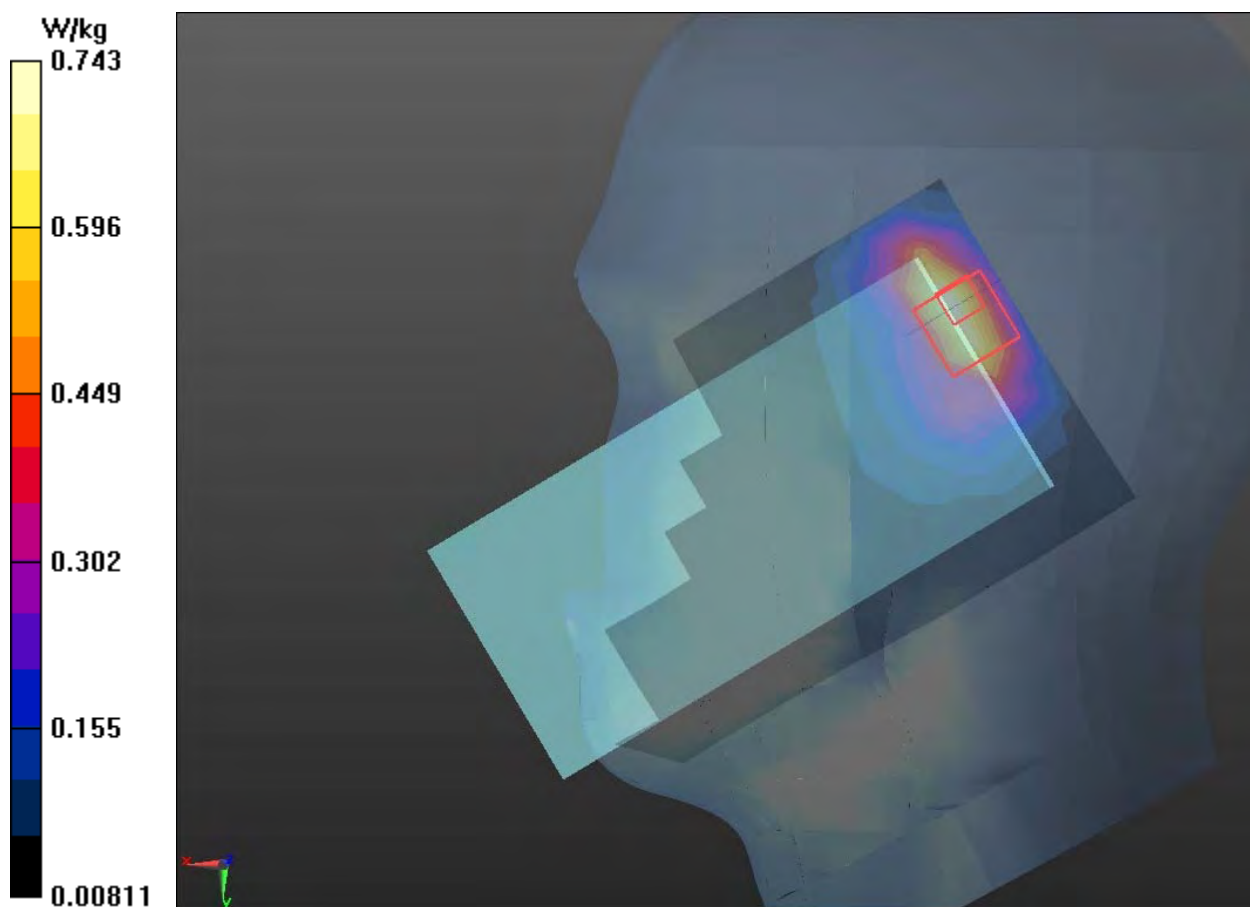

Plot 70 LTE Band 4 1RB Back Side Middle (Distance 15mm)

Date: 9/28/2020

Communication System: UID 0, LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.313$ S/m; $\epsilon_r = 39.384$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.25, 8.25, 8.25); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Back Side Middle/Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.361 W/kg


Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.194 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.510 W/kg

SAR(1 g) = 0.337 W/kg; SAR(10 g) = 0.214 W/kg

Maximum value of SAR (measured) = 0.363 W/kg

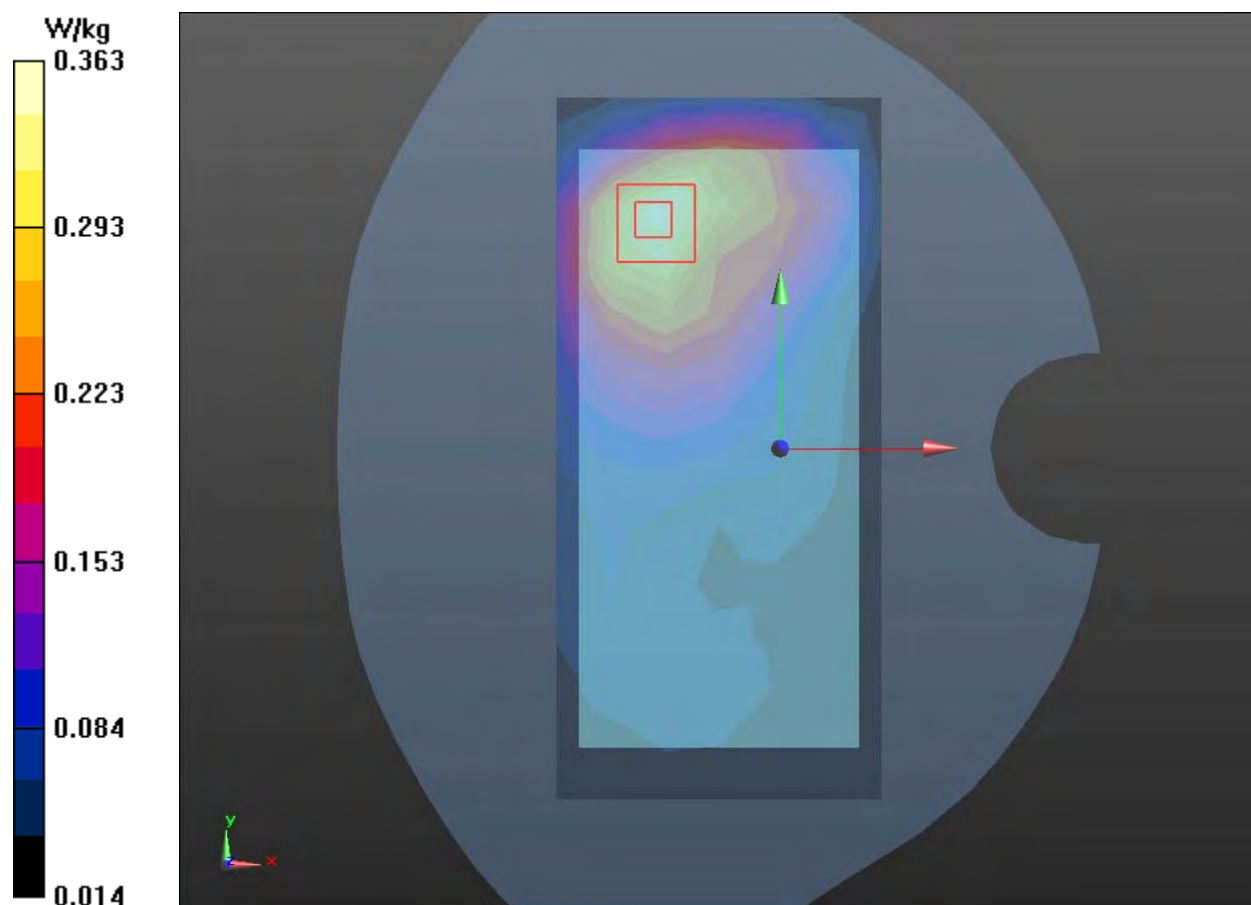

Plot 71 LTE Band 4 50%RB Top Edge High (Distance 10mm)

Date: 9/28/2020

Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.323$ S/m; $\epsilon_r = 39.378$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.25, 8.25, 8.25); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Top Edge High/Area Scan (4x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.284 W/kg


Top Edge High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.49 V/m; Power Drift = 0.024 dB

Peak SAR (extrapolated) = 0.439 W/kg

SAR(1 g) = 0.258 W/kg; SAR(10 g) = 0.147 W/kg

Maximum value of SAR (measured) = 0.283 W/kg

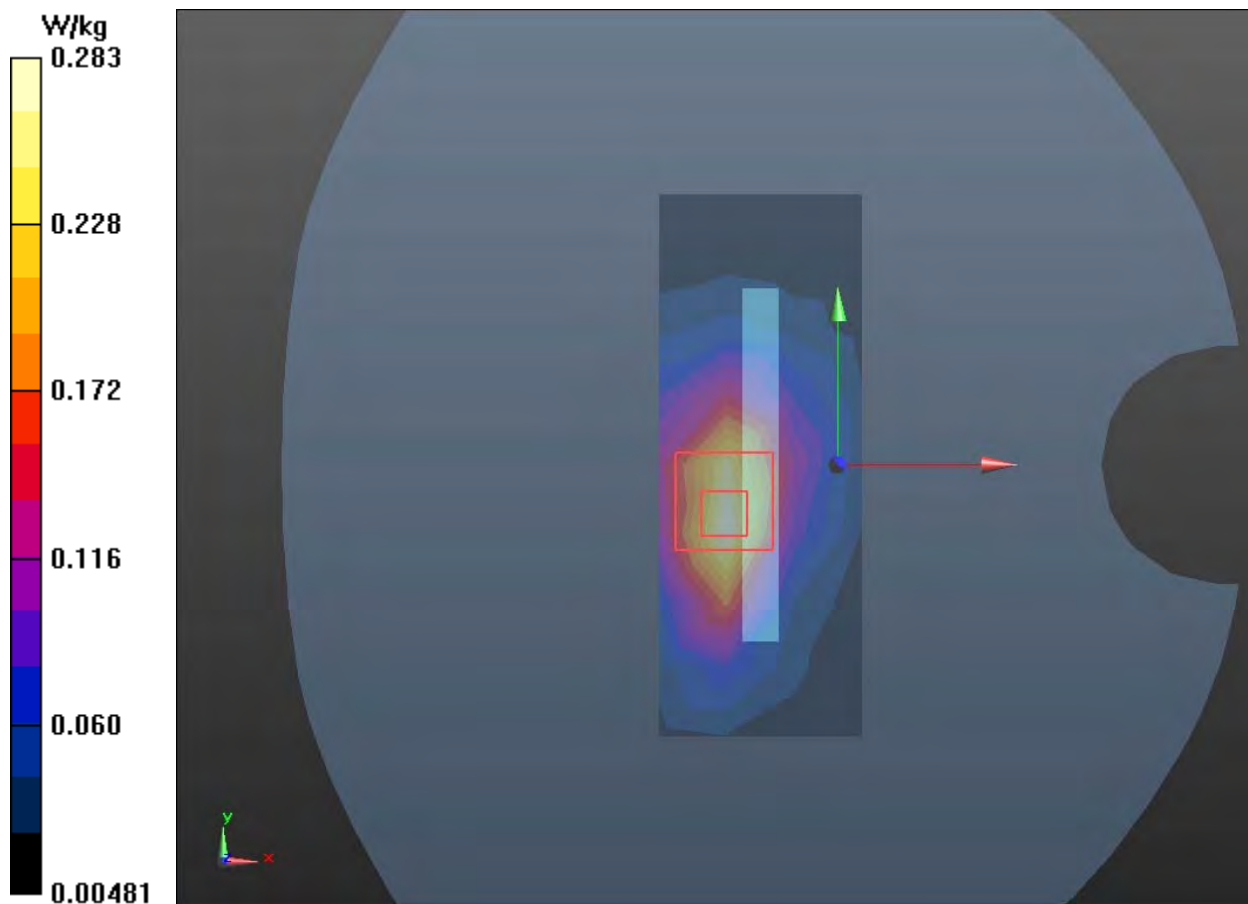

Plot 72 LTE Band 5 50%RB Left Cheek Low

Date: 10/27/2020

Communication System: UID 0, LTE (0); Frequency: 829 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 829 \text{ MHz}$; $\sigma = 0.917 \text{ S/m}$; $\epsilon_r = 42.181$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.38, 9.38, 9.38); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Left Cheek Low/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.385 W/kg


Left Cheek Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.200 V/m ; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.957 W/kg

SAR(1 g) = 0.502 W/kg ; SAR(10 g) = 0.276 W/kg

Maximum value of SAR (measured) = 0.556 W/kg

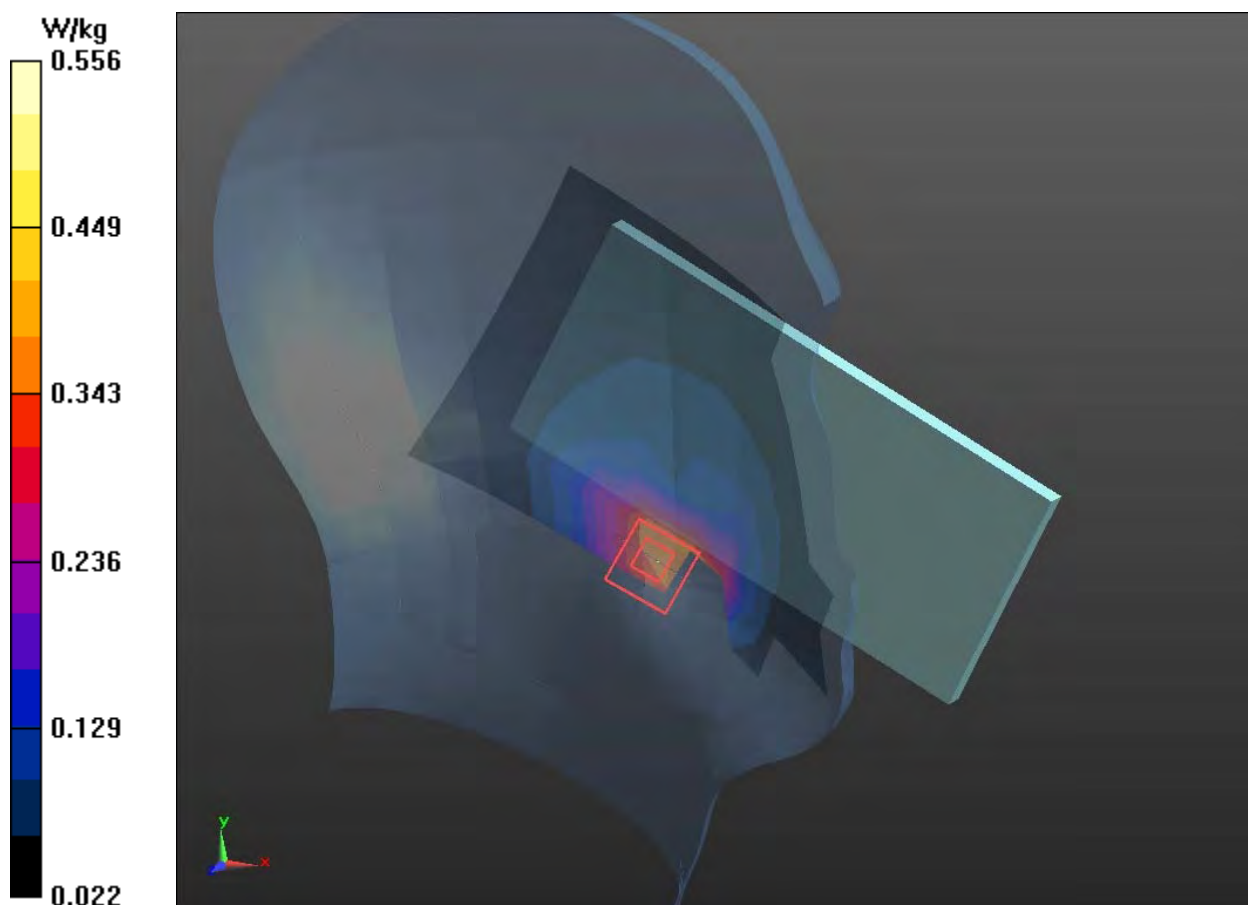

Plot 73 LTE Band 5 1RB Back Side High (Distance 15mm)

Date: 10/27/2020

Communication System: UID 0, LTE (0); Frequency: 844 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 844 \text{ MHz}$; $\sigma = 0.928 \text{ S/m}$; $\epsilon_r = 42.206$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.38, 9.38, 9.38); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Back Side High/Area Scan (8x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.135 W/kg


Back Side High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.37 V/m ; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.205 W/kg

SAR(1 g) = 0.134 W/kg ; SAR(10 g) = 0.087 W/kg

Maximum value of SAR (measured) = 0.145 W/kg

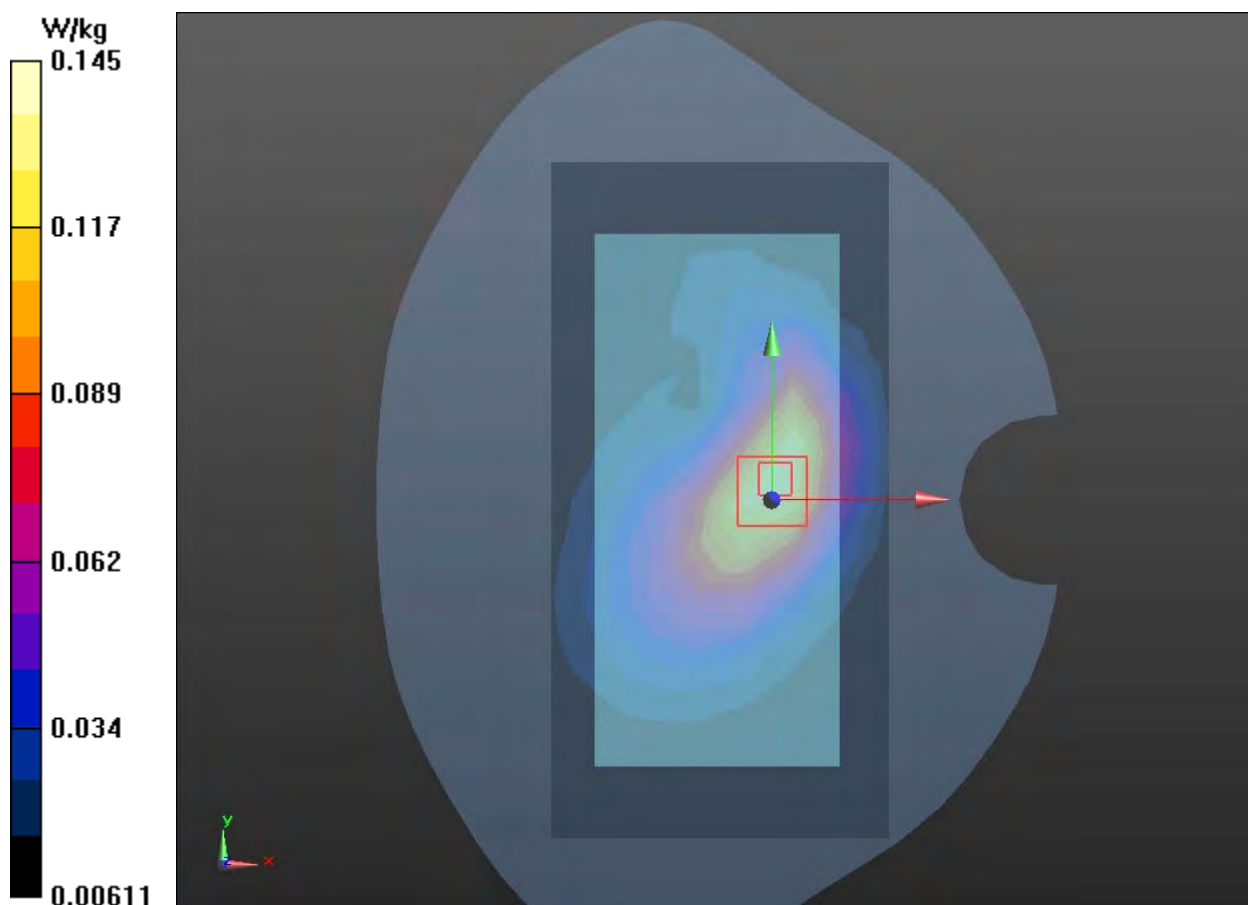

Plot 74 LTE Band 5 1RB Left Edge Middle (Distance 10mm)

Date: 10/27/2020

Communication System: UID 0, LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 42.199$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.38, 9.38, 9.38); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Left Edge Middle/Area Scan (4x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.392 W/kg


Left Edge Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.315 V/m; Power Drift = 0.030 dB

Peak SAR (extrapolated) = 0.649 W/kg

SAR(1 g) = 0.379 W/kg; SAR(10 g) = 0.219 W/kg

Maximum value of SAR (measured) = 0.394 W/kg

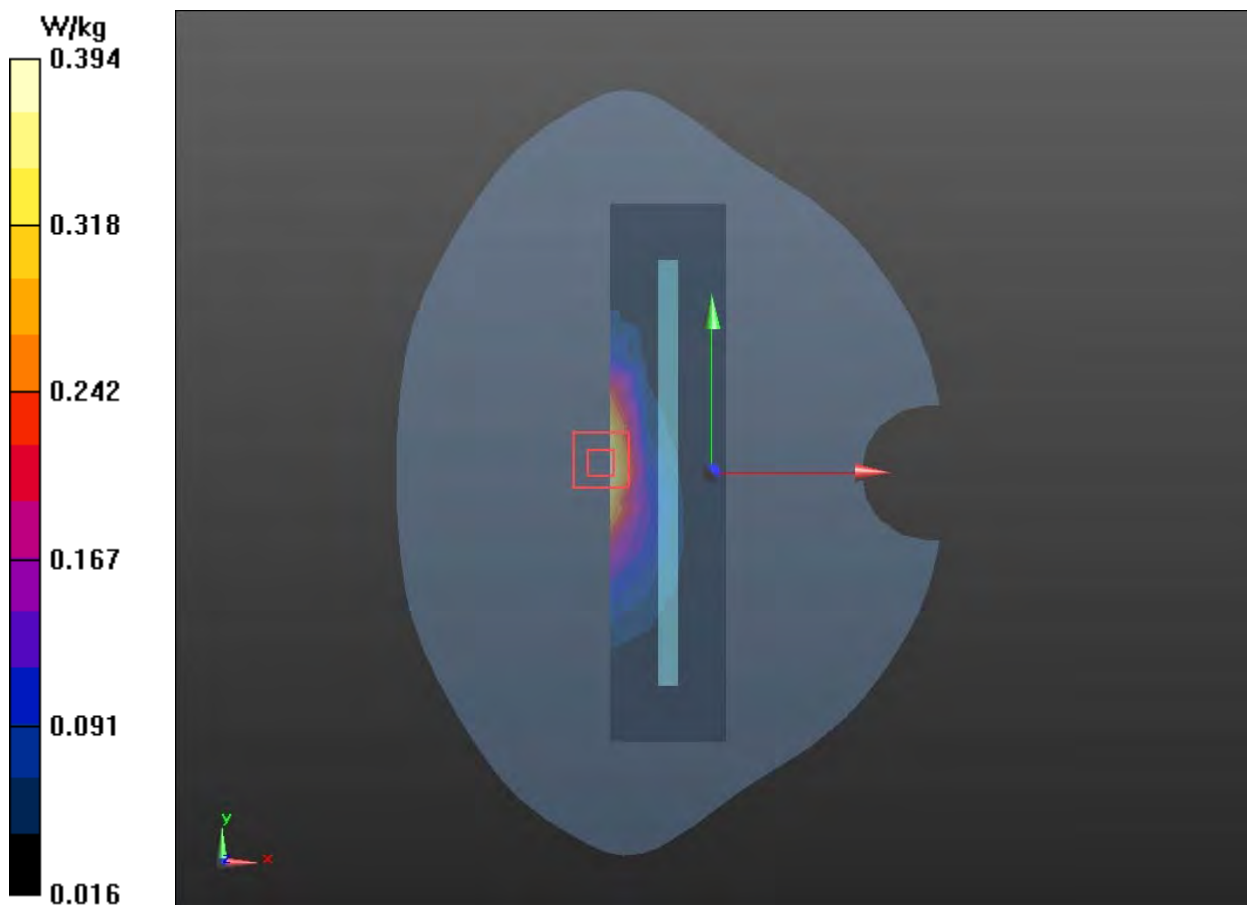

Plot 75 LTE Band 7 50%RB Right Cheek Middle

Date: 11/11/2020

Communication System: UID 0, LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 1.905$ S/m; $\epsilon_r = 38.267$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.26, 7.26, 7.26); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Right Cheek Middle/Area Scan (10x18x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.535 W/kg


Right Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.938 V/m; Power Drift = 0.040 dB

Peak SAR (extrapolated) = 1.37 W/kg

SAR(1 g) = 0.566 W/kg; SAR(10 g) = 0.254 W/kg

Maximum value of SAR (measured) = 0.661 W/kg

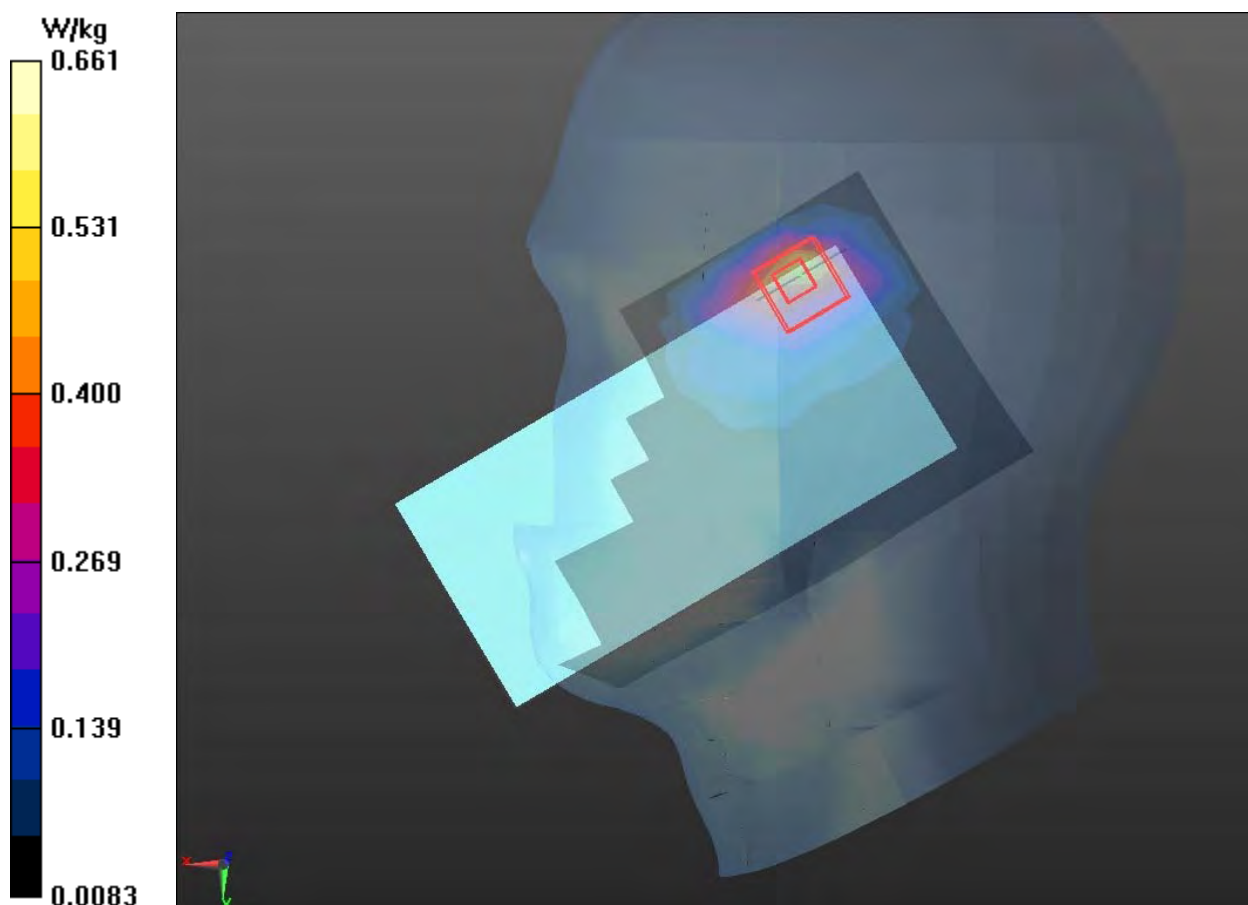

Plot 76 LTE Band 7 1RB Back Side Low (Distance 15mm)

Date: 11/11/2020

Communication System: UID 0, LTE (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2510$ MHz; $\sigma = 1.876$ S/m; $\epsilon_r = 38.352$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.26, 7.26, 7.26); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Back Side Low/Area Scan (10x18x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.270 W/kg


Back Side Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.763 V/m; Power Drift = -0.087 dB

Peak SAR (extrapolated) = 0.483 W/kg

SAR(1 g) = 0.250 W/kg; SAR(10 g) = 0.129 W/kg

Maximum value of SAR (measured) = 0.276 W/kg

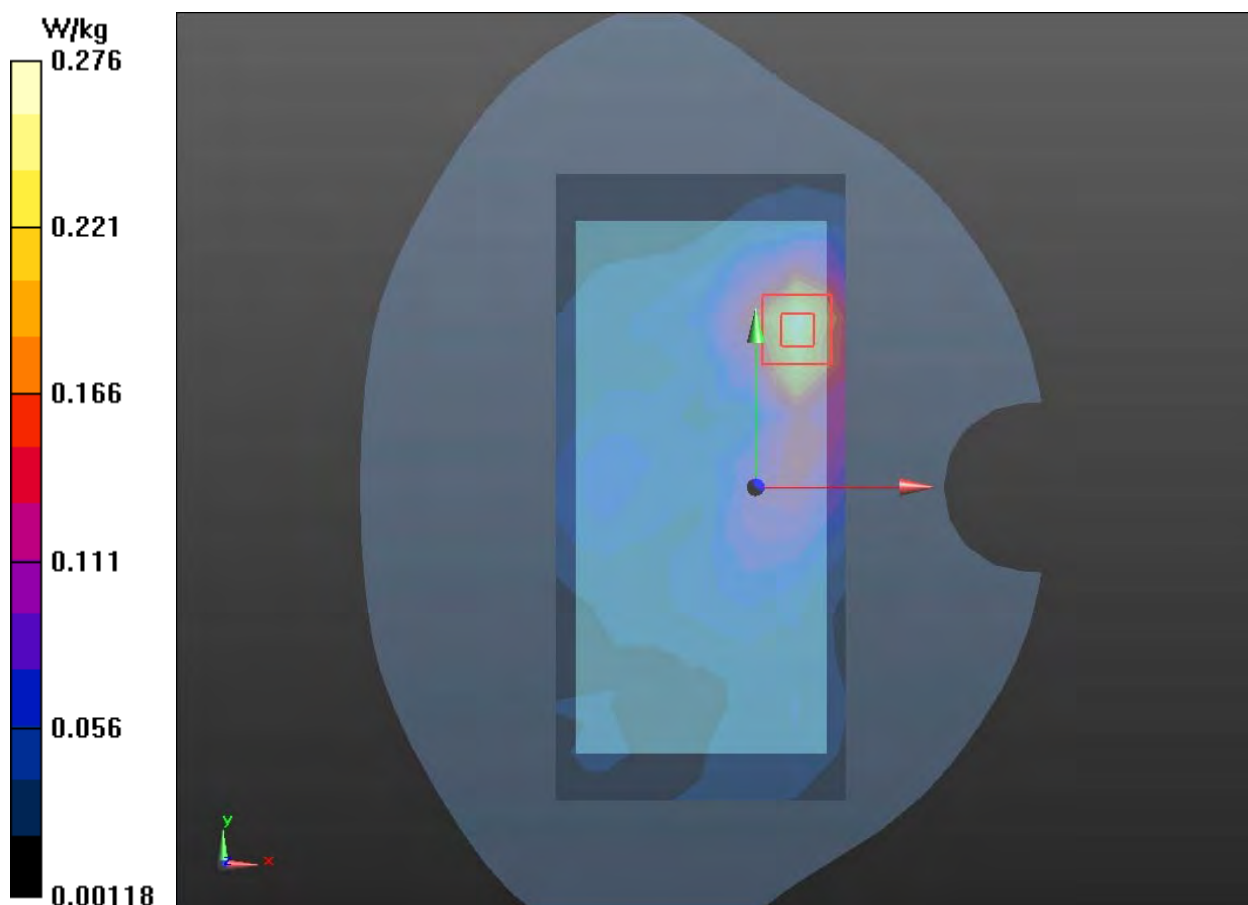

Plot 77 LTE Band 7 50%RB Left Edge Middle (Distance 10mm)

Date: 11/11/2020

Communication System: UID 0, LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 1.905$ S/m; $\epsilon_r = 38.267$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.26, 7.26, 7.26); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Left Edge Middle/Area Scan (5x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.316 W/kg


Left Edge Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.993 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.658 W/kg

SAR(1 g) = 0.311 W/kg; SAR(10 g) = 0.144 W/kg

Maximum value of SAR (measured) = 0.355 W/kg

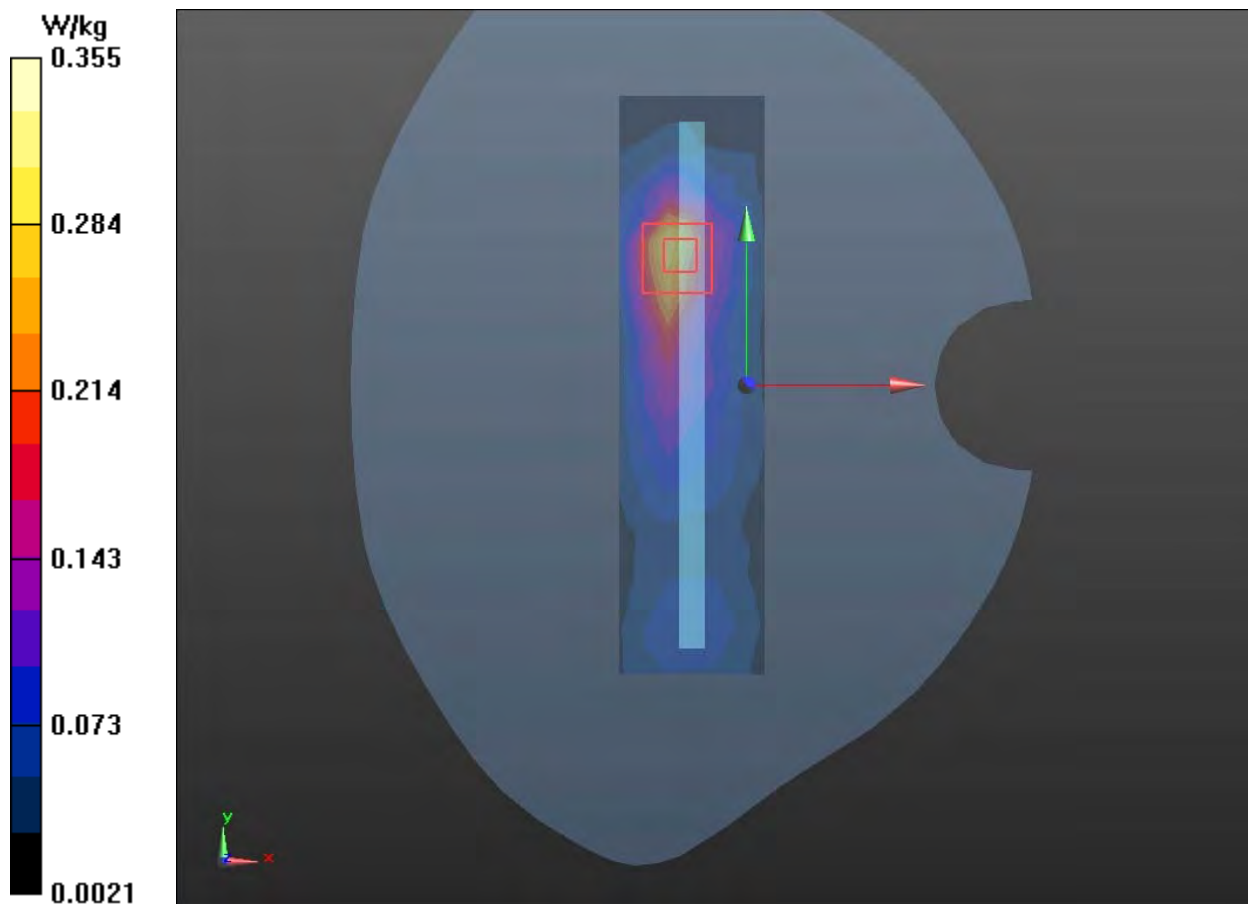

Plot 78 LTE Band 12 50%RB Left Cheek Low

Date: 11/12/2020

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.848$ S/m; $\epsilon_r = 42.763$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.78, 9.78, 9.78); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Left Cheek Low/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.480 W/kg


Left Cheek Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.703 V/m; Power Drift = 0.106 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.535 W/kg; SAR(10 g) = 0.294 W/kg

Maximum value of SAR (measured) = 0.551 W/kg

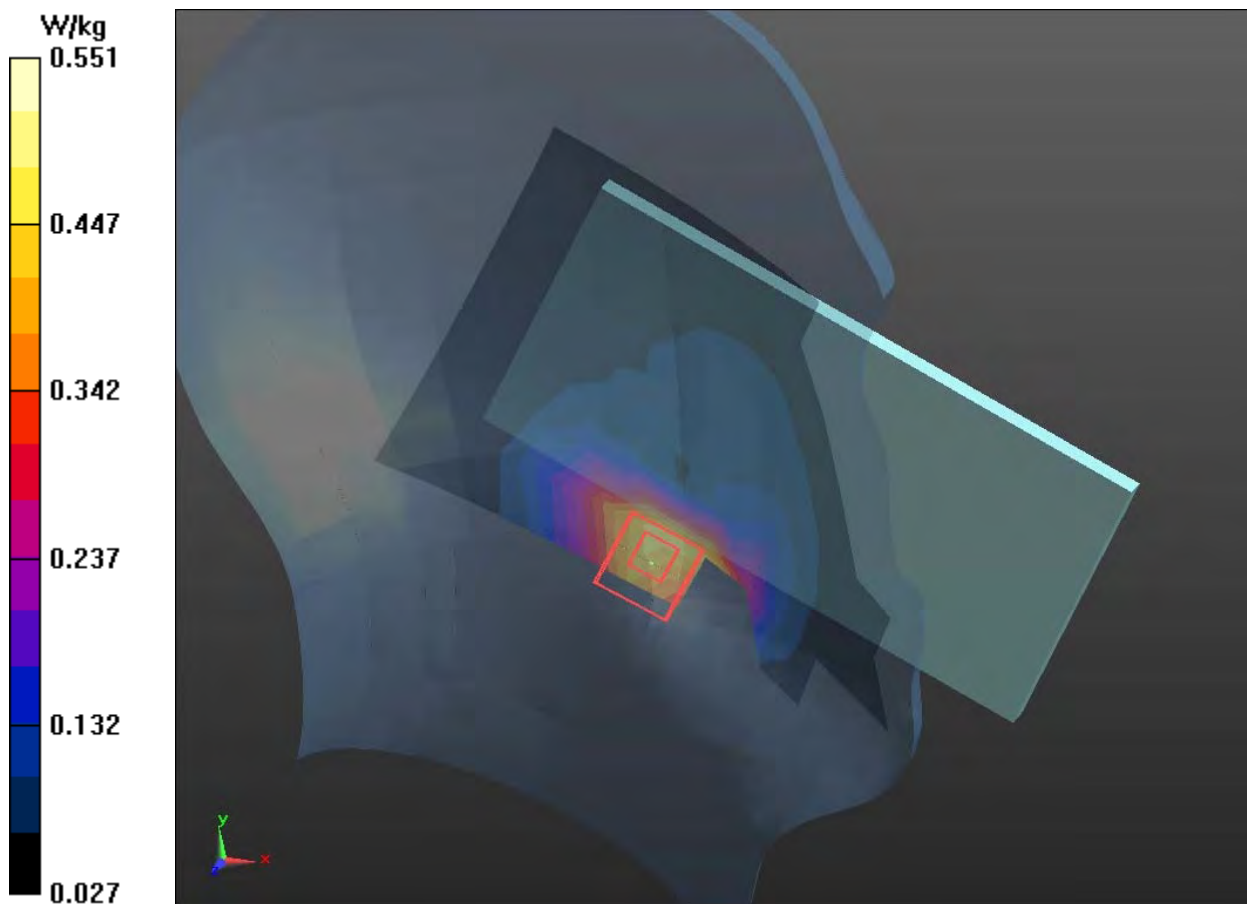

Plot 79 LTE Band 12 1RB Back Side Middle (Distance 15mm)

Date: 11/12/2020

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.848$ S/m; $\epsilon_r = 42.763$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.78, 9.78, 9.78); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Back Side Middle/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.165 W/kg


Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.883 V/m; Power Drift = 0.020 dB

Peak SAR (extrapolated) = 0.231 W/kg

SAR(1 g) = 0.183 W/kg; SAR(10 g) = 0.115 W/kg

Maximum value of SAR (measured) = 0.207 W/kg

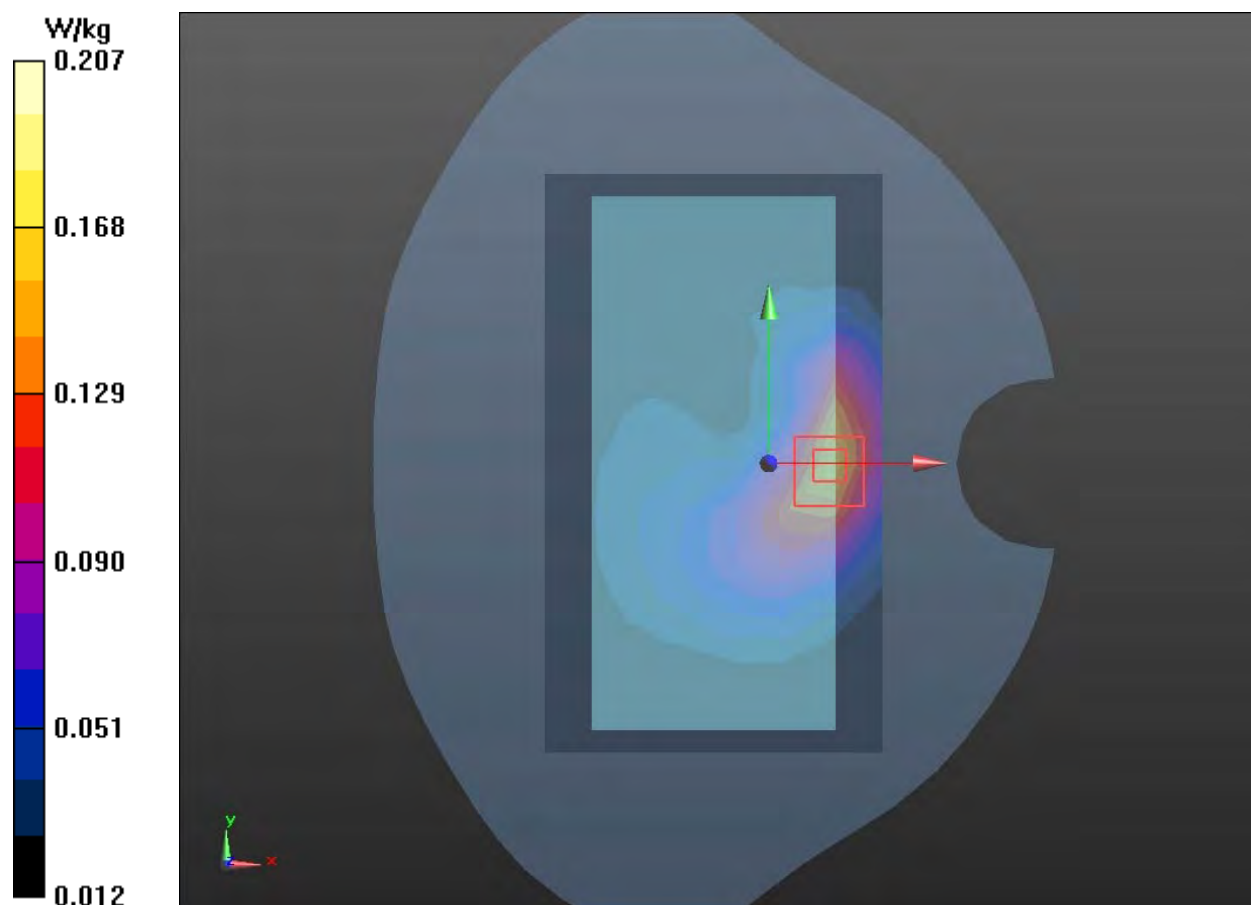

Plot 80 LTE Band 12 1RB Left Edge Middle (Distance 10mm)

Date: 11/12/2020

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.848$ S/m; $\epsilon_r = 42.763$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.78, 9.78, 9.78); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Left Edge Middle/Area Scan (4x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.325 W/kg


Left Edge Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.28 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.683 W/kg

SAR(1 g) = 0.327 W/kg; SAR(10 g) = 0.196 W/kg

Maximum value of SAR (measured) = 0.343 W/kg

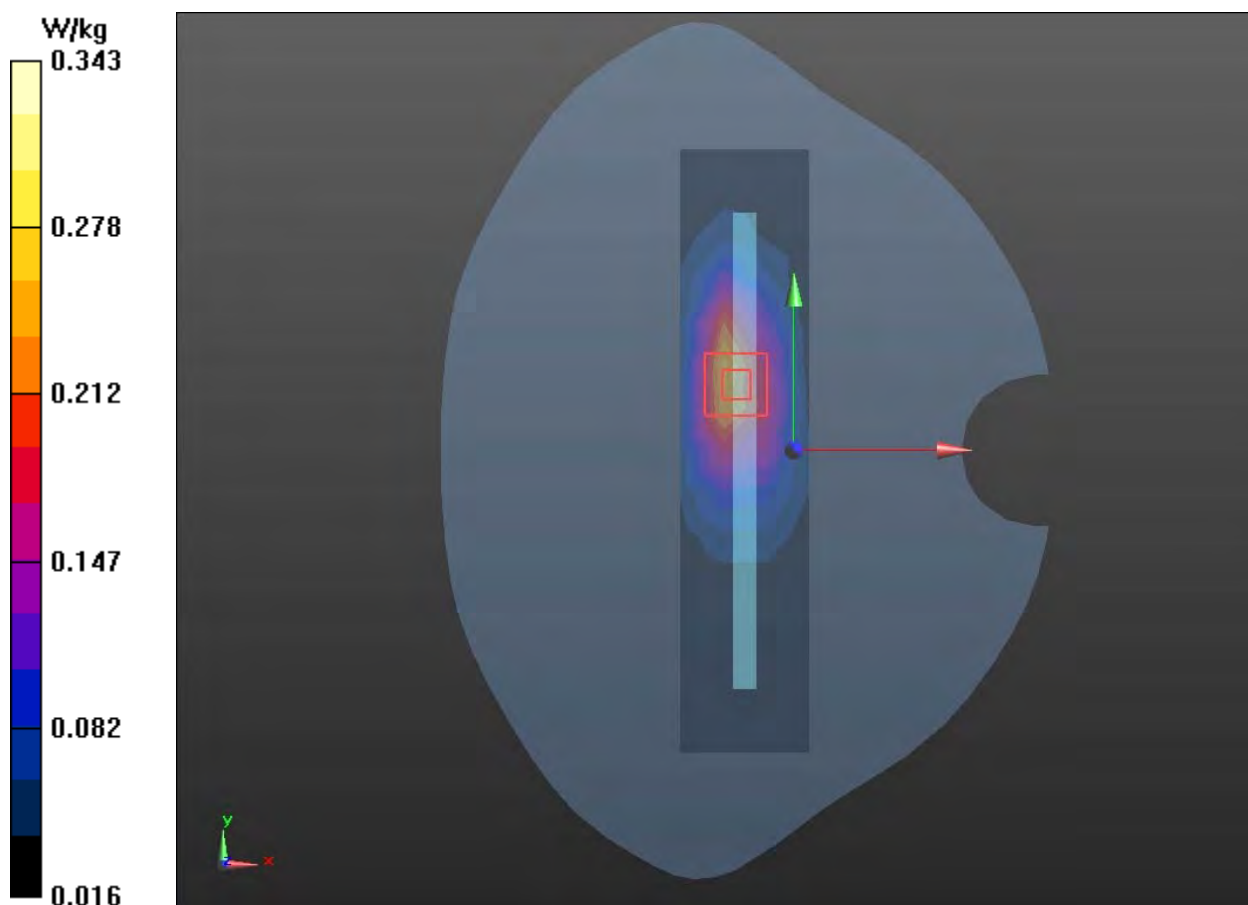

Plot 81 LTE Band 38 1RB Right Cheek Middle

Date: 11/11/2020

Communication System: UID 0, LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.973$ S/m; $\epsilon_r = 38.008$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.26, 7.26, 7.26); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Right Cheek Middle/Area Scan (10x18x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.600 W/kg


Right Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.754 V/m; Power Drift = -0.036 dB

Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.603 W/kg; SAR(10 g) = 0.262 W/kg

Maximum value of SAR (measured) = 0.694 W/kg

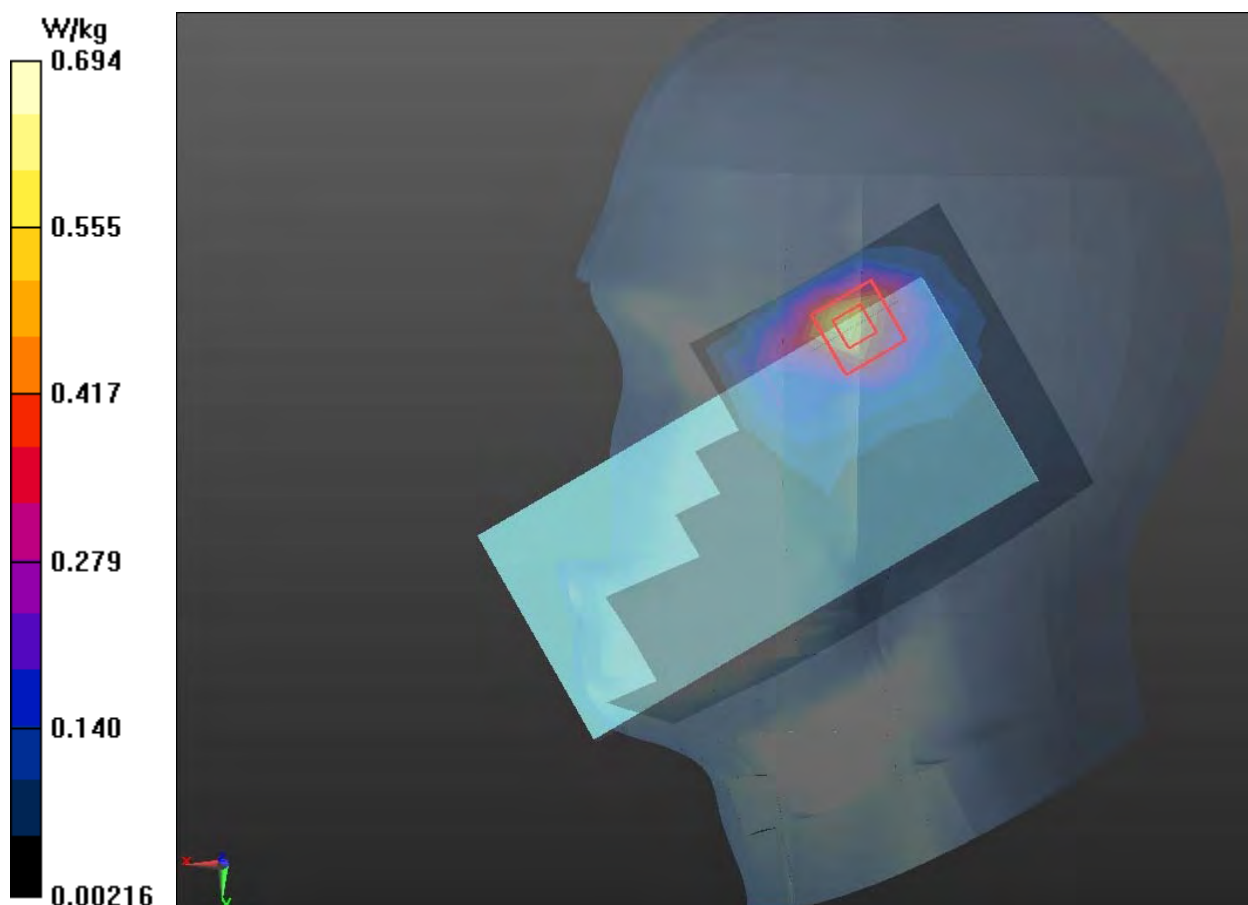

Plot 82 LTE Band 38 1RB Back Side Middle (Distance 15mm)

Date: 11/11/2020

Communication System: UID 0, LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.973$ S/m; $\epsilon_r = 38.008$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.26, 7.26, 7.26); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Back Side Middle/Area Scan (10x18x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.256 W/kg


Back Side Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.883 V/m; Power Drift = -0.026 dB

Peak SAR (extrapolated) = 0.483 W/kg

SAR(1 g) = 0.244 W/kg; SAR(10 g) = 0.127 W/kg

Maximum value of SAR (measured) = 0.265 W/kg

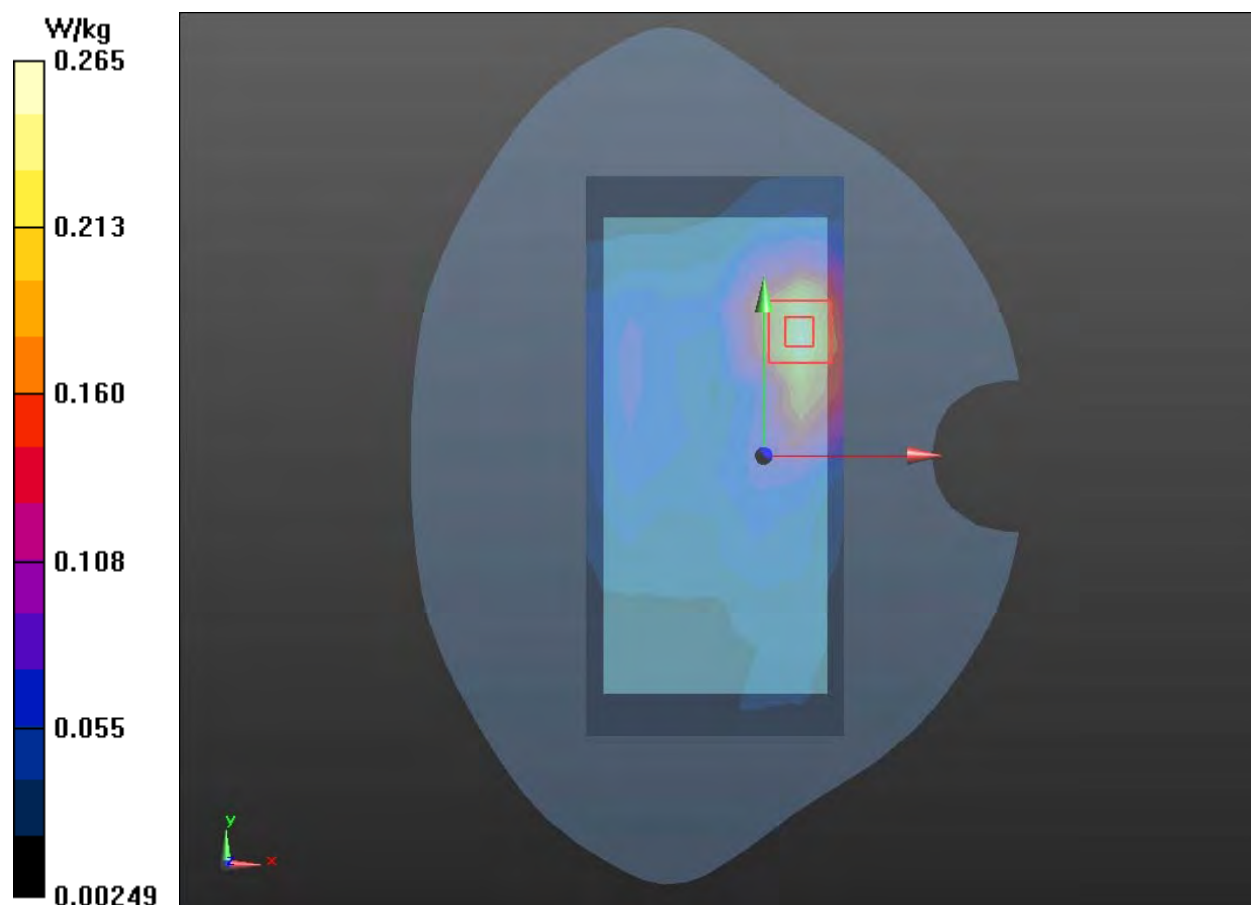

Plot 83 LTE Band 38 1RB Left Edge Middle (Distance 10mm)

Date: 11/11/2020

Communication System: UID 0, LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.973$ S/m; $\epsilon_r = 38.008$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.26, 7.26, 7.26); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Left Edge Middle/Area Scan (5x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.296 W/kg


Left Edge Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.204 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.812 W/kg

SAR(1 g) = 0.366 W/kg; SAR(10 g) = 0.169 W/kg

Maximum value of SAR (measured) = 0.415 W/kg

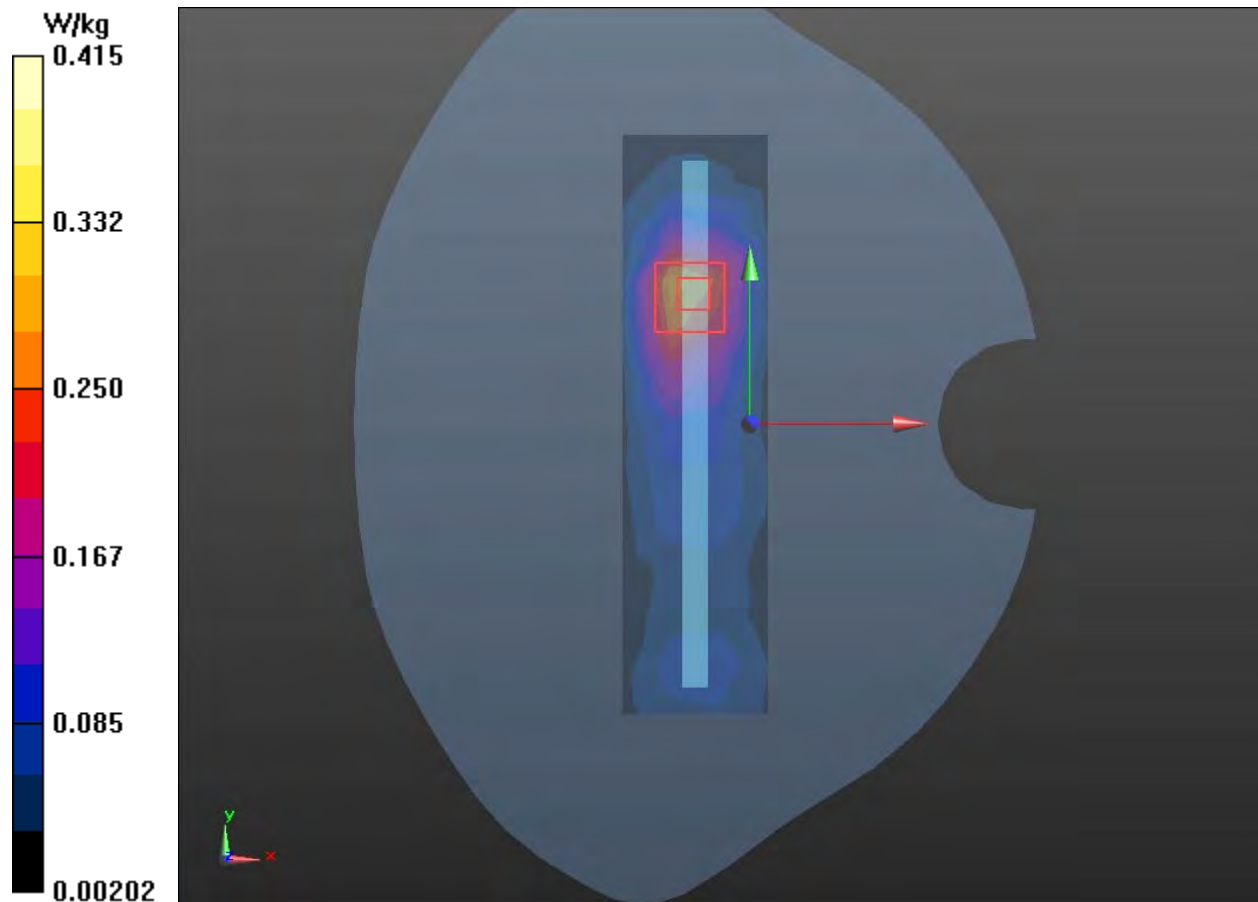

Plot 84 LTE Band 41 1RB Right Cheek Low

Date: 11/11/2020

Communication System: UID 0, LTE (0); Frequency: 2506 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2506$ MHz; $\sigma = 1.871$ S/m; $\epsilon_r = 38.365$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.26, 7.26, 7.26); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Right Cheek Low /Area Scan(10x18x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.463 W/kg


Right Cheek Low /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.642 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.474 W/kg; SAR(10 g) = 0.206 W/kg

Maximum value of SAR (measured) = 0.509 W/kg

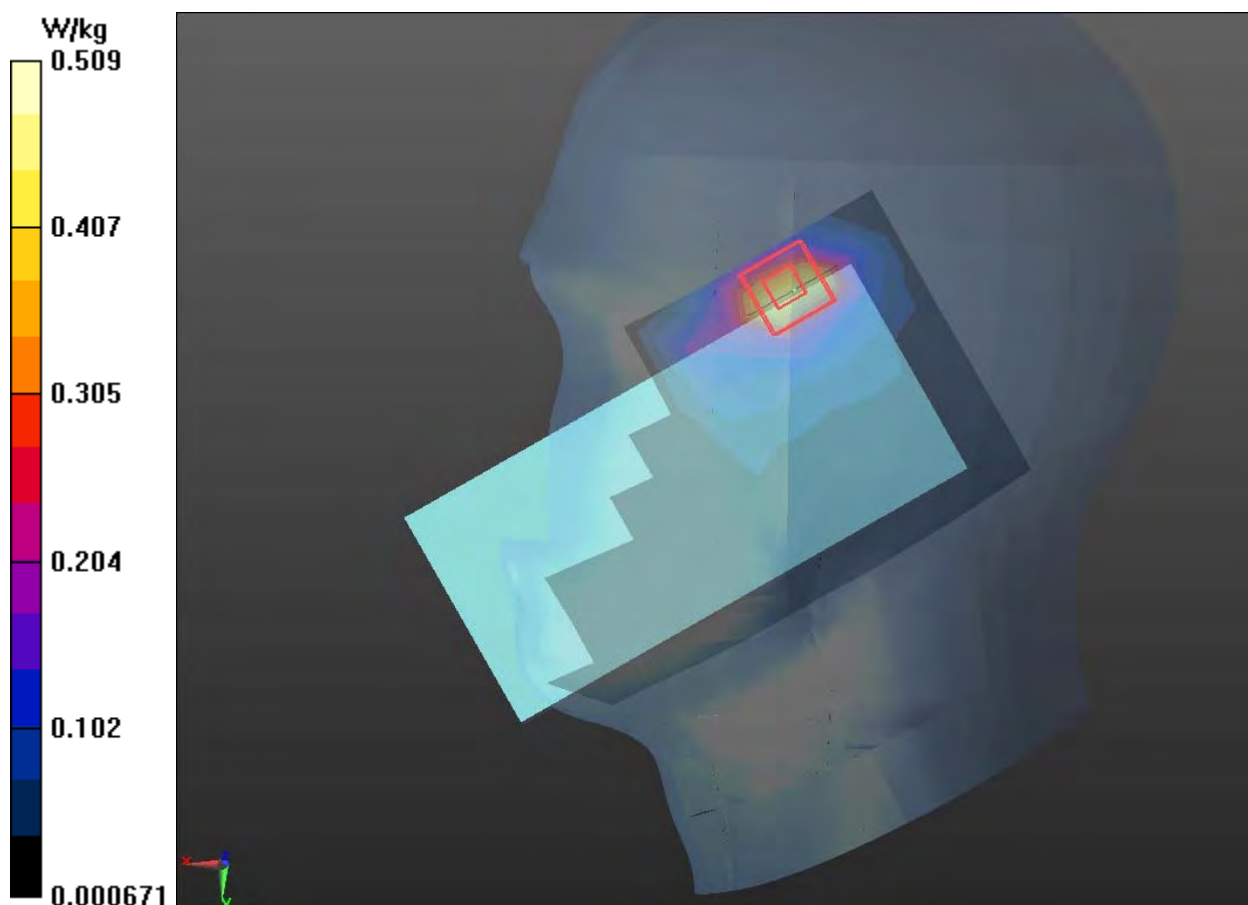

Plot 85 LTE Band 41 1RB Back Side Low (Distance 15mm)

Date: 11/11/2020

Communication System: UID 0, LTE (0); Frequency: 2506 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2506$ MHz; $\sigma = 1.871$ S/m; $\epsilon_r = 38.365$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.26, 7.26, 7.26); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Back Side Low/Area Scan (10x18x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.295 W/kg


Back Side Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.310 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.562 W/kg

SAR(1 g) = 0.286 W/kg; SAR(10 g) = 0.149 W/kg

Maximum value of SAR (measured) = 0.313 W/kg

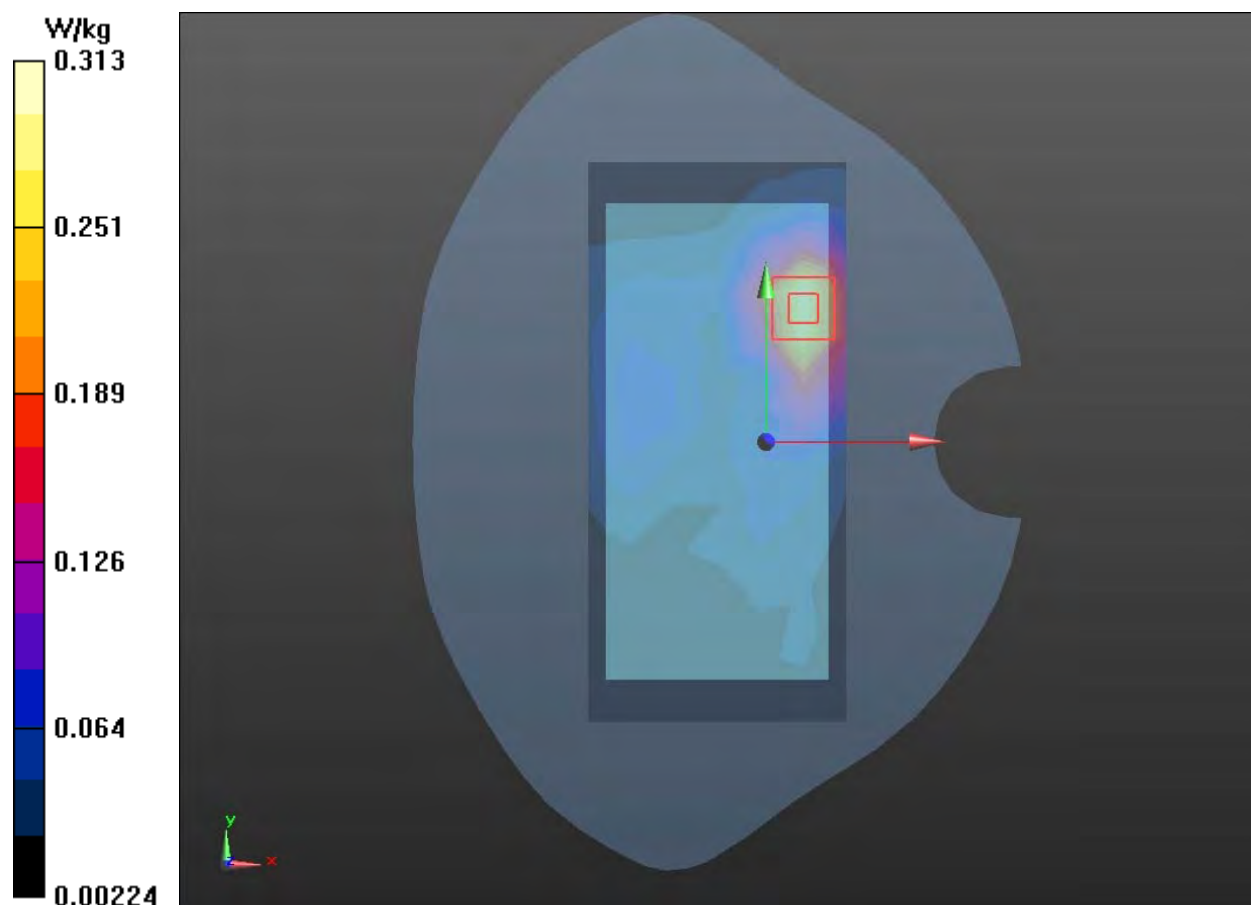

Plot 86 LTE Band 41 1RB Left Edge Low (Distance 10mm)

Date: 11/11/2020

Communication System: UID 0, LTE (0); Frequency: 2506 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2506$ MHz; $\sigma = 1.871$ S/m; $\epsilon_r = 38.365$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.26, 7.26, 7.26); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Left Edge Low 2/Area Scan (5x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.301 W/kg


Left Edge Low 2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.400 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.810 W/kg

SAR(1 g) = 0.374 W/kg; SAR(10 g) = 0.172 W/kg

Maximum value of SAR (measured) = 0.424 W/kg

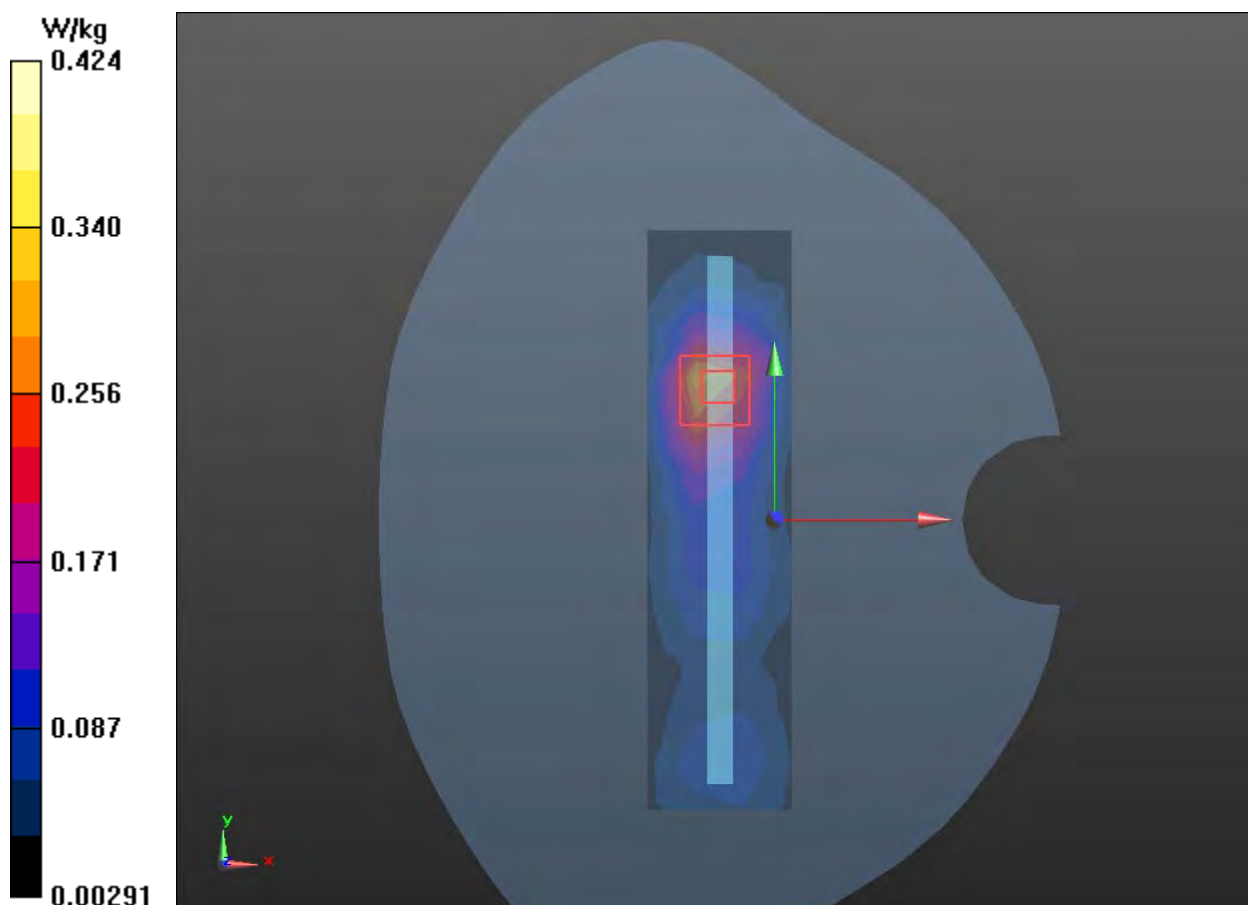

Plot 87 LTE Band 66 1RB Right Tilt Low

Date: 9/29/2020

Communication System: UID 0, LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.303$ S/m; $\epsilon_r = 39.467$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.25, 8.25, 8.25); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Right Tilt Low/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.582 W/kg


Right Tilt Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.27 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.537 W/kg; SAR(10 g) = 0.292 W/kg

Maximum value of SAR (measured) = 0.595 W/kg

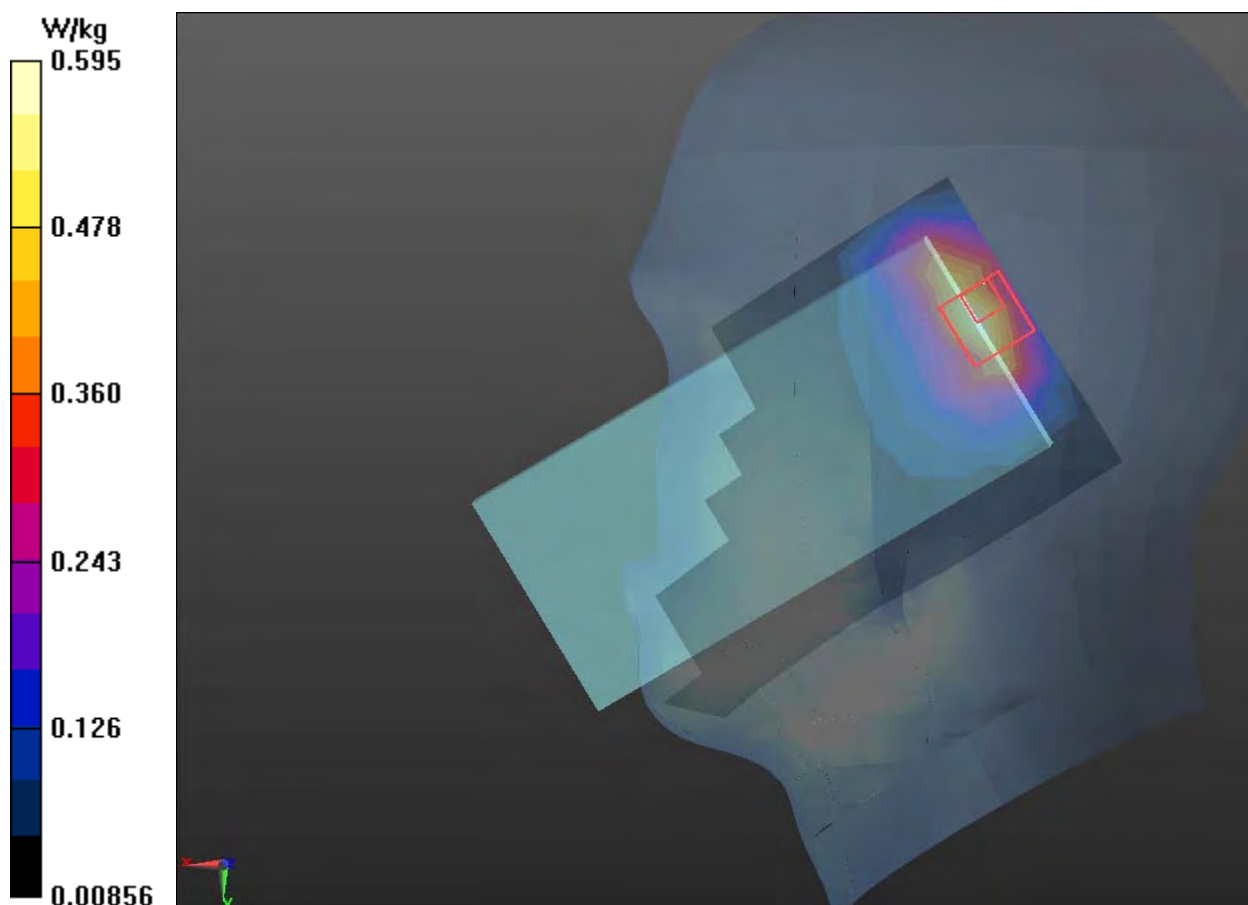

Plot 88 LTE Band 66 1RB Back Side Middle (Distance 15mm)

Date: 9/29/2020

Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.323$ S/m; $\epsilon_r = 39.378$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.25, 8.25, 8.25); Calibrated: 7/6/2020;

Electronics: DAE4 SN1291; Calibrated: 2/24/2020

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.14 (7483)

Back Side Middle/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.365 W/kg

Back Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.834 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.519 W/kg

SAR(1 g) = 0.349 W/kg; SAR(10 g) = 0.222 W/kg

Maximum value of SAR (measured) = 0.376 W/kg

