





No. I22Z60151-SEM02

For

HONOR Device Co., Ltd.

Smart Phone

Model Name: LGE-NX9

with

Hardware Version: HN1LGEHM

Software Version: 6.0.0.108(C900E103R1P3)

FCC ID: 2AYGCLGE-NX9

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT


No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: cttl_terminals@caict.ac.cn, website: www.caict.ac.cn,



Picture 1: Constituents of the sample

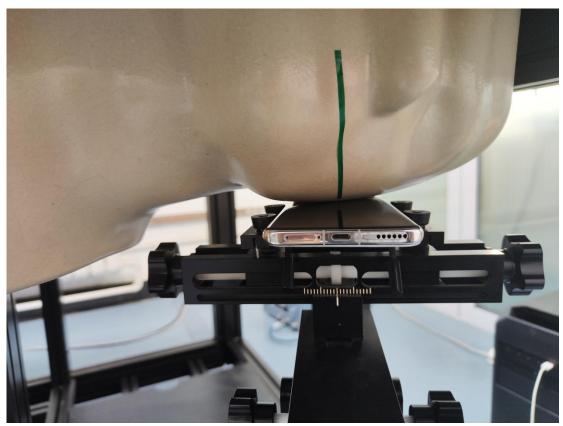


Picture 2: Left Head Touch Cheek Position



Picture 3: Left Head Tilt 15° Position




Picture 4: Right Head Touch Cheek Position

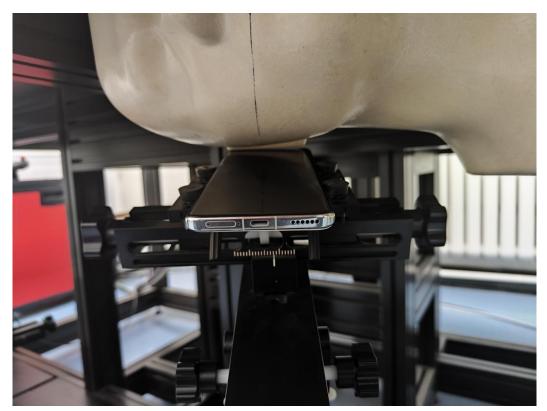


Picture 5: Right Head Tilt 15° Position

Test positions for body:


The Body SAR is tested at the following 12 test positions all with the distance =0/10/15mm between the EUT and the phantom bottom:

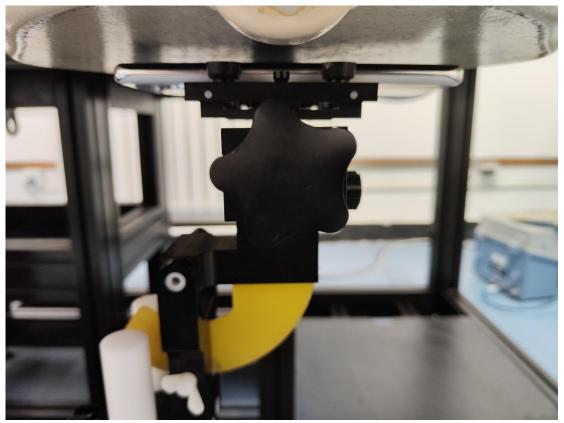


Picture 6: Front 10mm

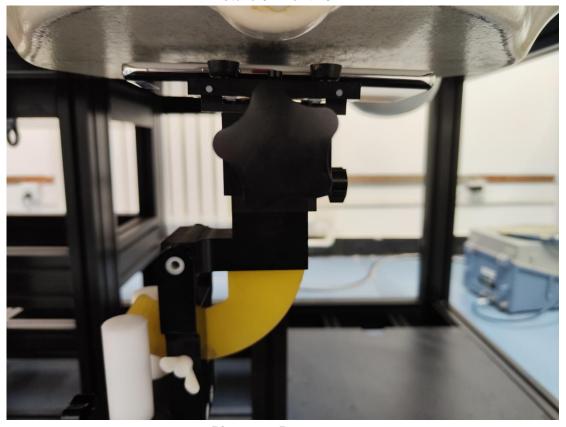

Picture 7: Rear 10mm

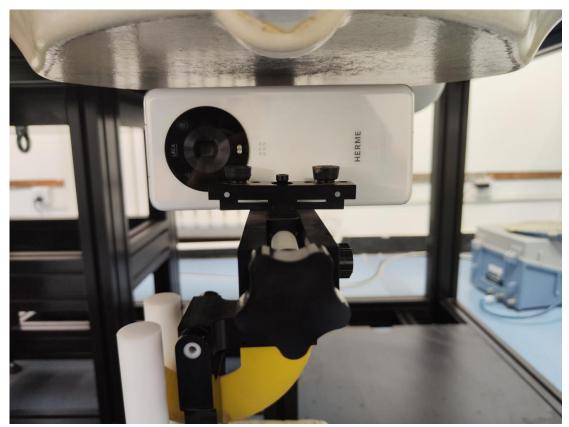


Picture 8: Left 10mm

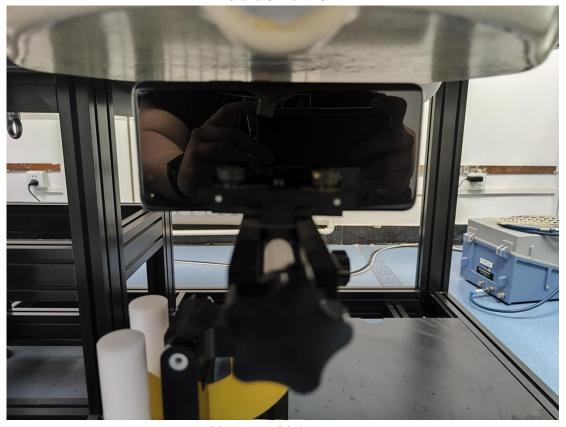


Picture 9: Right 10mm




Picture 10: Top 10mm

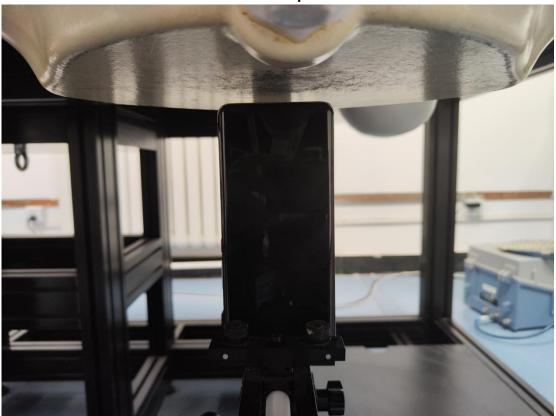


Picture 11: Bottom 10mm

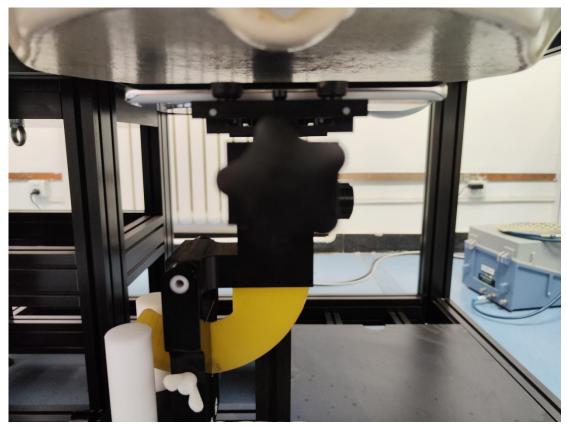


Picture 12: Front 15mm

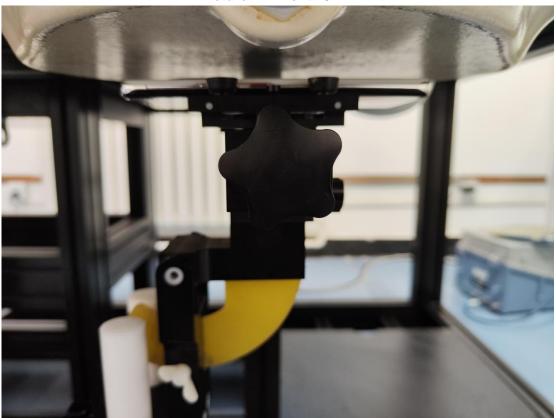


Picture 13: Rear 15mm

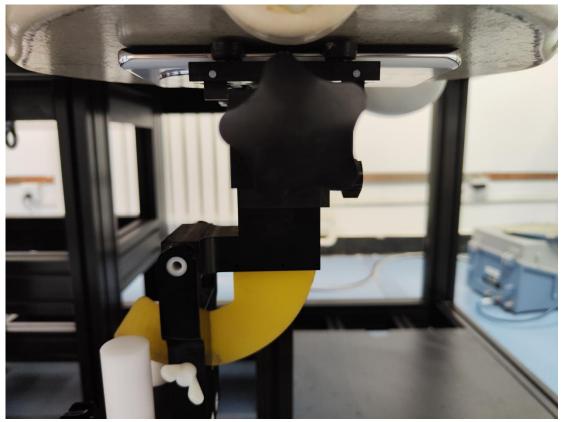


Picture 14: Front 0mm

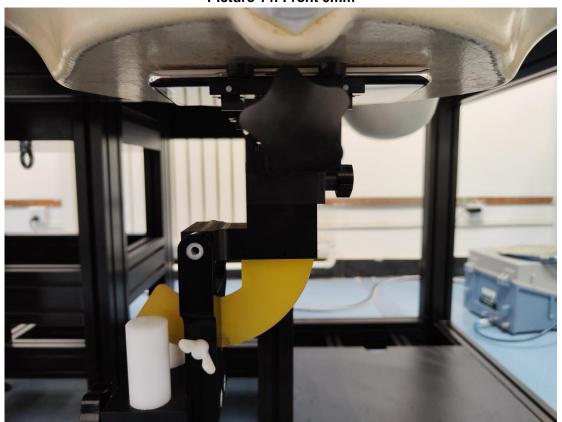

Picture 15: Rear 0mm

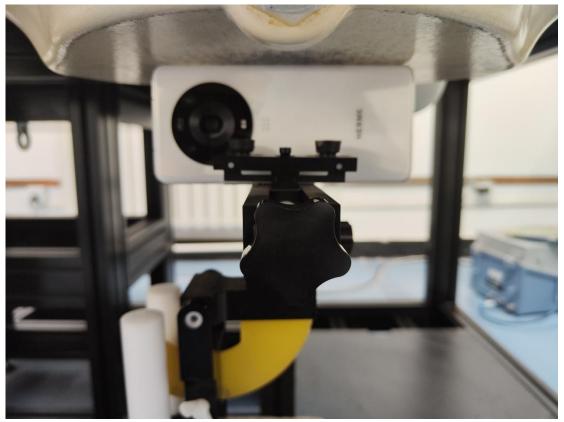


Picture 16: Left 0mm

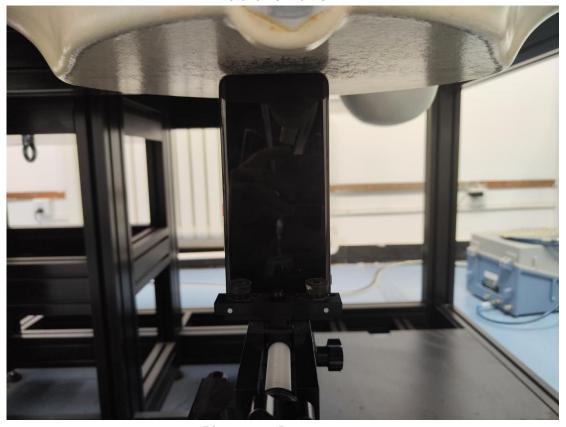

Picture 17: Bottom 0mm

Transmit Antenna Separation Distances

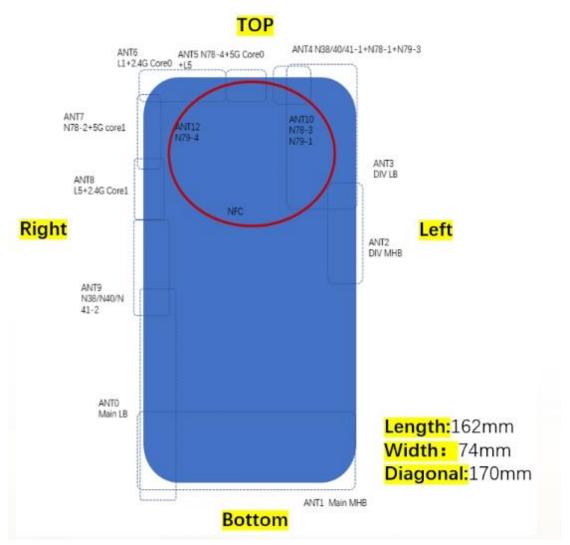

Picture 18 Antenna Locations