


LTE Band 38-ANT1

LTE Band 38: 30MHz – 26.2GHz

NOTE: peak above the limit line is the carrier frequency.

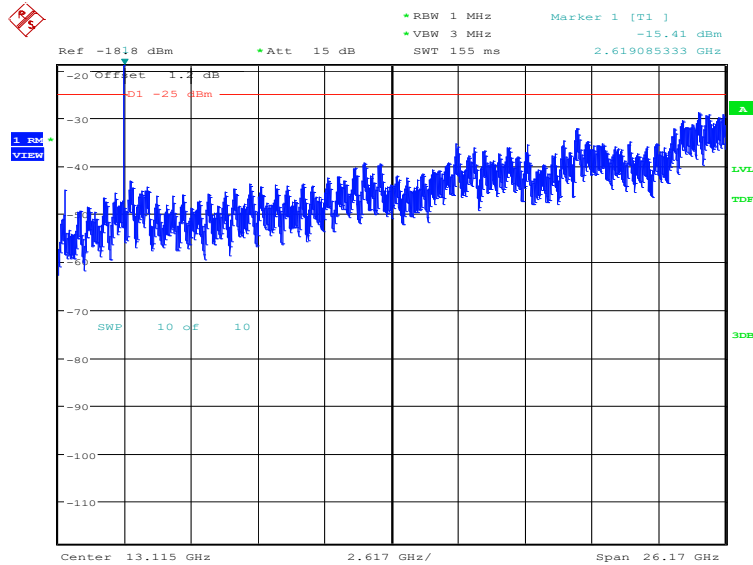


Date: 22.JUL.2021 16:16:33

LTE Band 41-ANT1

LTE Band 41: 30MHz – 26.5GHz

NOTE: peak above the limit line is the carrier frequency.

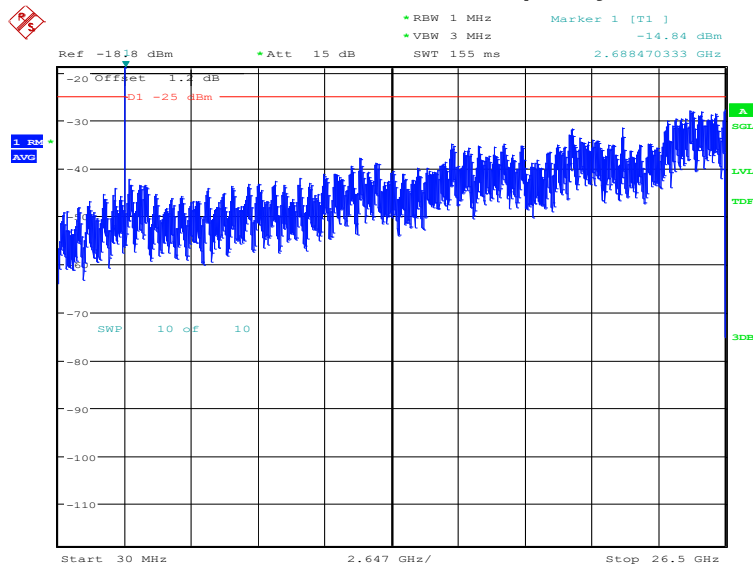


Date: 22.JUL.2021 16:08:23

LTE Band 66-ANT1

LTE Band 66: 30MHz – 17.8GHz


NOTE: peak above the limit line is the carrier frequency.

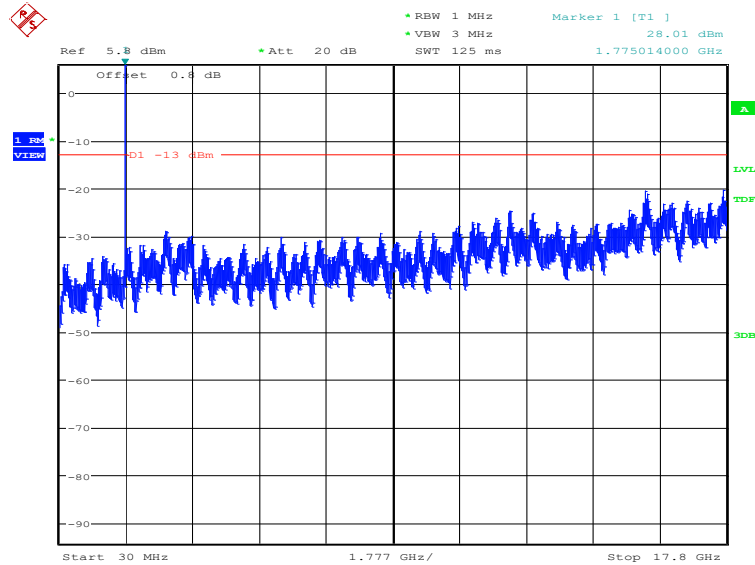

Date: 22.JUL.2021 16:07:11

LTE Band 7_CA-ANT3: 30MHz – 25.7GHz


NOTE: peak above the limit line is the carrier frequency.

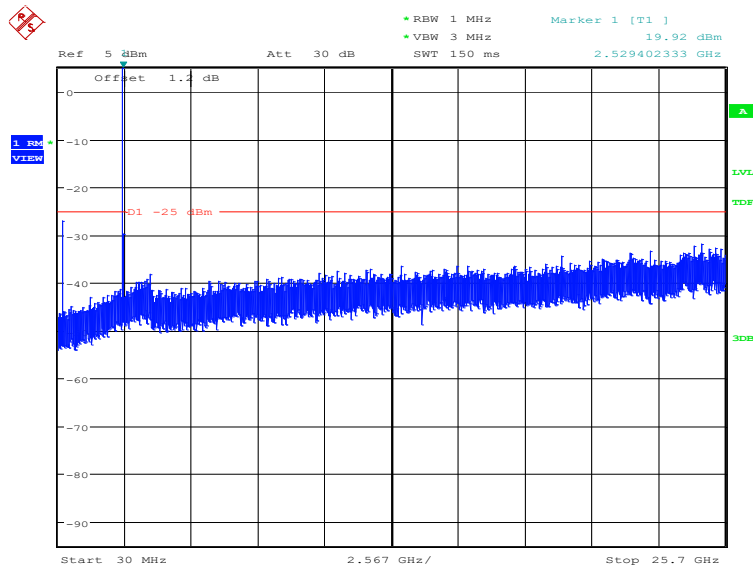

Date: 20.JUL.2021 13:09:48

LTE Band 38_CA-ANT1: 30MHz – 26.2GHz


NOTE: peak above the limit line is the carrier frequency.

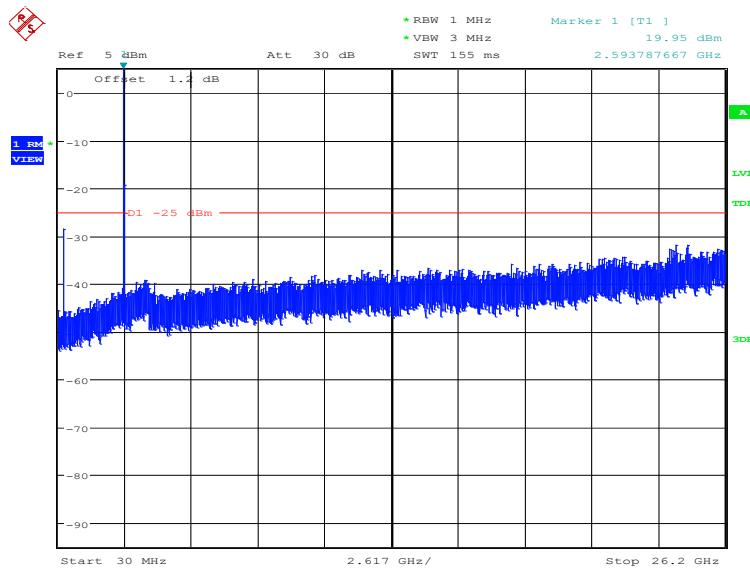

Date: 20.JUL.2021 12:46:29

LTE Band 41_CA-ANT1: 30MHz – 26.47GHz

NOTE: peak above the limit line is the carrier frequency.

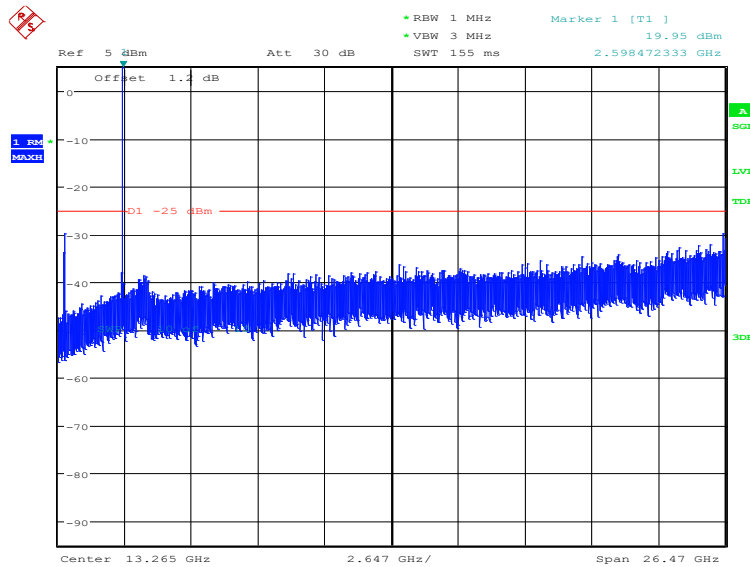

Date: 20.JUL.2021 13:41:53

A.8 Peak-to-Average Power Ratio

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB

- a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
- b) Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
- c) Set the number of counts to a value that stabilizes the measured CCDF curve;
- d) Record the maximum PAPR level associated with a probability of 0.1%.

LTE Band 2-ANT1, 20MHz

Frequency (MHz)	PAPR (dB)		
1880.0	QPSK	16QAM	64QAM
	6.79	7.44	7.44

LTE Band 4-ANT1, 20MHz

Frequency (MHz)	PAPR (dB)		
1732.5	QPSK	16QAM	64QAM
	6.54	7.31	7.40

LTE Band 7-ANT3, 20MHz

Frequency (MHz)	PAPR (dB)		
2535.0	QPSK	16QAM	64QAM
	7.21	7.41	7.53

LTE Band 12-ANT0, 10MHz

Frequency (MHz)	PAPR (dB)		
707.5	QPSK	16QAM	64QAM
	5.51	6.03	6.09

LTE Band 38-ANT1, 20MHz

Frequency (MHz)	PAPR (dB)		
2595.0	QPSK	16QAM	64QAM
	8.27	8.43	8.56

LTE Band 41-ANT1, 20MHz

Frequency (MHz)	PAPR (dB)		
2593.0	QPSK	16QAM	64QAM
	8.24	8.85	9.04

LTE Band 66-ANT1, 20MHz

Frequency (MHz)	PAPR (dB)		
1745.0	QPSK	16QAM	64QAM
	6.60	7.34	7.44

LTE Band 7_CA-ANT3, 20MHz+20MHz

Frequency (MHz)	PAPR (dB)		
2535.0	QPSK	16QAM	64QAM
	7.53	7.88	8.08


LTE Band 38_CA-ANT1, 20MHz+20MHz

Frequency (MHz)	PAPR (dB)		
25955.0	QPSK	16QAM	64QAM
	8.75	9.13	9.20

LTE Band 41_CA-ANT1, 20MHz+20MHz

Frequency (MHz)	PAPR (dB)		
2593.0	QPSK	16QAM	64QAM
	8.75	9.17	9.26

Annex B: Accreditation Certificate

United States Department of Commerce National Institute of Standards and Technology NVLAP® 	
Certificate of Accreditation to ISO/IEC 17025:2017	
NVLAP LAB CODE: 600118-0	
Telecommunication Technology Labs, CAICT Beijing China	
<i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i>	
Electromagnetic Compatibility & Telecommunications	
<i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).</i>	
2020-09-29 through 2021-09-30 Effective Dates	 For the National Voluntary Laboratory Accreditation Program

END OF REPORT