

Report No.: HR/2021/1001401 Page: 1 of 34

FCC TEST REPORT

Application No.:	HR/2021/10014
Applicant:	Honor Device Co., Ltd.
Address of Applicant	Suite 3401,Unit A, Building 6, Shum Yip Sky Park, No.8089,Hongli West Road, Xiangmihu Street, Futian District, Shenzhen, , Guangdong 518040, People's Republic of China
Manufacturer:	Honor Device Co., Ltd.
Address of Manufacturer	Suite 3401,Unit A, Building 6, Shum Yip Sky Park, No.8089,Hongli West Road, Xiangmihu Street, Futian District, Shenzhen, , Guangdong 518040, People's Republic of China
EUT Description:	Smart Phone
Model No.:	NTN-LX3
Trade Mark:	HONOR
FCC ID:	2AYGCNTN-LX3
Standards:	47 CFR Part 2
	47 CFR Part 22 subpart H
	47 CFR Part 24 subpart E
	47 CFR Part 27 subpart C
	47 CFR Part 90 subpart S
Test Method:	FCC KDB 971168 D01 Power Meas License Digital Systems V03r01
	C63.26 (2015)
Date of Receipt:	2021/1/29
Date of Test:	2021/1/29 to 2021/2/19
Date of Issue:	2021/3/10
Test Result :	PASS *

In the configuration tested, the EUT detailed in this report complied with the standards specified above.

Authorized Signature:

Derde yang

Derek Yang Wireless Laboratory Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exconcrate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the antienticity of testing impection center of sole sconsist, or spectron context as at telephone: (86-755) 8307 1443, or small: CN_Deccheck@ass.com

中国 • 深圳 • 科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com Member of the SGS Group (SGS SA)



Report No.: HR/2021/1001401 Page: 2 of 34

1 Version

Revision Record						
Version	Chapter	Date	Modifier	Remark		
01		2021-03-10		Original		

Authorized for issue by:		
Tested By	Dee.Zheng	
	(Dee Zheng) /Project Engineer	
Checked By	David Chen	
	(David Chen) /Reviewer	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excore a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) test and sub approval of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or small: (N_Doccheck@egs.com)



Report No.: HR/2021/1001401 Page: 3 of 34

Contents

1	Vers	sion	2
2	Test	t Summary	5
	2.1	GSM850/UMTS Band 5 & LTE Band 5 / 26(824~849 MHz)	5
	2.2	GSM 1900/UMTS Band 2 /LTE Band 2	5
	2.3	UMTS Band 4 /LTE Band 4 /66	6
	2.4	LTE Band 7	6
	2.5	LTE Band 12/17	7
	2.6	LTE Band 26(814~824 MHz)	9
3	Gen	eral Information	10
	3.1	Details of Client	10
	3.2	Test Location	10
	3.3	Test Facility	11
	3.4	General Description of EUT	12
	3.5	Test Mode	12
	3.6	Test Environment	13
	3.7	Technical Specification	13
	3.8	Test Frequencies	16
4	Des	cription of Tests	22
	4.1	Conducted Output Power	22
	4.2	Effective (Isotropic) Radiated Power of Transmitter	22
	4.3	Occupied Bandwidth	22
	4.4	Band Edge at Antenna Terminals	23
	4.5	Spurious And Harmonic Emissions at Antenna Terminal	24
	4.6	Peak-Average Ratio	24
	4.1	Field Strength of Spurious Radiation	25
	4.2	Frequency Stability / Temperature Variation	26
	4.3	Test Setups	27
		4.3.1 Test Setup 1	27
		4.3.2 Test Setup 2	27
		4.3.3 Test Setup 3	28
	4.4	Test Conditions	29



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excorer the zontex parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior writem approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the easing (c) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing inspection report a cartificate, please contact us at telephone: (85-755)83071443, or small: <u>CN.Doccheck@ags.com</u> No. Workshon, M-10, Middle Sedon, Science & Technology Park, Shenzhen, China 518057 t (86-755)26012053 f (86-755)26710594 www.sgs.com.cn may is science and the science of the size of the grant and science and the science science of the full, without 2005 f (86-755)26710594 sgs.com



		Report No.: Page:	HR/2021/1001401 4 of 34	
5	Main Test Instruments			31
6	Measurement Uncertainty			33
7	Appendixes			34



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not excore a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) please contact us at telephone: (86-755) 8307 1443, or email: CM.Doccheck@esps.com

 No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057
 t (86–755) 26012053 f (86–755) 26710594
 www.sgsgroup.com.cn

 中国・深圳・科技园中区M-10栋一号厂房
 邮编: 518057
 t (86–755) 26012053 f (86–755) 26710594
 sgs.china@sgs.com

Member of the SGS Group (SGS SA)



Report No.: HR/2021/1001401 Page: 5 of 34

Test Summary 2

2.1 GSM850/UMTS Band 5 & LTE Band 5 / 26(824~849 MHz)

Test Item	FCC Rule	Requirements	Test Result	Verdict	Test
restitem	No.	Requirements	Test Result	Veruici	Lab*
Effective (Isotropic) Radiated Power Output Data	§2.1046, §22.913	FCC: ERP ≤ 7 W	Section 1 of Appendix B	Pass	A
Peak-Average Ratio		Limit≤13 dB	Section 2 of Appendix B	Pass	А
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass	A
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass	A
Band Edges Compliance	§2.1051, §22.917	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B	Pass	A
Spurious Emission at Antenna Terminals	§2.1051, §22.917	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B	Pass	A
Field Strength of Spurious Radiation	§2.1053, §22.917	FCC: ≤ -13 dBm/100 kHz.	Section 7 of Appendix B	Pass	В
Frequency Stability	§2.1055, §22.355	≤ ±2.5ppm.	Section 8 of Appendix B	Pass	А
Remark: For the ve	erdict, the "N/A"	denotes "not applicable", the "N/T" den	otes "not tested		

2.2 GSM 1900/UMTS Band 2 /LTE Band 2

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Effective (Isotropic) Radiated Power Output Data	§2.1046, §24.232	EIRP ≤ 2 W	Section 1 of Appendix B	Pass	A
Peak-Average Ratio	§2.1046, §24.232	Limit≤13 dB	Section 2 of Appendix B	Pass	А
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass	A
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass	A



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-end-Conditions/T No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86–755) 26012053 f (86–755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房

邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Member of the SGS Group (SGS SA)



Report No.: HR/2021/1001401 Dono.

6	of	34	

		Page	e: 601.	34	
Band Edges Compliance	§2.1051, §24.238	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B	Pass	A
Spurious Emission at Antenna Terminals	§2.1051, §24.238	≤ -13 dBm/1 MHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B	Pass	A
Field Strength of Spurious Radiation	§2.1053, §24.238	≤ -13 dBm/1 MHz.	Section 7 of Appendix B	Pass	В
Frequency Stability	§2.1055, §24.235	≤ ±2.5 ppm.	Section 8 of Appendix B	Pass	А
Remark: For the ve	erdict. the "N/A"	denotes "not applicable", the "N/T" deno	otes "not tested		

2.3 UMTS Band 4 /LTE Band 4 /66

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(d)	EIRP ≤ 1 W	Section 1 of Appendix B	Pass	А
Peak-Average Ratio	§2.1046, §27.50(d)	Limit≤13 dB	Section 2 of Appendix B	Pass	А
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass	A
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass	A
Band Edges Compliance	§2.1051, §27.53(h)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B	Pass	A
Spurious Emission at Antenna Terminals	§2.1051, §27.53(h)	≤ -13 dBm/1 MHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B	Pass	A
Field Strength of Spurious Radiation	§2.1053, §27.53(h)	≤ -13 dBm/1 MHz.	Section 7 of Appendix B	Pass	В
Frequency Stability	§2.1055, §27.54	≤ ±2.5 ppm.	Section 8 of Appendix B	Pass	А
Remark: For the ve	erdict, the "N/A"	denotes "not applicable", the "N/T" deno	otes "not tested	".	

2.4 LTE Band 7

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Effective (Isotropic) Radiated Power	§2.1046, §27.50(h)	EIRP ≤ 2W	Section 1 of Appendix B	Pass	А





Report No.: HR/2021/1001401

Output Data					
Peak-Average Ratio	§27.50(a)	≤13 dB	Section 2 of Appendix B	Pass	А
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass	A
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass	A
	§2.1051, §27.53(m4)	For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section.	Section 5 of Appendix B	Pass	A
	§2.1051, §27.53(m)	25 dBm/ 1 MHz 9 kHz X=Max {6MHz, EBW}	Section 6 of Appendix B	Pass	A
Sourious .	§2.1053, §27.53(m)	Channel Edge 1 MHz 9 kHz 25 dBm/ 1 MHz 9 kHz X=Max {6MHz, EBW}	Section 7 of Appendix B	Pass	В
Stability	§2.1055, §27.54	Within authorized bands of operation/frequency block. denotes "not applicable", the "N/T" deno	Section 8 of Appendix B	Pass	А

2.5 LTE Band 12/17

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Effective (Isotropic)	§27.50(c)	FCC: ERP ≤ 3 W.	Section 1 of	Pass	А
Radiated Power			Appendix B		



Member of the SGS Group (SGS SA)



Report No.: HR/2021/1001401

		Page	e: 8 of 3	34	
Output Data					
Peak-Average Ratio	§2.1046, §27.50(c)	Limit≤13 dB	Section 2 of Appendix B	Pass	А
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass	A
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass	A
Band Edges Compliance	§2.1051, §27.53(g)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B	Pass	A
Spurious Emission at Antenna Terminals	§2.1051, §27.53(g)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B	Pass	А
Field Strength of Spurious Radiation	§2.1053, §27.53(g)	FCC: ≤ -13 dBm/100 kHz.	Section 7 of Appendix B	Pass	В
Frequency Stability	§2.1055, §27.54	≤ ±2.5ppm.	Section 8 of Appendix B	Pass	А
Remark: For the ve	erdict, the "N/A"	denotes "not applicable", the "N/T" den	otes "not tested"		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excore a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) test and sub approval of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or small: (N-Doccheck@sss.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国・深圳・科技國中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.com

Member of the SGS Group (SGS SA)



Report No.: HR/2021/1001401 Page: 9 of 34

2.6 LTE Band 26(814~824 MHz)

Test Item	FCC Rule No.	Requirements	Test Result	Verdict	Test Lab*
Transmitter Conducted Power Output	§2.1046, §90.635	< 100 W.	Section 1 of Appendix B	Pass	A
Peak-Average Ratio		FCC: Limit≤13 dB	Section 2 of Appendix B	Pass	А
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass	A
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass	А
Emission Mask	§2.1051 § 90.691	For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 116 Log10(f/6.1) decibels or 50+10Log10(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.	Section 5 of Appendix B	Pass	A
Spurious Emission at Antenna Terminals	§2.1051, §90.691	< 43 + 10Log10(P[Watts]) for all out-of-band emissions	Section 6 of Appendix B	Pass	А
Field Strength of Spurious Radiation	§2.1053, §90.691	< 43 + 10Log10(P[Watts]) for all out-of-band emissions	Section 7 of Appendix B	Pass	В
Frequency Stability	§2.1055, §90.213	< ±2.5ppm.	Section 8 of Appendix B	Pass	А
Remark: For the ve	erdict, the "N/A"	denotes "not applicable", the "N/T" deno	otes "not tested	".	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excore a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) test and sub sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755)8307 1443, or smail: CM.Doccheck@egs.com



Report No.: HR/2021/1001401 Page: 10 of 34

3 General Information

3.1 Details of Client

Applicant:	Honor Device Co., Ltd.		
Address of Applicant	Suite 3401,Unit A, Building 6, Shum Yip Sky Park, No.8089,Hongli West Road, Xiangmihu Street, Futian District, Shenzhen, , Guangdong 518040, People's Republic of China		
Manufacturer:	Honor Device Co., Ltd.		
Address of Manufacturer	Suite 3401,Unit A, Building 6, Shum Yip Sky Park, No.8089,Hongli West Road, Xiangmihu Street, Futian District, Shenzhen, , Guangdong 518040, People's Republic of China		

3.2 Test Location

Lab A:

Company:	SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
Address:	No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China
Post code:	518057

Lab B:

Company:	SGS-CSTC STANDARDS TECHNICAL SERVICES (XI 'AN) CO., LTD.
Address:	1/F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, Xi'an, Shaanxi China
Post code:	710086



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exconerate parities to a transaction from exercising all their rights and obligations under the transaction documents. This document is content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days on). Attention. To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sus.com

SGS

Report No.: HR/2021/1001401 Page: 11 of 34

3.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

Lab A:

• A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

• VCCI

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

• FCC – Designation Number: CN1178

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

Innovation, Science and Economic Development Canada

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

Lab B:

A2LA (Certificate No. 4854.01)

SGS-CSTC STANDARDS TECHNICAL SERVICES (XI 'AN) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4854.01.

Designation Number: CN1271.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Document at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is content of the Content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) testing inspection ceport & certificate, please contact us at telephone: (86-755) 8307 1443, or small: Ch.Doccheck deg.com

中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Report No.: HR/2021/1001401 Page: 12 of 34

3.4 General Description of EUT

EUT Description:	Smart Phone
•	
Model No.:	NTN-LX3
Trade Mark:	HONOR
Hardware Version:	HL1NTNM
Software Version:	5.0.0.74(C900E74R1P2)
Sample Type:	Portable Device, Module
Antenna Type:	🗌 External, 🔀 Integrated
Antenna Gain:	GSM850: -0.6dBi(Down Antenna); -5.3dBi(Up Antenna); GSM1900: -5.4dBi(Down Antenna); -3.1dBi(Up Antenna); WCDMA Band II: -5.4dBi(Down Antenna); -3.1dBi(Up Antenna); WCDMA Band VI: -1.0dBi(Down Antenna); -6.3dBi(Up Antenna); WCDMA Band V: -0.6dBi(Down Antenna); -5.3dBi(Up Antenna); LTE Band 2: -5.4dBi(Down Antenna); -3.1dBi(Up Antenna); LTE Band 2: -5.4dBi(Down Antenna); -3.1dBi(Up Antenna); LTE Band 4: -1.0dBi(Down Antenna); -6.3dBi(Up Antenna); LTE Band 5: -0.6dBi(Down Antenna); -6.3dBi(Up Antenna); LTE Band 5: -0.6dBi(Down Antenna); -5.3dBi(Up Antenna); LTE Band 7: -1.4dBi(Down Antenna); -2.8dBi(Up Antenna); LTE Band 12:-1.6dBi(Down Antenna); -2.8dBi(Up Antenna); LTE Band 17: -1.6dBi(Down Antenna); -5.3dBi(Up Antenna); LTE Band 26: -0.6dBi(Down Antenna); -5.3dBi(Up Antenna); LTE Band 26: -0.6dBi(Down Antenna); -5.3dBi(Up Antenna);

3.5 Test Mode

Test Modes Description
GSM system, GSM/GPRS, GMSK modulation
GSM system, EGPRS, 8PSK modulation
UMTS system, WCDMA, QPSK modulation
LTE system, QPSK modulation
LTE system, 16QAM modulation

Remark: The test mode(s) are selected according to relevant radio technology specifications.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions/Terms-end-Conditions.aspx and, for electronic Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction Issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excente a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing Inspection report & certificate, please contact us at telephone: (86-755)83071443, or email: CN.Doccheck@cgs.com



Report No.: HR/2021/1001401 13 of 34 Page:

3.6 Test Environment

Operating Environment:		
Humidity:	50 %	6 RH
Atmospheric Pressure:	101.3	0 KPa
Temperature	NT	25 °C
	LV	3.6V
Voltage:	NV	3.87V
	HV	4.48V

Remark: LV= lower extreme test voltage; NV= nominal voltage

HV= upper extreme test voltage; NT= normal temperature

3.7 Technical Specification

Characteristics	Description				
	⊠ GSM				
Radio System Type	UMTS				
	🛛 LTE				
	Band	ТХ	RX		
	GSM850	824 to 849 MHz	869 to 894 MHz		
	GSM1900	1850 to 1910 MHz	1930 to 1990 MHz		
	UMTS Band II	1850 to 1910 MHz	1930 to 1990 MHz		
	UMTS Band IV	1710 to 1755 MHz	2110 to 2155 MHz		
	UMTS Band V	824 to 849 MHz	869 to 894 MHz		
	LTE Band 2	1850 to 1910 MHz	1930 to 1990 MHz		
	LTE Band 4	1710 to 1755 MHz	2110 to 2155 MHz		
Supported Frequency Range	LTE Band 5	824 to 849 MHz	869 to 894 MHz		
	LTE Band 7	2500 to 2570 MHz	2620 to 2690 MHz		
	LTE Band 12	699 to 716 MHz	729 to 746 MHz		
	LTE Band 17	704 to 716 MHz	734 to 746 MHz		
	LTE Band 26	814 to 824MHz	859 to 869 MHz		
	(814 to 824 MHz)	014 10 024101112	009 10 009 MI 12		
	LTE Band 26	824 to 849 MHz	869 to 894 MHz		
	(824 to 849 MHz)				
	LTE Band 66	1710 to 1780 MHz	2110 to 2200 MHz		
Target TX Output Power	GSM850:33.3dBm GSM1900: 30.5dBm UMTS Band II: 24.8dBm				



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's osile responsibility is to its Cilent and this document does not excore a transaction from exercising all their rights and obligations under the transaction document. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this ter report refer only to the sample(s) test and sub aproval of testing /inspection report & cartificate, please contact us at telephone: (86-755)83071443, or small: CN. Doccheck@ags.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86–755) 26012053 f (86–755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房

邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Report No.: HR/2021/1001401 14 of 34 Page.

		Pa	ge:	14 of 34
	UMTS Band IV: 24.3dBm		-	
	UMTS Band V: 25dBm			
	LTE Band 2: 24.5dBm			
	LTE Band 4: 24.3dBm			
	LTE Band 5: 25.0dBm			
	LTE Band 7: 23.3dBm			
	LTE Band 12: 25dBm			
	LTE Band 17: 25dBm			
	LTE Band 26: 25dBm			
	LTE Band 66: 23.3dBm			
	GSM system:		🖾 0.2 MH	7
	UMTS system:		S MHz	
	OWITS System.			
	LTE Band 2			lz;⊠3 MHz; ⊠5 MHz; ⊠ ⊠15 MHz, ⊠20 MHz
	LTE Band 4			lz;⊠3 MHz; ⊠5 MHz; ⊠ ⊠15 MHz, ⊠20 MHz
	LTE Band 5		⊠1.4 MH 10 MHz	lz;⊠3 MHz; ⊠5 MHz; ⊠
	LTE Band 7		⊠5 MHz;	🛛 🖾 10 MHz; 🖾 15 MHz, 🖾
			<u>20 MHz</u>	
Supported Channel Bandwidth	LTE Band 12		⊠1.4 MH 10 MHz	lz;⊠3 MHz; ⊠5 MHz; ⊠
	LTE Band 17		-	10 MHz
				Iz; 🖂 3 MHz; 🖂 5 MHz; 🖂
	LTE Band 26(814-824)		10 MHz;	
	LTE Band 26(824-849)			lz;⊠3 MHz; ⊠5 MHz; ⊠ ⊠15 MHz
	LTE Band66			lz;⊠3 MHz; ⊠5 MHz; ⊠ ⊠15 MHz, ⊠20 MHz
	Note1: WCDMA supports	HSUPA, HS	DPA, DS-	HSDPA, but only the worst
	case was tested and the data displayed in this report.			
Characteristics				
Characteristics	Description			
	GSM850	247KGXW;	247KG7V	V
	GSM1900	247KGXW;	244KG7V	V
	UMTS Band II	4M17F9W;		
	UMTS Band IV	4M15F9W;		
	UMTS Band V	4M16F9W;		
Designation of Emissions		1M10G7D;	1M09W7D	:
Designation of Emissions		2M70G7D;		
(Remark: the necessary		4M48G7D;4		
bandwidth of which is the	LTE Band 2	8M93G7D;8		
worst value from the		13M5G7D;		
measured occupied		17M9G7D;		
bandwidths for each type of		1M09G7D;		
channel bandwidth		2M70G7D;		
configuration.)			4M50W7D	
	LTE Band 4	8M93G7D;8		
		13M5G7D;		
		17M9G7D;17M9W7D; 1M09G7D;1M09W7D;		
	LTE Band 5			
		2M70G7D;2	21VI09VV/D	·



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed
overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents,
subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.
Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is
advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of
Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a
transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced
except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or
appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the
results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing (inspection report & certificate, please contact us at telephone: (86-755) 8307 1443.
or small: CN Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86–755) 26012053 f (86–755) 26710594 www.sgsgroup.com.cn
INULI WORKSTOD, M-10, MIDDIE DECIDIT, SCIENCE & TECHNOLOGY PARK, STERIZTER, UTILIA 518U57 L 100-700 ZDV 12003 L 100-700 ZDV 10094 WWW.SUSULOUP.CUTI.CT

中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Member of the SGS Group (SGS SA)



Report No.:	HR/2021/1001401
-------------	-----------------

		_ .	1 -
		Page:	15 of 34
		4M48G7D;4M49W7D;	
		8M95G7D;8M93W7D;	
		4M48G7D;4M49W7D;	
	LTE Band 7	8M93G7D;8M95W7D;	
		13M5G7D;13M5W7D;	
		17M9G7D;17M9W7D;	
		1M09G7D;1M09W7D;	
	LTE Band 12	2M70G7D;2M69W7D;	
		4M48G7D;4M49W7D;	
		8M95G7D;8M95W7D;	
	LTE Dand 17	4M48G7D;4M49W7D;	
	LTE Band 17	8M95G7D;8M95W7D;	
		1M09G7D;1M09W7D;	
	LTE Band 26	2M70G7D;2M69W7D;	
	(814-824)	4M48G7D;4M50W7D;	
		8M91G7D;8M93W7D;	
		1M10G7D;1M09W7D;	
	LTE Band 26	2M70G7D;2M69W7D;	
	(824-849)	4M48G7D;4M49W7D;	
	(824-849)	8M93G7D;8M93W7D;	
		13M5G7D;13M5W7D;	
		1M09G7D;1M09W7D;	
		2M70G7D;2M69W7D;	
		4M48G7D;4M50W7D;	
	LTE Band 66	8M93G7D;8M93W7D;	
		13M5G7D;13M5W7D;	
		17M9G7D;17M9W7D;	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excore a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) test and sub approval of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or small: (N-Doccheck@sss.com)

 No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057
 t (86–755) 26012053 f (86–755) 26710594
 www.sgsgroup.com.cn

 中国・深圳・科技园中区M-10栋一号厂房
 邮编: 518057
 t (86–755) 26012053 f (86–755) 26710594
 sgs.china@sgs.com



Report No.: HR/2021/1001401 Page: 16 of 34

3.8 Test Frequencies

Test Mode	TX / RX			
		Low (L)	Middle (M)	High (H)
	ТХ	Channel 128	Channel 190	Channel 251
GSM850		824.2MHz	836.6 MHz	848.8 MHz
	DV	Channel 128	Channel 190	Channel 251
	RX	869.2 MHz	881.6 MHz	893.8 MHz

Test Mode	TY / PY	TX / RX RF Channel				
I est Mode		Low (L)	Middle (M)	High (H)		
GSM1900	ТХ	Channel 512	Channel 661	Channel 810		
		1850.2MHz	1880.0 MHz	1909.8 MHz		
	RX	Channel 512	Channel 661	Channel 810		
		1930.2 MHz	1960.0 MHz	1989.8 MHz		

Test Mode	TV / DV	TX / RX RF Channel				
I est Mode		Low (L)	Middle (M)	High (H)		
	ТХ	Channel 9262	Channel 9400	Channel 9538		
WCDMA Band II		1852.4 MHz	1880.0 MHz	1907.6 MHz		
	DV	Channel 9662	Channel 9800	Channel 9938		
	RX	1932.4 MHz	1960.0 MHz	1987.6 MHz		

Test Mode	TY / PY	TX / RX RF Channel				
I EST MOUE		Low (L)	Middle (M)	High (H)		
		Channel 1312	Channel 1413	Channel 1513		
WCDMA Band IV	TX	1712.4MHz	1732.6 MHz	1752.6 MHz		
	DV	Channel 1537	Channel 1638	Channel 1738		
	RX	2112.4 MHz	2132.6 MHz	2152.6 MHz		

Test Mode	TY / PY	TX / RX RF Channel				
I est Mode		Low (L)	Middle (M)	High (H)		
	TX RX	Channel 4132	Channel 4182	Channel 4233		
WCDMA Band V		826.4MHz	836.4 MHz	846.6 MHz		
		Channel 4357	Channel 4407	Channel 4458		
		871.4 MHz	881.4 MHz	891.6 MHz		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.ferms-end-conditions.ferms-end-conditions.



Report No.: HR/2021/1001401

			Pag	e: 17 of 34	4	
Test Mode	Bandwidth	TX / RX		RF Channel		
Test Mode	Danuwidin		Low (L)	Middle (M)	High (H)	
			Channel 18607	Channel 18900	Channel 19193	
		ТХ	1850.7 MHz	1880 MHz	1909.3 MHz	
	1.4MHz	RX	Channel 607	Channel 900	Channel 1193	
			1930.7 MHz	1960 MHz	1989.3 MHz	
			Channel 18615	Channel 18900	Channel 19185	
	3MHz	ТХ	1851.5 MHz	1880 MHz	1908.5 MHz	
		RX	Channel 615	Channel 900	Channel 1185	
			1931.5 MHz	1960 MHz	1988.5 MHz	
			Channel 18625	Channel 18900	Channel 19175	
	5MHz	TX	1852.5 MHz	1880 MHz	1907.5 MHz	
		RX	Channel 625	Channel 900	Channel1175	
			1932.5 MHz	1960 MHz	1987.5 MHz	
LTE Band 2		тх	Channel 18650	Channel 18900	Channel 19150	
			1855 MHz	1880 MHz	1905 MHz	
	10MHz	RX	Channel 650	Channel 900	Channel 1150	
			1935 MHz	1960 MHz	1985 MHz	
			Channel 18675	Channel 18900	Channel 19125	
		ТХ	1857.5 MHz	1880 MHz	1902.5 MHz	
	15MHz	RX	Channel 675	Channel 900	Channel 1125	
			1937.5 MHz	1960 MHz	1982.5 MHz	
			Channel 18700	Channel 18900	Channel 19100	
		ТХ	1860 MHz	1880 MHz	1900 MHz	
	20MHz	RX	Channel 700	Channel 900	Channel 1100	
		ΓΛ	1940 MHz	1960 MHz	1980 MHz	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation on liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excore a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) test retaining. To dock the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or small: CN. Doccheck@ggs.com



Report No.: HR/2021/1001401 Page: 18 of 34

Test Made	Dondwidth			RF Channel	
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
			Channel 19957	Channel 20175	Channel 20393
		TX	1710.7 MHz	1732.5 MHz	1754.3 MHz
	1.4MHz	RX	Channel 1975	Channel 2175	Channel 2375
			2112.5 MHz	2132.5MHz	2152.5 MHz
			Channel 19965	Channel 20175	Channel 20385
	0.41	ТХ	1711.5 MHz	1732.5 MHz	1753.5 MHz
	3MHz	RX	Channel 2000	Channel 2175	Channel 2350
			2115 MHz	2132.5MHz	2150 MHz
	5MHz -		Channel 19975	Channel 20175	Channel 20375
		ТХ	1712.5 MHz	1732.5 MHz	1752.5 MHz
		RX	Channel 1975	Channel 2175	Channel 2375
			2112.5 MHz	2132.5MHz	2152.5 MHz
LTE Band 4		тх	Channel 20000	Channel 20175	Channel 20350
			1715 MHz	1732.5 MHz	1750 MHz
	10MHz	RX	Channel 2000	Channel 2175	Channel 2350
			2115 MHz	2132.5MHz	2150 MHz
			Channel 20025	Channel 20175	Channel 20325
		ТХ	1717.5 MHz	1732.5 MHz	1747.5 MHz
	15MHz	RX	Channel 2025	Channel 2175	Channel 2325
			2117.5 MHz	2132.5MHz	2147.5 MHz
			Channel 20050	Channel 20175	Channel 20300
		TX	1720 MHz	1732.5 MHz	1745 MHz
	20MHz	RX	Channel 2050	Channel 2175	Channel 2300
		۳۸	2120 MHz	2132.5MHz	2145 MHz

Test Mode	Dandwidth		RF Channel		
Test Wode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
			Channel 20407	Channel 20525	Channel 20643
		TX	824.7 MHz	836.5 MHz	848.3 MHz
	1.4MHz	RX	Channel 2407	Channel 2525	Channel 2643
			869.7 MHz	881.5 MHz	893.3 MHz
			Channel 20415	Channel 20525	Channel 20635
		TX	825.5 MHz	836.5 MHz	847.5 MHz
	3MHz	RX	Channel 2415	Channel 2525	Channel 2635
			870.5 MHz	881.5 MHz	892.5 MHz
LTE Band 5		тх	Channel 20425	Channel 20525	Channel 20625
			826.5 MHz	836.5 MHz	846.5 MHz
	5MHz	RX	Channel 2425	Channel 2525	Channel 2625
			871.5 MHz	881.5 MHz	891.5 MHz
	10MHz		Channel 20450	Channel 20525	Channel 20600
		TX	829 MHz	836.5 MHz	844 MHz
		RX	Channel 2450	Channel 2525	Channel 2600
			874 MHz	881.5 MHz	889 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate pariles to a transaction from exercising all their rights and obligations under the transaction documents. This document tacont be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgrey or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 83071443, or smail: CN.Doccheck@csss.com



Report No.: HR/2021/1001401

			Pag	e: 19 of 34	4
Test Mode	Bandwidth	TX / RX	RF Channel		
Test Mode	Danuwiuun		Low (L)	Middle (M)	High (H)
			Channel 20775	Channel 21100	Channel 21425
		TX	2502.5 MHz	2535 MHz	2567.5 MHz
	5MHz	RX	Channel 2775	Channel 3100	Channel 5825
			2622.5 MHz	2655 MHz	2687.5 MHz
			Channel 20800	Channel 21100	Channel 21400
		TX	2505 MHz	2535 MHz	2565 MHz
	10MHz	RX	Channel 2800	Channel 3100	Channel 3400
LTE David 7			2625 MHz	2655 MHz	2685 MHz
LTE Band 7			Channel 20825	Channel 21100	Channel 21375
		TX	2507.5 MHz	2535 MHz	2562.5 MHz
	15MHz	DV	Channel 2825	Channel 3100	Channel 3375
		RX	2627.5 MHz	2655 MHz	2682.5 MHz
			Channel 20850	Channel 21100	Channel 21350
	TX	2510 MHz	2535 MHz	2560 MHz	
	20MHz	RX	Channel 2850	Channel 3100	Channel 3350
			2630 MHz	2655 MHz	2680 MHz

Test Mode	Bandwidth	TX / RX		RF Channel	
Test Wode	Danuwiutn		Low (L)	Middle (M)	High (H)
			Channel 23017	Channel 23095	Channel 23173
		TX	699.7 MHz	707.5 MHz	715.3 MHz
	1.4MHz	RX	Channel 5017	Channel 5095	Channel 5173
		ΓΛ	729.7 MHz	737.5 MHz	745.3 MHz
		Channel 23025	Channel 23095	Channel 23165	
	3MHz	TX	700.5 MHz	707.5 MHz	714.5 MHz
		RX	Channel 5025	Channel 5095	Channel 5165
			730.5 MHz	737.5 MHz	744.5 MHz
LTE Band 12		тх	Channel 23035	Channel 23095	Channel 23155
			701.5 MHz	707.5 MHz	713.5 MHz
	5MHz	RX	Channel 5035	Channel 5095	Channel 5155
			731.5 MHz	737.5 MHz	743.5 MHz
			Channel 23060	Channel 23095	Channel 23130
		TX	704 MHz	707.5 MHz	711 MHz
	10MHz	RX	Channel 5060	Channel 5095	Channel 5130
			734 MHz	737.5 MHz	741 MHz

Test Mode	Deve du vielth	TX / RX	RF Channel			
Test Mode	Bandwidth		Low (L)	Middle (M)	High (H)	
			Channel 23755	Channel 23790	Channel 23825	
	5MHz	TX	706.5 MHz	710 MHz	713.5 MHz	
LTE Band 17		RX	Channel 5755	Channel 5790	Channel 5825	
			736.5 MHz	740 MHz	743.5 MHz	
	10MHz		Channel 23780	Channel 23790	Channel 23800	
		TX	709 MHz	710 MHz	711 MHz	
		RX	Channel 5780	Channel 5790	Channel 5800	
			739 MHz	740 MHz	741 MHz	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the faw. Unless otherwise stated the results shown in this test report refer only to the easmple(s) lested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing (inspection report & cartificate, please contact us at telephone: (85-755) 8307 1443, or email: CN Deccheck@sg.com

www.sugp.m-iu, mode Securit, Science a reciminity Park, Shenzhein, China 518057 1 (66-75) 26012053 1 (66-755) 26710594 www.sugsgroup.com 中国・深圳・科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Report No.: HR/2021/1001401 Page: 20 of 34

Test Made	Deve du vielth		RF Channel			
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)	
			Channel 26697	Channel 26740	Channel 26783	
		TX	814.7 MHz	819 MHz	823.3 MHz	
	1.4MHz	RX	Channel 8697	Channel 8740	Channel 8783	
		ГЛ	859.7 MHz	864MHz	868.3 MHz	
			Channel 26705	Channel 26740	Channel 26775	
	3MHz	TX	815.5 MHz	819 MHz	822.5 MHz	
		RX	Channel 8705	Channel 8740	Channel 8775	
LTE Band 26			860.5 MHz	864MHz	867.5 MHz	
(814-824)	5MHz	тх	Channel 26715	Channel 26740	Channel 26765	
(0.1.0_1)			816.5 MHz	819 MHz	821.5 MHz	
		RX	Channel 8715	Channel 8740	Channel 8755	
			861.5 MHz	864MHz	866.5 MHz	
			Channel 26740	Channel 26740	Channel 26740	
		TX	819 MHz	819 MHz	819 MHz	
	10MHz	DV	Channel 8740	Channel 8740	Channel 8740	
			RX	864MHz	864MHz	864MHz

Test Mode	Bandwidth	TX / RX	RF Channel			
Test Wode			Low (L)	Middle (M)	High (H)	
			Channel 26797	Channel 26915	Channel 27033	
		TX	824.7 MHz	836.5 MHz	848.3 MHz	
	1.4MHz	DV	Channel 8697	Channel 8915	Channel 9033	
		RX	859.7 MHz	881.5 MHz	893.3 MHz	
			Channel 26805	Channel 26915	Channel 27025	
		TX	825.5 MHz	836.5 MHz	847.5 MHz	
	3MHz	RX	Channel 8805	Channel 8915	Channel 9025	
		ГЛ	860.5 MHz	881.5 MHz	892.5 MHz	
	5MHz	тх	Channel 26815	Channel 26915	Channel 27015	
LTE Band26			826.5 MHz	836.5 MHz	846.5 MHz	
(824-849)		RX	Channel 8815	Channel 8915	Channel 9015	
(02:0:0)			871.5 MHz	881.5 MHz	891.5 MHz	
	10MHz	тх	Channel 26840	Channel 26915	Channel 26990	
			829 MHz	836.5 MHz	844 MHz	
		RX	Channel 8840	Channel 8915	Channel 8990	
			874 MHz	881.5 MHz	889 MHz	
			Channel 26865	Channel 26915	Channel 26965	
		TX	831.5 MHz	836.5 MHz	841.5 MHz	
	15MHz	RX	Channel 8865	Channel 8915	Channel 8965	
			876.5 MHz	881.5 MHz	886.5 MHz	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excore a the parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days on). Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: **CN_Doccheck@sus.com**



Report No.: HR/2021/1001401

			Pa	age: 21 of 3	34
Test Mode	Bandwidth	TX / RX		RF Channel	
Test Mode	Danuwiuun		Low (L)	Middle (M)	High (H)
			Channel 131979	Channel 132322	Channel 132665
		TX	1710.7 MHz	1745 MHz	1779.3 MHz
	1.4MHz	RX	Channel 66443	Channel 66786	Channel 67329
			2110.7 MHz	2145MHz	2199.3 MHz
			Channel 131987	Channel 132322	Channel 132657
		ТХ	1711.5 MHz	1745 MHz	1778.5MHz
	3MHz	RX	Channel 66451	Channel 66786	Channel 67121
			2111.5 MHz	2145MHz	2198.5MHz
			Channel 131997	Channel 132322	Channel 132647
	5MHz	TX	1712.5 MHz	1745 MHz	1777.5 MHz
		RX	Channel 66461	Channel 66786	Channel 67311
			2112.5 MHz	2145MHz	2197.5 MHz
LTE Band66	10MHz	ТХ	Channel 132022	Channel 132322	Channel 132622
			1715 MHz	1745 MHz	1775 MHz
		RX	Channel 66486	Channel 66786	Channel 67286
			2115 MHz	2145MHz	2195 MHz
		тх	Channel 132047	Channel 132322	Channel 132597
			1717.5 MHz	1745 MHz	1772.5 MHz
	15MHz	RX	Channel 66511	Channel 66786	Channel 67261
			2117.5 MHz	2145MHz	2192.5 MHz
			Channel 132072	Channel 132322	Channel 132572
		TX	1720 MHz	1745 MHz	1770 MHz
	20MHz	RX	Channel 66536	Channel 66786	Channel 67236
			2120 MHz	2145MHz	2190 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) test retaining. To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or small: CN. Doccheck@gas.com



Report No.: HR/2021/1001401 Page: 22 of 34

4 Description of Tests

4.1 Conducted Output Power

Measurement Procedure: FCC KDB 971168 D01 V03r01

The transmitter output was connected to a calibrated coaxial cable, attenuator and power meter, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The power output at the transmitter antenna port was determined by adding the value of the cable insertion loss to the power reading. The tests were performed at three frequencies (low channel, middle channel and high channel) and on the highest power levels, which can be setup on the transmitters.

Remark: Reference test setup 1

4.2 Effective (Isotropic) Radiated Power of Transmitter

Measurement Procedure: FCC KDB 971168 D01 V03r01 ; C63.26 (2015) Calculate power in dBm by the following formula: ERP (dBm) = Conducted Power (dBm) + antenna gain (dBd) EIRP(dBm) = Conducted Power (dBm) + antenna gain (dBi) EIRP=ERP+2.15dB

4.3 Occupied Bandwidth

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 4.2

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel, middle channel and high channel). The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

Remark: Reference test setup 1



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions of Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-eDocument.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exoere the approxed participation in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the sample(s) tested and such sample(s) tested and such sample(s) tested and such sample(s) tested and such sample(s) are retained for 30 days only. Attention. To check the authenticity of testing impection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com.

中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 2601205 f (86-755) 26710594 sgs.china@sgs.com

SGS

Report No.: HR/2021/1001401 Page: 23 of 34

Test Settings

- The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- 2. RBW = 1 5% of the expected OBW
- 3. VBW ≥ 3 x RBW
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep = auto couple
- 7. The trace was allowed to stabilize
- 8. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within

1 - 5% of the 99% occupied bandwidth observed in Step 7

4.4 Band Edge at Antenna Terminals

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at two frequencies (low channel and high channel).in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 100kHz or 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed. The EUT emission bandwidth is measured as the width of the signal between two points, outside of which all emission are attenuated at least 26dB below the transmitter power. The video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to rms.

Remark: Reference test setup 1

Test Settings

- 1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW ≥ 1% of the emission bandwidth
- 4. $VBW \ge 3 \times RBW$
- 5. Detector = RMS
- 6. Number of sweep points ≥ 2 x Span/RBW
- 7. Trace mode = trace average for continuous emissions, max hold for pulse emissions

中国·深圳·科技园中区M-10栋一号厂房

- 8. Sweep time = auto couple
- 9. The trace was allowed to stabilize



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Cond

邮编: 518057 t (86-755) 26012053 f (86-755) 26710594

Member of the SGS Group (SGS SA)

sgs.china@sgs.com

Report No.: HR/2021/1001401 Page: 24 of 34

4.5 Spurious And Harmonic Emissions at Antenna Terminal

Measurement Procedure: FCC KDB 971168 D01 V03r01

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyzer, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel). The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

Remark: Reference test setup 1

Test Settings

- Start frequency was set to 30MHz and stop frequency was set to at least 10 * the fundamental frequency (separated into at least two plots per channel)
- 2. Detector = RMS
- 3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
- 4. Sweep time = auto couple
- 5. The trace was allowed to stabilize
- 6. Please see test notes below for RBW and VBW settings

4.6 Peak-Average Ratio

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.7.1

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode.

Remark: Reference test setup 1



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized atteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing impection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sqs.com

中国・深圳・科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS

Report No.: HR/2021/1001401 Page: 25 of 34

Test Settings

- 1. The signal analyzer's CCDF measurement profile is enabled
- 2. Frequency = carrier center frequency
- 3. Measurement BW > Emission bandwidth of signal
- 4. The signal analyzer was set to collect one million samples to generate the CCDF curve
- 5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

4.1 Field Strength of Spurious Radiation

Measurement Procedure: FCC KDB 971168 D01 V03r01

Below 1GHz test procedure as below:

- 1). The EUT was powered ON and placed on a 80cm high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). The transmitter was then removed and replaced with another antenna. The center of the antenna was approximately at the same location as the center of the transmitter.
- 5). A signal at the disturbance was fed to the substitution antenna by means of a non-radiating cable. With both the substitution and the receive antennas horizontally polarized, the receive antenna was raised and lowered to obtain a maximum reading at the test receiver. The level of the signal generator was adjusted until the measured field strength level in step 2) is obtained for this set of conditions.
- 6). The output power into the substitution antenna was then measured.
- 7). Steps 5) and 6) were repeated with both antennas polarized.
- 8) Calculate power in dBm by the following formula:

ERP(dBm) = Pg(dBm) – cable loss (dB) + antenna gain (dBd)

Where:

Pd is the dipole equivalent power, Pg is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to Pg [dBm] – cable loss [dB]. The calculated Pd levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of $43 + 10\log 10$ (Power [Watts]).

Above 1GHz test procedure as below:

- 1) Different between above is the test site, change from Semi- Anechoic
 - Chamber to fully Anechoic Chamber

检验检测专用意

- 2) Calculate power in dBm by the following formula:
 - EIRP(dBm) = Pg(dBm) cable loss (dB) + antenna gain (dBi)

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To *Check the authenticity of testing inspection reports & certificate*, piezes contact us at telephone: (86-755) 8307 1443, or email: CN Deccheck@age.com



Report No.: HR/2021/1001401 Page: 26 of 34

EIRP=ERP+2.15dB

Where:

Pg is the generator output power into the substitution antenna.

- 3. Test the EUT in the lowest channel, the middle channel the Highest channel
- 4. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 5. Repeat above procedures until all frequencies measured was complete

Remark1: Reference test setup 2

Remark2: The emission below 18G were measured at a 3m test distance, while emissions above 18GHz

were measured at a 1m test distance.

Test Settings:

- 1. RBW=100kHz for emission below 1GHz and 1MHz for emission above 1GHz
- 2. VBW≥3*RBW
- 3. Number of sweep point \geq 2*span/RBW
- 4. Detector=RMS
- 5. Trace mode=Average (Max Hold for pulsed emissions)
- 6. The trace was allowed to stabilize

Remark: The Emission Test data were reused from the report no: XHR/2021/1001401

4.2 Frequency Stability / Temperature Variation

Measurement Procedure:

Frequency stability testing is performed in accordance with the guidelines of FCC KDB 971168 D01 V03r01; ANSI/C63.26 (2015)

- . The frequency stability of the transmitter is measured by:
- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency.

Time Period and Procedure:

- 1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
- 2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Remark: Reference test setup 3



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-an-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-an-Conditions.aspx</u> and, for electronic format documents, advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention To check the authenticity of testing linepection report & center parts easted the results shown. In this descine & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn hp a: %#1. %HttgphcM-10K ~


Member of the SGS Group (SGS SA)



Report No.: HR/2021/1001401 Page: 27 of 34

4.3 Test Setups

4.3.1 Test Setup 1

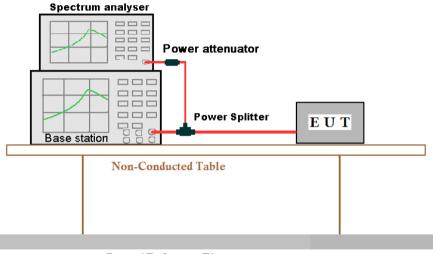

Ground Reference Plane

4.3.2 Test Setup 2




Figure 1. Below 30MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exoncrate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing inspection ceport a certificate, plasse contact us at telephone: (86-755) 8307 1443, or email: <u>ON Doccheck@ags.com</u>) 10, Workshon, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sggroup.com.cn

中国・深圳・科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 2601205 f (86-755) 26710594 sgs.china@sgs.com

Member of the SGS Group (SGS SA)





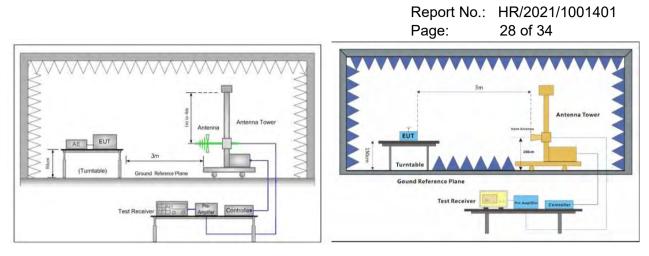


Figure 2. 30MHz to 1GHz



4.3.3 **Test Setup 3**

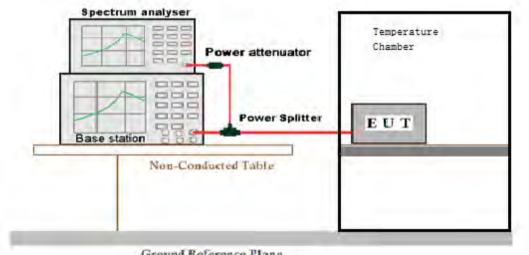

Ground Reference Plane



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-end-Conditions/T No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86–755) 26012053 f (86–755) 26710594 www.sgsgroup.com.cn

中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com Member of the SGS Group (SGS SA)



Report No.: HR/2021/1001401 Page: 29 of 34

4.4 Test Conditions

Test Case)	Test Condition	ns	
		Test Environment	Ambient Climate & Rated Voltage	
	Average	Test Setup	Test Setup 1	
Transmit	Power, Total (TX)		L, M, H (L= low channel, M= middle channel, H= high channel)	
Output		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; LTE/TM1;LTE/TM2	
Power Data	Average Power,	Test Environment	Ambient Climate & Rated Voltage	
	Spectral Density	Test Setup	Test Setup 1	
	(if required	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)	
)	Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; LTE/TM1;LTE/TM2	
		Test Environment	Ambient Climate & Rated Voltage	
Peak-to-A Ratio	verage	Test Setup	Test Setup 1	
(if required)	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)		
		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; LTE/TM1;LTE/TM2	
		Test Environment	Ambient Climate & Rated Voltage	
Modulatio	n	Test Setup	Test Setup 1	
Character	istics	RF Channels (TX)	M (M= middle channel)	
		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; LTE/TM1;LTE/TM2	
	Occupie	Test Environment	Ambient Climate & Rated Voltage	
	d	Test Setup	Test Setup 1	
Dan bailt	Bandwid th	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)	
Bandwid th		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; LTE/TM1;LTE/TM2	
	Emissio n	Test Environment	Ambient Climate & Rated Voltage	
	Bandwid	Test Setup	Test Setup 1	
	th (if	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-end-Conditions/T No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国 · 深圳 · 科技园中区M-10栋一号厂房

Member of the SGS Group (SGS SA)

邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Report No.: HR/2021/1001401 Page: 30 of 34

	required)	Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; LTE/TM1;LTE/TM2		
		Test Environment	Ambient Climate & Rated Voltage		
Band Edge	es	Test Setup	Test Setup 1		
Complianc	e	RF Channels (TX)	L, H (L= low channel, H= high channel)		
		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; LTE/TM1;LTE/TM2		
		Test Environment	Ambient Climate & Rated Voltage		
Spurious E at Antenna		Test Setup	Test Setup 1		
Terminals	1	RF Channels (TX)	L,M, H (L= low channel, M= middle channel, H= high channel)		
		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; LTE/TM1;LTE/TM2		
		Test Environment	Ambient Climate & Rated Voltage		
		Test Setup	Test Setup 2		
Field Strer Spurious F	•	Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; LTE/TM1;LTE/TM2 Remark: If applicable, the EUT conf. that has maximum power density (based on the equivalent power level) is selected.		
		RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)		
		Test Environment	 (1) -30 °C to +50 °C with step 10 °C at Rated Voltage; (2) VL, VN and VH of Rated Voltage at Ambient Climate. 		
Frequency Stability	Stability	Test Setup	Test Setup 3		
Frequency	Stability	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)		
		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; LTE/TM1;LTE/TM2		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not excore a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) please contact us at telephone: (86-755) 8307 1443, or email: CN. Doccheck@ess.com



Report No.: HR/2021/1001401 Page: 31 of 34

5 Main Test Instruments

RSE&RE&CE Test System					
Equipment	Manufacturer	Model No.	Cal Date	Cal Due Date	Inventory No.
Semi-Anechoic Chamber	Brilliant-emc	966	NCR	NCR	XAW03-35-01
MXA signal analyzer	Keysight	N9020A	2020-04-02	2021-04-02	XAW01-06-01
Radio communication analyzer	ROHDE&SCHWARZ	CMW 500	2020-04-02	2021-04-02	XAW01-03-02
Test receiver	ROHDE&SCHWARZ	ESR	2020-09-11	2021-09-10	XAW01-08-01
Receiving antenna	Rosenberger	VULB 9163	2019-10-13	2021-10-12	XAW01-09-01
Receiving antenna	Rosenberger	BBHA 9120D	2019-10-13	2021-10-12	XAW01-09-02
Receiving antenna	Rosenberger	BBHA 9170	2019-10-13	2021-10-12	XAW01-09-03
Directional antenna rack controller	Max-Full	MF-7802BS	NCR	NCR	XAW03-03-01
High-speed antenna rack controller	Max-Full	MF-7802	NCR	NCR	XAW03-04-01
Filter bank	Tonscend	JS0806-F	NCR	NCR	XAW03-05-01
Filter bank	Tonscend	JS0806s	NCR	NCR	XAW03-05-02
Amplifier	Tonscend	TAP00903040	2020-10-26	2021-10-25	XAW01-41-01
Amplifier	Tonscend	TAP01018048	2020-10-26	2021-10-25	XAW01-41-02
Amplifier	Tonscend	TAP18040048	2020-10-26	2021-10-25	XAW01-41-03
Amplifier	Shanghai Steed	YX28980930	2020-10-26	2021-10-25	XAW01-41-06
Artificial network	ROHDE&SCHWARZ	ENV216	2020-08-04	2021-08-03	XAW01-19-02
Temperature and humidity meter	MingGao	TH101B	2020-06-11	2021-05-11	XAW01-01-01
Measurement Software	Tonscend	TS+ RSE&RE	NCR	NCR	XAW02-05-01
Measurement Software	Tonscend	TS+ CE	NCR	NCR	XAW02-05-02



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excore a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) test and sub approval of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or small: (N-Doccheck@sss.com)



Report No.: HR/2021/1001401 Page: 32 of 34

RF conducted test					
Toot Equipment	Manufacturer	Model No.	Inventory	Cal. date	Cal.Due date
Test Equipment	Wanulacturer	WOUEI NO.	No.	(yyyy-mm-dd)	(yyyy-mm-dd)
Dual Output Mobile Communication DC Source	Agilent Technologies Inc	66311B	W009-09	2020/10/22	2021/10/21
Signal Analyzer	Rohde & Schwarz	FSV	W005-02	2020/4/16	2021/4/15
Coaxial Cable	SGS	N/A	SEM031-01	2020/6/12	2021/6/11
Attenuator	Weinschel Associates	WA41	SEM021-09	N/A	N/A
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2020/10/22	2021/10/21
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	HTC-1	W006-17	2020/10/22	2021/10/21
Temperature Chamber	GIANT FORCE	ICT-150-40- CP-AR	W027-03	2020/10/22	2021/10/21
Wideband Radio CommunicationTeste	Anristu	MT8821C	6201462742	2020/4/16	2021/4/15
Wideband Radio CommunicationTester	Rohde & Schwarz	CMW500	W005-02	2020/10/22	2021/10/21



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-enDocument.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excore a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) test and such sample(s) test report refer only to the sample(s) testing of 30 days on). Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or small: (N-Doccheck@sus.com)

Report No.: HR/2021/1001401 Page: 33 of 34

6 Measurement Uncertainty

S

For a 95% confidence level (k = 2), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

Test Item	Extended Uncertainty	Data	
Transmit Output Power Data	Power [dBm]	U =±0.37 dB	
Bandwidth	Magnitude [%]	U =± 0.2%	
Band Edge Compliance	Disturbance Power [dBm]	U = ±2.0 dB	
Spurious Emissions, Conducted	Disturbance Power [dBm] U = ±2.0 dB		
		For 3 m Chamber:	
		U = ±4.5 dB (30 MHz to 1GHz)	
Field Strength of Spurious		U = ± 3.3 dB (above 1 GHz)	
Radiation	ERP[dBm]/EIRP [dBm]	For 10 m Chamber:	
		U = ±4.5 dB (30 MHz to 1GHz)	
		U = $\pm 3.2 \text{ dB}$ (above 1 GHz)	
Frequency Stability	Frequency Accuracy [ppm]U = ±0.24 ppm		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, advected to a drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excore a transaction from exercising all their rights and obligations under the transaction document. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) test not sub the sample(s) test repaires in subsection is test intervention from exercises the subsection ceport & certificate, please contact us at telephone: (86-755) 8307 1443, or small: CN_Doccheck@egs.com



Report No.: HR/2021/1001401 Page: 34 of 34

7 Appendixes

Appendix A	PCE Setup Photos
Appendix B.1	GSM 850 & 1900
Appendix B.2	WCDMA Band II & IV & V
Appendix B.3	LTE Band 2
Appendix B.4	LTE Band 4
Appendix B.5	LTE Band 5
Appendix B.6	LTE Band 7
Appendix B.7	LTE Band 12
Appendix B.8	LTE Band 17
Appendix B.9	LTE Band 26 (814-824)
Appendix B.10	LTE Band 26 (824-849)
Appendix B.11	LTE Band 66

The End



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excore a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) test and sub approval of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or small: (N-Doccheck@sss.com)