



# RF TEST REPORT

**Applicant** Honor Device Co., Ltd.  
**FCC ID** 2AYGCTFY-LX1  
**Product** Smart Phone  
**Model** TFY-LX1  
**Report No.** R2201A0039-R1V1  
**Issue Date** March 2, 2022

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2020)/ FCC CFR 47 Part 22H (2020)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Prepared by: Peng Tao

Approved by: Kai Xu

---

**TA Technology (Shanghai) Co., Ltd.**

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

## TABLE OF CONTENT

1. Test Laboratory .....	5
1.1. Notes of the Test Report .....	5
1.2. Test facility .....	5
1.3. Testing Location .....	5
2. General Description of Equipment under Test.....	6
2.1. Applicant and Manufacturer Information .....	6
2.2. General Information.....	6
3. Applied Standards.....	8
4. Test Configuration.....	9
5. Test Case Results.....	11
5.1. RF Power Output and Effective Radiated Power .....	11
5.2. Occupied Bandwidth .....	16
5.3. Band Edge Compliance.....	34
5.4. Peak-to-Average Power Ratio (PAPR) .....	45
5.5. Frequency Stability.....	48
5.6. Spurious Emissions at Antenna Terminals .....	51
5.7. Radiates Spurious Emission .....	56
6. Main Test Instruments .....	62
ANNEX A: The EUT Appearance .....	63
ANNEX B: Test Setup Photos .....	64
ANNEX C: Product Change Description .....	65

Version	Revision description	Issue Date
Rev.0	Initial issue of report.	February 11, 2022
Rev.1	Update data and description.	March 2, 2022

Note: This revised report (Report No. R2201A0039-R1V1) supersedes and replaces the previously issued report (Report No. R2201A0039-R1). Please discard or destroy the previously issued report and dispose of it accordingly.

## Summary of measurement results

No.	Test Case	Clause in FCC rules	Verdict
1	RF Power Output and Effective Radiated Power	2.1046 / 22.913(a)(5)	PASS
2	Occupied Bandwidth	2.1049	PASS
3	Band Edge Compliance	2.1051 / 22.917(a)	PASS
4	Peak-to-Average Power Ratio	22.913(d)/KDB 971168 D01(5.7)	PASS
5	Frequency Stability	2.1055 / 22.355	PASS
6	Spurious Emissions at Antenna Terminals	2.1051 / 22.917(a)	PASS
7	Radiates Spurious Emission	2.1053 / 22.917 (a)	PASS

Date of Testing: January 13, 2022 ~ January 27, 2022 and February 28, 2022 ~ March 1, 2022

Date of Sample Received: January 10, 2022

Note: PASS: The EUT complies with the essential requirements in the standard.

FAIL: The EUT does not comply with the essential requirements in the standard.

All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.

**TFY-LX1 (Report No.: R2201A0039-R1V1) is a variant model of TFY-LX3 (Report No.: R2201A0036-R1V1). Test values partial duplicated from Original for variant. There is no test for variant in this report.**

**The difference between model TFY-LX3 and model TFY-LX1 is show in the below table:**

Difference	Model	TFY-LX3	TFY-LX1
Licensed Frequency	LTE BAND	B2/4/5/7/13/26/38/66 Not support CA	B5/B7 Support CA
	UMTS BAND	B2/B4/B5	B2/B5
	Antenna	The antenna matching and routing are the same. The frequency is different.	The antenna matching and routing are the same. The frequency is different.
Unlicensed Frequency	NFC	Not support	Support. Add NFC functionality via hardware
	Antenna	BT+Wi-Fi+GPS antenna	BT+Wi-Fi+GPS Add NFC antenna
RF	RF circuit	The RF circuit of the same frequency is the same.	The RF circuit of the same frequency is the same. The different frequency changed by hardware and some RF parameters. Changes are followed: 1. delete B4/B13/B38/B66 SAWS, Diplexer, switch, LNA and RF matching components. 2. LTE bands support 64QAM.

**The detailed product change description please refers to the *Difference Declaration Letter*.**

## 1. Test Laboratory

### 1.1. Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

### 1.2. Test facility

#### **FCC (Designation number: CN1179, Test Firm Registration Number: 446626)**

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

#### **A2LA (Certificate Number: 3857.01)**

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

### 1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.  
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Xu Kai  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <http://www.ta-shanghai.com>  
E-mail: [xukai@ta-shanghai.com](mailto:xukai@ta-shanghai.com)

## 2. General Description of Equipment under Test

### 2.1. Applicant and Manufacturer Information

Applicant	Honor Device Co., Ltd.
Applicant address	Shum Yip Sky Park, No. 8089, Hongli West Road, Shenzhen, China
Manufacturer	Honor Device Co., Ltd.
Manufacturer address	Shum Yip Sky Park, No. 8089, Hongli West Road, Shenzhen, China

### 2.2. General Information

EUT Description			
Model	TFY-LX1		
SN	A7NX011C22000163		
Hardware Version	HL6TFYM		
Software Version	4.2.0.35(C900E14R1P1)		
Power Supply	Battery / AC adapter		
Antenna Type	Internal Antenna		
Antenna Gain	Band	Main Antenna	Second Antenna
	GSM 850	-3.78 dBi	NA
	WCDMA Band V	-3.78dBi	NA
	LTE Band 5	-3.78 dBi	NA
Test Mode(s)	GSM 850; WCDMA Band V; LTE Band 5;		
Test Modulation	(GSM/GPRS)GMSK, (EGPRS) GMSK/ 8PSK; (WCDMA) BPSK, QPSK,; (LTE) QPSK, 16QAM, 64QAM;		
GPRS Multislot Class	12		
EGPRS Multislot Class	12		
HSDPA UE Category	14		
HSUPA UE Category	6		
DC-HSDPA UE Category	24		
LTE Category	4		
Maximum E.R.P.	GSM 850:	27.21dBm	
	WCDMA Band V:	18.41dBm	
	LTE Band 5:	18.59dBm	
Rated Power Supply Voltage	3.87V		
Operating Voltage	Minimum: 3.60V    Maximum: 4.45V		
Operating Temperature	Lowest: 0°C    Highest: 35°C		
Testing Temperature	Lowest: 0°C    Highest: 35°C		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)

		GSM850	824 ~ 849	869 ~ 894
		WCDMA Band V	824 ~ 849	869 ~ 894
		LTE Band 5	824 ~ 849	869 ~ 894
<b>EUT Accessory</b>				
<b>Accessory</b>	<b>Model</b>	<b>Manufacture</b>		<b>No.</b>
Adapter	HW-100225E00	Honor Device Co., Ltd. (Manufacturer:Huntkey)		1
	HW-100225U00	Honor Device Co., Ltd. (Manufacturer:Huntkey)		2
	HW-100225B00	Honor Device Co., Ltd. (Manufacturer:Huntkey)		3
	HN-100225E00	Honor Device Co., Ltd. (Manufacturer: Salcomp)		4
	HN-100225U00	Honor Device Co., Ltd. (Manufacturer: Salcomp)		5
Battery	HB416492EFW	Honor Device Co., Ltd. (Manufacturer: Sunwoda Electronic Co.,LTD)		1
	HB416492EFW	Honor Device Co., Ltd. (Manufacturer:NVT)		2
Earphone	MEND1532B528A11	Jiangxi Lianchuang Hongsheng Electronic Co., LTD.		1
	1293-3283-3.5mm-339	BOLUO COUNTY QUANCHENG ELECTRONIC CO.,LTD.		2
	EPAB542-2WH05-DH	FOXCONN INTERCONNECT TECHNOLOGY LIMITED		3
USB Cable	RY0002	NingBo Broad Telecommunication Co., Ltd.		1
	AU2-CRO013HF	Freeport Resources Enterprises Corp.		2
	2120-00001-0	MING JI ELECTRONICS CO., LTD.		3
	L125UC007-CS-H	LUXSHARE PRECISION INDUSTRY CO., LTD.		4
	CUDU01B-HC451-EH	FOXCONN INTERCONNECT TECHNOLOGY LIMITED		5
<p>Note: 1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant.</p> <p>2. There are more than one Adapter, Battery, Earphone and USB Cable, each one should be applied throughout the compliance test respectively, however, only the worst case (Adapter 1, Battery 2, Earphone 1 and USB Cable 3) will be recorded in this report.</p>				

### 3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**Test standards:**

**FCC CFR 47 Part 22H (2020)**

**FCC CFR47 Part 2 (2020)**

**Reference standard:**

**ANSI C63.26 (2015)**

**KDB 971168 D01 Power Meas License Digital Systems v03r01**



## 4. Test Configuration

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (X axis, horizontal polarization for GSM/WCDMA Band (Main Antenna); Z axis, horizontal polarization for LTE Band (Main Antenna); Z axis, horizontal polarization for GSM/WCDMA Band (Second Antenna); Z axis, vertical polarization for LTE Band (Second Antenna) and the worst case was recorded.

All mode and data rates and positions and RB size and modulations were investigated. Subsequently, only the worst case emissions are reported.

The following testing in GSM/WCDMA/LTE is set based on the maximum RF Output Power.

Test modes are chosen to be reported as the worst case configuration below:

Test items	Modes/Modulation	
	GSM 850	WCDMA Band V
RF Power Output and Effective Radiated power	GSM GPRS EGPRS	RMC/AMR HSDPA/HSUPA DC-HSDPA
Occupied Bandwidth	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Band Edge Compliance	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Peak-to-Average Power Ratio	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Frequency Stability	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Spurious Emissions at Antenna Terminals	GSM	RMC
Radiates Spurious Emission	GSM	RMC

Test modes are chosen as the worst case configuration below for LTE Band 5

Test items	Modes	Bandwidth (MHz)					Modulation		RB			Test Channel		
		1.4	3	5	10	15	QPSK	16QAM 64QAM	1	50%	100%	L	M	H
RF power output and Effective Radiated power	LTE 5	O	O	O	O	-	O	O	O	O	O	O	O	O
Occupied Bandwidth	LTE 5	O	O	O	O	-	O	O	-	-	O	O	O	O
Band Edge Compliance	LTE 5	O	O	O	O	-	O	O	O	-	O	O	-	O
Peak-to-Average Power Ratio	LTE 5	O	O	O	O	-	O	O	-	-	O	O	O	O
Frequency Stability	LTE 5	O	O	O	O	-	O	O	O	-	-	-	O	-
Spurious Emissions at Antenna Terminals	LTE 5	O	O	O	O	-	O	-	O	-	-	O	O	O
Radiates Spurious Emission	LTE 5	O	-	O	O	-	O	-	O	-	-	-	O	-
Note	1. The mark "O" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing.													

## 5. Test Case Results

### 5.1. RF Power Output and Effective Radiated Power

#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Methods of Measurement

During the process of the testing, The EUT was connected to the Base Station Simulator with a known loss. The EUT is controlled by the Base Station Simulator test set to ensure max power transmission with proper modulation.


ERP can then be calculated as follows:

$$\text{EIRP (dBm)} = \text{Output Power (dBm)} - \text{Losses (dB)} + \text{Antenna Gain (dBi)}$$

where:dBd refers to gain relative to an ideal dipole.

$$\text{EIRP (dBm)} = \text{ERP (dBm)} + 2.15 \text{ (dB)}.$$

#### Test Setup

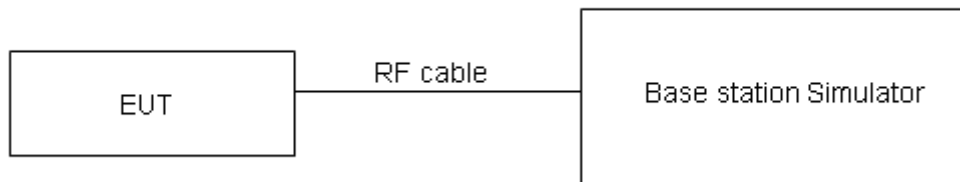

#### Limits

No specific RF power output requirements in part 2.1046.

Rule Part 22.913(a)(5) specifies that "Mobile/portable stations are limited to 7 watts ERP".

Limit	≤ 7 W (38.45 dBm)
-------	-------------------

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.4$  dB for RF power output,  $k = 2$ ,  $U = 1.19$  dB for ERP.

**Test Results**

<b>GSM 850</b>		<b>Maximum Output Power (dBm)</b>			<b>ERP (dBm)</b>		
		Channel 128	Channel 190	Channel 251	Channel 128	Channel 190	Channel 251
		824.2 (MHz)	836.6 (MHz)	848.8 (MHz)	824.2 (MHz)	836.6 (MHz)	848.8 (MHz)
GSM(GMSK)	Results	33.11	33.12	33.14	27.18	27.19	27.21
GPRS (GMSK)	1TXslot	32.93	33.10	33.02	27.00	27.17	27.09
	2TXslots	29.19	29.65	29.58	23.26	23.72	23.65
	3TXslots	26.81	27.48	27.35	20.88	21.55	21.42
	4TXslots	25.14	25.54	25.65	19.21	19.61	19.72
EGPRS	1TXslot	26.87	26.94	26.92	20.94	21.01	20.99
	2TXslots	23.81	24.47	23.84	17.88	18.54	17.91
	3TXslots	21.84	22.12	21.97	15.91	16.19	16.04
	4TXslots	20.25	20.53	20.03	14.32	14.60	14.10

<b>WCDMA Band V</b>		<b>Maximum Output Power (dBm)</b>			<b>ERP (dBm)</b>		
		Channel 4132	Channel 4183	Channel 4233	Channel 4132	Channel 4183	Channel 4233
		826.4 (MHz)	836.6 (MHz)	846.6 (MHz)	826.4 (MHz)	836.6 (MHz)	846.6 (MHz)
RMC		24.34	24.15	24.16	18.41	18.22	18.23
AMR		24.26	24.19	24.08	18.33	18.26	18.15
HSDPA	Sub - Test 1	23.52	23.29	23.48	17.59	17.36	17.55
	Sub - Test 2	23.38	23.37	23.48	17.45	17.44	17.55
	Sub - Test 3	23.04	23.01	22.94	17.11	17.08	17.01
	Sub - Test 4	22.92	22.93	22.78	16.99	17.00	16.85
HSUPA	Sub - Test 1	22.92	22.73	23.00	16.99	16.80	17.07
	Sub - Test 2	21.48	21.51	21.26	15.55	15.58	15.33
	Sub - Test 3	22.22	22.17	22.04	16.29	16.24	16.11
	Sub - Test 4	21.82	21.43	21.40	15.89	15.50	15.47
	Sub - Test 5	23.64	23.25	23.24	17.71	17.32	17.31
DC-HSDPA	Sub - Test 1	23.64	23.45	23.52	17.71	17.52	17.59
	Sub - Test 2	23.50	23.47	23.46	17.57	17.54	17.53
	Sub - Test 3	23.00	22.83	22.72	17.07	16.90	16.79
	Sub - Test 4	23.04	22.97	22.92	17.11	17.04	16.99

LTE Band 5				Maximum Output Power(dBm)			ERP (dBm)		
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)					
				20407 /824.7	20525 /836.5	20643 /848.3	20407 /824.7	20525 /836.5	20643 /848.3
1.4MHz	QPSK	1	0	24.45	24.46	24.33	18.52	18.53	18.40
		1	2	24.43	24.46	24.45	18.50	18.53	18.52
		1	5	24.04	24.18	23.99	18.11	18.25	18.06
		3	0	24.36	24.37	24.52	18.43	18.44	18.59
		3	2	24.30	24.29	24.29	18.37	18.36	18.36
		3	3	24.29	24.24	24.24	18.36	18.31	18.31
		6	0	23.27	23.38	23.45	17.34	17.45	17.52
	16QAM	1	0	23.88	23.84	23.91	17.95	17.91	17.98
		1	2	23.86	23.68	23.70	17.93	17.75	17.77
		1	5	23.51	23.39	23.29	17.58	17.46	17.36
		3	0	23.28	23.35	23.56	17.35	17.42	17.63
		3	2	23.30	23.25	23.37	17.37	17.32	17.44
		3	3	23.24	23.35	23.40	17.31	17.42	17.47
		6	0	22.34	22.40	22.40	16.41	16.47	16.47
	64QAM	1	0	23.31	23.45	23.24	17.38	17.52	17.31
		1	2	23.24	23.35	23.29	17.31	17.42	17.36
		1	5	23.04	23.10	22.78	17.11	17.17	16.85
		3	0	23.02	22.91	23.09	17.09	16.98	17.16
		3	2	22.96	23.04	23.15	17.03	17.11	17.22
		3	3	23.05	23.05	23.17	17.12	17.12	17.24
		6	0	22.01	22.04	22.12	16.08	16.11	16.19
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)					
				20415 /825.5	20525 /836.5	20635 /847.5	20415 /825.5	20525 /836.5	20635 /847.5
3MHz	QPSK	1	0	24.46	24.49	24.35	18.53	18.56	18.42
		1	7	24.42	24.50	24.50	18.49	18.57	18.57
		1	14	24.06	24.22	24.02	18.13	18.29	18.09
		8	0	23.46	23.49	23.65	17.53	17.56	17.72
		8	4	23.43	23.40	23.40	17.50	17.47	17.47
		8	7	23.39	23.37	23.35	17.46	17.44	17.42
		15	0	23.31	23.43	23.50	17.38	17.50	17.57
	16QAM	1	0	23.90	23.85	23.93	17.97	17.92	18.00

		1	7	23.89	23.70	23.74	17.96	17.77	17.81
		1	14	23.53	23.43	23.31	17.60	17.50	17.38
		8	0	22.40	22.49	22.69	16.47	16.56	16.76
		8	4	22.40	22.37	22.48	16.47	16.44	16.55
		8	7	22.34	22.47	22.53	16.41	16.54	16.60
		15	0	22.38	22.45	22.42	16.45	16.52	16.49
	64QAM	1	0	23.33	23.46	23.26	17.40	17.53	17.33
		1	7	23.27	23.37	23.31	17.34	17.44	17.38
		1	14	23.06	23.09	22.80	17.13	17.16	16.87
		8	0	22.14	22.05	22.22	16.21	16.12	16.29
		8	4	22.06	22.16	22.26	16.13	16.23	16.33
		8	7	22.15	22.17	22.30	16.22	16.24	16.37
		15	0	22.05	22.09	22.14	16.12	16.16	16.21
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)					
				20425 /826.5	20525 /836.5	20625 /846.5	20425 /826.5	20525 /836.5	20625 /846.5
5MHz	QPSK	1	0	24.45	24.45	24.33	18.52	18.52	18.40
		1	13	24.40	24.49	24.47	18.47	18.56	18.54
		1	24	24.03	24.17	23.98	18.10	18.24	18.05
		12	0	23.44	23.45	23.62	17.51	17.52	17.69
		12	6	23.40	23.35	23.36	17.47	17.42	17.43
		12	13	23.36	23.34	23.31	17.43	17.41	17.38
		25	0	23.29	23.39	23.45	17.36	17.46	17.52
	16QAM	1	0	23.85	23.83	23.91	17.92	17.90	17.98
		1	13	23.87	23.67	23.72	17.94	17.74	17.79
		1	24	23.50	23.39	23.28	17.57	17.46	17.35
		12	0	22.37	22.47	22.66	16.44	16.54	16.73
		12	6	22.37	22.32	22.44	16.44	16.39	16.51
		12	13	22.32	22.43	22.50	16.39	16.50	16.57
		25	0	22.35	22.40	22.38	16.42	16.47	16.45
	64QAM	1	0	23.28	23.44	23.24	17.35	17.51	17.31
		1	13	23.25	23.34	23.29	17.32	17.41	17.36
		1	24	23.07	23.08	22.81	17.14	17.15	16.88
		12	0	22.13	22.07	22.23	16.20	16.14	16.30
		12	6	22.04	22.13	22.25	16.11	16.20	16.32
		12	13	22.13	22.13	22.27	16.20	16.20	16.34
		25	0	22.02	22.04	22.10	16.09	16.11	16.17

BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)					
				20450 /829	20525 /836.5	20600 /844	20450 /829	20525 /836.5	20600 /844
10MHz	QPSK	1	0	24.42	24.41	24.30	18.49	18.48	18.37
		1	25	24.39	24.44	24.45	18.46	18.51	18.52
		1	49	24.01	24.16	23.95	18.08	18.23	18.02
		25	0	23.41	23.40	23.58	17.48	17.47	17.65
		25	13	23.38	23.31	23.33	17.45	17.38	17.40
		25	25	23.33	23.29	23.27	17.40	17.36	17.34
		50	0	23.26	23.34	23.41	17.33	17.41	17.48
	16QAM	1	0	23.77	23.79	23.86	17.84	17.86	17.93
		1	25	23.83	23.65	23.68	17.90	17.72	17.75
		1	49	23.48	23.36	23.26	17.55	17.43	17.33
		25	0	22.34	22.43	22.63	16.41	16.50	16.70
		25	13	22.34	22.30	22.41	16.41	16.37	16.48
		25	25	22.29	22.38	22.46	16.36	16.45	16.53
		50	0	22.33	22.36	22.35	16.40	16.43	16.42
	64QAM	1	0	23.26	23.40	23.19	17.33	17.47	17.26
		1	25	23.21	23.32	23.25	17.28	17.39	17.32
		1	49	23.01	23.02	22.75	17.08	17.09	16.82
		25	0	22.08	21.99	22.16	16.15	16.06	16.23
		25	13	22.00	22.09	22.19	16.07	16.16	16.26
		25	25	22.10	22.08	22.23	16.17	16.15	16.30
		50	0	22.00	22.00	22.07	16.07	16.07	16.14

## 5.2. Occupied Bandwidth

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


### Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to  $\geq 1\%$ EBW, VBW is set to 3x RBW.

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

### Test Setup

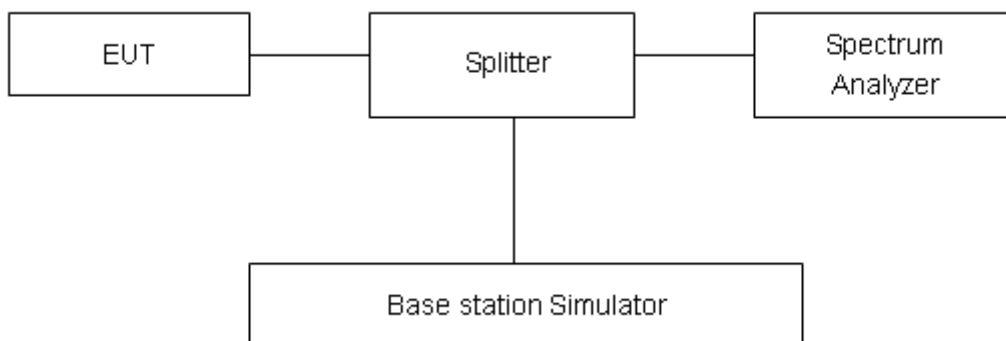

### Limits

No specific occupied bandwidth requirements in part 2.1049.

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 624\text{Hz}$ .




**Test Result**


Mode	Channel	Frequency (MHz)	99% Power Bandwidth (MHz)	-26dBc Bandwidth(MHz)
<b>GSM 850 (GMSK)</b>	128	824.2	0.245	0.311
	190	836.6	0.252	0.319
	251	848.8	0.242	0.311
<b>GPRS 850 (GMSK)</b>	128	824.2	0.246	0.312
	190	836.6	0.246	0.309
	251	848.8	0.243	0.309
<b>EGPRS 850 (8PSK)</b>	128	824.2	0.247	0.303
	190	836.6	0.243	0.308
	251	848.8	0.248	0.312
<b>WCDMA Band V (RMC)</b>	4132	826.4	4.123	4.685
	4183	836.6	4.113	4.667
	4233	846.6	4.126	4.689

<b>LTE Band 5</b>						
RB	Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	99% Power Bandwidth(MHz)	-26dBc Bandwidth(MHz)
1	QPSK	1.4	20407	824.7	0.264	0.397
			20525	836.5	0.266	0.404
			20643	848.3	0.267	0.406
		3	20415	825.5	0.340	0.472
			20525	836.5	0.333	0.488
			20635	847.5	0.334	0.485
		5	20425	826.5	0.467	0.649
			20525	836.5	0.480	0.681
			20625	846.5	0.459	0.659
		10	20450	829	0.688	1.006
			20525	836.5	0.675	0.967
			20600	844	0.717	0.941
	16QAM	1.4	20407	824.7	0.264	0.391
			20525	836.5	0.271	0.401


		3	20643	848.3	0.263	0.392		
			20415	825.5	0.325	0.465		
			20525	836.5	0.333	0.477		
					20635	847.5	0.325	0.452
		5	20425	826.5	0.435	0.604		
			20525	836.5	0.457	0.654		
			20625	846.5	0.450	0.655		
		10	20450	829	0.671	0.892		
			20525	836.5	0.663	0.914		
			20600	844	0.700	0.940		
		64QAM	1.4	20407	824.7	0.270	0.383	
				20525	836.5	0.263	0.393	
	20643			848.3	0.267	0.390		
	3		20415	825.5	0.322	0.468		
			20525	836.5	0.331	0.456		
			20635	847.5	0.319	0.452		
	5		20425	826.5	0.461	0.666		
			20525	836.5	0.481	0.668		
			20625	846.5	0.461	0.628		
	10		20450	829	0.675	0.948		
			20525	836.5	0.666	0.955		
			20600	844	0.697	0.955		
	100%		QPSK	1.4	20407	824.7	1.097	1.280
					20525	836.5	1.093	1.269
					20643	848.3	1.100	1.296
		3		20415	825.5	2.699	2.966	
				20525	836.5	2.707	2.979	
20635				847.5	2.703	2.996		
5		20425		826.5	4.510	4.986		
		20525		836.5	4.506	4.970		
		20625		846.5	4.508	4.981		
10		20450	829	8.974	9.887			
		20525	836.5	8.991	9.823			
		20600	844	8.968	9.809			


	16QAM	1.4	20407	824.7	1.103	1.293
			20525	836.5	1.102	1.309
			20643	848.3	1.092	1.276
		3	20415	825.5	2.694	2.958
			20525	836.5	2.696	2.973
			20635	847.5	2.689	2.974
		5	20425	826.5	4.519	4.963
			20525	836.5	4.523	4.950
			20625	846.5	4.509	4.996
	10	20450	829	8.990	9.741	
		20525	836.5	8.957	9.763	
		20600	844	8.950	9.775	
	64QAM	1.4	20407	824.7	1.099	1.277
			20525	836.5	1.097	1.275
			20643	848.3	1.096	1.278
		3	20415	825.5	2.706	2.971
			20525	836.5	2.702	2.998
			20635	847.5	2.699	2.988
		5	20425	826.5	4.506	4.988
			20525	836.5	4.521	4.971
			20625	846.5	4.530	5.036
10		20450	829	9.001	9.814	
		20525	836.5	8.966	9.762	
		20600	844	8.963	9.798	

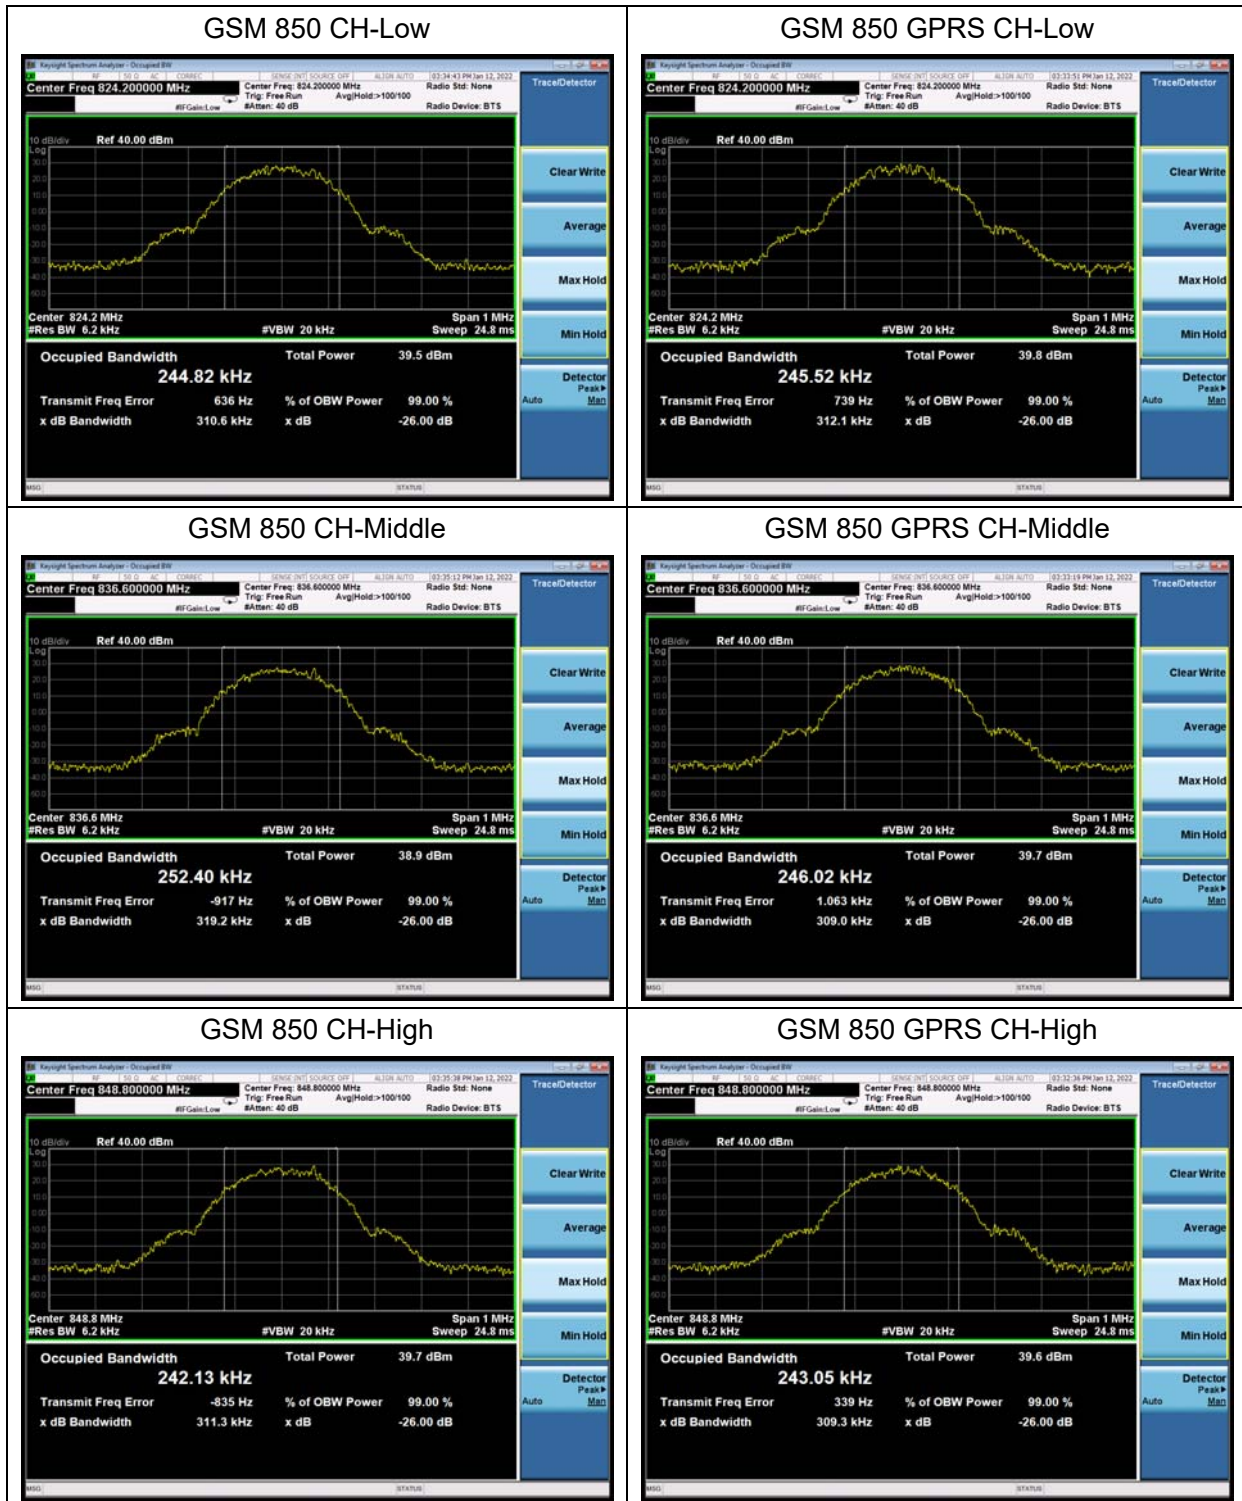


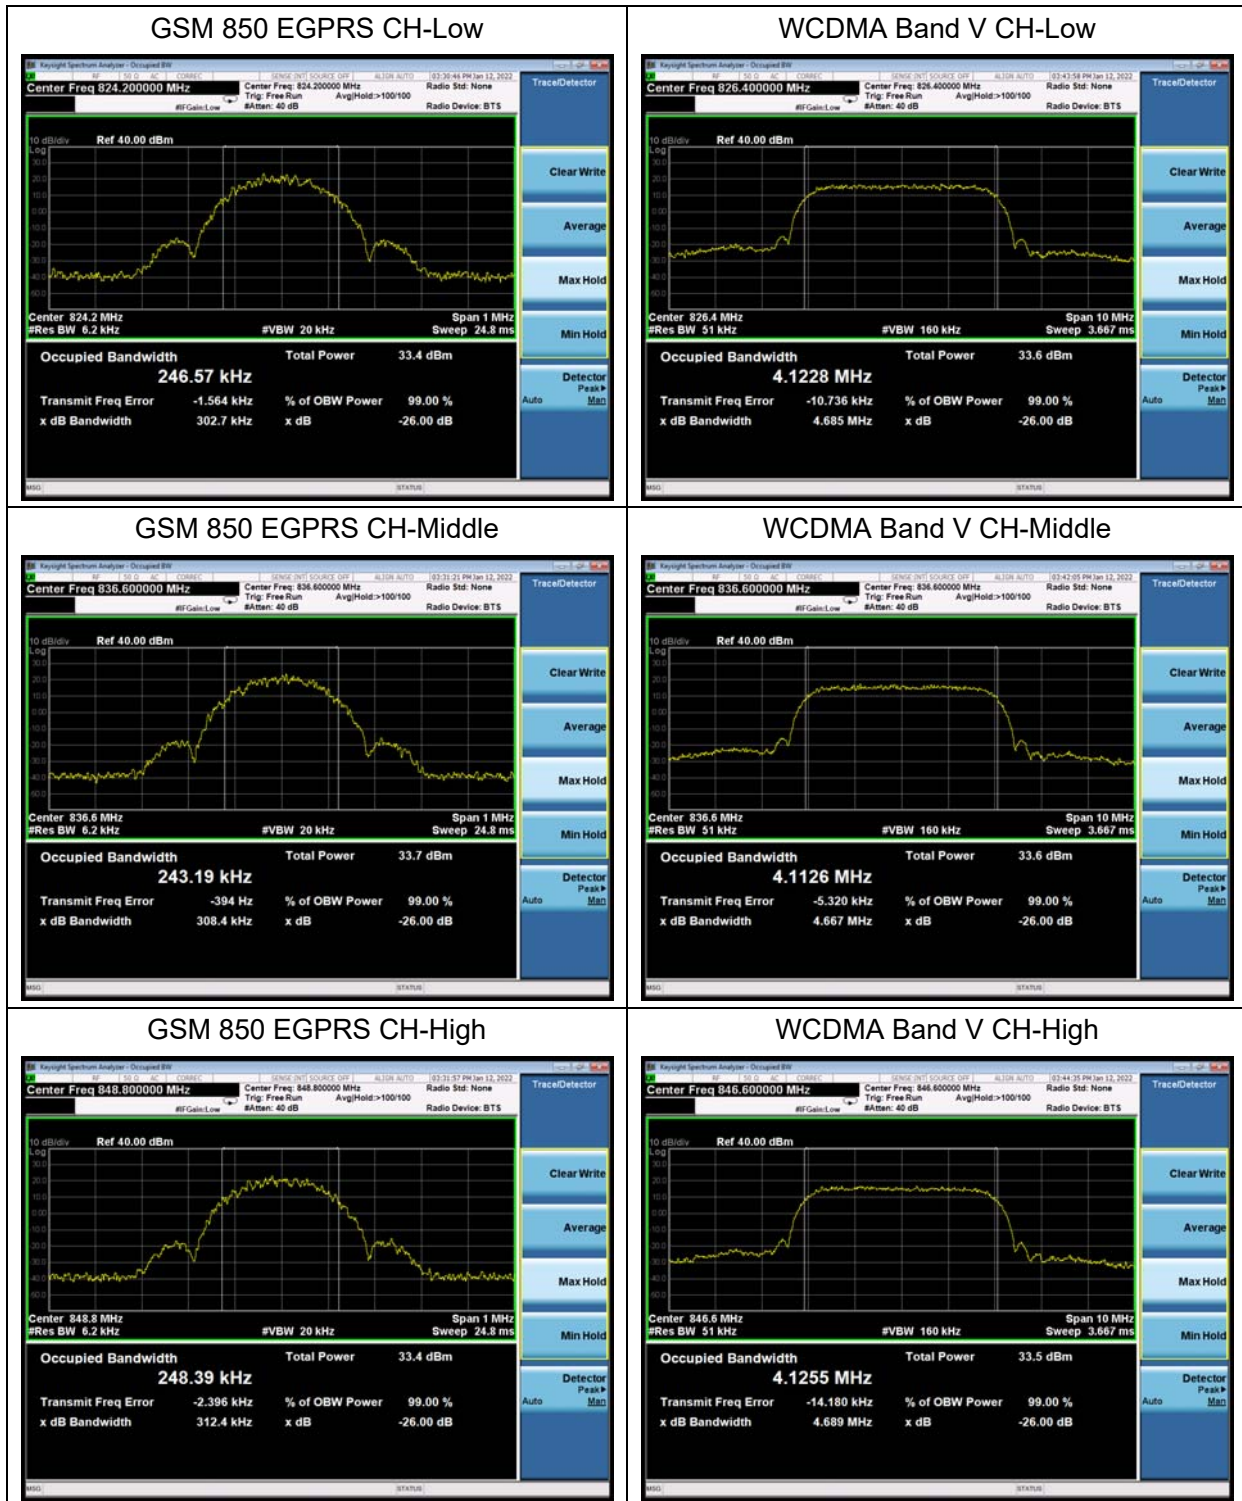







1 RB

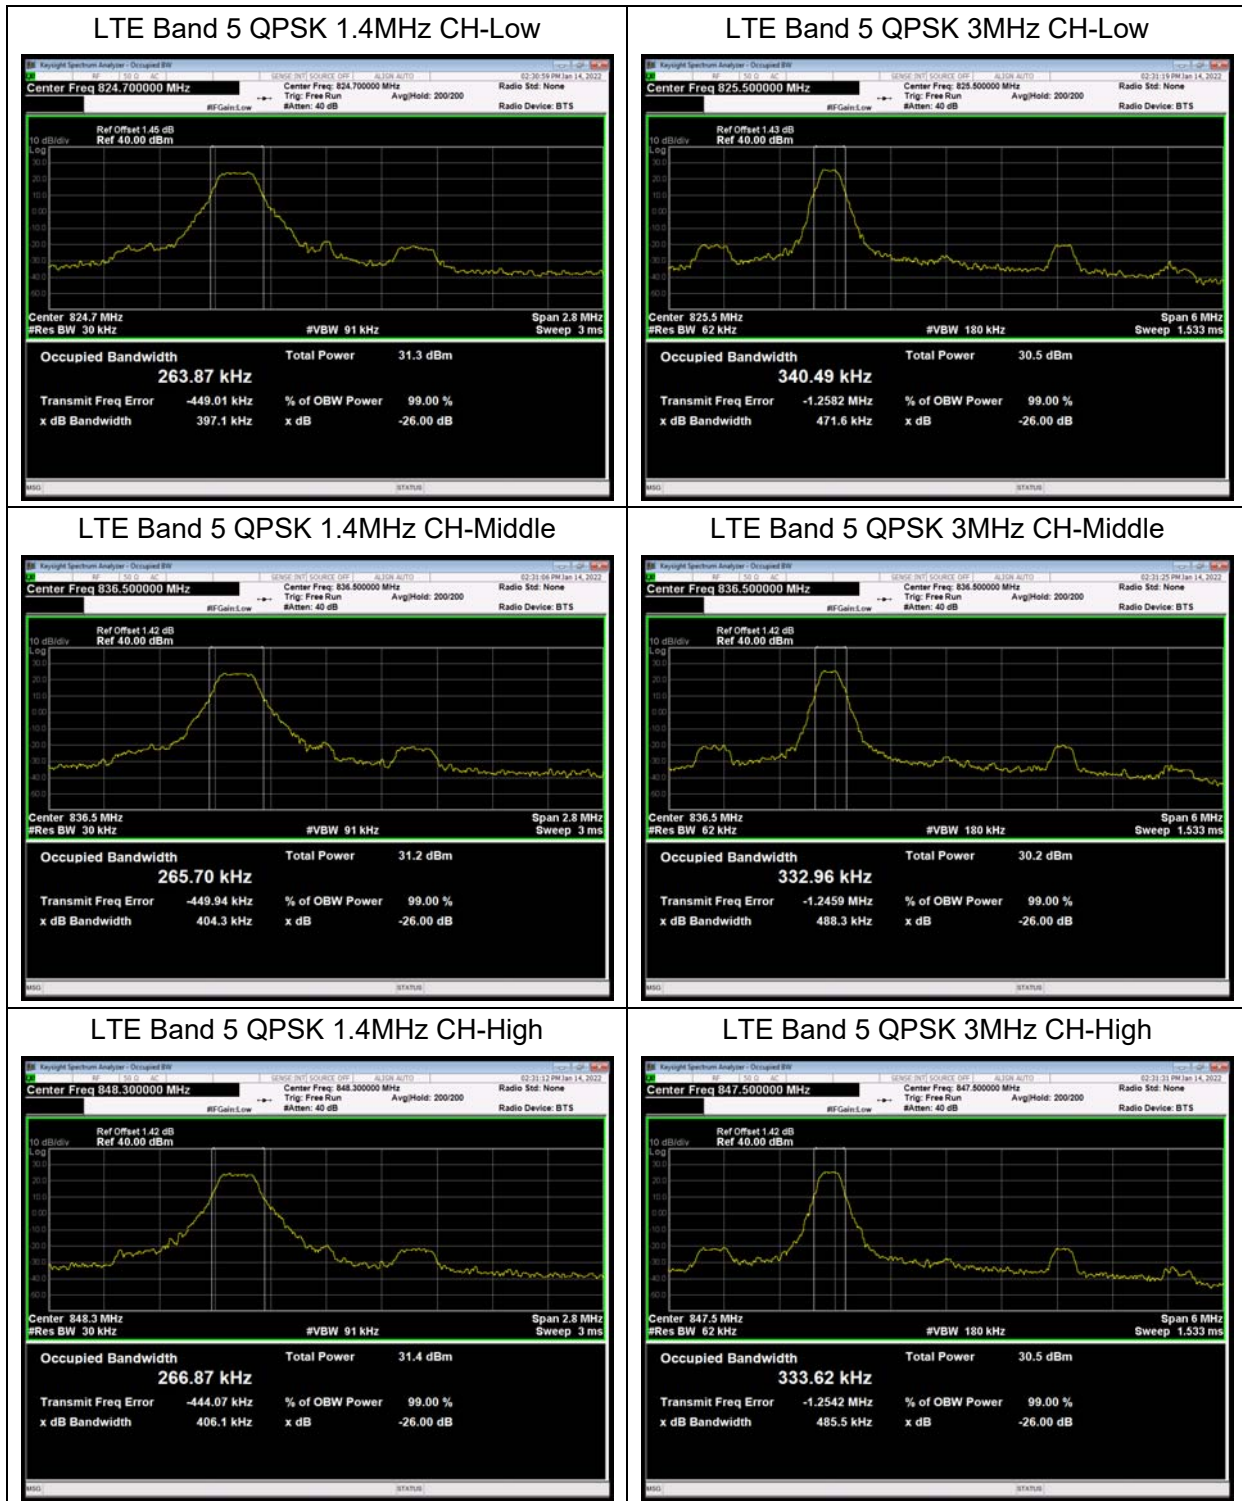


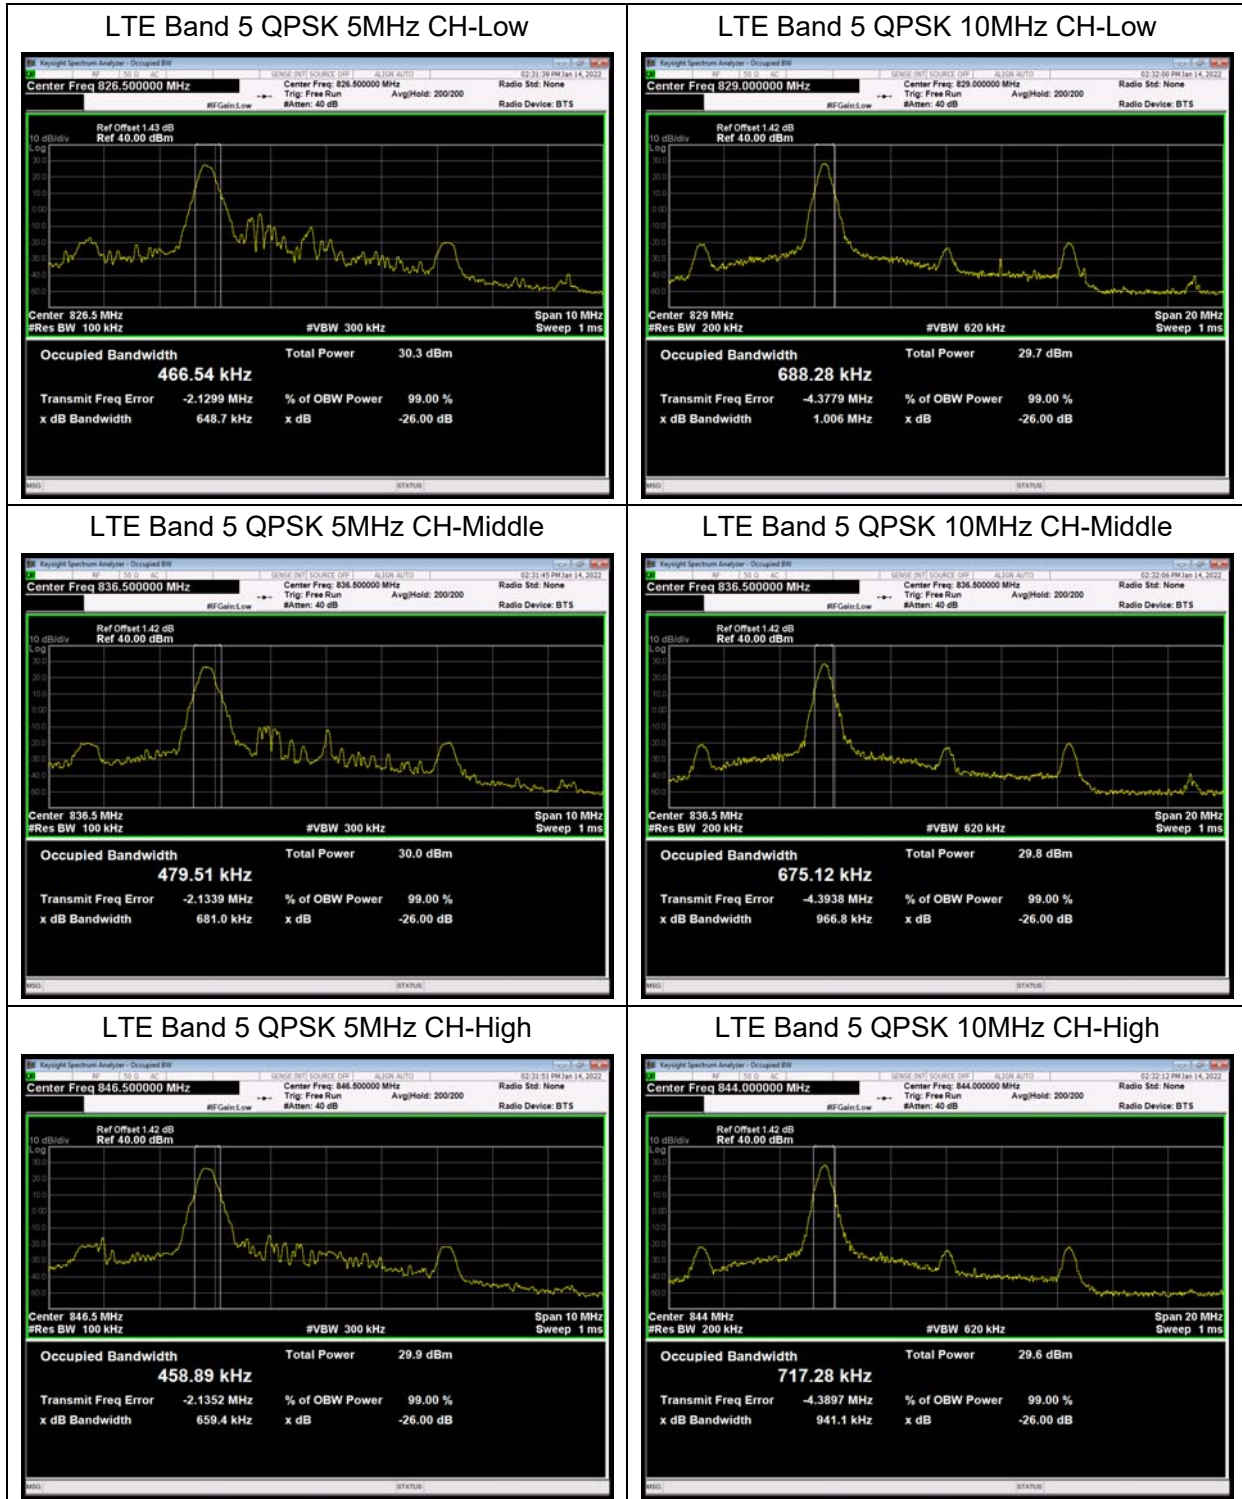


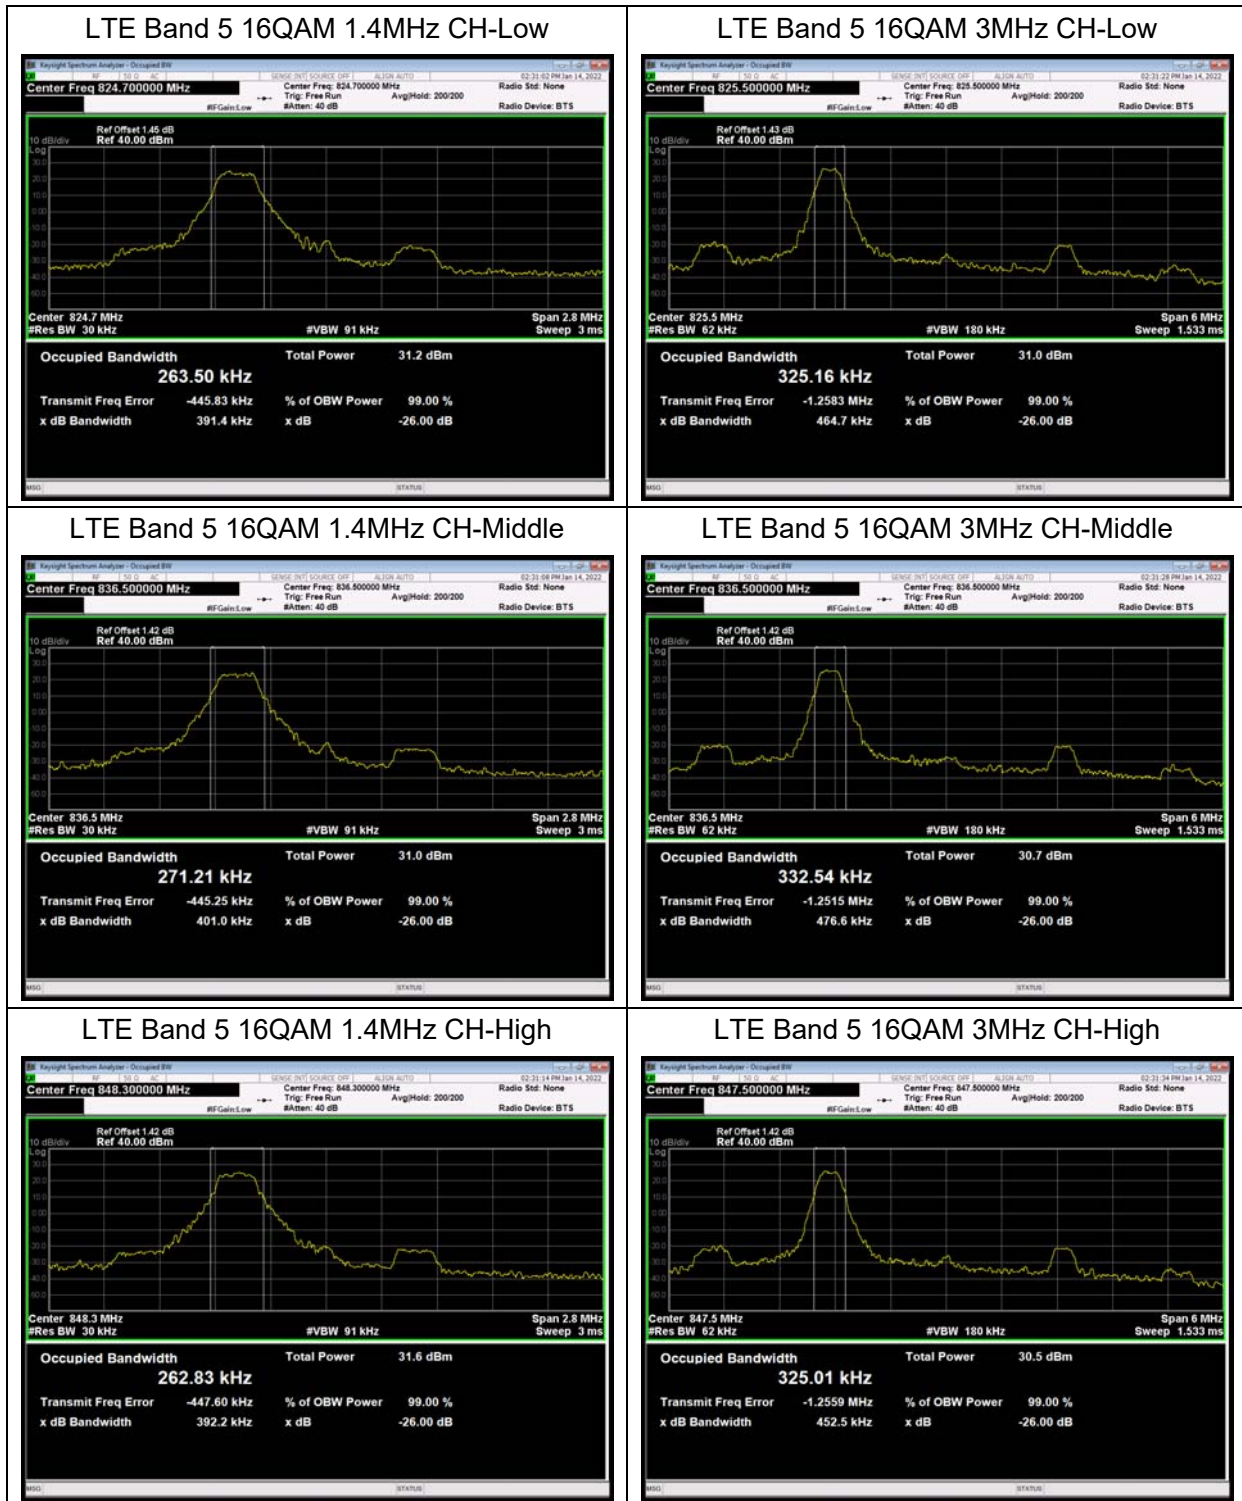




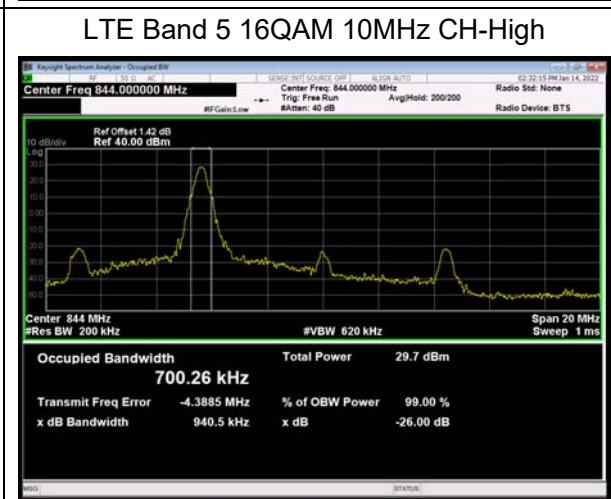
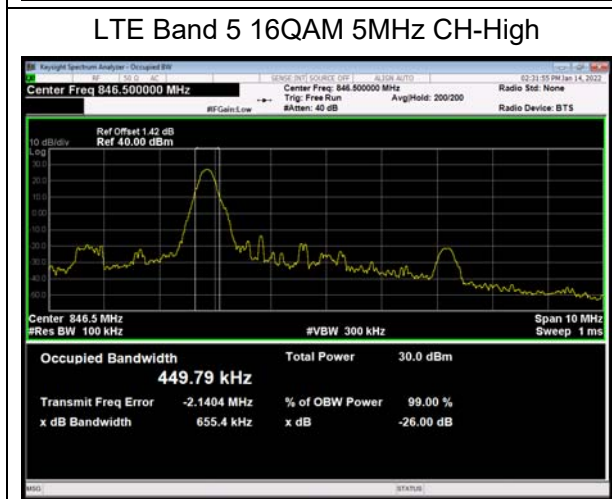
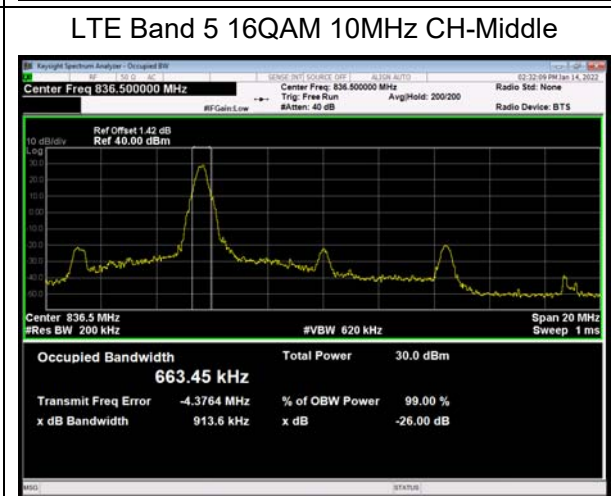
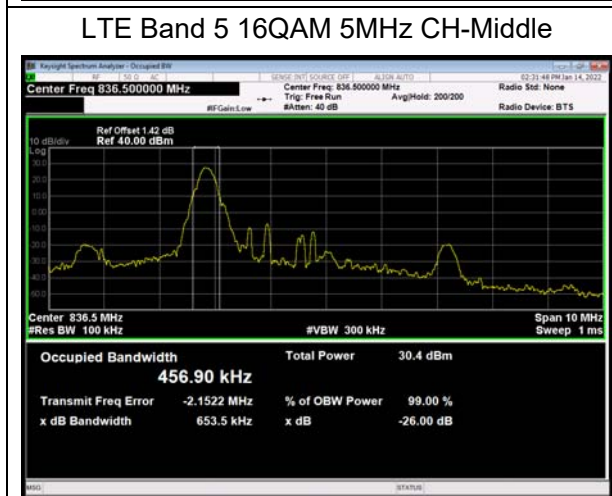
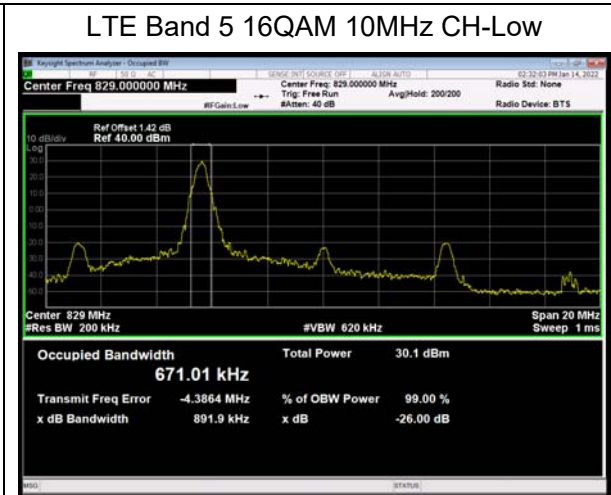
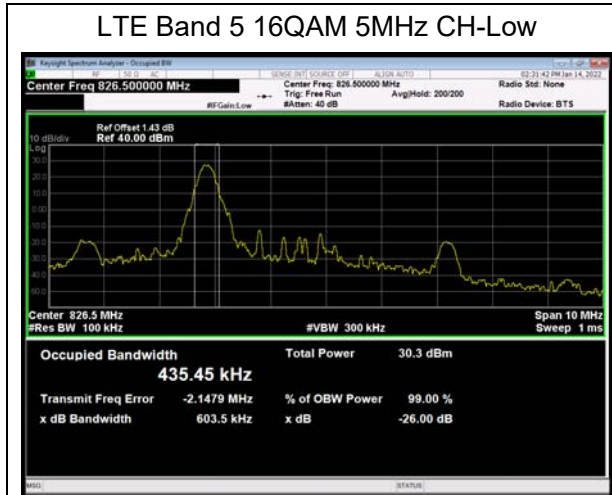


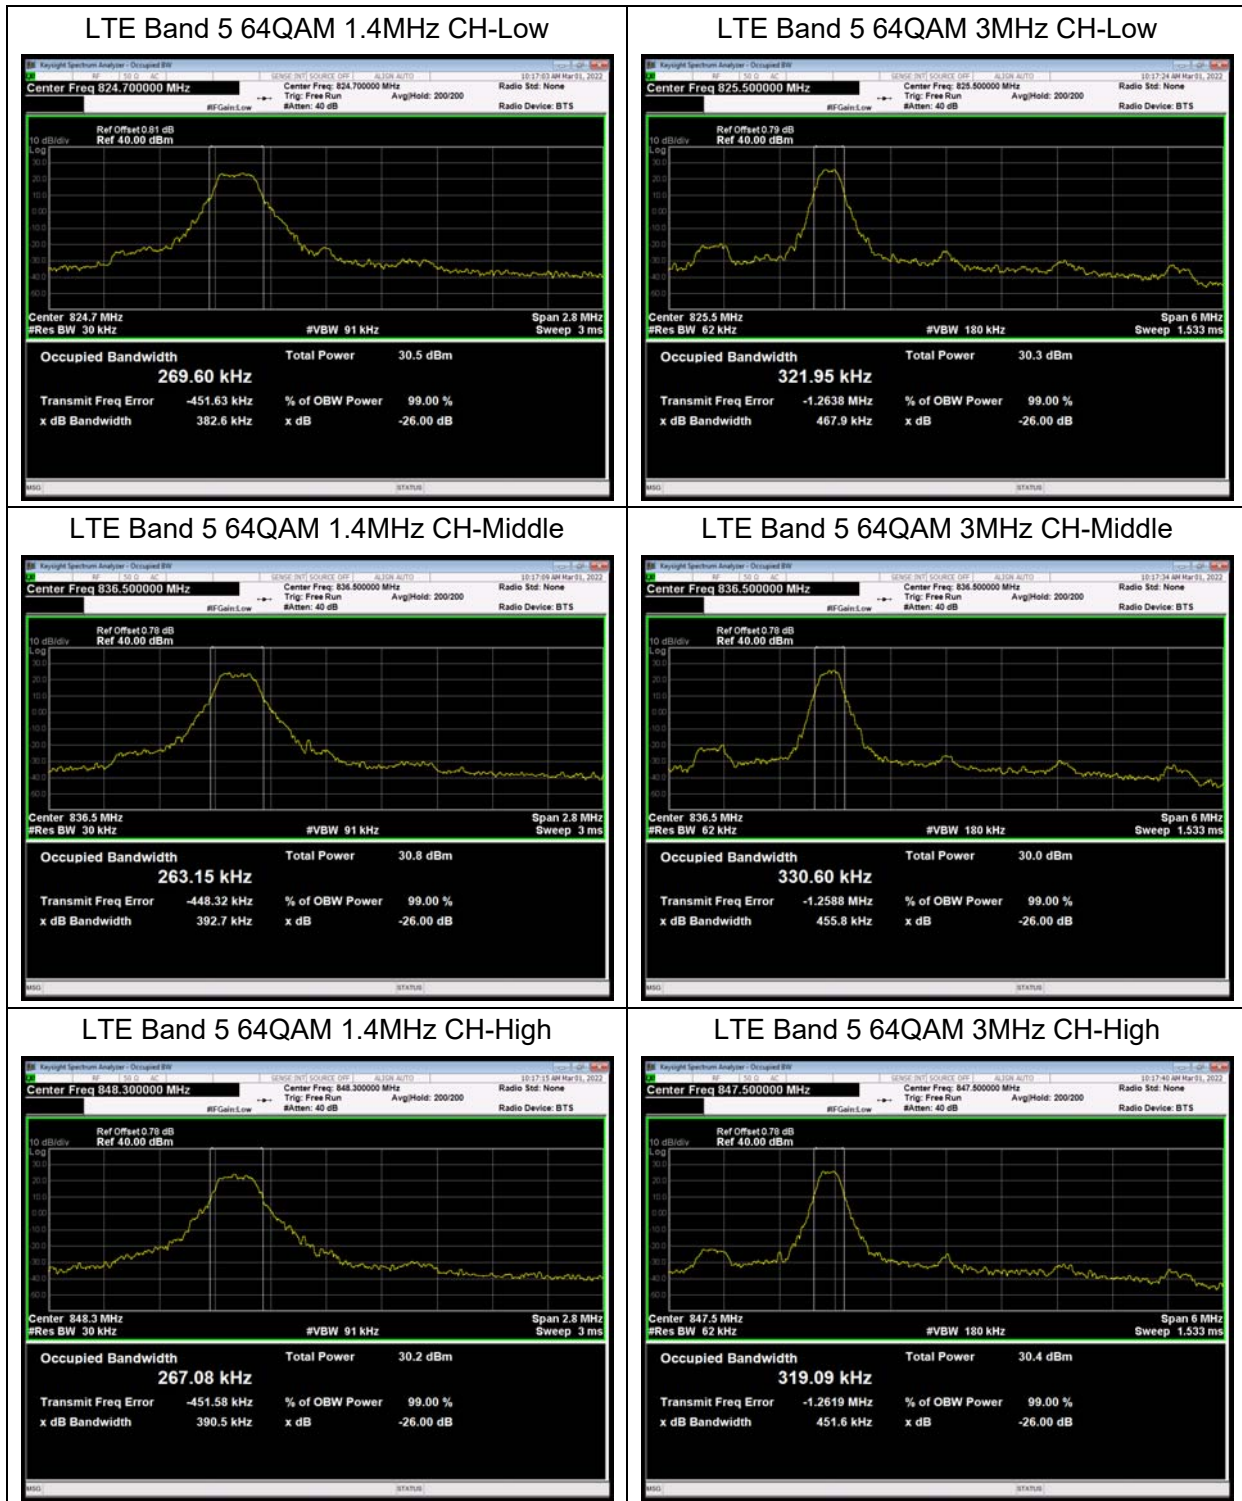







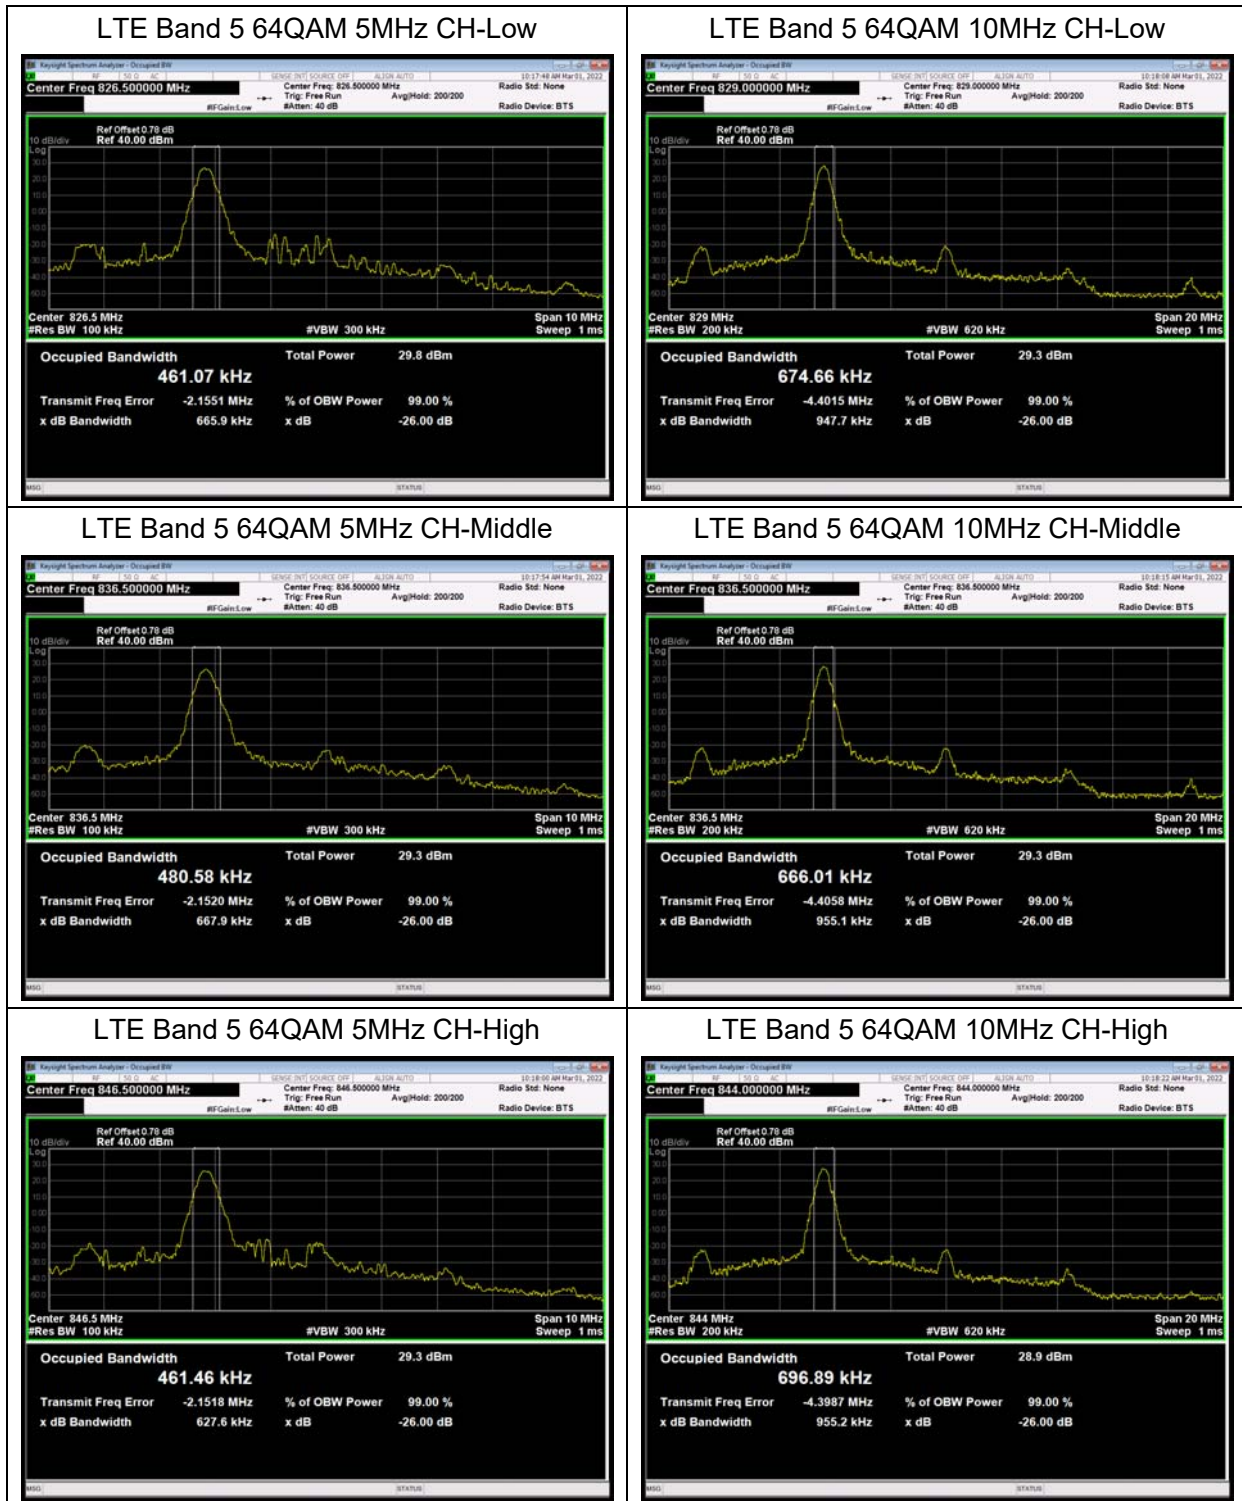



100% RB

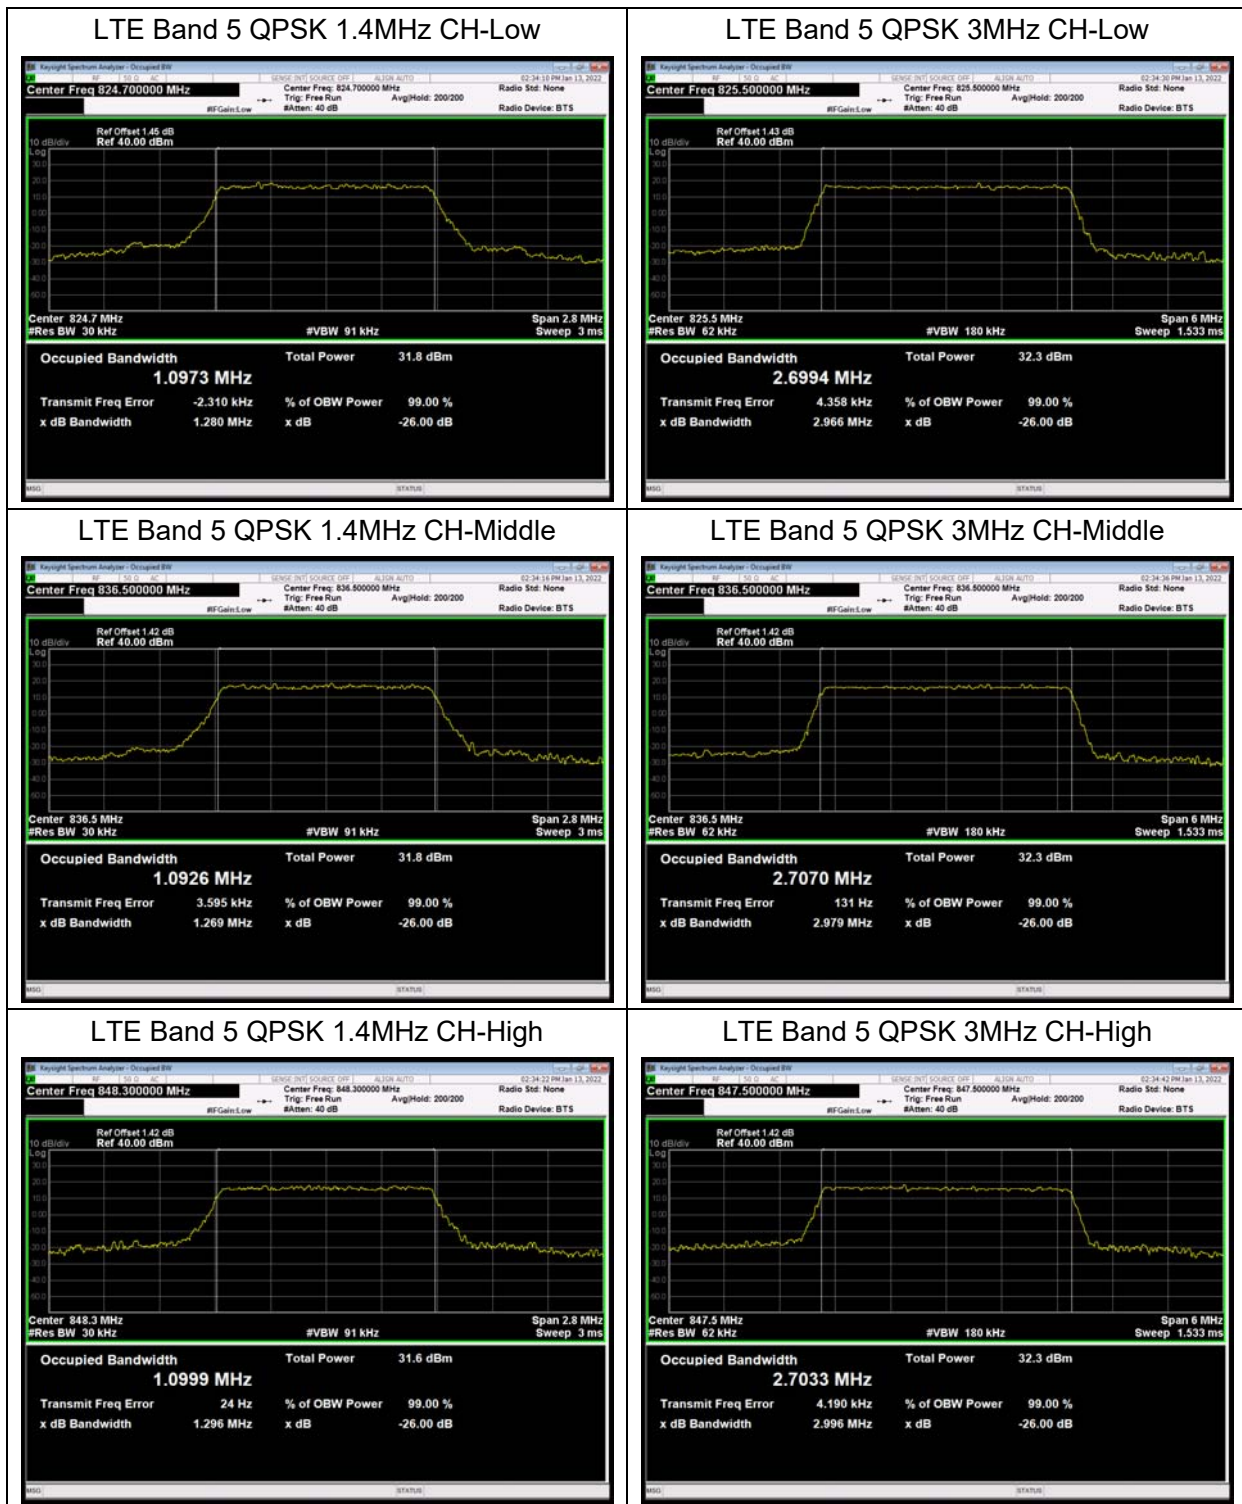

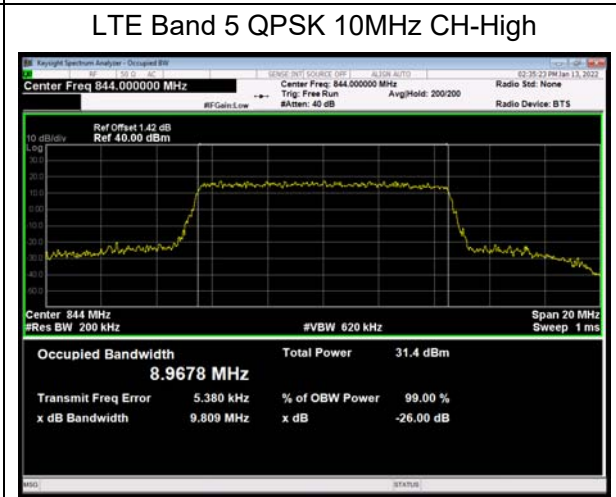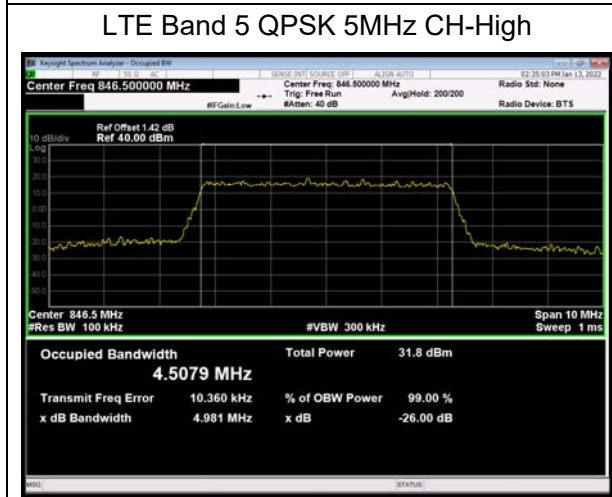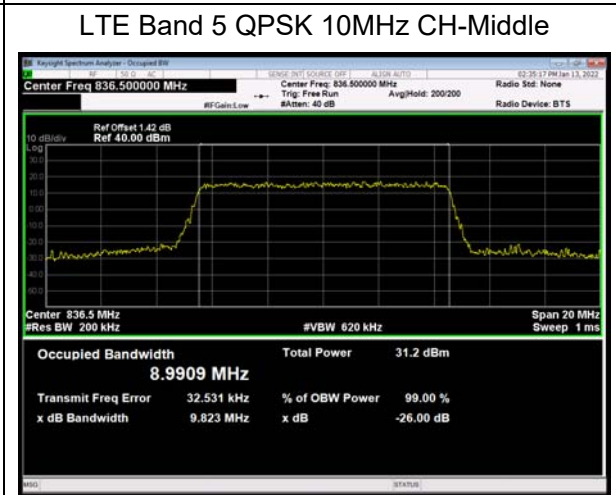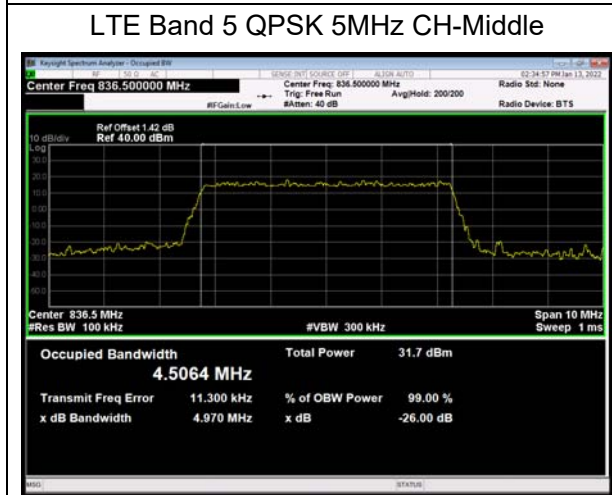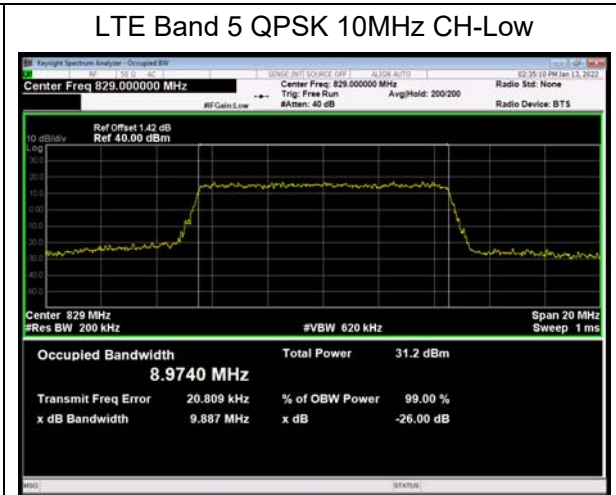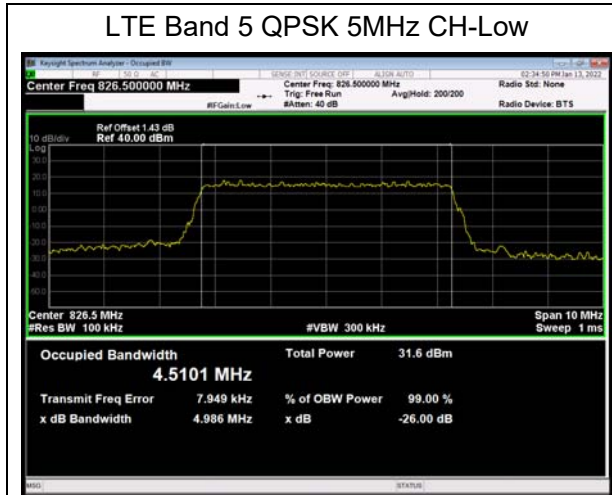


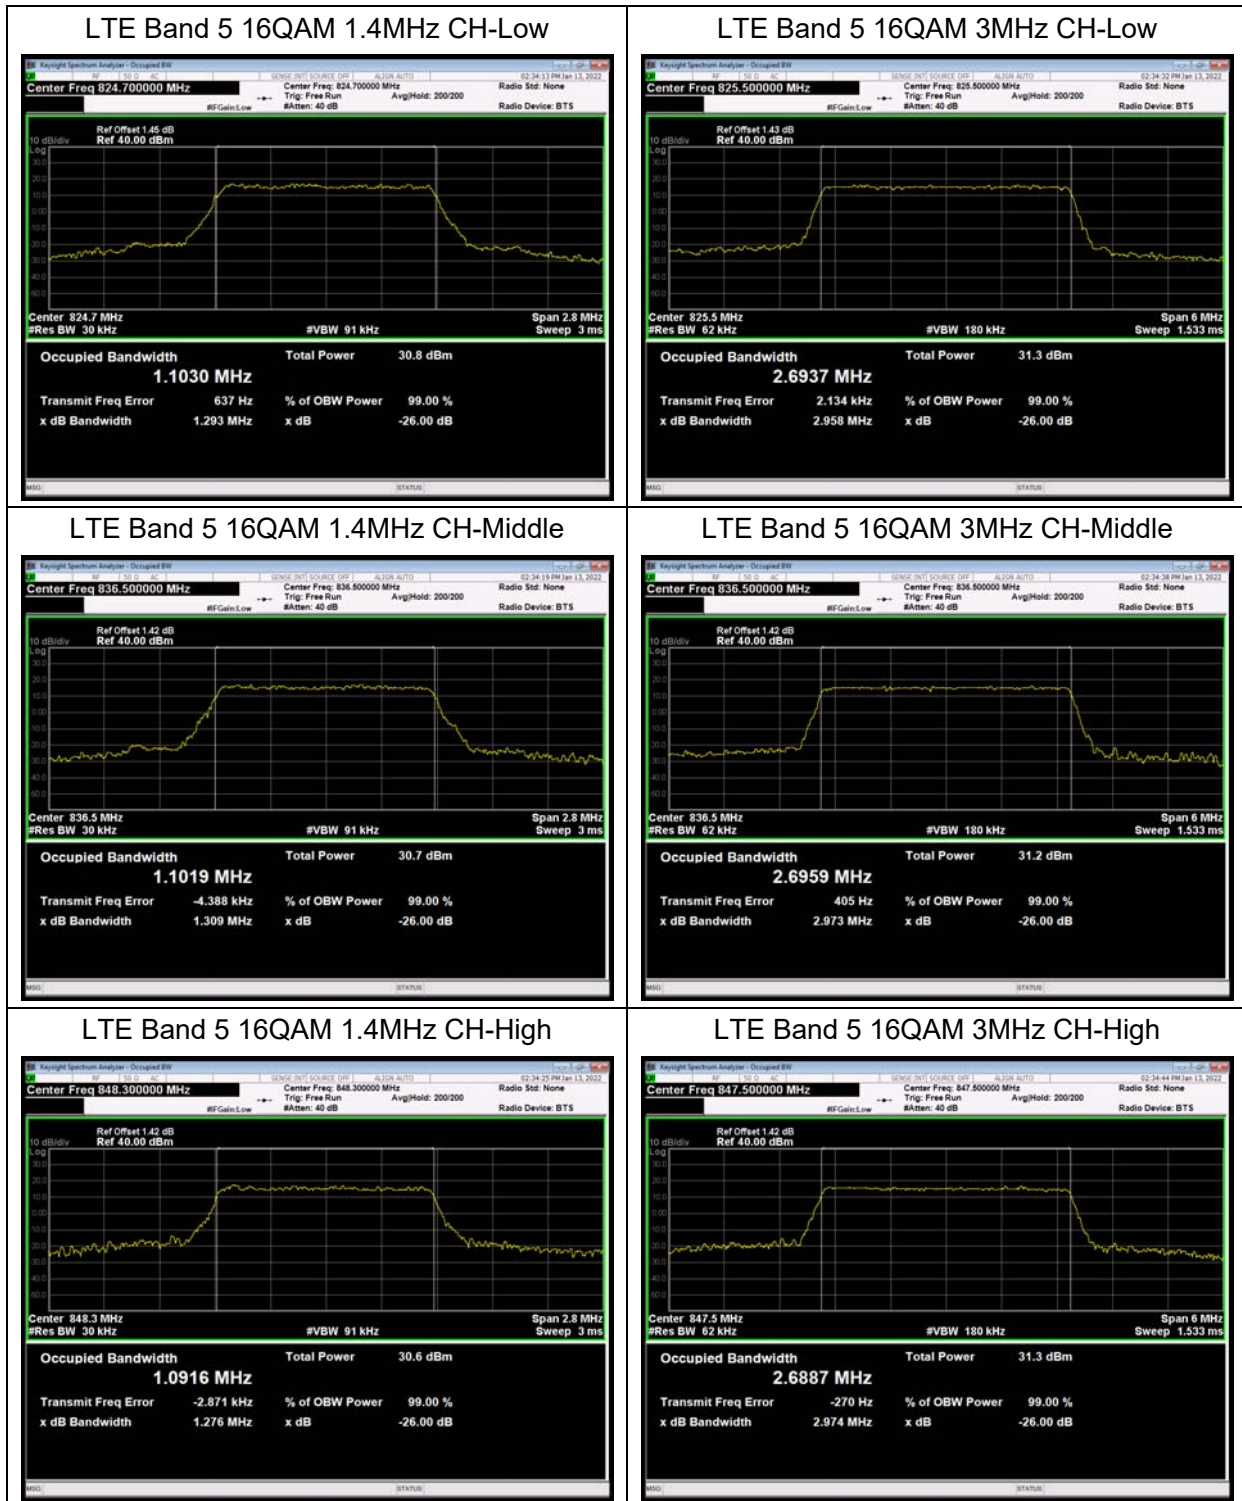

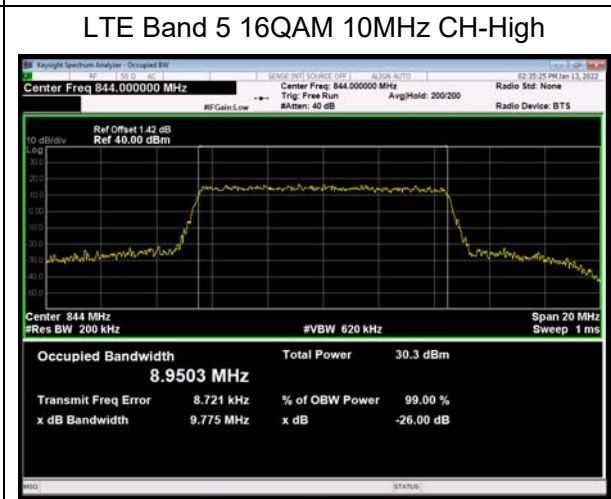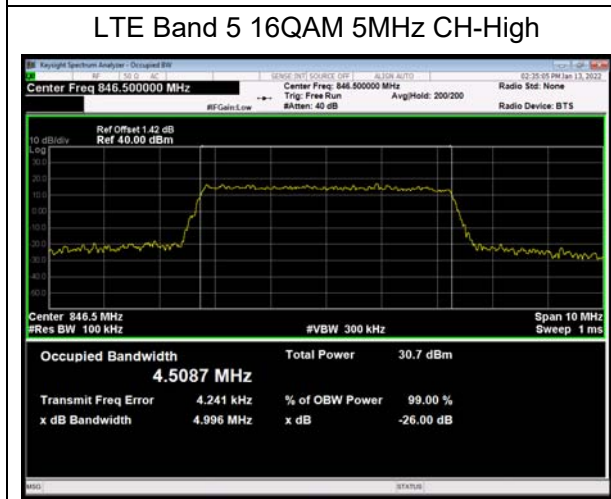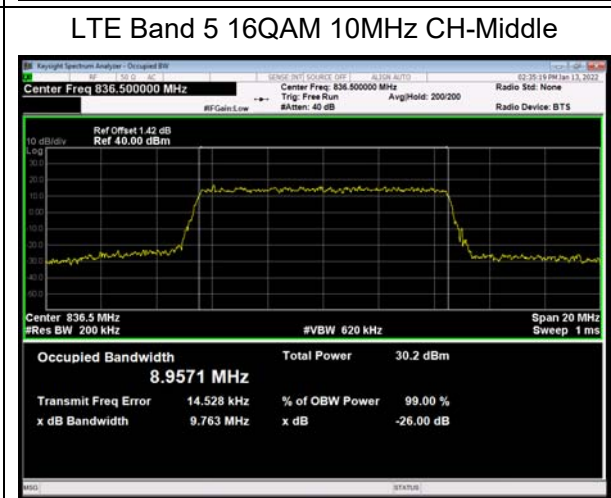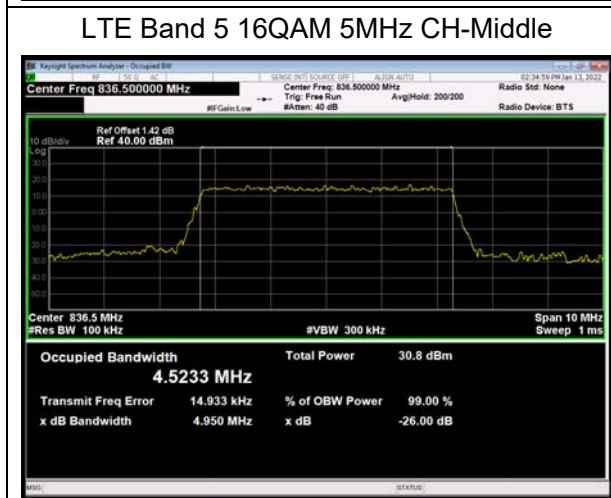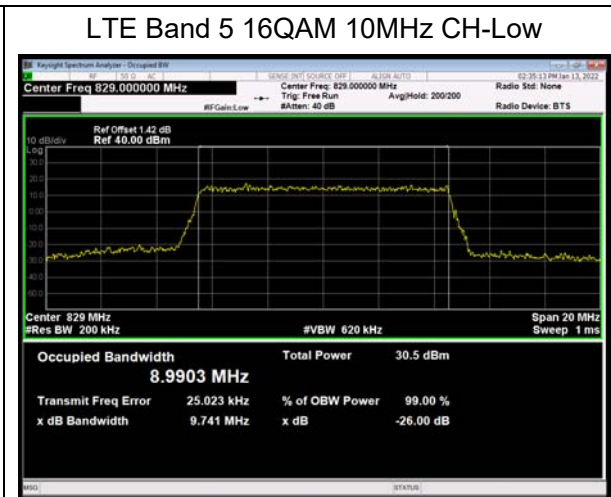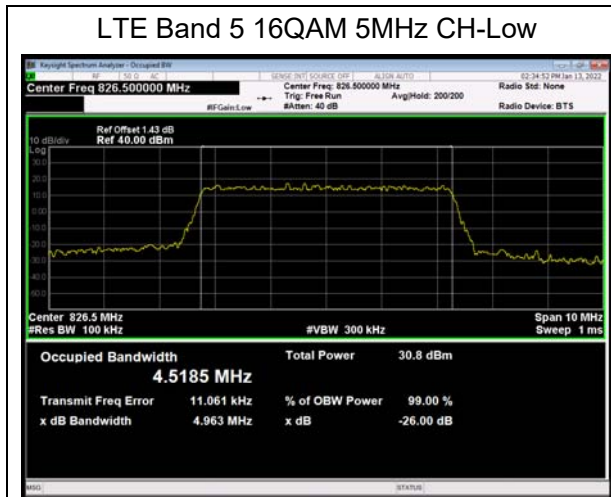

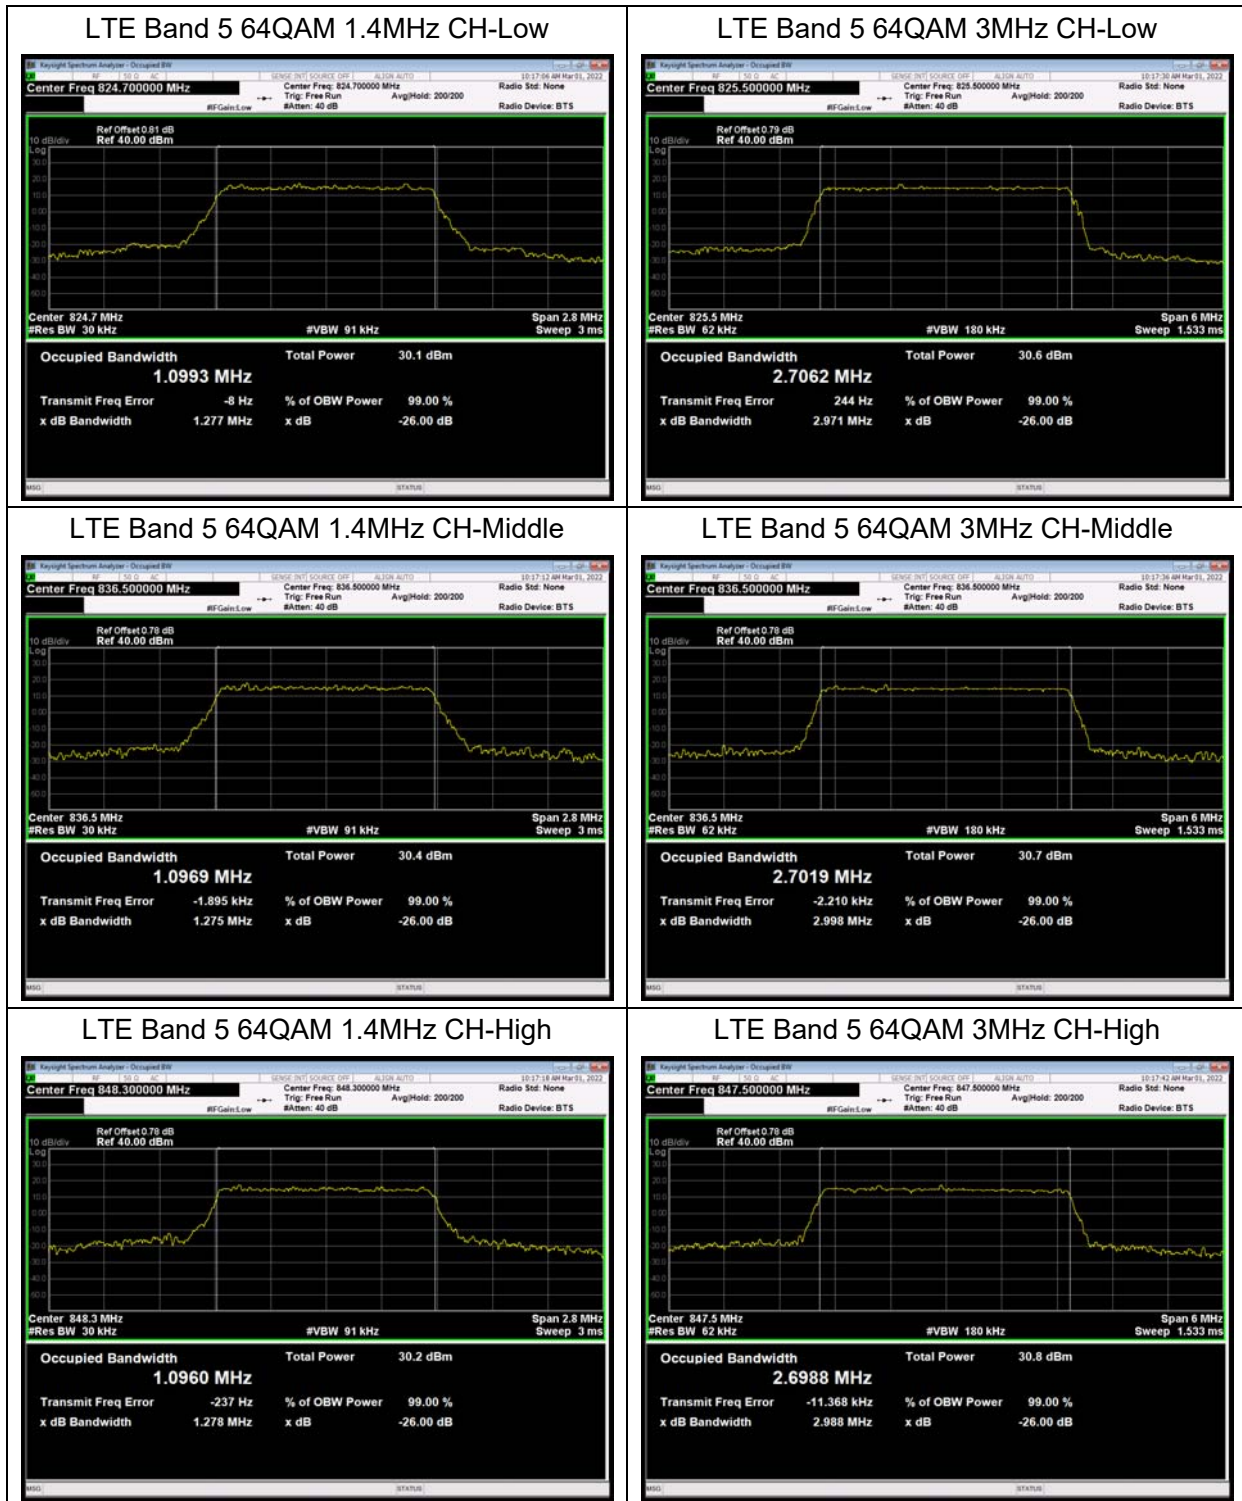



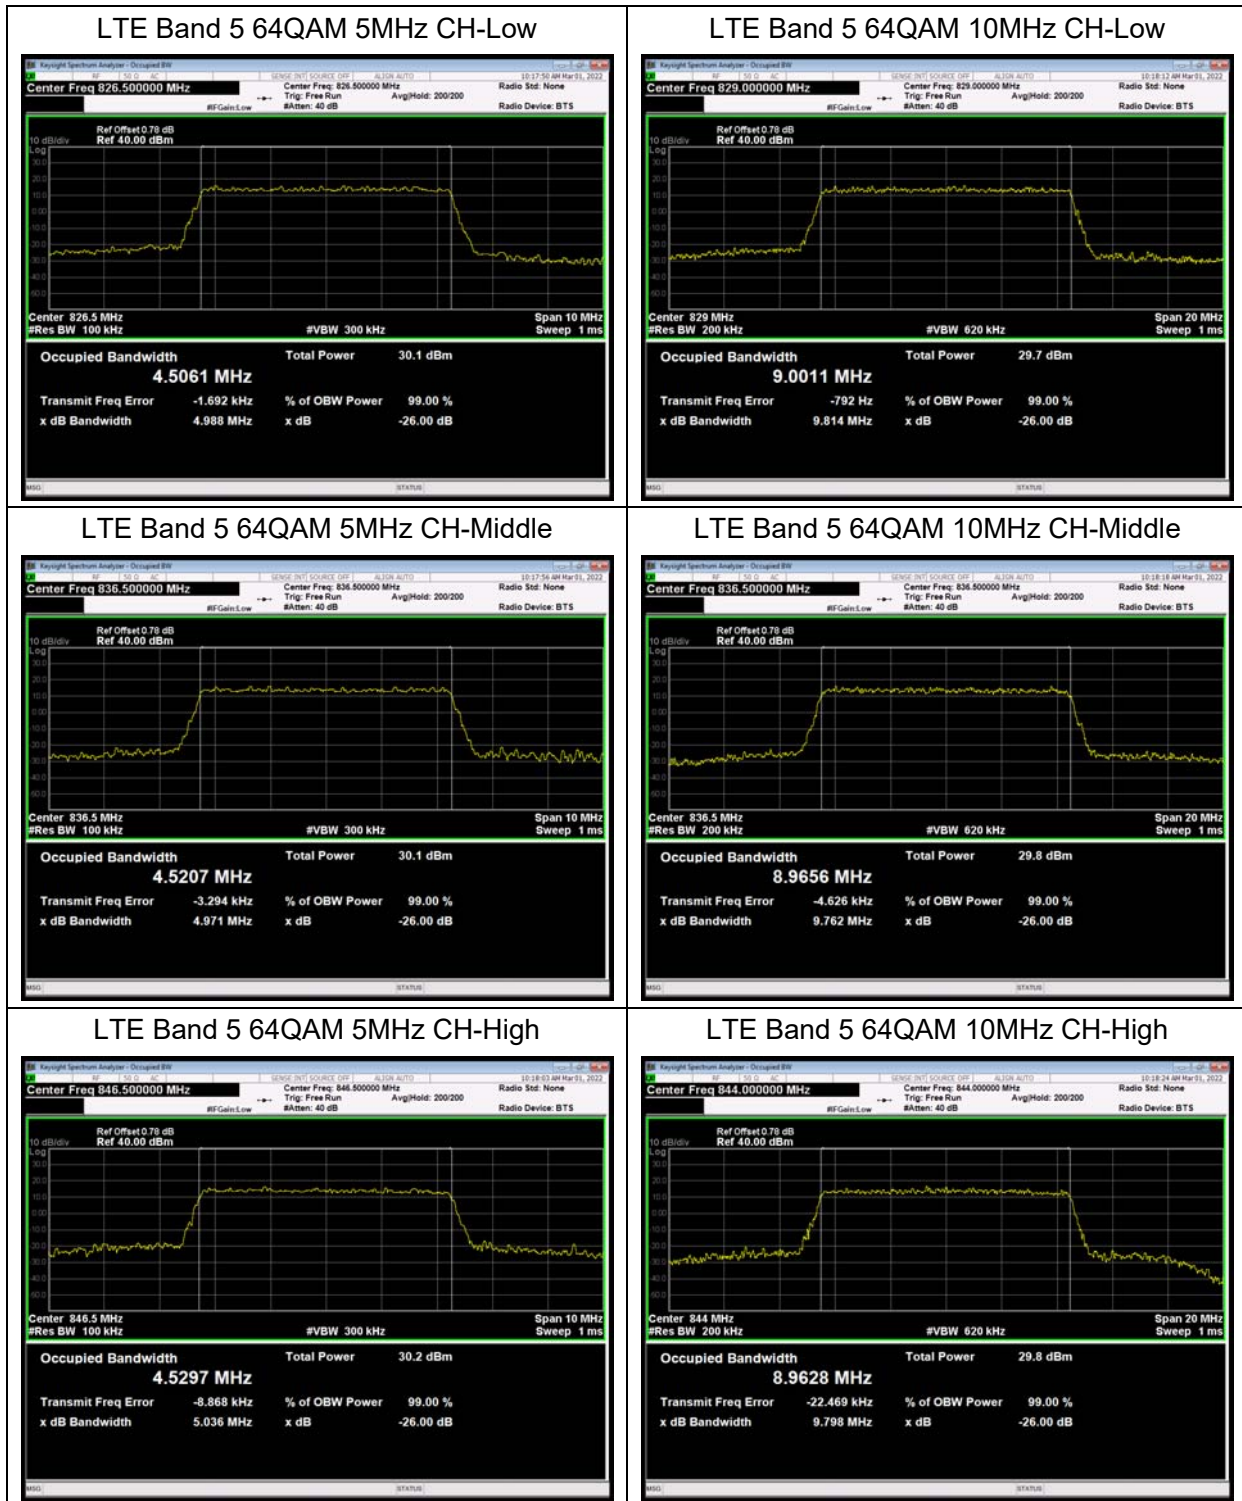

### 5.3. Band Edge Compliance

#### Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured. The average detector is used. RBW is set to  $\geq 1\%EBW$ , VBW is set to 3x RBW.

Spectrum analyzer plots are included on the following pages.

#### Test Setup

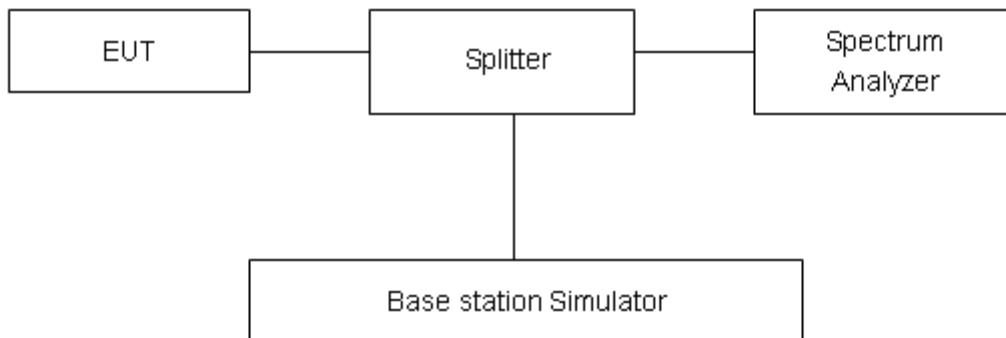

#### Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.”


Limit	-13 dBm
-------	---------

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ ,  $U=0.684$ dB.

Test Result:


GSM 850 CH-Low

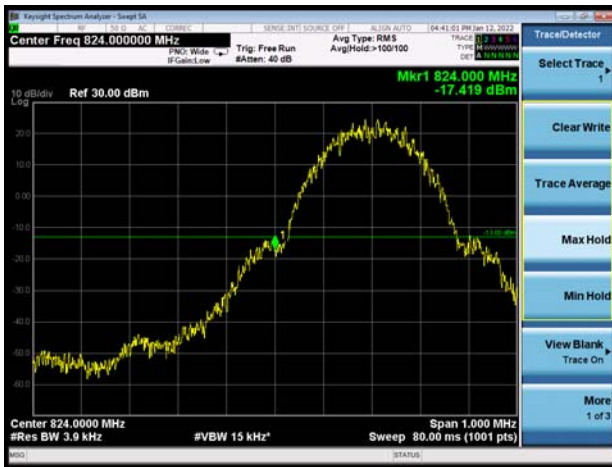

GSM 850 CH-High




GSM 850 GPRS CH-Low

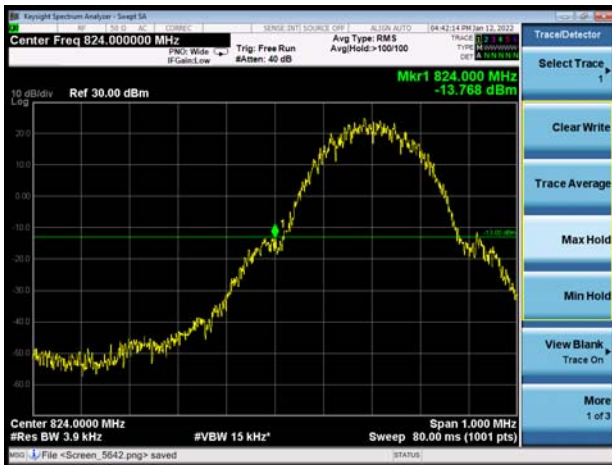


GSM 850 GPRS CH-High



GSM 850 EGPRS CH-Low

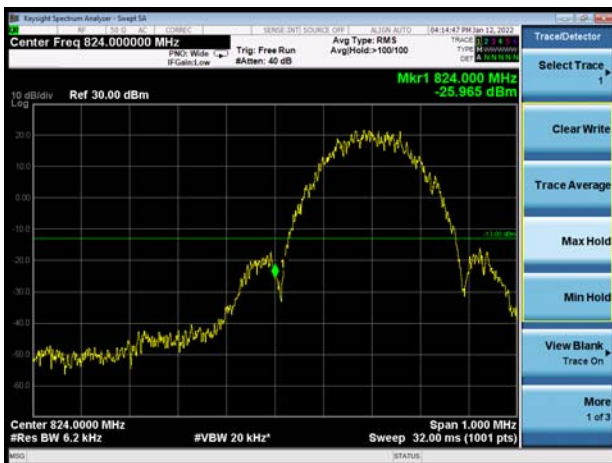

GSM 850 EGPRS CH-High

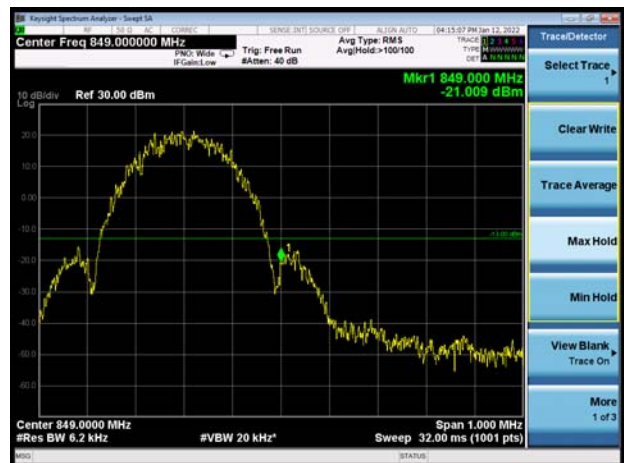


WCDMA Band V CH-Low




WCDMA Band V CH-High




LTE Band 5 QPSK 1.4MHz CH-Low 1RB

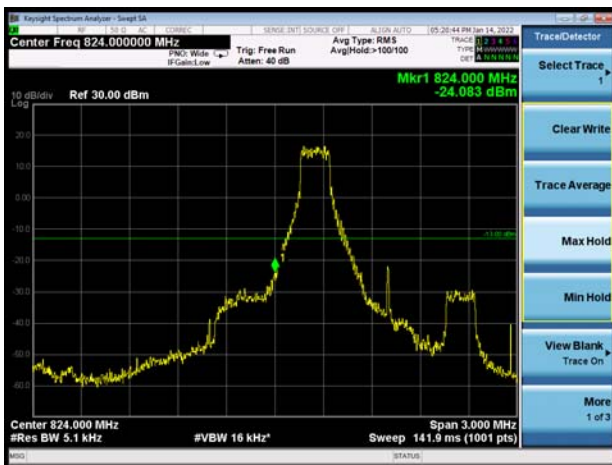


LTE Band 5 QPSK 1.4MHz CH-High 1RB

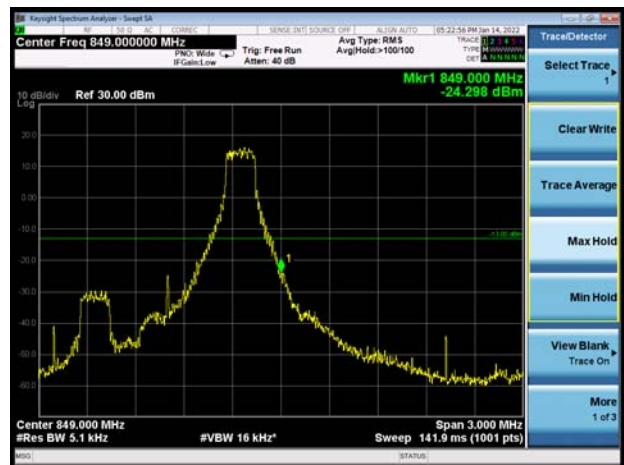


LTE Band 5 QPSK 1.4MHz CH-Low 100%RB

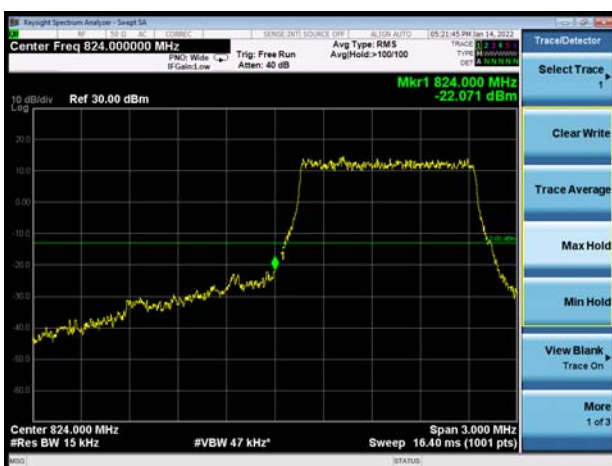


LTE Band 5 QPSK 1.4MHz CH-High 100%RB

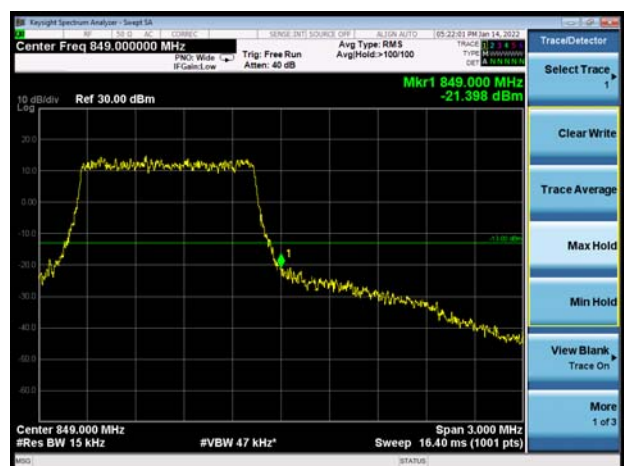


LTE Band 5 QPSK 3MHz CH-Low 1RB

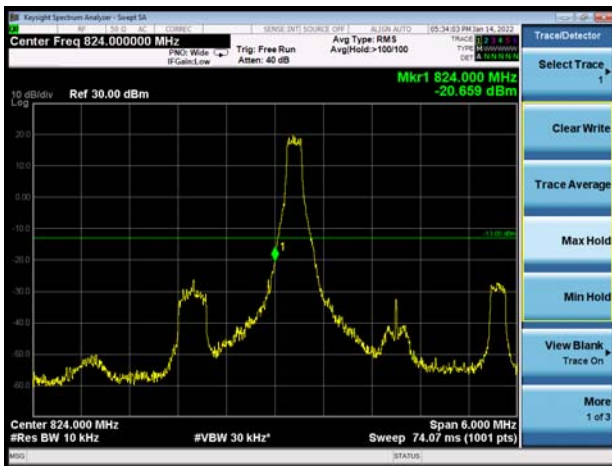

LTE Band 5 QPSK 3MHz CH-High 1RB

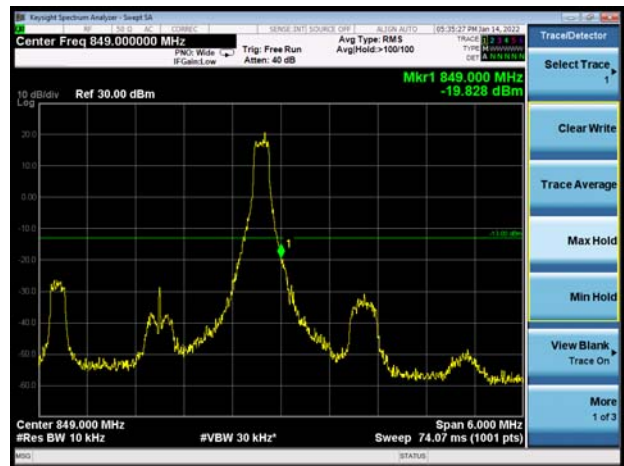


LTE Band 5 QPSK 3MHz CH-Low 100%RB

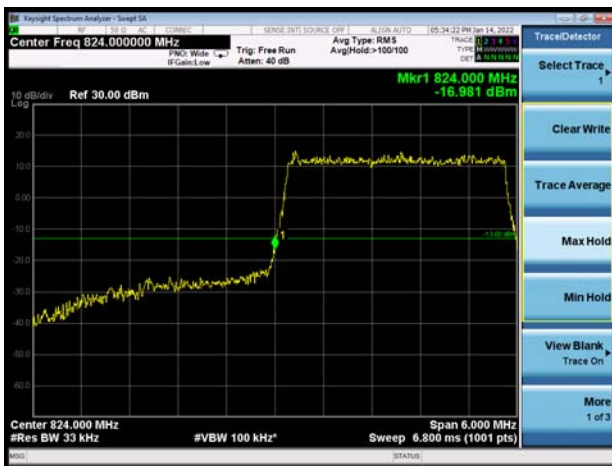


LTE Band 5 QPSK 3MHz CH-High 100%RB




LTE Band 5 QPSK 5MHz CH-Low 1RB

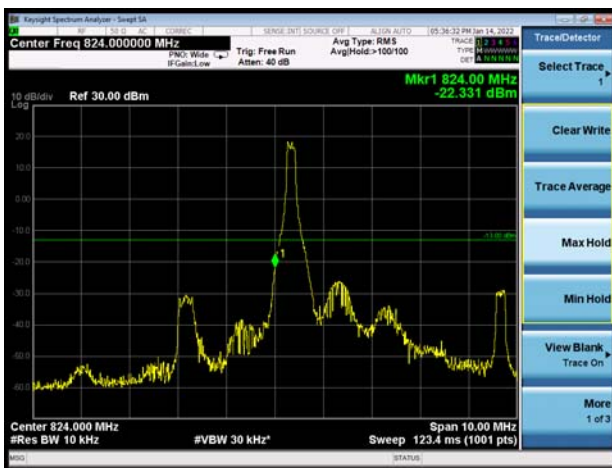

LTE Band 5 QPSK 5MHz CH-High 1RB

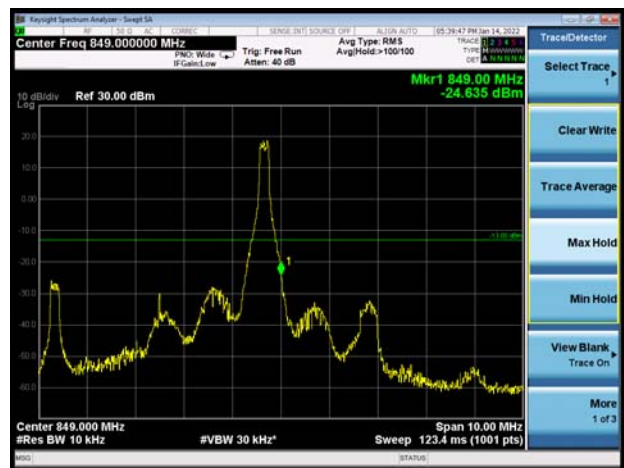


LTE Band 5 QPSK 5MHz CH-Low 100%RB

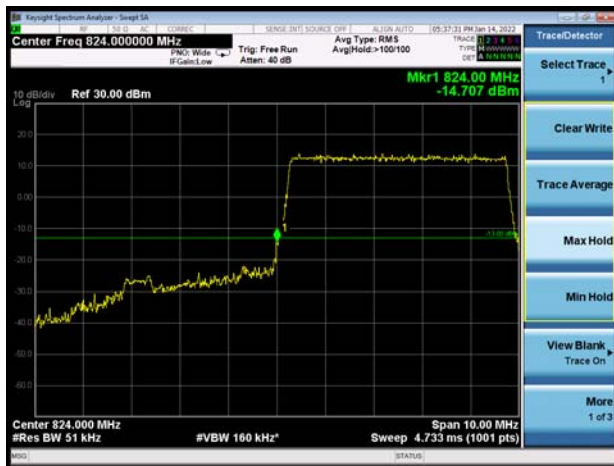


LTE Band 5 QPSK 5MHz CH-High 100%RB




LTE Band 5 QPSK 10MHz CH-Low 1RB

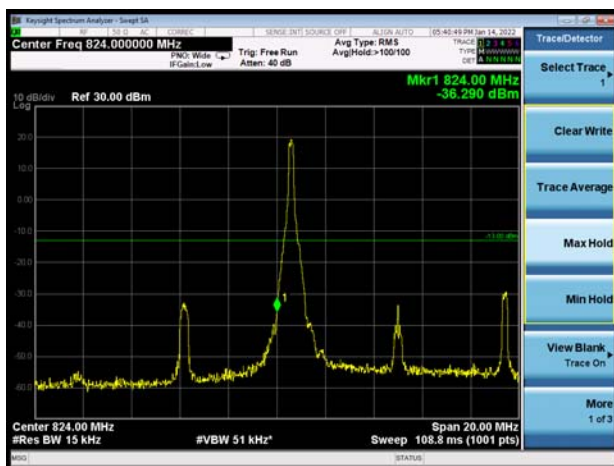


LTE Band 5 QPSK 10MHz CH-High 1RB

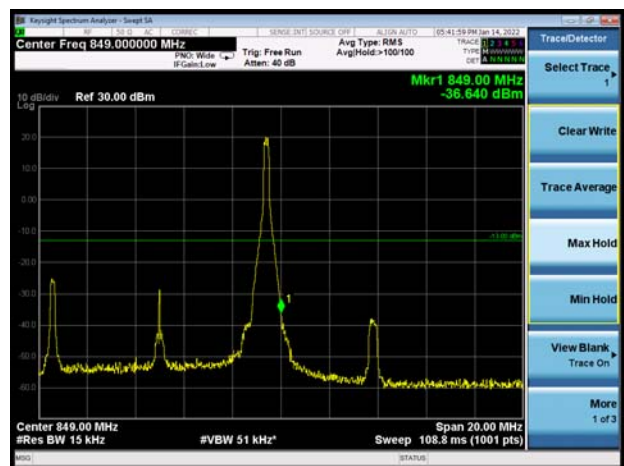

LTE Band 5 QPSK 10MHz CH-Low 100%RB

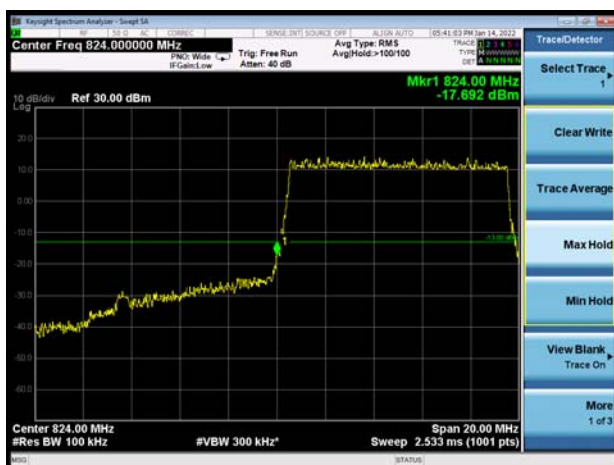


LTE Band 5 QPSK 10MHz CH-High 100%RB

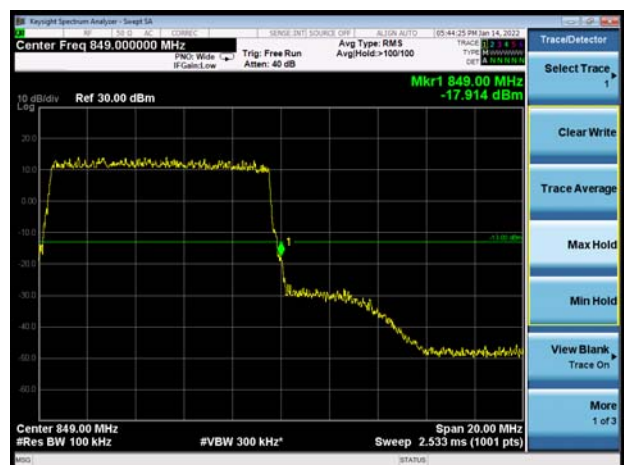


LTE Band 5 16QAM 1.4MHz CH-Low 1RB




LTE Band 5 16QAM 1.4MHz CH-High 1RB

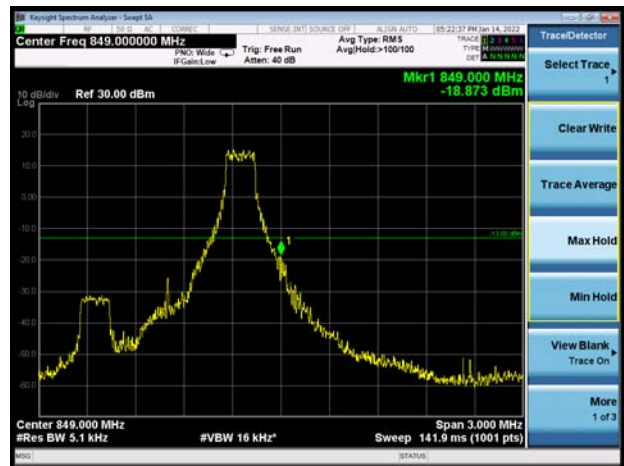


LTE Band 5 16QAM 1.4MHz CH-Low 100%RB

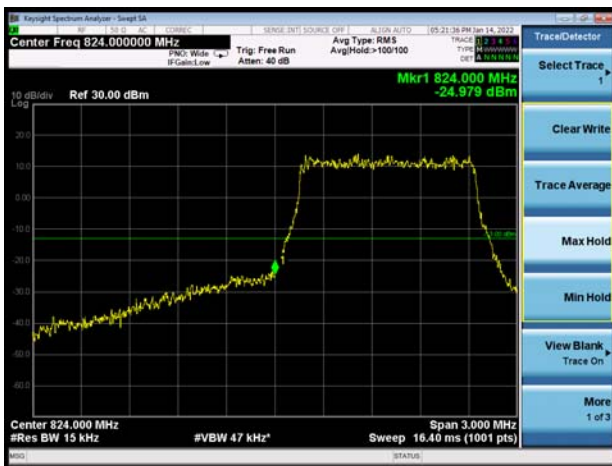


LTE Band 5 16QAM 1.4MHz CH-High 100%RB

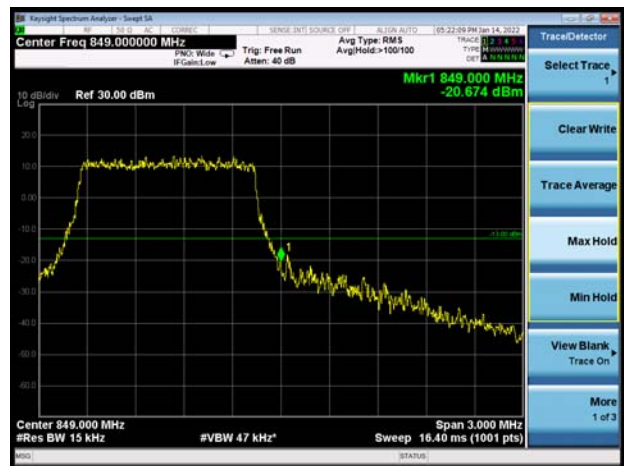

LTE Band 5 16QAM 3MHz CH-Low 1RB

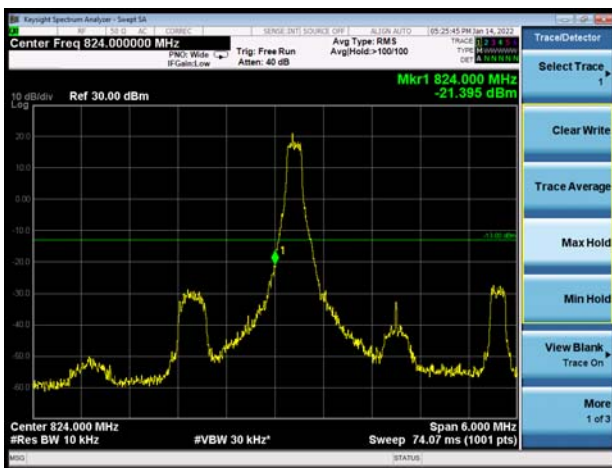

LTE Band 5 16QAM 3MHz CH-High 1RB

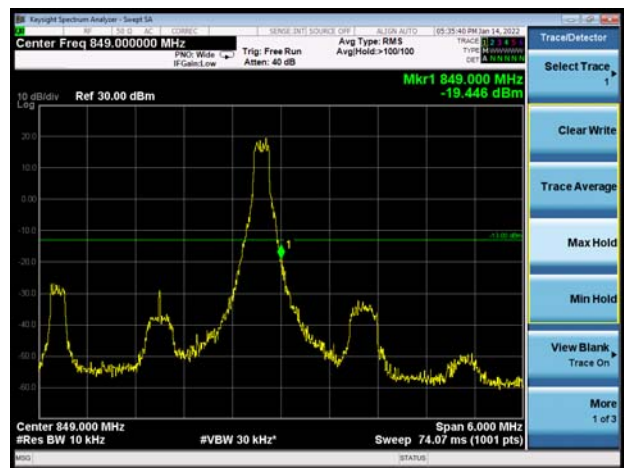


LTE Band 5 16QAM 3MHz CH-Low 100%RB




LTE Band 5 16QAM 3MHz CH-High 100%RB




LTE Band 5 16QAM 5MHz CH-Low 1RB

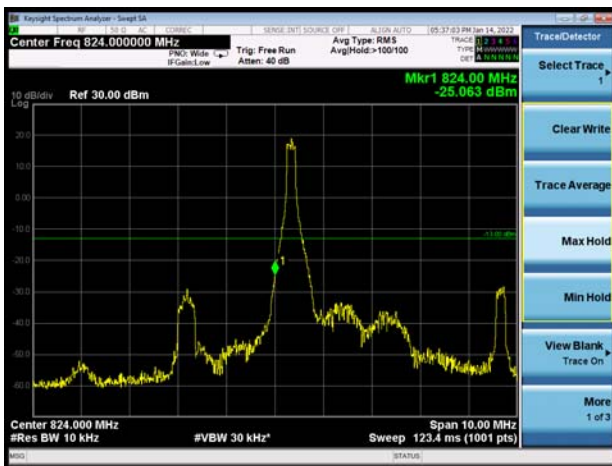


LTE Band 5 16QAM 5MHz CH-High 1RB

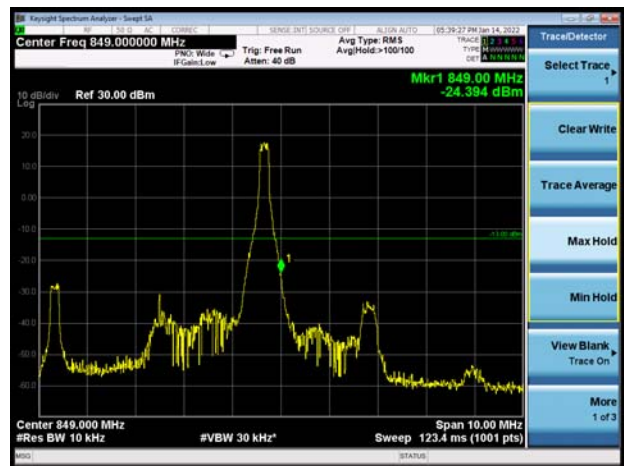

LTE Band 5 16QAM 5MHz CH-Low 100%RB

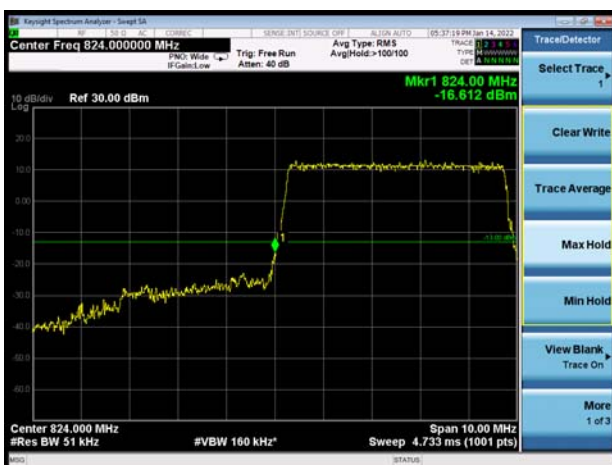


LTE Band 5 16QAM 5MHz CH-High 100%RB

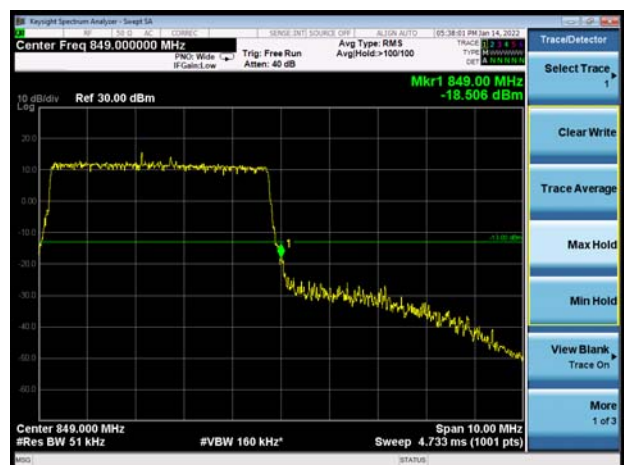





LTE Band 5 16QAM 10MHz CH-Low 1RB

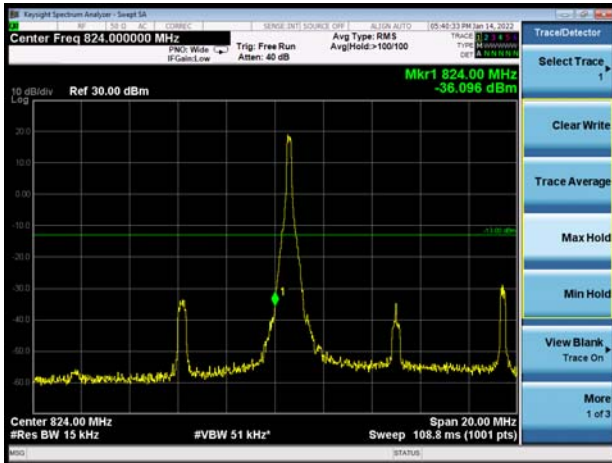


LTE Band 5 16QAM 10MHz CH-High 1RB

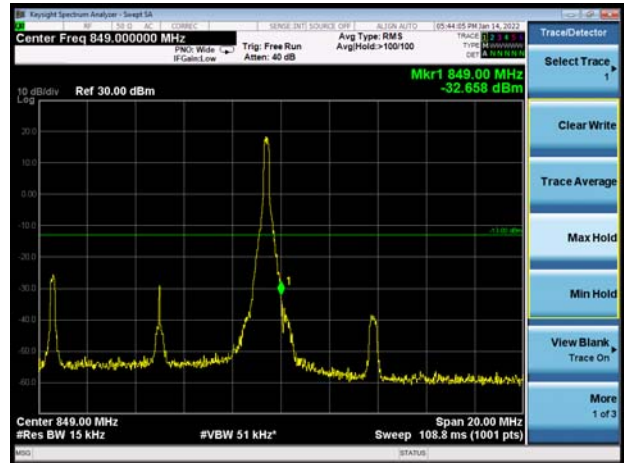


LTE Band 5 16QAM 10MHz CH-Low 100%RB

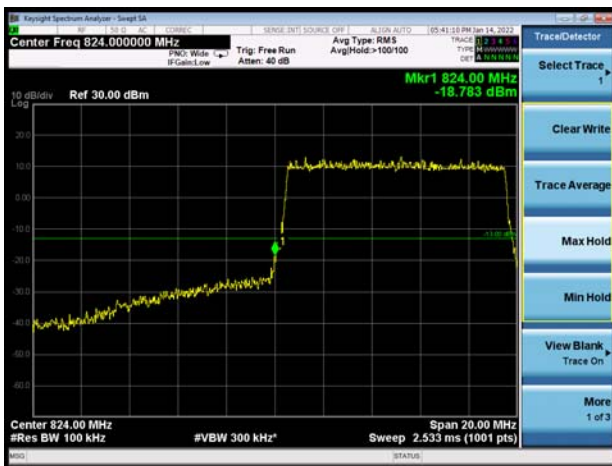


LTE Band 5 16QAM 10MHz CH-High 100%RB

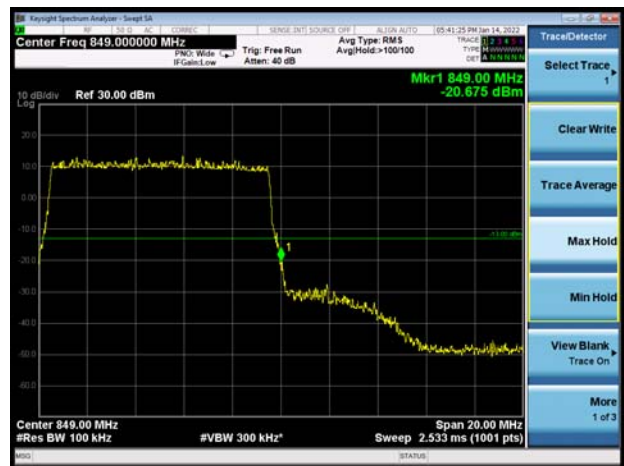


LTE Band 5 64QAM 1.4MHz CH-Low 1RB

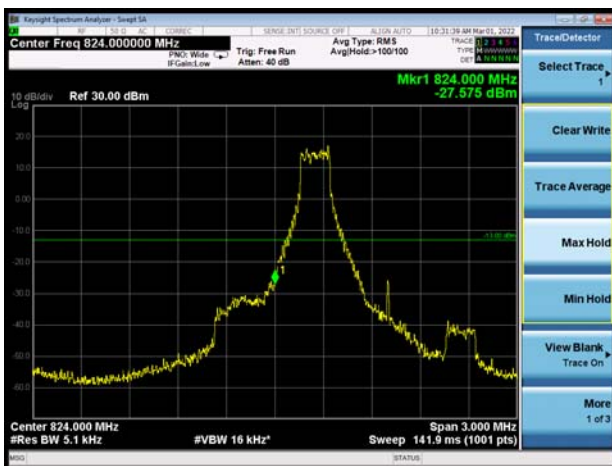


LTE Band 5 64QAM 1.4MHz CH-High 1RB

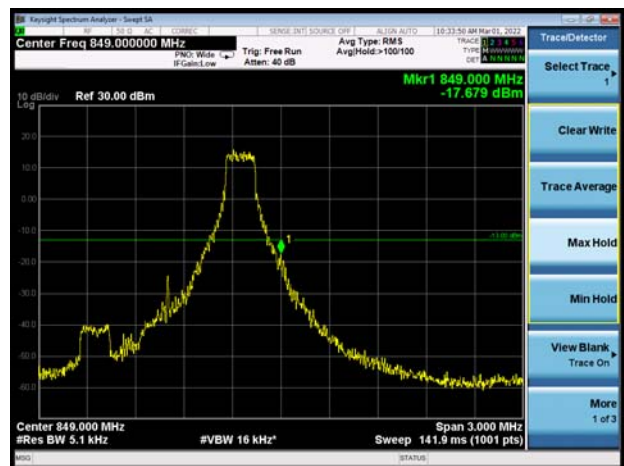


LTE Band 5 64QAM 1.4MHz CH-Low 100%RB

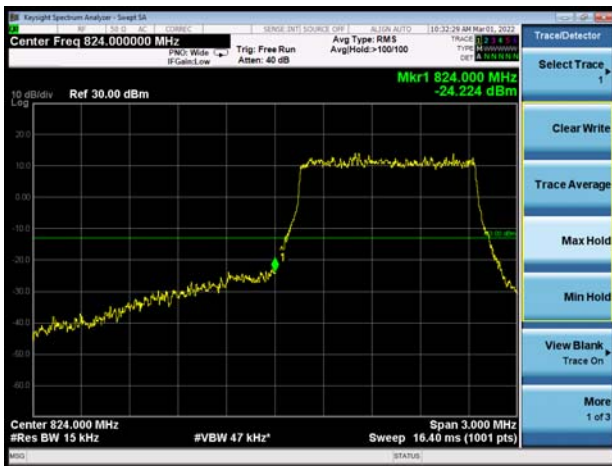


LTE Band 5 64QAM 1.4MHz CH-High 100%RB

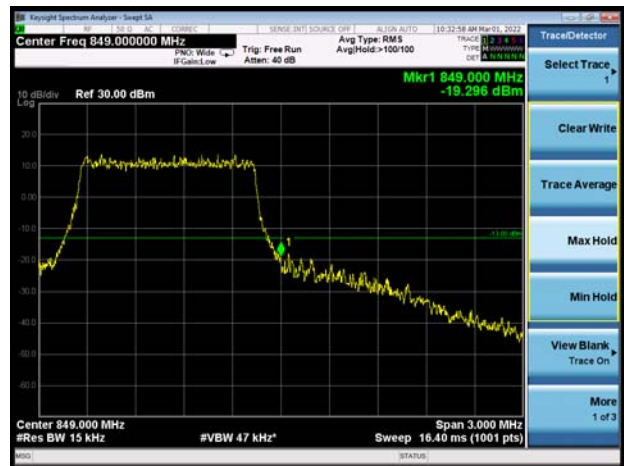


LTE Band 5 64QAM 3MHz CH-Low 1RB

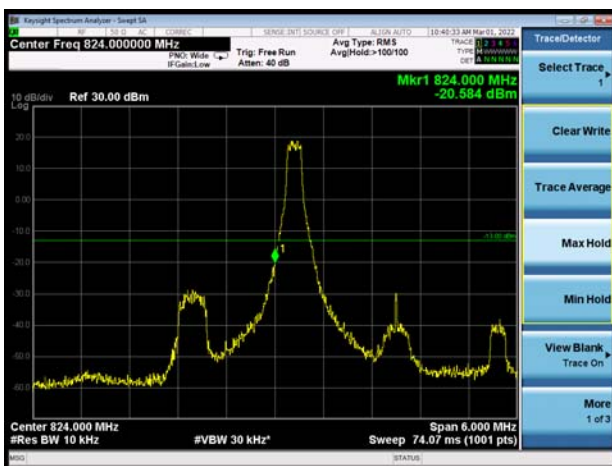

LTE Band 5 64QAM 3MHz CH-High 1RB

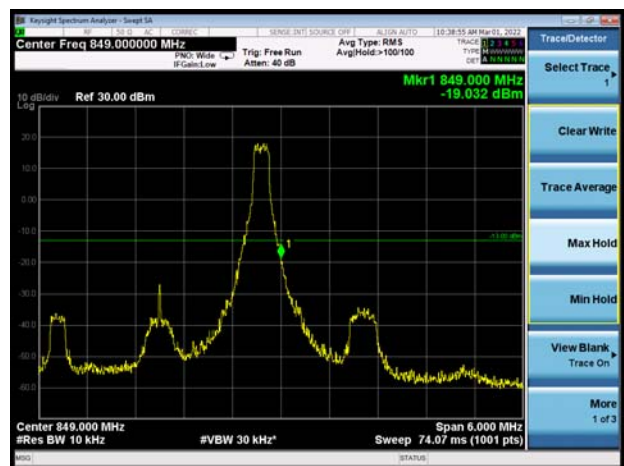


LTE Band 5 64QAM 3MHz CH-Low 100%RB

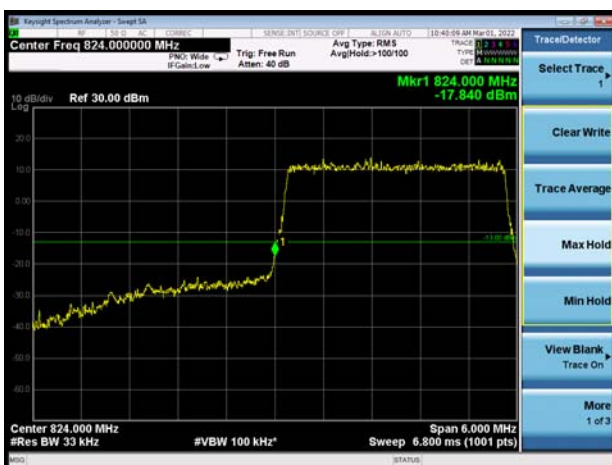

LTE Band 5 64QAM 3MHz CH-High 100%RB




LTE Band 5 64QAM 5MHz CH-Low 1RB

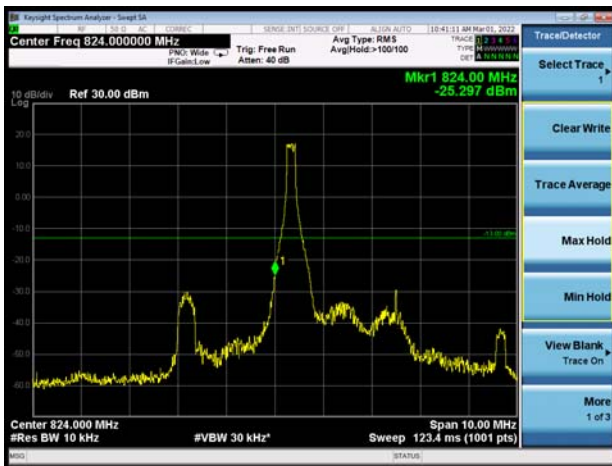


LTE Band 5 64QAM 5MHz CH-High 1RB




LTE Band 5 64QAM 5MHz CH-Low 100%RB

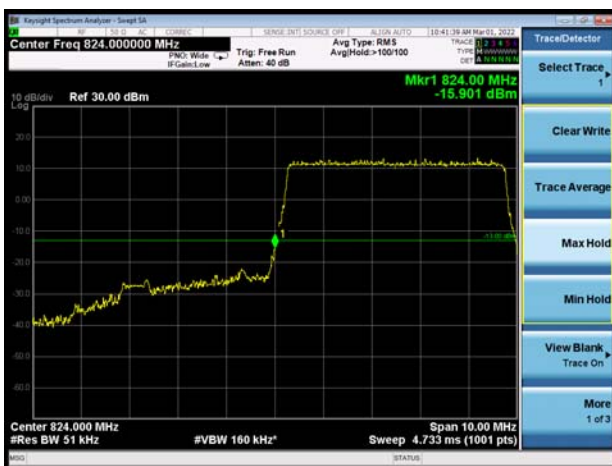


LTE Band 5 64QAM 5MHz CH-High 100%RB

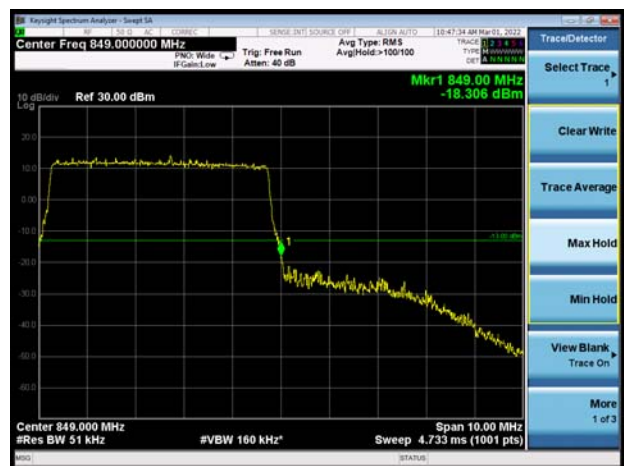


LTE Band 5 64QAM 10MHz CH-Low 1RB

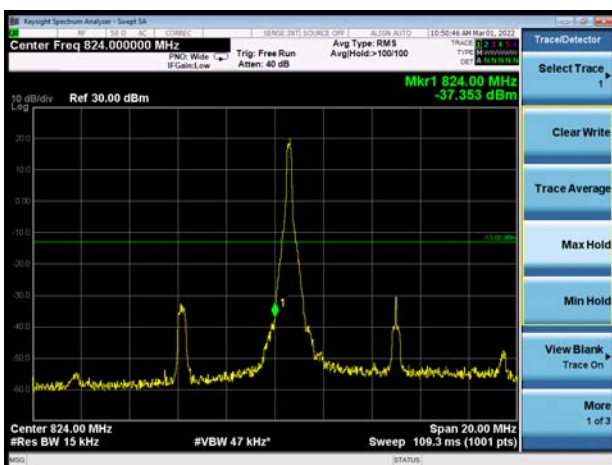

LTE Band 5 64QAM 10MHz CH-High 1RB

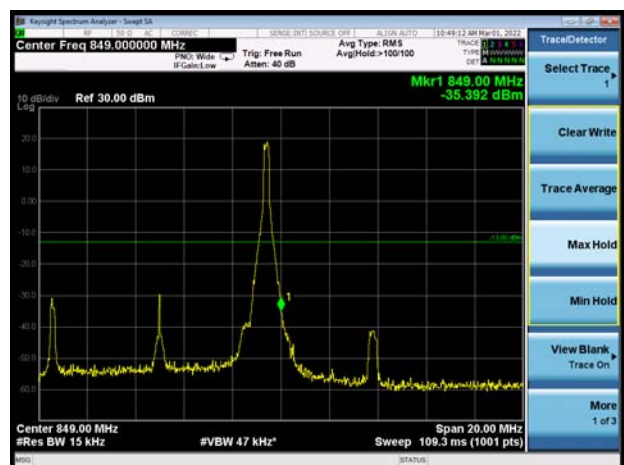

LTE Band 5 64QAM 10MHz CH-Low 100%RB

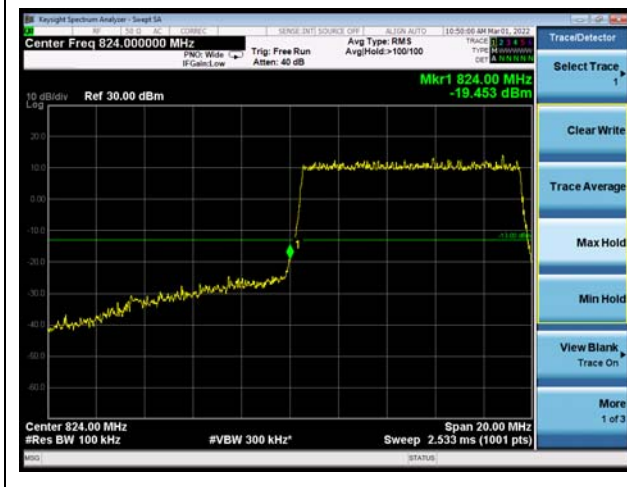

LTE Band 5 64QAM 10MHz CH-High 100%RB



## 5.4. Peak-to-Average Power Ratio (PAPR)

### Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Methods of Measurement

Measure the total peak power and record as  $P_{Pk}$ . And measure the total average power and record as  $P_{Avg}$ . Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$PAPR (dB) = P_{Pk} (dBm) - P_{Avg} (dBm).$$

### Test Setup

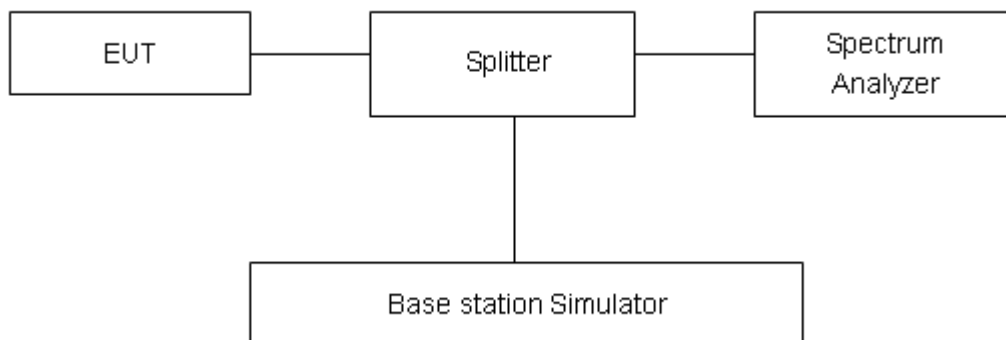

### Limits

According to the Sec. 22.913(d), The peak-to-average ratio (PAR) of the transmission must not exceed 13 dB.

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.4$  dB.

**Test Results**

Mode	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
<b>GSM 850 (GMSK)</b>	128	824.2	33.24	30.57	2.67	≤13	PASS
	190	836.6	33.20	30.54	2.66	≤13	PASS
	251	848.8	33.18	30.52	2.66	≤13	PASS
<b>GPRS 850 (GMSK)</b>	128	824.2	33.70	31.03	2.67	≤13	PASS
	190	836.6	33.67	31.00	2.67	≤13	PASS
	251	848.8	33.77	31.11	2.66	≤13	PASS
<b>EGPRS 850 (8PSK)</b>	128	824.2	30.87	25.07	5.80	≤13	PASS
	190	836.6	30.83	25.04	5.79	≤13	PASS
	251	848.8	30.86	25.08	5.78	≤13	PASS
<b>WCDMA Band V (RMC)</b>	4132	826.4	28.10	24.92	3.18	≤13	PASS
	4183	836.6	27.82	24.67	3.15	≤13	PASS
	4233	846.6	27.71	24.68	3.03	≤13	PASS

<b>LTE Band 5</b>								
Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
<b>QPSK</b>	1.4	20407	824.7	29.25	23.71	5.54	≤13	PASS
		20525	836.5	29.13	23.69	5.44	≤13	PASS
		20643	848.3	28.36	23.68	4.68	≤13	PASS
	3	20415	825.5	29.27	23.74	5.53	≤13	PASS
		20525	836.5	29.19	23.77	5.42	≤13	PASS
		20635	847.5	28.49	23.72	4.77	≤13	PASS
	5	20425	826.5	29.27	23.70	5.57	≤13	PASS
		20525	836.5	29.20	23.77	5.43	≤13	PASS
		20625	846.5	28.64	23.76	4.88	≤13	PASS
	10	20450	829	28.95	23.48	5.47	≤13	PASS
		20525	836.5	28.84	23.43	5.41	≤13	PASS
		20600	844	28.67	23.45	5.22	≤13	PASS
<b>16QAM</b>	1.4	20407	824.7	29.18	22.72	6.46	≤13	PASS
		20525	836.5	28.95	22.70	6.25	≤13	PASS
		20643	848.3	28.22	22.61	5.61	≤13	PASS
	3	20415	825.5	29.17	22.78	6.39	≤13	PASS
		20525	836.5	28.98	22.73	6.25	≤13	PASS

	5	20635	847.5	28.38	22.81	5.57	≤13	PASS	
		20425	826.5	29.00	22.68	6.32	≤13	PASS	
		20525	836.5	28.96	22.81	6.15	≤13	PASS	
	10	20625	846.5	28.43	22.69	5.74	≤13	PASS	
		20450	829	28.70	22.44	6.26	≤13	PASS	
		20525	836.5	28.62	22.40	6.22	≤13	PASS	
64QAM	1.4	20600	844	28.50	22.42	6.08	≤13	PASS	
		20407	824.7	28.46	22.07	6.39	≤13	PASS	
		20525	836.5	28.06	22.11	5.95	≤13	PASS	
	3	20643	848.3	27.23	22.09	5.14	≤13	PASS	
		20415	825.5	28.51	22.08	6.43	≤13	PASS	
		20525	836.5	28.19	22.13	6.06	≤13	PASS	
	5	20635	847.5	27.44	22.21	5.23	≤13	PASS	
		20425	826.5	28.41	22.14	6.27	≤13	PASS	
		20525	836.5	28.11	22.11	6.00	≤13	PASS	
	10	20625	846.5	27.53	22.15	5.38	≤13	PASS	
		20450	829	28.10	21.87	6.23	≤13	PASS	
		20525	836.5	27.96	21.84	6.12	≤13	PASS	
			20600	844	27.82	21.80	6.02	≤13	PASS

## 5.5. Frequency Stability

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Method of Measurement

#### Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from 0°C to +35°C in 10°C step size,

(1) With all power removed, the temperature was decreased to 0°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.


(3) Repeat the above measurements at 10°C increments from 0°C to +35°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements. Frequency Stability (Voltage Variation)

The frequency stability shall be measured with variation of primary supply voltage as follows:

**Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.60 V and 4.45 V, with a nominal voltage of 3.87V.

### Test setup

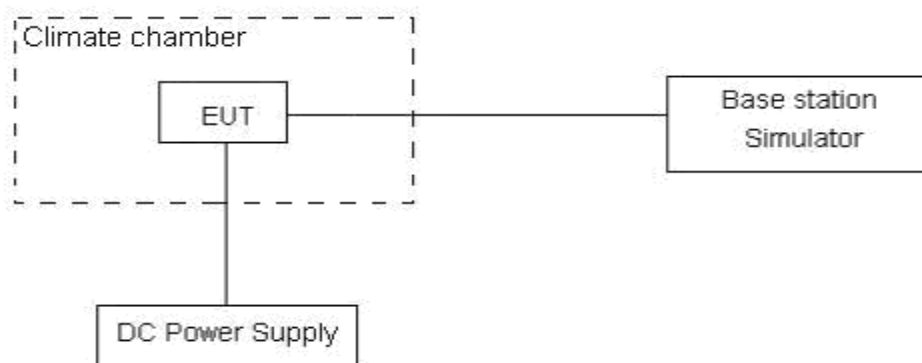

### Limits

According to the Sec. 22.355, the frequency stability of the carrier shall be accurate to within 2.5 ppm of the received frequency for mobile stations.

Limits	≤ 2.5 ppm
--------	-----------

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor  $k = 3$ ,  $U = 0.01\text{ppm}$ .



**Test Result**

GSM 850							
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict	
Temperature	Voltage	GMSK	8PSK	GMSK	8PSK		
Normal (25°C)	Normal	1.68	12.10	0.00201	0.01447	PASS	
Extreme (35°C)		16.90	13.11	0.02020	0.01567	PASS	
Extreme (30°C)		9.23	1.59	0.01103	0.00190	PASS	
Extreme (20°C)		1.53	11.38	0.00183	0.01361	PASS	
Extreme (10°C)		2.04	9.02	0.00244	0.01078	PASS	
Extreme (0°C)		12.04	8.77	0.01439	0.01048	PASS	
25°C	LV	10.70	4.03	0.01279	0.00482	PASS	
	HV	12.83	17.14	0.01533	0.02048	PASS	

WCDMA Band V							
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict	
Temperature	Voltage	BPSK	QPSK	BPSK	QPSK		
Normal (25°C)	Normal	9.85	1.88	0.01178	0.00224	PASS	
Extreme (35°C)		13.75	12.48	0.01644	0.01492	PASS	
Extreme (30°C)		7.64	14.59	0.00913	0.01744	PASS	
Extreme (20°C)		3.10	3.01	0.00370	0.00360	PASS	
Extreme (10°C)		4.35	12.02	0.00520	0.01437	PASS	
Extreme (0°C)		16.84	4.26	0.02013	0.00509	PASS	
25°C	LV	10.96	11.33	0.01310	0.01354	PASS	
	HV	6.32	17.26	0.00756	0.02064	PASS	

LTE Band 5								
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	1.4MHz							
Temperature	Voltage	64QAM	16QAM	QPSK	64QAM	16QAM	QPSK	
Normal (25°C)	Normal	10.59	17.32	9.07	0.01266	0.02070	0.01084	PASS
Extreme (35°C)		16.17	10.62	2.75	0.01932	0.01269	0.00329	PASS
Extreme (30°C)		3.84	3.69	14.15	0.00459	0.00441	0.01691	PASS
Extreme (20°C)		3.57	17.59	14.90	0.00427	0.02102	0.01781	PASS
Extreme (10°C)		2.73	1.43	8.83	0.00327	0.00171	0.01055	PASS
Extreme (0°C)		3.01	12.17	16.60	0.00360	0.01455	0.01984	PASS

25°C	LV	1.42	6.58	9.76	0.00169	0.00787	0.01167	PASS
	HV	4.28	4.37	7.39	0.00512	0.00523	0.00883	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	3MHz							
Temperature	Voltage	64QAM	16QAM	QPSK	64QAM	16QAM	QPSK	
Normal (25°C)	Normal	2.07	15.11	10.29	0.00247	0.01806	0.01230	PASS
Extreme (35°C)		17.22	3.14	6.23	0.02058	0.00376	0.00745	PASS
Extreme (30°C)		7.71	7.71	4.33	0.00922	0.00922	0.00517	PASS
Extreme (20°C)		4.59	6.73	16.37	0.00549	0.00805	0.01957	PASS
Extreme (10°C)		6.34	2.41	1.21	0.00758	0.00288	0.00145	PASS
Extreme (0°C)		5.79	15.47	12.44	0.00692	0.01850	0.01487	PASS
25°C	LV	11.11	13.08	11.89	0.01328	0.01564	0.01422	PASS
	HV	4.27	1.28	12.21	0.00511	0.00153	0.01459	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	5MHz							
Temperature	Voltage	64QAM	16QAM	QPSK	64QAM	16QAM	QPSK	
Normal (25°C)	Normal	11.34	12.83	4.43	0.01356	0.01533	0.00529	PASS
Extreme (35°C)		17.74	13.58	15.76	0.02121	0.01623	0.01884	PASS
Extreme (30°C)		14.82	7.80	2.88	0.01771	0.00933	0.00344	PASS
Extreme (20°C)		10.54	12.30	13.46	0.01260	0.01471	0.01610	PASS
Extreme (10°C)		9.38	9.10	15.88	0.01122	0.01088	0.01898	PASS
Extreme (0°C)		16.46	14.40	3.75	0.01967	0.01721	0.00448	PASS
25°C	LV	15.81	7.25	1.49	0.01889	0.00867	0.00179	PASS
	HV	1.84	1.39	14.03	0.00220	0.00166	0.01677	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	10MHz							
Temperature	Voltage	64QAM	16QAM	QPSK	64QAM	16QAM	QPSK	
Normal (25°C)	Normal	4.68	1.21	17.16	0.00560	0.00145	0.02051	PASS
Extreme (35°C)		18.00	3.51	6.21	0.02152	0.00420	0.00743	PASS
Extreme (30°C)		14.16	8.73	4.14	0.01692	0.01043	0.00495	PASS
Extreme (20°C)		12.47	13.16	16.15	0.01490	0.01574	0.01931	PASS
Extreme (10°C)		11.50	4.45	14.20	0.01375	0.00532	0.01698	PASS
Extreme (0°C)		3.13	5.37	1.43	0.00375	0.00642	0.00171	PASS
25°C	LV	5.41	6.26	15.21	0.00646	0.00748	0.01818	PASS
	HV	3.05	17.84	6.63	0.00364	0.02132	0.00792	PASS

## 5.6. Spurious Emissions at Antenna Terminals

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 9kHz to the 10th harmonic of the carrier.

The peak detector is used. RBW are set to 100 kHz and VBW are set to 300 kHz for below 1G, RBW are set to 1MHz and VBW are set to 3MHz for above 1G, Sweep is set to ATUO.

RBW is set to 1 kHz (0.009MHz~ 0.15 MHz),


RBW is set to 10 kHz (0.15 MHz~ 30 MHz)

RBW is set to 100 kHz (30MHz~1000 MHz)

RBW is set to 1000 kHz (above 1000MHz)

The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

### Test setup

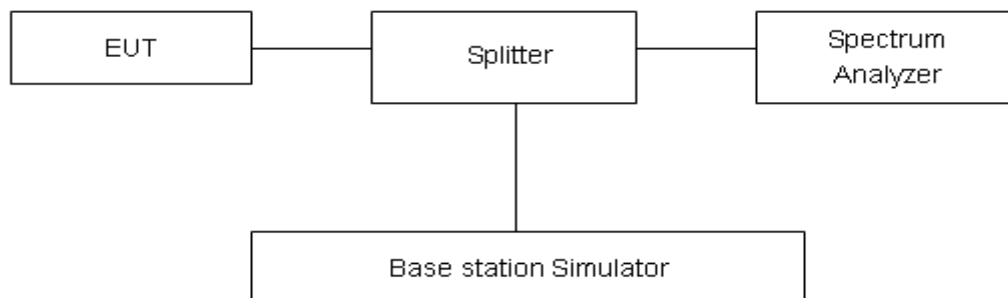

### Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log (P) dB.”

Limit	-13 dBm

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .


Frequency	Uncertainty
9kHz-1GHz	0.684 dB
1GHz-20GHz	1.407 dB

**Test Result**


Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions more than 20 dB below the limit are not reported.

The signal beyond the limit is carrier.


GSM 850 CH-Low 9kHz ~ 20GHz

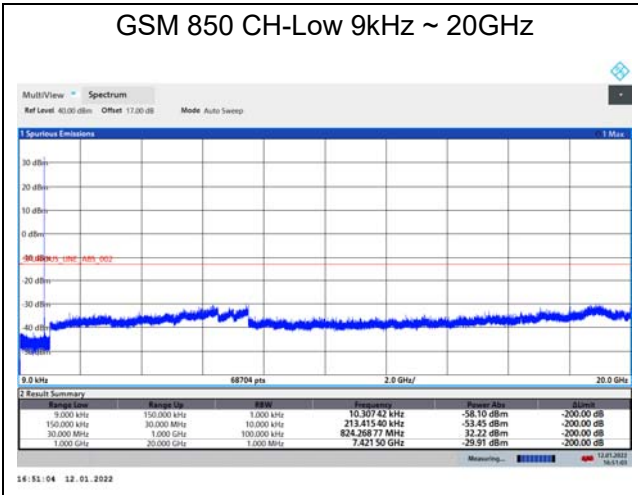


GPRS 850 CH-Low 9kHz ~ 20GHz

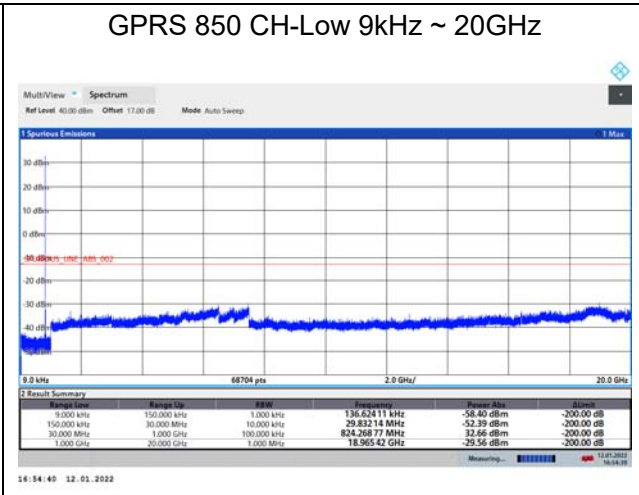


GSM 850 CH-Middle 9kHz ~ 20GHz

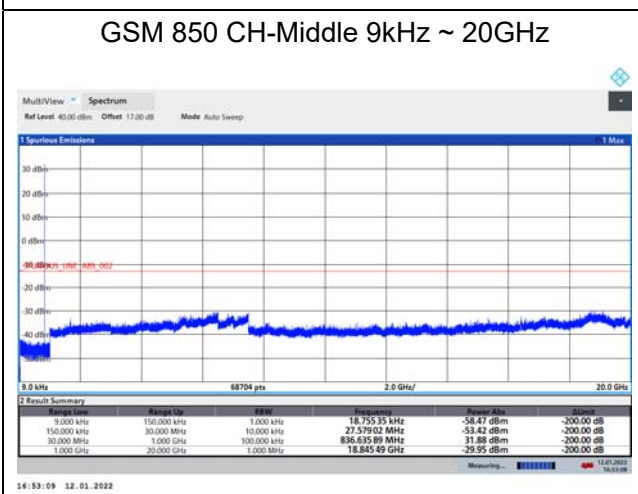


GPRS 850 CH-Middle 9kHz ~ 20GHz

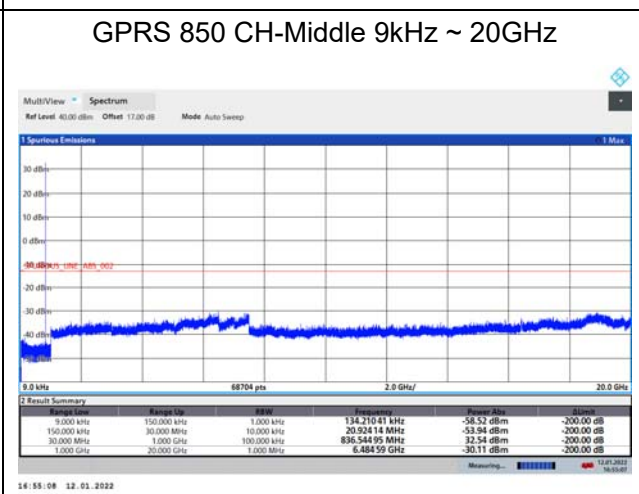


GSM 850 CH-High 9kHz ~ 20GHz

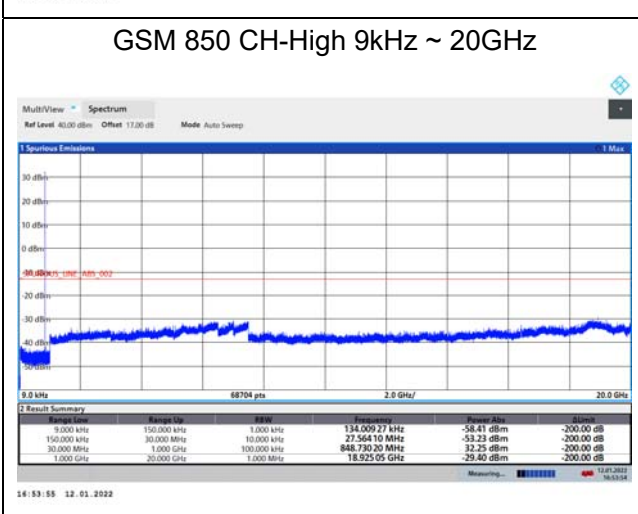


GPRS 850 CH-High 9kHz ~ 20GHz

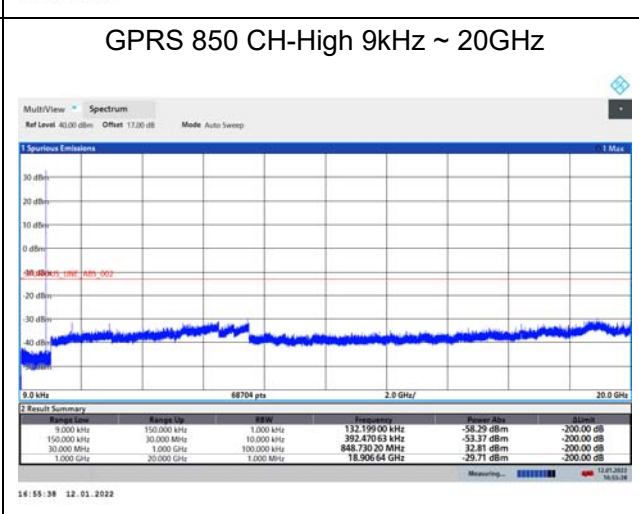


### EGPRS 850 CH-Low 9kHz ~ 20GHz

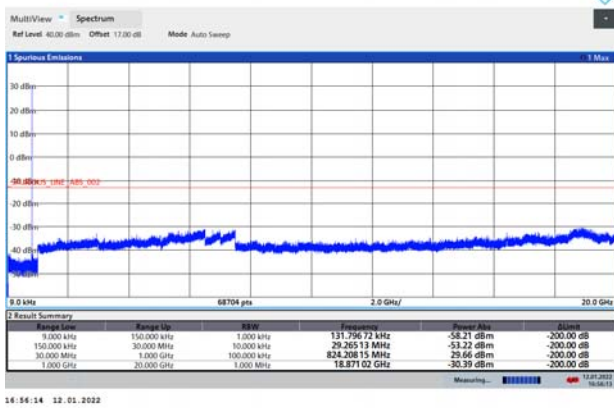


### WCDMA BAND V CH-Low 9kHz ~ 20GHz

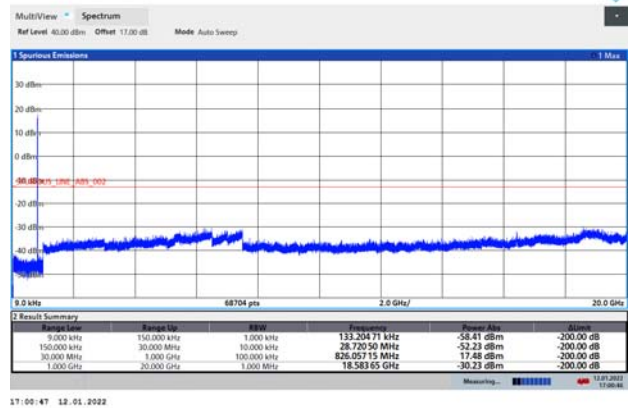


### EGPRS 850 CH-Middle 9kHz ~ 20GHz

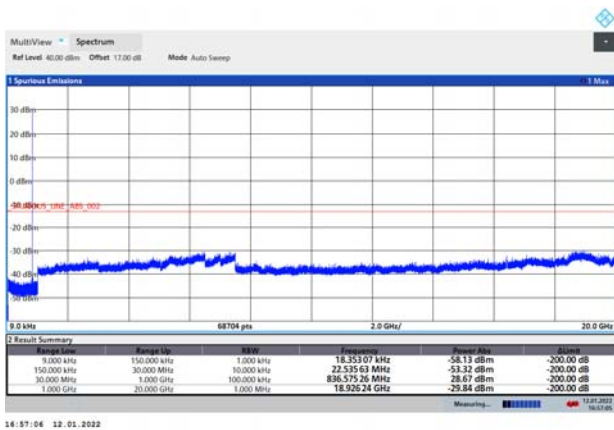


### WCDMA BAND V CH-Middle 9kHz ~ 20GHz

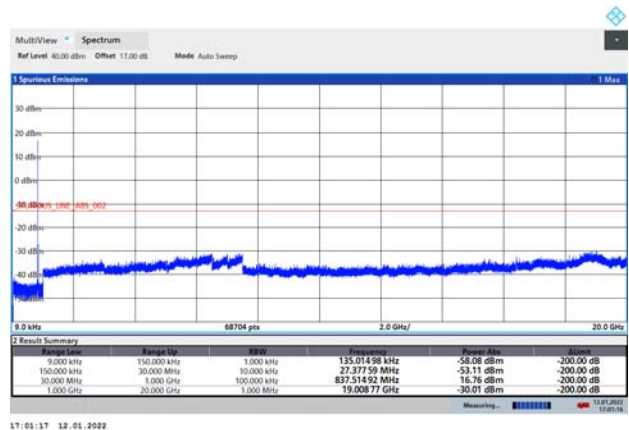


### EGPRS 850 CH-High 9kHz ~ 20GHz

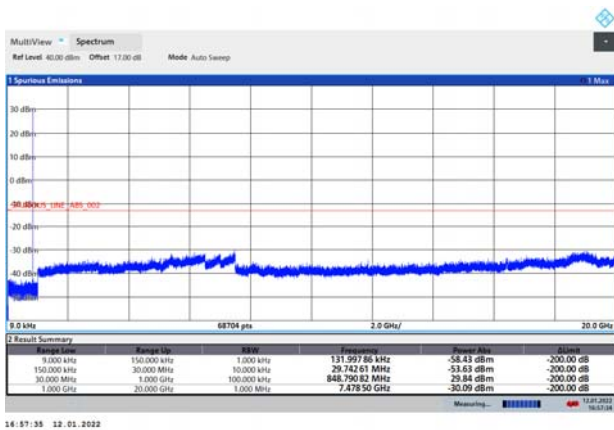


### WCDMA BAND V CH-High 9kHz ~ 20GHz

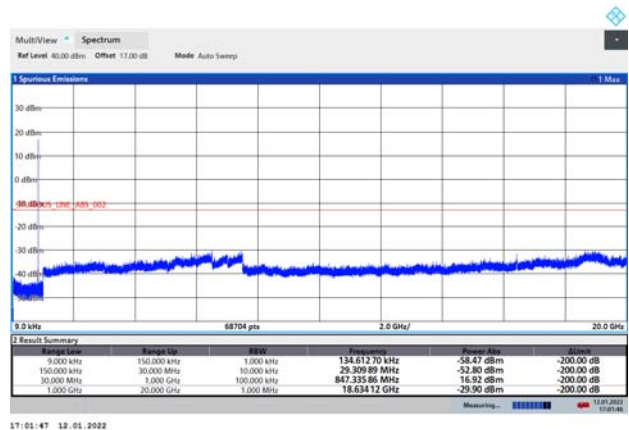


LTE Band 5 1.4MHz CH-Low 9kHz~10GHz

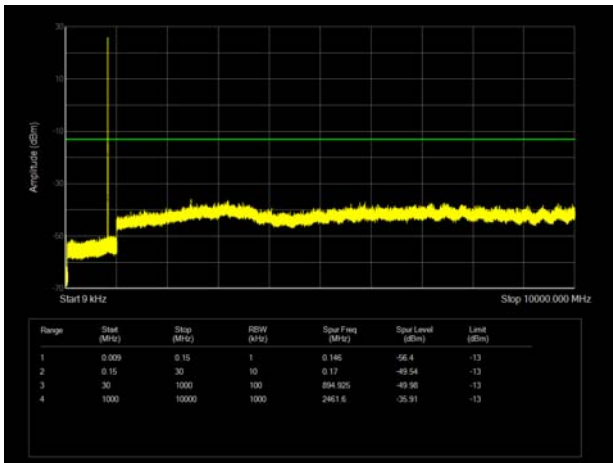


LTE Band 5 3MHz CH-Low 9kHz~10GHz

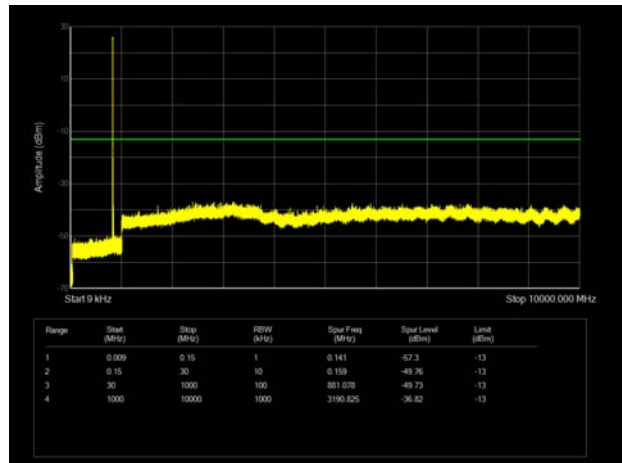


LTE Band 5 1.4MHz CH-Middle 9kHz~10GHz

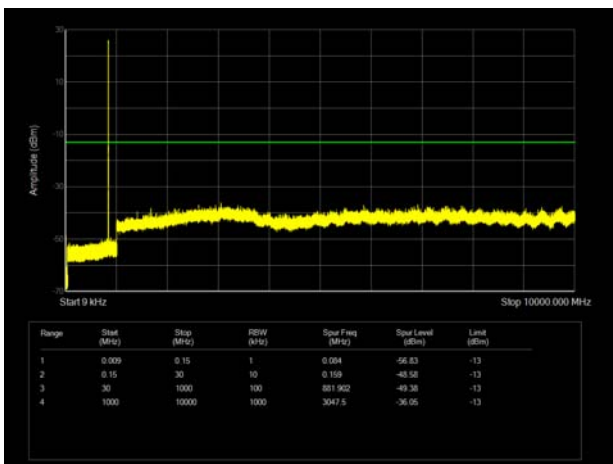


LTE Band 5 3MHz CH-Middle 9kHz~10GHz

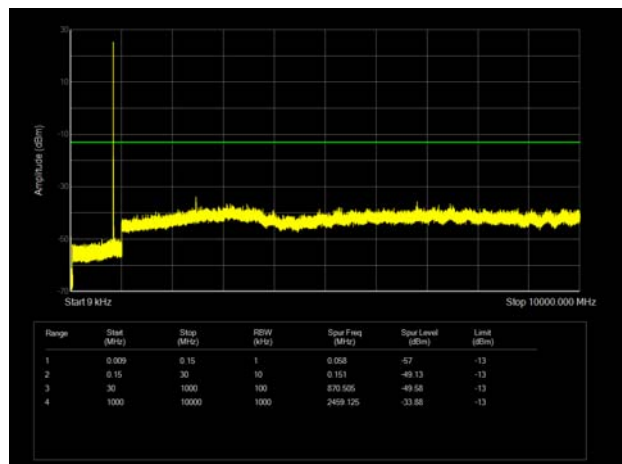


LTE Band 5 1.4MHz CH-High 9kHz~10GHz

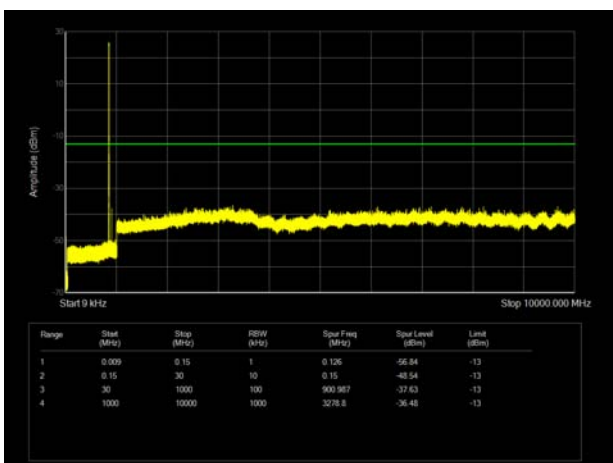


LTE Band 5 3MHz CH-High 9kHz~10GHz

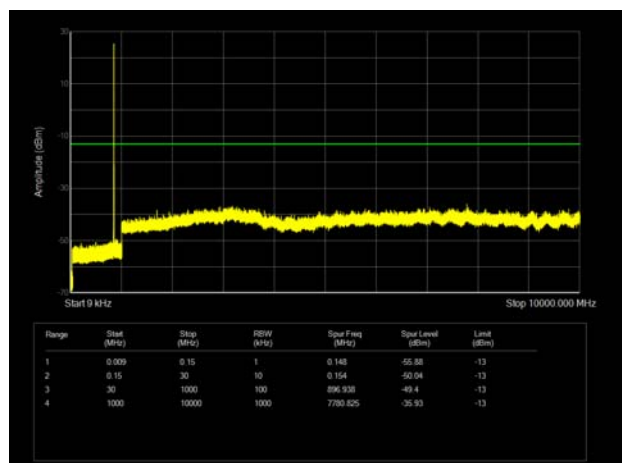


LTE Band 5 5MHz CH-Low 9kHz~10GHz

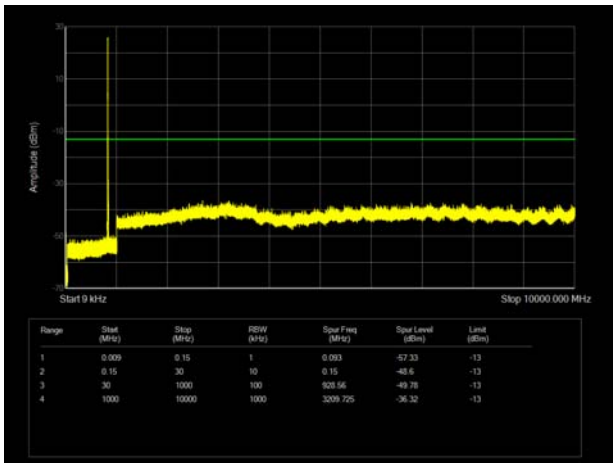


LTE Band 5 10MHz CH-Low 9kHz~10GHz

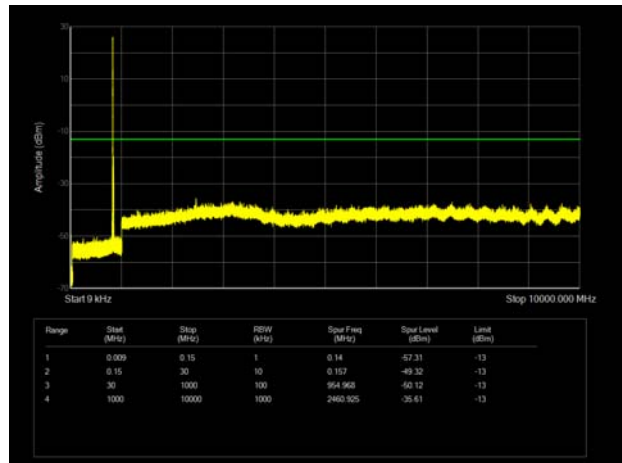


LTE Band 5 5MHz CH-Middle 9kHz~10GHz

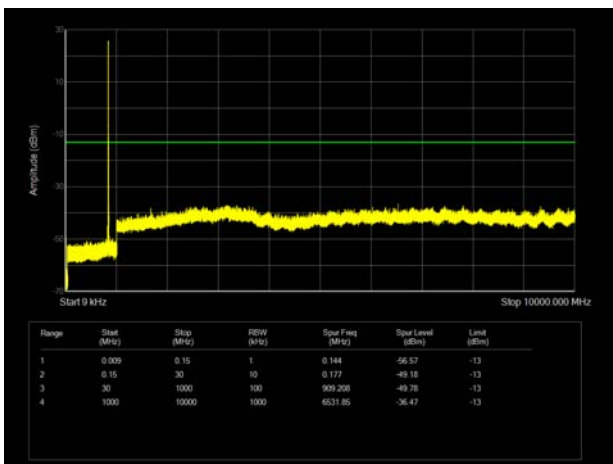


LTE Band 5 10MHz CH-Middle 9kHz~10GHz

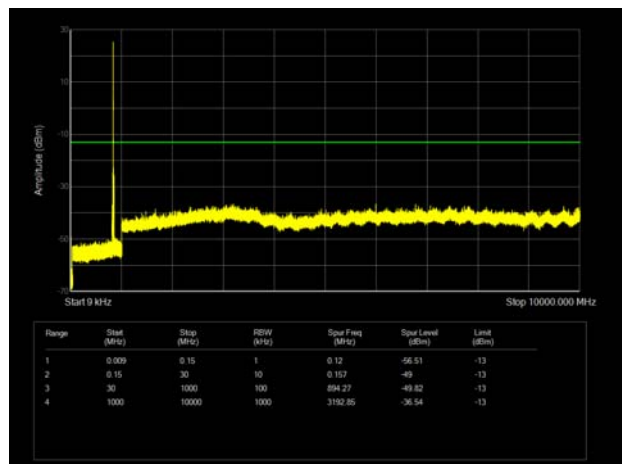

LTE Band 5 5MHz CH-High 9kHz~10GHz

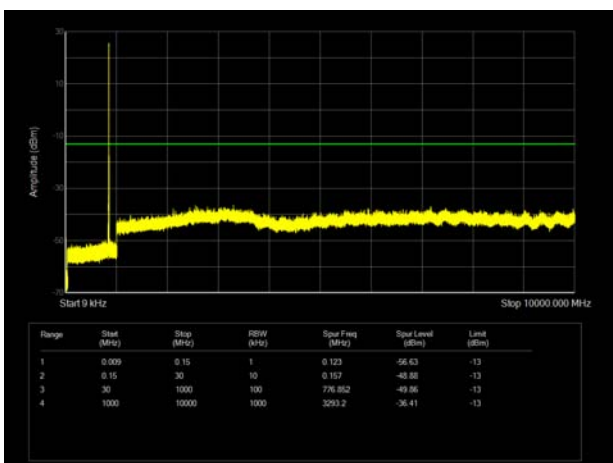

LTE Band 5 10MHz CH-High 9kHz~10GHz

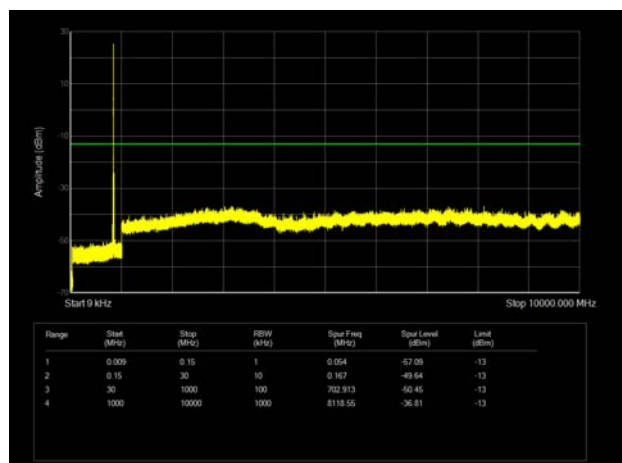

## 5.7. Radiates Spurious Emission

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Method of Measurement

1. The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26 (2015).
2. Below 1GHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A loop antenna, A log-periodic antenna or horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=100kHz, VBW=300kHz for 30MHz to 1GHz and RBW=1MHz, VBW=3MHz for above 1GHz, and the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl), the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
7. The measurement results are obtained as described below:  

$$\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} + \text{Ga}$$
 The measurement results are amend as described below:  

$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$
8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dB) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP




= EIRP-2.15dB.


The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

**Test setup**


**9KHz ~ 30MHz**

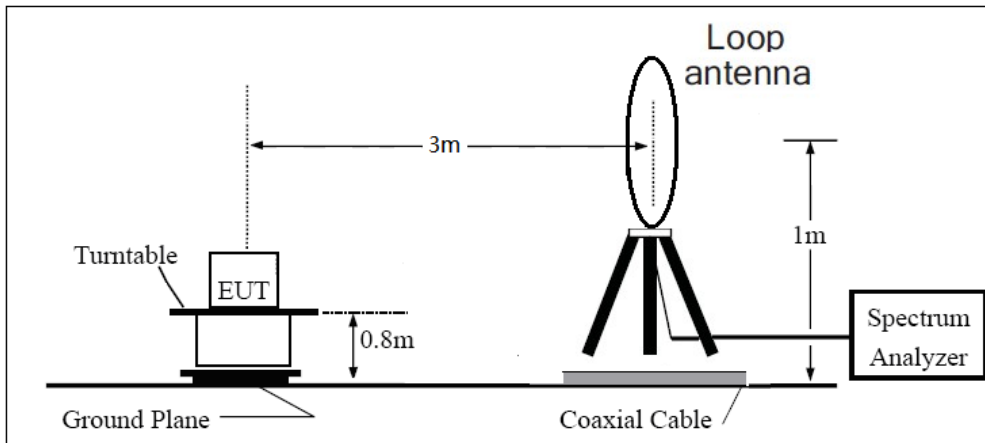

**30MHz ~ 1GHz**

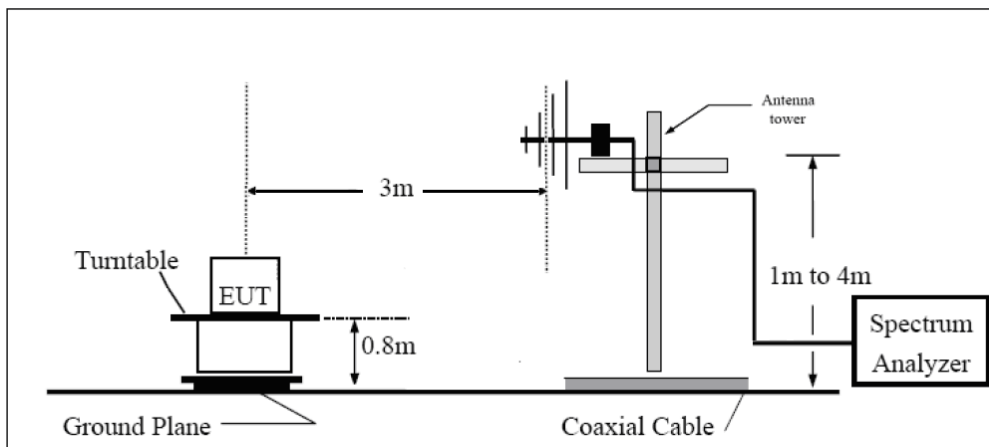

**Above 1GHz**

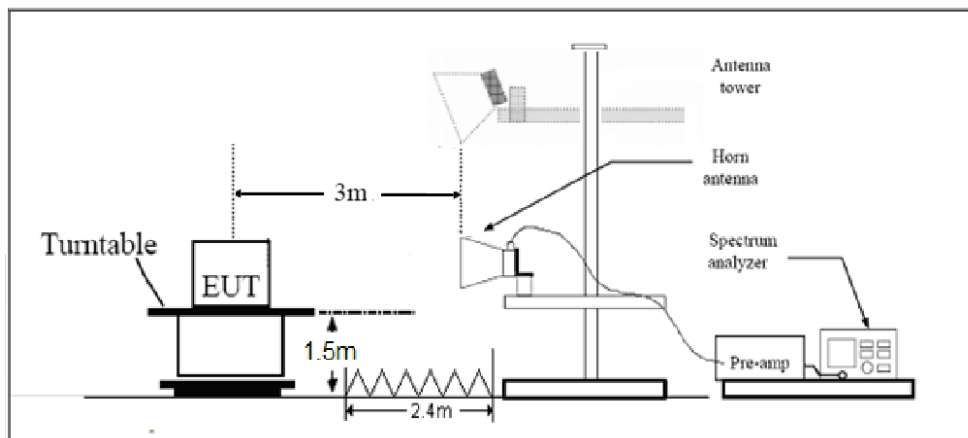

Note: Area side:2.4mX3.6m

### Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB.”

Limit	-13 dBm
-------	---------

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ ,  $U = 3.55$  dB.

**Test Result**

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions below the noise floor will not be recorded in the report.

**Main Antenna**

GSM 850 CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1672.50	-67.80	1.70	8.70	Horizontal	-62.95	-13.00	49.95	0
3	2509.90	-61.34	2.30	12.00	Horizontal	-53.79	-13.00	40.79	45
4	3346.40	-65.78	2.70	12.70	Horizontal	-57.93	-13.00	44.93	180
5	4183.00	-63.04	3.00	12.50	Horizontal	-55.69	-13.00	42.69	90
6	5019.60	-59.37	3.40	12.50	Horizontal	-52.42	-13.00	39.42	315
7	5856.20	-60.70	3.40	12.80	Horizontal	-53.45	-13.00	40.45	225
8	6692.80	-57.18	4.10	11.50	Horizontal	-51.93	-13.00	38.93	90
9	7529.40	-54.65	4.20	12.20	Horizontal	-48.80	-13.00	35.80	135
10	8366.00	-55.60	4.30	12.50	Horizontal	-49.55	-13.00	36.55	315

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2.The worst emission was found in the antenna is Horizontal position.

**WCDMA Band V CH-Middle**

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.20	-69.69	1.70	8.70	Horizontal	-64.84	-13.00	51.84	45
3	2509.80	-66.89	2.30	12.00	Horizontal	-59.34	-13.00	46.34	225
4	3346.40	-65.87	2.70	12.70	Horizontal	-58.02	-13.00	45.02	0
5	4183.00	-62.42	3.00	12.50	Horizontal	-55.07	-13.00	42.07	270
6	5019.60	-60.40	3.40	12.50	Horizontal	-53.45	-13.00	40.45	135
7	5856.20	-60.58	3.40	12.80	Horizontal	-53.33	-13.00	40.33	270
8	6692.80	-57.19	4.10	11.50	Horizontal	-51.94	-13.00	38.94	45
9	7529.40	-54.97	4.20	12.20	Horizontal	-49.12	-13.00	36.12	315
10	8366.00	-55.61	4.30	12.50	Horizontal	-49.56	-13.00	36.56	270

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2.The worst emission was found in the antenna is Horizontal position.

**LTE Band 5 1.4MHz CH-Middle**

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.00	-64.83	1.70	8.70	Horizontal	-59.98	-13.00	46.98	225
3	2509.50	-63.83	2.30	12.00	Horizontal	-56.28	-13.00	43.28	45
4	3346.00	-66.01	2.70	12.70	Horizontal	-58.16	-13.00	45.16	90
5	4182.50	-61.86	3.00	12.50	Horizontal	-54.51	-13.00	41.51	180
6	5019.00	-59.75	3.40	12.50	Horizontal	-52.80	-13.00	39.80	270
7	5855.50	-58.81	3.40	12.80	Horizontal	-51.56	-13.00	38.56	270
8	6692.00	-57.83	4.10	11.50	Horizontal	-52.58	-13.00	39.58	270
9	7528.50	-55.85	4.20	12.20	Horizontal	-50.00	-13.00	37.00	45
10	8365.00	-56.00	4.30	12.50	Horizontal	-49.95	-13.00	36.95	135

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2.The worst emission was found in the antenna is Horizontal position.

**LTE Band 5 5MHz CH-Middle**

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1668.60	-65.40	1.70	8.70	Horizontal	-60.55	-13.00	47.55	135
3	2503.30	-64.43	2.30	12.00	Horizontal	-56.88	-13.00	43.88	90
4	3466.20	-65.21	2.70	12.70	Horizontal	-57.36	-13.00	44.36	0
5	4215.90	-63.54	3.00	12.50	Horizontal	-56.19	-13.00	43.19	135
6	5165.60	-57.85	3.40	12.50	Horizontal	-50.90	-13.00	37.90	0
7	5815.30	-58.89	3.40	12.80	Horizontal	-51.64	-13.00	38.64	315
8	6765.00	-59.05	4.10	11.50	Horizontal	-53.80	-13.00	40.80	0
9	7614.70	-56.55	4.20	12.20	Horizontal	-50.70	-13.00	37.70	0
10	8464.40	-56.14	4.30	12.50	Horizontal	-50.09	-13.00	37.09	180

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2.The worst emission was found in the antenna is Horizontal position.

**LTE Band 5 10MHz CH-Middle**

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1664.40	-65.53	1.70	8.70	Horizontal	-60.68	-13.00	47.68	225
3	2496.60	-65.21	2.30	12.00	Horizontal	-57.66	-13.00	44.66	90
4	3346.00	-65.68	2.70	12.70	Horizontal	-57.83	-13.00	44.83	135
5	4182.50	-62.24	3.00	12.50	Horizontal	-54.89	-13.00	41.89	315
6	5019.00	-58.23	3.40	12.50	Horizontal	-51.28	-13.00	38.28	0
7	5855.50	-58.45	3.40	12.80	Horizontal	-51.20	-13.00	38.20	180
8	6692.00	-57.51	4.10	11.50	Horizontal	-52.26	-13.00	39.26	270
9	7528.50	-55.85	4.20	12.20	Horizontal	-50.00	-13.00	37.00	135
10	8365.00	-55.82	4.30	12.50	Horizontal	-49.77	-13.00	36.77	180

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.

## 6. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMW500	113645	2021-05-15	2022-05-14
Climate Chamber	Weiss	VT4002	58226119450 010	2021-05-15	2022-05-14
Spectrum Analyzer	Keysight	N9020A	MY52330084	2021-05-15	2022-05-14
Universal Radio Communication Tester	Key sight	E5515C	GB44400275	2021-05-15	2022-05-14
Signal Analyzer	R&S	FSV3030	101411	2021-12-12	2022-12-12
Signal Analyzer	R&S	FSV30	100815	2021-12-12	2022-12-11
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	01439	2021-06-30	2024-06-29
Horn Antenna	Schwarzbeck	BBHA 9120D	01799	2019-09-21	2022-09-20
Software	R&S	EMC32	9.26.0	/	/

\*\*\*\*\*END OF REPORT \*\*\*\*\*

## ANNEX A: The EUT Appearance

The EUT Appearance are submitted separately.

## **ANNEX B: Test Setup Photos**

The Test Setup Photos are submitted separately.



## **ANNEX C: Product Change Description**

The Product Change Description are submitted separately.