



EMC TEST REPORT

Report No.: 20231017G14486X-W1

Product Name: Thermal Imaging Scope

Model No. : TP25 SE, TL35 SE, TL25 SE

Applicant: IRay Technology Co., Ltd

Address: 11GUIYANG STREET, YANTAI ECONOMY AND TECHNOLOGY DEVELOPMENT DISTRICT, YANTAI SHANDONG P.R.CHINA.

Received Date: 2023.10.31

Dates of Testing: 2023.11.11—2023.11.13

Issued by: CCIC Southern Testing Co., Ltd.

Lab Location: Electronic Testing Building, No. 43 Shahe Road, Xili Street,
Nanshan District, Shenzhen, Guangdong, China.

Tel: 86 755 26627338 **Fax:** 86 755 26627238

This test report consists of **18** pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Test Report

Product Name..... Thermal Imaging Scope

Model No. TP25 SE,TL35 SE,TL25 SE

Trade name..... InfiRay

Brand Name..... InfiRay

Applicant..... IRay Technology Co.,Ltd

Applicant Address..... 11GUIYANG STREET, YANTAI ECONOMY AND TECHNOLOGY DEVELOPMENT DISTRICT, YANTAI SHANDONG P.R.CHINA.

Manufacturer IRay Technology Co.,Ltd

Manufacturer Address 11GUIYANG STREET, YANTAI ECONOMY AND TECHNOLOGY DEVELOPMENT DISTRICT, YANTAI SHANDONG P.R.CHINA.

Test Standards..... 47 CFR Part 15 Subpart B

Test Result..... PASS

Tested by Ruihong Xie
Ruihong Xie Test Engineer 2023.12.05

Reviewed by Chris You
Chris You Senior Engineer 2023.12.05

Approved by Yang Fan
Yang Fan, Manager 2023.12.05



TABLE OF CONTENTS

- 1. GENERAL INFORMATION4**
- 1.1 EUT Description4**
- 1.2 Test Standards and Results5**
- 1.3 Facilities and Accreditations6**
- 1.3.1 Facilities6
- 1.3.2 Test Environment Conditions6
- 1.3.3 Measurement Uncertainty6
- 2. TEST CONDITIONS SETTING7**
- 2.1 Test Peripherals7**
- 2.2 Test Mode7**
- 2.3 Test Setup and Equipments List8**
- 2.3.1 Conducted Emission8
- 2.3.2 Radiated Emission9
- 47 CFR PART 15B REQUIREMENTS11**
- 2.4 Conducted Emission11**
- 2.4.1 Requirement11
- 2.4.2 Test Description11
- 2.4.3 Test Result11
- 2.5 Radiated Emission14**
- 2.5.1 Requirement14
- 2.5.2 Test Description15
- 2.5.3 Test Result15

Change History		
Issue	Date	Reason for change
1.0	2023.12.05	First edition



1. GENERAL INFORMATION

1.1 EUT Description

EUT Name: Thermal Imaging Scope
Trade Name.....: InfiRay
Brand Name.....: InfiRay
Hardware Version..... : V1.0
Software Version: V0202
Power supply.....: Battery
Brand Name : Large
Model No.: 36AQ517-15
Capacitance: 3150mAh
Rated Voltage: 3.6V
Manufacturer: DONGGUAN LARGE ELECTRONICS CO., LTD.
Ancillary Equipment.....: AC Adapter
Model No.: SK22G-0500200Z
I/p: 100-240V~50/60Hz ,350mA Max
O/p: 5V --- 2000mA
Manufacturer : Make in China by SIMSUKIAN

*Note1:*The EUT is a Tube Series Thermal Imaging Riflescopes;

*Note2 :*For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

Note3 : All modles have the sametechnical construction including circuit diagram, PCB Layout, components and component layout, allelectrical construction and mechanical construction, with TL35 SE,TL25 SE. The main differencebetween the different models lies in the fact that they have been renamed according to customerrequirements.The main modle is TP25 SE.



1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart B:

No.	Identity	Document Title
1	47 CFR Part 15 Subpart B 2018	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result
1	15.107	Conducted Emission	PASS
2	15.109	Radiated Emission	PASS

NOTE:

- (1) The EUT has been tested according to 47 CFR Part 15 Subpart B, Class B. The test procedure is according to ANSI C63.4:2014.



1.3 Facilities and Accreditations

1.3.1 Facilities

FCC-Registration No.: CN1283

CCIC Southern Testing Co., Ltd EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Designation Number: CN1283, valid time is until June 30,2025.

ISED Registration: 11185A-1

CCIC Southern Testing Co., Ltd. EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A-1 on Aug. 04, 2016, valid time is until June 30,2025.

A2LA Code: 5721.01

CCIC-SET is a third party testing organization accredited by A2LA according to ISO/IEC 17025. The accreditation certificate number is 5721.01.

1.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 °C - 35 °C
Relative Humidity (%):	25% -75%
Atmospheric Pressure (kPa):	86kPa-106kPa

1.3.3 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

Uncertainty of Conducted Emission:	Uc = 3.2 dB (k=2)
Uncertainty of Radiated Emission: (30MHz~1GHz)	Uc = 5.8 dB (k=2)
Uncertainty of Radiated Emission: (1~6GHz)	Uc = 5.1 dB (k=2)
Uncertainty of Radiated Emission: (6~18GHz)	Uc = 5.5 dB (k=2)



2. TEST CONDITIONS SETTING

2.1 Test Peripherals

The following is a listing of the EUT and peripherals utilized during the performance of EMC test:

Support Equipment:

Description	Brand name	Model	Serial No.	FCCID
Notebook	ThinkPad	E430C	A131101550	N/A
Mouse	Logitech	M100r	25011051	DOC

Support Cable:

Description	Shield Type	Ferrite Core	Length
PC Power adapter Cable	Un- shielding	No	1.2m
Mouse Cable	Un- shielding	No	1m

2.2 Test Mode

The EUT have the following typical setups during the test:

Setup1:EUT+ Charger

Setup2:EUT+ Battery

Setup3: EUT(USB DATA Transfer) +PC;

Note1: The original report was SET2022-12723, which replaced PCB, changed product name and model number, retested Radiated emission below 1GHz and Conducted emission at AC mains input/output port.


Note2: This product is used in industrial environments and is suitable for CLASS A limits.

Note3: Only worst-case mode setup 1 mode data provide at the report

2.3 Test Setup and Equipments List

2.3.1 Conducted Emission

A. Test Setup:

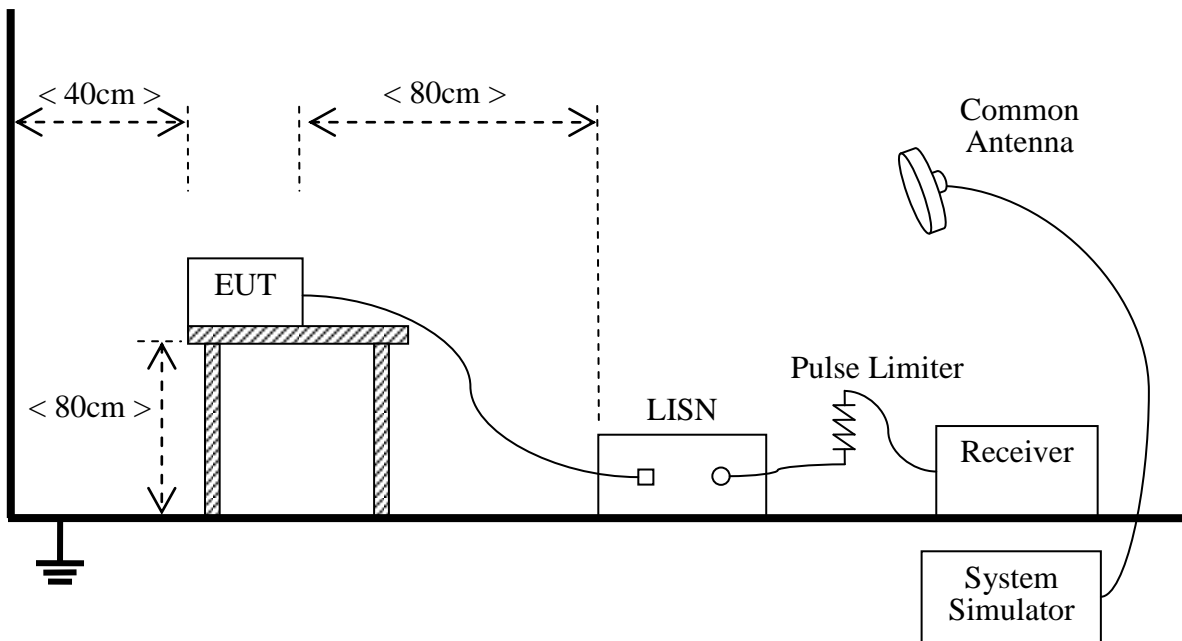

The EUT is placed on a 0.8m high insulating table, which stands on the grounded conducting floor, and keeps 0.4m away from the grounded conducting wall. The EUT is connected to the power mains through a LISN which provides $50\Omega/50\mu\text{H}$ of coupling impedance for the measuring instrument. The Common Antenna is used for the call between the EUT and the System Simulator (SS). A Pulse Limiter is used to protect the measuring instrument. The factors of the whole test system are calibrated to correct the reading.


B. Equipments List:

Description	Manufacturer	Model	Serial No.	Calibration Date	Calibration Due. Date
Test Receiver	KEYSIGHT	N9038A	A141202036	2023.06.13	2024.06.12
LISN	ROHDE&SCHWARZ	ENV216	A140701847	2023.06.09	2024.06.08
Cable	MATCHING PAD	W7	/	2023.08.03	2024.08.02


2.3.2 Radiated Emission

A. Test Setup:

- 1) For radiated emissions from 30MHz to 1GHz

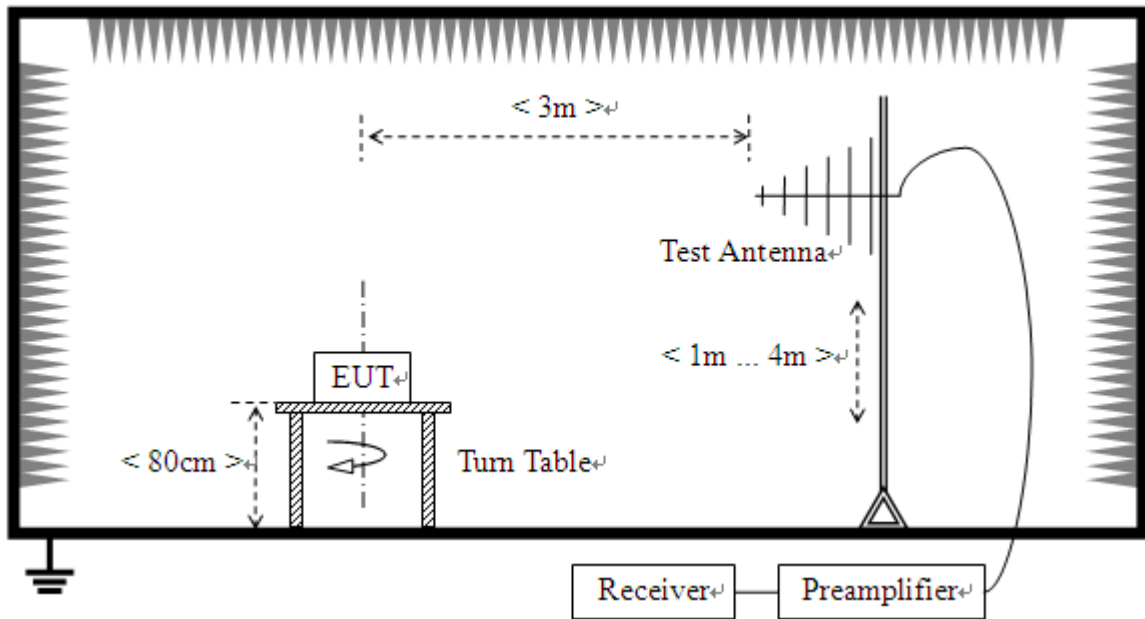

- 2) For radiated emissions above 1GHz

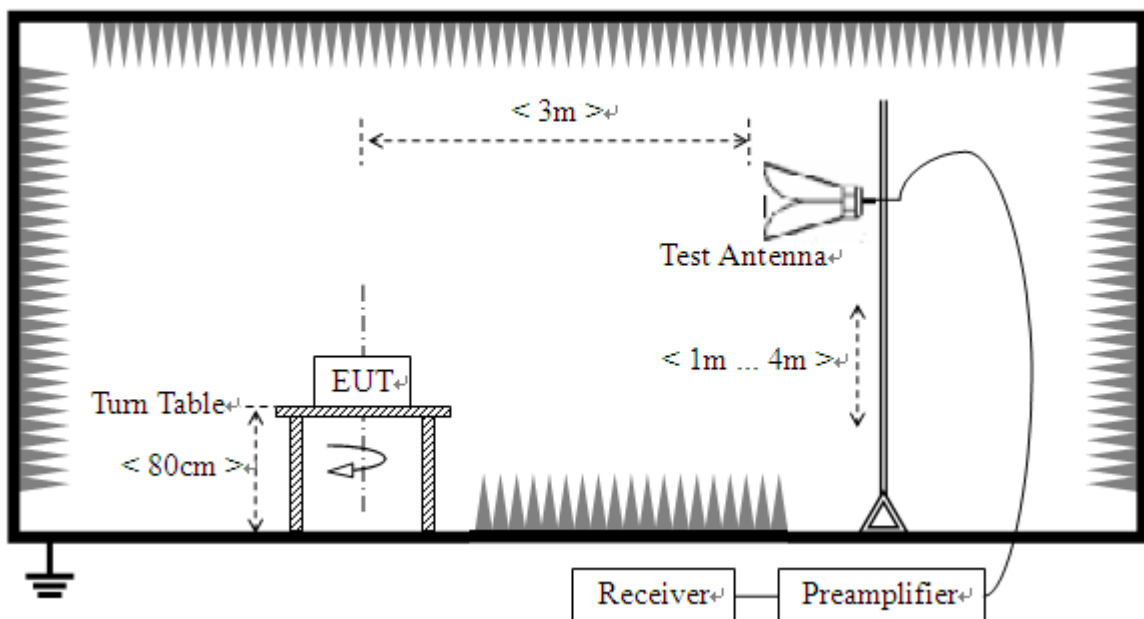

**B. Test Procedure**

The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a variable-height antenna master tower.

For the test Antenna:

- 1) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

C. Equipments List:**Equipments List (Original)**

Description	Manufacturer	Model	Serial No.	Calibration Date	Calibration Due. Date
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	A0902601	2022.05.23	2023.04.17
Broadband Ant.	2786	ETC	A150402239	2021.09.16	2024.03.03
3M Anechoic Chamber	Albatross	SAC-3MAC 9*6*6m	A0412375	2019.03.26	2023.03.25
EMI Test Receiver	ROHDE&SCHWARZ	ESW26	A180502935	2022.07.21	2023.07.20
5M Anechoic Chamber	Albatross	SAC-5MAC 12.8x6.8x6.4m	A0304210	2022.03.25	2023.03.24
EMI Horn Ant.	ROHDE&SCHWARZ	HF906	A0304225	2019.03.25	2023.03.24

Equipments List (New)

Description	Manufacturer	Model	Serial No.	Calibration Date	Calibration Due. Date
EMI Test Receiver	ROHDE&SCHWARZ	ESIB7	A0501375	2023.03.16	2024.03.15
Broadband Ant.	ETC	2786	A150402239	2021.09.16	2024.03.03
3M Anechoic Chamber	Albatross	SAC-3MAC 9*6*6m	A0412375	2021.03.26	2024.03.25
EMI Test Receiver	ROHDE&SCHWARZ	ESW26	A180502935	2023.06.08	2024.06.07
5M Anechoic Chamber	Albatross	SAC-5MAC 12.8x6.8x6.4m	A0304210	2022.03.25	2025.06.07
EMI Horn Ant.	ROHDE&SCHWARZ	HF906	A0304225	2022.04.12	2025.04.11



47 CFR PART 15B REQUIREMENTS

2.4 Conducted Emission

2.4.1 Requirement

According to FCC section 15.107, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.50	79	66
0.50 - 30	73	60

Note:

- The limit subjects to the Class A digital device.
- The lower limit shall apply at the band edges.

2.4.2 Test Description

See section 2.3.1 of this report.

2.4.3 Test Result

The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. All test modes are considered, refer to recorded points and plots below.


Note:

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a Nominal 120V AC,50/60Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.



Test voltage and frequency (120V AC,60Hz)

A. Mains terminal disturbance voltage, L phase, Setup1

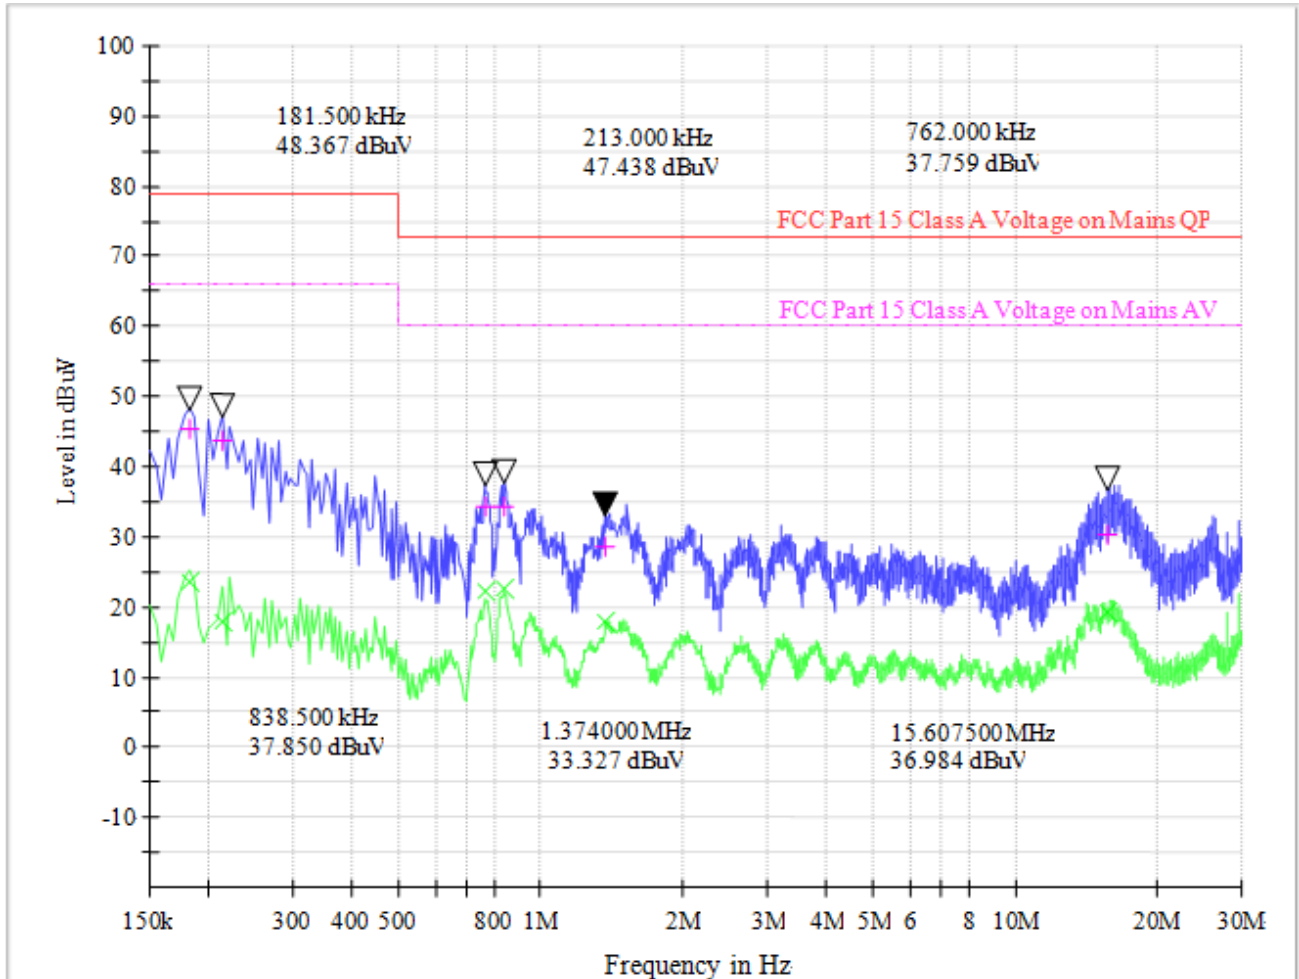


(Plot A: L Phase)

Frequency (MHz)	QuasiPeak (dB μ V)	CAverage (dB μ V)	Cabel Loss (dB)	Corr. (dB)	Margin - QPK	Limit - QPK	Margin - AV	Limit - AV (dB μ V)
0.181500	45.34	23.62	0.1	10.5	33.66	79.0	42.38	66.0
0.213000	43.74	18.02	0.1	10.5	35.26	79.0	47.98	66.0
0.762000	34.22	22.33	0.1	10.4	38.78	73.0	37.67	60.0
0.838500	34.30	22.63	0.2	10.4	38.70	73.0	37.37	60.0
1.374000	28.67	17.77	0.2	10.4	44.33	73.0	42.23	60.0
15.607500	30.22	19.37	0.5	11.2	42.78	73.0	40.63	60.0



B. Mains terminal disturbance voltage, N phase, Setup1

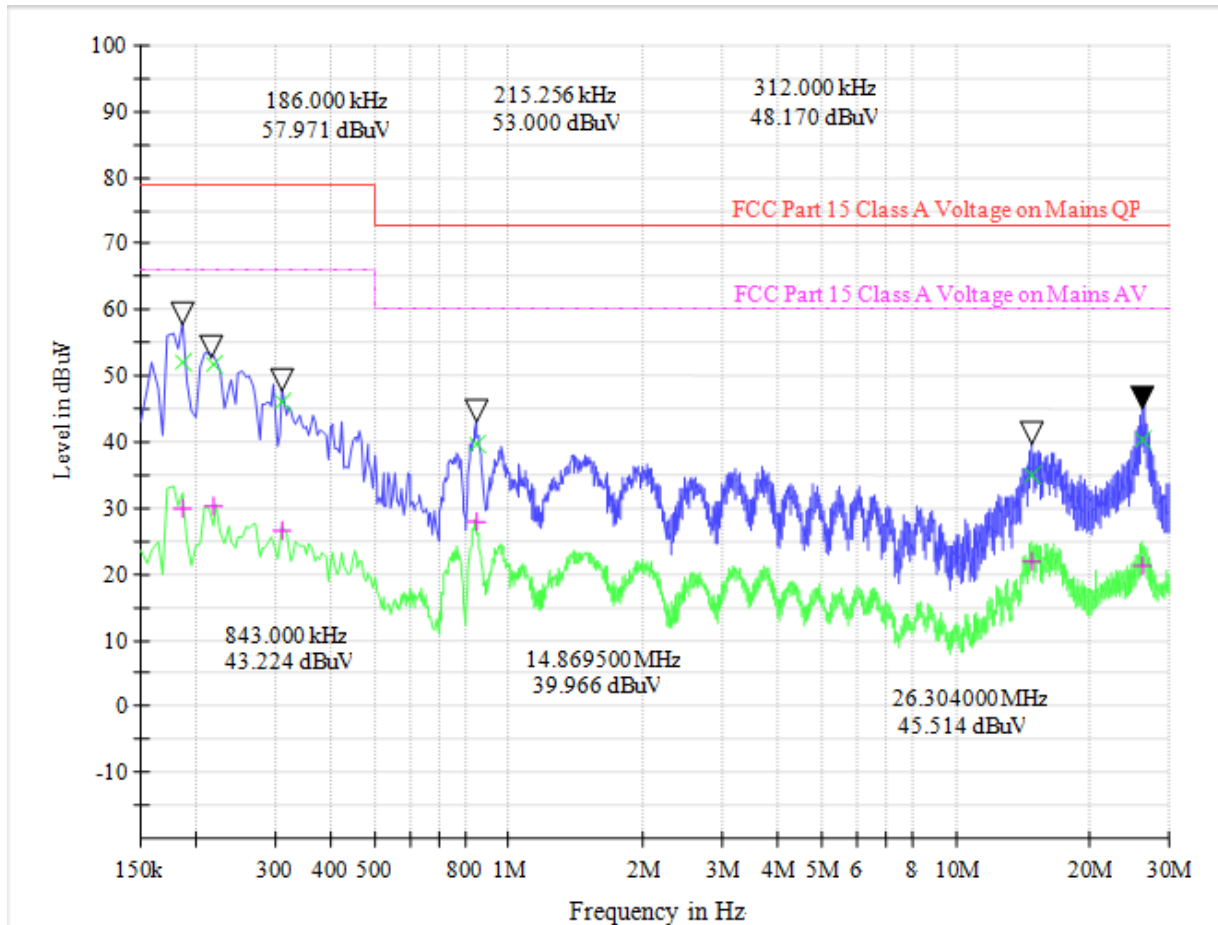

(Plot B: N Phase)

Frequency (MHz)	QuasiPeak (dB μ V)	CAverage (dB μ V)	Cabel Loss (dB)	Corr. (dB)	Margin - QPK	Limit - QPK	Margin - AV	Limit - AV (dB μ V)
0.186000	52.07	30.11	0.1	10.6	26.93	79.0	35.89	66.0
0.217500	51.69	30.21	0.1	10.6	27.31	79.0	35.79	66.0
0.312000	46.16	26.51	0.1	10.6	32.84	79.0	39.49	66.0
0.843000	39.72	28.08	0.1	10.5	33.28	73.0	31.92	60.0
14.869500	35.05	21.96	0.5	11.2	37.95	73.0	38.04	60.0
26.304000	40.46	21.19	0.5	11.5	32.54	73.0	38.81	60.0



2.5 Radiated Emission

2.5.1 Requirement

According to FCC section 15.109, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency range (MHz)	Field Strength	
	dBuV/m	Dist
30.0 - 88.0	50.0	3m
88.0 - 216.0	53.5	3m
216.0 - 960.0	56.0	3m
Above 960.0	64.0	3m

- For frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.
- Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.
- For below 1G :QP detector RBW 120kHz ,VBW 300kHz.
- For Above 1G: PK detector RBW 1MHz,VBW 3MHz for PK value ;AV detector RBW 1MHz, VBW 10Hz for AV value.

Note:

- The tighter limit shall apply at the boundary between two frequency range.
- Limitation expressed in dBuV/m is calculated by $20\log$ Emission Level(uV/m).
- If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula of $Ld1 = Ld2 * (d2/d1)^2$

Example:

F.S Limit at 30m distance is 30uV/m, then F.S Limitation at 3m distance is adjusted as

$$Ld1 = L1 = 30\text{uV/m} * (10)^2 = 100 * 30\text{uV/m}.$$



2.5.2 Test Description

See section 2.3.2 of this report.

2.5.3 Test Result


The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors. Both the vertical and the horizontal polarizations of the Test Antenna are considered to perform the tests. All test modes are considered, refer to recorded points and plots below.

The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

Note: All radiated emission tests were performed in X, Y, Z axis direction, and only the worst axis test condition was recorded in this test report.

A.Radiation disturbances, antenna polarization:Vertical ,Setup3

EMI Sweep-3M(30-1G)

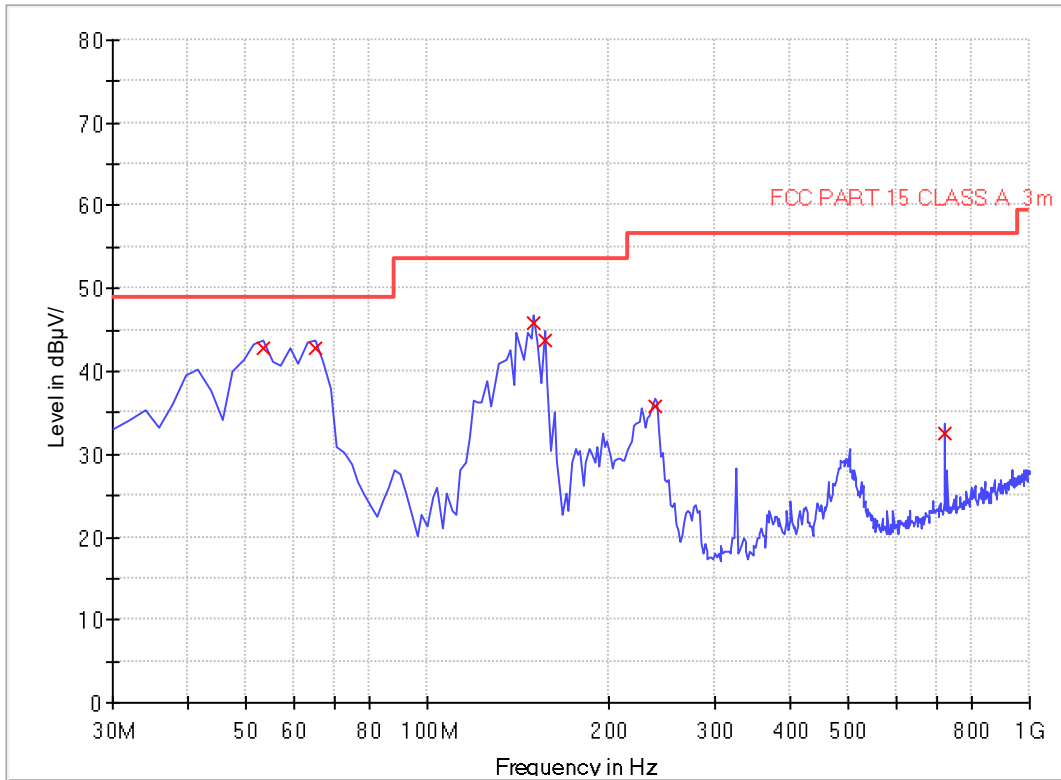


(Plot C: Test Antenna Vertical 30M - 1G)

Frequency (MHz)	QuasiPeak (dBµV/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dBµV/m)	Margin (dB)	Antenna	Cable Loss(dB)	ANT. Factor(dB)	Verdict
53.32	42.79	120.000	102	49.0	6.21	Vertical	0.5	8.3	Pass
65.00	42.70	120.000	106	49.0	6.30	Vertical	0.8	5.1	Pass
150.40	45.89	120.000	102	53.5	7.61	Vertical	1	11.4	Pass
156.36	43.85	120.000	101	53.5	9.65	Vertical	1.2	11.1	Pass
238.00	35.74	120.000	103	56.5	20.76	Vertical	1.2	10.6	Pass
722.04	32.61	120.000	105	56.5	23.89	Vertical	1.8	19.8	Pass



B.Radiation disturbances, antenna polarization: Horizontal , Setup3

EMI Sweep-3M(30-1G)

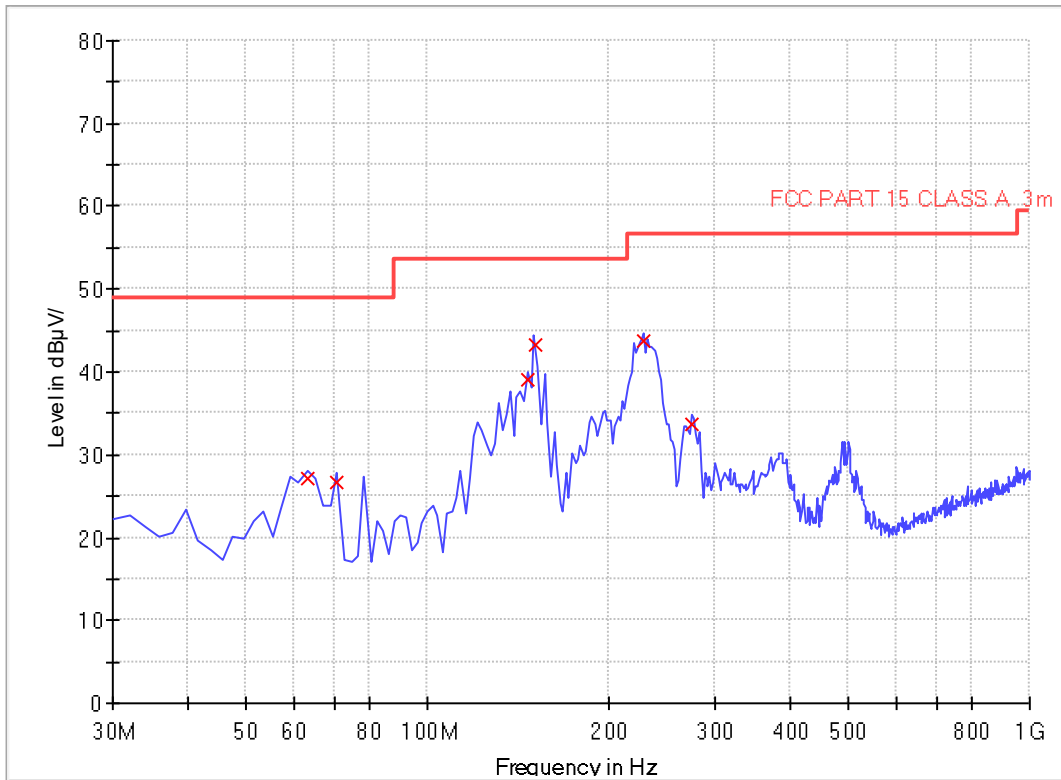

(Plot D: Test Antenna Horizontal 30M - 1G)

Frequency (MHz)	QuasiPeak (dBµV/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dBµV/m)	Margin (dB)	Antenna	Cable Loss(dB)	ANT. Factor(dB)	Verdict
63.08	27.04	120.000	102	49.0	21.96	Horizontal	0.8	5.2	Pass
70.84	26.77	120.000	102	49.0	22.23	Horizontal	0.8	6.1	Pass
146.64	39.05	120.000	107	53.5	14.45	Horizontal	1.0	11.3	Pass
150.56	43.38	120.000	105	53.5	10.12	Horizontal	1.0	11.4	Pass
228.32	43.70	120.000	105	56.5	12.80	Horizontal	1.2	10.3	Pass
274.96	33.76	120.000	103	56.5	22.74	Horizontal	1.2	13.2	Pass

**A.Radiation disturbances, antenna polarization: Horizontal,Setup3**

NO.	Freq. [MHz]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin[dB μ V/m]	Trace	Height [cm]	Angle [°]	Polarity
1	1064.61	37.49	-15.29	79.50	42.01	PK	107	191	Horizontal
2	1873.97	45.12	-12.41	79.50	34.38	PK	132	35	Horizontal
3	2118.82	43.44	-11.56	79.50	36.06	PK	105	341	Horizontal
4	2343.26	42.58	-10.83	79.50	36.92	PK	105	89	Horizontal
5	2611.92	42.99	-9.90	79.50	36.51	PK	106	140	Horizontal
6	5788.15	54.22	-0.33	79.50	25.28	PK	112	121	Horizontal
7	1061.21	33.49	-15.30	59.50	26.01	AV	124	273	Horizontal
8	1829.76	33.89	-12.61	59.50	25.61	AV	109	347	Horizontal
9	2122.22	33.52	-11.55	59.50	25.98	AV	108	162	Horizontal
10	2343.26	34.51	-10.83	59.50	24.99	AV	123	83	Horizontal
11	2564.31	34.10	-10.06	59.50	25.40	AV	120	137	Horizontal
12	5784.75	44.21	-0.34	59.50	15.29	AV	117	121	Horizontal

B.Radiation disturbances, antenna polarization: Vertical, Setup3

NO.	Freq. [MHz]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin[dB μ V/m]	Trace	Height [cm]	Angle [°]	Polarity
1	1870.57	36.83	-12.42	79.50	42.67	PK	104	27	Vertical
2	2152.83	38.74	-11.45	79.50	40.76	PK	118	150	Vertical
3	2441.88	40.83	-10.48	79.50	38.67	PK	109	227	Vertical
4	4754.35	46.11	-0.95	79.50	33.39	PK	114	49	Vertical
5	7971.39	50.35	4.07	79.50	29.15	PK	121	63	Vertical
6	14300.0	52.43	9.89	79.50	27.07	PK	107	82	Vertical
7	1822.96	29.82	-12.64	59.50	29.68	AV	141	70	Vertical
8	2129.02	29.76	-11.53	59.50	29.74	AV	108	242	Vertical
9	2438.48	32.92	-10.50	59.50	26.58	AV	132	26	Vertical
10	4784.95	37.63	-0.87	59.50	21.87	AV	119	115	Vertical
11	8189.03	41.41	4.29	59.50	18.09	AV	126	237	Vertical
12	14354.4	43.86	9.50	59.50	15.64	AV	139	29	Vertical

-----End of Report-----