

## FCC - TEST REPORT

Report Number : **68.950.23.0403.01** Date of Issue: **2023-05-18**

---

Model/HVIN : **G600, GabcX (a, b, c= 0-9, X=A~Z or blank stands for different naming, in order to distinguish lens focal length, Movement resolution)**

---

Product Type : **Uncooled Handheld Thermal Camera for Gas Leak Detection**

---

Applicant : **IRay Technology Co., Ltd.**

---

Address : **11Guiyang Street, YANTAI Economic and Technological, Development Area, 264006 Yantai, PEOPLE'S REPUBLIC OF CHINA**

---

Manufacturer : **IRay Technology Co., Ltd.**

---

Address : **11Guiyang Street, YANTAI Economic and Technological, Development Area, 264006 Yantai, PEOPLE'S REPUBLIC OF CHINA**

---

Factory : **IRay Technology Co., Ltd.**

---

Address : **11Guiyang Street, YANTAI Economic and Technological, Development Area, 264006 Yantai, PEOPLE'S REPUBLIC OF CHINA**

---

Test Result :  **Positive**     **Negative**

---

Total pages including Appendices : **65**

Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4.



# 1 Table of Contents

1	Table of Contents .....	2
2	Details about the Test Laboratory .....	3
3	Description of the Equipment Under Test .....	4
4	Summary of Test Standards .....	5
5	Summary of Test Results .....	6
6	General Remarks .....	7
7	Test Setups .....	8
8	Systems Test Configuration .....	10
9	Technical Requirement .....	11
9.1	Conducted Emission .....	11
9.2	Conducted Peak Output Power & EIRP .....	14
9.3	6dB Bandwidth and 99% Occupied Bandwidth.....	16
9.4	Power Spectral Density .....	25
9.5	Spurious RF Conducted Emissions .....	30
9.6	Band Edge Testing.....	44
9.7	Spurious Radiated Emissions for Transmitter.....	48
10	Test Equipment List.....	64
11	System Measurement Uncertainty .....	65

## 2 Details about the Test Laboratory

### Details about the Test Laboratory

#### Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch  
Building 12 & 13, Zhiheng Wisdomland Business Park, Guankou Erlu,  
Nantou, Nanshan District,  
Shenzhen, Guangdong, China

Telephone: 86 755 8828 6998

Fax: 86 755 8828 5299

FCC Registration No.: 514049

FCC Designation Number: CN5009

IC Registration No.: 10320A

### 3 Description of the Equipment Under Test

Product:	Uncooled Handheld Thermal Camera for Gas Leak Detection
Model no.:	G600, GabcX (a, b, c= 0-9, X=A~Z or blank stands for different naming, in order to distinguish lens focal length, Movement resolution)
Brand name:	InfiRay
FCC ID:	2AYGT-G600
Options and accessories:	Adapter, Battery Charger, and USB Cable
Adapter information:	Model: SK01T8-0500300Z Input: 100-240VAC, 50/60Hz; 0.4A Output: 5.0Vdc, 3.0A (15W)
Battery:	Rechargeable Lithium-ion battery: 3.6VDC 4500mAh 16.2Wh
Battery Charger:	Model: LX042200CH Input: 5VDC; 2A
RF Transmission Frequency:	2412MHz-2462MHz for 802.11b/g/n20 (Wi-Fi)
No. of Operated Channel:	11 for 802.11b/g/n20 (Wi-Fi)
Modulation:	DSSS, OFDM
Antenna Type:	Integrated antenna
Antenna 1	2.5dbi
Description of the EUT:	The Equipment Under Test (EUT) is a Uncooled Handheld Thermal Camera for Gas Leak Detection which support Bluetooth function and Wi-Fi operated at 2.4GHz. Only 2.4GWiFi included in this report.

NOTE 1: The above EUT's information is declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C 10-1-2021 Edition	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators

All the test methods were according to KDB 558074 D01 15.247 Meas Guidance v05r02 Measurement Guidance and ANSI C63.10 (2013).

## 5 Summary of Test Results

Technical Requirements					
FCC Part 15 Subpart C					
Test Condition		Test Site	Test Result		
			Pass	Fail	N/A
§15.207	Conducted emission AC power port	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247 (b) (1)	Conducted peak output power	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
RSS-247 5.4(d)	Equivalent Isotropic Radiated Power	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(a)(2)	6dB bandwidth and 99% Occupied Bandwidth	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(e)	Power spectral density	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(d)	Spurious RF conducted emissions	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(d)	Band edge	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(d) & §15.209 & §15.205	Spurious radiated emissions for transmitter	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.203	Antenna requirement	See note 2	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Note 1: N/A=Not Applicable.

Note 2: The EUT uses an Integrated antenna, which gain are 2.5dBi. In accordance to §15.203 & RSS-Gen 6.8, it is considered sufficiently to comply with the provisions of this section.

## 6 General Remarks

### Remarks

This submittal(s) (test report) is intended for FCC ID: 2AYGT-G600, complies with Section 15.207, 15.209, 15.247 of the FCC Part 15, Subpart C rules.

### SUMMARY:

All tests according to the regulations cited on page 5 were

- Performed

- **Not** Performed

The Equipment Under Test

- **Fulfills** the general approval requirements.

- **Does not** fulfill the general approval requirements.


Sample Received Date: 2023-03-28

Testing Start Date: 2023-03-28

Testing End Date: 2023-05-17



TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch

Reviewed by:

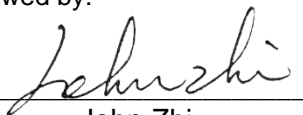

John Zhi  
Project Manager

Prepared by:



Warlen Song  
Project Engineer


Tested by:



Carry Cai  
Test Engineer


## 7 Test Setups

### 7.1 AC Power Line Conducted Emission test setups

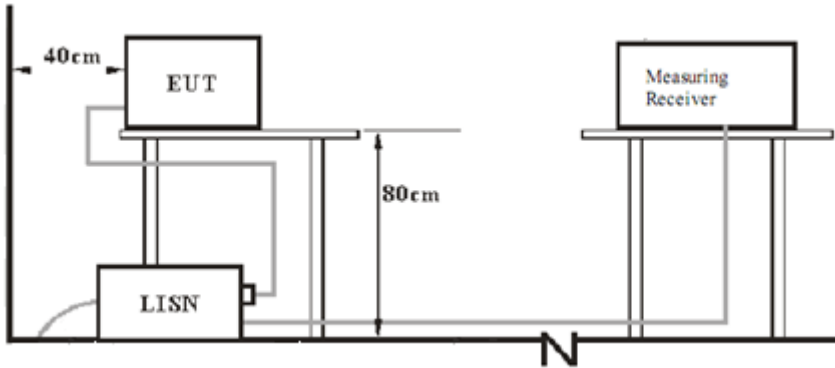


### 7.2 Radiated test setups

#### 9KHz - 30MHz

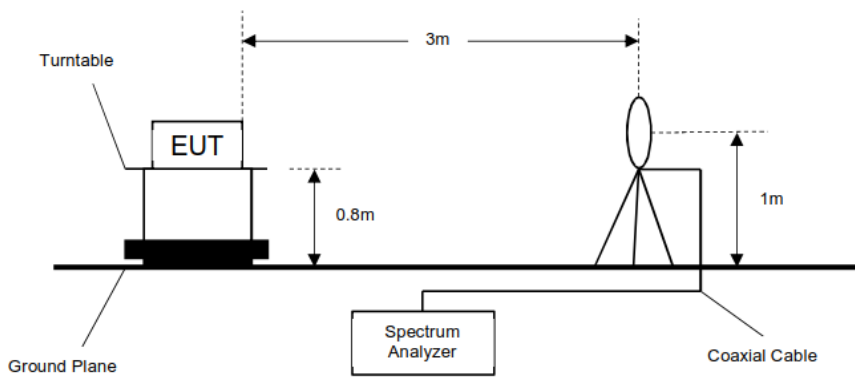


#### 30MHz - 1GHz

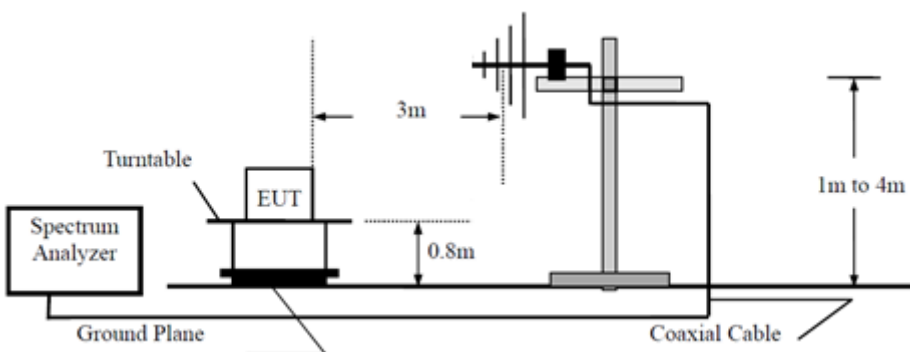




Above 1GHz

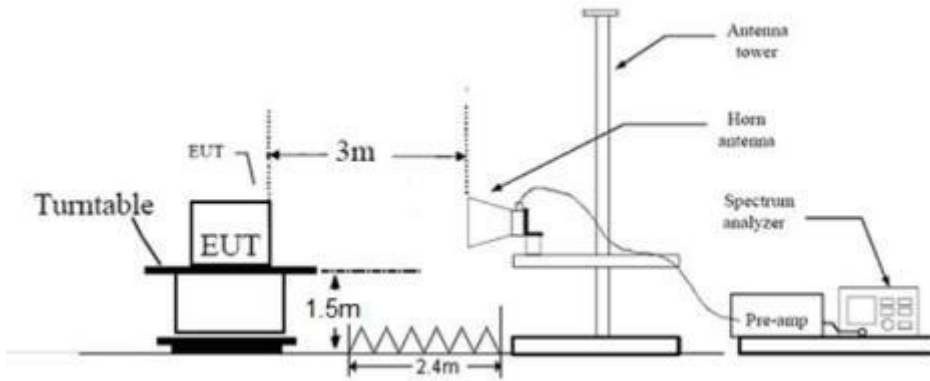

7.3 Conducted RF test setups



## 8 Systems Test Configuration

Auxiliary Equipment Used during Test:

Description	Manufacturer	Model NO.	S/N
Notebook	LENOVO	X220	---

Cables Used During Test:

Cable	Length	Shielded/unshielded	With / without ferrite
---	---	---	---

Test software information:

Test Software Version	IPOP X4	
Mode	Setting TX Power	Packet Type
802.11b	26	DSSS
802.11g	35	OFDM
802.11n20	35	OFDM

The system was configured to non-hopping mode.

Non-hopping mode: The system was configured to operate at a signal channel transmitting. The test software allows the configuration and operation at the worst-case duty and the highest transmit power.

Through pre-scan all kind of modulation and all kind of rates, find the 1Mbps of rate is the worst case of 802.11b; the 6Mbps of rate is the worst case of 802.11g; the 6.5Mbps of rate is the worst case of 802.11n20, only the worst case transmitter rate data mode in recorded in the report.

## 9 Technical Requirement

### 9.1 Conducted Emission

#### Test Method

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. Both sides of AC line were checked for maximum conducted interference.
6. The frequency range from 150 kHz to 30 MHz was searched.
7. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

#### Limit


According to §15.207 & RSS-GEN 8.8, Conducted emissions limit as below:

Frequency MHz	QP Limit dB $\mu$ V	AV Limit dB $\mu$ V
0.150-0.500	66-56*	56-46*
0.500-5	56	46
5-30	60	50

Decreasing linearly with logarithm of the frequency

## Conducted Emission

Product Type : Uncooled Handheld Thermal Camera for Gas Leak Detection  
 M/N : G600  
 Operating Condition : Transmit  
 Test Specification : Line  
 Comment : AC 120V/60Hz

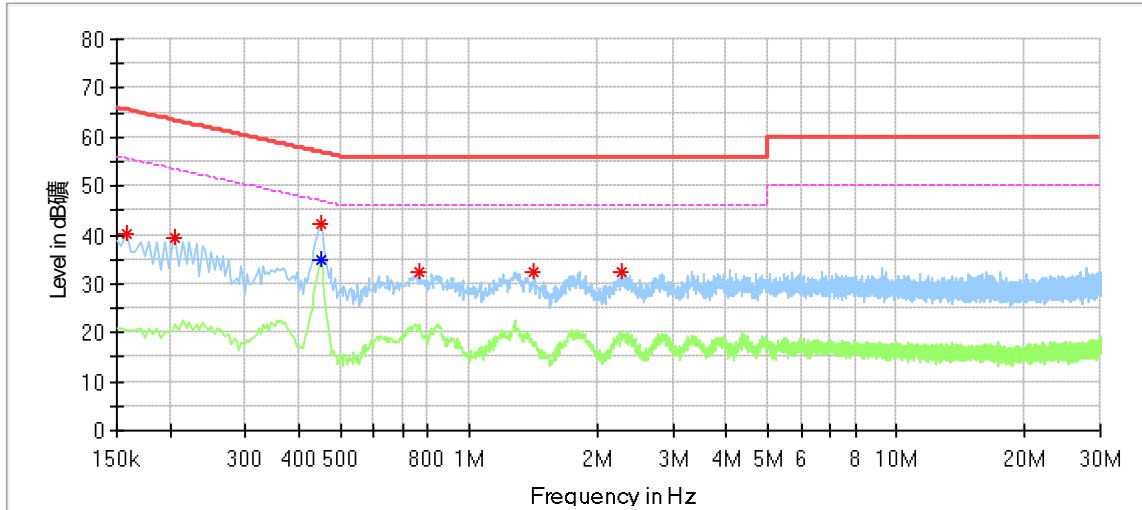


Frequency (MHz)	Max Peak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.158000	40.23	---	65.57	25.34	L1	9.58
0.206000	39.46	---	63.37	23.91	L1	9.60
0.450000	---	34.88	46.88	12.00	L1	9.62
0.450000	42.32	---	56.88	14.55	L1	9.62
0.766000	32.50	---	56.00	23.50	L1	9.64
1.422000	32.34	---	56.00	23.66	L1	9.65
2.282000	32.22	---	56.00	23.78	L1	9.67

Remark:  
 Max Peak= Read level + Corrector factor  
 Correct factor=cable loss + LISN factor

## Conducted Emission

Product Type : Uncooled Handheld Thermal Camera for Gas Leak Detection  
 M/N : G600  
 Operating Condition : Transmit  
 Test Specification : Neutral  
 Comment : AC 120V/60Hz

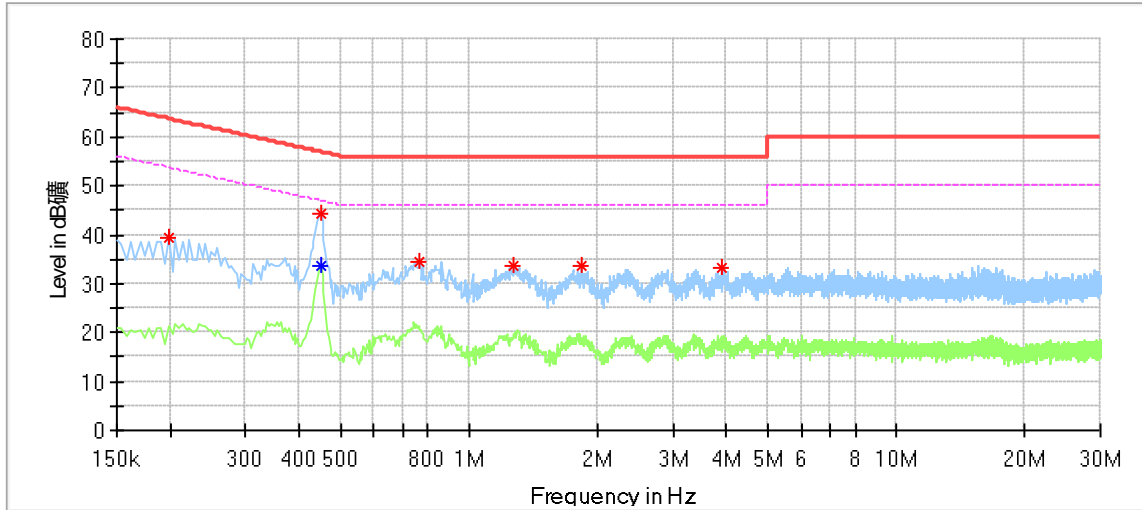


Frequency (MHz)	Max Peak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.198000	39.21	---	63.69	24.49	N	9.58
0.450000	---	33.80	46.88	13.07	N	9.62
0.450000	44.27	---	56.88	12.60	N	9.62
0.766000	34.58	---	56.00	21.42	N	9.64
1.274000	33.48	---	56.00	22.52	N	9.64
1.834000	33.48	---	56.00	22.52	N	9.65
3.918000	33.03	---	56.00	22.97	N	9.73

Remark:  
 Max Peak= Read level + Corrector factor  
 Correct factor=cable loss + LISN factor

## 9.2 Conducted Peak Output Power & EIRP

### Test Method

- 1) The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
- 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- 4) Measure the peak power of the transmitter. This measurement is a peak over both the ON and OFF periods of the transmitter.

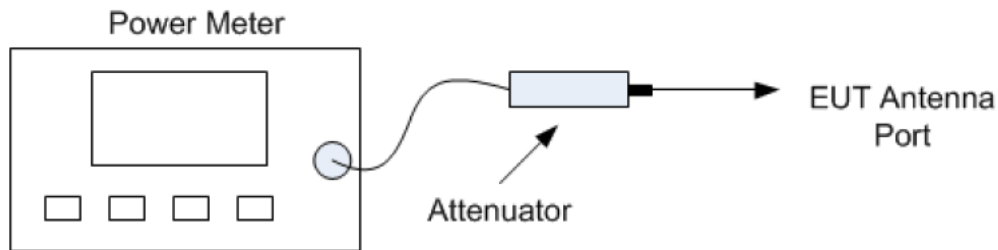

**Power meter conducted test setup**

### Limits

According to §15.247 (b) (1), conducted peak output power limit as below:

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤1	≤30

Test result as below table

802.11b modulation Test Result

Frequency (MHz)	Conducted Peak Output Power (dBm)	Antenna Gain (dBi)	Result
Low channel 2412MHz	9.5	2.5	Pass
Middle channel 2437MHz	10.4	2.5	Pass
High channel 2462MHz	10.6	2.5	Pass

802.11g modulation Test Result

Frequency (MHz)	Conducted Peak Output Power (dBm)	Antenna Gain (dBi)	Result
Low channel 2412MHz	7.2	2.5	Pass
Middle channel 2437MHz	8.5	2.5	Pass
High channel 2462MHz	8.7	2.5	Pass

802.11n20 modulation Test Result

Frequency (MHz)	Conducted Peak Output Power (dBm)	Antenna Gain (dBi)	Result
Low channel 2412MHz	9.2	2.5	Pass
Middle channel 2437MHz	10.0	2.5	Pass
High channel 2462MHz	9.8	2.5	Pass

### 9.3 6dB Bandwidth and 99% Occupied Bandwidth

#### Test Method for 6 dB Bandwidth

1. Use the following spectrum analyzer settings:  
RBW=100K, VBW $\geq$ 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
2. Use the automatic bandwidth measurement capability of an instrument, may be employed using the X dB bandwidth mode with X set to 6 dB, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be  $\geq$  6 dB.
3. Allow the trace to stabilize, record the X dB Bandwidth value.

#### Test Method for 99 % Bandwidth

1. Use the following spectrum analyzer settings:  
RBW=1% to 5% of the actual occupied, VBW $\geq$ 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
2. Use the automatic bandwidth measurement capability of an instrument, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be  $\geq$  6 dB.
3. Allow the trace to stabilize, record the X dB Bandwidth value.

#### Limit

Limit [kHz]

$\geq$ 500

#### 802.11b modulation Test Result

Frequency (MHz)	Antenna	6dB bandwidth (MHz)	99% bandwidth (MHz)	Limit (MHz)	Result
Low channel 2412MHz	Ant1	9.120	13.626	0.5	Pass
Middle channel 2437MHz	Ant1	9.120	13.666	0.5	Pass
High channel 2462MHz	Ant1	9.120	13.626	0.5	Pass

#### 802.11g modulation Test Result

Frequency (MHz)	Antenna	6dB bandwidth (MHz)	99% bandwidth (MHz)	Limit (MHz)	Result
Low channel 2412MHz	Ant1	16.440	17.463	0.5	Pass
Middle channel 2437MHz	Ant1	16.400	17.582	0.5	Pass
High channel 2462MHz	Ant1	16.440	17.383	0.5	Pass


#### 802.11n-HT20 modulation Test Result

Frequency (MHz)	Antenna	6dB bandwidth (MHz)	99% bandwidth (MHz)	Limit (MHz)	Result
Low channel 2412MHz	Ant1	17.640	18.462	0.5	Pass
Middle channel 2437MHz	Ant1	17.640	18.501	0.5	Pass
High channel 2462MHz	Ant1	17.640	18.501	0.5	Pass




## 6 dB Bandwidth

### 11B\_Ant1\_2412

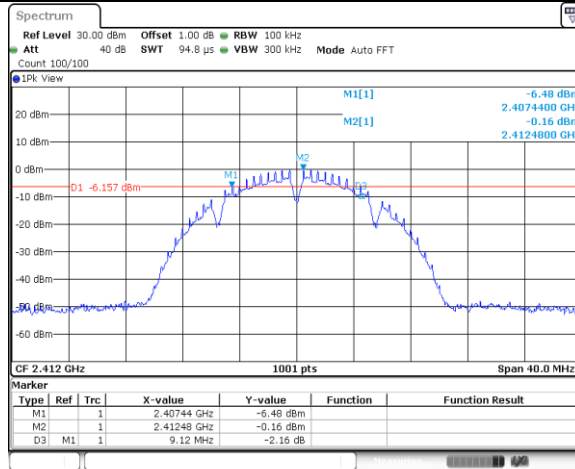


Date: 25.APR 2023 15:29:51

### 11B\_Ant1\_2437

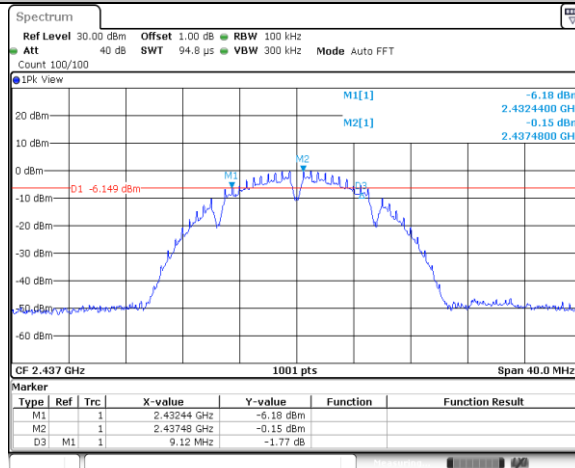


Date: 25.APR 2023 15:31:54

### 11B\_Ant1\_2462

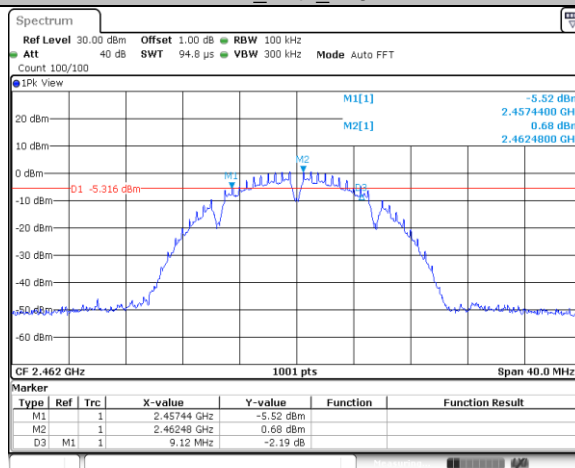


Date: 25.APR 2023 15:33:33

11G\_Ant1\_2412

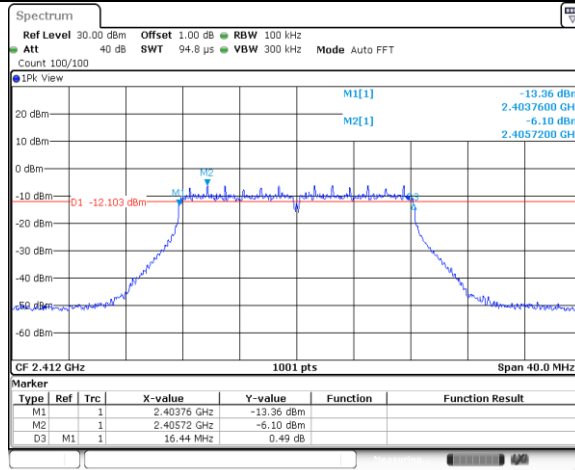


Date: 25 APR 2023 15:35:30

11G\_Ant1\_2437

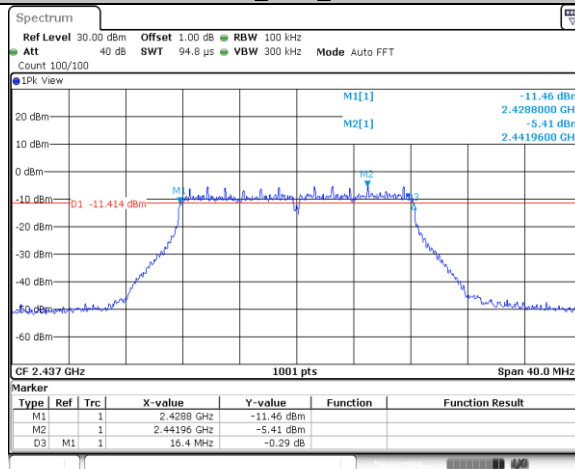


Date: 25 APR 2023 15:37:16

11G\_Ant1\_2462

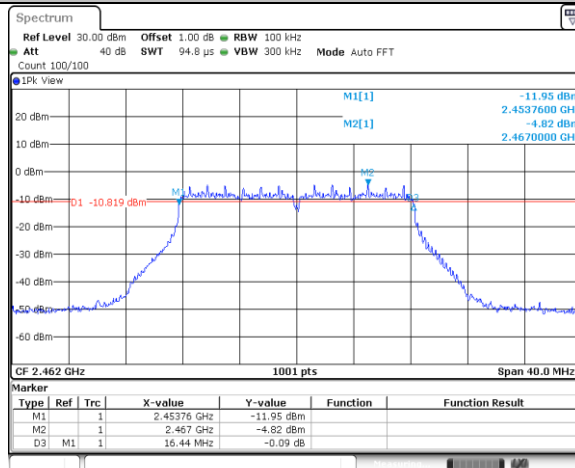


Date: 25 APR 2023 15:38:53

11N20SISO\_Ant1\_2412

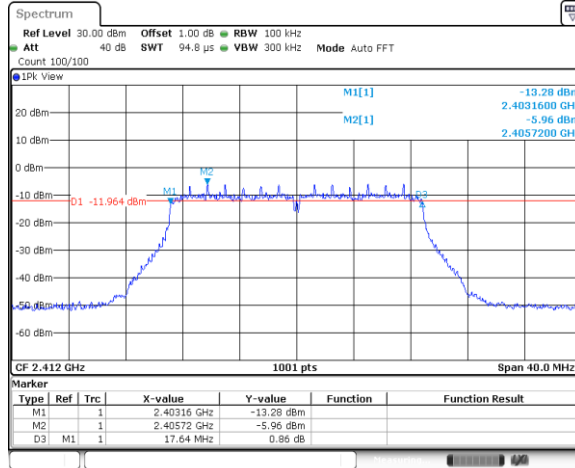


Date: 25.APR.2023 15:40:34

11N20SISO\_Ant1\_2437

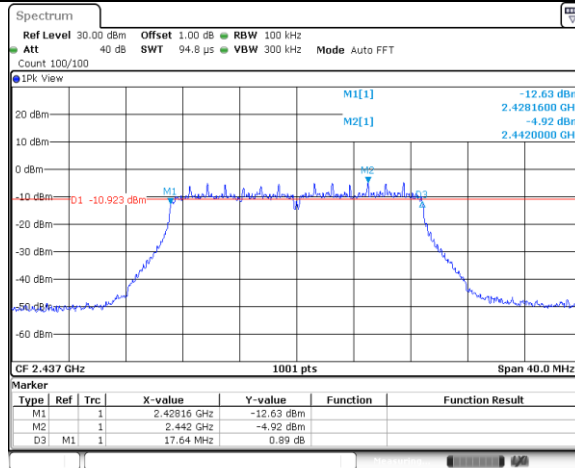


Date: 25.APR.2023 15:42:11

11N20SISO\_Ant1\_2462

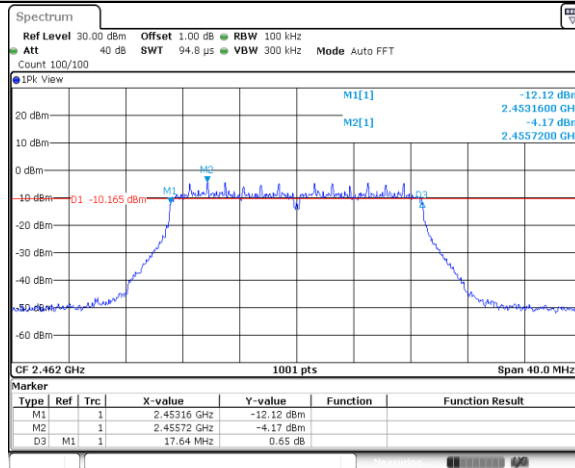


Date: 25.APR.2023 15:43:49

11N40SISO\_Ant1\_2422

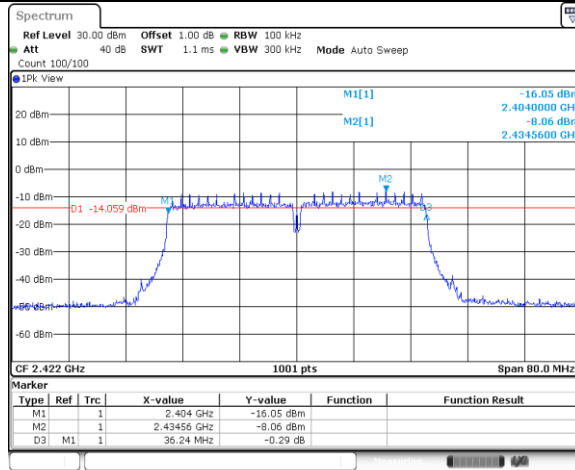


Date: 25 APR 2023 15:45:55

11N40SISO\_Ant1\_2437

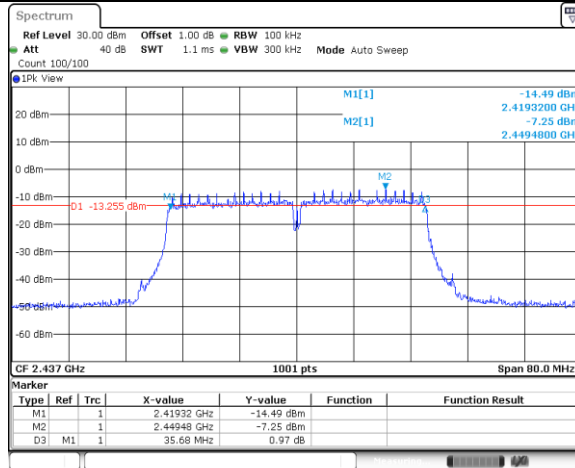

Date: 25 APR 2023 15:47:34


11N40SISO\_Ant1\_2452

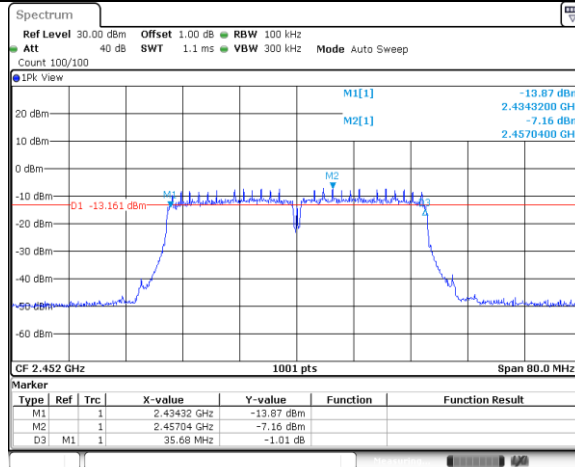

Date: 25 APR 2023 15:49:11


99% Bandwidth

11B\_Ant1\_2412

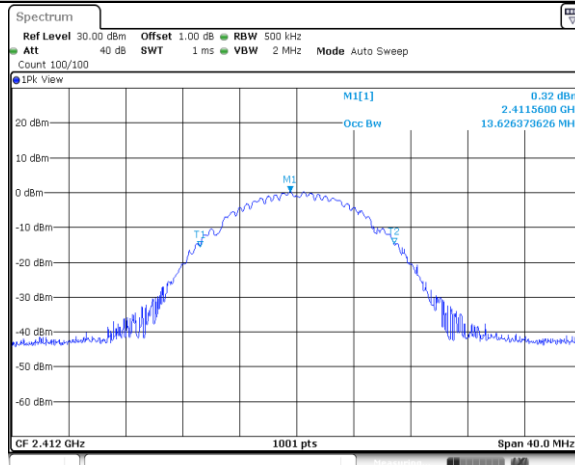


Date: 25.APR 2023 15:30:01

11B\_Ant1\_2437

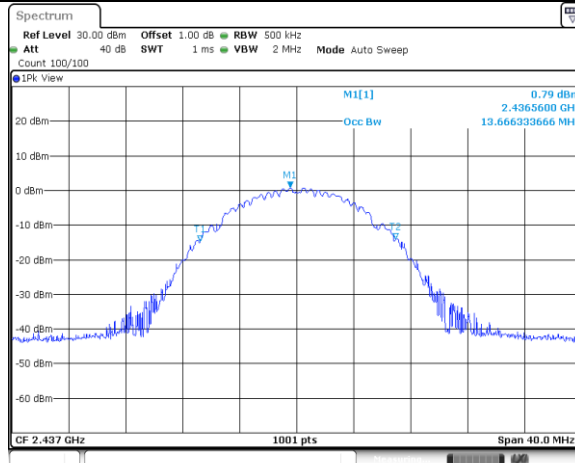


Date: 25.APR 2023 15:32:05

11B\_Ant1\_2462

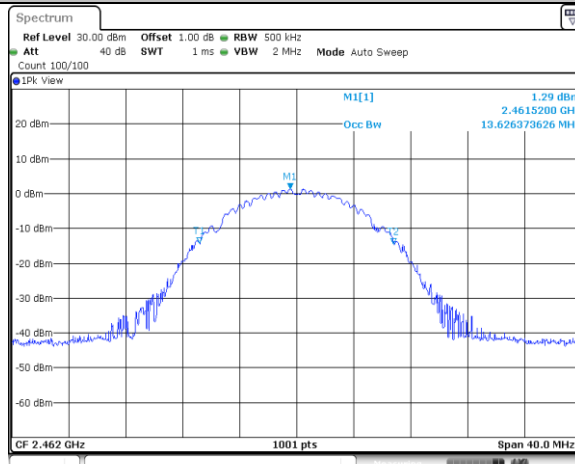


Date: 25.APR 2023 15:33:44

### 11G\_Ant1\_2412

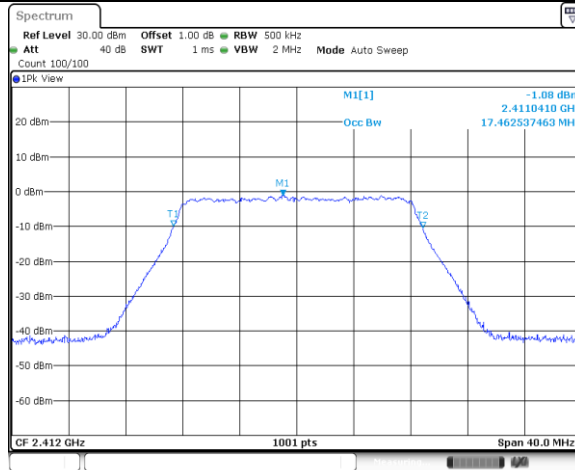


Date: 25 APR 2023 15:35:41

### 11G\_Ant1\_2437

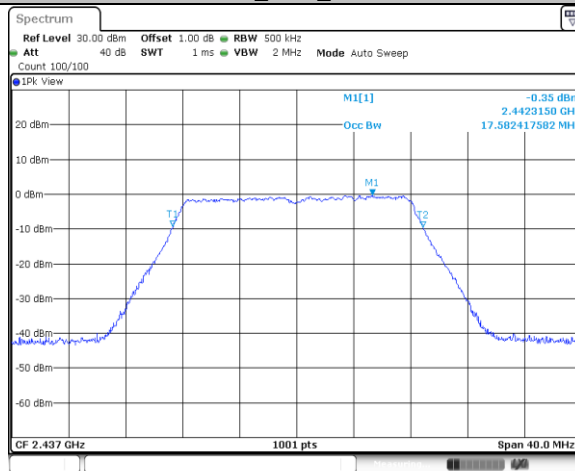


Date: 25 APR 2023 15:37:27

### 11G\_Ant1\_2462

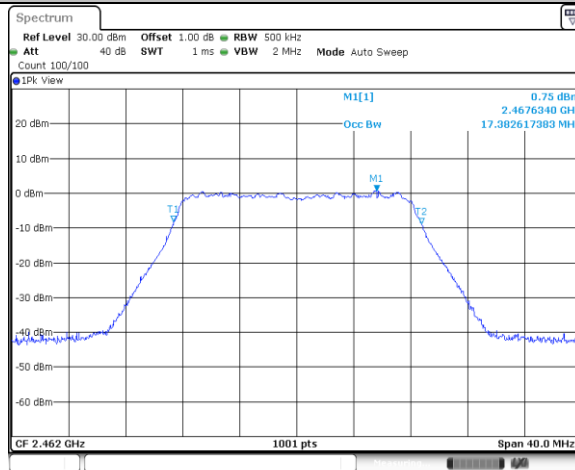


Date: 25 APR 2023 15:39:04

### 11N20SISO\_Ant1\_2412

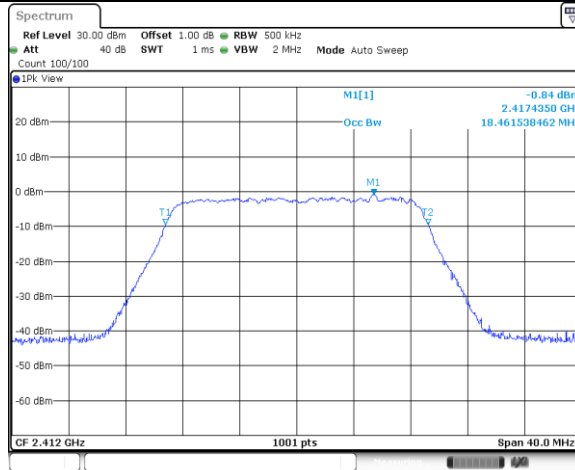


Date: 25.APR.2023 15:40:45

### 11N20SISO\_Ant1\_2437

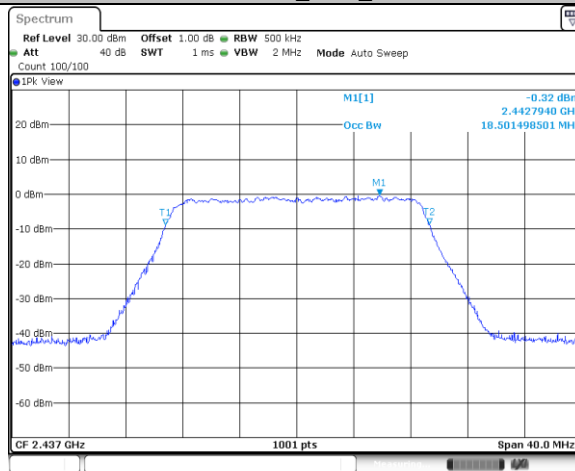


Date: 25.APR.2023 15:42:22

### 11N20SISO\_Ant1\_2462

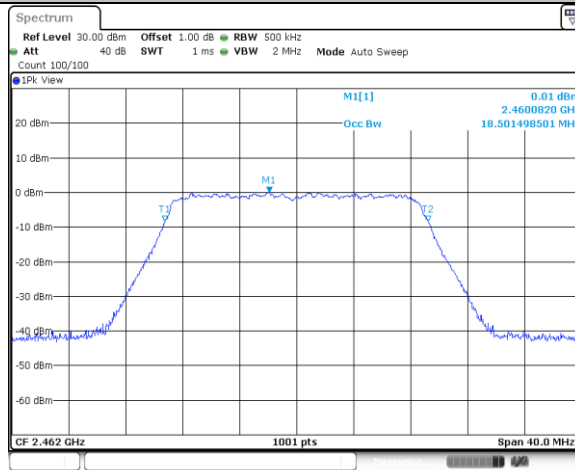


Date: 25.APR.2023 15:44:00

11N40SISO\_Ant1\_2422

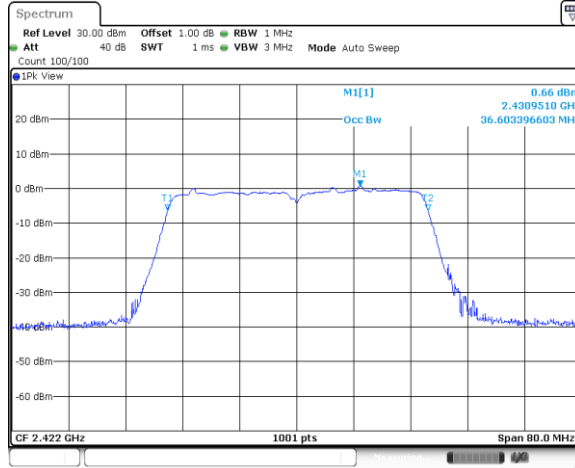


Date: 25 APR 2023 15:46:05

11N40SISO\_Ant1\_2437

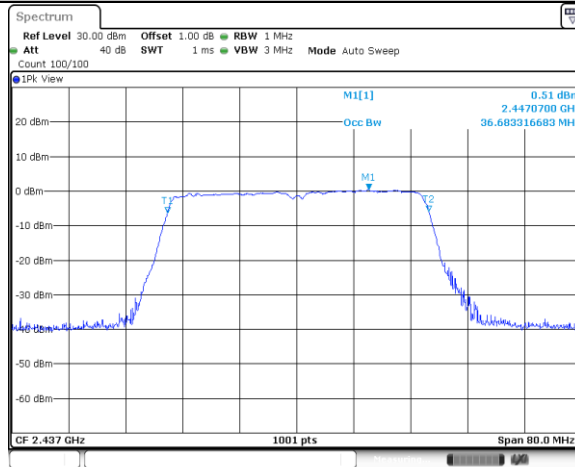

Date: 25 APR 2023 15:47:45

11N40SISO\_Ant1\_2452

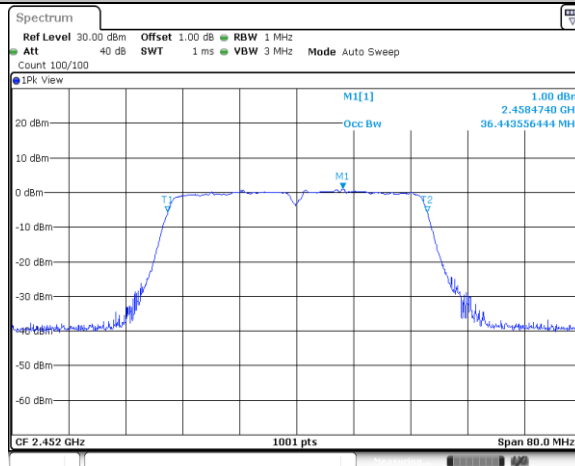

Date: 25 APR 2023 15:49:22



## 9.4 Power Spectral Density

### Test Method

1. The RF output of EUT was connected to the test receiver. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
4. Set analyzer center frequency to DTS channel center frequency. RBW=3kHz, VBW $\geq$ 3RBW, Span=1.5 times DTS bandwidth, Detector=Peak, Sweep=auto, Trace= max hold.
5. Allow trace to fully stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
6. Repeat above procedures until other frequencies measured were completed.

### Limit

$$\text{Limit [dBm/3KHz]} \leq 8$$

#### 802.11b modulation Test Result

Frequency (MHz)	Power spectral density (dBm/3KHz)	Limit (dBm)	Result
Low channel 2412MHz	-14.46	8	Pass
Middle channel 2437MHz	-13.08	8	Pass
High channel 2462MHz	-12.76	8	Pass


#### 802.11g modulation Test Result

Frequency (MHz)	Power spectral density (dBm/3KHz)	Limit (dBm)	Result
Low channel 2412MHz	-18.13	8	Pass
Middle channel 2437MHz	-17.05	8	Pass
High channel 2462MHz	-16.67	8	Pass

#### 802.11n-HT20 modulation Test Result


Frequency (MHz)	Power spectral density (dBm/3KHz)	Limit (dBm)	Result
Low channel 2412MHz	-18.03	8	Pass
Middle channel 2437MHz	-16.99	8	Pass
High channel 2462MHz	-16.64	8	Pass

### 11B\_Ant1\_2412

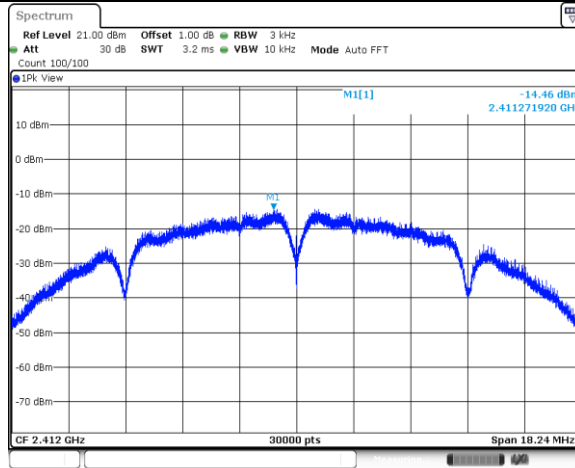


Date: 25 APR 2023 15:30:07

### 11B\_Ant1\_2437

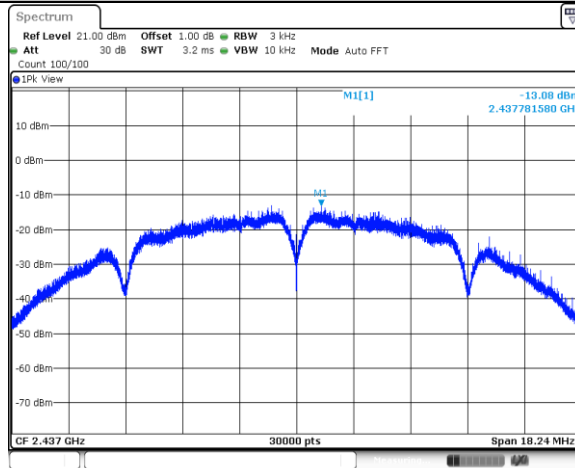


Date: 25 APR 2023 15:32:11

### 11B\_Ant1\_2462

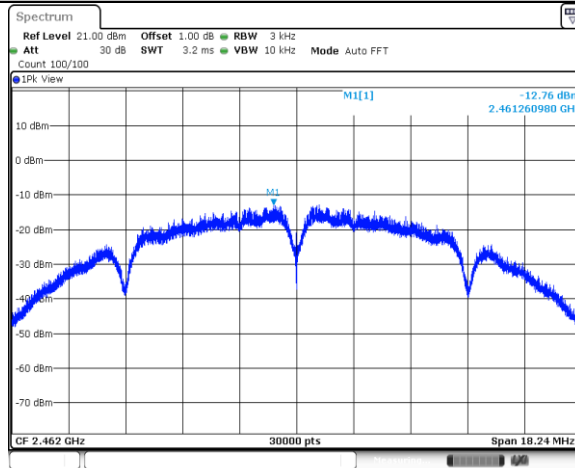


Date: 25 APR 2023 15:33:50

### 11G\_Ant1\_2412

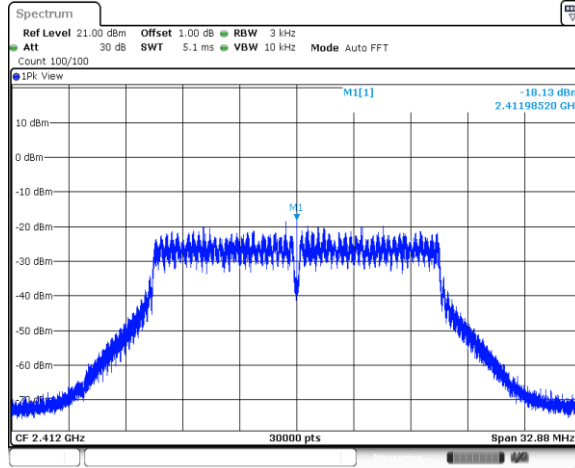


Date: 25 APR 2023 15:35:47

### 11G\_Ant1\_2437

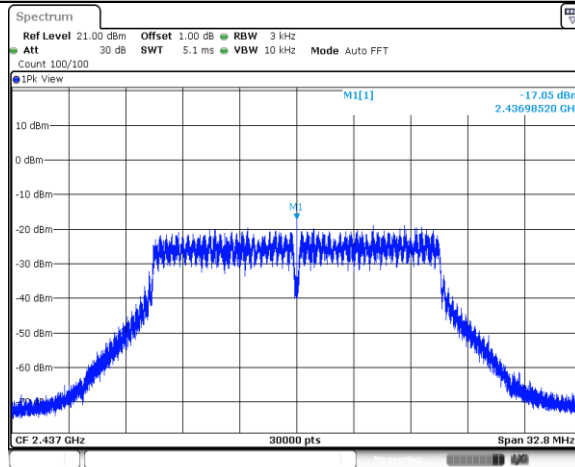


Date: 25 APR 2023 15:37:33

### 11G\_Ant1\_2462

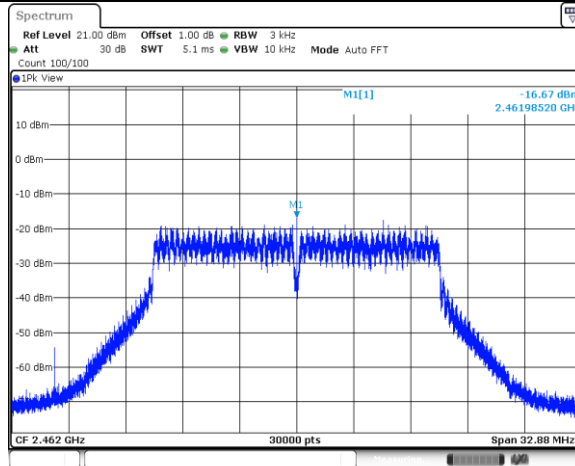


Date: 25 APR 2023 15:39:10

### 11N20SISO\_Ant1\_2412

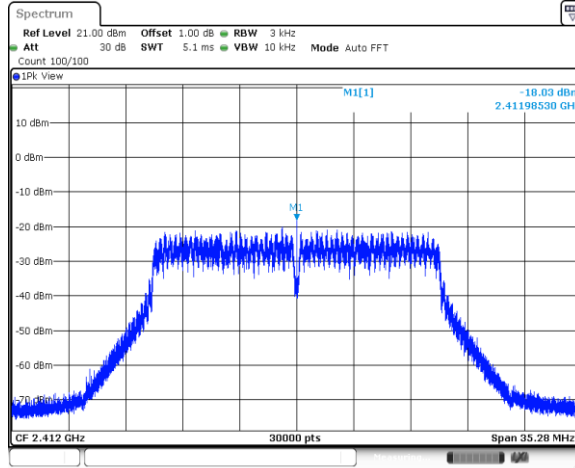


Date: 25 APR 2023 15:40:51

### 11N20SISO\_Ant1\_2437

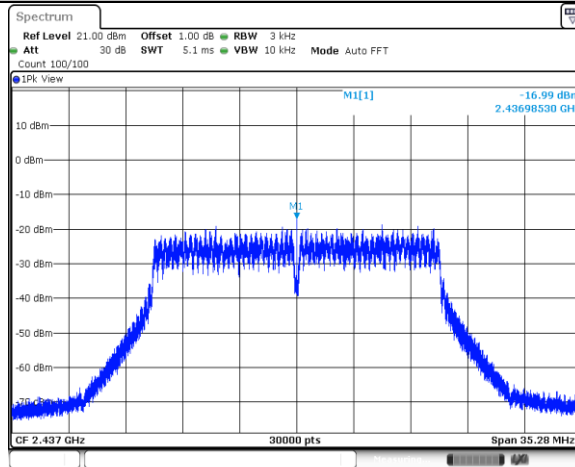


Date: 25 APR 2023 15:42:28

### 11N20SISO\_Ant1\_2462

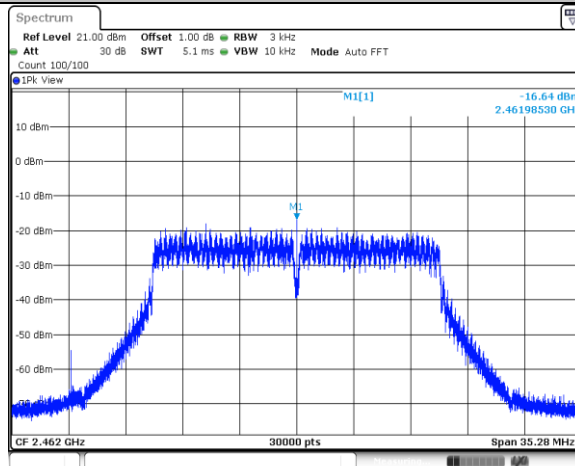


Date: 25 APR 2023 15:44:06

11N40SISO\_Ant1\_2422

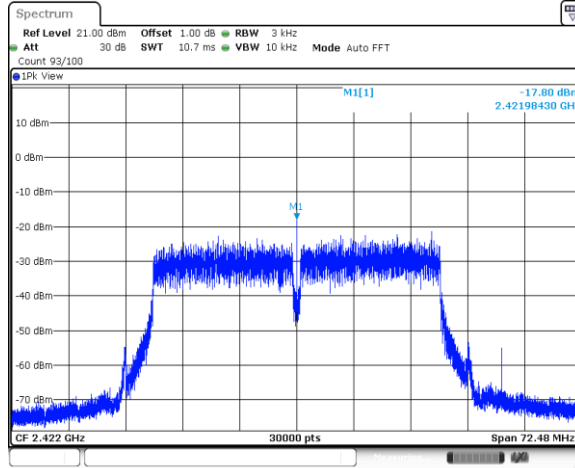


Date: 25 APR 2023 15:46:11

11N40SISO\_Ant1\_2437

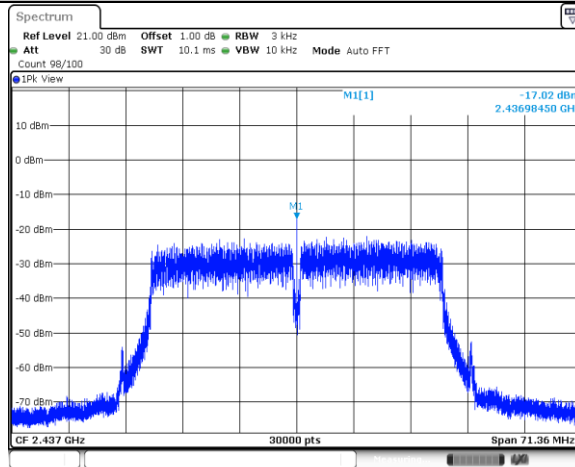

Date: 25 APR 2023 15:47:51

11N40SISO\_Ant1\_2452

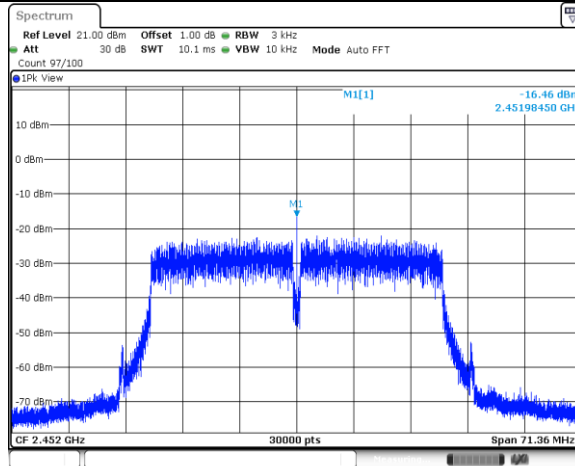

Date: 25 APR 2023 15:49:28

## 9.5 Spurious RF Conducted Emissions

### Test Method

1. The RF output of EUT was connected to the test receiver by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10<sup>th</sup> harmonic. Typically, several plots are required to cover this entire span.  
RBW = 100 kHz, VBW $\geq$ 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.
5. The level displayed must comply with the limit specified in this Section. Submit these plots.
6. Repeat above procedures until all frequencies measured were complete.


### Limit

Frequency Range MHz	Limit (dBc)
30-25000	-20


**Spurious RF conducted emissions**

Test Mode	Antenna	Channel (MHz)	Frequency Range (MHz)	Result (dBm)	Limit (MHz)	Verdict
11B	Ant1	2412	Reference	-0.68	---	PASS
			30~1000	-68.07	<=-20.68	PASS
			1000~26500	-41.16	<=-20.68	PASS
		2437	Reference	0.34	---	PASS
			30~1000	-67.86	<=-19.66	PASS
			1000~26500	-40.16	<=-19.66	PASS
		2462	Reference	0.67	---	PASS
			30~1000	-67.99	<=-19.33	PASS
			1000~26500	-40.39	<=-19.33	PASS
11G	Ant1	2412	Reference	-6.39	---	PASS
			30~1000	-68.31	<=-26.39	PASS
			1000~26500	-44.63	<=-26.39	PASS
		2437	Reference	-4.97	---	PASS
			30~1000	-68.38	<=-24.97	PASS
			1000~26500	-52.08	<=-24.97	PASS
		2462	Reference	-5.60	---	PASS
			30~1000	-67.96	<=-25.6	PASS
			1000~26500	-51.86	<=-25.6	PASS
11N20	Ant1	2412	Reference	-6.18	---	PASS
			30~1000	-68.28	<=-26.18	PASS
			1000~26500	-44.95	<=-26.18	PASS
		2437	Reference	-4.93	---	PASS
			30~1000	-67.87	<=-24.93	PASS
			1000~26500	-51.34	<=-24.93	PASS
		2462	Reference	-5.02	---	PASS
			30~1000	-67.99	<=-25.02	PASS
			1000~26500	-50.77	<=-25.02	PASS


### 11B\_Ant1\_2412\_0~Reference

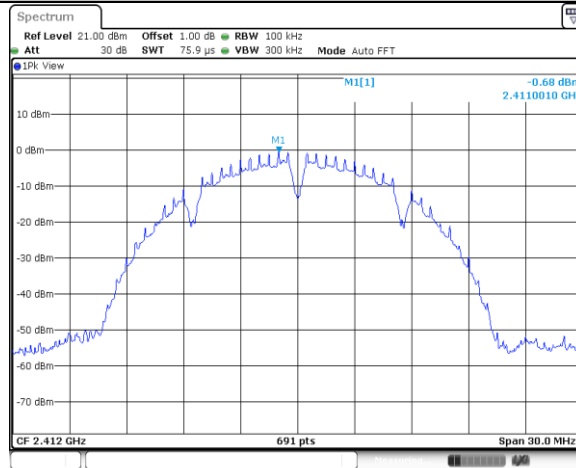

### 11B\_Ant1\_2412\_30~1000

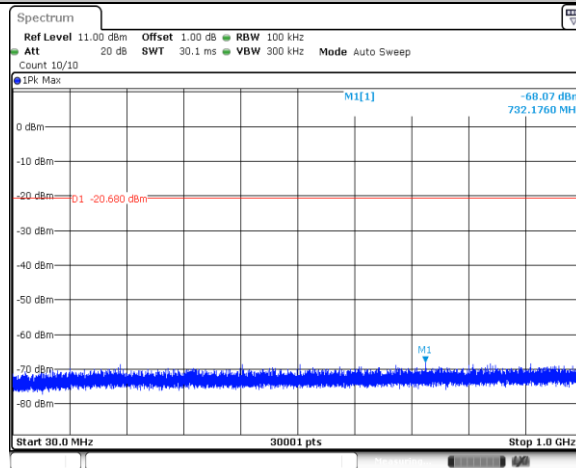


### 11B\_Ant1\_2412\_1000~26500

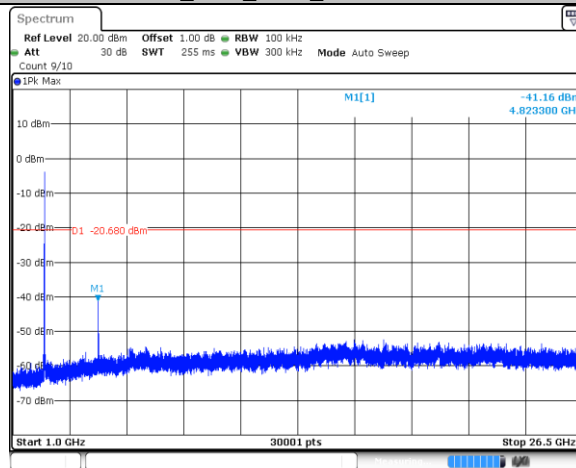




### 11B\_Ant1\_2437\_0~Reference

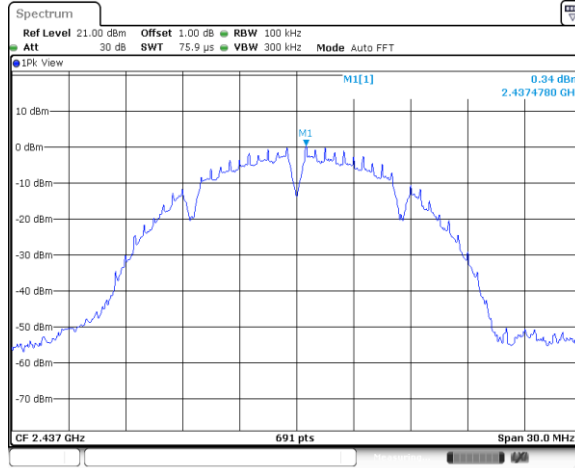


Date: 25 APR 2023 15:32:16

### 11B\_Ant1\_2437\_30~1000

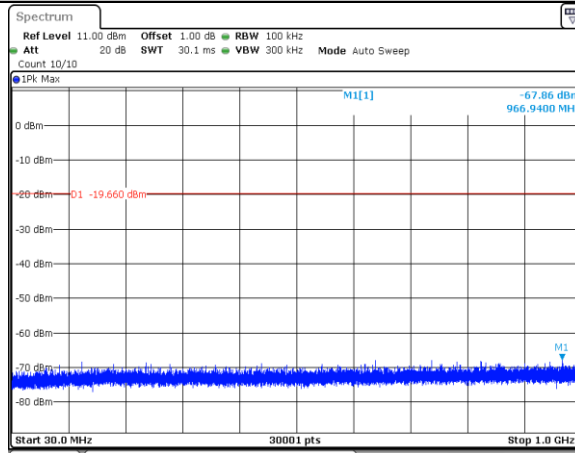


Date: 25 APR 2023 15:32:22

### 11B\_Ant1\_2437\_1000~26500

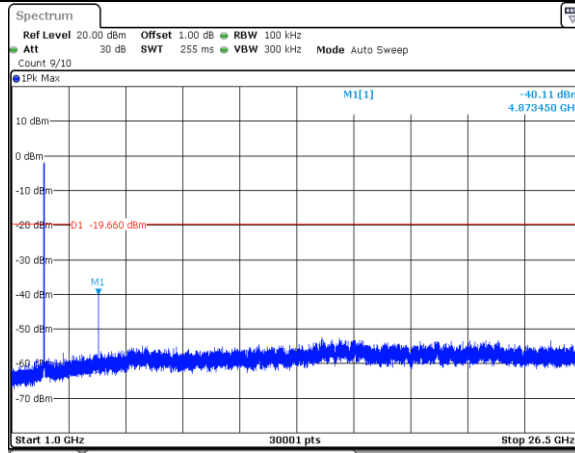


Date: 25 APR 2023 15:32:30

### 11B\_Ant1\_2462\_0~Reference

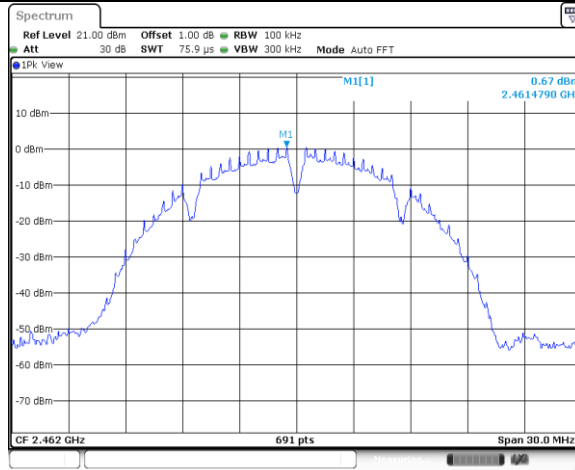


Date: 25 APR 2023 15:34:04

### 11B\_Ant1\_2462\_30~1000

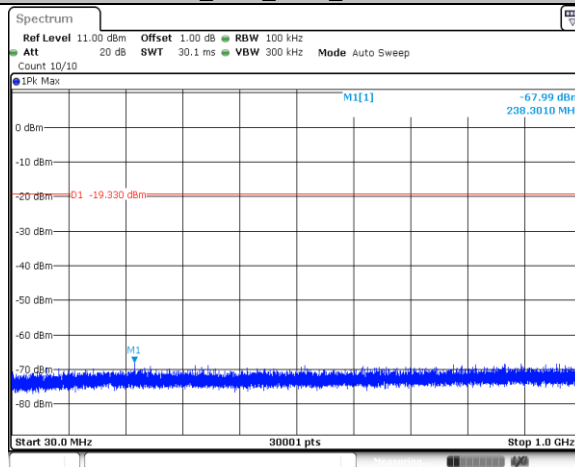


Date: 25 APR 2023 15:34:10

### 11B\_Ant1\_2462\_1000~26500

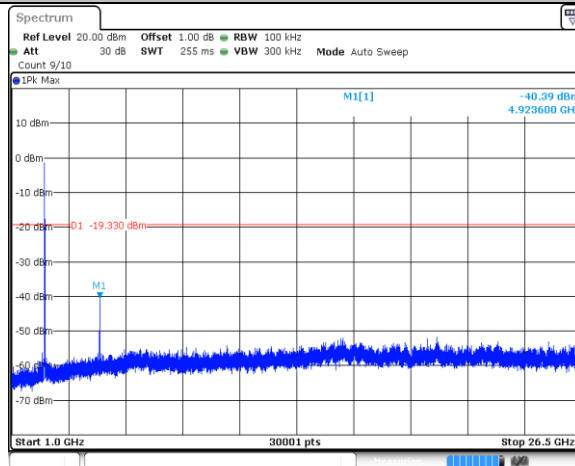


Date: 25 APR 2023 15:34:18

### 11G\_Ant1\_2412\_0~Reference

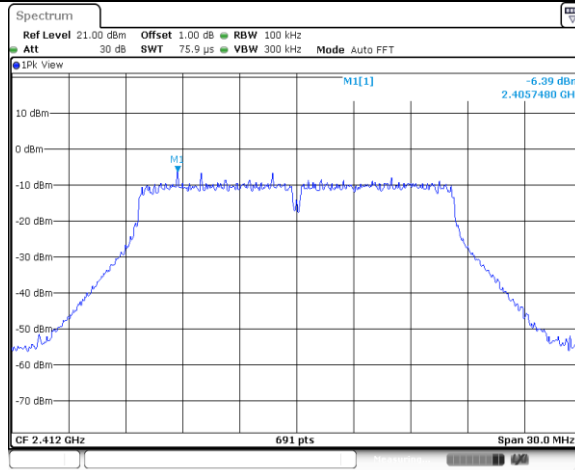


Date: 25 APR 2023 15:36:02

### 11G\_Ant1\_2412\_30~1000

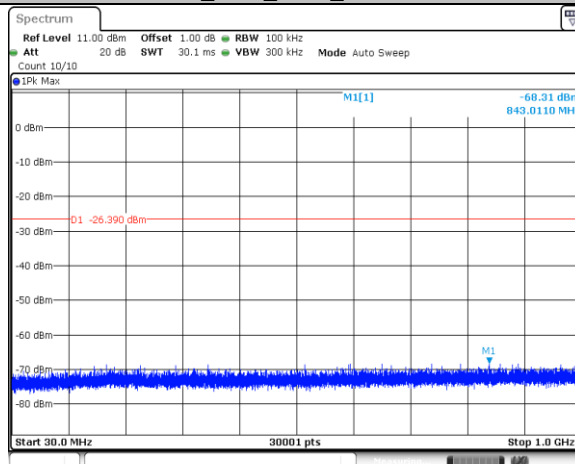


Date: 25 APR 2023 15:36:08

### 11G\_Ant1\_2412\_1000~26500

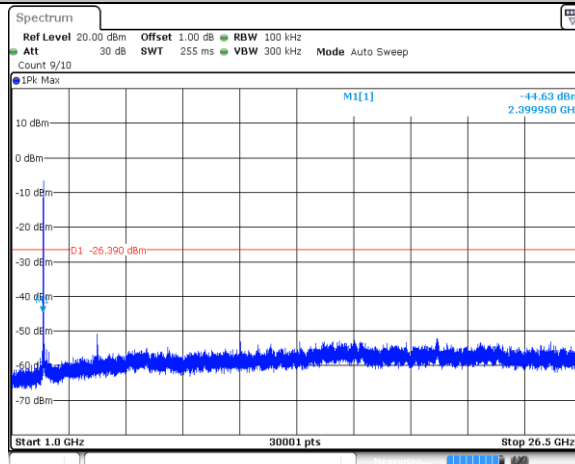


Date: 25 APR 2023 15:36:15


### 11G\_Ant1\_2437\_0~Reference

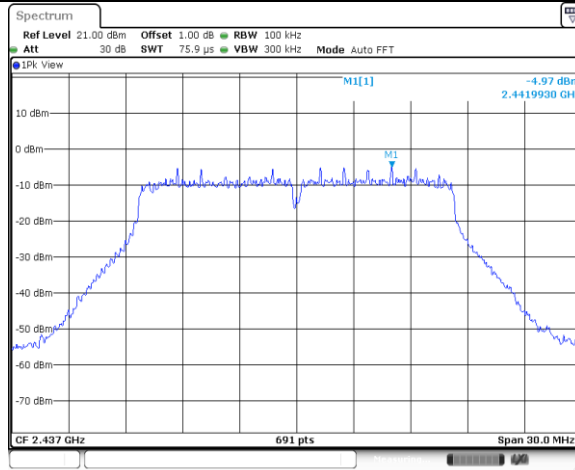


### 11G\_Ant1\_2437\_30~1000

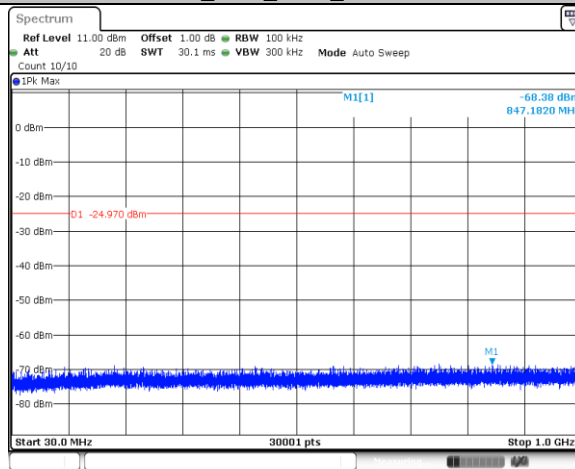

### 11G\_Ant1\_2437\_1000~26500

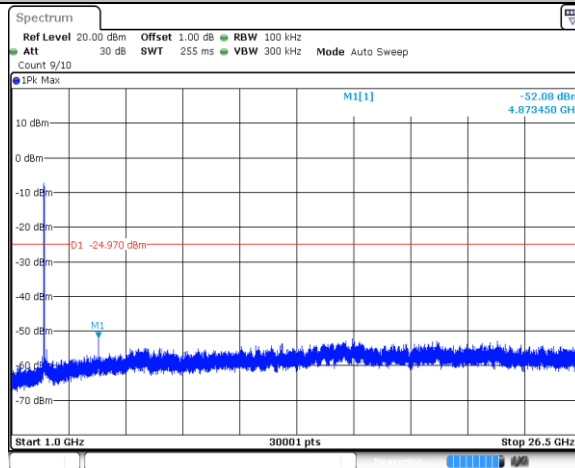


### 11G\_Ant1\_2462\_0~Reference

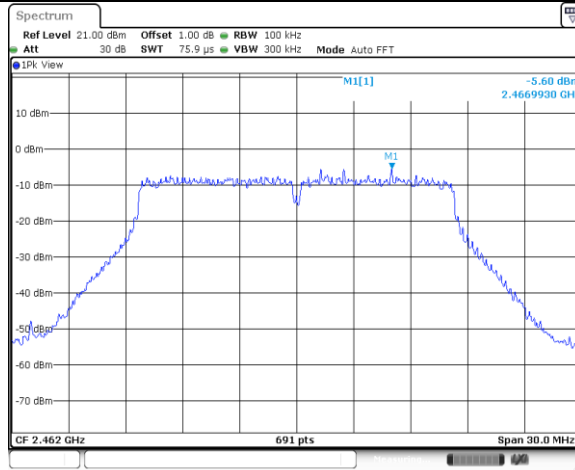


Date: 25 APR 2023 15:39:25

### 11G\_Ant1\_2462\_30~1000

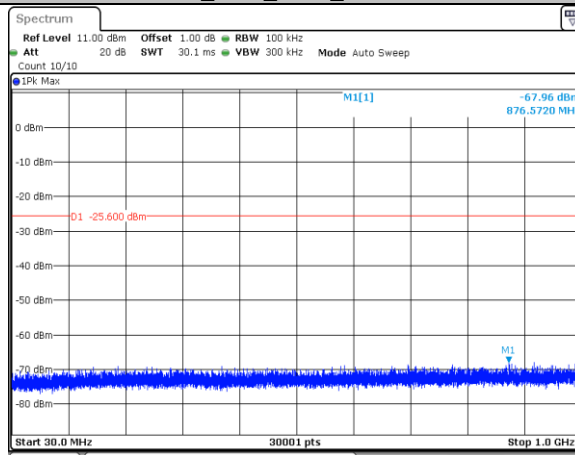


Date: 25 APR 2023 15:39:31

### 11G\_Ant1\_2462\_1000~26500

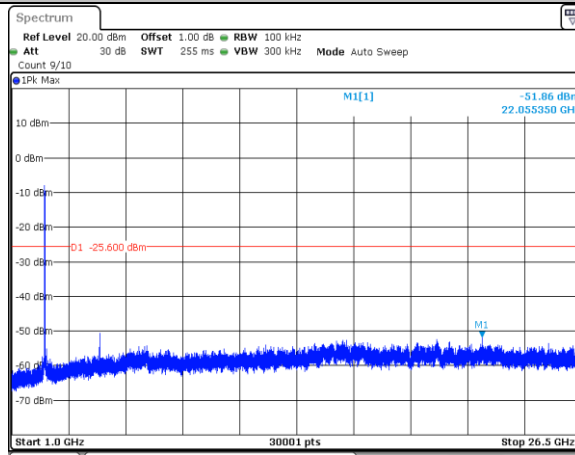


Date: 25 APR 2023 15:39:38

### 11N20SISO\_Ant1\_2412\_0~Reference

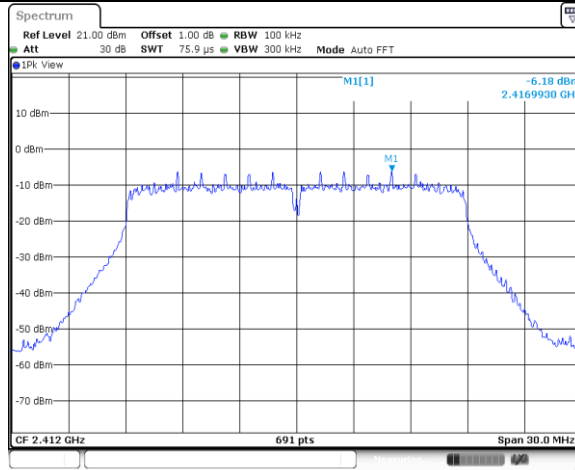


Date: 25 APR 2023 15:41:06

### 11N20SISO\_Ant1\_2412\_30~1000

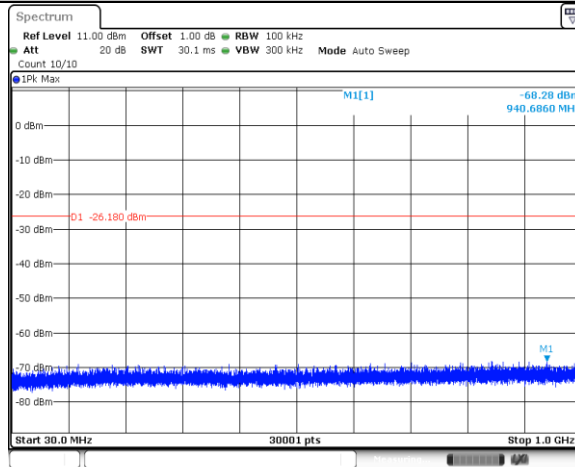


Date: 25 APR 2023 15:41:12

### 11N20SISO\_Ant1\_2412\_1000~26500

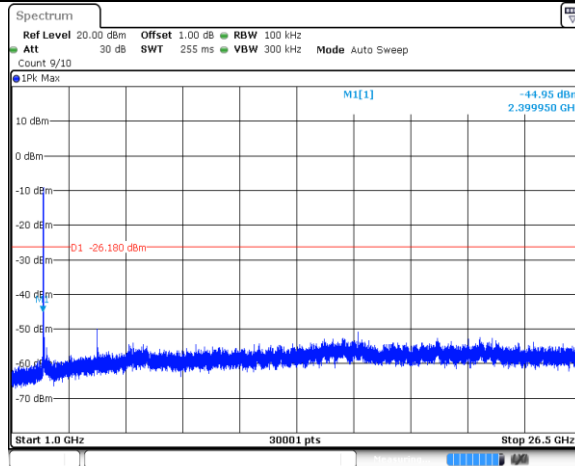


Date: 25 APR 2023 15:41:19

### 11N20SISO\_Ant1\_2437\_0~Reference

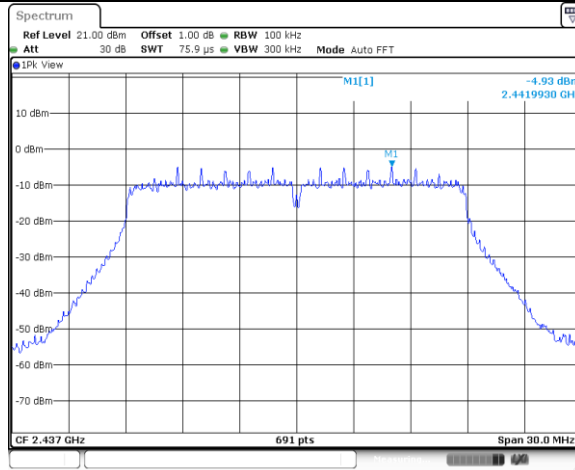


Date: 25 APR 2023 15:42:33

### 11N20SISO\_Ant1\_2437\_30~1000

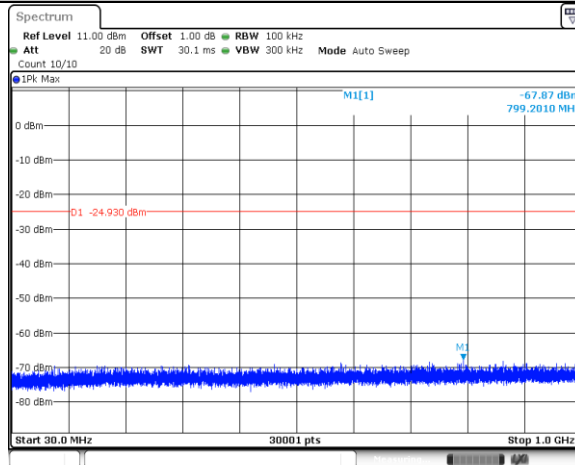


Date: 25 APR 2023 15:42:39

### 11N20SISO\_Ant1\_2437\_1000~26500

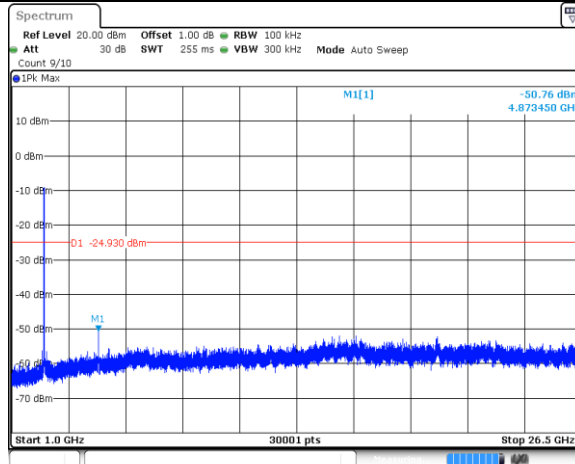


Date: 25 APR 2023 15:42:47

### 11N20SISO\_Ant1\_2462\_0~Reference

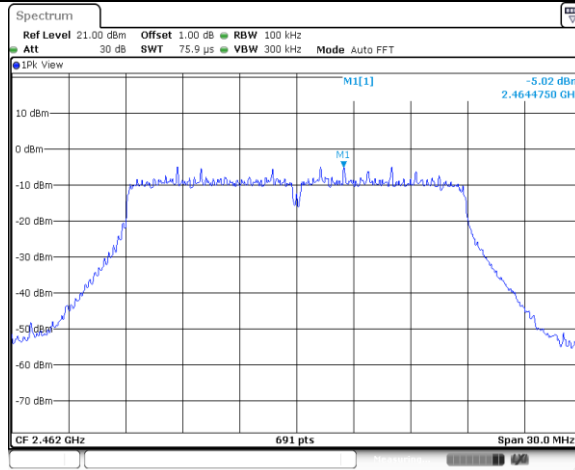


Date: 25 APR 2023 15:44:21

### 11N20SISO\_Ant1\_2462\_30~1000

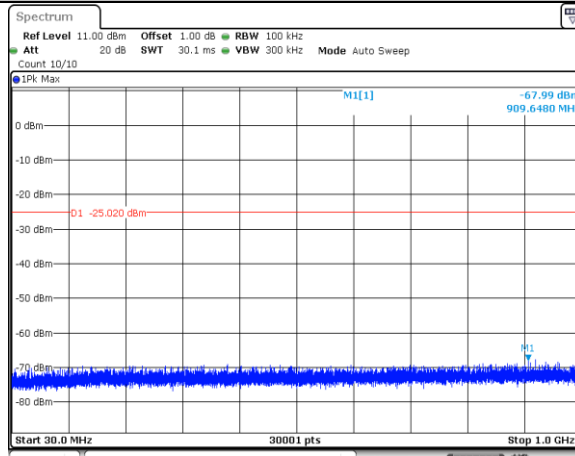

Date: 25 APR 2023 15:44:27


### 11N20SISO\_Ant1\_2462\_1000~26500

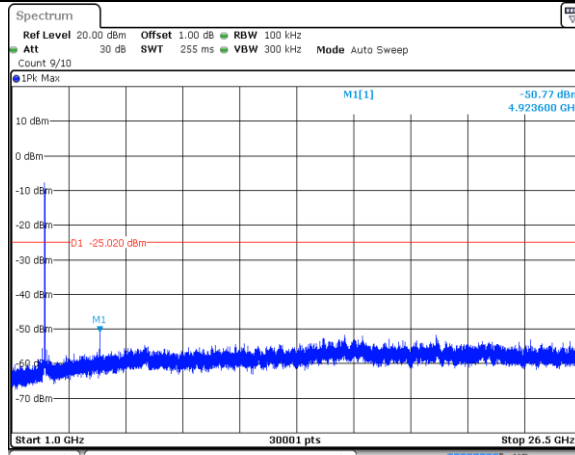

Date: 25 APR 2023 15:44:34




### 11N40SISO\_Ant1\_2422\_0~Reference

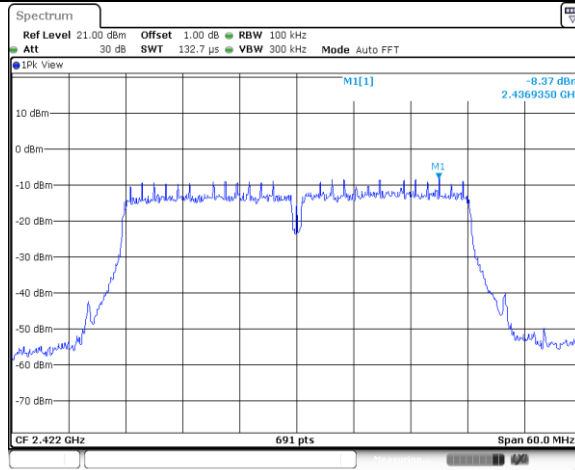


Date: 25 APR 2023 15:46:26

### 11N40SISO\_Ant1\_2422\_30~1000

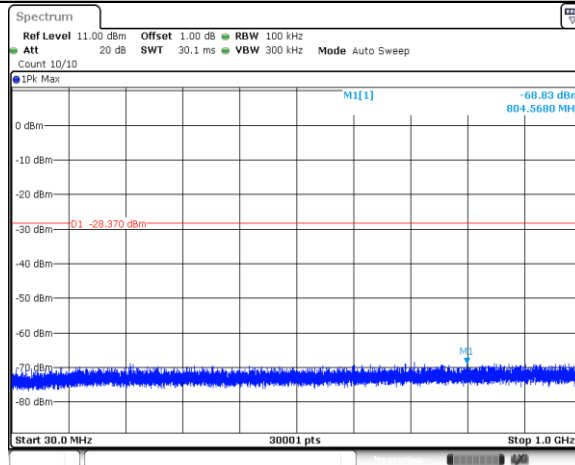


Date: 25 APR 2023 15:46:32

### 11N40SISO\_Ant1\_2422\_1000~26500

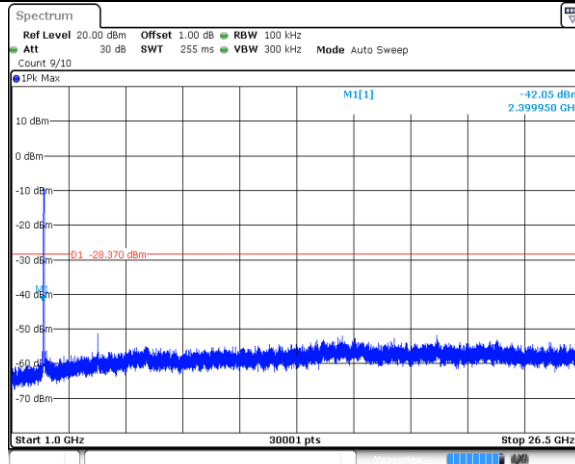


Date: 25 APR 2023 15:46:40

### 11N40SISO\_Ant1\_2437\_0~Reference

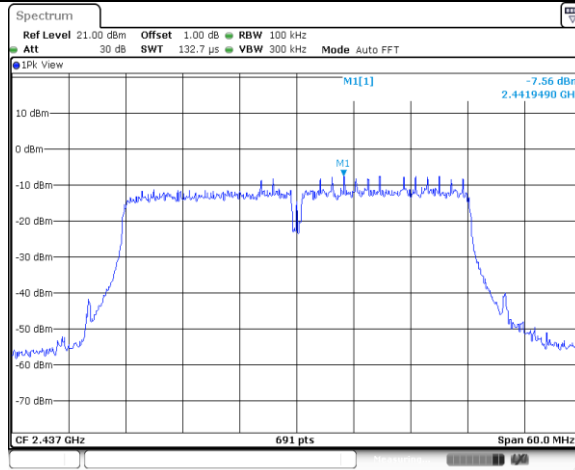


Date: 25 APR 2023 15:47:56

### 11N40SISO\_Ant1\_2437\_30~1000

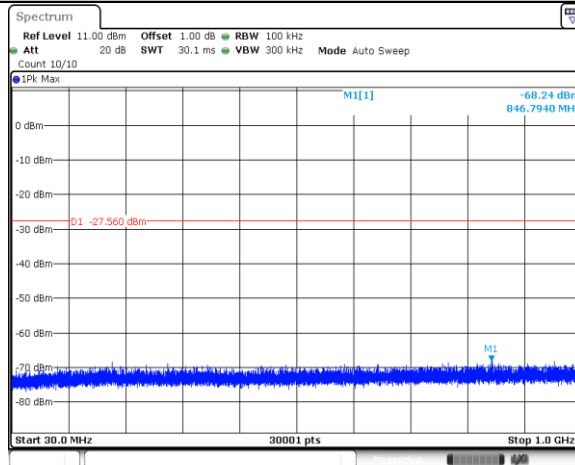


Date: 25 APR 2023 15:48:02

### 11N40SISO\_Ant1\_2437\_1000~26500

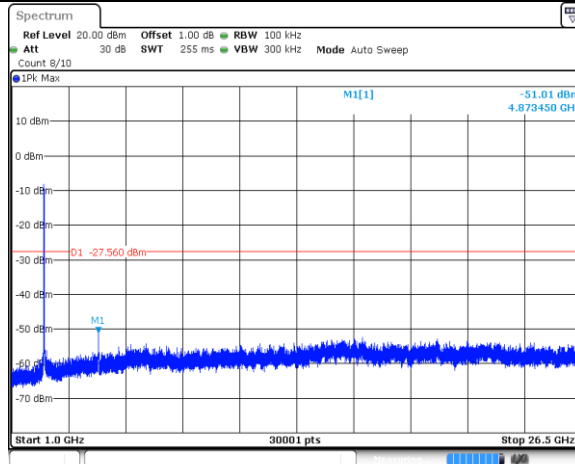


Date: 25 APR 2023 15:48:10

### 11N40SISO\_Ant1\_2452\_0~Reference

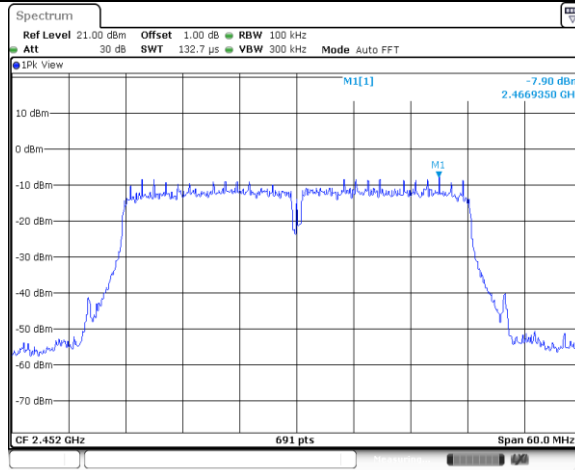


Date: 25 APR 2023 15:49:43

### 11N40SISO\_Ant1\_2452\_30~1000

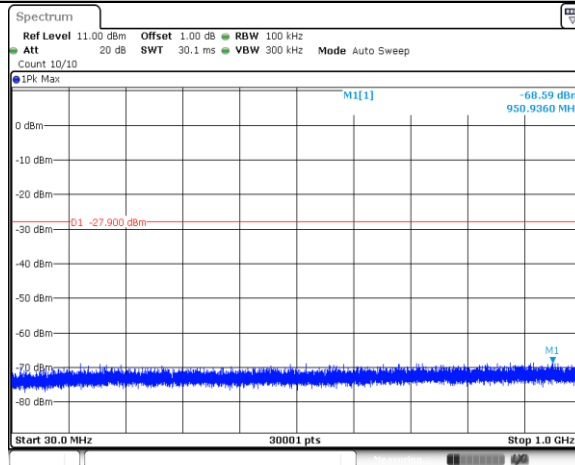

Date: 25 APR 2023 15:49:49

### 11N40SISO\_Ant1\_2452\_1000~26500

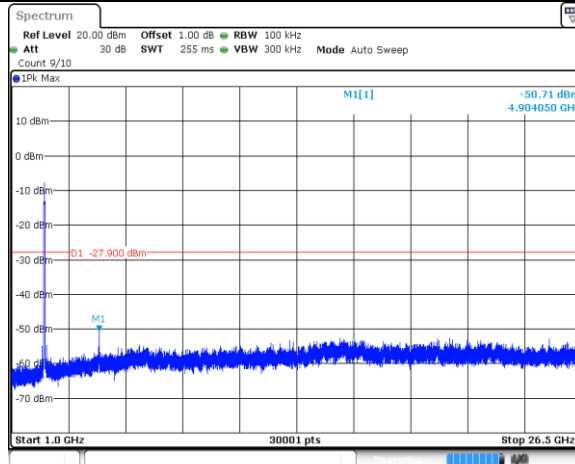

Date: 25 APR 2023 15:49:57

## 9.6 Band Edge Testing

### Test Method

1. The RF output of EUT was connected to the test receiver by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peak level of the in-band emission and all spurious  
RBW = 100 kHz, VBW $\geq$ 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize, use the peak and delta measurement to record the result.
5. The level displayed must comply with the limit specified in this Section.
6. Repeat above procedures until all frequencies measured were complete and submit all the plots.

### Limit:


According to §15.247(d) and RSS-247 5.5, in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a) and RSS-Gen 8.10, must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)) and RSS-Gen.

Frequency Range MHz	Limit (dBc)
30-25000	-20

### Band edge testing


Test Mode	Antenna	Channel Name	Channel (MHz)	Reference Level (dBm)	Result (dBm)	Limit (dBm)	Verdict
11B	Ant1	Low	2412	-0.55	-51.39	<=-20.55	PASS
		High	2462	-0.46	-55.02	<=-20.46	PASS
11G	Ant1	Low	2412	-6.64	-46.87	<=-26.64	PASS
		High	2462	-4.92	-54.37	<=-24.92	PASS
11N20	Ant1	Low	2412	-6.86	-45.56	<=-26.86	PASS
		High	2462	-4.81	-54.35	<=-24.81	PASS

11B\_Ant1\_Low\_2412

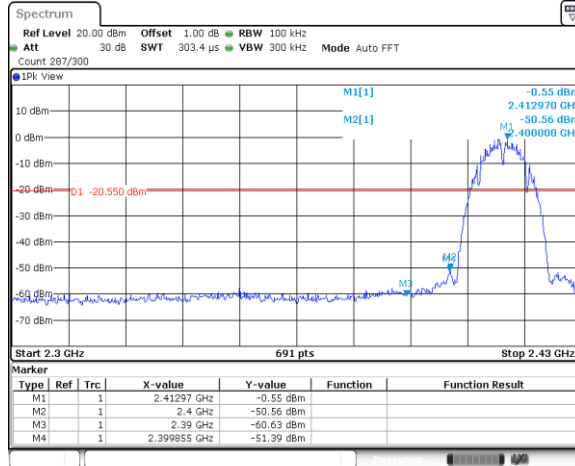


Date: 25 APR 2023 15:30:16

11B\_Ant1\_High\_2462

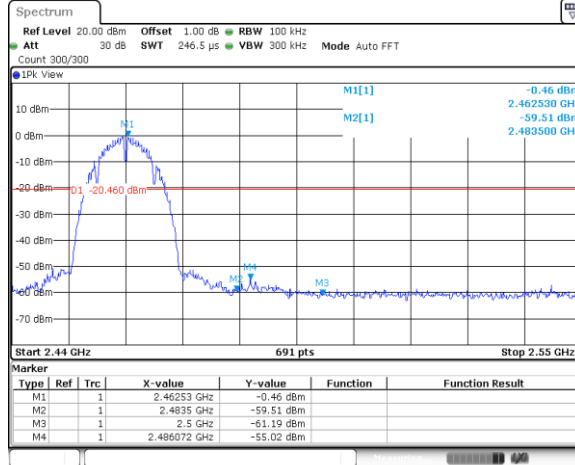


Date: 25 APR 2023 15:33:59

### 11G\_Ant1\_Low\_2412

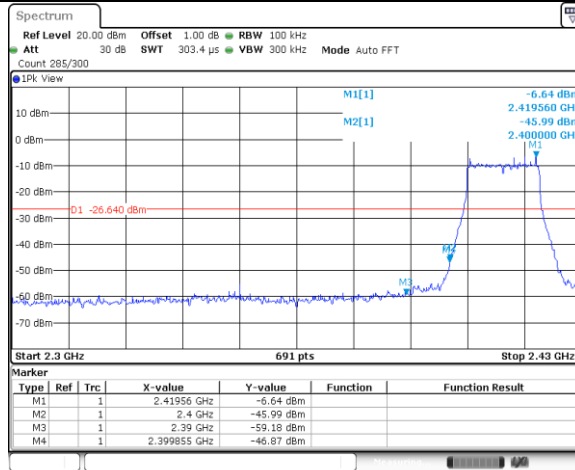


Date: 25 APR 2023 15:35:56

### 11G\_Ant1\_High\_2462

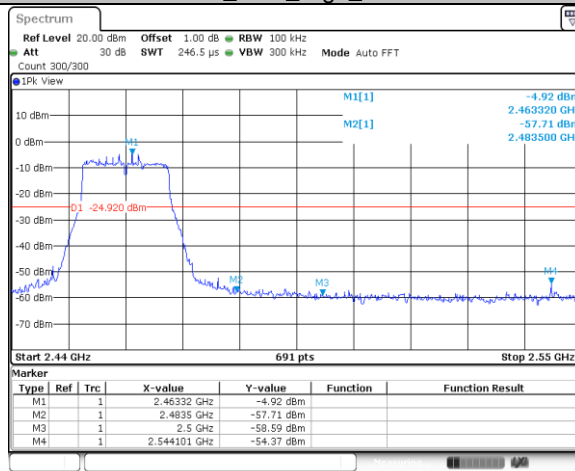


Date: 25 APR 2023 15:39:19

### 11N20SISO\_Ant1\_Low\_2412

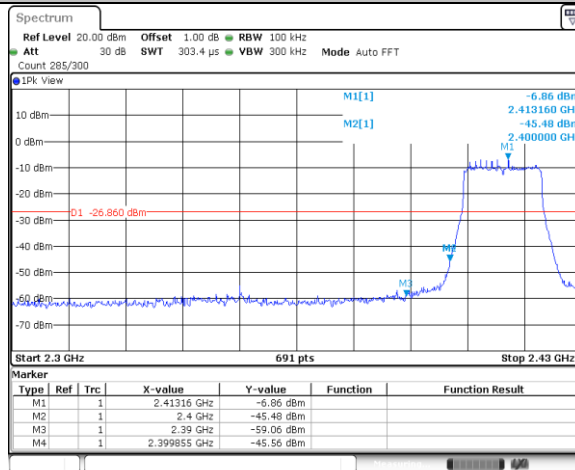


Date: 25 APR 2023 15:41:00

11N20SISO\_Ant1\_High\_2462

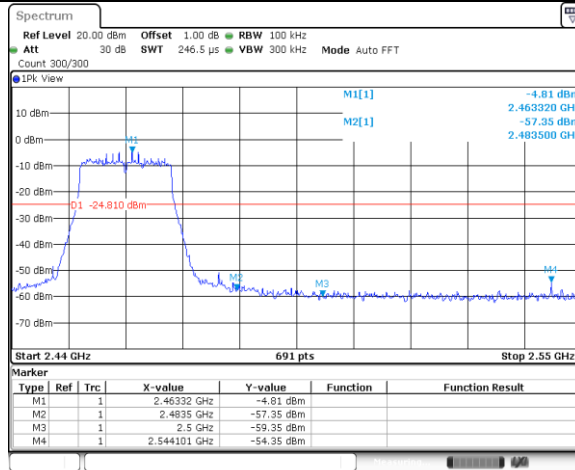


Date: 25 APR 2023 15:44:15

11N40SISO\_Ant1\_Low\_2422

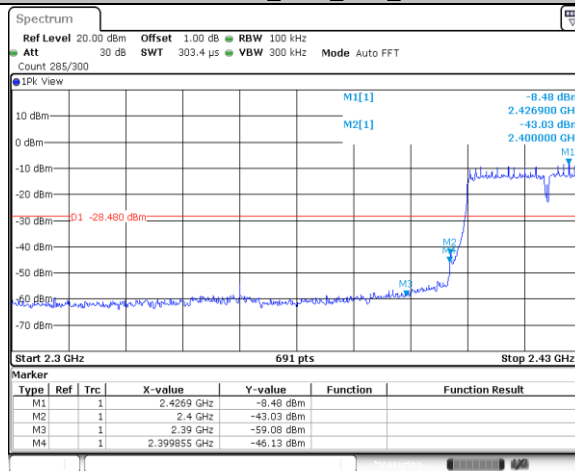

Date: 25 APR 2023 15:46:20

11N40SISO\_Ant1\_High\_2452

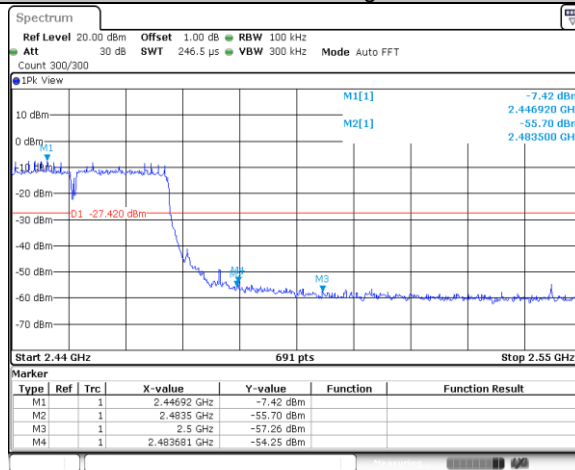

Date: 25 APR 2023 15:49:37

## 9.7 Spurious Radiated Emissions for Transmitter

### Test Method

1. The EUT was placed on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
3. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. Use the following spectrum analyzer settings According to C63.10:

#### For Below 1GHz

Use the following test receiver settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious  
 RBW = 100 KHz to 120KHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

#### For Peak unwanted emissions Above 1GHz:

Span = wide enough to capture the peak level of the in-band emission and all spurious  
 RBW = 1MHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

Procedures for average unwanted emissions measurements above 1000 MHz

a) RBW = 1MHz.

b) VBW \ [3 × RBW].

c) Detector = RMS (power averaging), if [span / (# of points in sweep)] \ RBW / 2.

Satisfying this condition can require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, then the detector mode shall be set to peak.

d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)

e) Sweep time = auto.

f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of 1 / D, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)

g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is [10 log (1 / D)], where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.



2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is  $[20 \log (1 / D)]$ , where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.

3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission (AV) at frequency above 1GHz.

## Limit

The radio emission outside the operating frequency band shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Radiated emissions which fall in the restricted bands, as defined in section 15.205 & RSS-GEN 8.10, must comply with the radiated emission limits specified in section 15.209 & RSS-Gen 6.13.

Frequency MHz	Field Strength $\mu\text{V/m}$	Field Strength dB $\mu\text{V/m}$	Detector	Measurement distance meters
0.009-0.490	2400/F(kHz)	48.5-13.8	AV	300
0.490-1.705	24000/F(kHz)	33.8-23.0	QP	30
1.705-30	30	29.5	QP	30
30-88	100	40	QP	3
88-216	150	43.5	QP	3
216-960	200	46	QP	3
960-1000	500	54	QP	3
Above 1000	500	54	AV	3
Above 1000	5000	74	PK	3


Note 1: Limit 3m(dB $\mu\text{V/m}$ )=Limit 300m(dB $\mu\text{V/m}$ )+40Log(300m/3m) (Below 30MHz)

Note 2: Limit 3m(dB $\mu\text{V/m}$ )=Limit 30m(dB $\mu\text{V/m}$ )+40Log(30m/3m) (Below 30MHz)


### Spurious Radiated Emissions for Transmitter

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

**Transmitting spurious emission test result as below:**  
30MHz – 1000MHz:

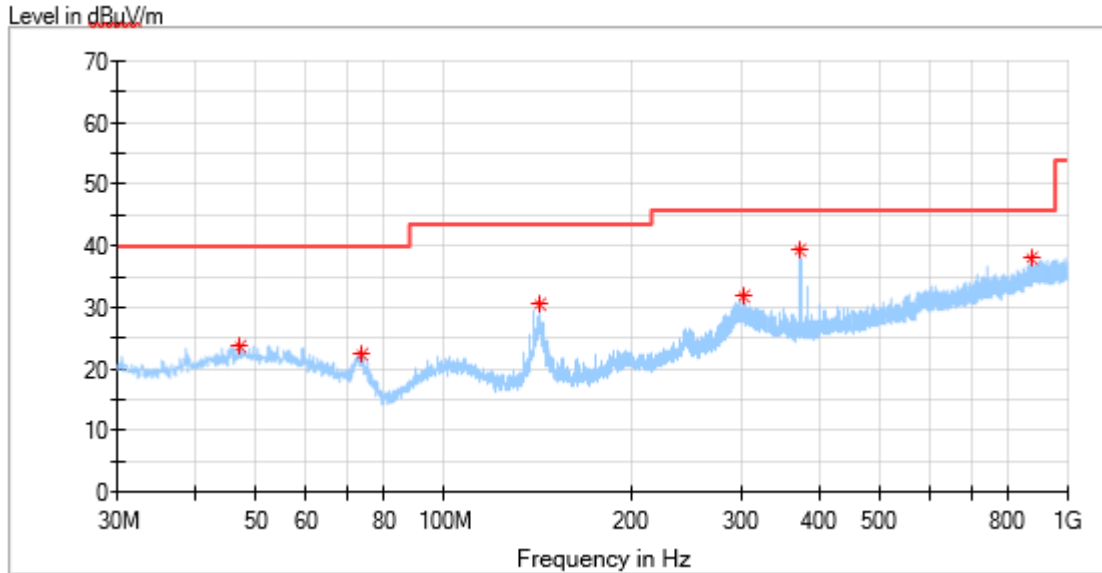


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
47.156875	23.93	40.00	16.07	200.0	H	0.0	20.53
73.892500	22.60	40.00	17.4	200.0	H	168.0	15.38
142.095625	30.47	43.50	13.03	200.0	H	219.0	15.21
301.539375	31.78	46.00	14.22	100.0	H	0.0	21.38
371.258125	39.51	46.00	6.49	100.0	H	355.0	23.02
874.809375	38.23	46.00	7.77	200.0	H	13.0	31.57

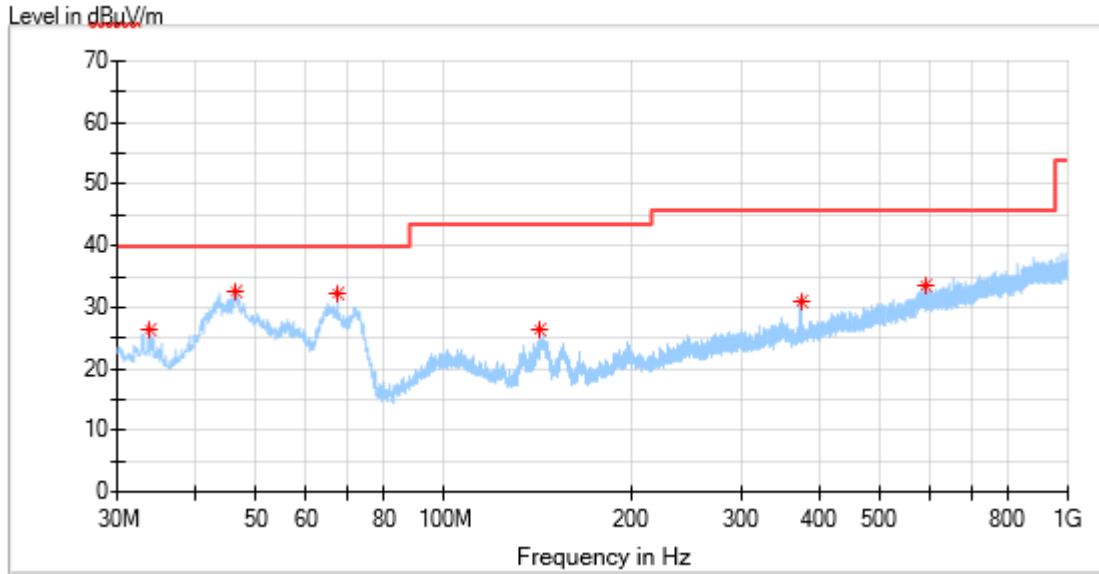


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
33.698125	26.44	40.00	13.56	100.0	V	321.0	17.64
46.490000	32.63	40.00	7.37	100.0	V	149.0	20.59
67.466250	32.30	40.00	7.70	100.0	V	244.0	17.64
142.095625	26.45	43.50	17.05	100.0	V	124.0	15.21
374.956250	30.97	46.00	15.03	200.0	V	0.0	23.11
591.751250	33.48	46.00	12.52	200.0	V	0.0	27.97

1GHz -18GHz:  
11b\_2412MHz\_Ant1:

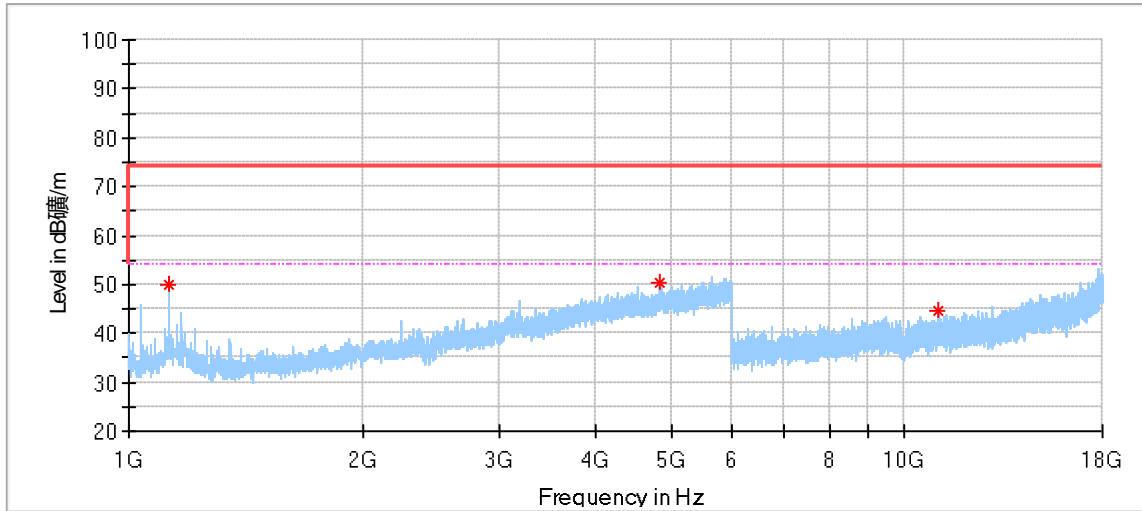


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1125.000000*	50.01	74.00	23.99	150.0	H	135.0	-12.57
4824.500000*	50.51	74.00	23.49	150.0	H	62.0	5.65
11074.000000*	44.59	74.00	29.41	150.0	H	138.0	14.07

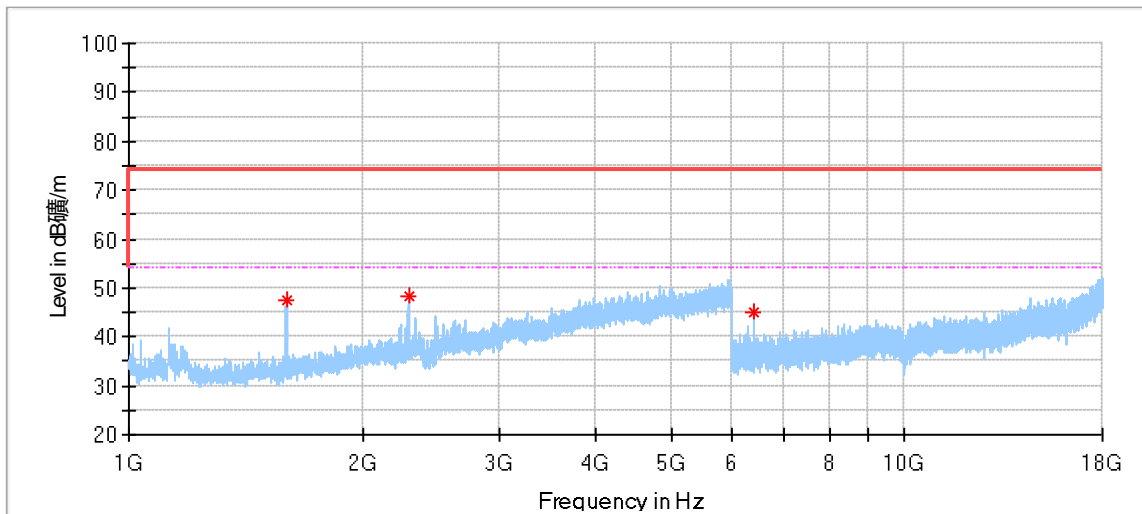


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1599.500000*	47.52	74.00	26.48	150.0	V	291.0	-9.44
2293.500000*	48.25	74.00	25.75	150.0	V	314.0	-5.52
6398.500000	44.82	74.00	29.18	150.0	V	204.0	7.42

11b\_2437MHz\_Ant1:

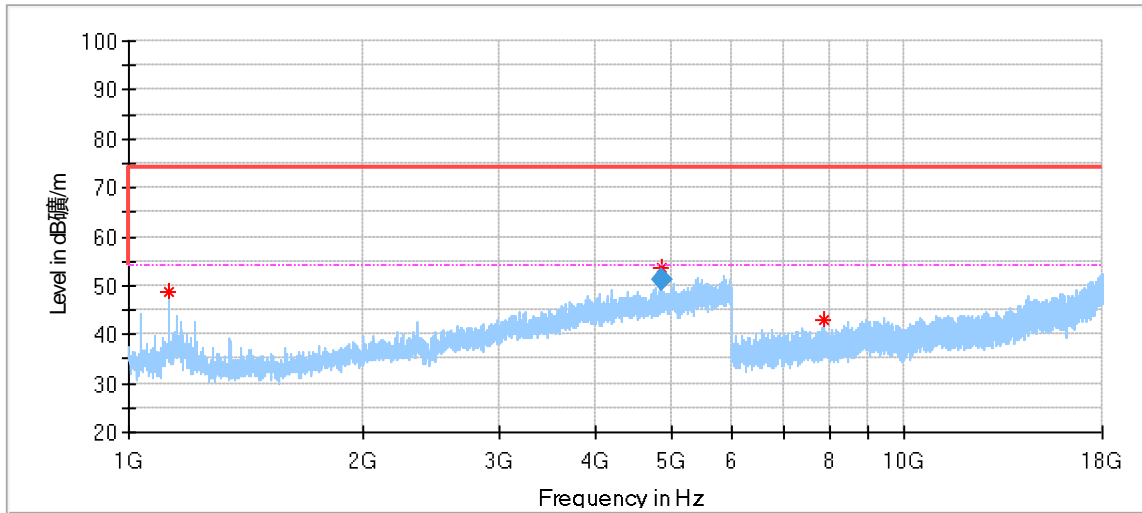


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1125.000000*	48.52	74.00	25.48	150.0	H	116.0	-12.57
4874.500000*	53.57	74.00	20.43	150.0	H	63.0	6.03
7873.500000	42.94	74.00	31.06	150.0	H	254.0	9.82
Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4874.500000*	51.22	54.00	2.78	150.0	H	63.0	6.03

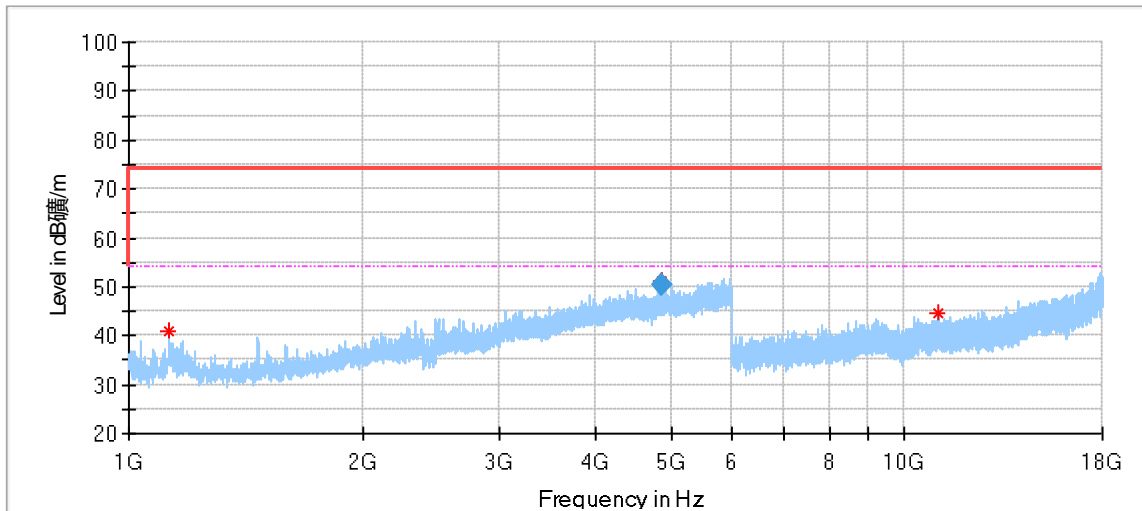

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.500000	40.87	74.00	33.13	150.0	V	249.0	-12.57
4874.500000*	51.08	74.00	22.92	150.0	V	69.0	6.03
11036.000000*	44.57	74.00	29.43	150.0	V	305.0	14.00
Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4874.500000*	50.24	54.00	3.76	150.0	V	69.0	6.03


11b\_2462MHz\_Ant1:

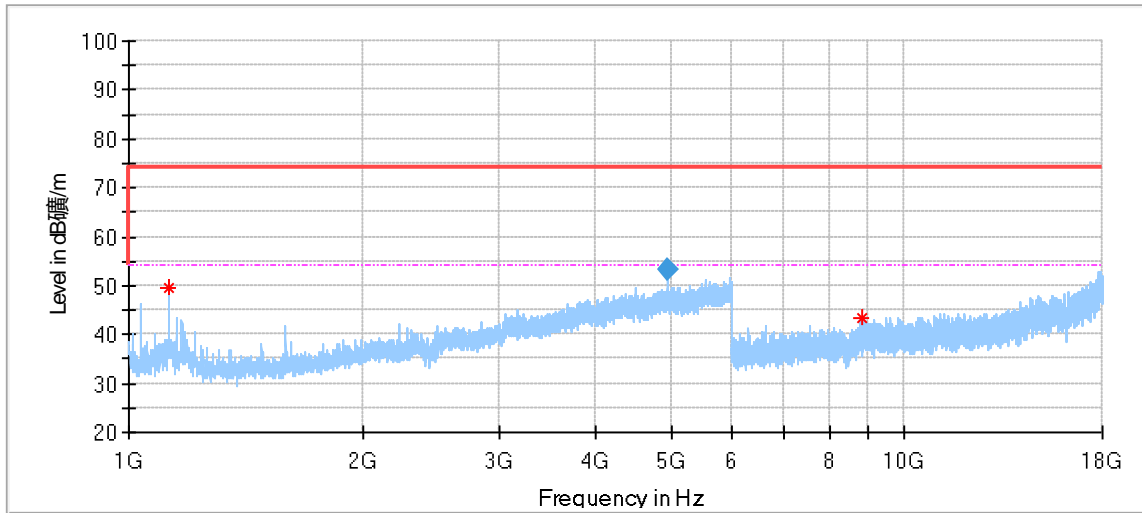

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1125.000000*	49.35	74.00	24.65	150.0	H	135.0	-12.57
4944.500000*	53.79	74.00	20.21	150.0	H	55.0	6.25
8822.500000	43.20	74.00	30.80	150.0	H	245.0	12.36


  

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4944.500000*	53.24	54.00	0.76	150.0	H	55.0	6.25

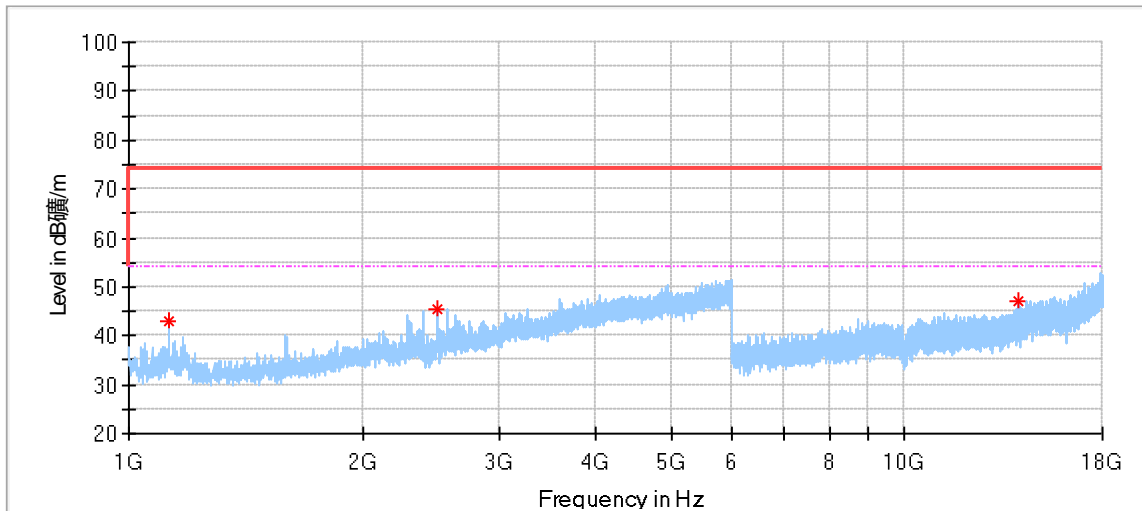


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.500000*	42.86	74.00	31.14	150.0	V	181.0	-12.57
2498.500000*	45.47	74.00	28.53	150.0	V	267.0	-4.45
13998.500000	46.98	74.00	27.02	150.0	V	250.0	16.57

11g\_2412MHz\_Ant1:

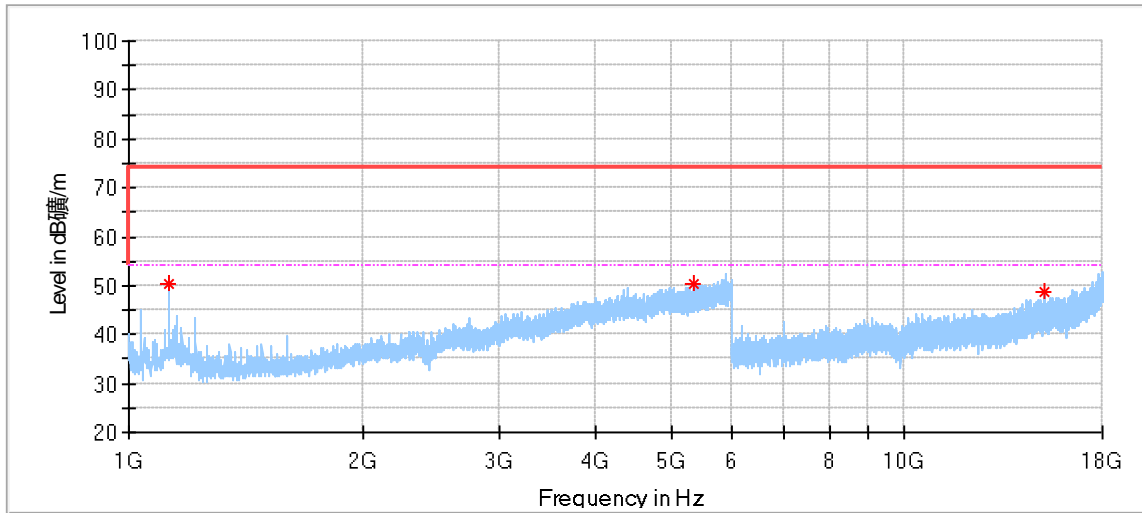


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1125.000000*	50.43	74.00	23.57	150.0	H	136.0	-12.57
5336.500000	50.46	74.00	23.54	150.0	H	245.0	6.76
15161.500000	48.89	74.00	25.11	150.0	H	237.0	19.59

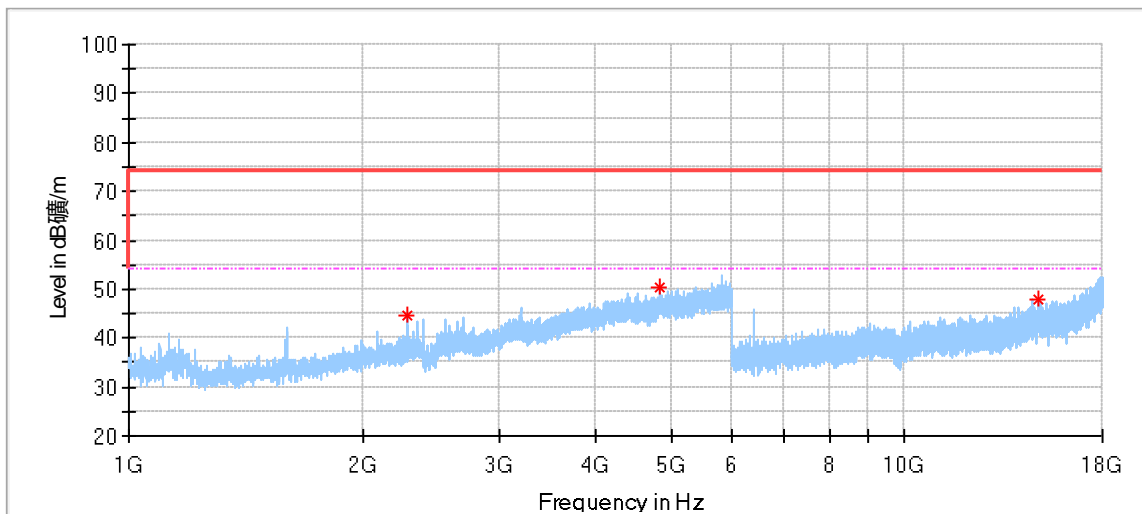


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2291.000000*	44.65	74.00	29.35	150.0	V	251.0	-5.55
4839.500000*	50.28	74.00	23.72	150.0	V	251.0	5.79
14898.500000	47.97	74.00	26.03	150.0	V	248.0	19.25

11g\_2437MHz\_Ant1:

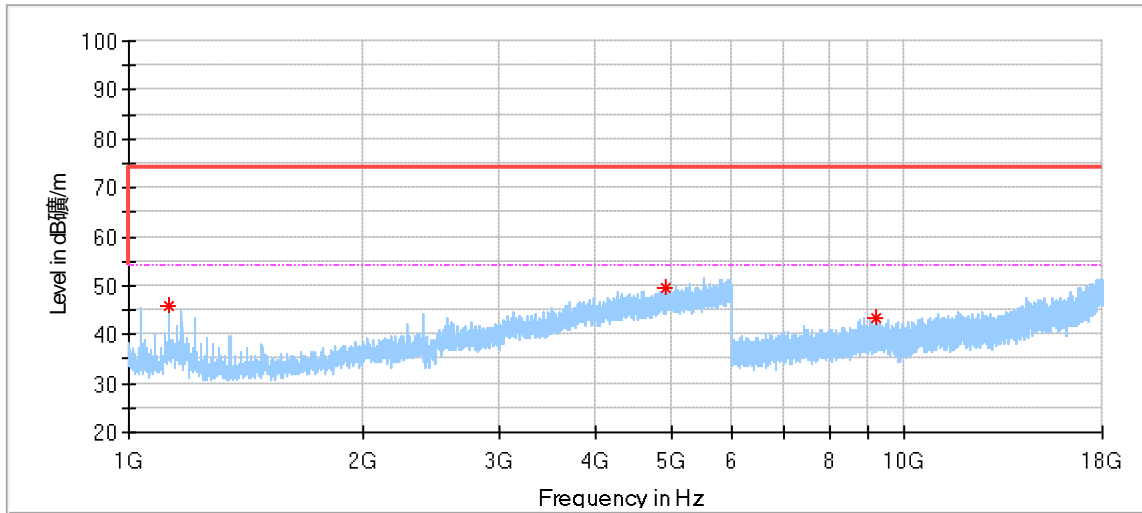


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1125.000000*	45.86	74.00	28.14	150.0	H	124.0	-12.57
4912.500000*	49.71	74.00	24.29	150.0	H	138.0	6.24
9166.500000*	43.39	74.00	30.61	150.0	H	195.0	12.46

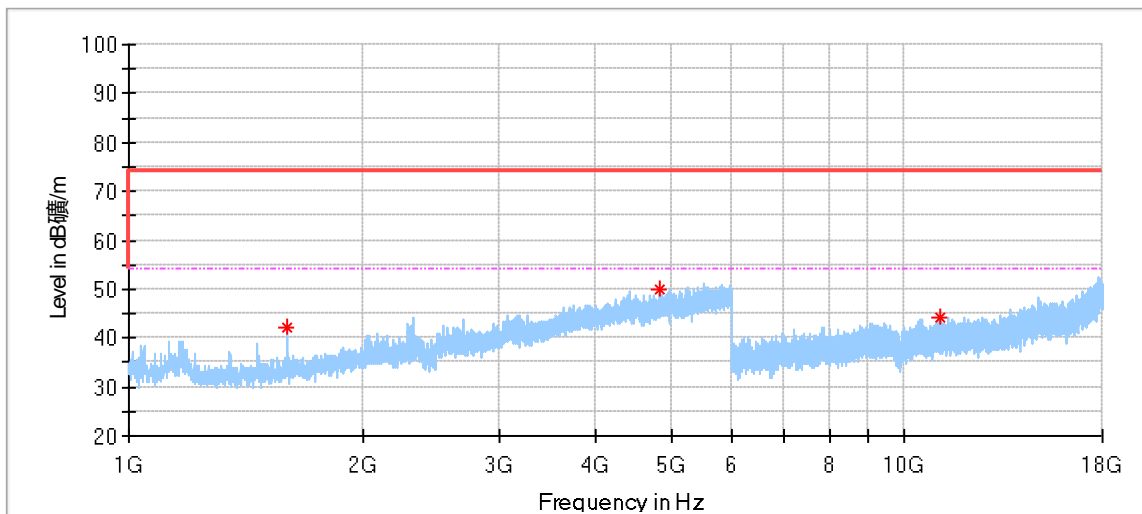


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1600.000000*	42.19	74.00	31.81	150.0	V	314.0	-9.44
4846.500000*	49.75	74.00	24.25	150.0	V	103.0	5.86
11092.000000*	44.34	74.00	29.66	150.0	V	341.0	14.10



11g\_2462MHz\_Ant1:

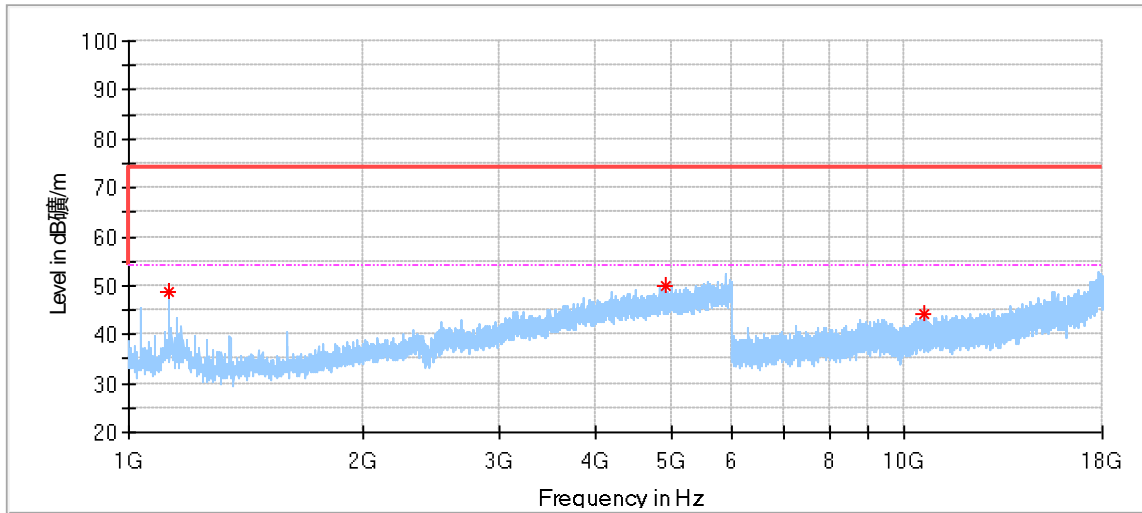


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1125.000000*	48.69	74.00	25.31	150.0	H	130.0	-12.57
4921.000000*	50.09	74.00	23.91	150.0	H	49.0	6.25
10592.000000	44.08	74.00	29.92	150.0	H	91.0	13.36

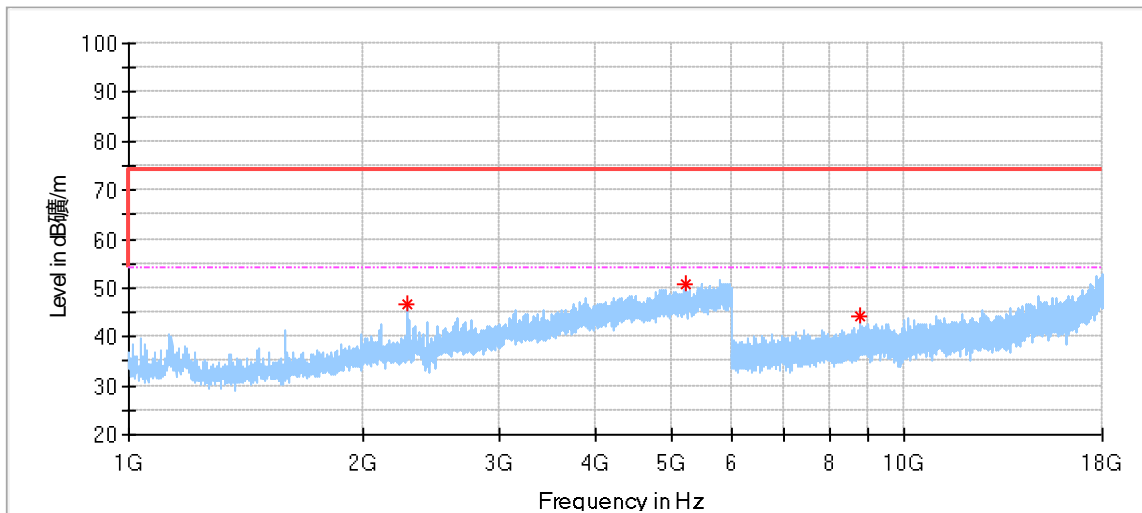


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2290.000000*	46.77	74.00	27.23	150.0	V	244.0	-5.56
5213.000000	50.79	74.00	23.21	150.0	V	306.0	6.44
8766.000000	44.14	74.00	29.86	150.0	V	109.0	12.12

11n20\_2412MHz\_Ant1:

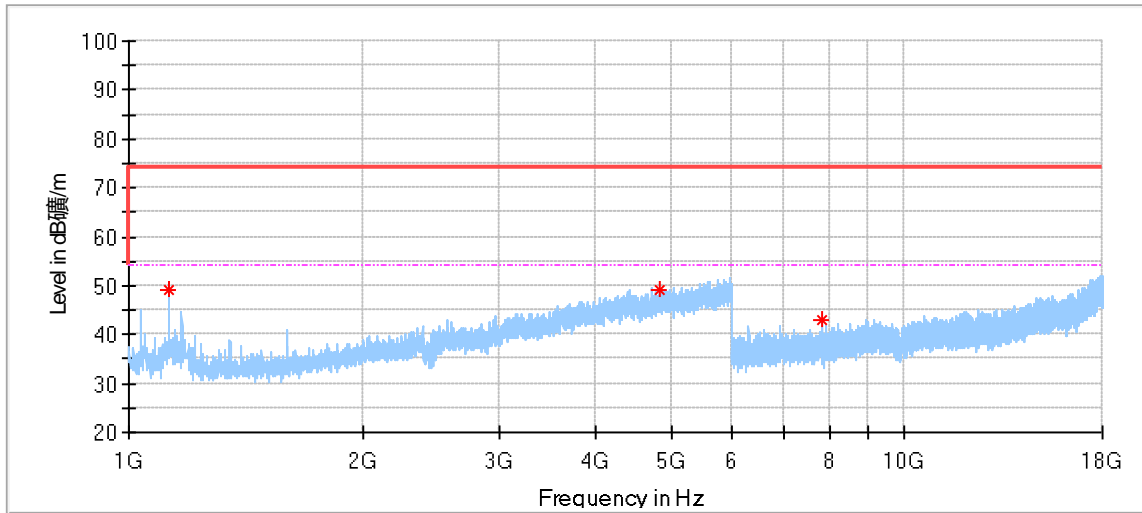


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1125.000000*	48.99	74.00	25.01	150.0	H	118.0	-12.57
4830.500000*	49.12	74.00	24.88	150.0	H	124.0	5.71
7823.500000	43.05	74.00	30.95	150.0	H	52.0	9.88

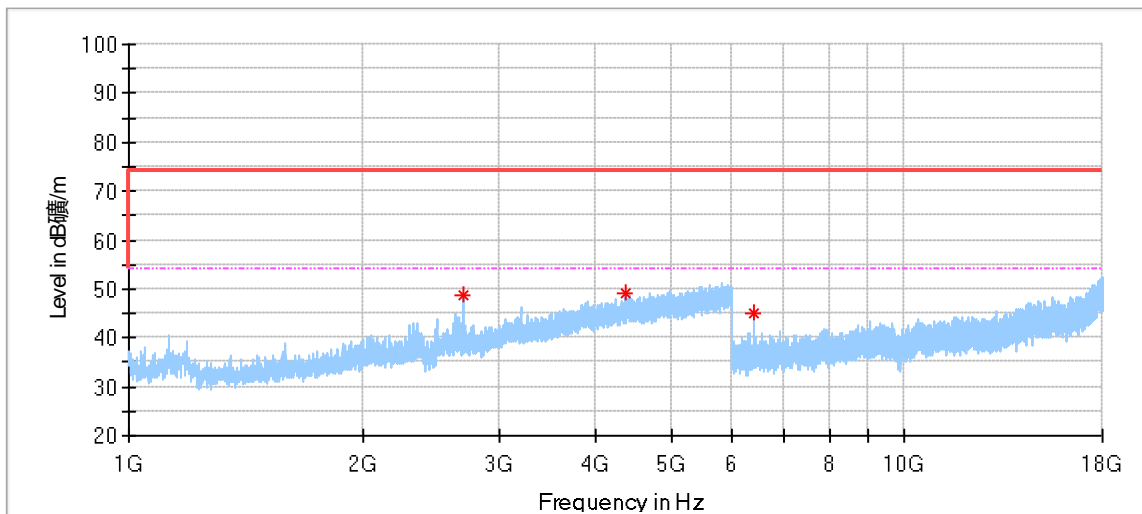


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2693.500000*	48.54	74.00	25.46	150.0	V	267.0	-3.35
4363.000000	49.07	74.00	24.93	150.0	V	251.0	4.36
6398.500000	44.94	74.00	29.06	150.0	V	200.0	7.42

11n20\_2437MHz\_Ant1:

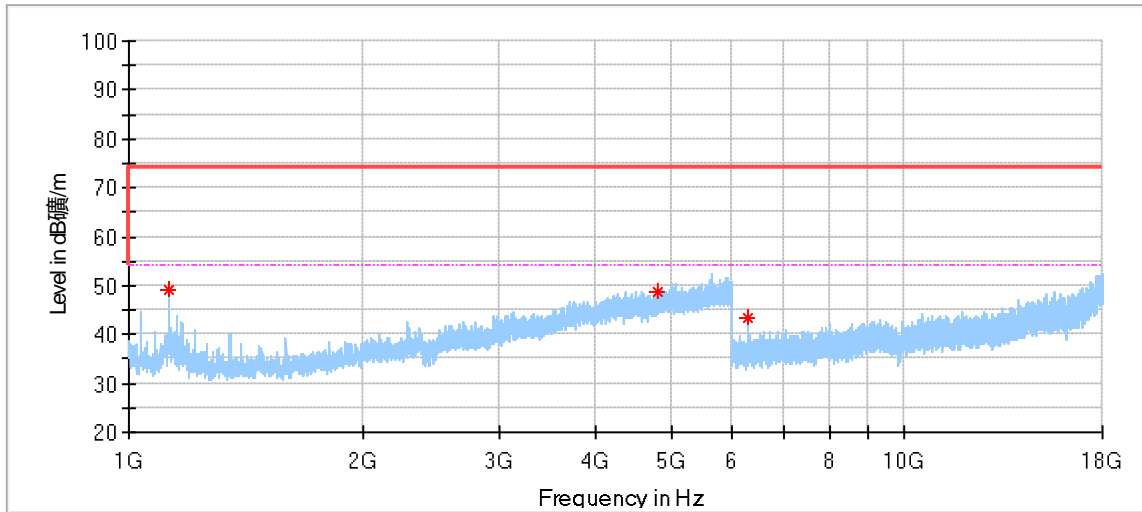


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1125.000000*	49.01	74.00	24.99	150.0	H	149.0	-12.57
4793.500000*	48.87	74.00	25.13	150.0	H	205.0	5.36
6300.000000	43.38	74.00	30.62	150.0	H	4.0	7.68

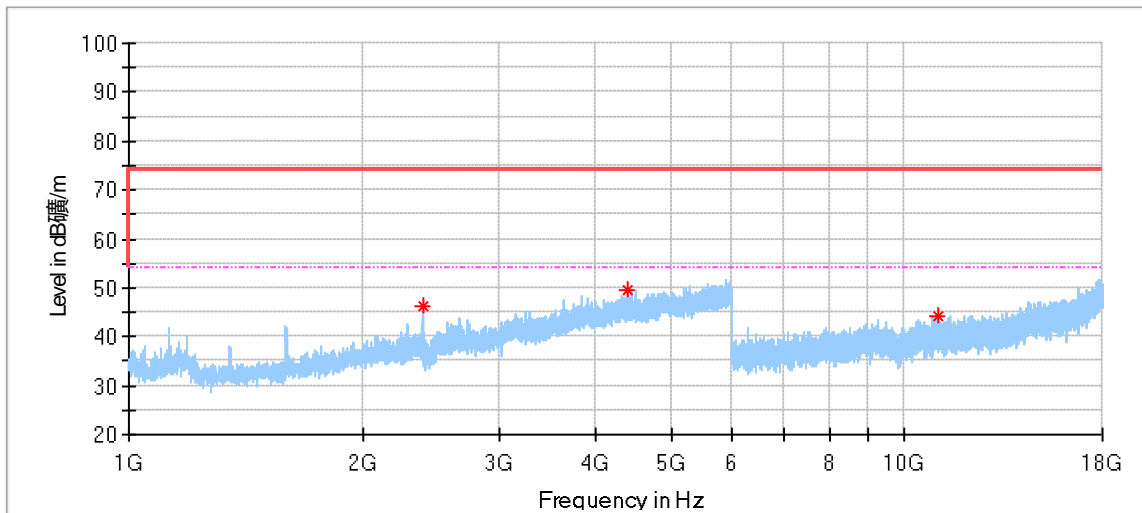


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2390.000000*	46.28	74.00	27.72	150.0	V	322.0	-4.91
4404.500000	49.57	74.00	24.43	150.0	V	5.0	4.53
11037.000000*	44.07	74.00	29.93	150.0	V	269.0	14.00

11n20\_2462MHz\_Ant1:

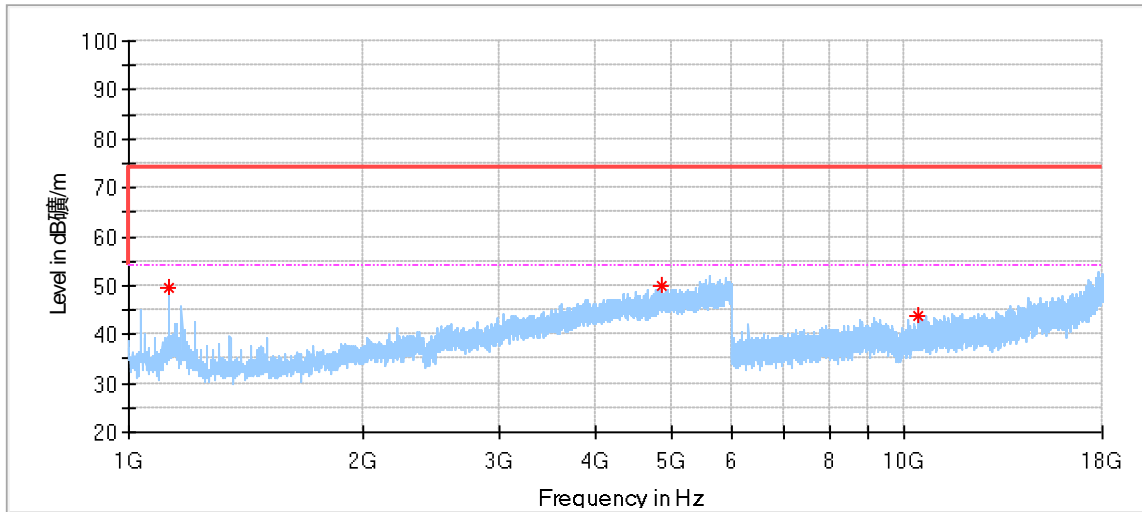


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1125.000000*	49.40	74.00	24.60	150.0	H	136.0	-12.57
4854.000000*	49.77	74.00	24.23	150.0	H	164.0	5.92
10405.000000	43.85	74.00	30.15	150.0	H	234.0	13.10

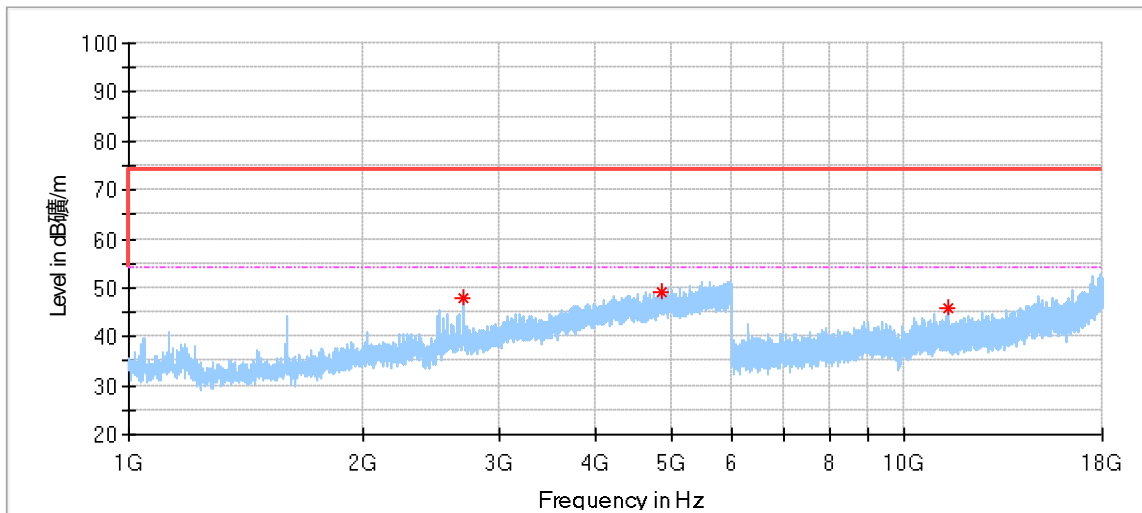


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2696.000000*	47.91	74.00	26.09	150.0	V	275.0	-3.35
4869.500000*	49.29	74.00	24.71	150.0	V	158.0	6.01
11406.000000*	45.89	74.00	28.11	150.0	V	107.0	14.50

18GHz -40GHz:  
11n20\_2412MHz:

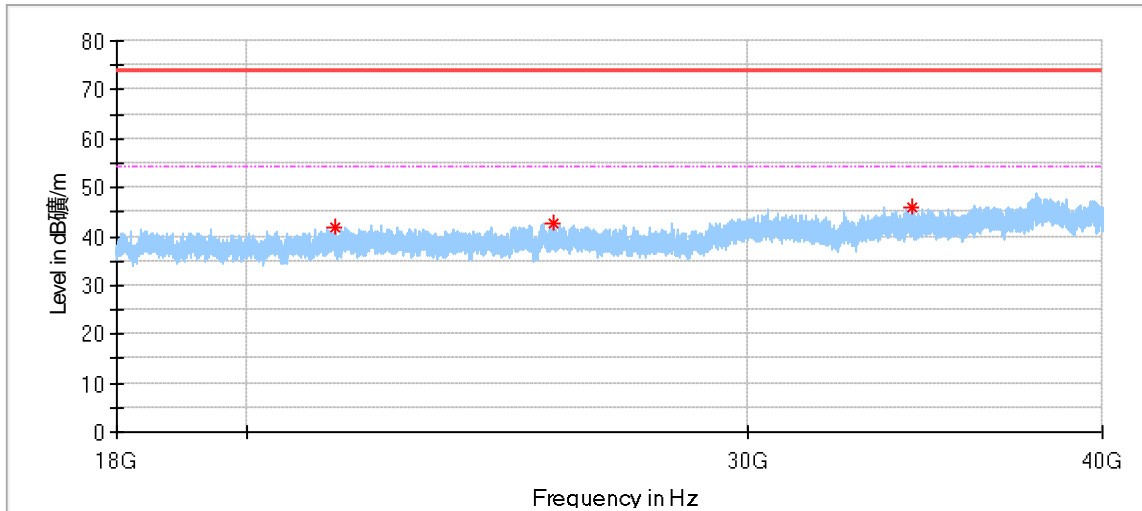


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
21471.187500	41.96	74.00	32.04	150.0	H	339.0	-0.45
25625.750000	42.87	74.00	31.13	150.0	H	172.0	1.61
34301.312500	45.90	74.00	28.10	150.0	H	279.0	3.64

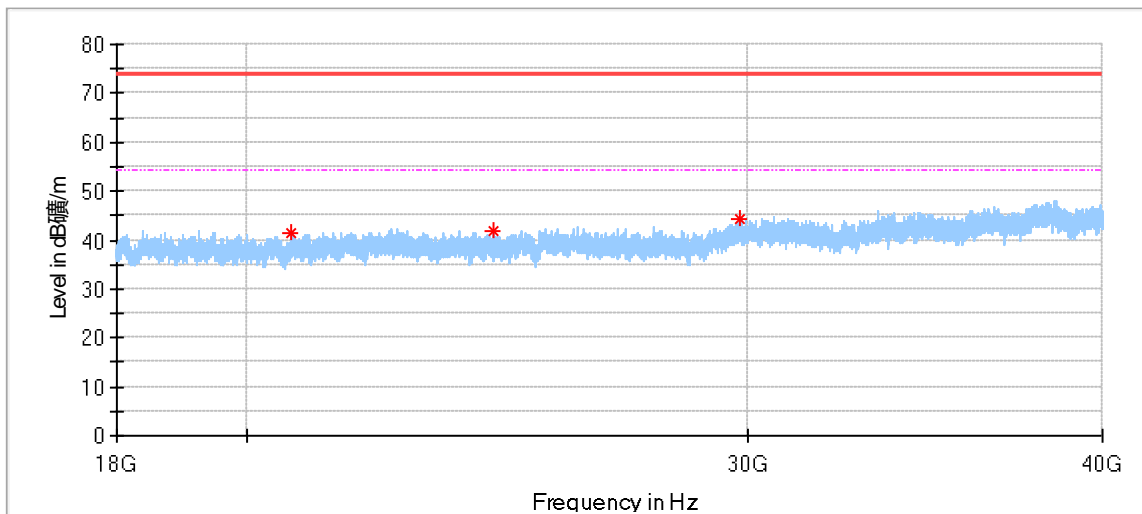


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
20743.125000	41.28	74.00	32.72	150.0	V	312.0	-1.22
24431.562500	41.78	74.00	32.22	150.0	V	158.0	0.64
29798.875000	44.24	74.00	29.76	150.0	V	345.0	2.00

11n20\_2437MHz

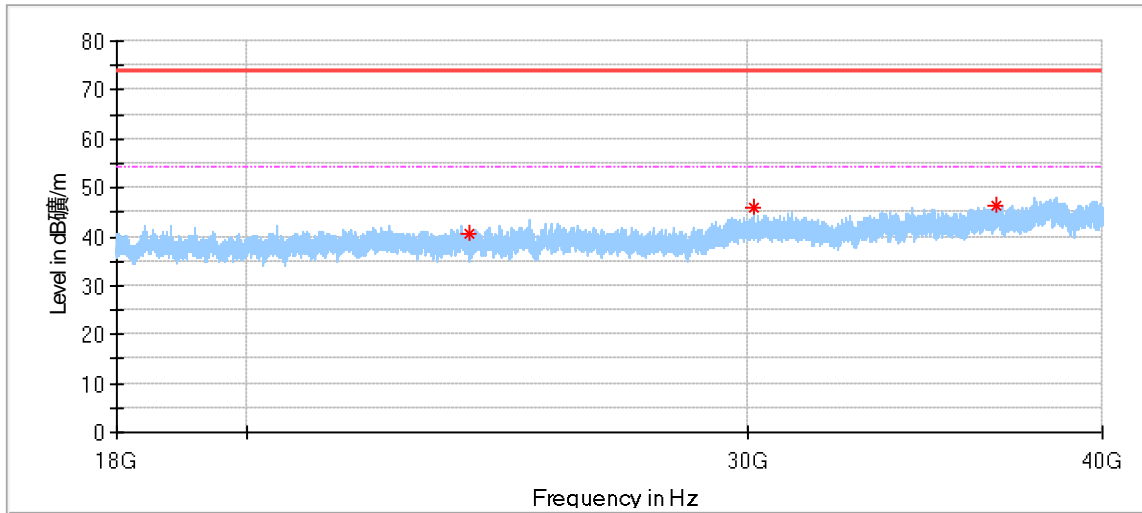


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
23946.187500*	40.54	74.00	33.46	150.0	H	249.0	0.64
30171.500000	46.07	74.00	27.93	150.0	H	234.0	2.08
36708.937500	46.19	74.00	27.81	150.0	H	142.0	4.42

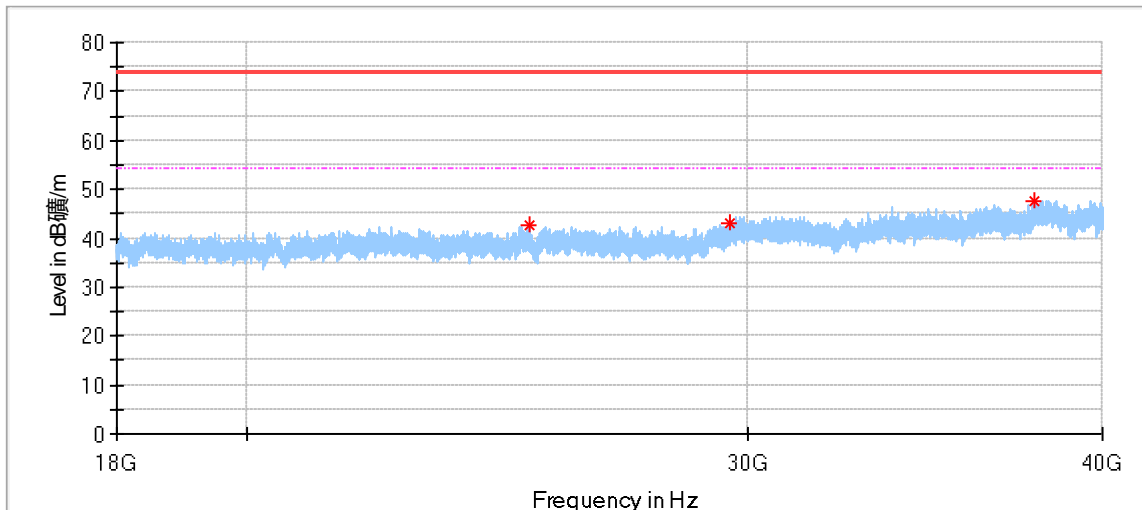


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
25163.750000	42.58	74.00	31.42	150.0	V	4.0	1.26
29583.687500	42.88	74.00	31.12	150.0	V	143.0	1.86
37835.750000	47.70	74.00	26.30	150.0	V	204.0	4.75

11n20\_2462MHz

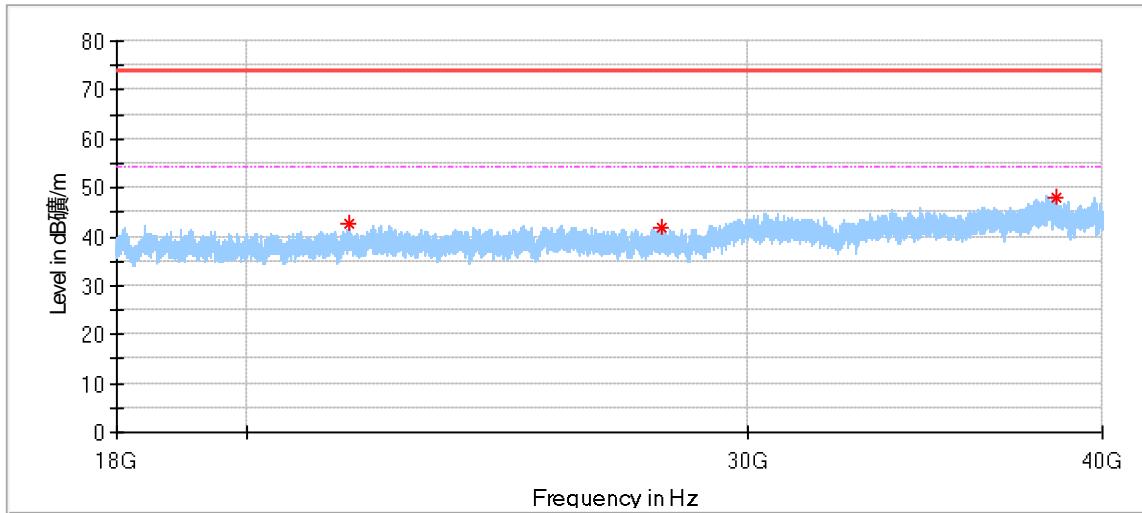

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
21735.875000	42.78	74.00	31.22	150.0	H	7.0	-0.20
27992.812500	41.85	74.00	32.15	150.0	H	188.0	1.24
38512.937500	48.09	74.00	25.91	150.0	H	295.0	6.52

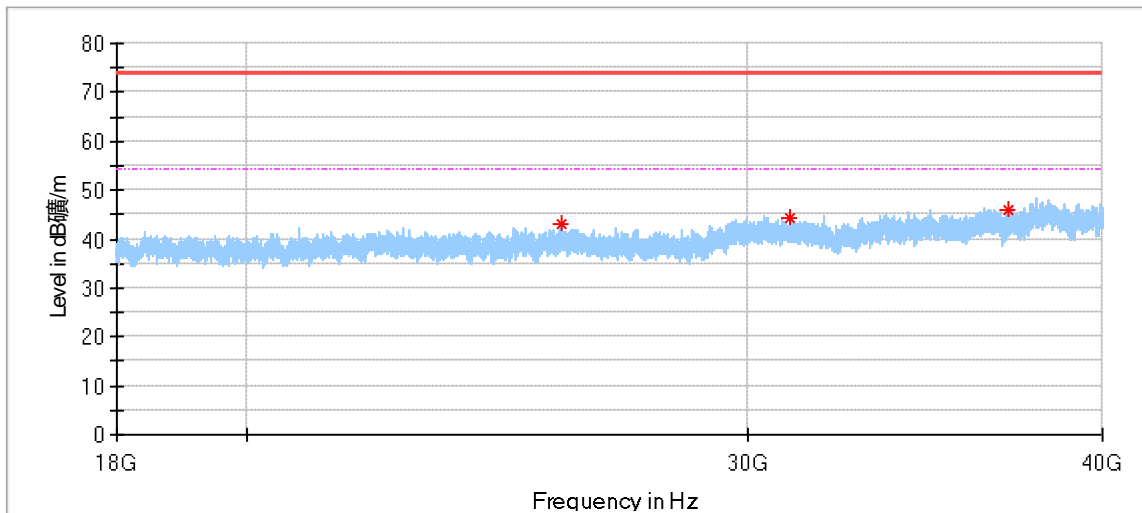

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
25803.125000	42.98	74.00	31.02	150.0	V	359.0	1.71
31066.625000	44.35	74.00	29.65	150.0	V	157.0	1.52
37072.625000	45.96	74.00	28.04	150.0	V	0.0	4.03

Remark:

- (1) "\*" means the emission(s) appear within the restrict bands shall follow the requirement of section 15.205 & RSS-GEN 8.10.
- (2) Data of measurement within frequency range 9kHz-30MHz are the noise floor or attenuated more than 20dB below the permissible limits or the field strength is too small to be measured, so test data does not present in this report.
- (3) Corrected Amplitude = Read level + Corrector factor  
 Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain  
 Below 1GHz: Corrector factor = Antenna Factor + Cable Loss

## 10 Test Equipment List

### Radiated Emission Test

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 26	68-4-74-14-002	101269	1	2023-5-28
Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9162	68-4-80-19-003	284	1	2023-7-12
Loop Antenna	Rohde & Schwarz	HFH2-Z2	68-4-80-14-006	100398	1	2023-8-17
Wave Guide Antenna	ETS	3117	68-4-80-19-001	00218954	1	2023-5-9
Pre-amplifier	Rohde & Schwarz	SCU 18F	68-4-29-19-001	100745	1	2023-5-28
Pre-amplifier	Rohde & Schwarz	SCU 18F	68-4-29-19-002	100746	1	2023-5-28
Sideband Horn Antenna	Q-PAR	QWH-SL-18-40-K-SG	68-4-80-14-008	12827	1	2023-7-12
Pre-amplifier	Rohde & Schwarz	SCU 40A	68-4-29-14-002	100432	1	2023-7-27
Attenuator	Mini-circuits	UNAT-6+	68-4-81-21-002	15542	1	2023-5-27
3m Semi-anechoic chamber	TDK	SAC-3 #2	68-4-90-19-006	----	2	2023-5-28
Test software	Rohde & Schwarz	EMC32	68-4-90-19-006-A01	Version10.3 5.02	N/A	N/A

### Conducted Emission Test

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 3	68-4-74-19-002	102590	1	2023-5-27
LISN	Rohde & Schwarz	ENV216	68-4-87-19-001	102472	1	2023-5-27
Attenuator	Shanghai Huaxiang	TS2-26-3	68-4-81-16-003	080928189	1	2023-5-27
Test software	Rohde & Schwarz	EMC32	68-4-90-19-005-A01	Version10.35. 02	N/A	N/A
Shielding Room	TDK	CSR #2	68-4-90-19-005	----	3	2025-10-15

### Conducted RF Test System

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
Signal Analyzer	Rohde & Schwarz	FSV40	68-4-74-14-004	101030	1	2023-5-27
RF Switch Module	Rohde & Schwarz	OSP120/OS P-B157	68-4-93-14-003	101226/10085 1	1	2023-5-27
Power Splitter	Weinschel	1580	68-4-85-14-001	SC319	1	2023-5-28
10dB Attenuator	Weinschel	4M-10	68-4-81-14-003	43152	1	2023-5-28
10dB Attenuator	R&S	DNF	68-4-81-14-004	DNF-001	1	2023-5-27
10dB Attenuator	R&S	DNF	68-4-81-14-005	DNF-002	1	2023-5-27
10dB Attenuator	R&S	DNF	68-4-81-14-006	DNF-003	1	2023-5-27
10dB Attenuator	R&S	DNF	68-4-81-14-007	DNF-004	1	2023-5-27
Test software	Tonscend	System for BT/WIFI	68-4-74-14-006-A13	Version 2.6.77.0518	N/A	N/A
Shielding Room	TDK	TS8997	68-4-90-19-003	----	3	2025-10-15



## 11 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

System Measurement Uncertainty	
Test Items	Extended Uncertainty
Uncertainty for Conducted Emission 150kHz-30MHz (for test using AMN ENV432 or ENV4200)	3.57dB
Uncertainty for Radiated Emission in 3m chamber 9kHz-30MHz	4.70dB
Uncertainty for Radiated Emission in new 3m chamber (68-4-90-19-006) 30MHz-1000MHz	Horizontal: 4.59dB; Vertical: 4.75dB
Uncertainty for Radiated Emission in new 3m chamber (68-4-90-19-006) 1000MHz-18000MHz	Horizontal: 5.08dB; Vertical: 5.09dB;
Uncertainty for Radiated Emission 18000MHz-40000MHz	Horizontal: 4.52dB; Vertical: 4.51dB
Uncertainty for Conducted RF test	RF Power Conducted: 1.31dB Frequency test involved: 0.6×10 <sup>-8</sup> or 1%

Measurement Uncertainty Decision Rule:

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115: 2007, clause 4.4.3 and 4.5.1.