



## Appendix B: Test Results of Bluetooth BR & EDR

APPENDIX B: TEST RESULTS OF BLUETOOTH BR & EDR .....	1
APPENDIX B.1: TEST RESULTS OF 99% BANDWIDTH .....	2
APPENDIX B.2: TEST RESULTS OF 20dB BANDWIDTH.....	5
APPENDIX B.3: TEST RESULTS OF CARRIER FREQUENCY SEPARATION .....	8
APPENDIX B.4: TEST RESULTS OF NUMBER OF HOPPING FREQUENCY .....	9
APPENDIX B.5: TEST RESULTS OF TIME OF OCCUPANCY.....	10
APPENDIX B.6: TEST RESULTS OF CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 kHz BANDWIDTH.....	15
<i>Conducted Spurious Emission</i> .....	15
<i>Band Edge</i> .....	22
APPENDIX B.7: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS .....	27
30 MHz - 1GHz.....	27
1GHz - 18GHz.....	29
APPENDIX B.8: TEST RESULTS OF RADIATED EMISSIONS IN RESTRICTED BANDS .....	41

**Appendix B.1: Test Results of 99% Bandwidth**

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.80437	2401.5833	2402.3877	---	PASS
		2441	0.81039	2440.5800	2441.3904	---	PASS
		2480	0.80820	2479.5787	2480.3869	---	PASS
3DH5	Ant1	2402	1.1966	2401.3817	2402.5783	---	PASS
		2441	1.1838	2440.3892	2441.5730	---	PASS
		2480	1.2070	2479.3736	2480.5806	---	PASS

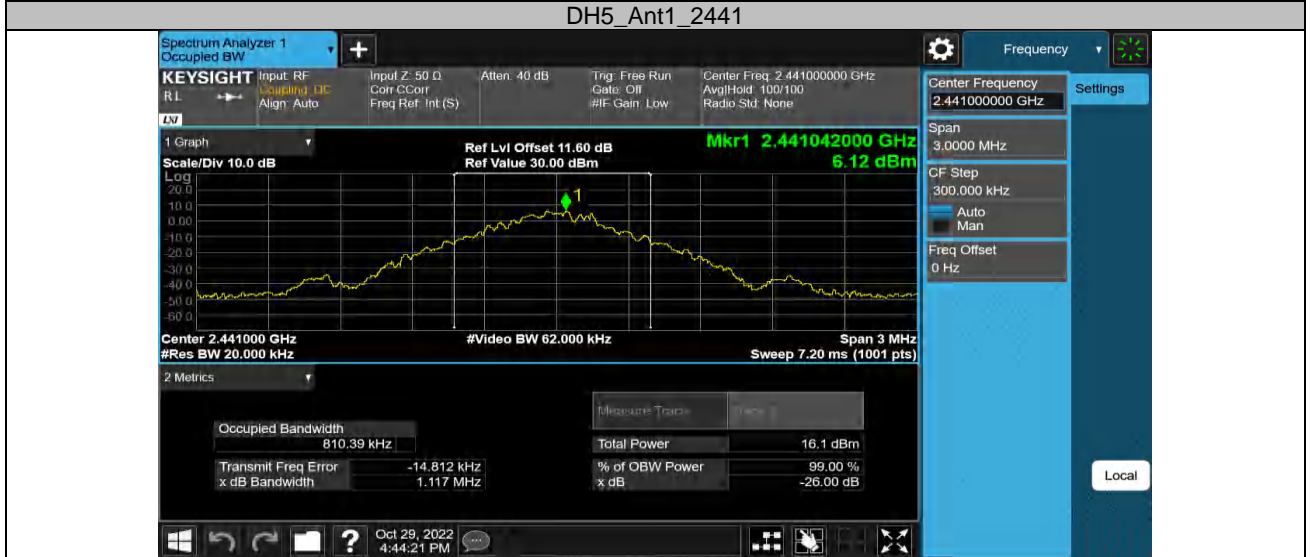

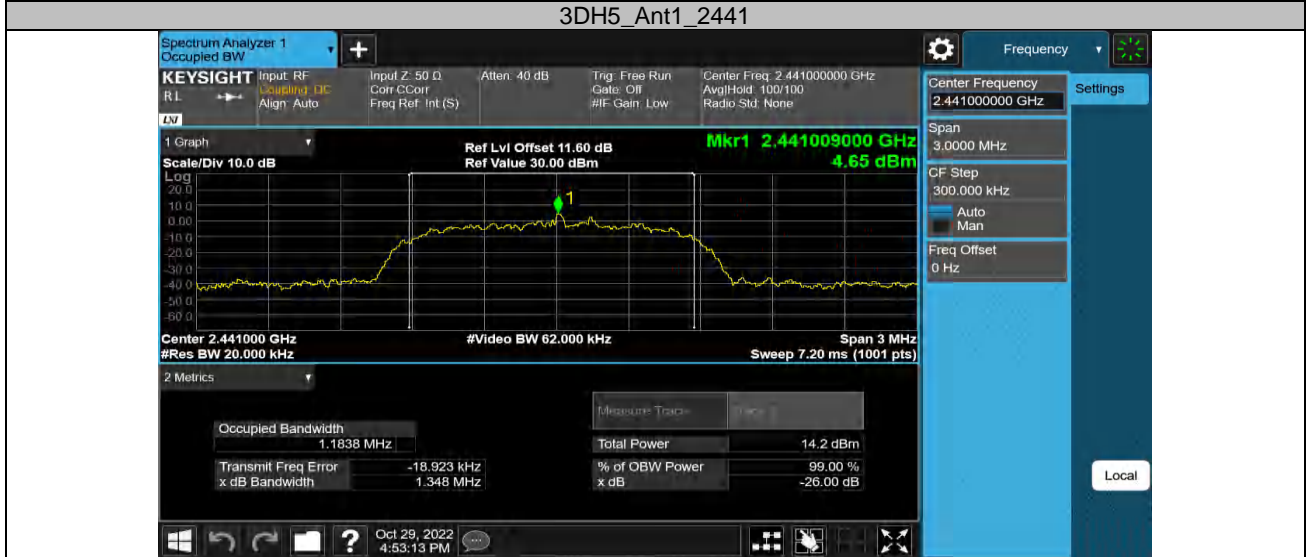


**Appendix B.2: Test Results of 20dB Bandwidth**



TestMode	Antenna	Channel	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.879	2401.538	2402.417	---	PASS
		2441	0.861	2440.529	2441.390	---	PASS
		2480	0.858	2479.532	2480.390	---	PASS
3DH5	Ant1	2402	1.272	2401.337	2402.609	---	PASS
		2441	1.263	2440.343	2441.606	---	PASS
		2480	1.266	2479.337	2480.603	---	PASS

# Appendix B CN23IYRN 001



Prüfbericht - Produkte  
Test Report - Products

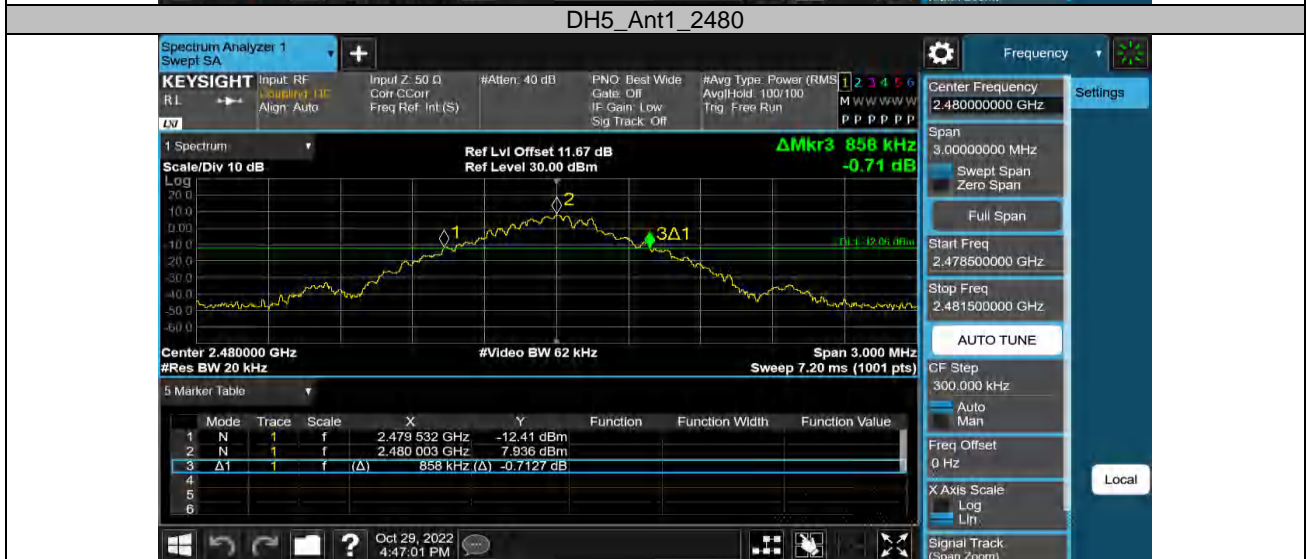

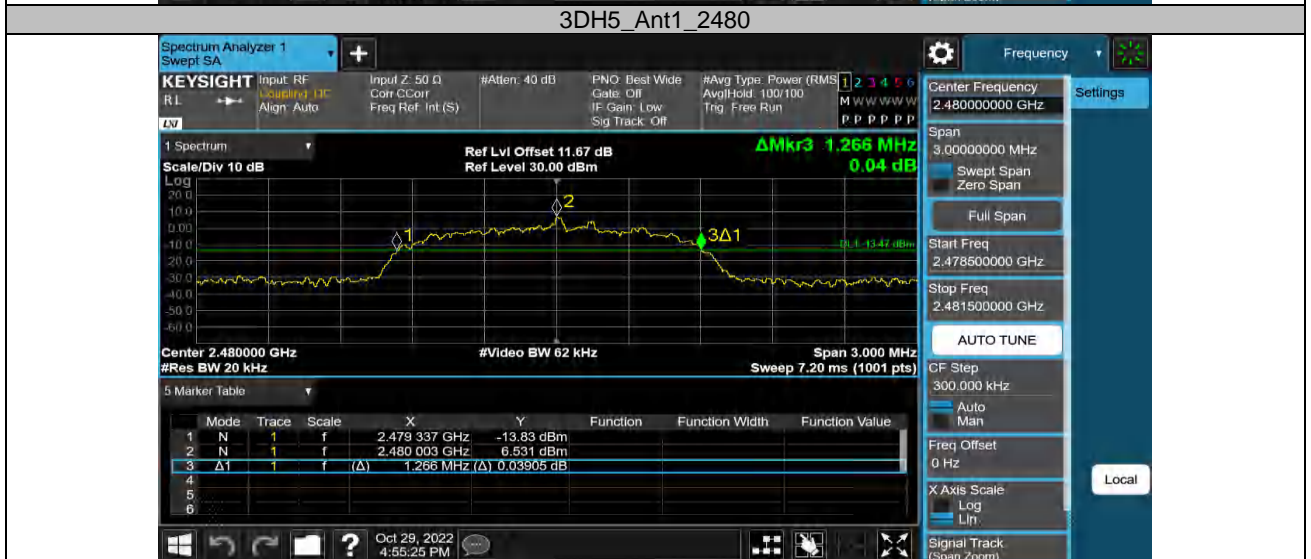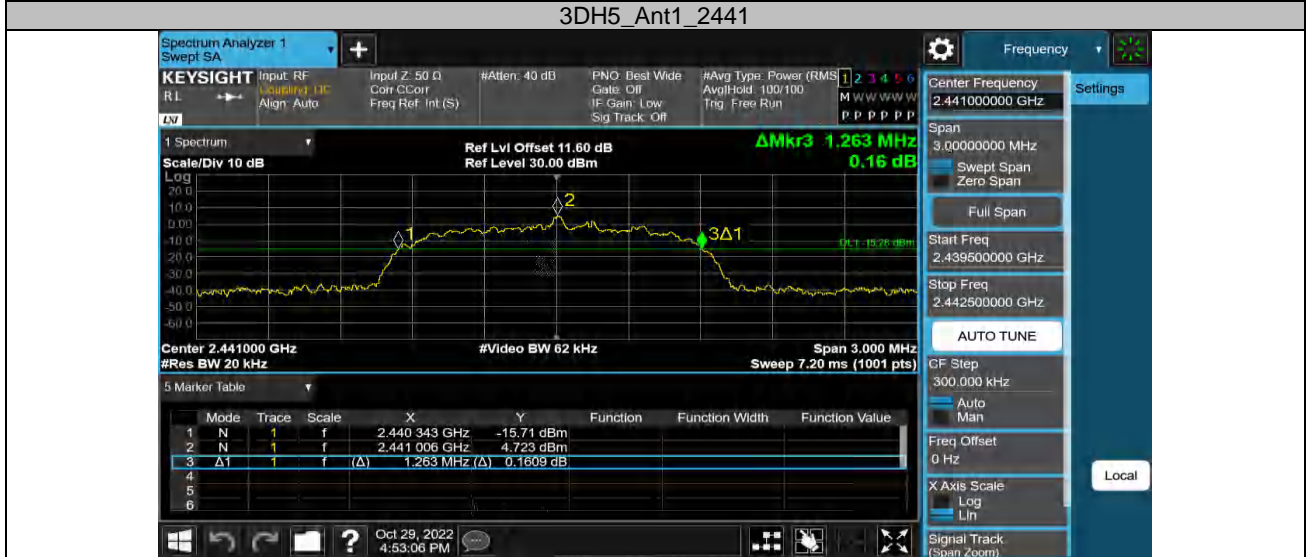

### Appendix B.3: Test Results of Carrier Frequency Separation



TestMode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	1.308	≥0.879	PASS
3DH5	Ant1	Hop	1.02	≥0.848	PASS






### Appendix B.4: Test Results of Number of Hopping Frequency

TestMode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS

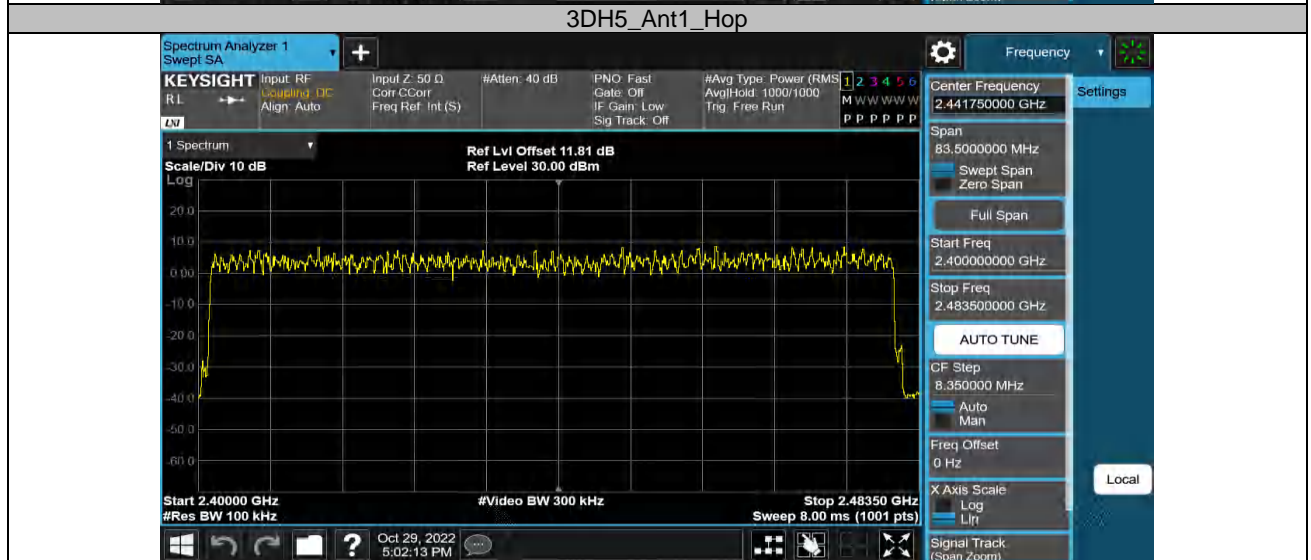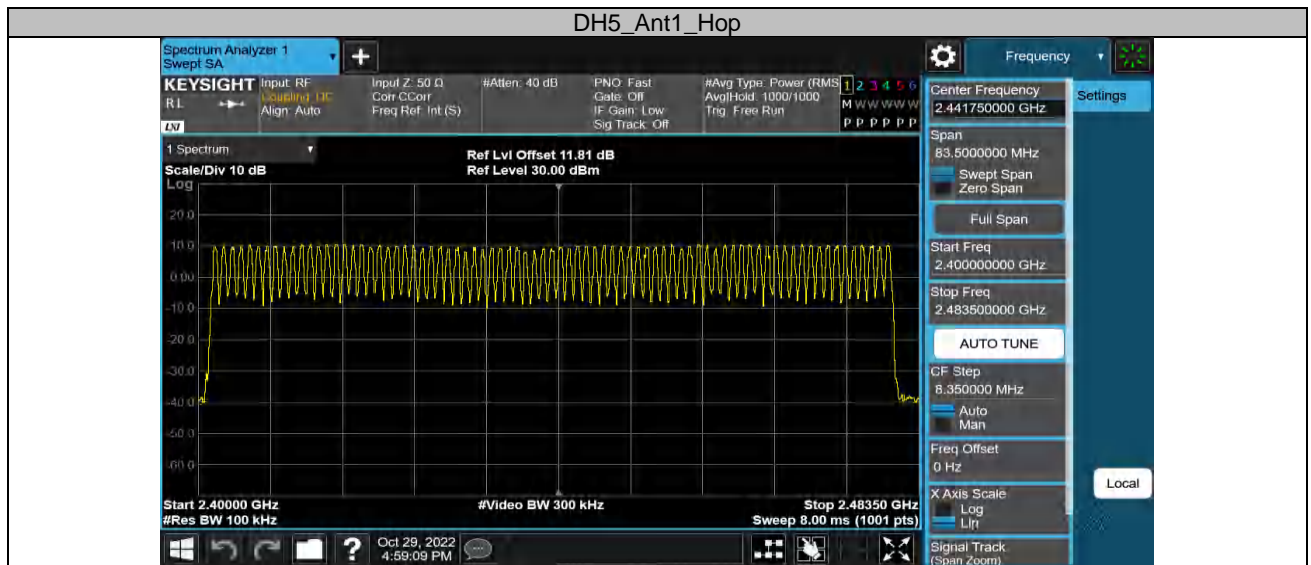


**Appendix B.5: Test Results of Time of Occupancy**


TestMode	Antenna	Channel	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.399	316	0.126	≤0.4	PASS
DH3	Ant1	Hop	1.656	154	0.255	≤0.4	PASS
DH5	Ant1	Hop	2.902	107	0.311	≤0.4	PASS
3DH1	Ant1	Hop	0.405	318	0.129	≤0.4	PASS
3DH3	Ant1	Hop	1.656	166	0.275	≤0.4	PASS
3DH5	Ant1	Hop	2.906	104	0.302	≤0.4	PASS

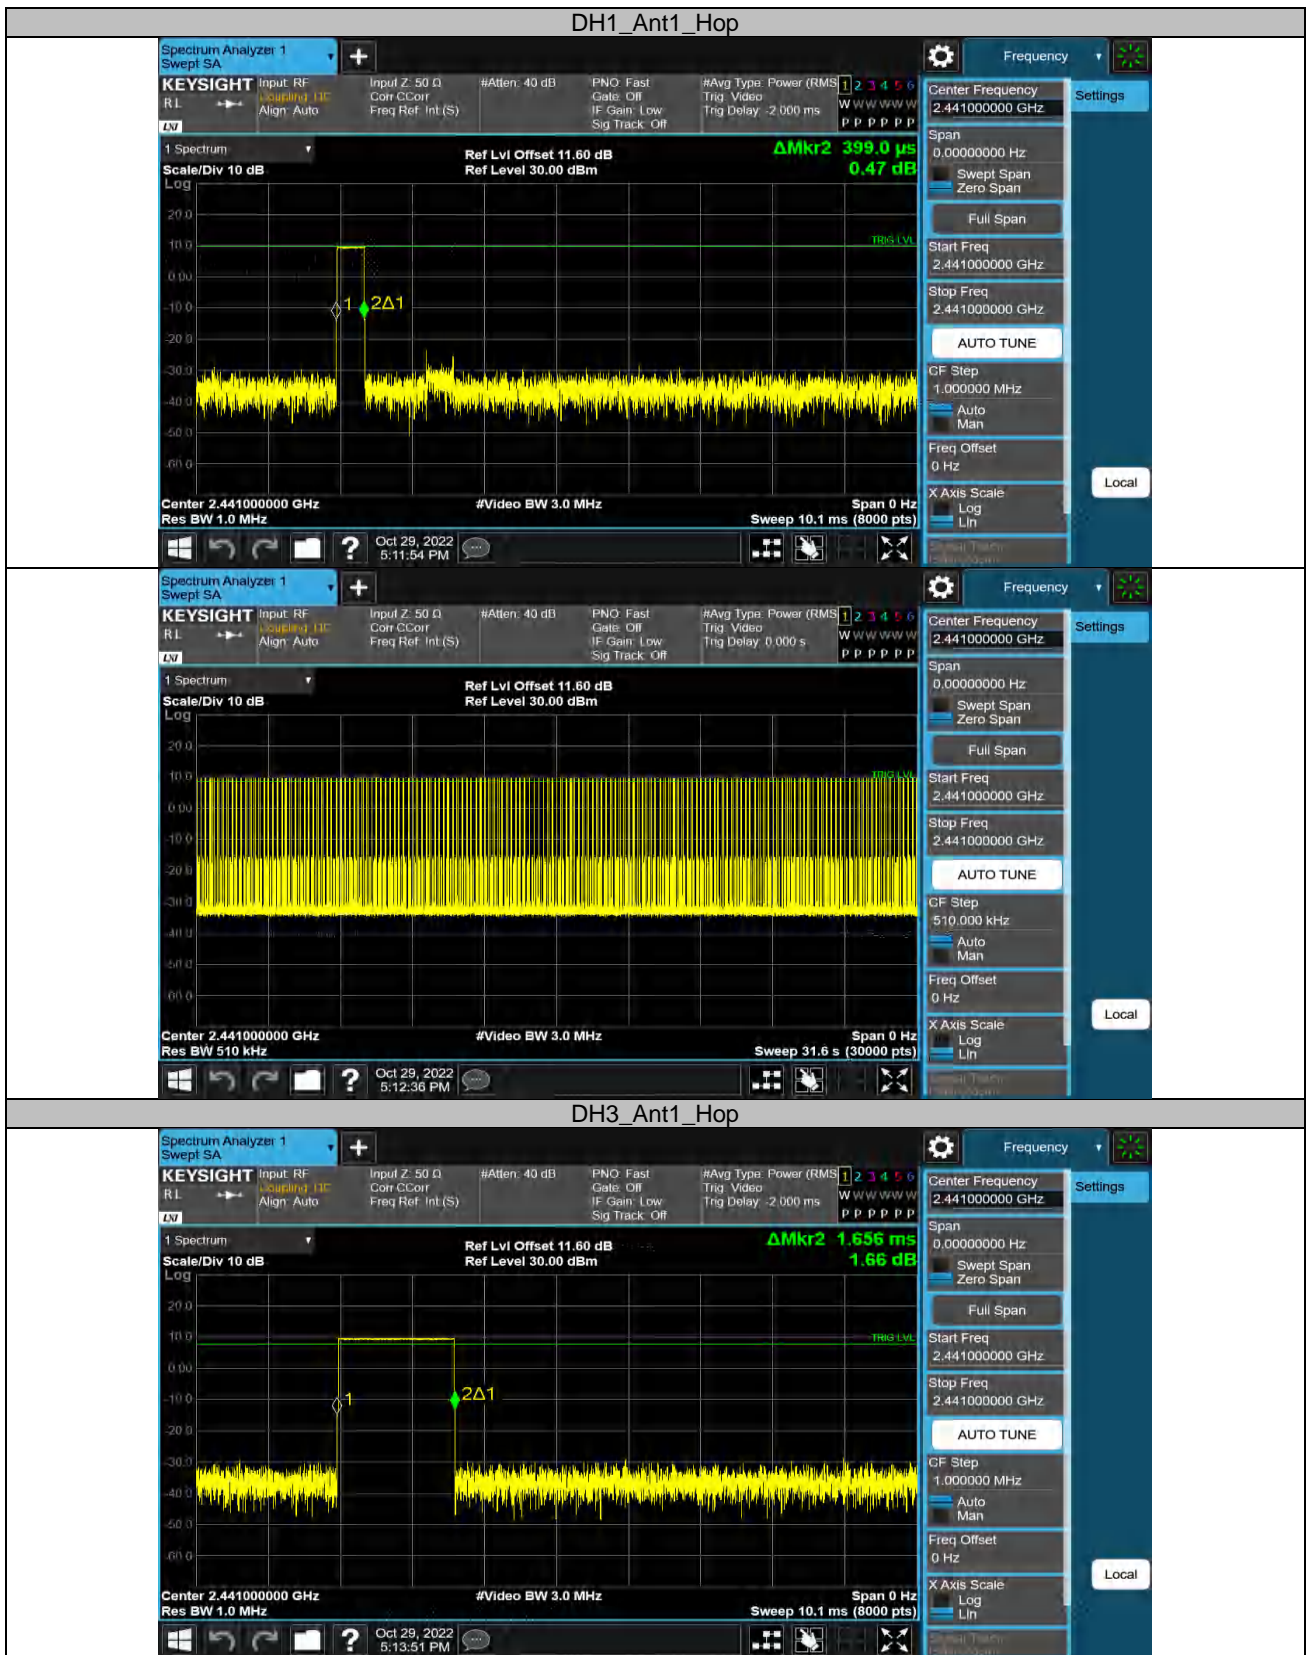



DH5\_Ant1\_Hop

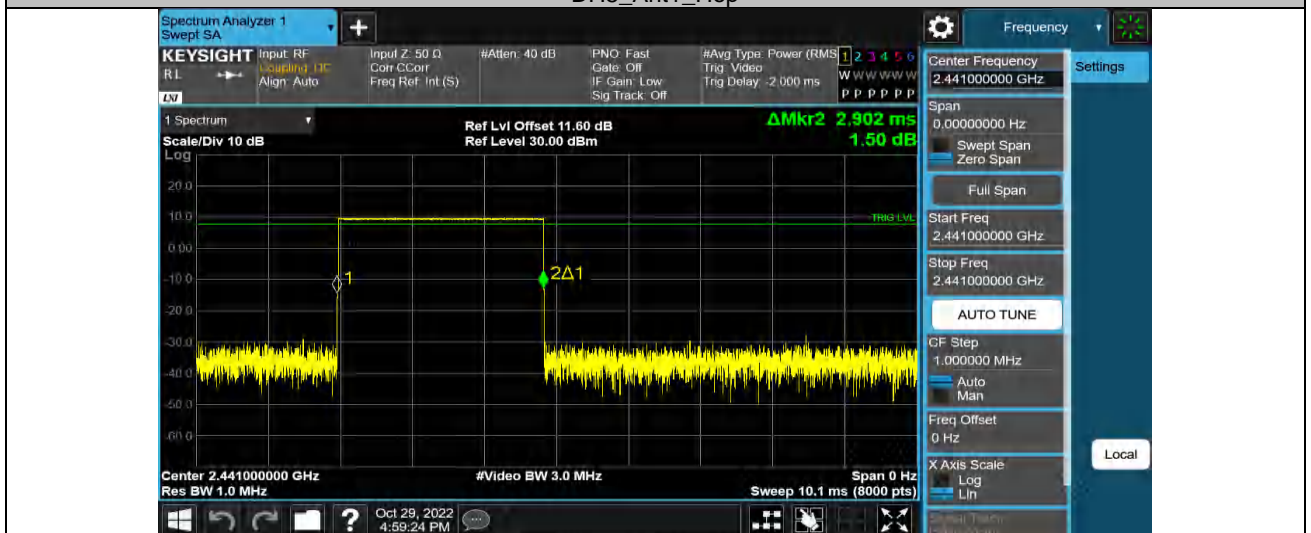

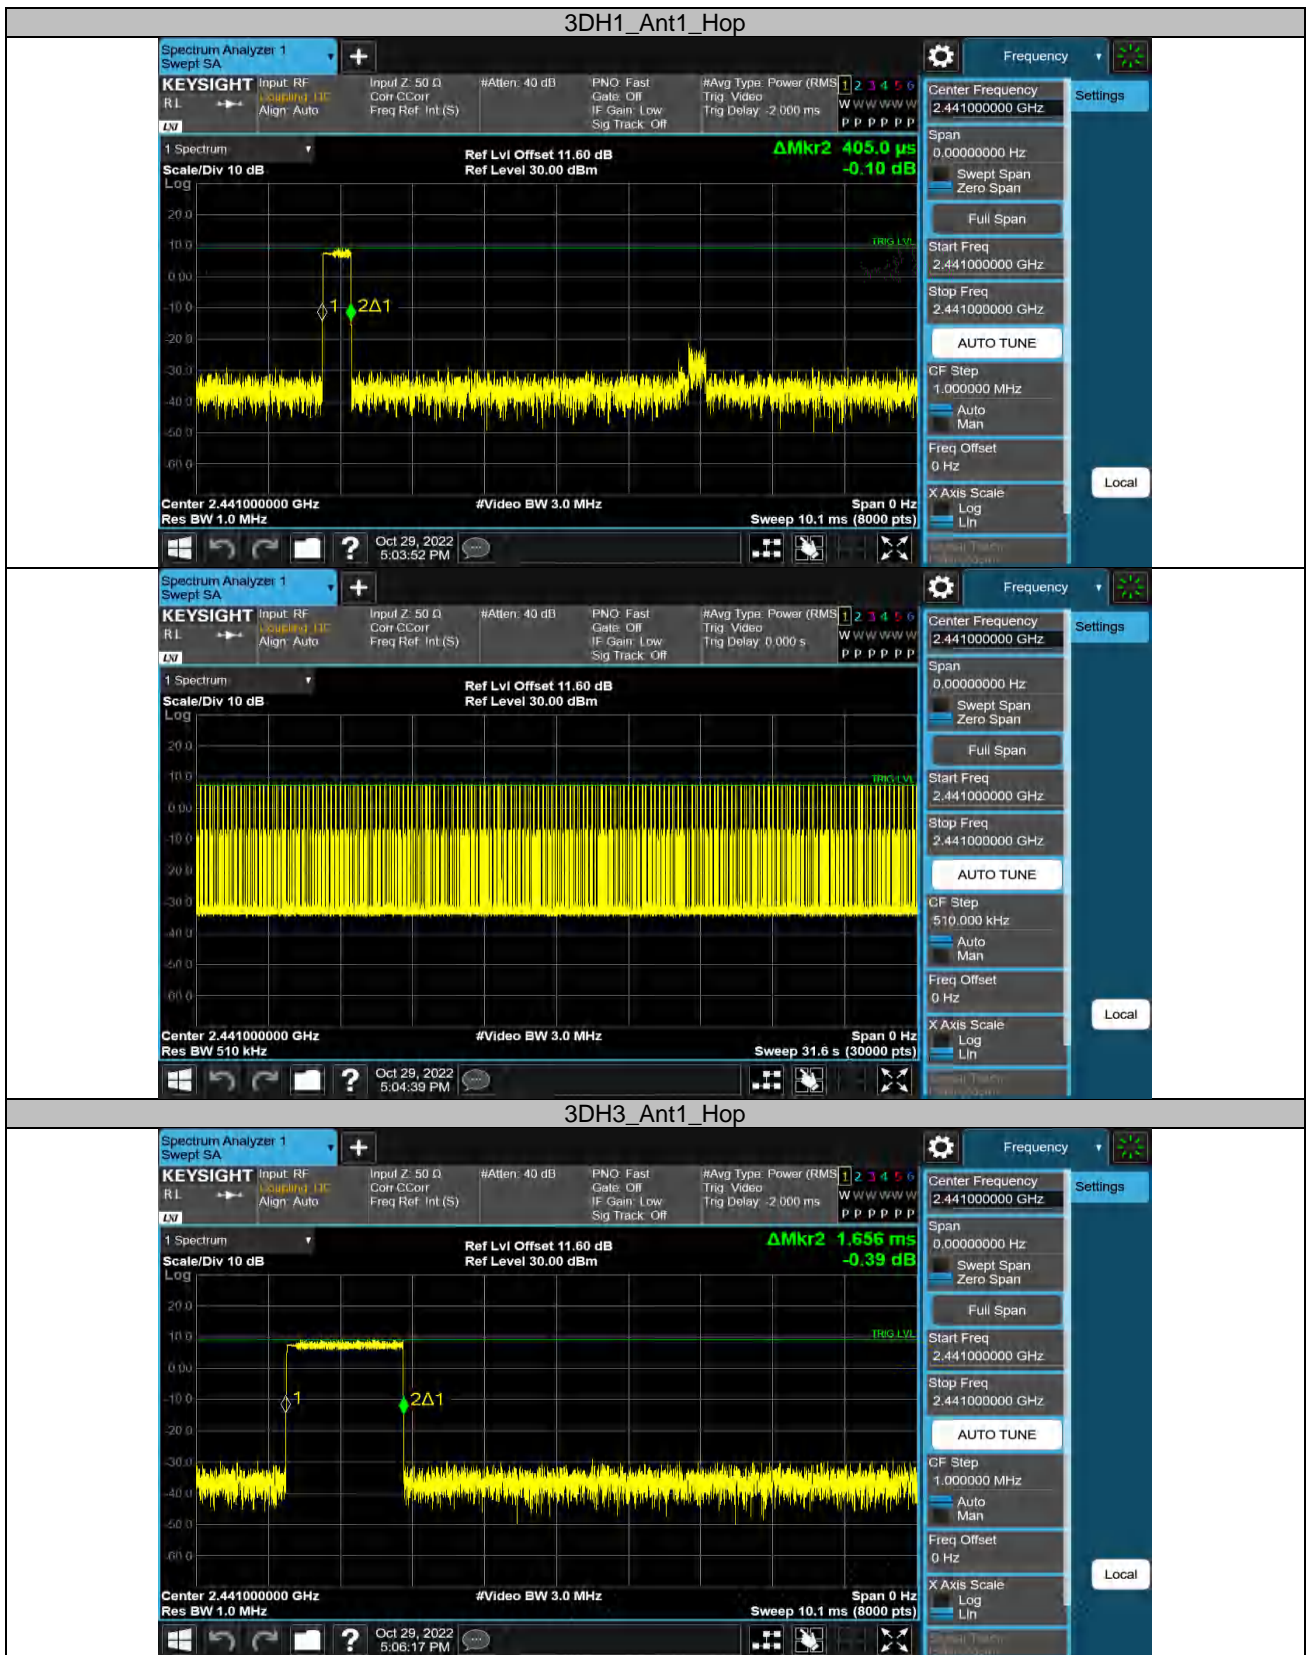






3DH5\_Ant1\_Hop





### Appendix B.6: Test Results of Conducted Spurious Emissions Measured in 100 kHz Bandwidth



#### Conducted Spurious Emission




TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	Reference	10.24	10.24	---	PASS
			30~1000	10.24	-48.01	≤-9.76	PASS
			1000~26500	10.24	-38.65	≤-9.76	PASS
		2441	Reference	9.93	9.93	---	PASS
			30~1000	9.93	-48.33	≤-10.07	PASS
			1000~26500	9.93	-38.17	≤-10.07	PASS
		2480	Reference	10.28	10.28	---	PASS
			30~1000	10.28	-47.77	≤-9.72	PASS
			1000~26500	10.28	-38.75	≤-9.72	PASS
3DH5	Ant1	2402	Reference	7.22	7.22	---	PASS
			30~1000	7.22	-47.59	≤-12.78	PASS
			1000~26500	7.22	-39.01	≤-12.78	PASS
		2441	Reference	5.04	5.04	---	PASS
			30~1000	5.04	-47.85	≤-14.96	PASS
			1000~26500	5.04	-38.56	≤-14.96	PASS
		2480	Reference	9.06	9.06	---	PASS
			30~1000	9.06	-47.88	≤-10.94	PASS
			1000~26500	9.06	-39.1	≤-10.94	PASS

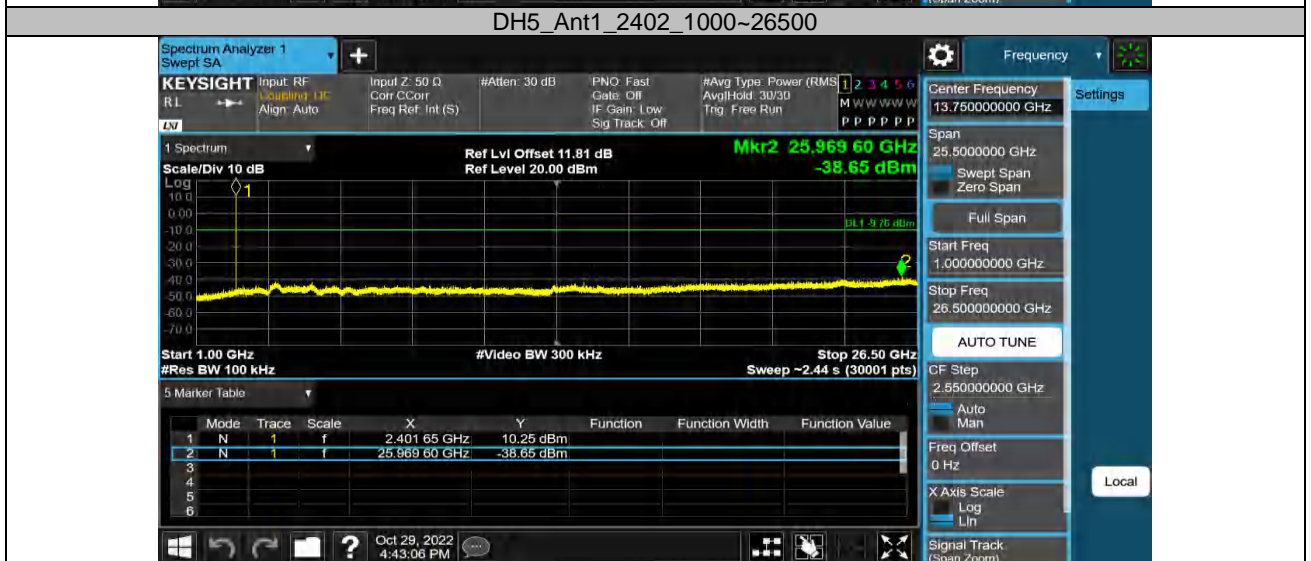
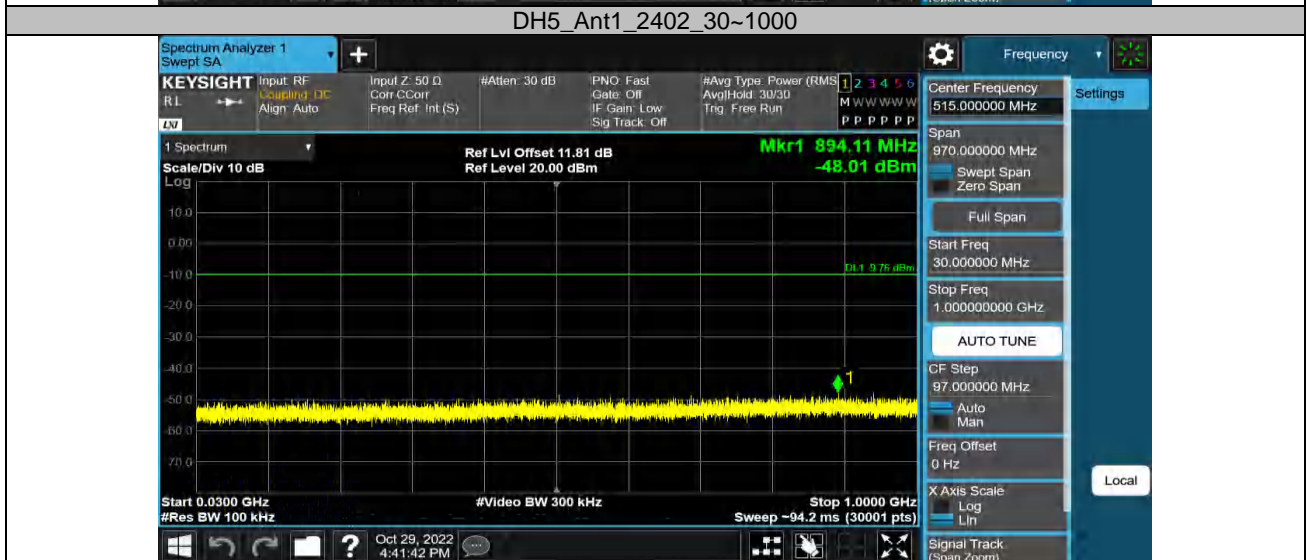
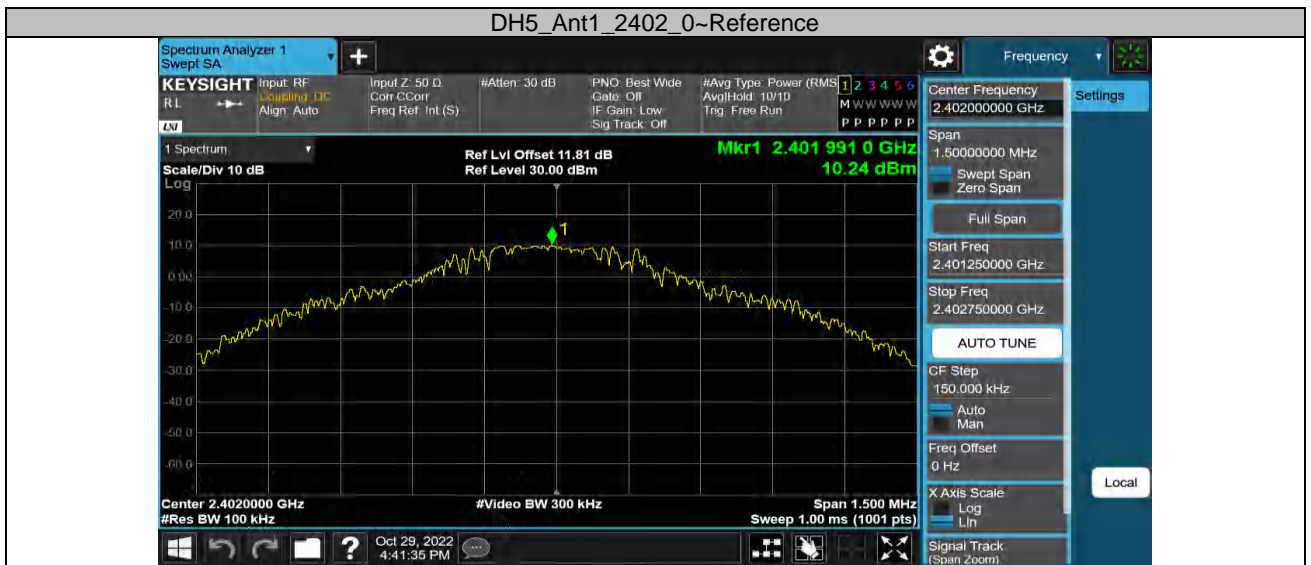






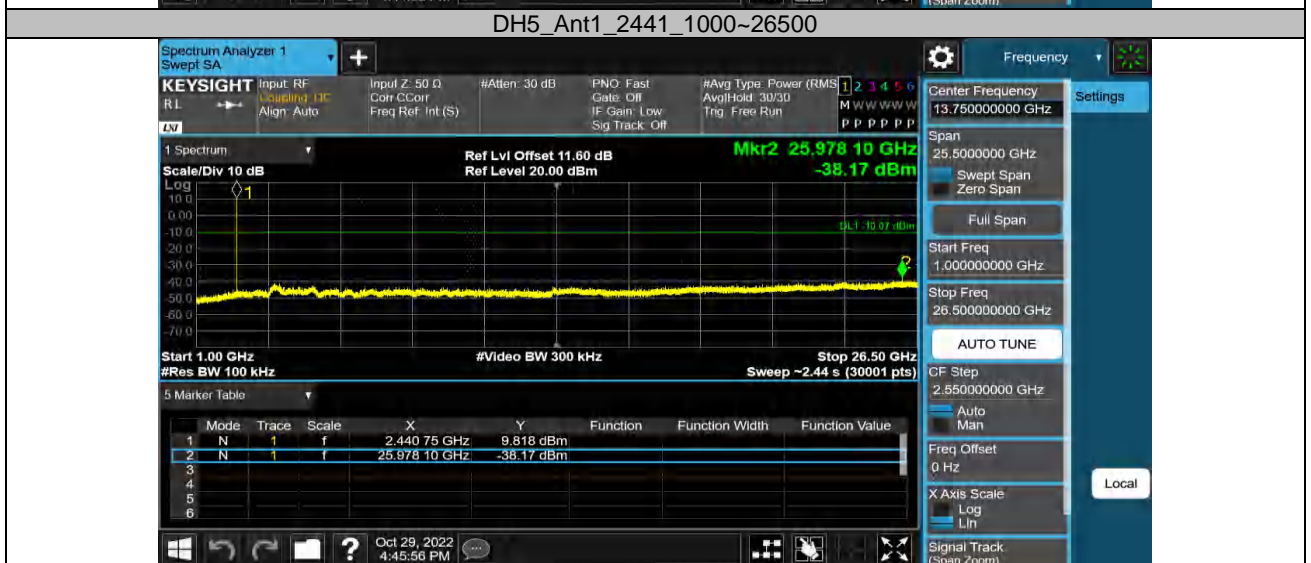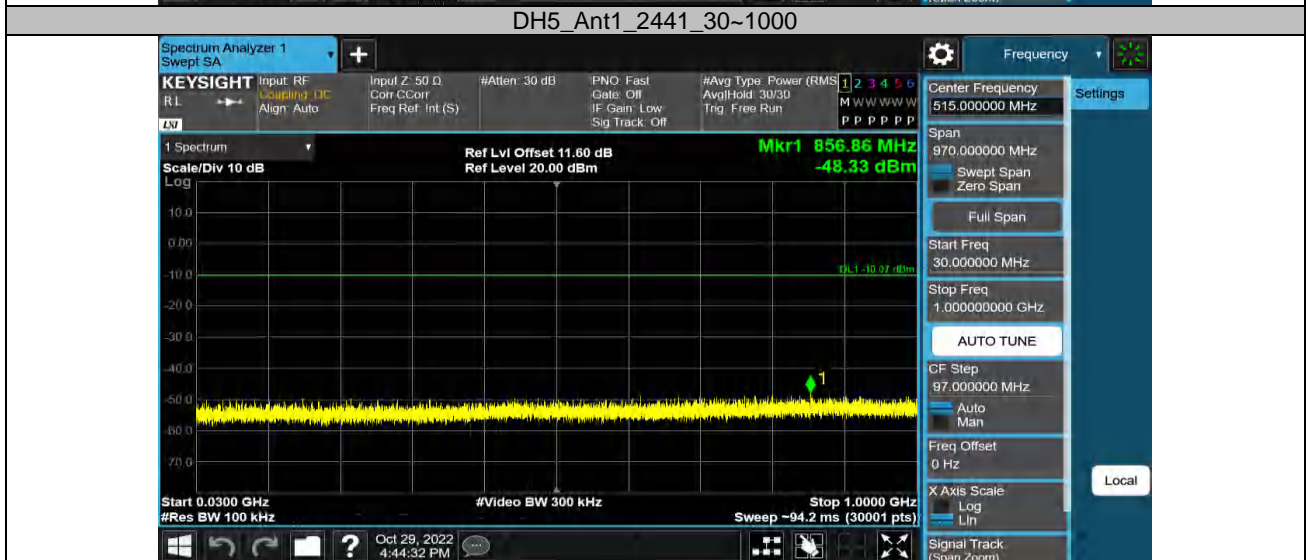

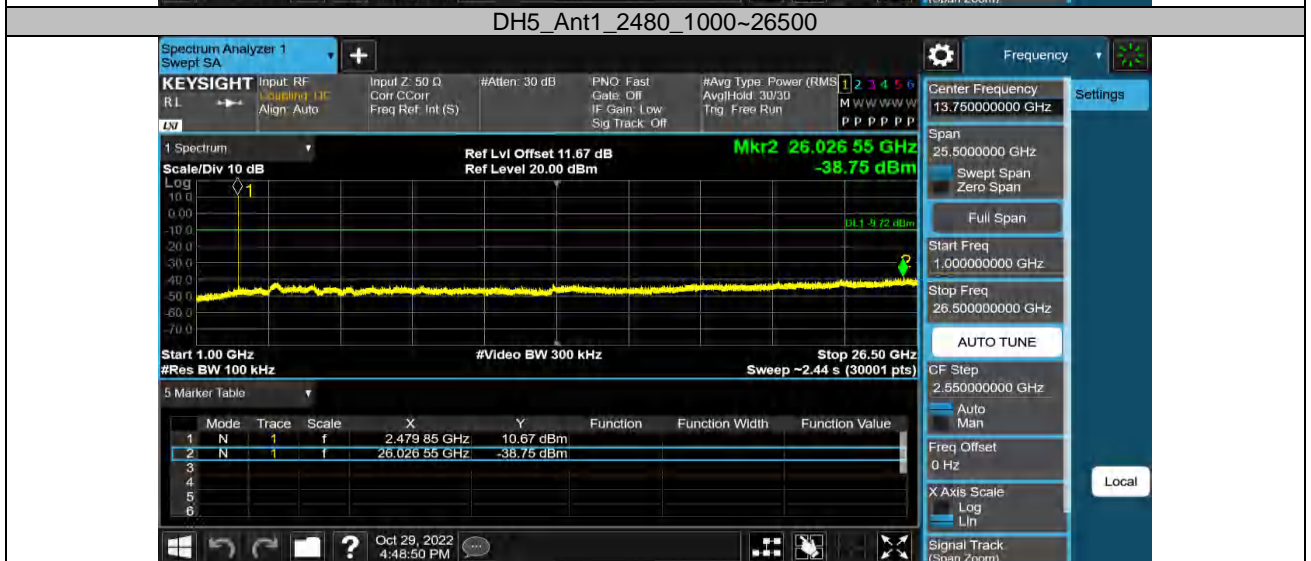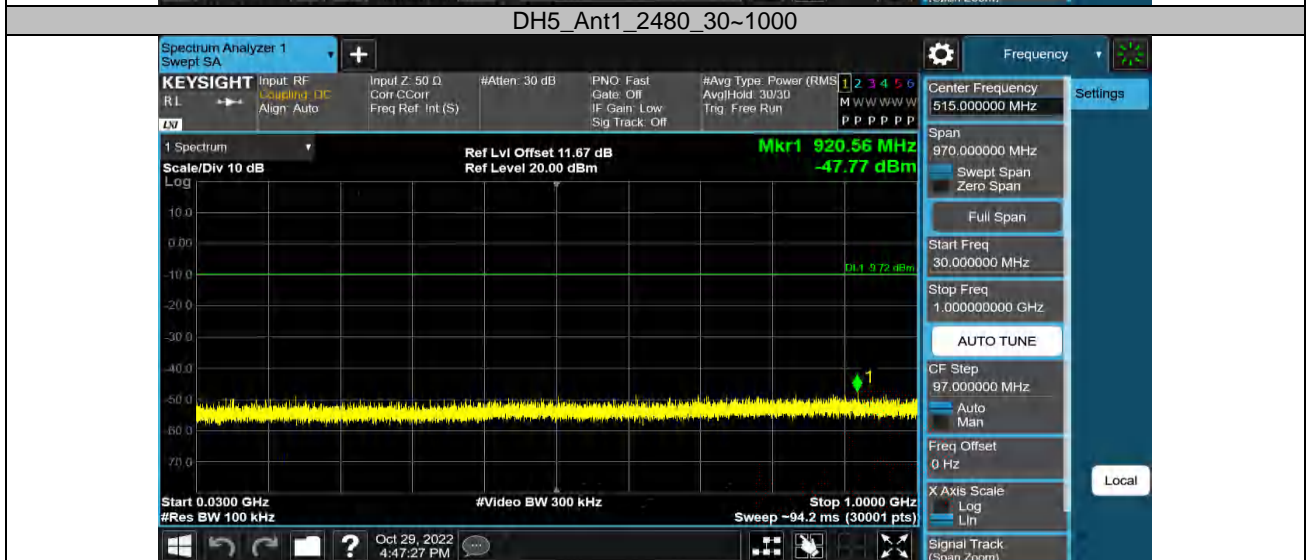

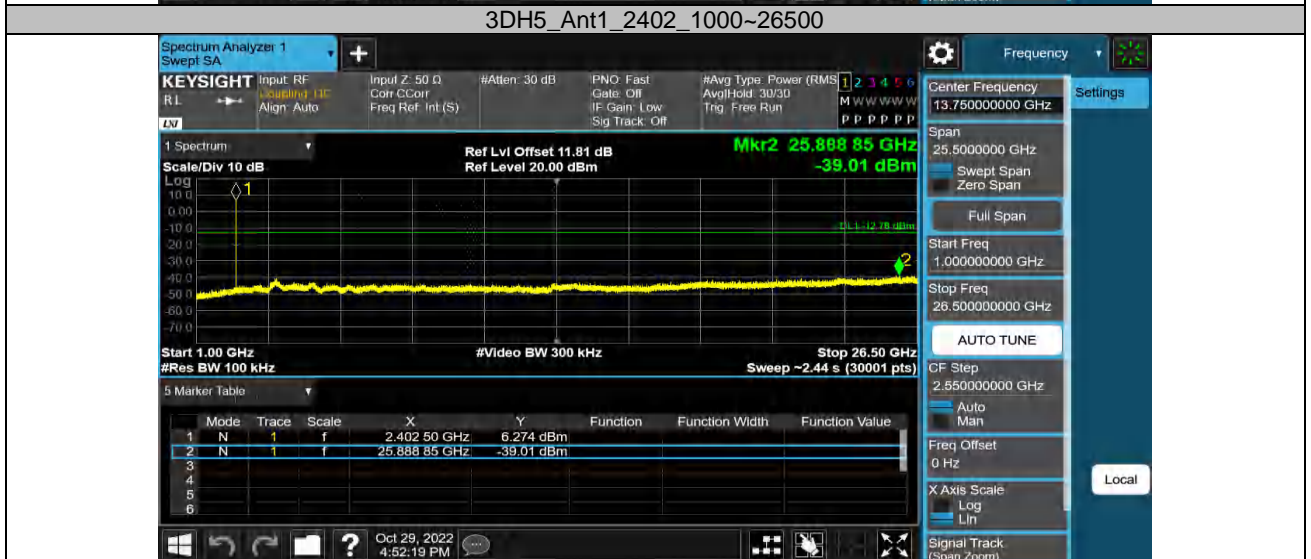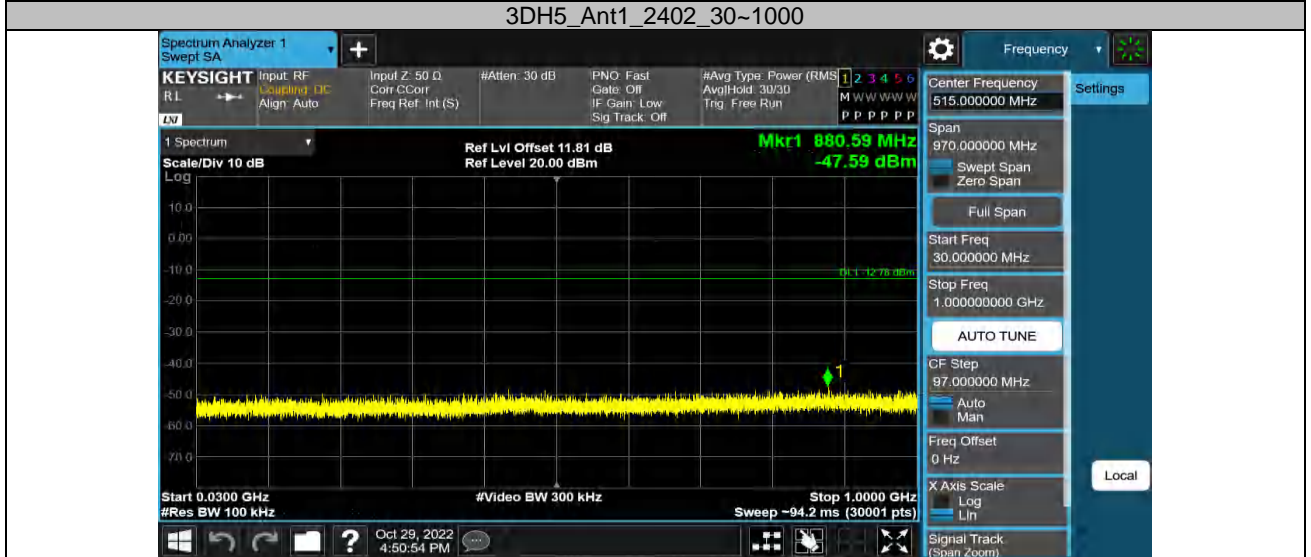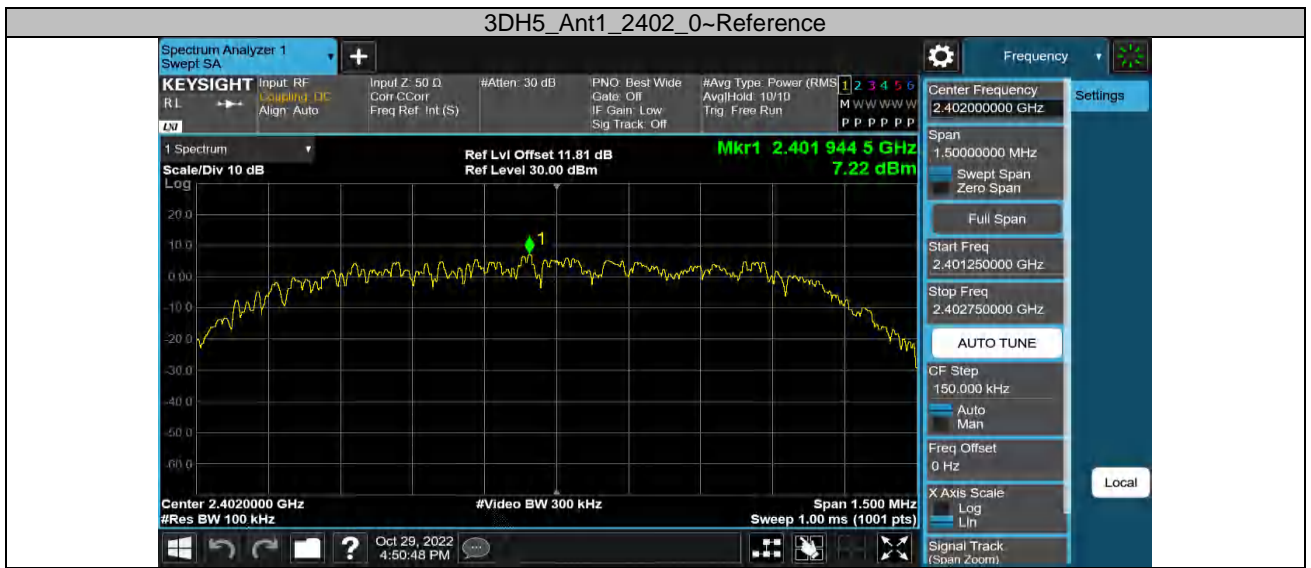

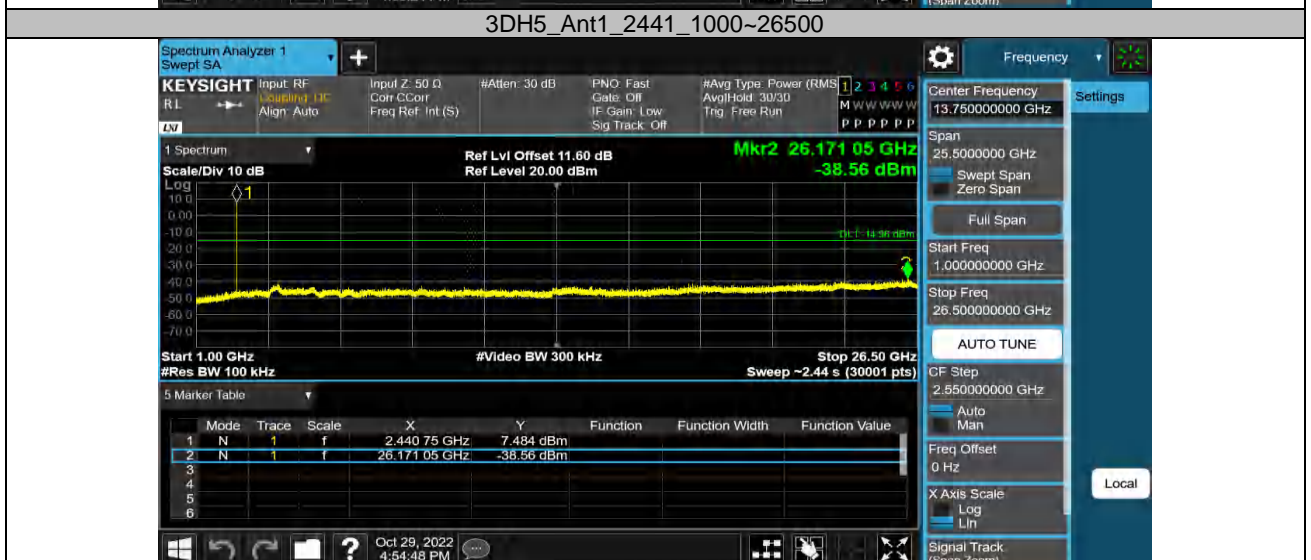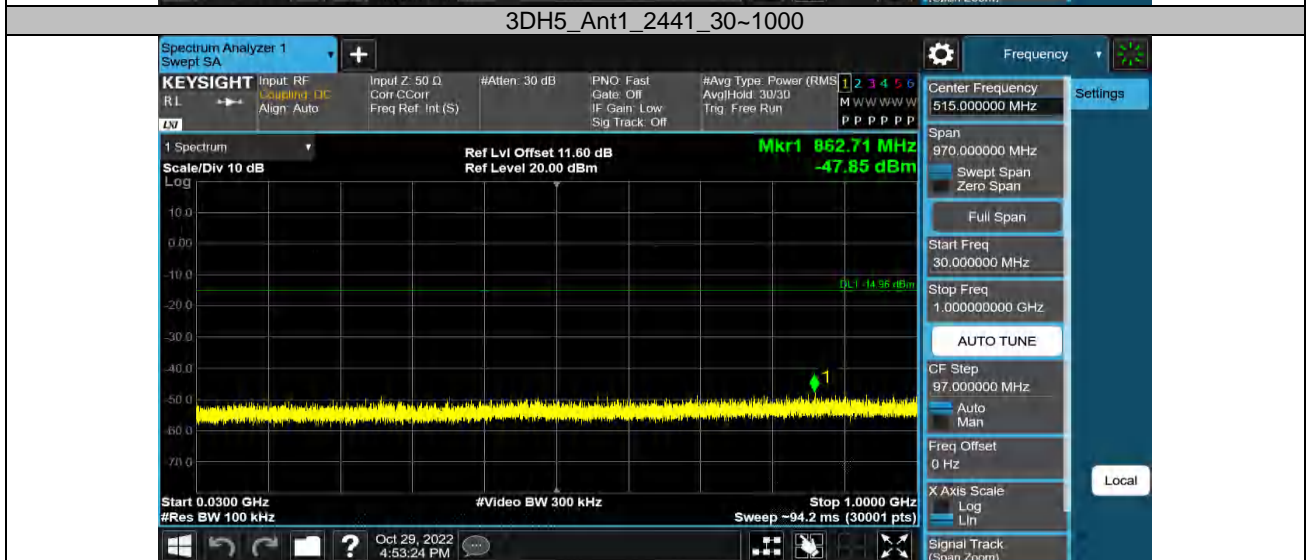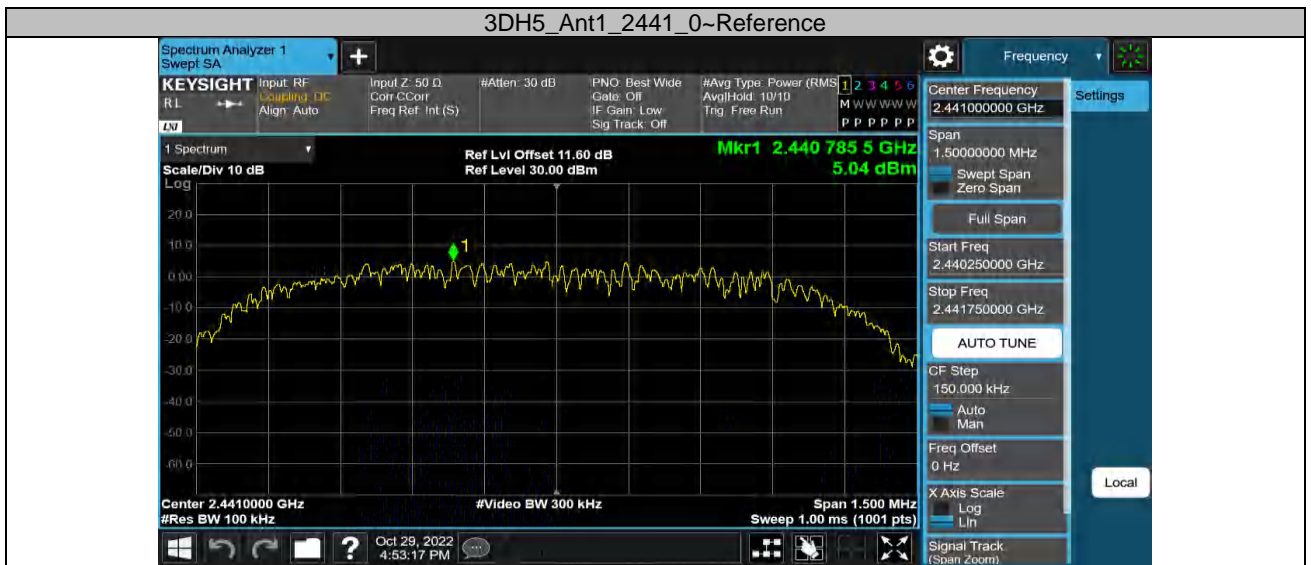

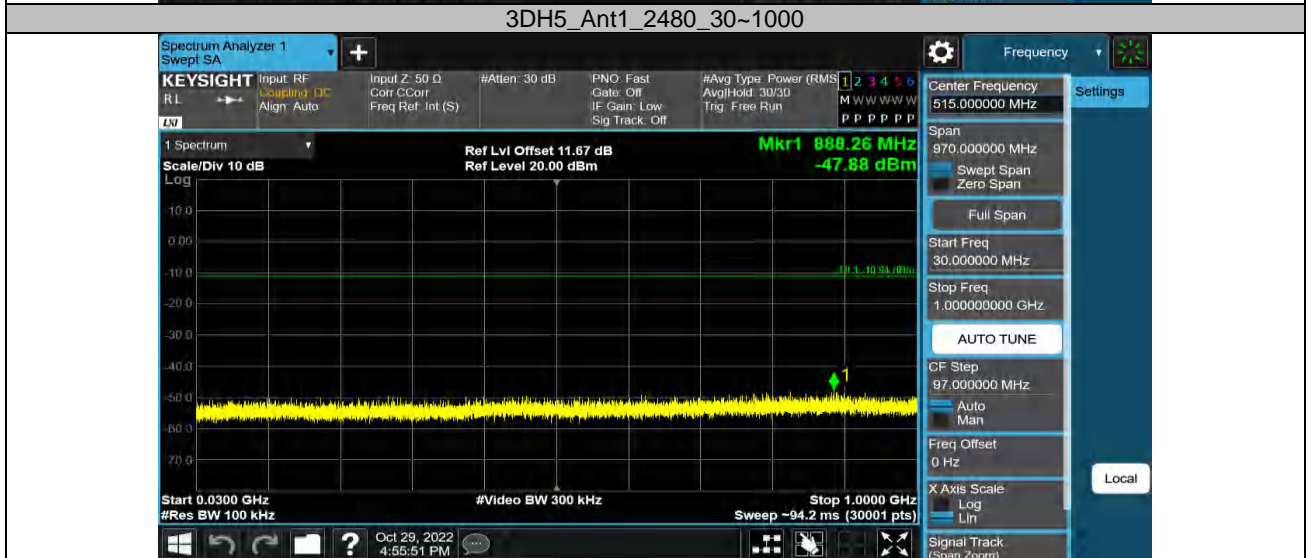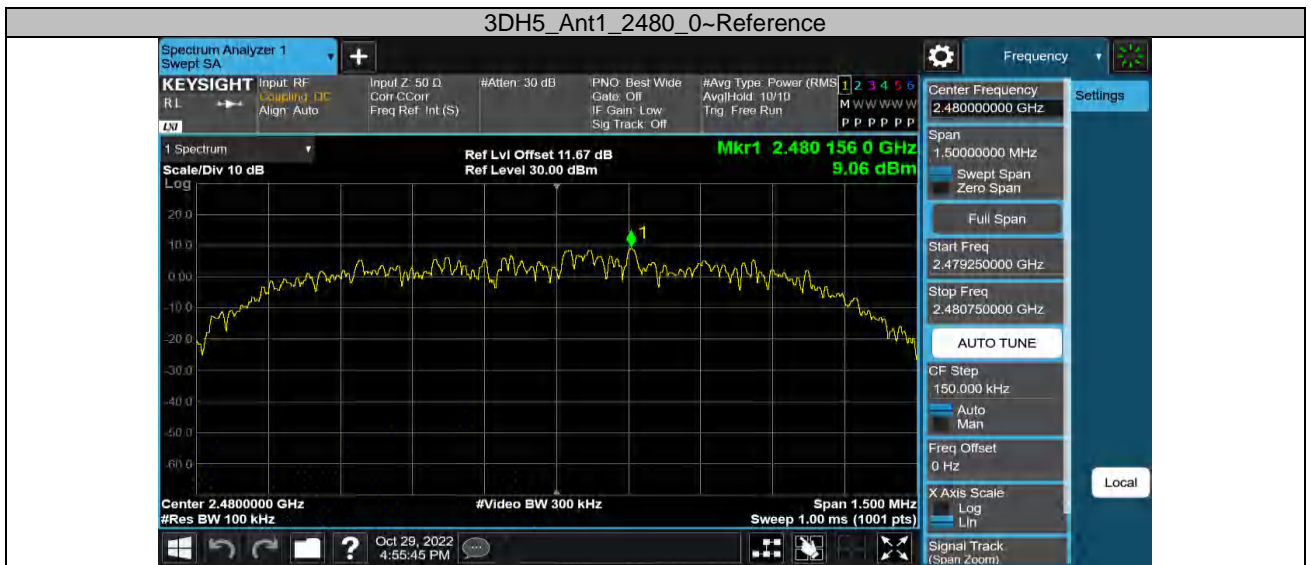


**Band Edge**

TestMode	Antenna	ChName	Channel	Verdict
DH5	Ant1	Low	2402	PASS
		High	2480	PASS
		Low	Hop_2402	PASS
		High	Hop_2480	PASS
3DH5	Ant1	Low	2402	PASS
		High	2480	PASS
		Low	Hop_2402	PASS
		High	Hop_2480	PASS

DH5\_Ant1\_Low\_2402



DH5\_Ant1\_High\_2480

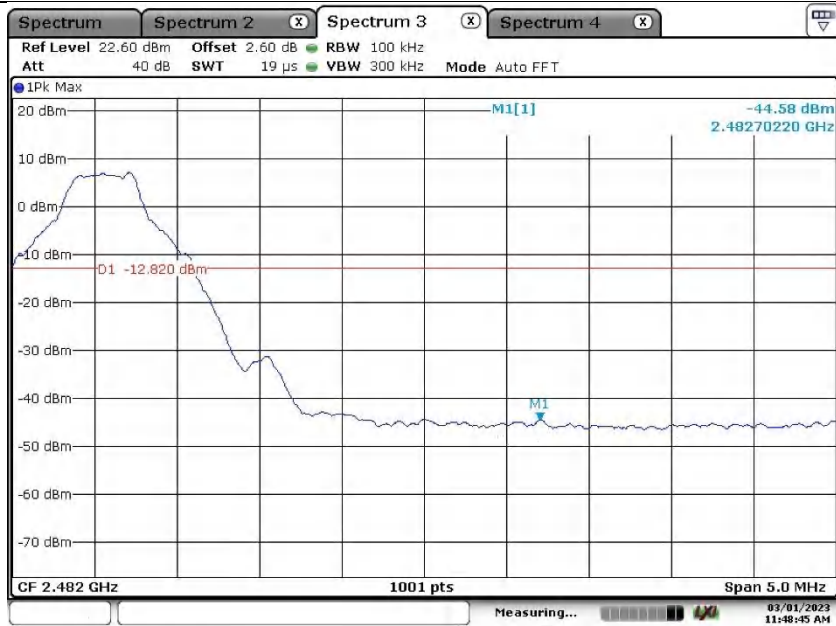

Date: 1.MAR.2023 11:48:45

DH5\_Ant1\_Low\_Hop\_2402




Date: 1.MAR.2023 11:54:08

DH5\_Ant1\_High\_Hop\_2480

# Appendix B CN23IYRN 001




Prüfbericht - Produkte  
Test Report - Products

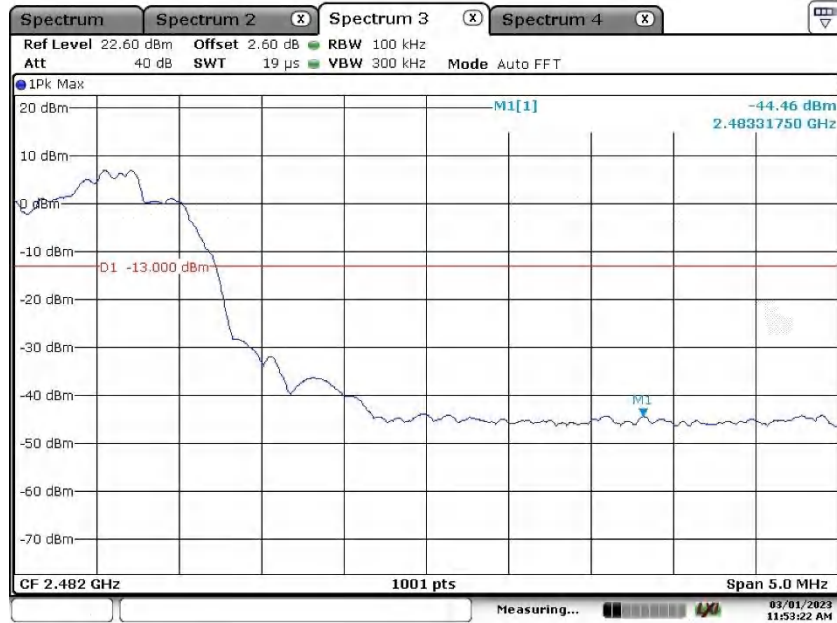



Date: 1.MAR.2023 11:53:22

## 3DH5\_Ant1\_Low\_2402

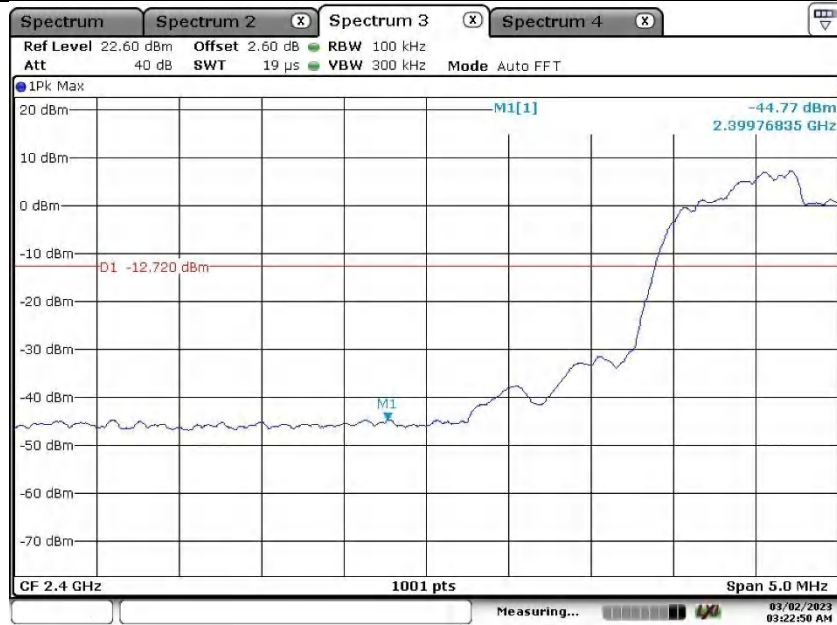

Date: 2.MAR.2023 03:22:50



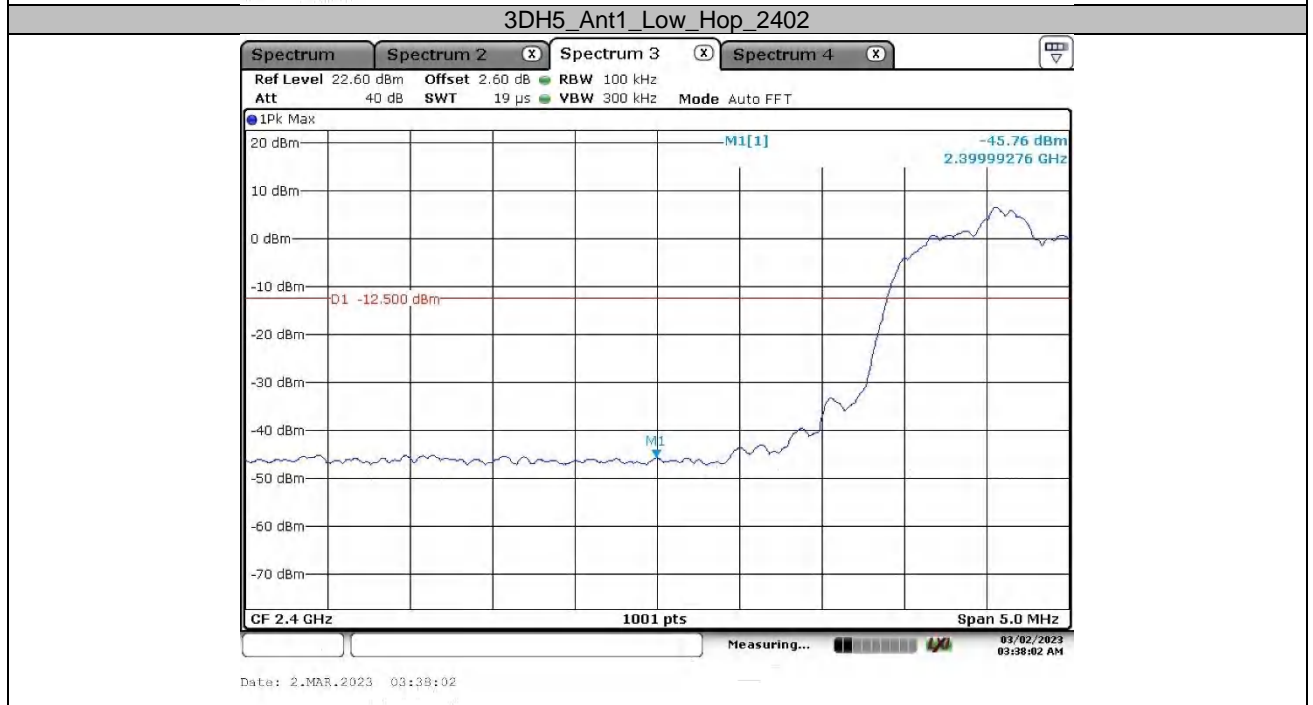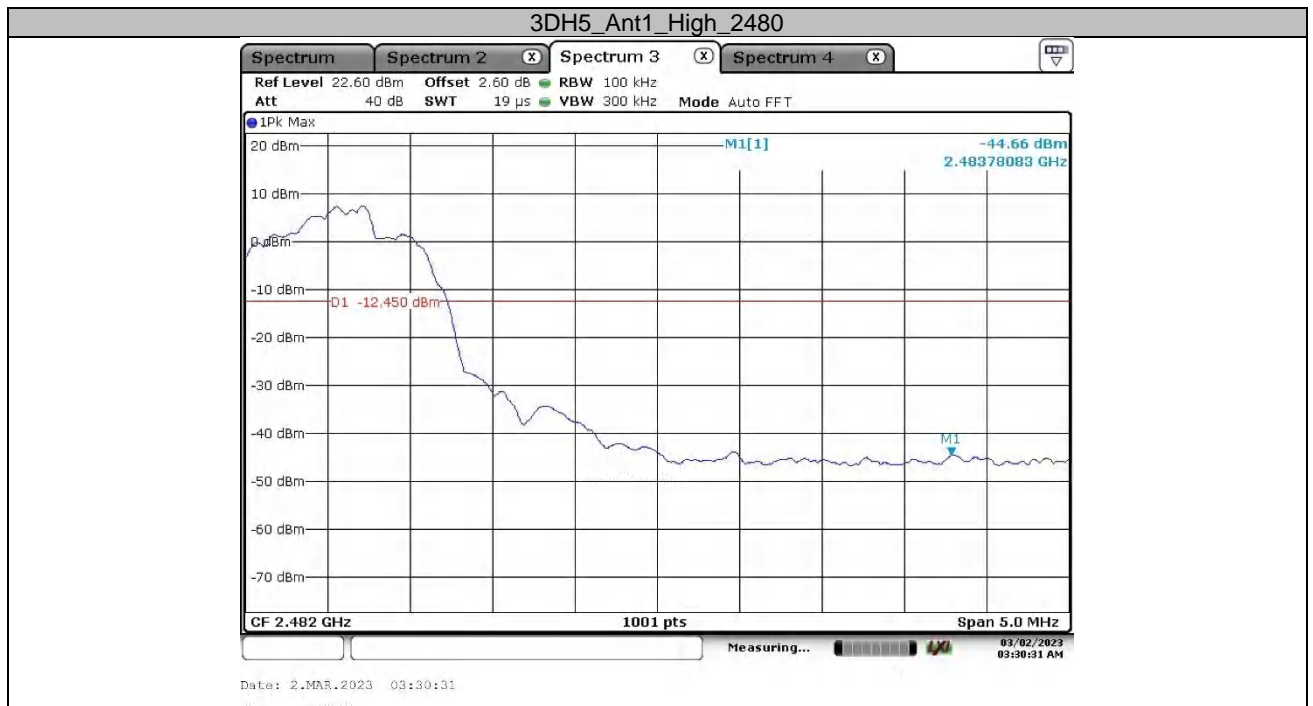

3DH5\_Ant1\_High\_Hop\_2480



Date: 2.MAR.2023 03:37:22


### Appendix B.7: Test Results of Radiated Spurious Emissions

Note: 1. Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported. 2. This testing was carried out on different modulations, but only the worst case (GFSK) was presented in this report.

#### 30 MHz - 1GHz

#### EUT Information

EUT Name:	Portable Thermal Camera
Model:	S1280
Test Mode:	BR_DH5_Mid channel
Order No/Sample No:	168392026/A003352666-001
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

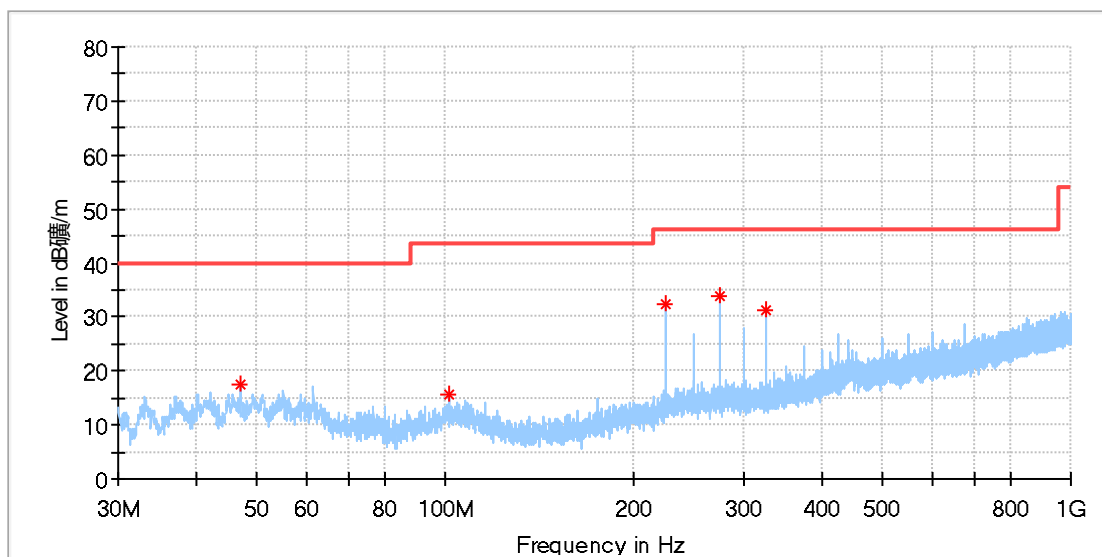

#### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
47.072000	17.50	40.00	22.50	100.0	H	60.0	-18.5
101.149500	15.51	43.50	27.99	100.0	H	251.0	-18.9
225.018500	32.32	46.00	13.68	100.0	H	302.0	-18.3
275.022000	33.85	46.00	12.15	100.0	H	154.0	-16.8
325.025500	31.18	46.00	14.82	100.0	H	275.0	-15.6

#### Final\_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name:	Portable Thermal Camera
Model:	S1280
Test Mode:	BR_DH5_Mid channel
Order No/Sample No:	168392026/A003352666-001
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

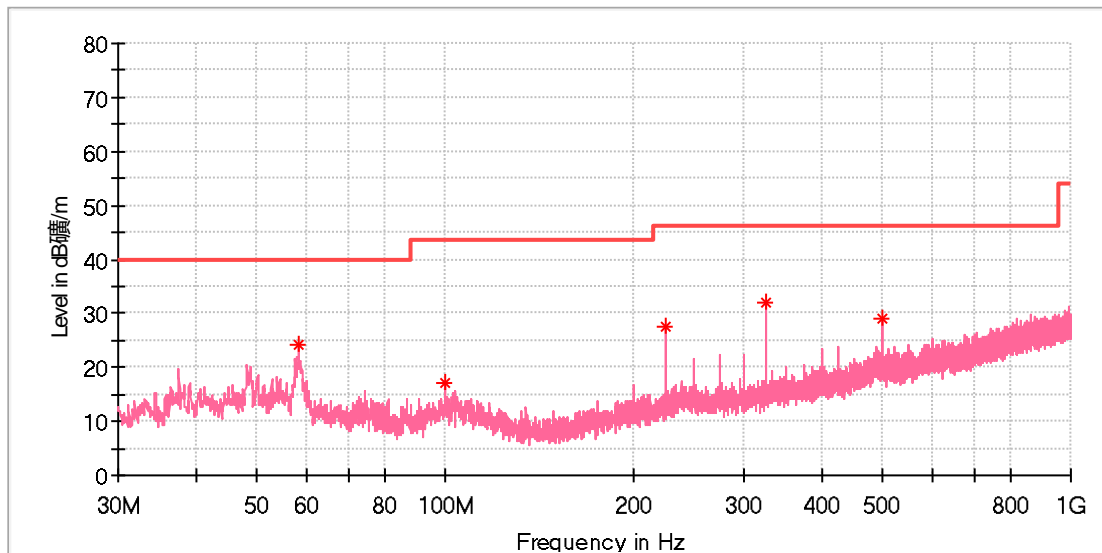

### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
58.275500	24.31	40.00	15.69	100.0	V	62.0	-18.8
99.888500	16.96	43.50	26.54	100.0	V	0.0	-19.0
225.018500	27.59	46.00	18.41	100.0	V	16.0	-18.3
325.025500	31.86	46.00	14.14	100.0	V	256.0	-15.6
500.062000	29.07	46.00	16.93	100.0	V	33.0	-11.8


### Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---



### EUT Information

EUT Name: Portable Thermal Camera  
 Model: S1280  
 Test Mode: BR\_DH5\_Low channel  
 Order No/Sample No: 168392026/A003352666-001  
 Test Voltage: Battery  
 Remark: Temp 23 Humi:58%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

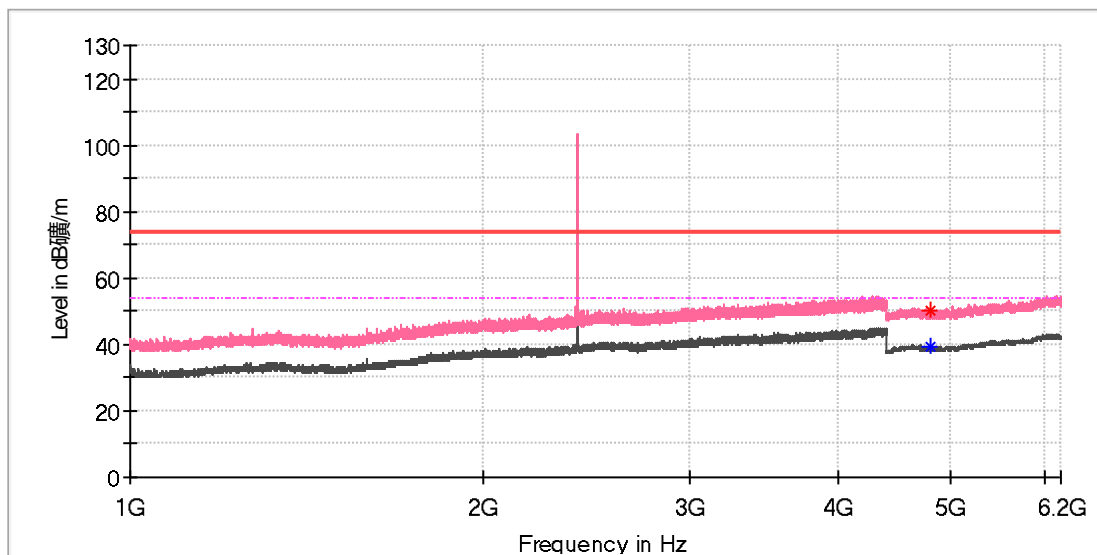

### Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4803.000000	50.05	---	74.00	23.95	100.0	V	354.0	11.8
4809.500000	---	39.02	54.00	14.98	100.0	V	326.0	11.8

### Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: Portable Thermal Camera  
 Model: S1280  
 Test Mode: BR\_DH5\_Low channel  
 Order No/Sample No: 168392026/A003352666-001  
 Test Voltage: Battery  
 Remark: Temp 23 Humi:58%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

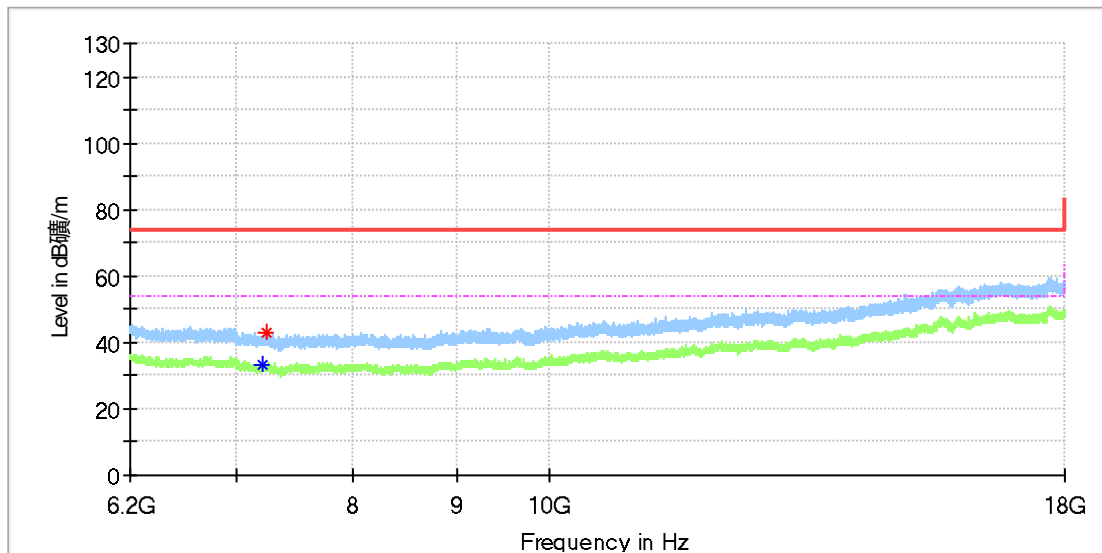

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7204.966667	---	33.12	54.00	20.88	100.0	H	188.0	8.8
7236.925000	42.87	---	74.00	31.13	100.0	H	259.0	8.6

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: Portable Thermal Camera  
 Model: S1280  
 Test Mode: BR\_DH5\_Low channel  
 Order No/Sample No: 168392026/A003352666-001  
 Test Voltage: Battery  
 Remark: Temp 23 Humi:58%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

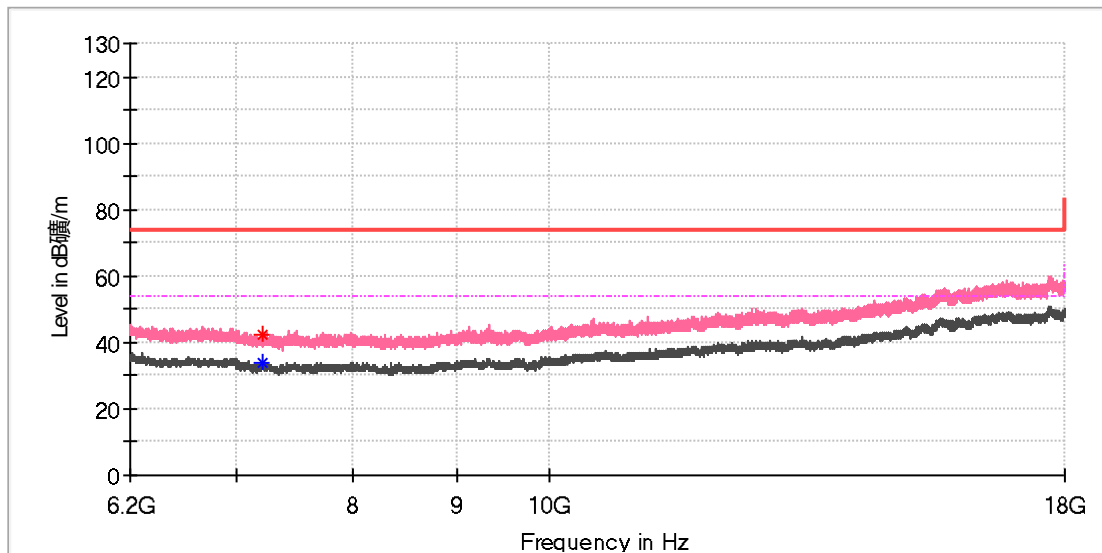

### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7203.983333	---	33.63	54.00	20.37	100.0	V	137.0	8.8
7207.425000	42.10	---	74.00	31.90	100.0	V	87.0	8.8


### Final\_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---



### EUT Information

EUT Name:	Portable Thermal Camera
Model:	S1280
Test Mode:	BR_DH5_Mid channel
Order No/Sample No:	168392026/A003352666-001
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

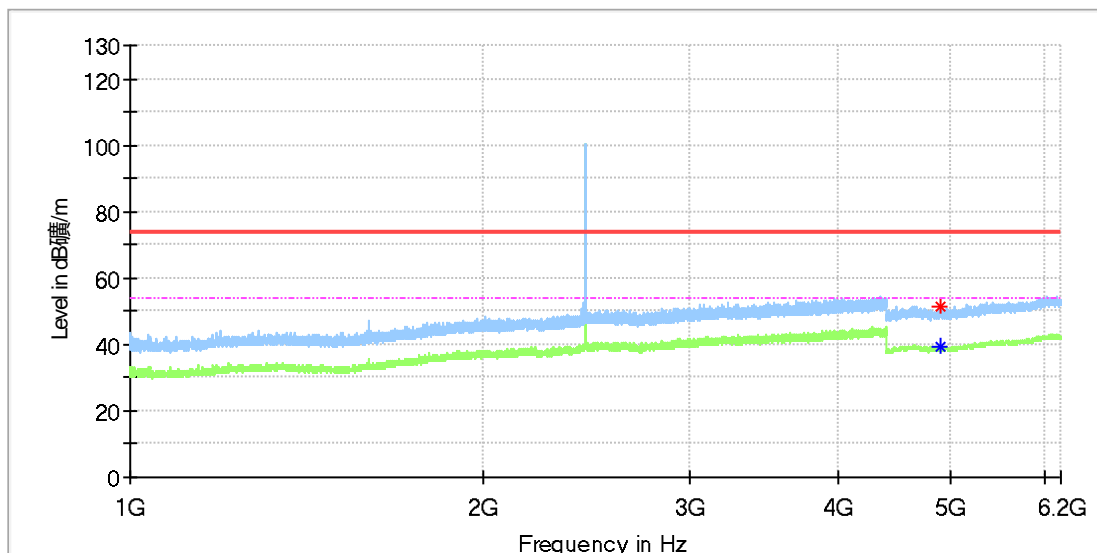

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4890.000000	51.22	---	74.00	22.78	100.0	H	301.0	11.8
4895.500000	---	39.06	54.00	14.94	100.0	H	229.0	11.8

### Final\_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: Portable Thermal Camera  
 Model: S1280  
 Test Mode: BR\_DH5\_Mid channel  
 Order No/Sample No: 168392026/A003352666-001  
 Test Voltage: Battery  
 Remark: Temp 23 Humi:58%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

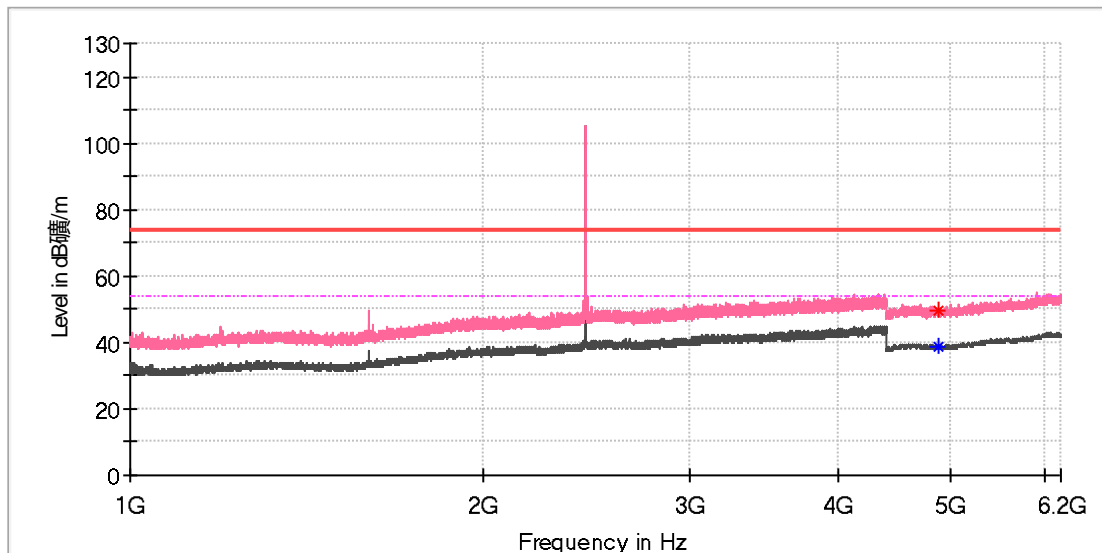

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4881.500000	49.45	---	74.00	24.55	100.0	V	225.0	11.8
4882.000000	---	38.51	54.00	15.49	100.0	V	245.0	11.8

### Final\_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: Portable Thermal Camera  
 Model: S1280  
 Test Mode: BR\_DH5\_Mid channel  
 Order No/Sample No: 168392026/A003352666-001  
 Test Voltage: Battery  
 Remark: Temp 23 Humi:58%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

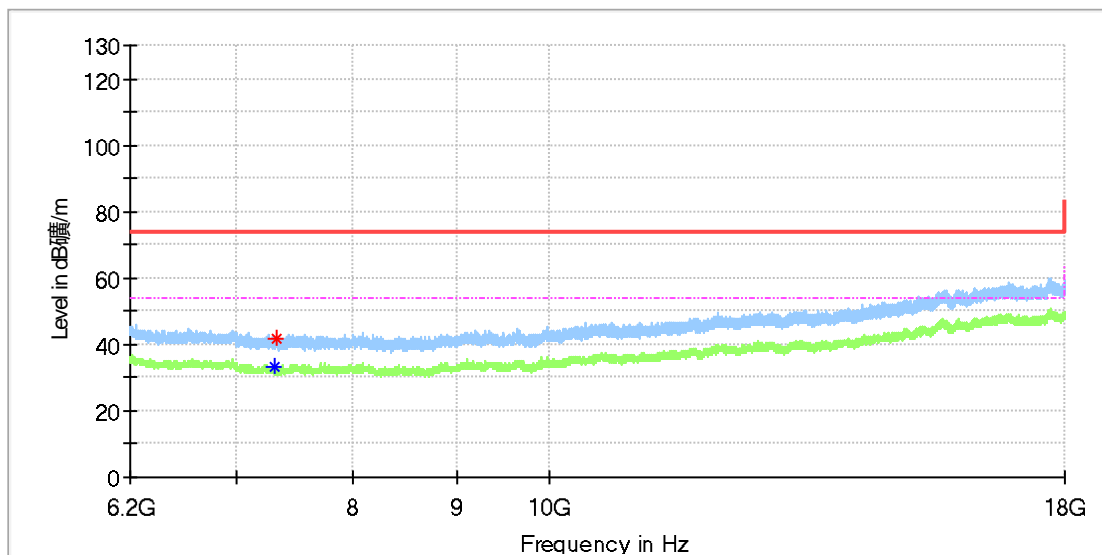

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7310.675000	---	33.00	54.00	21.00	100.0	H	0.0	8.2
7325.916667	41.99	---	74.00	32.01	100.0	H	29.0	8.2

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: Portable Thermal Camera  
 Model: S1280  
 Test Mode: BR\_DH5\_Mid channel  
 Order No/Sample No: 168392026/A003352666-001  
 Test Voltage: Battery  
 Remark: Temp 23 Humi:58%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

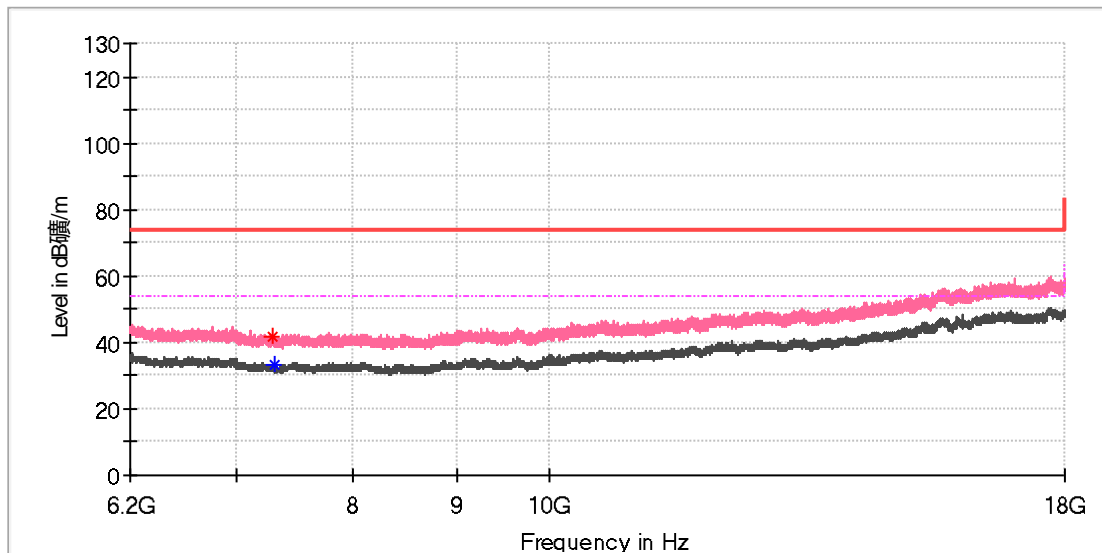

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7298.383333	41.54	---	74.00	32.46	100.0	V	302.0	8.3
7308.708333	---	33.13	54.00	20.87	100.0	V	87.0	8.2

### Final\_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name:	Portable Thermal Camera
Model:	S1280
Test Mode:	BR_DH5_High channel
Order No/Sample No:	168392026/A003352666-001
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

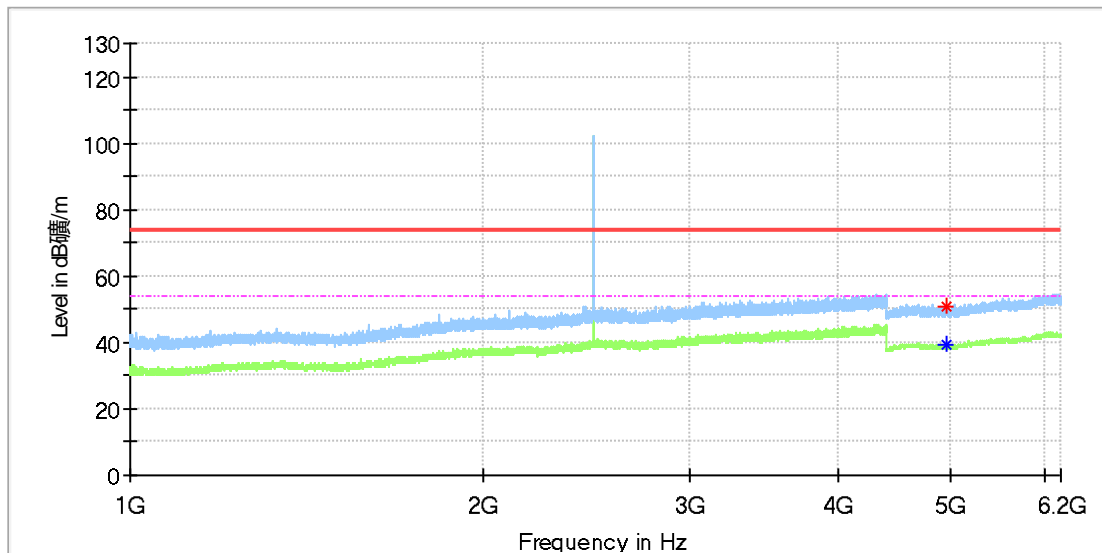

### Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4952.500000	50.84	---	74.00	23.16	100.0	H	327.0	11.8
4960.000000	---	39.43	54.00	14.57	100.0	H	282.0	11.8

### Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: Portable Thermal Camera  
 Model: S1280  
 Test Mode: BR\_DH5\_High channel  
 Order No/Sample No: 168392026/A003352666-001  
 Test Voltage: Battery  
 Remark: Temp 23 Humi:58%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

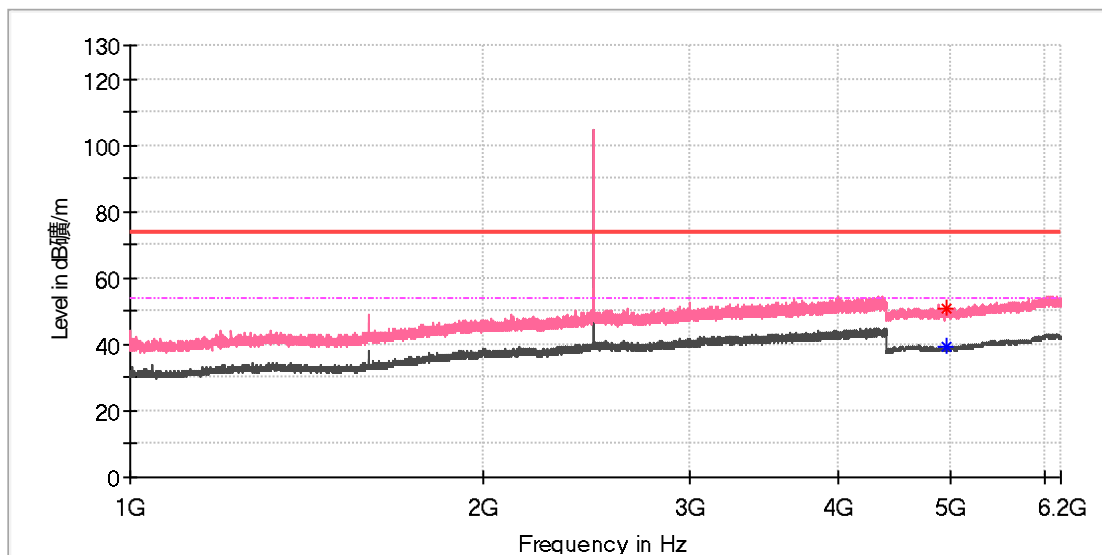

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4949.500000	50.91	---	74.00	23.09	100.0	V	212.0	11.8
4959.500000	---	39.48	54.00	14.52	100.0	V	345.0	11.8

### Final\_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name:	Portable Thermal Camera
Model:	S1280
Test Mode:	BR_DH5_High channel
Order No/Sample No:	168392026/A003352666-001
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

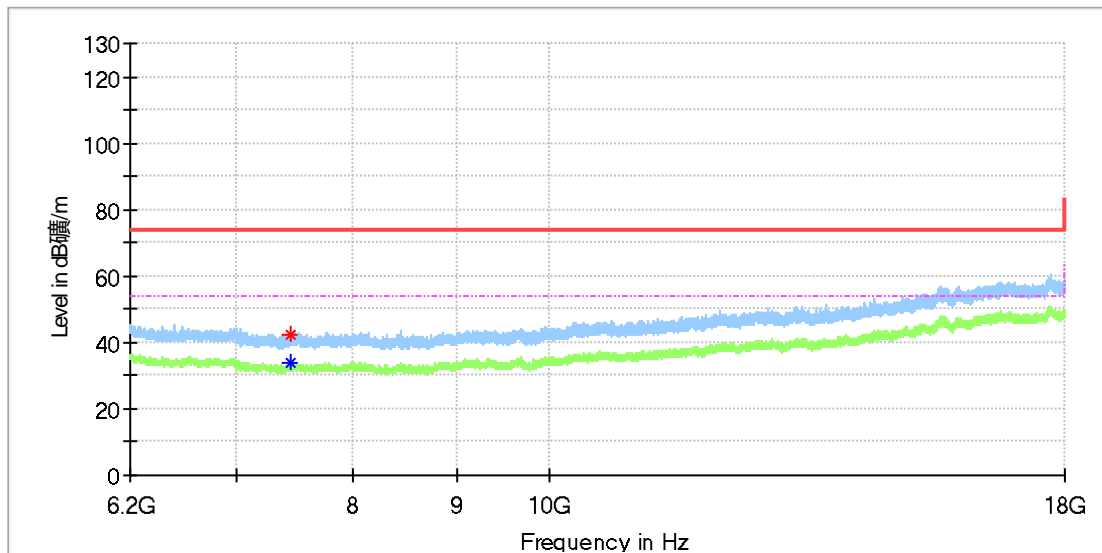

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7448.341667	42.21	---	74.00	31.79	100.0	H	4.0	8.5
7453.258333	---	33.64	54.00	20.36	100.0	H	53.0	8.5

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: Portable Thermal Camera  
 Model: S1280  
 Test Mode: BR\_DH5\_High channel  
 Order No/Sample No: 168392026/A003352666-001  
 Test Voltage: Battery  
 Remark: Temp 23 Humi:58%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

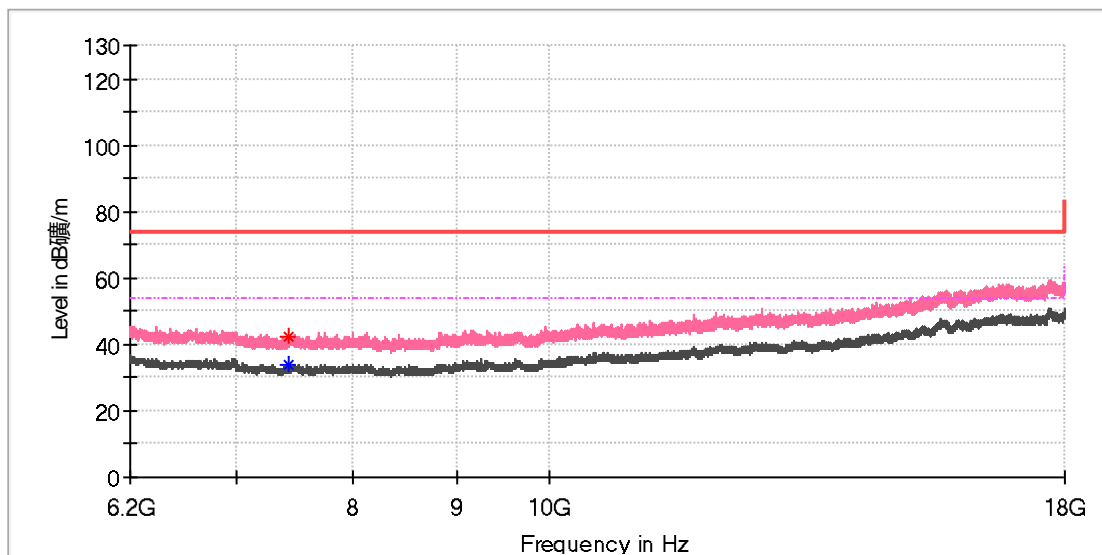

### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7427.200000	42.16	---	74.00	31.84	100.0	V	332.0	8.4
7435.558333	---	33.58	54.00	20.42	100.0	V	159.0	8.4

### Final\_Result


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---



## Appendix B.8: Test Results of Radiated Emissions in Restricted Bands

### EUT Information

EUT Name:	Portable Thermal Camera
Model:	S1280
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	168392026/A003352666-001
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

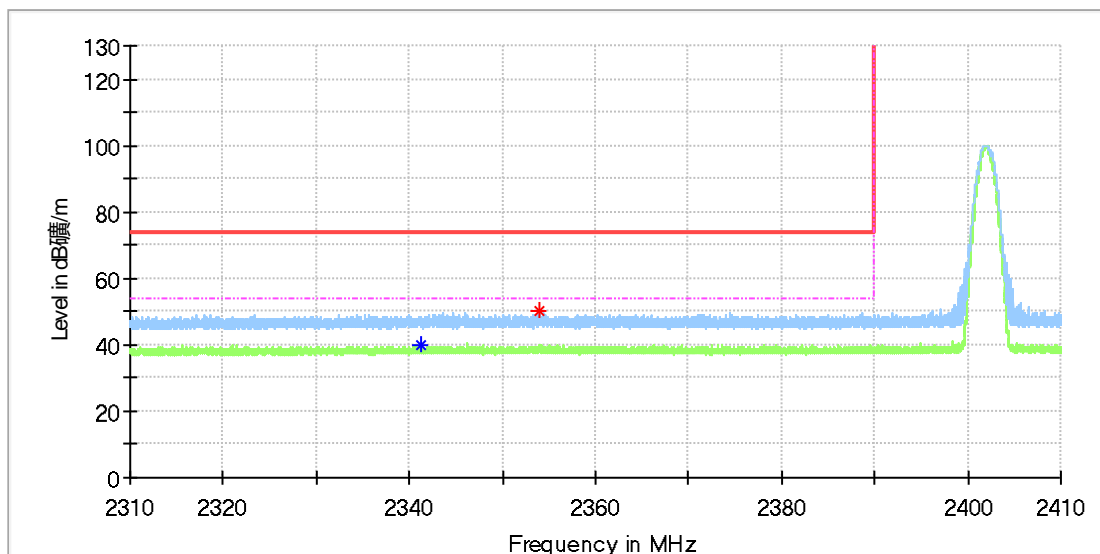

### Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2341.150000	---	39.74	54.00	14.26	100.0	H	188.0	6.8
2353.915000	50.42	---	74.00	23.58	100.0	H	127.0	6.9

### Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name:	Portable Thermal Camera
Model:	S1280
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	168392026/A003352666-001
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

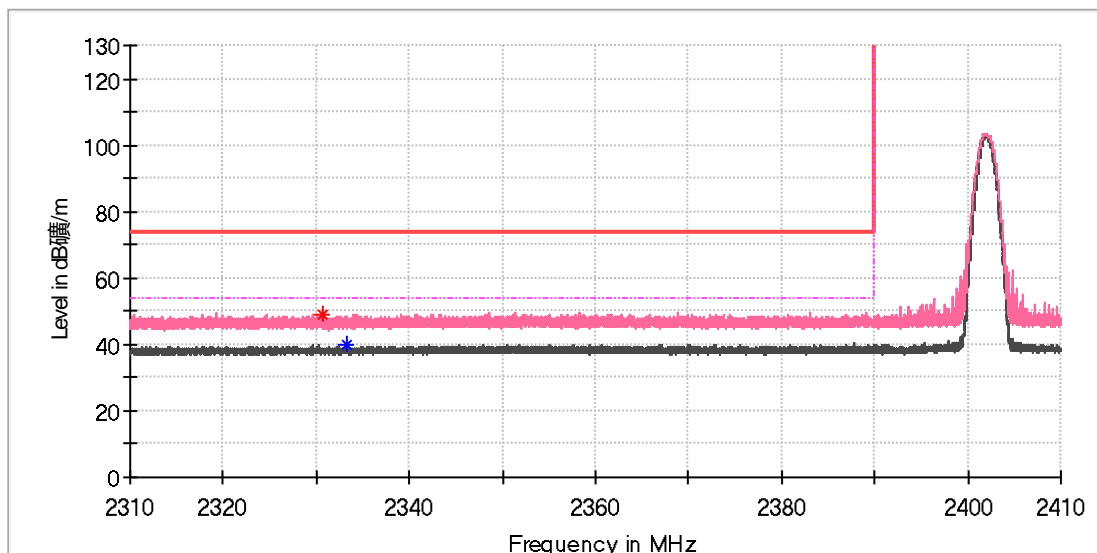

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2330.640000	49.27	---	74.00	24.73	100.0	V	214.0	6.7
2333.250000	---	39.80	54.00	14.20	100.0	V	0.0	6.7

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name:	Portable Thermal Camera
Model:	S1280
Test Mode:	BR_DH5_High channel
Order No/Sample No:	168392026/A003352666-001
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

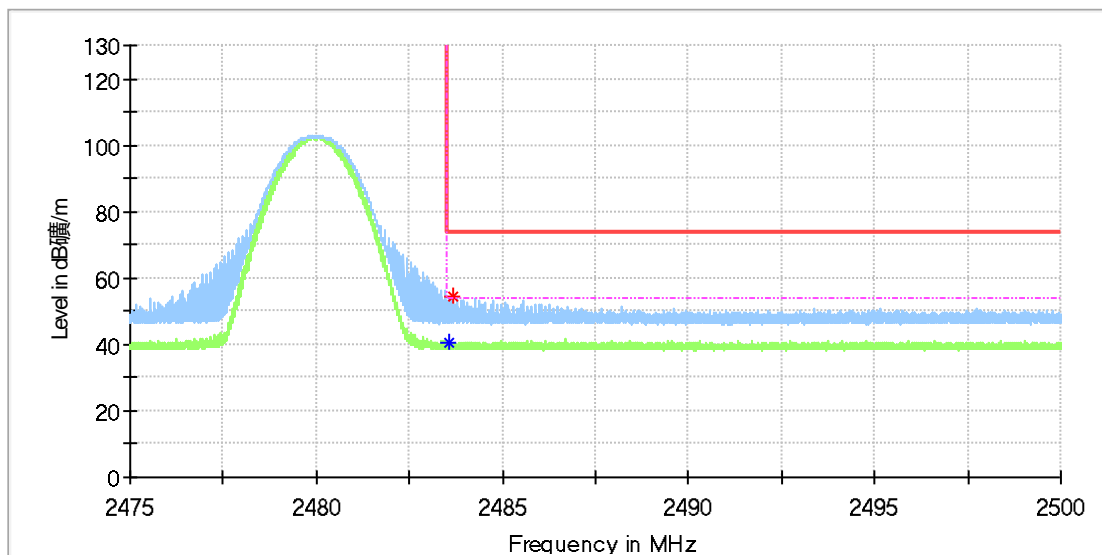

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.556250	---	40.69	54.00	13.31	100.0	H	284.0	7.4
2483.665000	54.70	---	74.00	19.30	100.0	H	148.0	7.4

### Final\_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name:	Portable Thermal Camera
Model:	S1280
Test Mode:	BR_DH5_High channel
Order No/Sample No:	168392026/A003352666-001
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

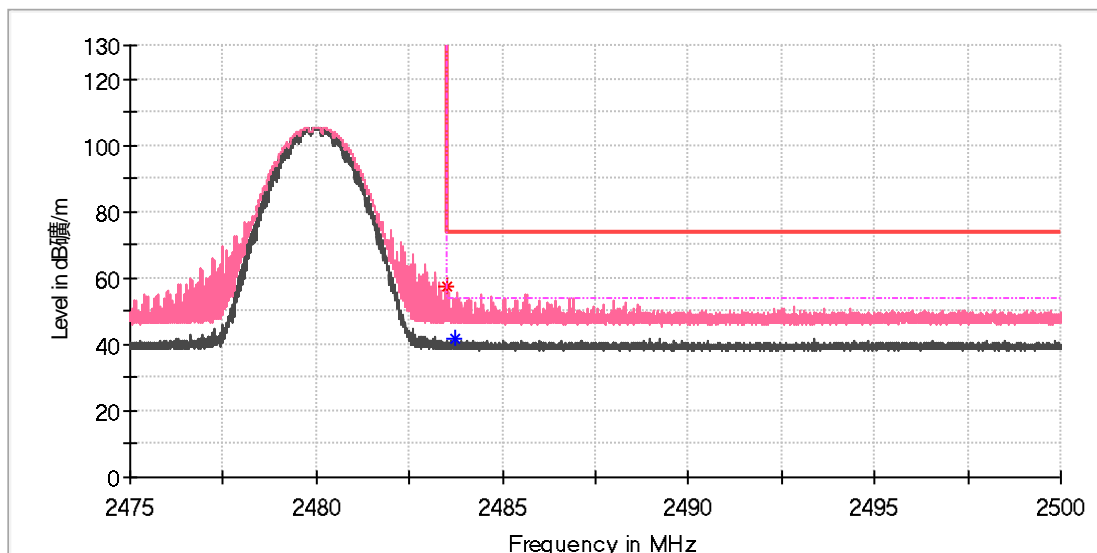

### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.518750	57.66	---	74.00	16.34	100.0	V	219.0	7.4
2483.710000	---	41.55	54.00	12.45	100.0	V	180.0	7.4

### Final\_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---