

TEST REPORT

Report No.: BCTC2011117264-2E

Applicant: Reolink Innovation Limited

Product Name: WiFi IP Camera

Model/Type Ref.: RLC-511WA

Tested Date: 2020-11-25 to 2020-12-02

Issued Date: 2020-12-02

Shenzhen  BCTC Testing Co., Ltd.

FCC ID: 2AYHE-2012A

Product Name: WiFi IP Camera

Trademark: 

Model/Type Ref.: RLC-511WA
RLC-510WA, RLC-523WA, E2 Zoom

Prepared For: Reolink Innovation Limited

Address: Room B, 4th Floor, Kingway Commercial Building, 171-173
Lockhart Road, Wan Chai, Hong Kong

Manufacturer: SHENZHEN BAICHUAN SECURITY TECHNOLOGY CO., LTD.

Address: 2-4th Floor, Building 2, YuanLing Industrial Park, ShangWu,
Shiyan Street, Bao'an District, Shenzhen, China

Prepared By: Shenzhen BCTC Testing Co., Ltd.

Address: 1-2/F., East of B Building, Pengzhou Industrial Park, Fuyuan 1st
Road, Qiaotou, Fuyong Street, Bao'an District, Shenzhen,
Guangdong, China

Sample Received Date: 2020-11-25

Sample tested Date: 2020-11-25 to 2020-12-02

Issue Date: 2020-12-02

Report No.: BCTC2011117264-2E
FCC Part15 15.407
ANSI C63.10-2013
KDB 662911 D01 v02r01
KDB 789033 D02 v02r01

Test Standards

Test Results PASS

Tested by:



Eric Yang/Project Handler

Approved by:



Zero Zhou/Reviewer


The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

TABLE OF CONTENT

| Test Report Declaration | Page |
|---|------|
| 1. VERSION | 5 |
| 2. TEST SUMMARY | 6 |
| 3. MEASUREMENT UNCERTAINTY | 7 |
| 4. PRODUCT INFORMATION AND TEST SETUP | 8 |
| 4.1 Product Information | 8 |
| 4.2 Test Setup Configuration | 9 |
| 4.3 Support Equipment | 9 |
| 4.4 Channel List | 10 |
| 4.5 Test Mode | 10 |
| 4.6 Antenna | 11 |
| 5. TEST FACILITY AND TEST INSTRUMENT USED | 12 |
| 5.1 Test Facility | 12 |
| 5.2 Test Instrument Used | 12 |
| 6. CONDUCTED EMISSIONS | 14 |
| 6.1 Block Diagram Of Test Setup | 14 |
| 6.2 Limit | 14 |
| 6.3 Test procedure | 14 |
| 6.4 EUT operating Conditions | 14 |
| 6.5 Test Result | 15 |
| 7. RADIATED EMISSIONS | 17 |
| 7.1 Block Diagram Of Test Setup | 17 |
| 7.2 Limit | 18 |
| 7.3 Test procedure | 19 |
| 7.4 EUT operating Conditions | 20 |
| 7.5 Test Result | 21 |
| 8. POWER SPECTRAL DENSITY TEST | 28 |
| 8.1 Block Diagram Of Test Setup | 28 |
| 8.2 Limit | 28 |
| 8.3 Test procedure | 29 |
| 8.4 EUT operating Conditions | 29 |
| 8.5 Test Result | 30 |
| 9. 26DB & 6DB & 99% EMISSION BANDWIDTH | 34 |
| 9.1 Block Diagram Of Test Setup | 34 |
| 9.2 Limit | 34 |
| 9.3 Test procedure | 34 |
| 9.4 EUT operating Conditions | 35 |
| 9.5 Test Result | 35 |
| 10. MAXIMUM CONDUCTED OUTPUT POWER | 44 |
| 10.1 Block Diagram Of Test Setup | 44 |
| 10.2 Limit | 44 |


| | | |
|------------|--|-----------|
| 10.3 | Test procedure | 44 |
| 10.4 | EUT operating Conditions | 45 |
| 10.5 | Test Result | 46 |
| 11. | OUT OF BAND EMISSIONS | 48 |
| 11.1 | Block Diagram Of Test Setup | 48 |
| 11.2 | Limit | 48 |
| 11.3 | Test procedure | 48 |
| 11.4 | EUT operating Conditions | 48 |
| 11.5 | Test Result | 49 |
| 12. | SPURIOUS RF CONDUCTED EMISSIONS | 55 |
| 12.1 | Block Diagram Of Test Setup | 55 |
| 12.2 | Limit | 55 |
| 12.3 | Test procedure | 55 |
| 12.4 | Test Result | 56 |
| 13. | ANTENNA REQUIREMENT | 63 |
| 14.1 | Limit | 63 |
| 14.2 | Test Result | 63 |
| 14. | EUT PHOTOGRAPHS | 64 |
| 15. | EUT TEST SETUP PHOTOGRAPHS | 66 |

(Note: N/A means not applicable)

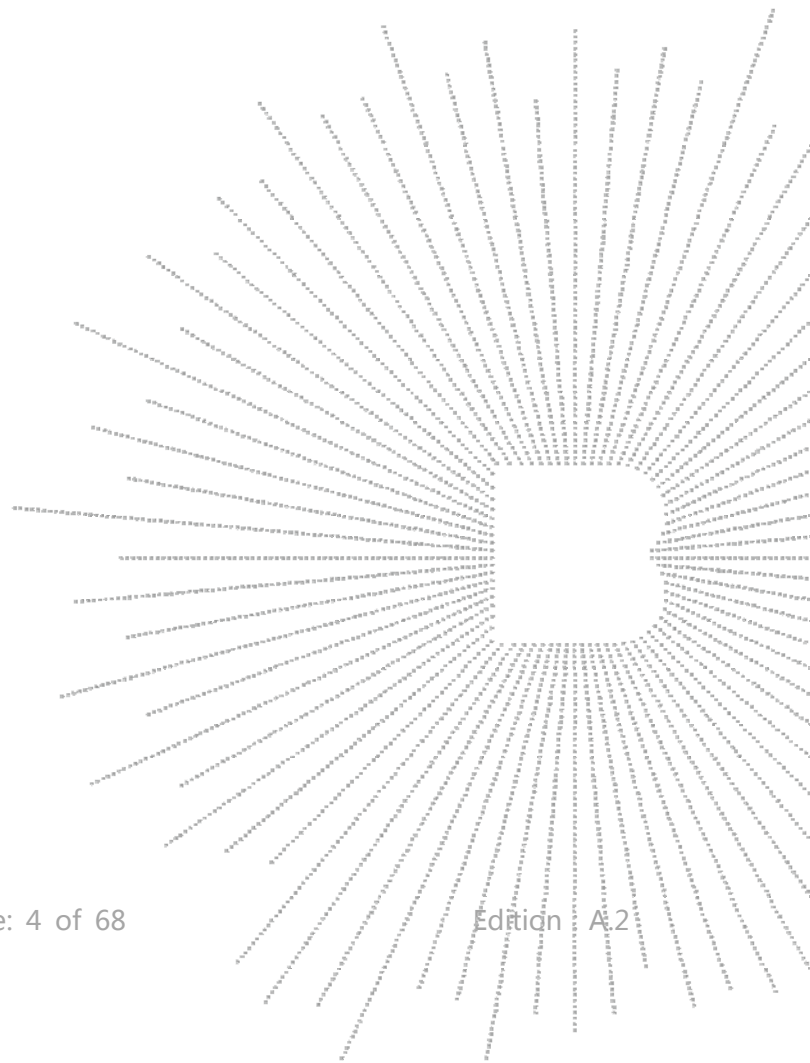

1. VERSION


| Report No. | Issue Date | Description | Approved |
|-------------------|------------|-------------|----------|
| BCTC2011117264-2E | 2020-12-02 | Original | Valid |
| | | | |

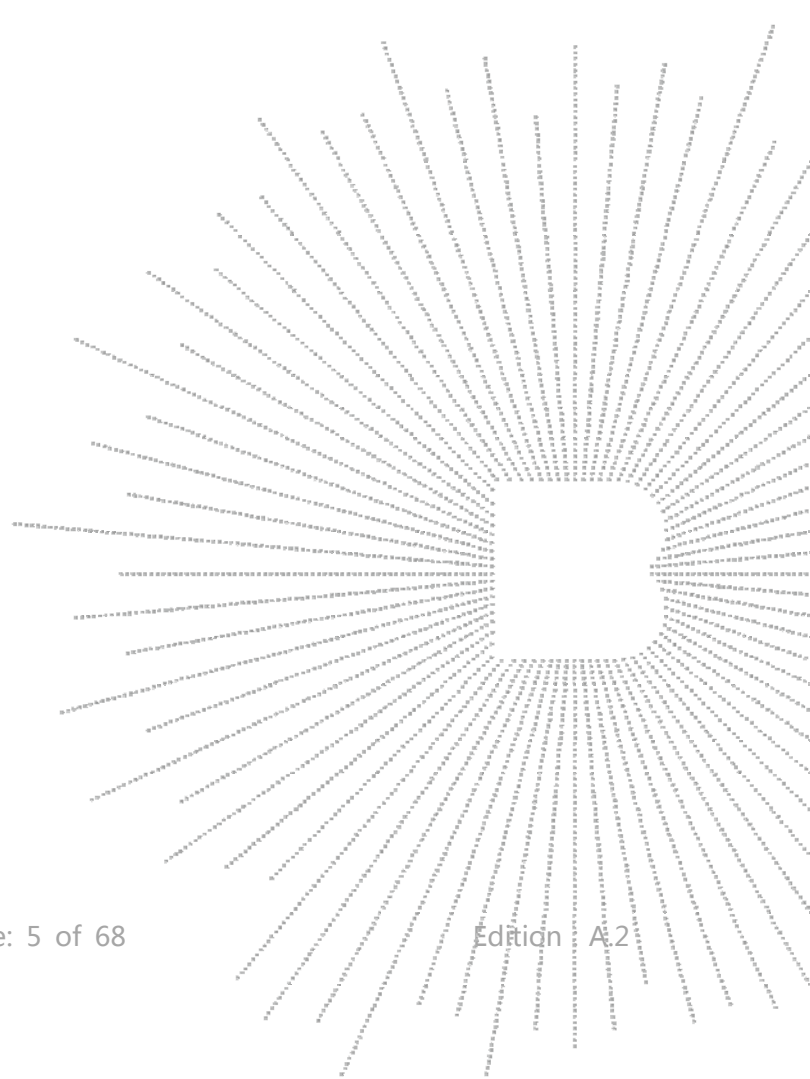

2. TEST SUMMARY

The Product has been tested according to the following specifications:


| No. | Test Parameter | Clause No | Results |
|-----|---|---------------------|---------|
| 1 | Spurious Radiated Emissions | 15.209 15.407(b) | PASS |
| 2 | Conducted Emission | 15.207 | PASS |
| 3 | 26 dB and 99% Emission Bandwidth | 15.407(a) | PASS |
| 4 | Minimum 6 dB bandwidth | 15.407(e) | PASS |
| 5 | Maximum Conducted Output Power | 15.407(a) | PASS |
| 6 | Band Edge | 15.407(b) | PASS |
| 7 | Power Spectral Density | 15.407(a) | PASS |
| 8 | Spurious Emissions at Antenna Terminals | 15.407(b) | PASS |
| 9 | Antenna Requirement | 15.203 | PASS |

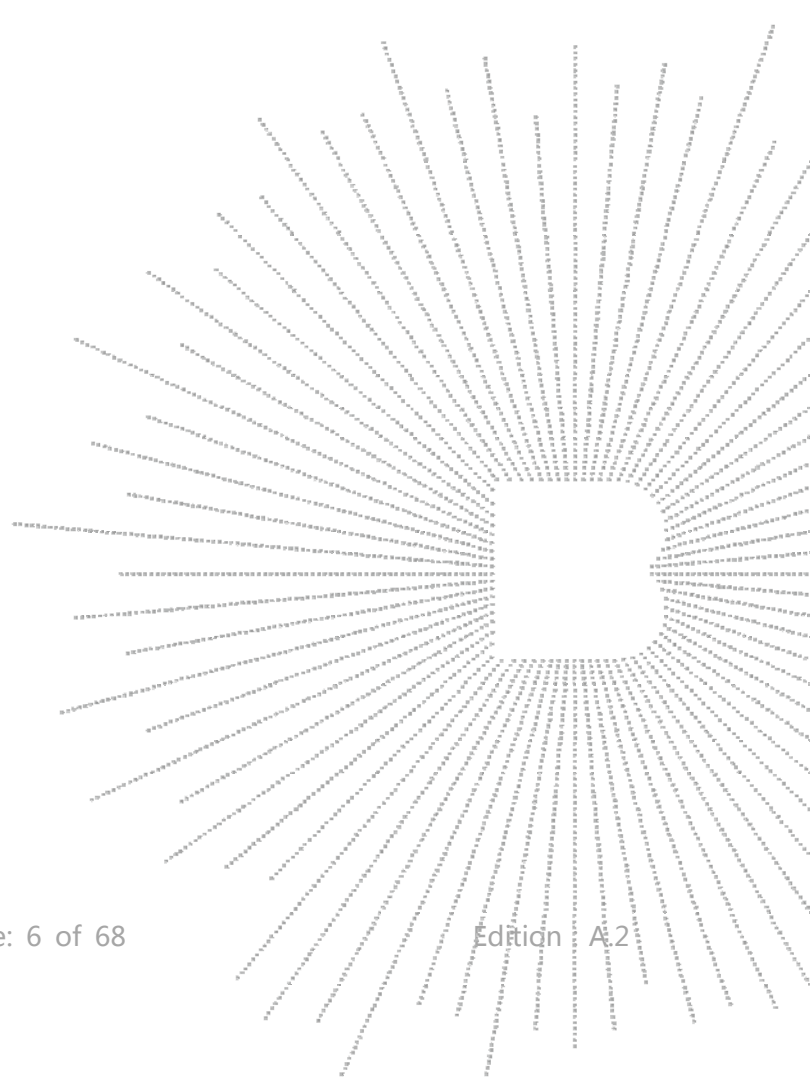

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.


| No. | Item | Uncertainty |
|-----|--|-------------|
| 1 | 3m chamber Radiated spurious emission(30MHz-1GHz) | U=4.3dB |
| 2 | 3m chamber Radiated spurious emission(1GHz-18GHz) | U=4.5dB |
| 3 | 3m chamber Radiated spurious emission(18GHz-40GHz) | U=3.34dB |
| 4 | Conducted Adjacent channel power | U=1.38dB |
| 5 | Conducted output power uncertainty Above 1G | U=1.576dB |
| 6 | Conducted output power uncertainty below 1G | U=1.28dB |
| 7 | humidity uncertainty | U=5.3% |
| 8 | Temperature uncertainty | U=0.59°C |

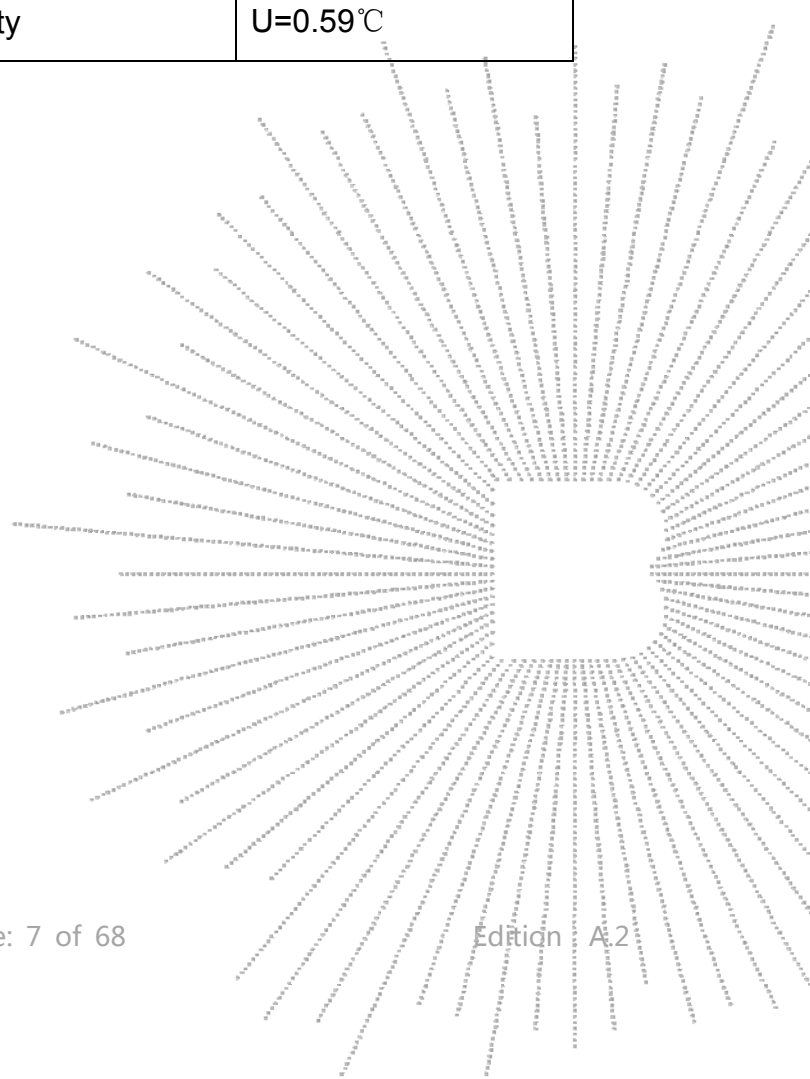

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information


| | |
|---------------------------------|--|
| Model/Type Ref.: | RLC-511WA RLC-510WA, RLC-523WA, E2 Zoom |
| Model differences: | All the model are the same circuit and RF module, except model names. |
| IEEE 802.11 WLAN Mode Supported | 802.11n(20MHz channel bandwidth) 802.11n(40MHz channel bandwidth) |
| Operation Frequency: | 5180-5240MHz for 802.11n(HT20); 5190-5230MHz for 802.11n(HT40); 5745-5825 MHz for 802.11n(HT20); 5755-5795 MHz for 802.11n(HT40); |
| Data Rate | 802.11n(HT20/HT40):MCS0-MCS15; |
| Type of Modulation: | OFDM with BPSK/QPSK/16QAM/64QAM/256QAM for 802.11n; |
| Number Of Channel | 4 channels for 802.11n20 in the 5180-5240MHz band ; 2 channels for 802.11 n40 in the 5190-5230MHz band ; 5 channels for 802.11n20 in the 5745-5825MHz band ; 2 channels for 802.11 n40 in the 5755-5795MHz band ; |
| Antenna installation: | External antenna |
| Antenna Gain: | Antenna A: 2dBi Antenna B: 2dBi |
| Ratings: | AC 120V |
| Adapter: | MODEL:DCT12W120100US-B0 INPUT:AC100-240~50/60Hz 0.3A max OUTPUT:DC12.0V 1.0A |

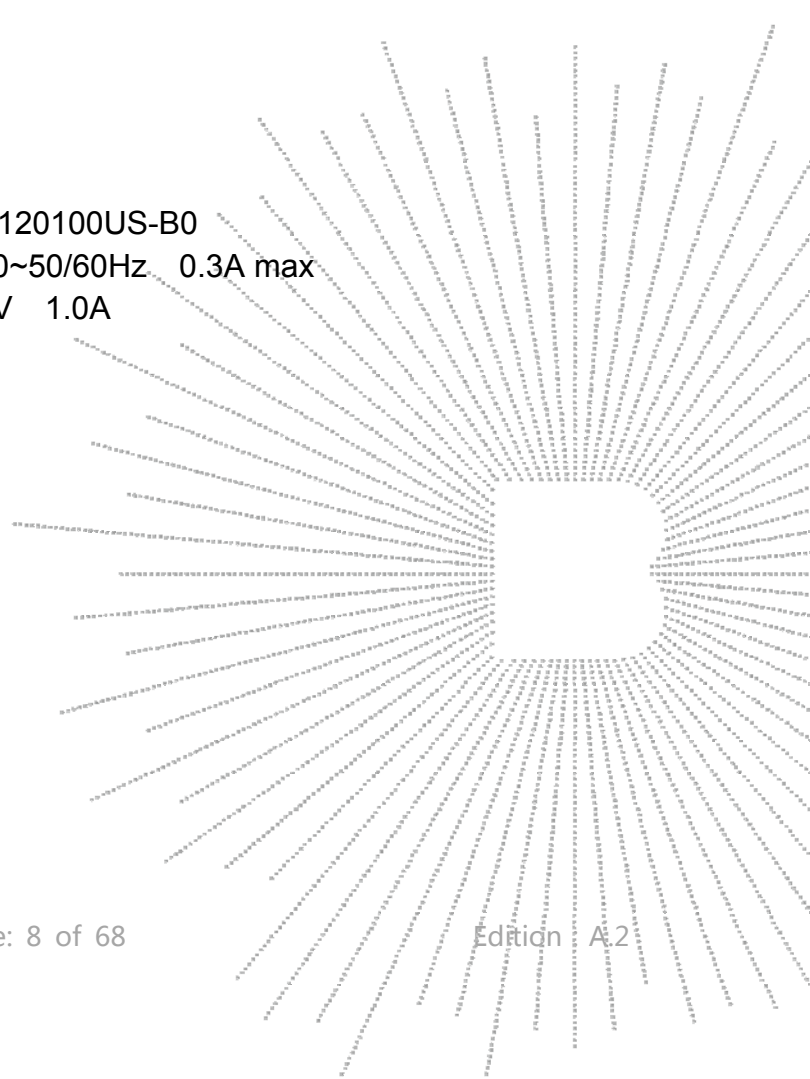


4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.

Conducted Emission Test:



Radiated Spurious Emission



4.3 Support Equipment

| | Device Type | Brand | Model | Series No. | Note |
|-----|----------------|---|-----------------------|------------|-----------|
| E-1 | WiFi IP Camera |  | RLC-511WA | N/A | EUT |
| E-2 | Adapter | N/A | DCT12W120100 US-B0 | N/A | Auxiliary |

| Item | Shielded Type | Ferrite Core | Length | Note |
|------|---------------|--------------|--------|---------------------|
| C-1 | NO | NO | 1.5M | DC cable unshielded |

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

| 802.11n(20MHz) Carrier Frequency Channel | | | | | | | |
|---|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|
| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 36 | 5180 | 44 | 5220 | 40 | 5200 | 48 | 5240 |
| 149 | 5745 | 153 | 5765 | 157 | 5785 | 161 | 5805 |
| 165 | 5825 | - | - | - | - | - | - |

| 802.11n (40MHz) Carrier Frequency Channel | | | | | | | |
|---|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|
| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 38 | 5190 | 46 | 5230 | - | - | - | - |
| 151 | 5755 | 159 | 5795 | - | - | - | - |


4.5 Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

| Pretest Mode | Description |
|--------------|---------------------------------|
| Mode 1 | 802.11n 20 CH36/ CH40/ CH 48 |
| Mode 2 | 802.11n 20 CH149/ CH157/ CH 165 |
| Mode 3 | 802.11n40 CH38/ CH 46 |
| Mode 4 | 802.11n40 CH 151 / CH 159 |
| Mode 5 | Link Mode |

Note:

- (1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.

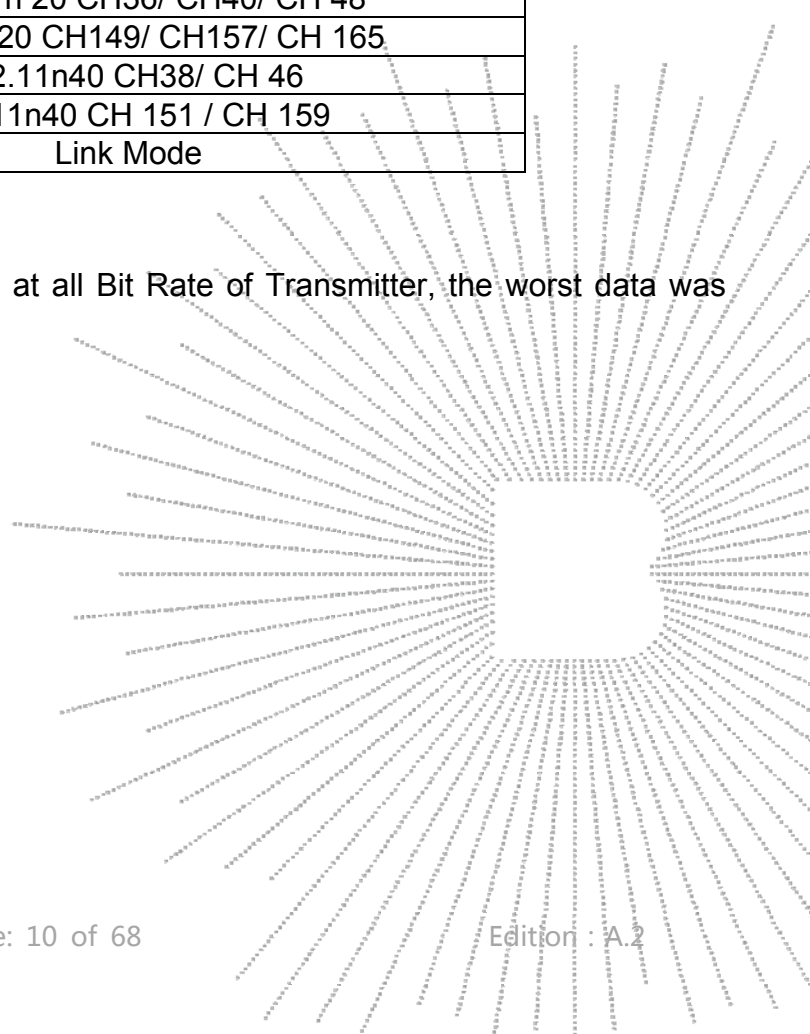

4.6 Antenna

| Antenna | Brand | Model Name | Antenna Type | Gain (dBi) | NOTE |
|---------|-------|------------|------------------|------------|------|
| A | N/A | N/A | External antenna | 2 | |
| B | N/A | N/A | External antenna | 2 | |

EUT has two External antennas with Max gain GANT 2dBi on every antenna, CDD device with two spatial streams, also can operat with one spatial streams according to KDB662911 D01 v02r01, Directional gain= GANT + Array Gain, where Array Gain is as follows.

1)For power spectral density(PSD) measurements,


Array Gain= $10\log(NANT/NSS)$ dB= $10\log(2/1)$ =3.01dB,

So the directional gain for PSD is 5.01dBi

2)For power measurements,

The Array gain=0 dB for $NANT \leq 4$,

So the directional gain for Power measurements is 2dBi

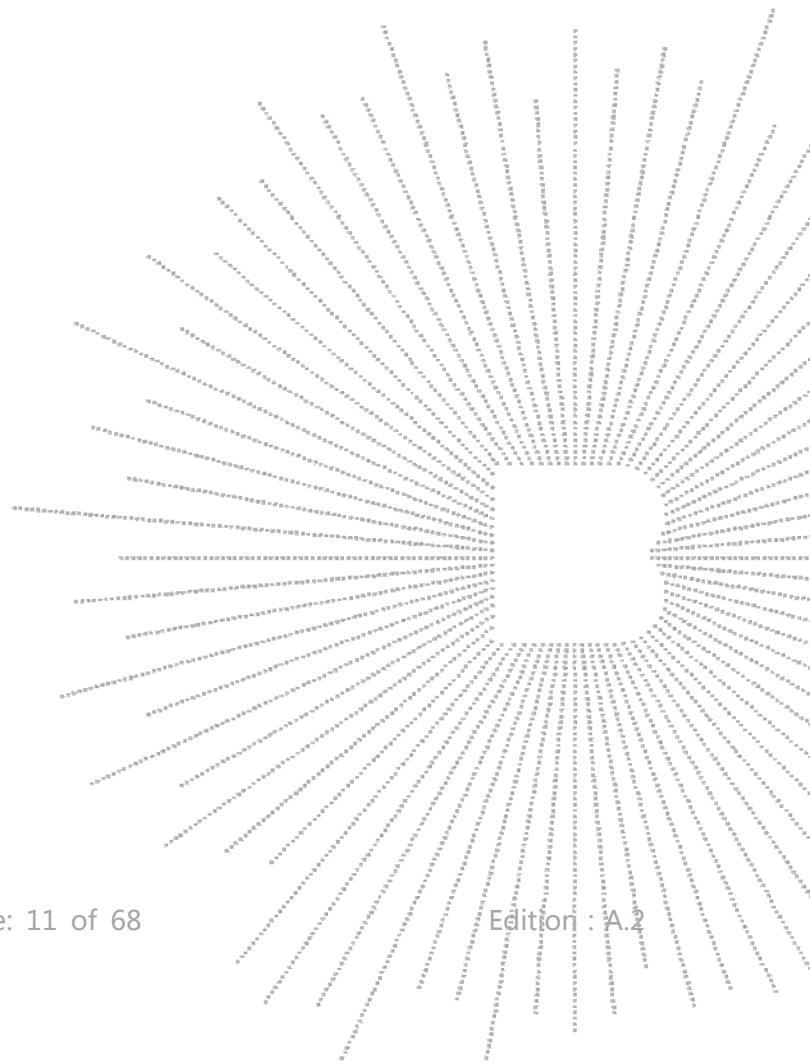

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility


All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address: 1-2/F., East of B Building, Pengzhou Industrial Park, Fuyuan 1st Road, Qiaotou, Fuyong Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

IC Registered No.: 23583

5.2 Test Instrument Used


| Conducted emissions Test | | | | | |
|--------------------------|--------------|----------|----------------|---------------|---------------|
| Equipment | Manufacturer | Model# | Serial# | Last Cal. | Next Cal. |
| Receiver | R&S | ESR3 | 102075 | Jun. 08, 2020 | Jun. 07, 2021 |
| LISN | R&S | ENV216 | 101375 | Jun. 04, 2020 | Jun. 03, 2021 |
| ISN | HPX | ISN T800 | S1509001 | Jun. 04, 2020 | Jun. 03, 2021 |
| Software | Frad | EZ-EMC | EMC-CON 3A1 | \ | \ |

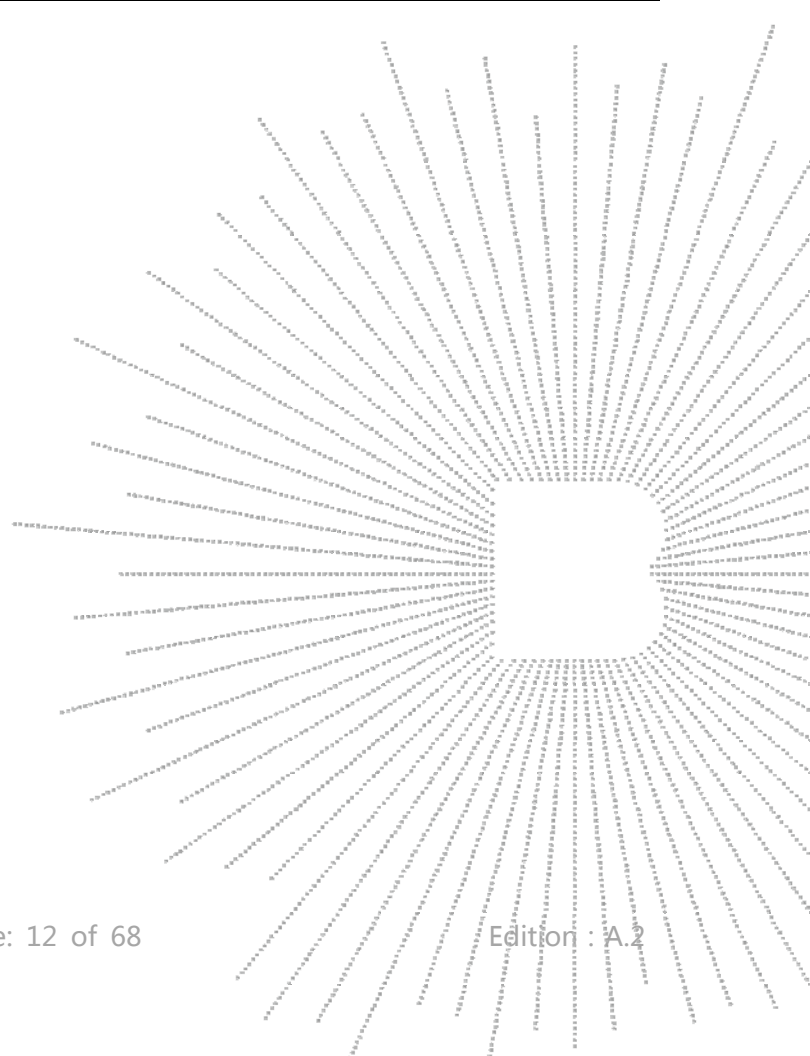

| Radiated emissions Test (966 chamber) | | | | | |
|---------------------------------------|-----------------|-------------------|-------------------|---------------|---------------|
| Equipment | Manufacturer | Model# | Serial# | Last Cal. | Next Cal. |
| 966 chamber | ChengYu | 966 Room | 966 | Jun. 06. 2020 | Jun. 05, 2023 |
| Receiver | R&S | ESR3 | 102075 | Jun. 08, 2020 | Jun. 07, 2021 |
| Receiver | R&S | ESRP | 101154 | Jun. 08, 2020 | Jun. 07, 2021 |
| Amplifier | Schwarzbeck | BBV9718 | 9718-309 | Jun. 04, 2020 | Jun. 03, 2021 |
| Amplifier | Schwarzbeck | BBV9744 | 9744-0037 | Jun. 04, 2020 | Jun. 03, 2021 |
| TRILOG Broadband Antenna | schwarzbeck | VULB 9163 | VULB9163- 942 | Jun. 08, 2020 | Jun. 07, 2021 |
| Horn Antenna | SCHWARZBE CK | BBHA9120 D | 1201 | Jun. 10, 2020 | Jun. 09, 2021 |
| Horn Antenna (18GHz-40GHz) | SCHWARZBE CK | BBHA9170 | 822 | Jun. 10, 2020 | Jun. 09, 2021 |
| Amplifier (18GHz-40GHz) | MITEQ | TTA1840-3 5-HG | 2034381 | Jun. 08, 2020 | Jun. 07, 2021 |
| Loop Antenna (9kHz-30MHz) | SCHWARZBE CK | FMZB1519 B | 014 | Jun. 08, 2020 | Jun. 07, 2021 |
| RF cables1 (9kHz-30MHz) | Huber+Suhnar | 9kHz-30M Hz | B1702988- 0008 | Jun. 08, 2020 | Jun. 07, 2021 |
| RF cables2 (30MHz-1GHz) | Huber+Suhnar | 30MHz-1G Hz | 1486150 | Jun. 08, 2020 | Jun. 07, 2021 |
| RF cables3 (1GHz-40GHz) | Huber+Suhnar | 1GHz-40G Hz | 1607106 | Jun. 08, 2020 | Jun. 07, 2021 |
| Power Metter | Keysight | E4419B | \ | Jun. 08, 2020 | Jun. 07, 2021 |
| Power Sensor (AV) | Keysight | E9 300A | \ | Jun. 08, 2020 | Jun. 07, 2021 |
| Signal Analyzer 20kHz-26.5GHz | KEYSIGHT | N9020A | MY491000 60 | Jun. 04, 2020 | Jun. 03, 2021 |
| Spectrum Analyzer 9kHz-40GHz | Agilent | FSP40 | 100363 | Jun. 13, 2020 | Jun. 12, 2021 |
| Software | Frad | EZ-EMC | FA-03A2 RE | \ | \ |

6. CONDUCTED EMISSIONS

6.1 Block Diagram Of Test Setup

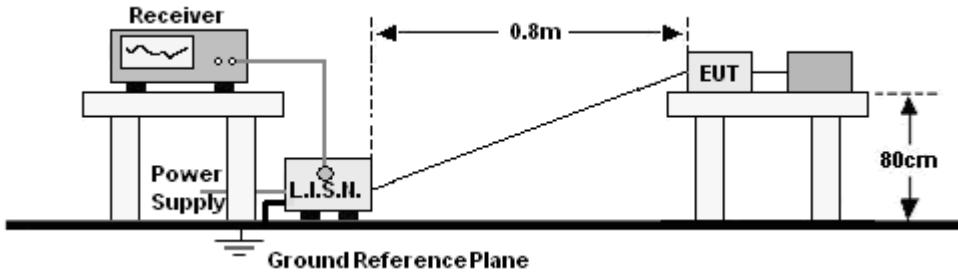

6.2 Limit

| FREQUENCY (MHz) | Limit (dBuV) | |
|-----------------|--------------|-----------|
| | Quas-peak | Average |
| 0.15 -0.5 | 66 - 56 * | 56 - 46 * |
| 0.50 -5.0 | 56.00 | 46.00 |
| 5.0 -30.0 | 60.00 | 50.00 |

Notes:
 1. *Decreasing linearly with logarithm of frequency.
 2. The lower limit shall apply at the transition frequencies.

6.3 Test procedure

| Receiver Parameters | Setting |
|---------------------|----------|
| Attenuation | 10 dB |
| Start Frequency | 0.15 MHz |
| Stop Frequency | 30 MHz |
| IF Bandwidth | 9 kHz |

- The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.


6.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 240V, the worst voltage was AC 120V and the data recording in the report.

6.5 Test Result

| | | | |
|----------------|--------------|---------------------|--------|
| Temperature : | 26 °C | Relative Humidity : | 54% |
| Pressure : | 101kPa | Phase : | L |
| Test Voltage : | AC 120V/60Hz | Test Mode : | Mode 5 |

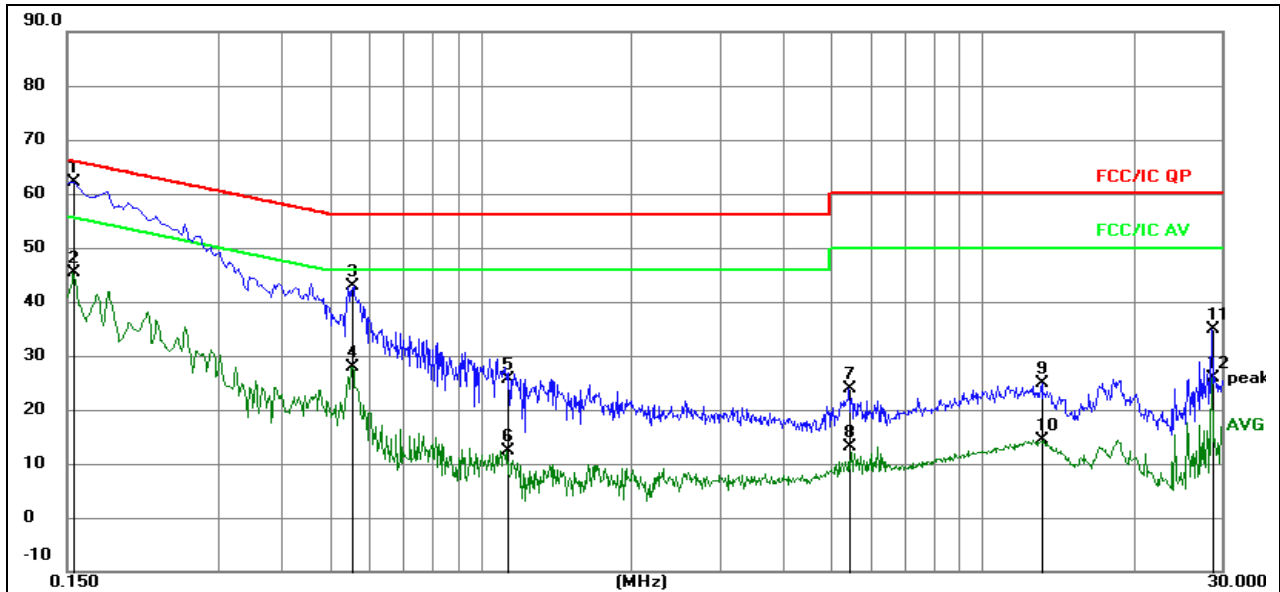


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

| No. | Mk. | Freq. MHz | Reading Level | Correct Factor | Measure- ment | Limit | Over | Detector |
|-----|-----|--------------|------------------|-------------------|------------------|-------|--------|----------|
| | | | | | dBuV | dBuV | dB | |
| 1 | * | 0.1545 | 52.68 | 9.51 | 62.19 | 65.75 | -3.56 | QP |
| 2 | | 0.1545 | 35.76 | 9.51 | 45.27 | 55.75 | -10.48 | AVG |
| 3 | | 0.5550 | 33.08 | 9.82 | 42.90 | 56.00 | -13.10 | QP |
| 4 | | 0.5550 | 17.96 | 9.82 | 27.78 | 46.00 | -18.22 | AVG |
| 5 | | 1.1310 | 16.05 | 9.57 | 25.62 | 56.00 | -30.38 | QP |
| 6 | | 1.1310 | 2.86 | 9.57 | 12.43 | 46.00 | -33.57 | AVG |
| 7 | | 5.4195 | 14.02 | 9.78 | 23.80 | 60.00 | -36.20 | QP |
| 8 | | 5.4195 | 3.44 | 9.78 | 13.22 | 50.00 | -36.78 | AVG |
| 9 | | 13.1685 | 15.12 | 9.70 | 24.82 | 60.00 | -35.18 | QP |
| 10 | | 13.1685 | 4.58 | 9.70 | 14.28 | 50.00 | -35.72 | AVG |
| 11 | | 28.7385 | 25.10 | 9.71 | 34.81 | 60.00 | -25.19 | QP |
| 12 | | 28.7385 | 16.12 | 9.71 | 25.83 | 50.00 | -24.17 | AVG |

| | | | |
|----------------|--------------|---------------------|--------|
| Temperature : | 26 °C | Relative Humidity : | 54% |
| Pressure : | 101kPa | Phase : | N |
| Test Voltage : | AC 120V/60Hz | Test Mode : | Mode 5 |

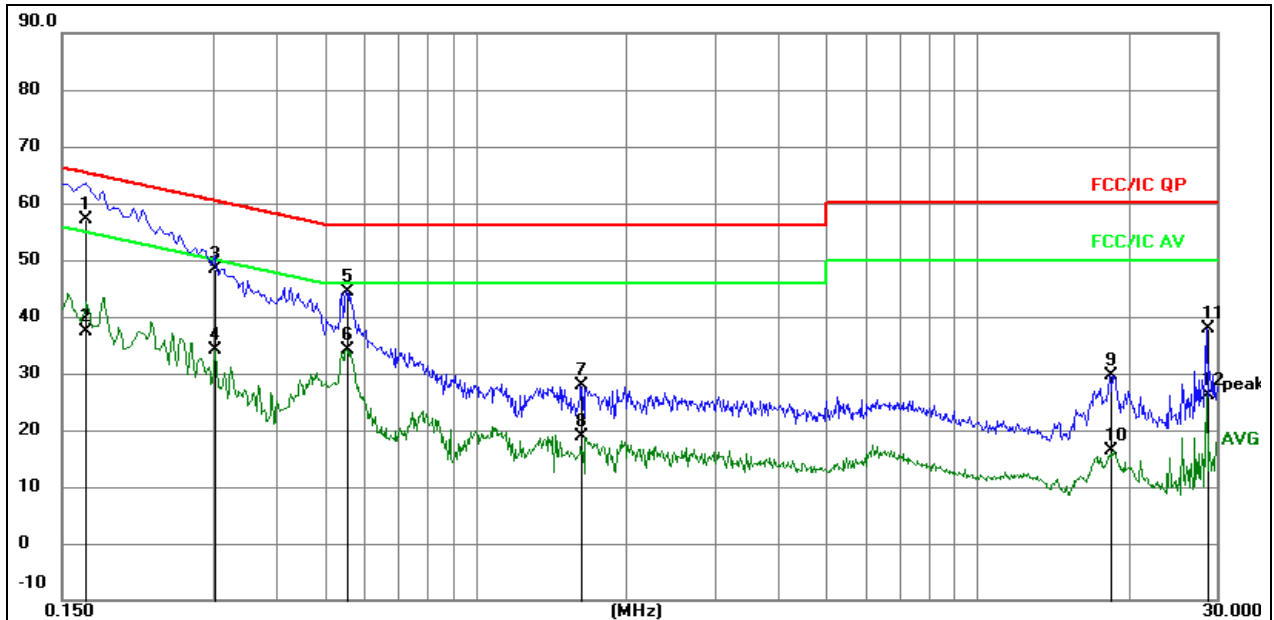

Remark:


1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

| No. | Mk. | Freq. MHz | Reading Level | Correct Factor dB | Measure- ment dBuV | Limit dBuV | Over dB | Detector |
|-----|-----|--------------|------------------|-------------------------|--------------------------|---------------|------------|----------|
| 1 | * | 0.1669 | 47.69 | 9.50 | 57.19 | 65.11 | -7.92 | QP |
| 2 | | 0.1669 | 27.84 | 9.50 | 37.34 | 55.11 | -17.77 | AVG |
| 3 | | 0.3030 | 38.75 | 9.58 | 48.33 | 60.16 | -11.83 | QP |
| 4 | | 0.3030 | 24.66 | 9.58 | 34.24 | 50.16 | -15.92 | AVG |
| 5 | | 0.5550 | 34.68 | 9.82 | 44.50 | 56.00 | -11.50 | QP |
| 6 | | 0.5550 | 24.42 | 9.82 | 34.24 | 46.00 | -11.76 | AVG |
| 7 | | 1.6215 | 18.41 | 9.58 | 27.99 | 56.00 | -28.01 | QP |
| 8 | | 1.6215 | 9.25 | 9.58 | 18.83 | 46.00 | -27.17 | AVG |
| 9 | | 18.4155 | 19.78 | 9.76 | 29.54 | 60.00 | -30.46 | QP |
| 10 | | 18.4155 | 6.73 | 9.76 | 16.49 | 50.00 | -33.51 | AVG |
| 11 | | 28.7160 | 28.25 | 9.71 | 37.96 | 60.00 | -22.04 | QP |
| 12 | | 28.7160 | 16.53 | 9.71 | 26.24 | 50.00 | -23.76 | AVG |


7. RADIATED EMISSIONS

7.1 Block Diagram Of Test Setup


(A) Radiated Emission Test-Up Frequency Below 30MHz

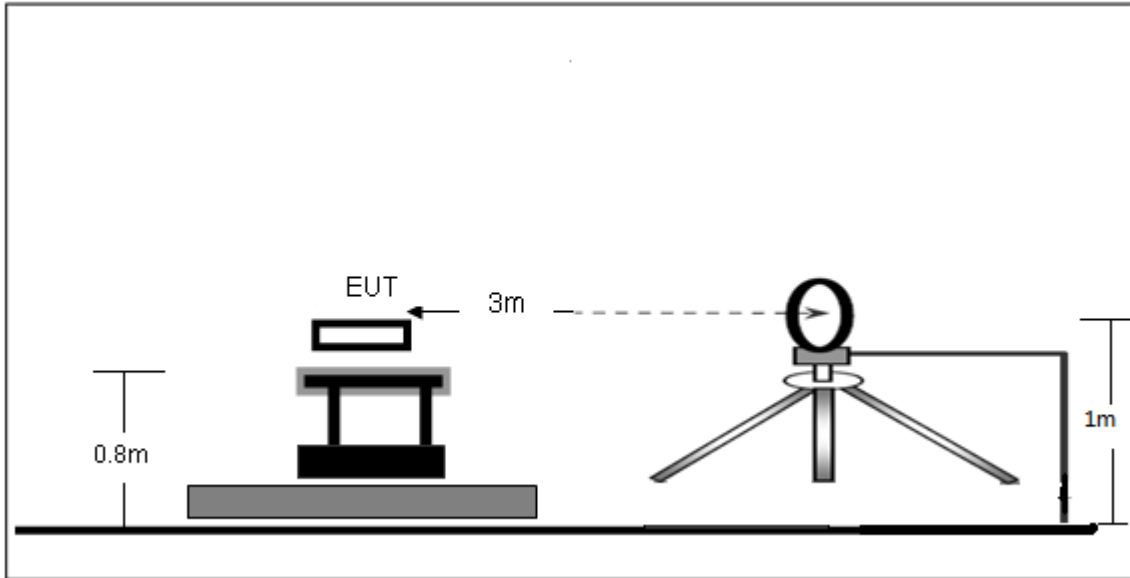

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

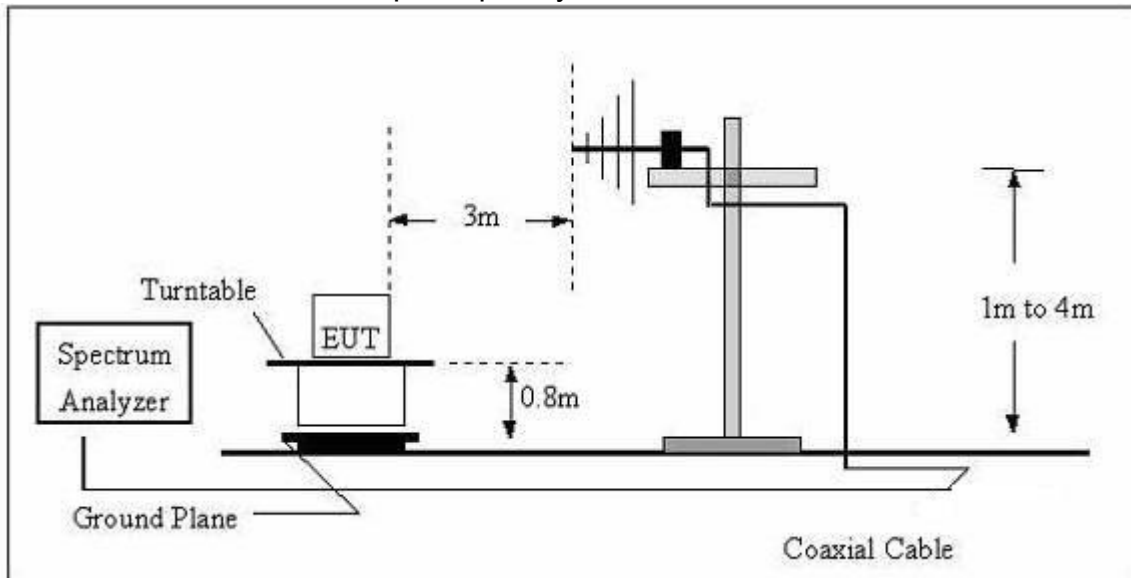

(C) Radiated Emission Test-Up Frequency Above 1GHz

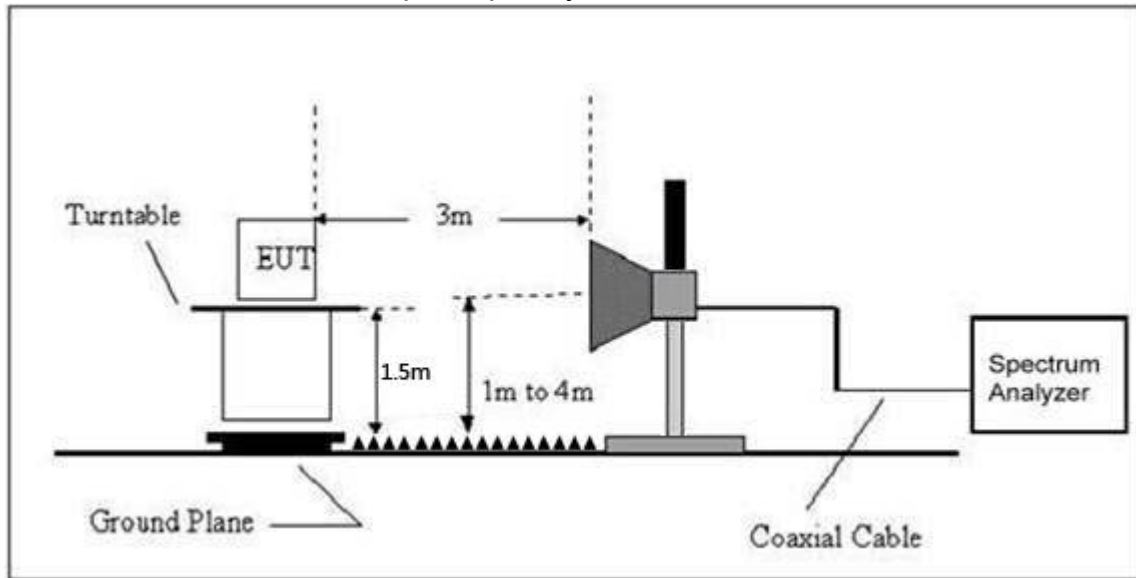

7.2 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequency (MHz) | Field Strength uV/m | Distance (m) | Field Strength Limit at 3m Distance | |
|--------------------|------------------------|-----------------|-------------------------------------|--------------------------------------|
| | | | uV/m | dBuV/m |
| 0.009 ~ 0.490 | 2400/F(kHz) | 300 | 10000 * 2400/F(kHz) | 20log ^{(2400/F(kHz))} + 80 |
| 0.490 ~ 1.705 | 24000/F(kHz) | 30 | 100 * 24000/F(kHz) | 20log ^{(24000/F(kHz))} + 40 |
| 1.705 ~ 30 | 30 | 30 | 100 * 30 | 20log ⁽³⁰⁾ + 40 |
| 30 ~ 88 | 100 | 3 | 100 | 20log ⁽¹⁰⁰⁾ |
| 88 ~ 216 | 150 | 3 | 150 | 20log ⁽¹⁵⁰⁾ |
| 216 ~ 960 | 200 | 3 | 200 | 20log ⁽²⁰⁰⁾ |
| Above 960 | 500 | 3 | 500 | 20log ⁽⁵⁰⁰⁾ |

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

| FREQUENCY (MHz) | Limit (dBuV/m) (at 3M) | |
|-----------------|------------------------|---------|
| | PEAK | AVERAGE |
| Above 1000 | 74 | 54 |

Notes:

- (1)The limit for radiated test was performed according to FCC PART 15C.
- (2)The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

7.3 Test procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205.

It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

| Spectrum Parameter | Setting |
|---------------------------------------|--|
| Attenuation | Auto |
| Start Frequency | 1000 MHz |
| Stop Frequency | 10th carrier harmonic |
| RB / VB (emission in restricted band) | 1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average |

| Receiver Parameter | Setting |
|------------------------|----------------------------------|
| Attenuation | Auto |
| Start ~ Stop Frequency | 9kHz~150kHz / RB 200Hz for QP |
| Start ~ Stop Frequency | 150kHz~30MHz / RB 9kHz for QP |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 120kHz for QP |

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported


During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

| Frequency Band (MHz) | Function | Resolution bandwidth | Video Bandwidth |
|----------------------|----------|----------------------|-----------------|
| 30 to 1000 | QP | 120 kHz | 300 kHz |
| Above 1000 | Peak | 1 MHz | 1 MHz |
| | Average | 1 MHz | 10 Hz |

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW [kHz]})$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

7.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

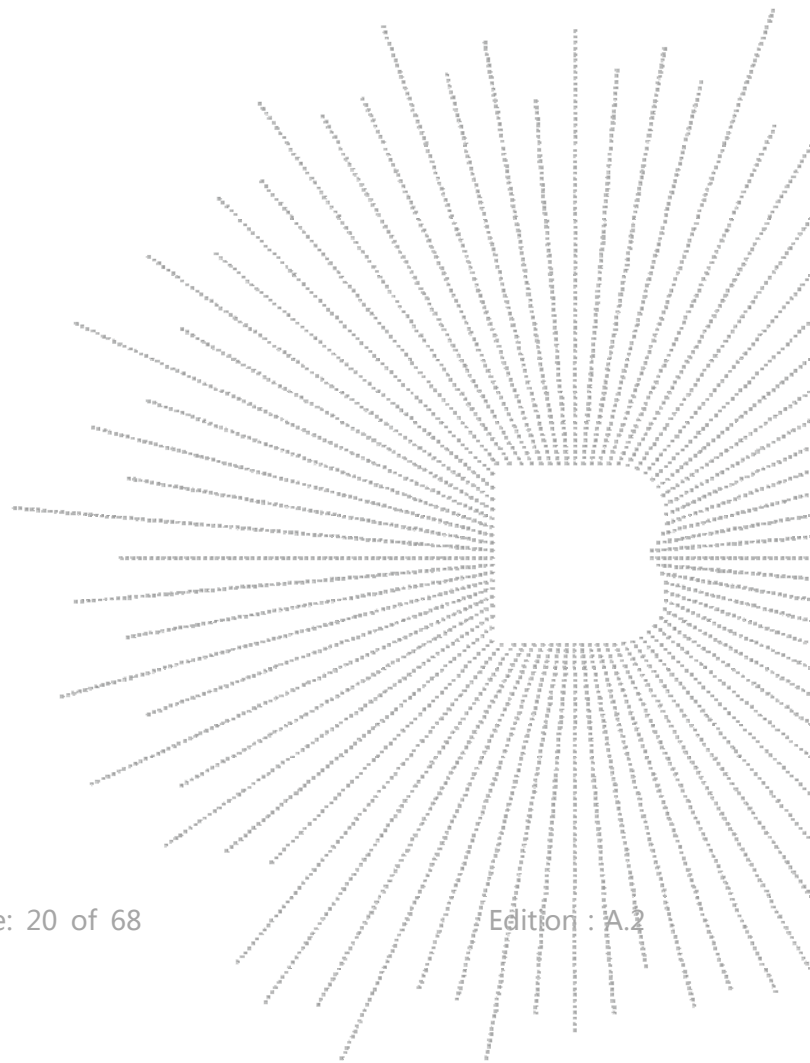

7.5 Test Result

Below 30MHz

| | | | |
|--------------|---------|--------------------|---------|
| Temperature: | 26°C | Relative Humidity: | 24% |
| Pressure: | 101 kPa | Test Voltage : | AC 120V |
| Test Mode : | Mode 5 | Polarization : | -- |


| Freq. (MHz) | Reading (dBuV/m) | Limit (dBuV/m) | Margin (dB) | State P/F |
|----------------|---------------------|-------------------|----------------|--------------|
| -- | -- | -- | -- | PASS |
| -- | -- | -- | -- | PASS |

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log(\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

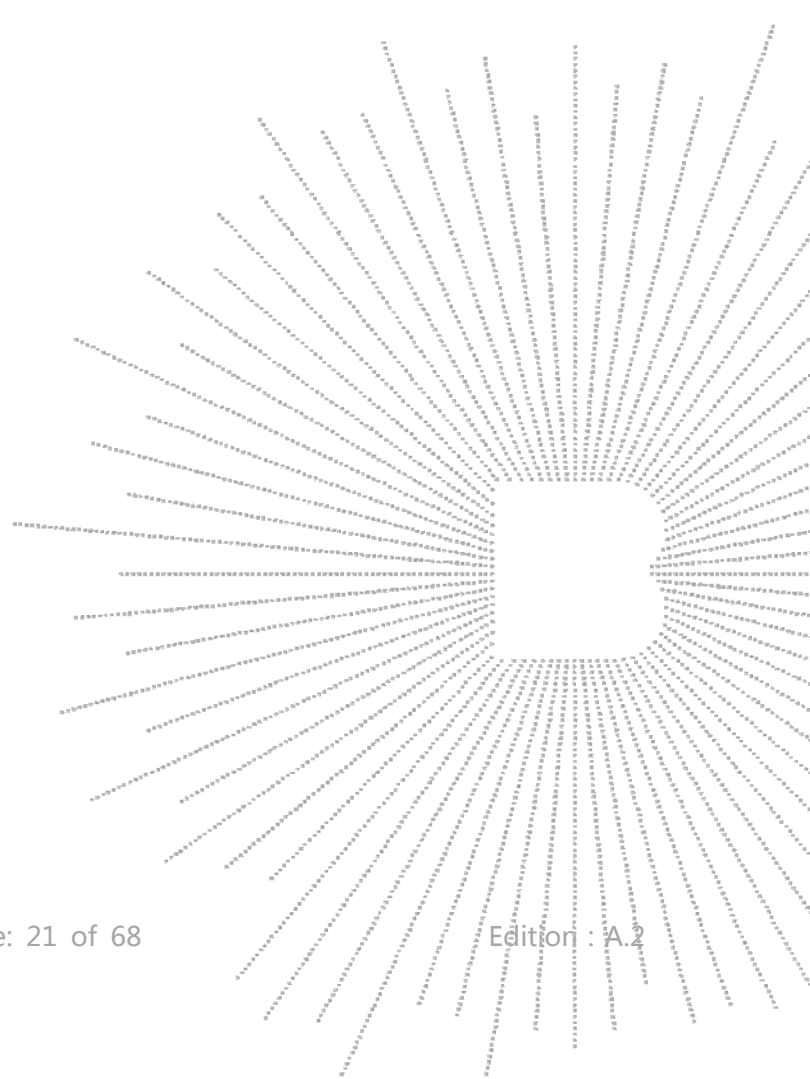

Between 30MHz – 1GHz

| | | | |
|--------------|---------|--------------------|------------|
| Temperature: | 26°C | Relative Humidity: | 54% |
| Pressure: | 101 kPa | Test Voltage : | AC 120V |
| Test Mode : | Mode 5 | Polarization : | Horizontal |

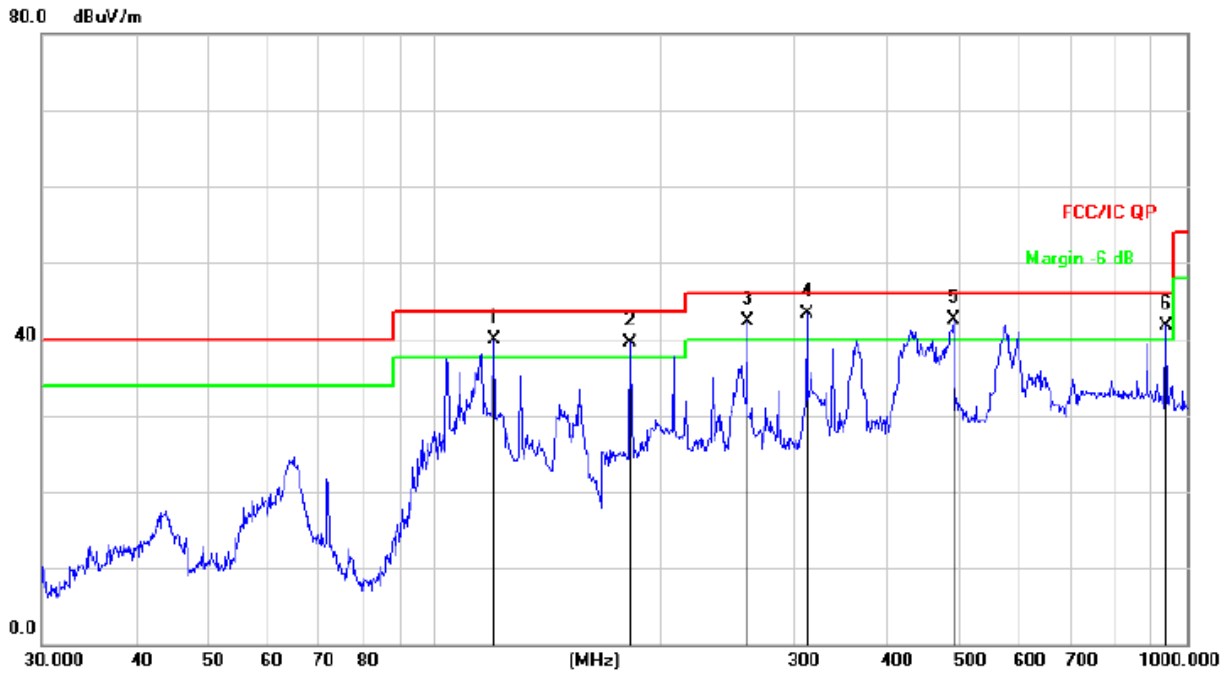


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dB/m | Over dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|---------------|------------|----------|
| 1 | ! | 119.8555 | 56.60 | -16.76 | 39.84 | 43.50 | -3.66 | QP |
| 2 | ! | 181.9200 | 55.92 | -16.51 | 39.41 | 43.50 | -4.09 | QP |
| 3 | ! | 260.1444 | 56.09 | -13.86 | 42.23 | 46.00 | -3.77 | QP |
| 4 | * | 312.1792 | 55.36 | -12.08 | 43.28 | 46.00 | -2.72 | QP |
| 5 | ! | 489.0269 | 50.32 | -7.80 | 42.52 | 46.00 | -3.48 | QP |
| 6 | ! | 938.8324 | 42.14 | -0.42 | 41.72 | 46.00 | -4.28 | QP |

| | | | |
|--------------|---------|--------------------|----------|
| Temperature: | 26°C | Relative Humidity: | 54% |
| Pressure: | 101 kpa | Test Voltage : | AC 120V |
| Test Mode : | Mode 5 | Polarization : | Vertical |

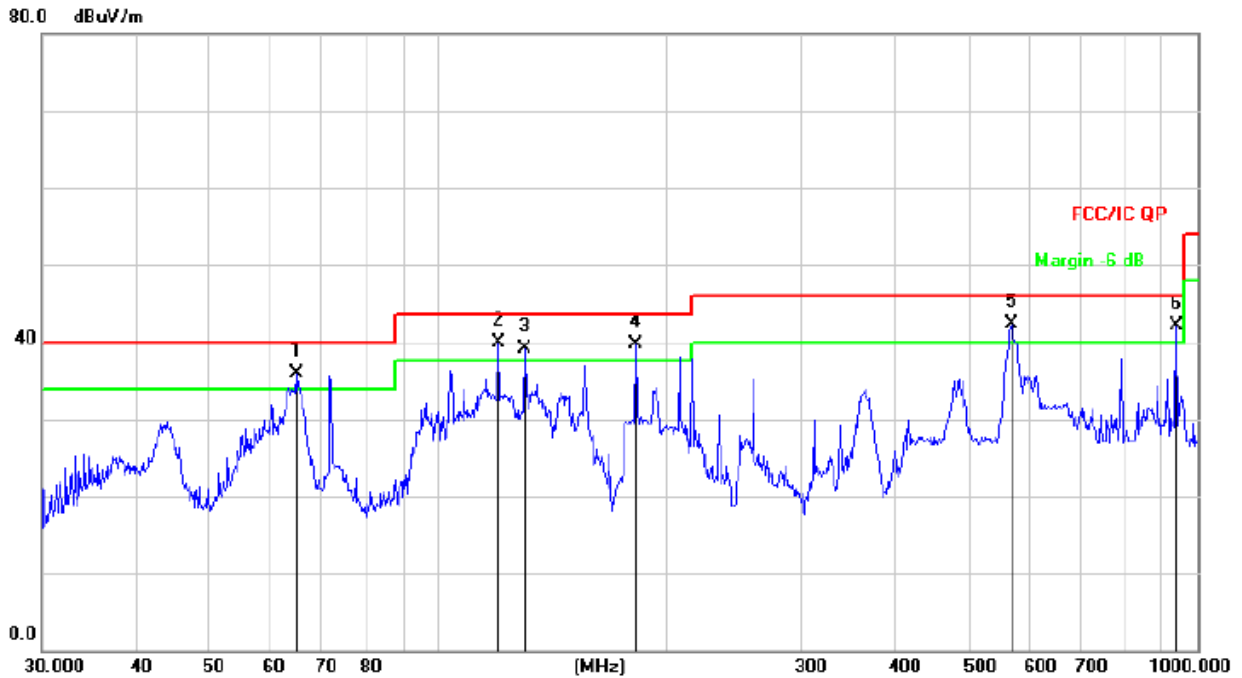

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dB/m | Over dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|---------------|------------|----------|
| 1 | ! | 64.8863 | 51.73 | -15.92 | 35.81 | 40.00 | -4.19 | QP |
| 2 | * | 119.8555 | 56.74 | -16.76 | 39.98 | 43.50 | -3.52 | QP |
| 3 | ! | 129.9225 | 56.61 | -17.41 | 39.20 | 43.50 | -4.30 | QP |
| 4 | ! | 181.9199 | 56.14 | -16.51 | 39.63 | 43.50 | -3.87 | QP |
| 5 | ! | 568.6127 | 48.24 | -5.84 | 42.40 | 46.00 | -3.60 | QP |
| 6 | ! | 938.8324 | 42.46 | -0.42 | 42.04 | 46.00 | -3.96 | QP |

Between 1GHz – 40GHz

| | |
|-------------|-------------------------|
| Test Mode : | TX(5.2G) - 802.11n-HT20 |
|-------------|-------------------------|

| Polar (H/V) | Frequency (MHz) | Meter Reading (dBuV) | Cable loss (dB) | Antenna Factor (dB/m) | Preamp Factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Detector Type |
|---|-----------------|----------------------|-----------------|-----------------------|--------------------|-------------------------|-----------------|-------------|---------------|
| Low Channel (5180 MHz)-Above 1G | | | | | | | | | |
| V | 4434.067 | 63.68 | 5.94 | 35.40 | 44.00 | 61.02 | 68.20 | -7.18 | PK |
| V | 4434.067 | 43.35 | 5.94 | 35.40 | 44.00 | 40.69 | 54.00 | -13.31 | AV |
| V | 10360.081 | 61.21 | 8.46 | 39.75 | 44.50 | 64.92 | 68.20 | -3.28 | PK |
| V | 10360.081 | 43.31 | 8.46 | 39.75 | 44.50 | 47.02 | 54.00 | -6.98 | AV |
| V | 15540.180 | 61.13 | 10.12 | 38.80 | 44.10 | 65.95 | 74.00 | -8.05 | PK |
| V | 15540.180 | 43.86 | 10.12 | 38.80 | 42.70 | 50.08 | 54.00 | -3.92 | AV |
| H | 4434.159 | 63.62 | 5.94 | 35.18 | 44.00 | 60.74 | 68.20 | -7.46 | PK |
| H | 4434.159 | 43.50 | 5.94 | 35.18 | 44.00 | 40.62 | 54.00 | -13.38 | AV |
| H | 10360.096 | 53.62 | 8.46 | 38.71 | 44.50 | 56.29 | 68.20 | -11.91 | PK |
| H | 10360.096 | 43.85 | 8.46 | 38.71 | 44.50 | 46.52 | 54.00 | -7.48 | AV |
| H | 15540.199 | 50.38 | 10.12 | 38.38 | 44.10 | 54.78 | 74.00 | -19.22 | PK |
| H | 15540.199 | 43.77 | 10.12 | 38.38 | 44.10 | 48.17 | 54.00 | -5.83 | AV |
| middle Channel (5200 MHz)-Above 1G | | | | | | | | | |
| V | 4592.098 | 60.81 | 6.48 | 36.35 | 44.05 | 59.59 | 74.00 | -14.41 | PK |
| V | 4592.098 | 43.50 | 6.48 | 36.35 | 44.05 | 42.28 | 54.00 | -11.72 | AV |
| V | 10400.011 | 64.09 | 8.47 | 37.88 | 44.51 | 65.93 | 68.20 | -2.27 | PK |
| V | 10400.011 | 43.61 | 8.47 | 37.88 | 44.51 | 45.45 | 54.00 | -8.55 | AV |
| V | 15600.102 | 64.04 | 10.12 | 38.80 | 44.10 | 68.86 | 74.00 | -5.14 | PK |
| V | 15600.102 | 43.63 | 10.12 | 38.80 | 42.70 | 49.85 | 54.00 | -4.15 | AV |
| H | 4592.167 | 61.09 | 6.48 | 36.37 | 44.05 | 59.89 | 74.00 | -14.11 | PK |
| H | 4592.167 | 43.25 | 6.48 | 36.37 | 44.05 | 42.05 | 54.00 | -11.95 | AV |
| H | 10400.163 | 54.16 | 8.47 | 38.64 | 44.50 | 56.77 | 68.20 | -11.43 | PK |
| H | 10400.163 | 43.61 | 8.47 | 38.64 | 44.50 | 46.22 | 54.00 | -7.78 | AV |
| H | 15600.041 | 54.71 | 10.12 | 38.38 | 44.10 | 59.11 | 74.00 | -14.89 | PK |
| H | 15600.041 | 42.35 | 10.12 | 38.38 | 44.10 | 46.75 | 54.00 | -7.25 | AV |
| High Channel (5240 MHz)-Above 1G | | | | | | | | | |
| V | 4739.131 | 63.33 | 7.10 | 37.24 | 43.50 | 64.17 | 74.00 | -9.83 | PK |
| V | 4739.131 | 43.26 | 7.10 | 37.24 | 43.50 | 44.10 | 54.00 | -9.90 | AV |
| V | 10480.092 | 64.37 | 8.46 | 37.68 | 44.50 | 66.01 | 68.20 | -2.19 | PK |
| V | 10480.092 | 43.91 | 8.46 | 37.68 | 44.50 | 45.55 | 54.00 | -8.45 | AV |
| V | 15720.190 | 62.03 | 10.12 | 38.80 | 44.10 | 66.85 | 74.00 | -7.15 | PK |
| V | 15720.190 | 43.42 | 10.12 | 38.80 | 42.70 | 49.64 | 54.00 | -4.36 | AV |
| H | 4739.092 | 60.26 | 7.10 | 37.24 | 43.50 | 61.10 | 74.00 | -12.90 | PK |
| H | 4739.092 | 44.00 | 7.10 | 37.24 | 43.50 | 44.84 | 54.00 | -9.16 | AV |
| H | 10480.134 | 53.97 | 8.46 | 38.57 | 44.50 | 56.50 | 68.20 | -11.70 | PK |
| H | 10480.134 | 40.86 | 8.46 | 38.57 | 44.50 | 43.39 | 54.00 | -10.61 | AV |
| H | 15720.058 | 50.30 | 10.12 | 38.38 | 44.10 | 54.70 | 74.00 | -19.30 | PK |
| H | 15720.058 | 44.94 | 10.12 | 38.38 | 44.10 | 49.34 | 54.00 | -4.66 | AV |

Note: PK value is lower than the Average value limit, So average didn't record.
 The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.
 Emission level (dBuV/m) = 20 log Emission level (uV/m).
 Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.
 Test Mode is MIMO Mode.

| | |
|-------------|-------------------------|
| Test Mode : | TX(5.2G) - 802.11n-HT40 |
|-------------|-------------------------|

| Polar (H/V) | Frequency (MHz) | Meter Reading (dBUV) | Cable loss (dB) | Antenna Factor (dB/m) | Preamp Factor (dB) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Detector Type |
|---|-----------------|----------------------|-----------------|-----------------------|--------------------|-------------------------|-----------------|-------------|---------------|
| Low Channel (5190 MHz)-Above 1G | | | | | | | | | |
| V | 4434.029 | 61.42 | 5.94 | 35.40 | 44.00 | 58.76 | 74.00 | -15.24 | PK |
| V | 4434.029 | 43.67 | 5.94 | 35.40 | 44.00 | 41.01 | 54.00 | -12.99 | AV |
| V | 10380.175 | 63.59 | 8.46 | 39.75 | 44.50 | 67.30 | 68.20 | -0.90 | PK |
| V | 10380.175 | 43.73 | 8.46 | 39.75 | 44.50 | 47.44 | 54.00 | -6.56 | AV |
| V | 15570.034 | 61.35 | 10.12 | 38.80 | 44.10 | 66.17 | 74.00 | -7.83 | PK |
| V | 15570.034 | 43.63 | 10.12 | 38.80 | 42.70 | 49.85 | 54.00 | -4.15 | AV |
| H | 4434.186 | 62.58 | 5.94 | 35.18 | 44.00 | 59.70 | 74.00 | -14.30 | PK |
| H | 4434.186 | 43.17 | 5.94 | 35.18 | 44.00 | 40.29 | 54.00 | -13.71 | AV |
| H | 10380.198 | 52.13 | 8.46 | 38.71 | 44.50 | 54.80 | 68.20 | -13.40 | PK |
| H | 10380.198 | 43.12 | 8.46 | 38.71 | 44.50 | 45.79 | 54.00 | -8.21 | AV |
| H | 15570.152 | 50.14 | 10.12 | 38.38 | 44.10 | 54.54 | 74.00 | -19.46 | PK |
| H | 15570.152 | 43.77 | 10.12 | 38.38 | 44.10 | 48.17 | 54.00 | -5.83 | AV |
| middle Channel (5230 MHz)-Above 1G | | | | | | | | | |
| V | 4739.131 | 63.08 | 6.48 | 36.35 | 44.05 | 61.86 | 74.00 | -12.14 | PK |
| V | 4739.131 | 43.65 | 6.48 | 36.35 | 44.05 | 42.43 | 54.00 | -11.57 | AV |
| V | 10460.011 | 60.01 | 8.47 | 37.88 | 44.51 | 61.85 | 68.20 | -6.35 | PK |
| V | 10460.011 | 43.73 | 8.47 | 37.88 | 44.51 | 45.57 | 54.00 | -8.43 | AV |
| V | 15690.172 | 64.76 | 10.12 | 38.80 | 44.10 | 69.58 | 74.00 | -4.42 | PK |
| V | 15690.172 | 43.35 | 10.12 | 38.80 | 42.70 | 49.57 | 54.00 | -4.43 | AV |
| H | 4739.095 | 63.08 | 6.48 | 36.37 | 44.05 | 61.88 | 74.00 | -12.12 | PK |
| H | 4739.095 | 43.39 | 6.48 | 36.37 | 44.05 | 42.19 | 54.00 | -11.81 | AV |
| H | 10460.087 | 50.97 | 8.47 | 38.64 | 44.50 | 53.58 | 68.20 | -14.62 | PK |
| H | 10460.087 | 43.35 | 8.47 | 38.64 | 44.50 | 45.96 | 54.00 | -8.04 | AV |
| H | 15690.099 | 50.00 | 10.12 | 38.38 | 44.10 | 54.40 | 74.00 | -19.60 | PK |
| H | 15690.099 | 43.08 | 10.12 | 38.38 | 44.10 | 47.48 | 54.00 | -6.52 | AV |


Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBUV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

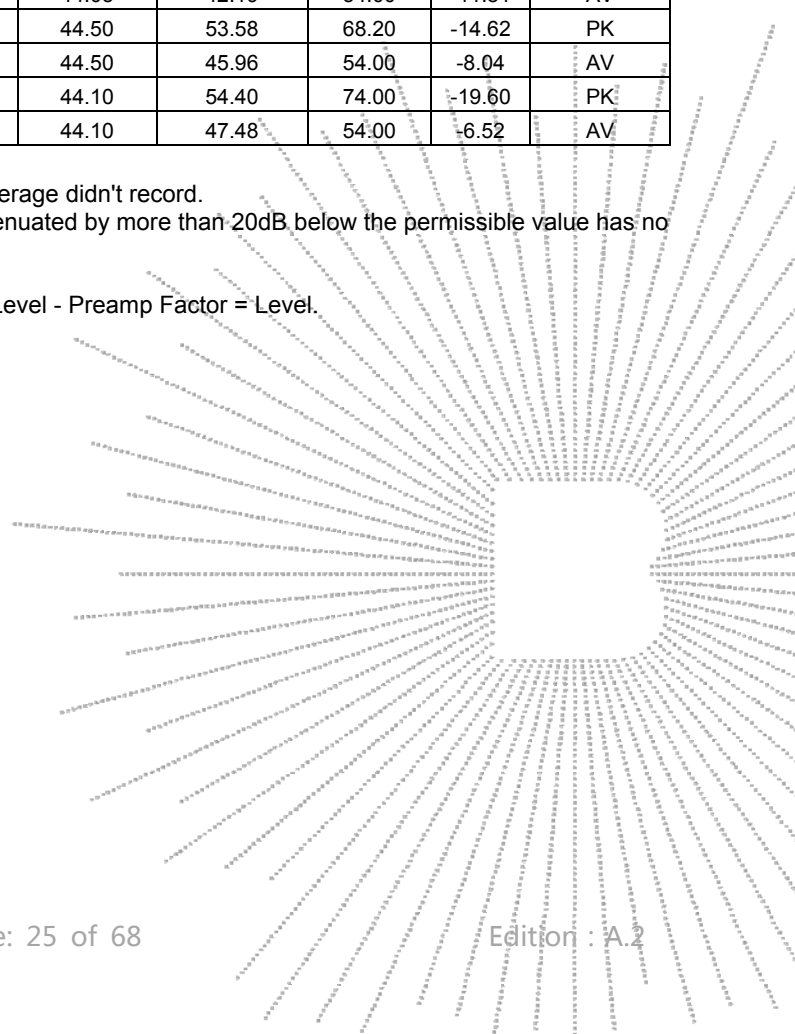

| | |
|-------------|--------------------------|
| Test Mode : | TX (5.8G) --802.11n-HT20 |
|-------------|--------------------------|

| Polar (H/V) | Frequency | Meter Reading | Cable loss | Antenna Factor | Preamp Factor | Emission Level | Limits | Margin | Detector Type |
|---|-----------|---------------|------------|----------------|---------------|----------------|----------|--------|---------------|
| | (MHz) | (dBuV) | (dB) | dB/m | (dB) | (dBuV/m) | (dBuV/m) | (dB) | |
| Low Channel (5745 MHz)-Above 1G | | | | | | | | | |
| V | 4679.126 | 60.50 | 5.94 | 35.40 | 44.00 | 57.84 | 74.00 | -16.16 | PK |
| V | 4679.126 | 43.08 | 5.94 | 35.40 | 44.00 | 40.42 | 54.00 | -13.58 | AV |
| V | 11490.172 | 62.32 | 8.46 | 39.75 | 44.50 | 66.03 | 68.20 | -2.17 | PK |
| V | 11490.172 | 43.47 | 8.46 | 39.75 | 44.50 | 47.18 | 54.00 | -6.82 | AV |
| V | 17235.016 | 63.02 | 10.12 | 38.80 | 44.10 | 67.84 | 74.00 | -6.16 | PK |
| V | 17235.016 | 43.08 | 10.12 | 38.80 | 42.70 | 49.30 | 54.00 | -4.70 | AV |
| H | 4679.021 | 61.85 | 5.94 | 35.18 | 44.00 | 58.97 | 74.00 | -15.03 | PK |
| H | 4679.021 | 43.23 | 5.94 | 35.18 | 44.00 | 40.35 | 54.00 | -13.65 | AV |
| H | 11490.115 | 52.47 | 8.46 | 38.71 | 44.50 | 55.14 | 68.20 | -13.06 | PK |
| H | 11490.115 | 41.81 | 8.46 | 38.71 | 44.50 | 44.48 | 54.00 | -9.52 | AV |
| H | 17235.004 | 52.48 | 10.12 | 38.38 | 44.10 | 56.88 | 74.00 | -17.12 | PK |
| H | 17235.004 | 40.08 | 10.12 | 38.38 | 44.10 | 44.48 | 54.00 | -9.52 | AV |
| middle Channel (5785 MHz)-Above 1G | | | | | | | | | |
| V | 4592.121 | 61.49 | 6.48 | 36.35 | 44.05 | 60.27 | 74.00 | -13.73 | PK |
| V | 4592.121 | 43.36 | 6.48 | 36.35 | 44.05 | 42.14 | 54.00 | -11.86 | AV |
| V | 11570.083 | 61.92 | 8.47 | 37.88 | 44.51 | 63.76 | 68.20 | -4.44 | PK |
| V | 11570.083 | 43.90 | 8.47 | 37.88 | 44.51 | 45.74 | 54.00 | -8.26 | AV |
| V | 17355.073 | 61.80 | 10.12 | 38.80 | 44.10 | 66.62 | 74.00 | -7.38 | PK |
| V | 17355.073 | 43.46 | 10.12 | 38.80 | 42.70 | 49.68 | 54.00 | -4.32 | AV |
| H | 4592.184 | 62.49 | 6.48 | 36.37 | 44.05 | 61.29 | 74.00 | -12.71 | PK |
| H | 4592.184 | 43.13 | 6.48 | 36.37 | 44.05 | 41.93 | 54.00 | -12.07 | AV |
| H | 11570.148 | 52.12 | 8.47 | 38.64 | 44.50 | 54.73 | 68.20 | -13.47 | PK |
| H | 11570.148 | 43.88 | 8.47 | 38.64 | 44.50 | 46.49 | 54.00 | -7.51 | AV |
| H | 17355.127 | 50.64 | 10.12 | 38.38 | 44.10 | 55.04 | 74.00 | -18.96 | PK |
| H | 17355.127 | 42.06 | 10.12 | 38.38 | 44.10 | 46.46 | 54.00 | -7.54 | AV |
| High Channel (5825 MHz)-Above 1G | | | | | | | | | |
| V | 6039.073 | 62.94 | 7.10 | 37.24 | 43.50 | 63.78 | 68.20 | -4.42 | PK |
| V | 6039.073 | 43.88 | 7.10 | 37.24 | 43.50 | 44.72 | 54.00 | -9.28 | AV |
| V | 11650.086 | 64.22 | 8.46 | 37.68 | 44.50 | 65.86 | 74.00 | -8.14 | PK |
| V | 11650.086 | 43.66 | 8.46 | 37.68 | 44.50 | 45.30 | 54.00 | -8.70 | AV |
| V | 17475.076 | 61.53 | 10.12 | 38.80 | 44.10 | 66.35 | 68.20 | -1.85 | PK |
| V | 17475.076 | 43.73 | 10.12 | 38.80 | 42.70 | 49.95 | 54.00 | -4.05 | AV |
| H | 6039.082 | 62.76 | 7.10 | 37.24 | 43.50 | 63.60 | 68.20 | -4.60 | PK |
| H | 6039.082 | 43.19 | 7.10 | 37.24 | 43.50 | 44.03 | 54.00 | -9.97 | AV |
| H | 11650.184 | 50.10 | 8.46 | 38.57 | 44.50 | 52.63 | 74.00 | -21.37 | PK |
| H | 11650.184 | 43.29 | 8.46 | 38.57 | 44.50 | 45.82 | 54.00 | -8.18 | AV |
| H | 17475.008 | 51.01 | 10.12 | 38.38 | 44.10 | 55.41 | 68.20 | -12.79 | PK |
| H | 17475.008 | 43.20 | 10.12 | 38.38 | 44.10 | 47.60 | 54.00 | -6.40 | AV |

Note: PK value is lower than the Average value limit, So average didn't record.
 The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.
 Emission level (dBuV/m) = 20 log Emission level (uV/m).
 Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.
 Test Mode is MIMO Mode.

| | |
|-------------|---------------------------|
| Test Mode : | TX (5.8G) -- 802.11n-HT40 |
|-------------|---------------------------|

| Polar (H/V) | Frequency | Meter Reading | Cable loss | Antenna Factor | Preamp Factor | Emission Level | Limits | Margin | Detector Type |
|---|-----------|---------------|------------|----------------|---------------|----------------|----------|--------|---------------|
| | (MHz) | (dBuV) | (dB) | dB/m | (dB) | (dBuV/m) | (dBuV/m) | (dB) | |
| Low Channel (5755 MHz)-Above 1G | | | | | | | | | |
| V | 4679.050 | 61.84 | 5.94 | 35.40 | 44.00 | 59.18 | 74.00 | -14.82 | PK |
| V | 4679.050 | 43.31 | 5.94 | 35.40 | 44.00 | 40.65 | 54.00 | -13.35 | AV |
| V | 11550.115 | 60.32 | 8.46 | 39.75 | 44.50 | 64.03 | 68.20 | -4.17 | PK |
| V | 11550.115 | 43.94 | 8.46 | 39.75 | 44.50 | 47.65 | 54.00 | -6.35 | AV |
| V | 17325.082 | 64.62 | 10.12 | 38.80 | 44.10 | 69.44 | 74.00 | -4.56 | PK |
| V | 17325.082 | 43.94 | 10.12 | 38.80 | 42.70 | 50.16 | 54.00 | -3.84 | AV |
| H | 4679.060 | 63.11 | 5.94 | 35.18 | 44.00 | 60.23 | 74.00 | -13.77 | PK |
| H | 4679.060 | 43.93 | 5.94 | 35.18 | 44.00 | 41.05 | 54.00 | -12.95 | AV |
| H | 11550.183 | 51.75 | 8.46 | 38.71 | 44.50 | 54.42 | 68.20 | -13.78 | PK |
| H | 11550.183 | 40.51 | 8.46 | 38.71 | 44.50 | 43.18 | 54.00 | -10.82 | AV |
| H | 17325.041 | 51.81 | 10.12 | 38.38 | 44.10 | 56.21 | 74.00 | -17.79 | PK |
| H | 17325.041 | 42.69 | 10.12 | 38.38 | 44.10 | 47.09 | 54.00 | -6.91 | AV |
| middle Channel (5795 MHz)-Above 1G | | | | | | | | | |
| V | 6039.139 | 60.48 | 6.48 | 36.35 | 44.05 | 59.26 | 68.20 | -8.94 | PK |
| V | 6039.139 | 43.94 | 6.48 | 36.35 | 44.05 | 42.72 | 54.00 | -11.28 | AV |
| V | 11590.149 | 62.77 | 8.47 | 37.88 | 44.51 | 64.61 | 74.00 | -9.39 | PK |
| V | 11590.149 | 43.79 | 8.47 | 37.88 | 44.51 | 45.63 | 54.00 | -8.37 | AV |
| V | 17385.104 | 60.67 | 10.12 | 38.80 | 44.10 | 65.49 | 68.20 | -2.71 | PK |
| V | 17385.104 | 43.05 | 10.12 | 38.80 | 42.70 | 49.27 | 54.00 | -4.73 | AV |
| H | 6039.107 | 61.95 | 6.48 | 36.37 | 44.05 | 60.75 | 68.20 | -7.45 | PK |
| H | 6039.107 | 43.21 | 6.48 | 36.37 | 44.05 | 42.01 | 54.00 | -11.99 | AV |
| H | 11590.190 | 52.14 | 8.47 | 38.64 | 44.50 | 54.75 | 74.00 | -19.25 | PK |
| H | 11590.190 | 43.52 | 8.47 | 38.64 | 44.50 | 46.13 | 54.00 | -7.87 | AV |
| H | 17385.182 | 51.35 | 10.12 | 38.38 | 44.10 | 55.75 | 68.20 | -12.45 | PK |
| H | 17385.182 | 43.77 | 10.12 | 38.38 | 44.10 | 48.17 | 54.00 | -5.83 | AV |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

The Worst mode is Antenna A.

8. POWER SPECTRAL DENSITY TEST

8.1 Block Diagram Of Test Setup



8.2 Limit

For the band 5.15-5.25 GHz,

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional

gain greater than 6 dBi are used, both the maximum conducted output power and the maximum

power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional

gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of

the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in

maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz

(3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.3 Test procedure

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, "provided that the measured power is integrated over the full reference bandwidth" to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).

b) Set $VBW \geq 3 RBW$.

c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ KHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.

d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.

e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since $RBW=100 \text{ KHz}$ is available on nearly all spectrum analyzers.

8.4 EUT operating Conditions


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

8.5 Test Result


| | | | |
|---------------|-------------------------------------|---------------------|---------|
| Temperature : | 26 °C | Relative Humidity : | 54% |
| Pressure : | 101kPa | Test Voltage : | AC 120V |
| Test Mode : | TX Frequency U-NII-1 (5180-5240MHz) | | |

Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A Plot.


| Mode | Frequency | Measured Power Density (dBm/MHz) | | | Limit (dBm/MHz) | Result |
|------------|-----------|----------------------------------|--------|-------|-----------------|--------|
| | | ANT A | ANT B | Total | | |
| 802.11 n20 | 5180 MHz | 4.569 | 0.075 | 5.89 | 17 | PASS |
| | 5200 MHz | 4.040 | -0.120 | 5.45 | 17 | PASS |
| | 5240 MHz | 5.453 | -0.351 | 6.47 | 17 | PASS |
| 802.11 n40 | 5190 MHz | 0.594 | -3.601 | 1.99 | 17 | PASS |
| | 5230 MHz | 0.555 | -3.535 | 1.98 | 17 | PASS |

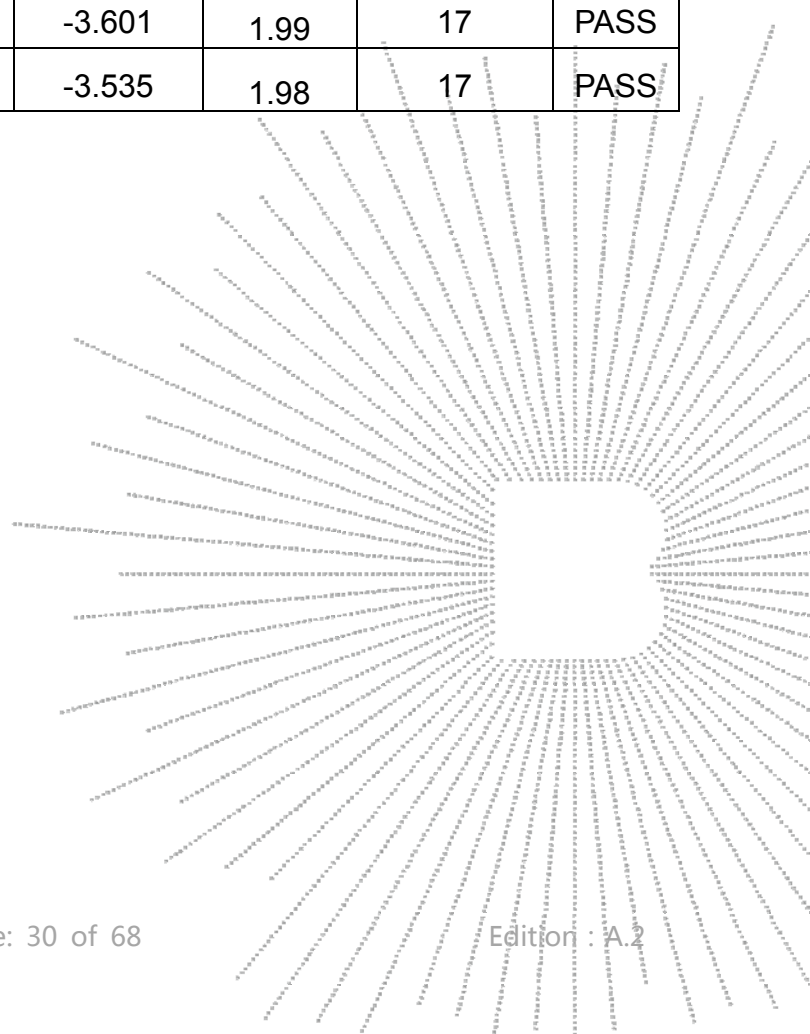


(802.11n20) PSD plot on channel 36

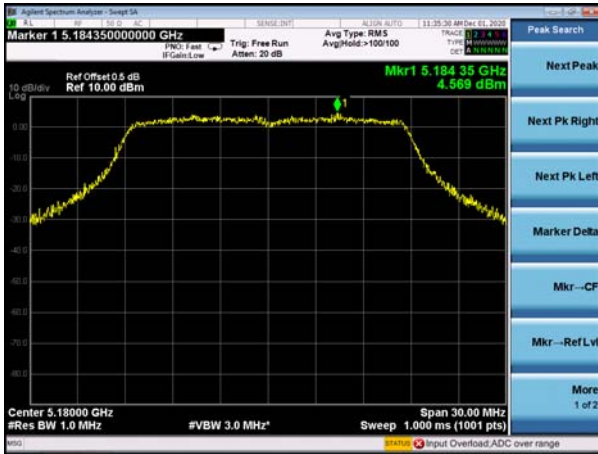


(802.11n40) PSD plot on channel 38

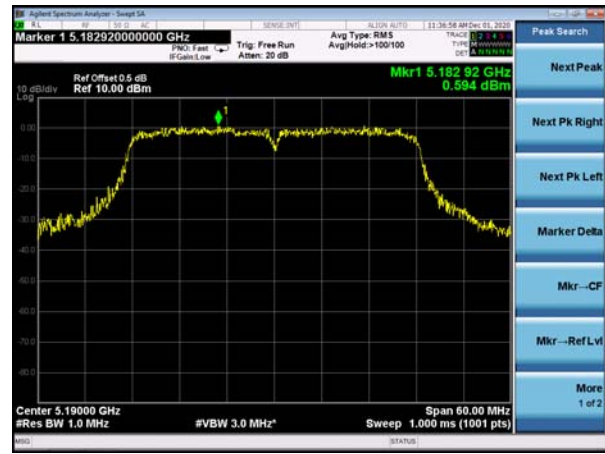


(802.11n20) PSD plot on channel 40

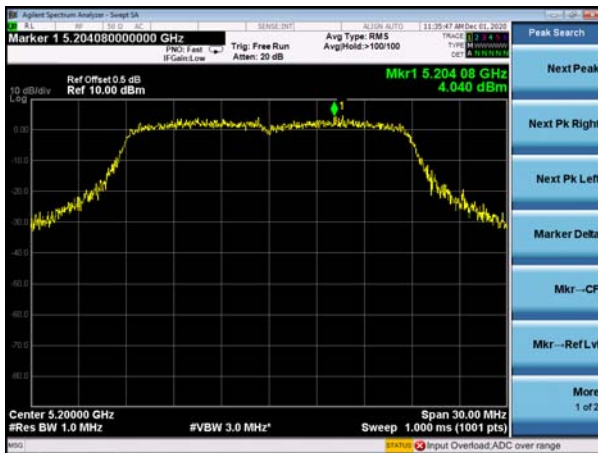

(802.11n40) PSD plot on channel 46

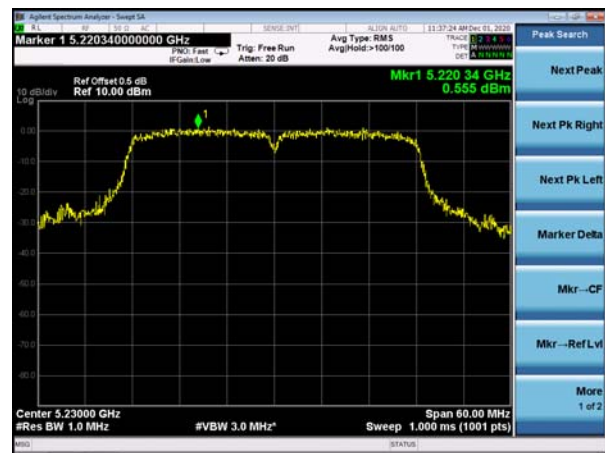


(802.11n20) PSD plot on channel 48

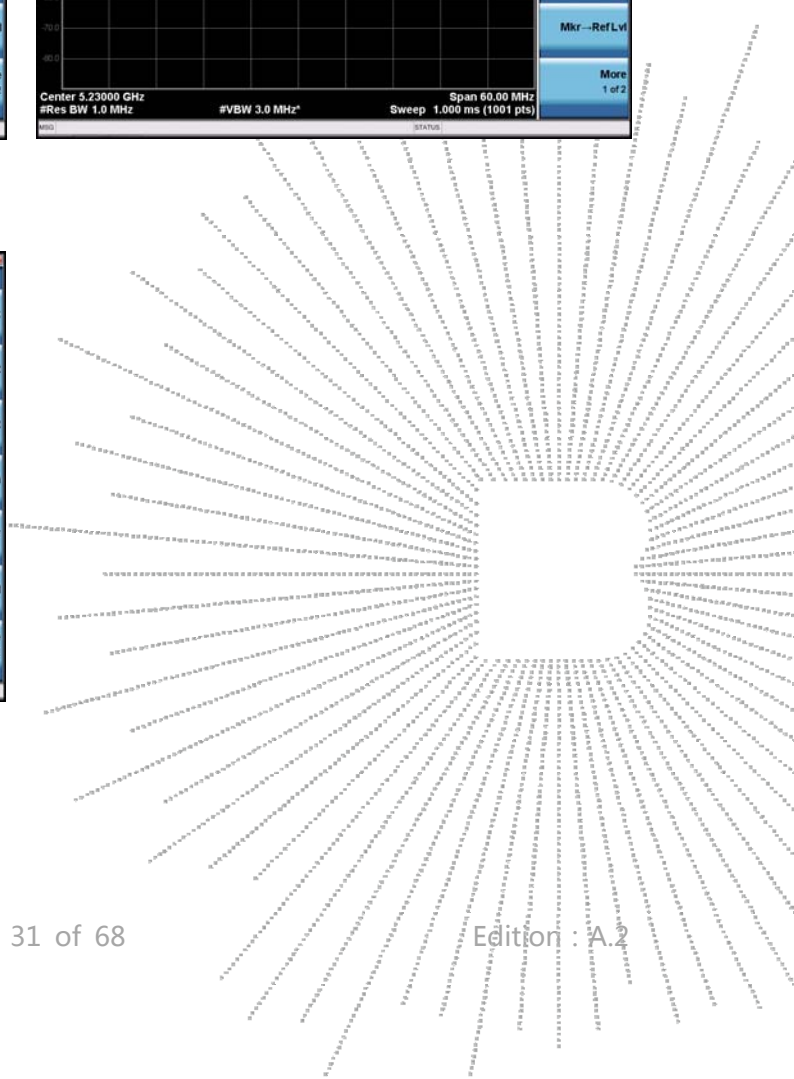

| | | | |
|---------------|-------------------------------------|---------------------|---------|
| Temperature : | 26 °C | Relative Humidity : | 54% |
| Pressure : | 101kPa | Test Voltage : | AC 120V |
| Test Mode : | TX Frequency U-NII-3 (5745-5825MHz) | | |

Note: A(B) Represent the value of antenna A and B, The worst data is Antenna B ,only shown Antenna B Plot.

| Mode | Frequency | Measured Power Density (dBm/500KHz) | | | Limit (dBm/500kHz) | Result |
|------------|-----------|-------------------------------------|--------|-------|--------------------|--------|
| | | ANT A | ANT B | Total | | |
| 802.11 n20 | 5745 MHz | -2.142 | 2.105 | 3.49 | 30 | PASS |
| | 5785 MHz | -4.328 | 1.571 | 2.56 | 30 | PASS |
| | 5825 MHz | -4.940 | 1.908 | 2.72 | 30 | PASS |
| 802.11 n40 | 5755 MHz | -5.728 | -1.821 | -0.34 | 30 | PASS |
| | 5795 MHz | -7.271 | -1.787 | -0.71 | 30 | PASS |

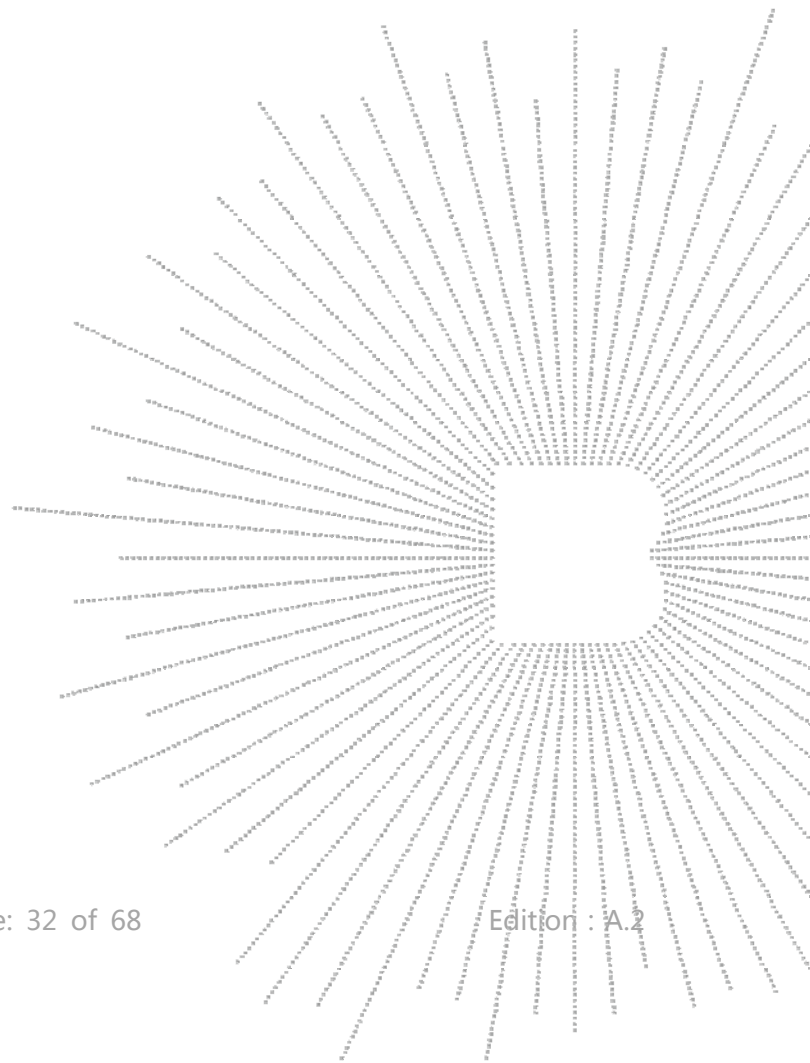

(802.11n20) PSD plot on channel 149



(802.11n40) PSD plot on channel 151




(802.11n20) PSD plot on channel 157



(802.11n40) PSD plot on channel 159




(802.11n20) PSD plot on channel 165

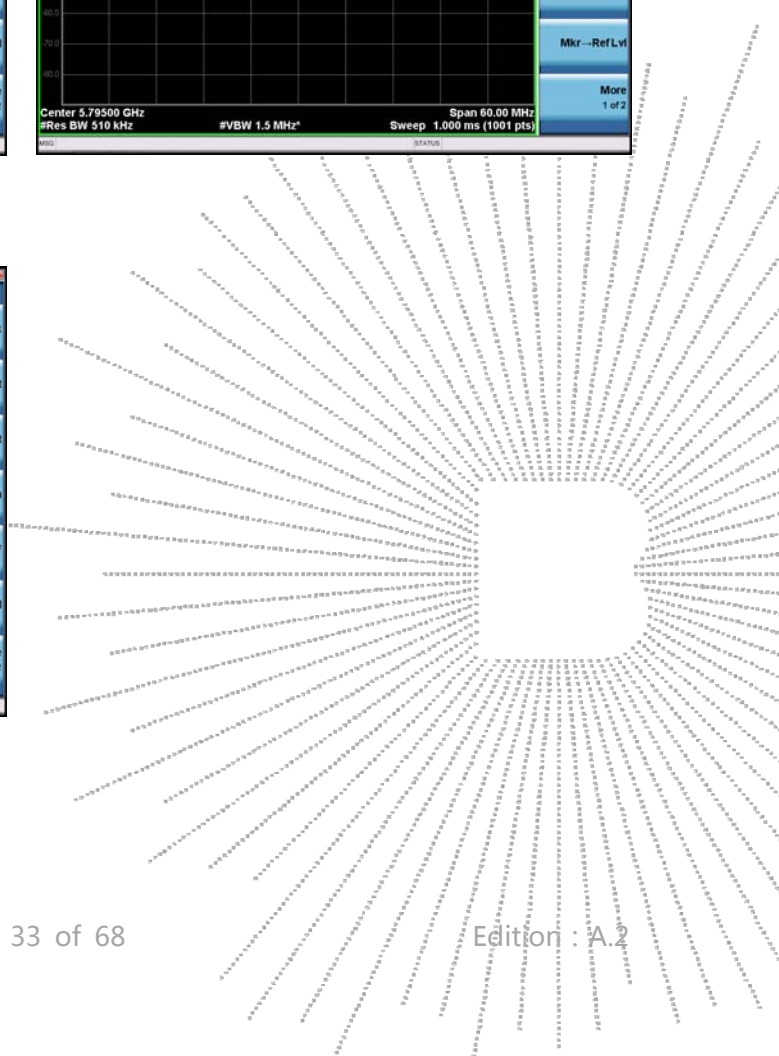

9. 26DB & 6DB & 99% EMISSION BANDWIDTH

9.1 Block Diagram Of Test Setup

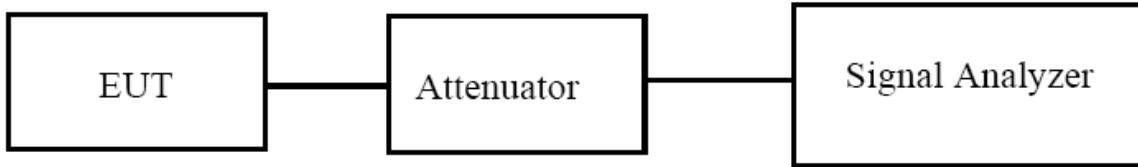

9.2 Limit

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

9.3 Test procedure

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = Peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

The following procedure shall be used for measuring (99 %) power bandwidth:

- Set center frequency to the nominal EUT channel center frequency.
- Set span = 1.5 times to 5.0 times the OBW.
- Set RBW = 1 % to 5 % of the OBW
- Set VBW $\geq 3 \cdot$ RBW
- Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- Use the 99 % power bandwidth function of the instrument (if available).
- If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

9.4 EUT operating Conditions


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

9.5 Test Result


| | | | |
|---------------|-------------------------------------|---------------------|---------|
| Temperature : | 26 °C | Relative Humidity : | 54% |
| Pressure : | 101kPa | Test Voltage : | AC 120V |
| Test Mode : | TX Frequency U-NII-1 (5180-5240MHz) | | |

Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A ,only shown Antenna A Plot.

| Mode | Channel | Frequency (MHz) | 99% bandwidth (MHz) | 26dB bandwidth (MHz) | Limit MHz | Result |
|------------|---------|-----------------|---------------------|----------------------|-----------|--------|
| | | | ANT A | ANT A | | |
| 802.11 n20 | CH36 | 5180 | 17.789 | 22.03 | N/A | Pass |
| | CH40 | 5200 | 17.778 | 22.03 | N/A | Pass |
| | CH48 | 5240 | 17.782 | 23.29 | N/A | Pass |
| 802.11 n40 | CH 38 | 5190 | 36.604 | 46.04 | N/A | Pass |
| | CH 46 | 5230 | 36.811 | 50.78 | N/A | Pass |

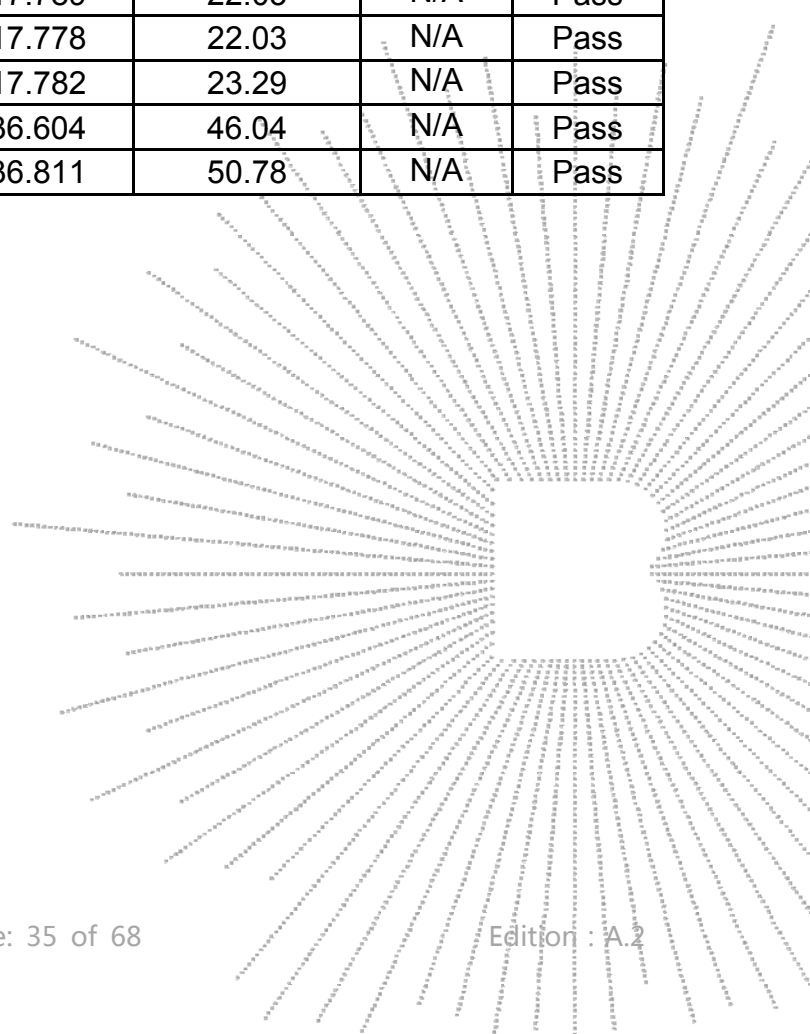


| Mode | Channel | Frequency (MHz) | 99% bandwidth (MHz) | 26dB bandwidth (MHz) | Limit MHz | Result |
|------------|---------|-----------------|---------------------|----------------------|-----------|--------|
| | | | ANT B | ANT B | | |
| 802.11 n20 | CH36 | 5180 | 17.726 | 21.78 | N/A | Pass |
| | CH40 | 5200 | 17.764 | 22.01 | N/A | Pass |
| | CH48 | 5240 | 17.769 | 22.97 | N/A | Pass |
| 802.11 n40 | CH 38 | 5190 | 36.585 | 46.48 | N/A | Pass |
| | CH 46 | 5230 | 36.849 | 50.74 | N/A | Pass |

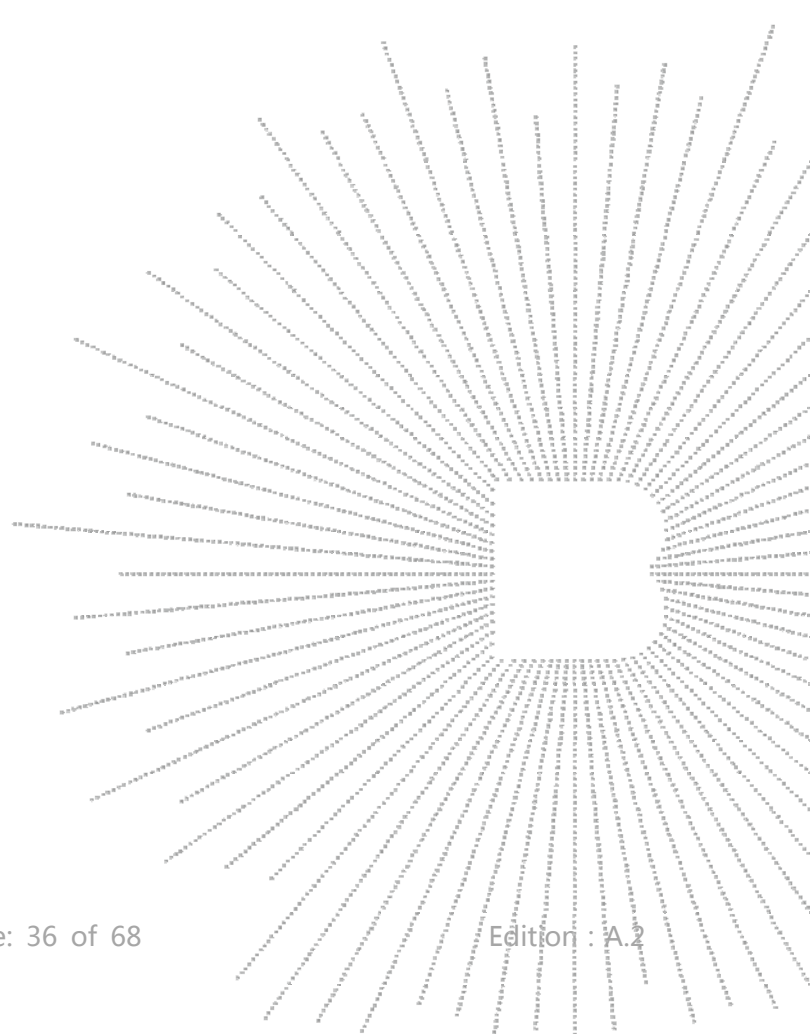


Test plot

(802.11 n20) 26dB&99%Bandwidth plot on channel 36

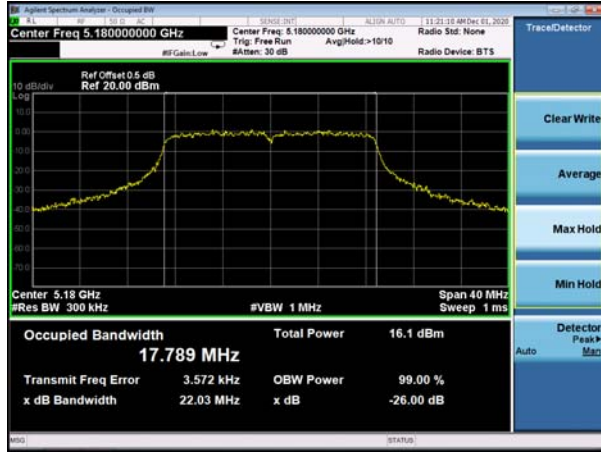


(802.11 n40) 26dB&99%Bandwidth plot on channel 38

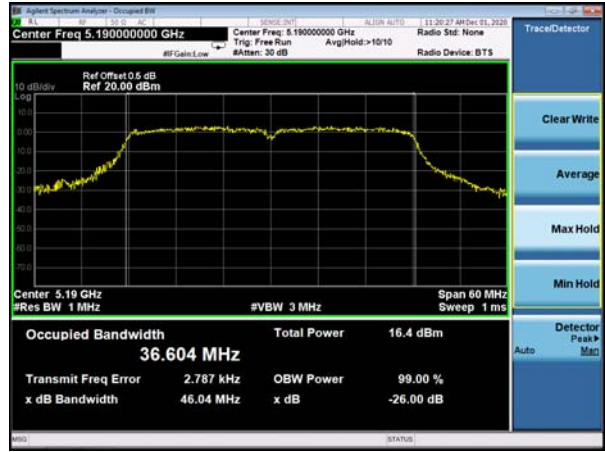


(802.11 n20) 26dB&99%Bandwidth plot on channel 40



(802.11 n40) 26dB&99%Bandwidth plot on channel 46

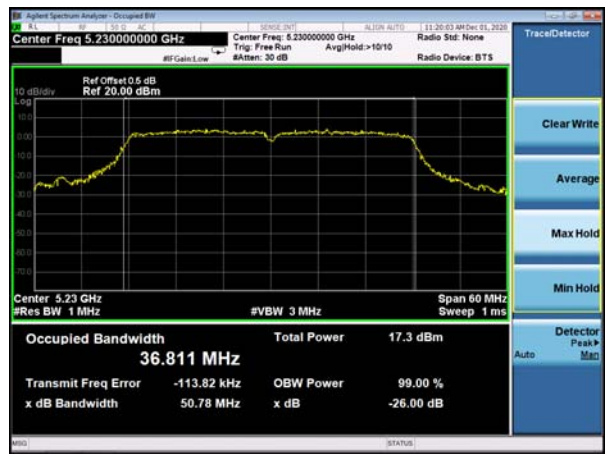

(802.11 n20) 26dB&99%Bandwidth plot on channel 48

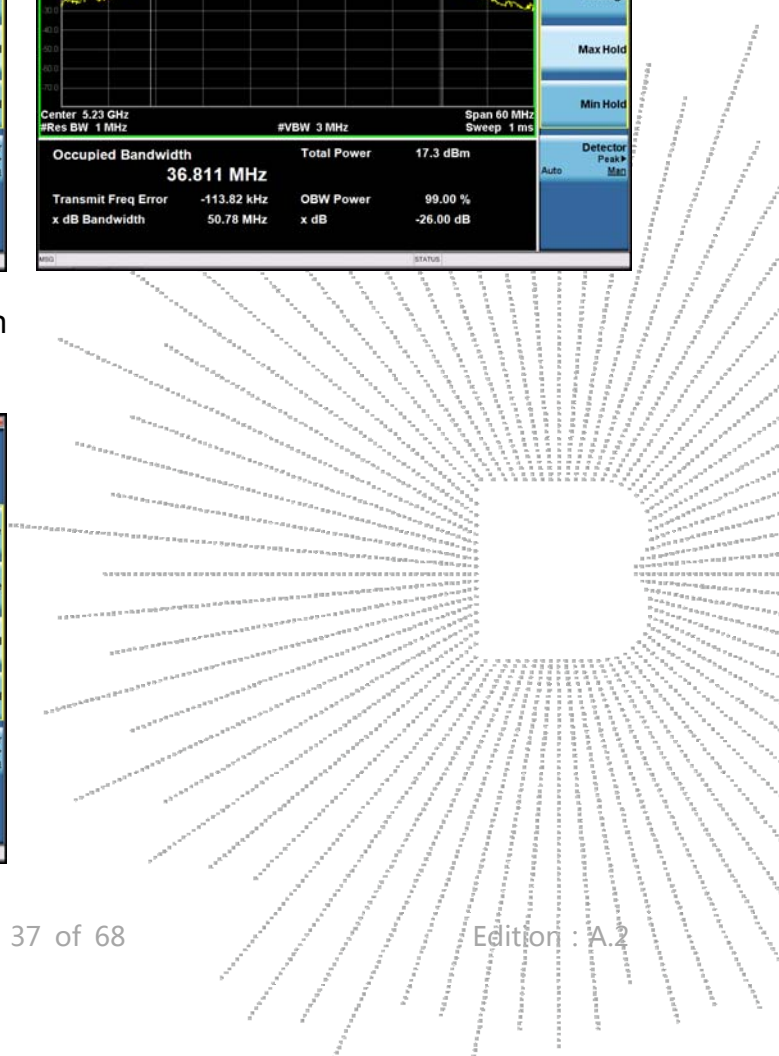

| | | | |
|---------------|------------------------------------|---------------------|---------|
| Temperature : | 26 °C | Relative Humidity : | 54% |
| Pressure : | 101kPa | Test Voltage : | AC 120V |
| Test Mode : | TX Frequency U-NII-3(5745-5825MHz) | | |




Note: A(B) Represent the value of antenna A and B, The worst data is Antenna B, only shown Antenna B Plot.

| Mode | Channel | Frequency (MHz) | 99% bandwidth (MHz) | 6dB bandwidth (MHz) | Limit MHz | Result |
|------------|---------|-----------------|---------------------|---------------------|-----------|--------|
| | | | ANT A | ANT A | | |
| 802.11 n20 | CH149 | 5745 | 17.749 | 17.02 | ≥500 | Pass |
| | CH157 | 5785 | 17.776 | 16.68 | ≥500 | Pass |
| | CH165 | 5825 | 17.795 | 16.99 | ≥500 | Pass |
| 802.11 n40 | CH151 | 5755 | 36.615 | 35.69 | ≥500 | Pass |
| | CH159 | 5795 | 36.624 | 35.73 | ≥500 | Pass |



| Mode | Channel | Frequency (MHz) | 99% bandwidth (MHz) | 6dB bandwidth (MHz) | Limit MHz | Result |
|------------|---------|-----------------|---------------------|---------------------|-----------|--------|
| | | | ANT B | ANT B | | |
| 802.11 n20 | CH157 | 5745 | 17.794 | 17.02 | ≥500 | Pass |
| | CH157 | 5785 | 17.778 | 16.66 | ≥500 | Pass |
| | CH165 | 5825 | 17.763 | 17.30 | ≥500 | Pass |
| 802.11 n40 | CH151 | 5755 | 36.664 | 35.73 | ≥500 | Pass |
| | CH159 | 5795 | 36.697 | 35.50 | ≥500 | Pass |

Antenna B: 5725-5850MHz

| Mode: | | 802.11n-HT20 |
|----------------------------------|--|--------------|
| <p>5745MHz 6dB bandwidth</p> | | |
| <p>5745MHz 99% bandwidth</p> | | |

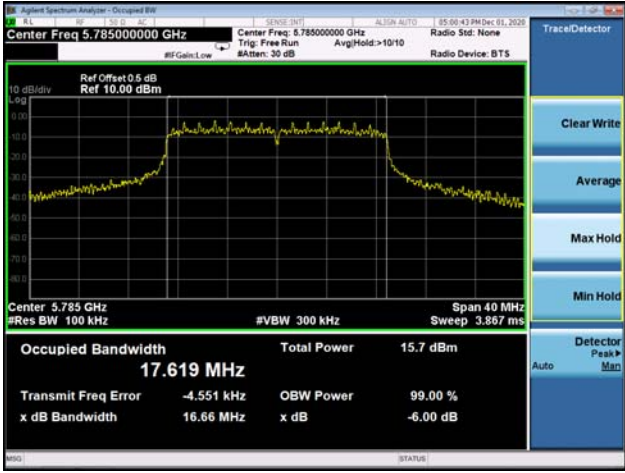
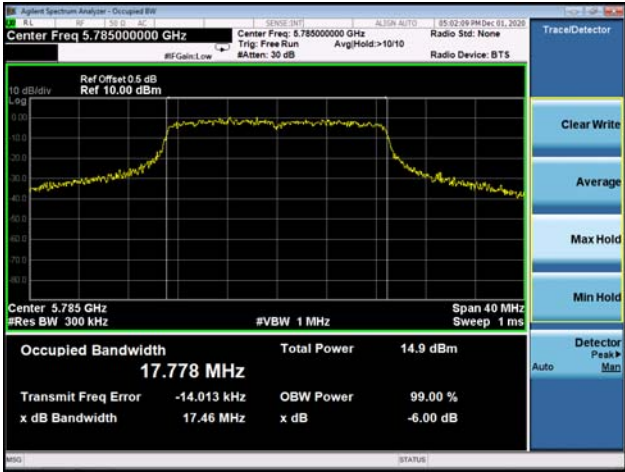
| | | | | | | | | | | | | | | | | |
|----------------------------------|--|--------------------|-------------|----------|------------|--|--|---------------------|-----------|---------|-------------|------|----------|----------------|-----------|--|
| <p>5785MHz 6dB bandwidth</p> |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.785000000 GHz</p> <p>Ref Offset: 0.5 dB, Ref: 10.00 dBm</p> <p>Center: 5.785 GHz, #Res BW: 100 kHz, #VBW: 300 kHz, Span: 40 MHz, Sweep: 3.867 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>15.7 dBm</td> </tr> <tr> <td>17.619 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-4.551 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td>16.66 MHz</td> <td></td> </tr> </table> | Occupied Bandwidth | Total Power | 15.7 dBm | 17.619 MHz | | | Transmit Freq Error | OBW Power | 99.00 % | -4.551 kHz | x dB | -6.00 dB | x dB Bandwidth | 16.66 MHz | |
| Occupied Bandwidth | Total Power | 15.7 dBm | | | | | | | | | | | | | | |
| 17.619 MHz | | | | | | | | | | | | | | | | |
| Transmit Freq Error | OBW Power | 99.00 % | | | | | | | | | | | | | | |
| -4.551 kHz | x dB | -6.00 dB | | | | | | | | | | | | | | |
| x dB Bandwidth | 16.66 MHz | | | | | | | | | | | | | | | |
| <p>5785MHz 99% bandwidth</p> |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.785000000 GHz</p> <p>Ref Offset: 0.5 dB, Ref: 10.00 dBm</p> <p>Center: 5.785 GHz, #Res BW: 300 kHz, #VBW: 1 MHz, Span: 40 MHz, Sweep: 1 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>14.9 dBm</td> </tr> <tr> <td>17.778 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-14.013 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td>17.46 MHz</td> <td></td> </tr> </table> | Occupied Bandwidth | Total Power | 14.9 dBm | 17.778 MHz | | | Transmit Freq Error | OBW Power | 99.00 % | -14.013 kHz | x dB | -6.00 dB | x dB Bandwidth | 17.46 MHz | |
| Occupied Bandwidth | Total Power | 14.9 dBm | | | | | | | | | | | | | | |
| 17.778 MHz | | | | | | | | | | | | | | | | |
| Transmit Freq Error | OBW Power | 99.00 % | | | | | | | | | | | | | | |
| -14.013 kHz | x dB | -6.00 dB | | | | | | | | | | | | | | |
| x dB Bandwidth | 17.46 MHz | | | | | | | | | | | | | | | |
| <p>5825MHz 6dB bandwidth</p> |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.825000000 GHz</p> <p>Ref Offset: 0.5 dB, Ref: 10.00 dBm</p> <p>Center: 5.825 GHz, #Res BW: 100 kHz, #VBW: 300 kHz, Span: 40 MHz, Sweep: 3.867 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>16.1 dBm</td> </tr> <tr> <td>17.620 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-9.207 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td>17.30 MHz</td> <td></td> </tr> </table> | Occupied Bandwidth | Total Power | 16.1 dBm | 17.620 MHz | | | Transmit Freq Error | OBW Power | 99.00 % | -9.207 kHz | x dB | -6.00 dB | x dB Bandwidth | 17.30 MHz | |
| Occupied Bandwidth | Total Power | 16.1 dBm | | | | | | | | | | | | | | |
| 17.620 MHz | | | | | | | | | | | | | | | | |
| Transmit Freq Error | OBW Power | 99.00 % | | | | | | | | | | | | | | |
| -9.207 kHz | x dB | -6.00 dB | | | | | | | | | | | | | | |
| x dB Bandwidth | 17.30 MHz | | | | | | | | | | | | | | | |

5825MHz
99% bandwidth

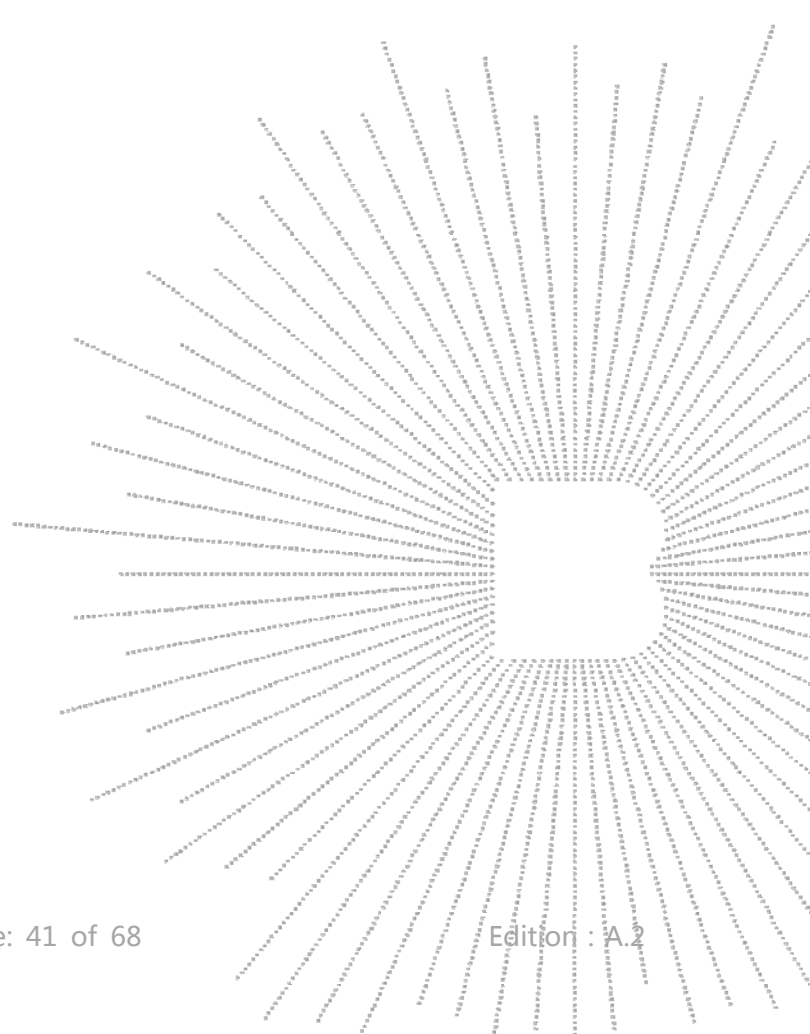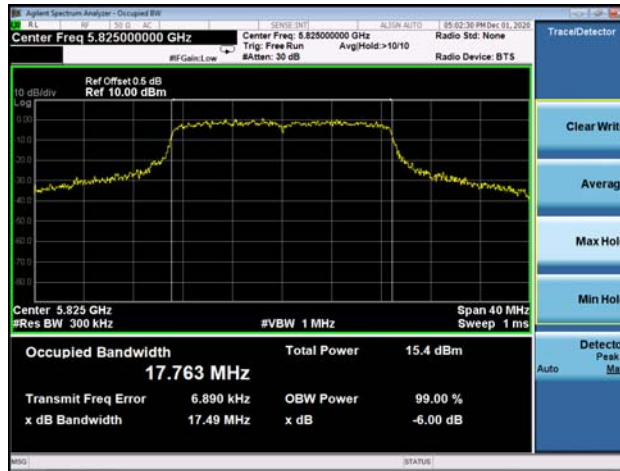

| Mode: | 802.11n-HT40 |
|-----------------------------------|--|
| <p>5755 MHz 6dB bandwidth</p> |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 5.75500000 GHz</p> <p>Ref Offset 0.5 dB Ref 10.00 dBm</p> <p>Center 5.755 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms</p> <p>Occupied Bandwidth 36.033 MHz Total Power 15.7 dBm</p> <p>Transmit Freq Error -64.529 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 35.73 MHz x dB -6.00 dB</p> |
| <p>5755 MHz 99% bandwidth</p> |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 5.75500000 GHz</p> <p>Ref Offset 0.5 dB Ref 10.00 dBm</p> <p>Center 5.755 GHz #Res BW 1 MHz #VBW 3 MHz Span 60 MHz Sweep 1 ms</p> <p>Occupied Bandwidth 36.664 MHz Total Power 16.2 dBm</p> <p>Transmit Freq Error -104.21 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 36.10 MHz x dB -6.00 dB</p> |
| <p>5795 MHz 6dB bandwidth</p> |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 5.795000000 GHz</p> <p>Ref Offset 0.5 dB Ref 10.00 dBm</p> <p>Center 5.795 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms</p> <p>Occupied Bandwidth 36.016 MHz Total Power 15.4 dBm</p> <p>Transmit Freq Error -52.765 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 35.50 MHz x dB -6.00 dB</p> |

5795 MHz
99% bandwidth

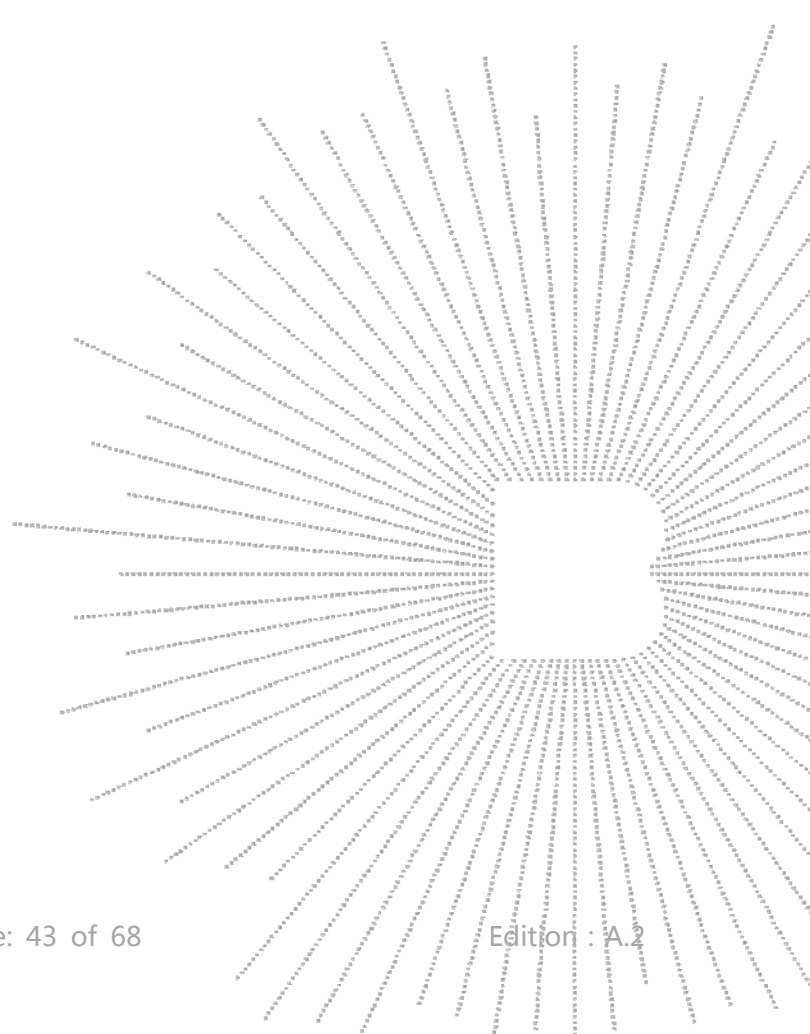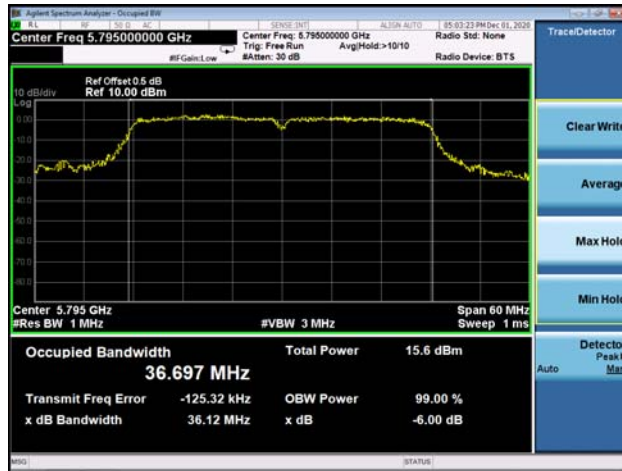

10. MAXIMUM CONDUCTED OUTPUT POWER

10.1 Block Diagram Of Test Setup



10.2 Limit

According to FCC §15.407

The maximum conducted output power should not exceed:

| Frequency Band(MHz) | Limit |
|---------------------|-------|
| 5150~5250 | 1W |
| 5725~5850 | 1W |

10.3 Test procedure

Maximum conducted output power may be measured using a spectrum analyzer/EMI receiver or an RF power meter.

1. Device Configuration

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level (see section II.B.).

a) The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (to no lower than 98 percent) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.

b) If continuous transmission (or at least 98 percent duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level with the transmit duration as long as possible and the duty cycle as high as possible.

2. Measurement using a Spectrum Analyzer or EMI Receiver (SA)

Measurement of maximum conducted output power using a spectrum analyzer requires integrating the spectrum across a frequency span that encompasses, at a minimum, either the EBW or the 99-percent occupied bandwidth of the signal. However, the EBW must be used to determine bandwidth dependent limits on maximum conducted output power in accordance with § 15.407(a).

a) The test method shall be selected as follows: (i) Method SA-1 or SA-1 Alternative (averaging with the EUT transmitting at full power throughout each sweep) shall be applied if either of the following conditions can be satisfied:

- The EUT transmits continuously (or with a duty cycle \geq 98 percent).

- Sweep triggering or gating can be implemented in a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be

averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the analyzer configured as in Method SA-1, below) is equal to or shorter than the duration T of each transmission from the EUT and if those transmissions exhibit full power throughout their durations.

(ii) Method SA-2 or SA-2 Alternative (averaging across on and off times of the EUT transmissions, followed by duty cycle correction) shall be applied if the conditions of (i) cannot be achieved and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than ± 2 percent.

(iii) Method SA-3 (RMS detection with max hold) or SA-3 Alternative (reduced VBW with max hold) shall be applied if the conditions of (i) and (ii) cannot be achieved.

b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep): (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set RBW = 1 MHz.

(iii) Set VBW ≥ 3 MHz.

(iv) Number of points in sweep ≥ 2 Span / RBW. (This ensures that bin-to-bin spacing is \leq RBW/2, so that narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".

(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum

10.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.