
Report No.: AGC11034210704FE06 Page 38 of 62





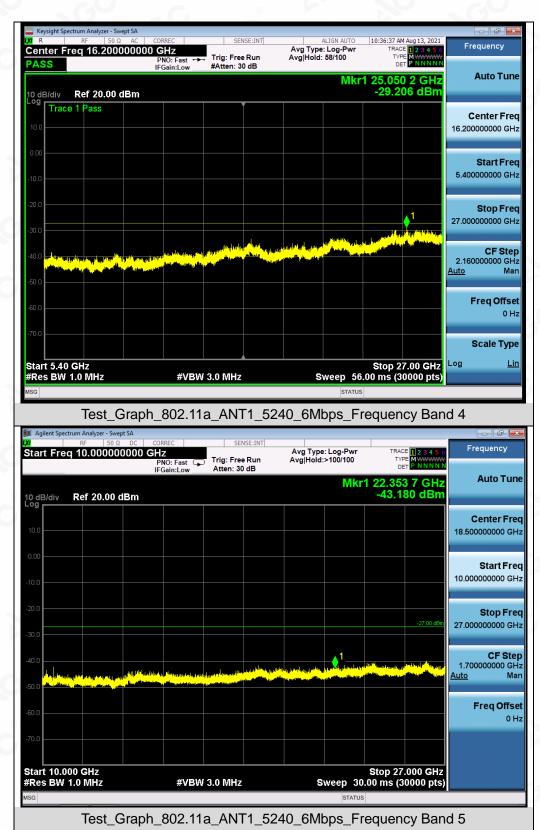


Test Graphs of Spurious Emissions outside of the 5.725-5.85 GHz band for transmitters operating in the 5.725-5.85 GHz band

Avg Type: Log-Pwi Avg|Hold: 85/100 Frequency Center Trig: Free Run #Atten: 30 dB PNO: Fast IFGain:Low PASS **Auto Tune** Mkr1 901.93 MHz -53.267 dBm Ref 20.00 dBm 0 dB/div Trace 1 Pass **Center Freq** 515.000000 MHz Start Fred 30.000000 MHz Stop Freq 1.00000000 GHz CF Step 97.000000 MHz <u>Auto</u> Man **Freq Offset** 0 Hz Scale Type Start 0.0300 GHz #Res BW 100 kHz Stop 1.0000 GHz Sweep 94.00 ms (30000 pts) Log Lin #VBW 300 kHz Test_Graph_802.11a_ANT1_5745_6Mbps_Frequency Band1 Avg Type: Log-Pwr Avg|Hold: 61/100 Frequency Center Freq 3.325000000 GHz Trig: Free Run #Atten: 30 dB PNO: Fast IFGain:Low PASS DE Auto Tune Mkr1 2.538 736 GHz -40.025 dBm Ref 20.00 dBm 0 dB/div Trace 1 'ass **Center Freq** 3 325000000 GHz Start Freq 1.00000000 GHz Stop Freq 5.65000000 GHz CF Step 465.000000 MHz Man Auto **Freq Offset** 0 Hz Scale Type Start 1.000 GHz #Res BW 1.0 MHz Stop 5.650 GHz Sweep 8.000 ms (30000 pts) Log Lin #VBW 3.0 MHz Test_Graph_802.11a_ANT1_5745_6Mbps_Frequency Band2

Report No.: AGC11034210704FE06 Page 40 of 62




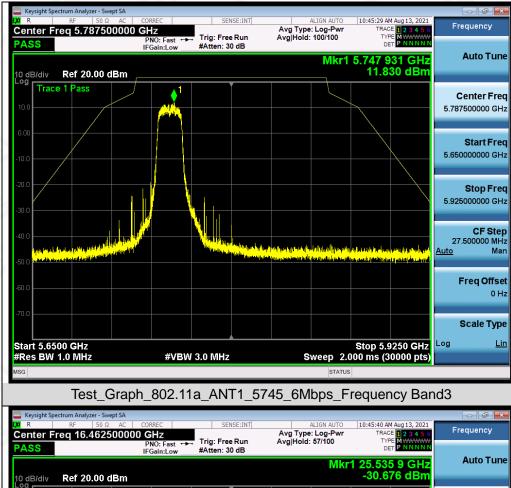

Trace 1 ass Center Freq 16.462500000 GHz Start Freq 5.925000000 GHz Stop Freq .1 27.00000000 GHz CF Step 2.107500000 GHz Man Auto **Freq Offset** 0 Hz Scale Type Start 5.93 GHz #Res BW 1.0 MHz Stop 27.00 GHz Sweep 54.00 ms (30000 pts) Log Lin #VBW 3.0 MHz Test_Graph_802.11a_ANT1_5745_6Mbps_Frequency Band4


Report No.: AGC11034210704FE06 Page 41 of 62



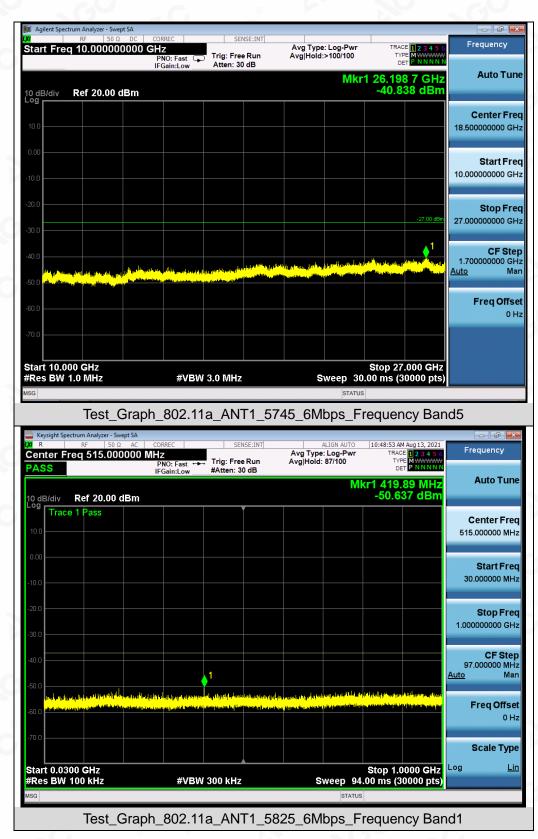


Report No.: AGC11034210704FE06 Page 42 of 62



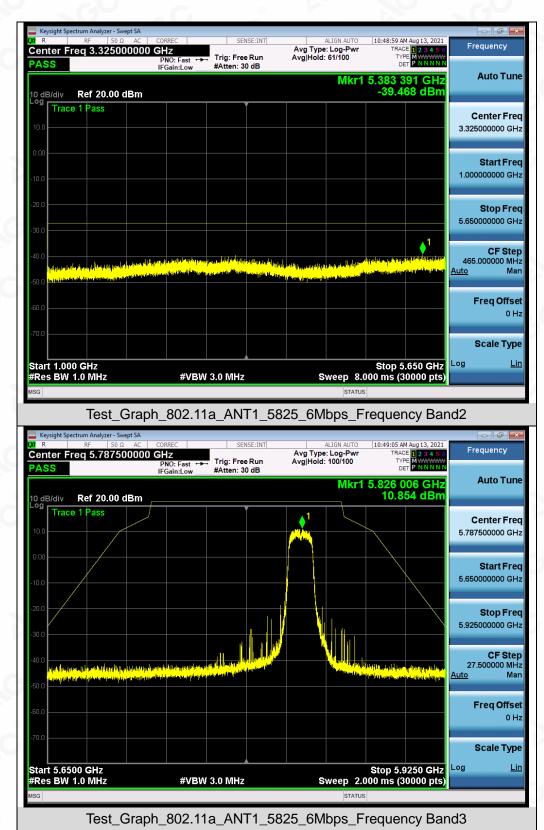

Report No.: AGC11034210704FE06 Page 43 of 62



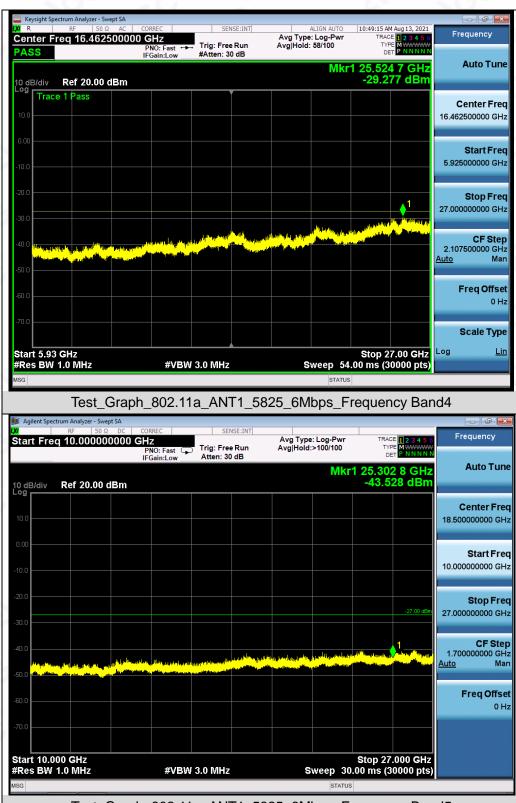

Test_Graph_802.11a_ANT1_5825_6Mbps_Frequency Band5



11. RADIATED EMISSION

11.1. MEASUREMENT PROCEDURE


- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3M VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.




Report No.: AGC11034210704FE06 Page 45 of 62

11.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

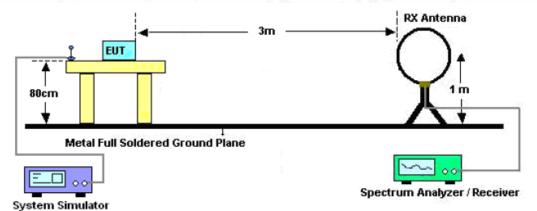

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

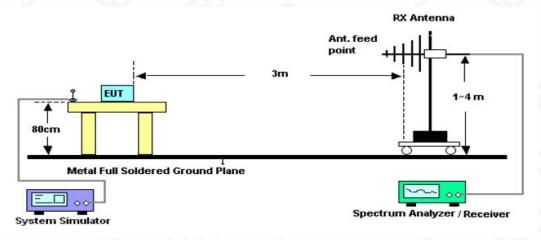

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

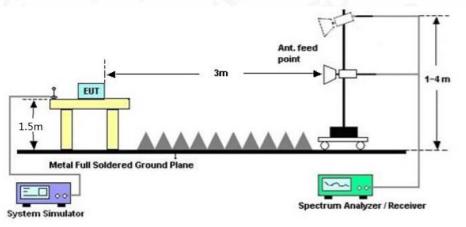

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the standing in the standing is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE in the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day affective issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/

11.3. LIMITS AND MEASUREMENT RESULT

15.209(a) Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission,

the test records reported below are the worst result compared to other modes.

11.4. TEST RESULT

Radiated emission below 30MHz


The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the stand of t



Radiated emission from 30MHz to 1000MHz

EUT	WiFi IP Camera	Model Name	Reolink Argus PT Pro
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Horizontal

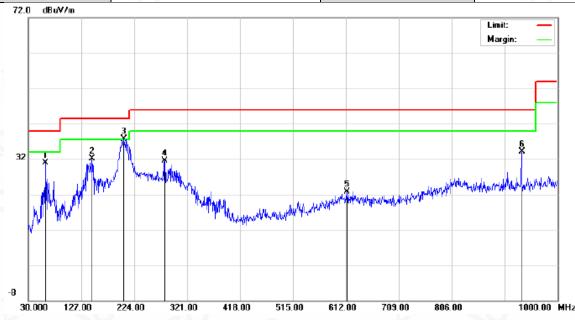

No.	Mk.	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		62.0099	19.30	11.61	30.91	40.00	-9.09	peak
2		146.4000	20.01	12.18	32.19	43.50	-11.31	peak
3	*	205.5699	29.19	8.55	37.74	43.50	-5.76	peak
4		280.2599	21.50	9.95	31.45	46.00	-14.55	peak
5		613.9400	5.80	16.84	22.64	46.00	-23.36	peak
6		934.0398	13.17	21.00	34.17	46.00	-11.83	peak


RESULT: PASS



Report No.: AGC11034210704FE06 Page 48 of 62

EUT	WiFi IP Camera	Model Name	Reolink Argus PT Pro
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Vertical

72.0 dBu¥/m

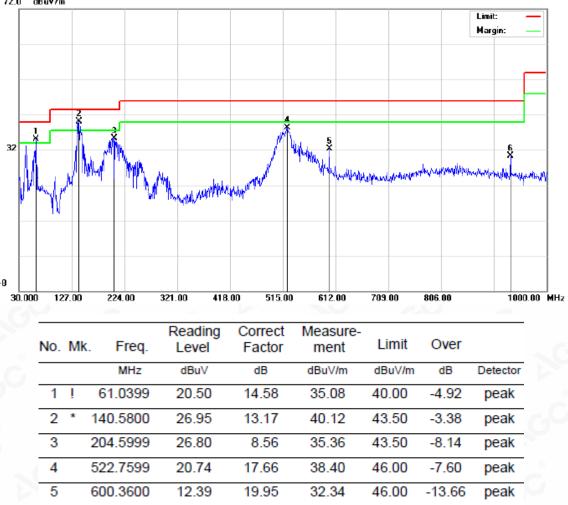

RESULT: PASS

6

Note: All test channels had been tested. The 802.11a20 at 5180MHz is the worst case and recorded in the test report.

30.23

46.00

-15.77

peak

Factor = Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

8.95

The "Factor" value can be calculated automatically by software of measurement system.

21.28

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Pestua/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGS. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.

933.0700



Radiated emission above 1GHz

EUT	WiFi IP Camera	Model Name	Reolink Argus PT Pro
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	🛛 Margin 🚩	Value Tree
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
10360.042	46.28	9.14	55.42	68.20	-12.78	peak
15540.063	40.13	10.22	50.35	74.00	-23.65	peak
15540.063	31.67	10.22	41.89	54.00	-12.11	AVG

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RADIATED EMISSION ABOVE 1GHZ–Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Tree
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	- Value Type
10360.042	46.57	9.14	55.71	68.20	-12.49	peak
15540.063	41.37	10.22	51.59	74.00	-22.41	peak
15540.063	31.59	10.22	41.81	54.00	-12.19	AVG

Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Report No.: AGC11034210704FE06 Page 50 of 62

EUT	WiFi IP Camera	Model Name	Reolink Argus PT Pro
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5200MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
10400.042	47.64	9.14	56.78	68.20	-11.42	peak
15600.063	42.58	10.22	52.80	74.00	-21.20	peak
15600.063	32.15	10.22	42.37	54.00	-11.63	AVG

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RADIATED EMISSION ABOVE 1GHZ–Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
10400.042	46.57	9.14	55.71	68.20	-12.49	peak
15600.063	40.13	10.22	50.35	74.00	-23.65	peak
15600.063	31.59	10.22	41.81	54.00	-12.19	AVG

Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Report No.: AGC11034210704FE06 Page 51 of 62

EUT	WiFi IP Camera	Model Name	Reolink Argus PT Pro
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5240MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
10480.042	48.56	9.27	57.83	68.20	-10.37	peak
15720.063	42.67	10.38	53.05	74.00	-20.95	peak
15720.063	32.49	10.38	42.87	54.00	-11.13	AVG

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RADIATED EMISSION ABOVE 1GHZ–Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
10480.042	46.23	9.27	55.50	68.20	-12.70	peak
15720.063	42.87	10.38	53.25	74.00	-20.75	peak
15720.063	31.54	10.38	41.92	54.00	-12.08	AVG

Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Report No.: AGC11034210704FE06 Page 52 of 62

EUT	WiFi IP Camera	Model Name	Reolink Argus PT Pro
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5745MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
11490.042	46.25	9.42	55.67	74.00	-18.33	peak
11490.042	37.84	9.42	47.26	54.00	-6.74	AVG
17235.063	40.12	10.51	50.63	68.20	-17.57	peak

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	- Value Type
11490.042	45.37	9.42	54.79	74.00	-19.21	peak
11490.042	36.54	9.42	45.96	54.00	-8.04	AVG
17235.063	40.91	10.51	51.42	68.20	-16.78	peak

Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Report No.: AGC11034210704FE06 Page 53 of 62

EUT	WiFi IP Camera	Model Name	Reolink Argus PT Pro
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5785MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	
,	Ű			(0)		Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,
11570.042	46.25	9.42	55.67	74.00	-18.33	peak
11570.042	35.67	9.42	45.09	54.00	-8.91	AVG
17355.063	41.87	10.51	52.38	68.20	-15.82	peak

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RADIATED EMISSION ABOVE 1GHZ–Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	- Value Type
11570.042	47.64	9.42	57.06	74.00	-16.94	peak
11570.042	35.46	9.42	44.88	54.00	-9.12	AVG
17355.063	42.18	10.51	52.69	68.20	-15.51	peak

Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Report No.: AGC11034210704FE06 Page 54 of 62

EUT	WiFi IP Camera	Model Name	Reolink Argus PT Pro
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5825MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
11650.042	47.94	9.62	52.98	74.00	-21.02	peak
11650.042	38.60	9.62	45.05	54.00	-8.95	AVG
17475.063	30.67	10.75	47.61	68.20	-26.39	peak

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RADIATED EMISSION ABOVE 1GHZ–Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11650.042	46.25	9.62	53.55	74.00	-20.45	peak
11650.042	36.27	9.62	47.64	54.00	-6.36	AVG
17475.063	41.16	10.75	48.61	68.20	-25.39	peak
Remark:		<i>c</i> .O	0			0
actor = Anter	na Factor + Cab	le Loss – Pre-ar	mplifier			

Note: All test channels had been tested. The 802.11a20 is the worst case and recorded in the test report. Other frequencies radiation emission from 1GHz to 40GHz at least have 20dB margin and not recorded in the test report.

Factor = Antenna Factor + Cable loss - Amplifier gain, Margin= Limit-Level.


The "Factor" value can be calculated automatically by software of measurement system.




Test result for band edge emission at restricted bands

EUT	WiFi IP Camera	Model Name	Reolink Argus PT Pro
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Horizontal

Test Graph for Peak Measurement

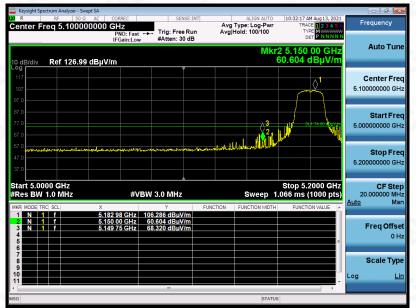

Test Graph for Average Measurement

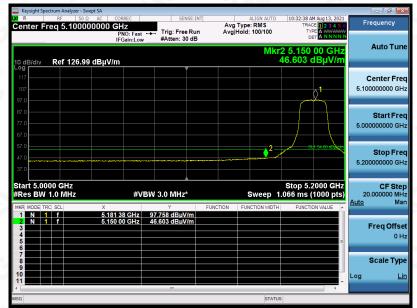

RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Posting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agc-cert.com




Report No.: AGC11034210704FE06 Page 56 of 62

EUT	WiFi IP Camera	Model Name	Reolink Argus PT Pro
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

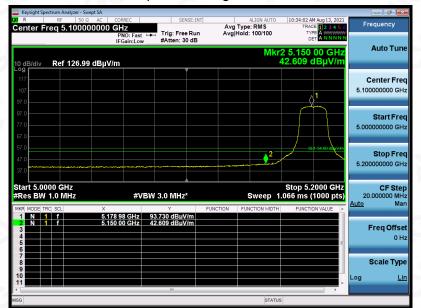

RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the topologicated restron/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



Report No.: AGC11034210704FE06 Page 57 of 62

- Note: 1. All the 20MHz bandwidth modulation had been tested, the 802.11a20 at 5180MHz was the worst case and record in his test report.
 - 2. The factor had been edited in the "Input Correction" of the Spectrum Analyzer.

3. Only the data of band edge emission at the restricted band 4.5GHz-5.15GHz and 5.35GHz-5.46GHz record in the report. Other restricted band 7.25GHz-7.77GHz were considered as ambient noise. No recording in the test report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated freshing/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC in the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15da (Catter authorization of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agc-cert.com

12. LINE CONDUCTED EMISSION TEST

12.1. LIMITS OF LINE CONDUCTED EMISSION TEST


Francisco	Maximum RF Line Voltage				
Frequency	Q.P (dBµV)	Average (dBµV)			
150kHz~500kHz	66-56	56-46			
500kHz~5MHz	56	46			
5MHz~30MHz	60	50			

Note:

1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50MHz.

12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

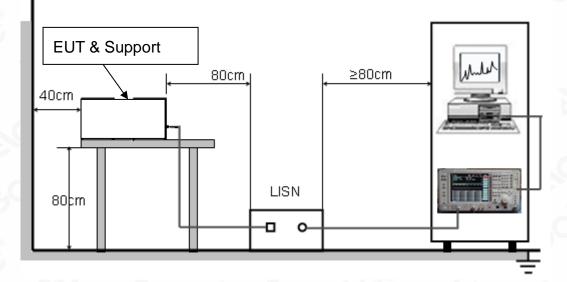




12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received charging voltage by adapter which received 120V/60Hzpower by a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 Ohm load; the second scan had Line 1 connected to a 50 Ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case was reported on the Summary Data page.






2

12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST



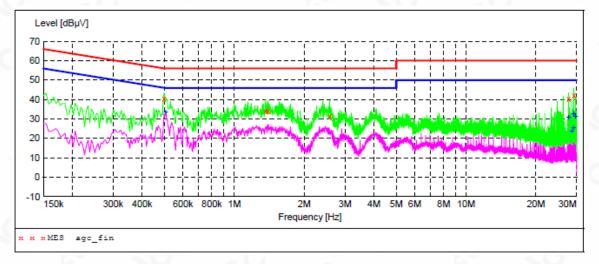

MEASUREMENT RESULT: "agc_fin"

2021/8/12 21:	17					
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.498000 1.366000 1.398000 2.578000 27.694000 29.154000	40.20 33.90 33.90 31.60 40.50 42.10	5.4 5.9 5.9 6.5 9.4 9.5	56 56 56 60 60		QP QP QP	L1 L1 L1 L1 L1 L1


MEASUREMENT RESULT: "agc_fin2"

2021/8/12 21:	:17					
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.506000 27.698000 28.534000 29.114000 29.154000 29.702000	33.60 31.10 23.80 25.70 32.60 31.20	5.4 9.4 9.5 9.5 9.5 9.6	46 50 50 50 50 50		AV AV	L1 L1 L1 L1 L1 L1



Report No.: AGC11034210704FE06 Page 61 of 62



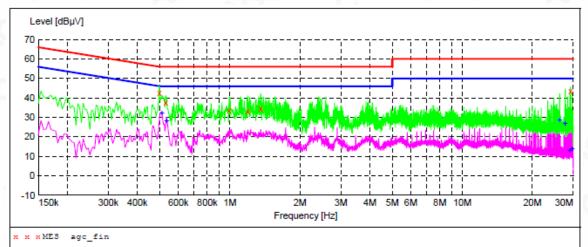

MEASUREMENT RESULT: "agc fin"

2021/8/12 21:	26					
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.498000 0.530000 0.994000 1.198000	42.50 37.90 33.70 33.00	5.4 5.4 5.4 5.7	56 56 56	18.1 22.3 23.0	QP QP QP	N N N N
1.358000 29.162000	34.50 43.60	5.9 9.5	56 60	21.5 16.4	-	N N

MEASUREMENT RESULT: "agc_fin2"

2021/8/12	21:26					
Frequen M	lcy Level Hz dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.5100	00 32.20	5.4	46	13.8	AV	N
0.5340	00 28.30	5.4	46	17.7	AV	Ν
26.2300	00 28.80	9.3	50	21.2	AV	Ν
27.7060	00 27.10	9.4	50	22.9	AV	Ν
29.0340	00 13.00	9.5	50	37.0	AV	Ν
29.6220	00 14.10	9.6	50	35.9	AV	Ν

RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written approver, and the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agc-cert.com



Report No.: AGC11034210704FE06 Page 62 of 62

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Refer to the Report No.: AGC11034210704AP03

APPENDIX B: PHOTOGRAPHS OF EUT

Refer to the Report No.: AGC11034210704AP03

----END OF REPORT----

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Pestho/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter apploration of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agc-cert.com

Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the solution of a stamp of the test results for the test results and the test of the test of the test results of the test results of the test report is not permitted without the writter apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.