

Report No.: AGC11034230404FE04


Page 75 of 130

	Test Data o	of Conducted Output F	Power Spectral Density	/-Ant 2	
Test Mode	Test Channel (MHz)	Power density (dBm/20kHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail
	2412	0.777	-7.462	≪8	Pass
802.11b	2437	0.817	-7.422	≪8	Pass
	2462	0.875	-7.364	≤8	Pass
	2412	-9.195	-17.434	≪8	Pass
802.11g	2437	-8.666	-16.905	≤8	Pass
	2462	-8.794	-17.033	≪8	Pass
	2412	-7.755	-15.994	≪8	Pass
802.11n20	2437	-7.264	-15.503	≪8	Pass
	2462	-6.865	-15.104	≪8	Pass
	2422	-10.633	-18.872	≪8	Pass
802.11n40	2437	-10.780	-19.019	≤8	Pass
	2452	-10.860	-19.099	≪8	Pass

	Test Data of Conducted Output Power Spectral Density-MIMO								
Test Mode	Test Channel (MHz)	Power density (dBm/20kHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail				
	2412	-4.45	-12.69	≤7.01	Pass				
802.11n20	2437	-4.51	-12.75	≤7.01	Pass				
	2462	-4.08	-12.32	≤7.01	Pass				
	2422	-8.10	-16.34	≤7.01	Pass				
802.11n40	2437	-7.74	-15.98	≤7.01	Pass				
	2452	-8.00	-16.24	≤7.01	Pass				


Note: 1.Power density(dBm/3kHz) = Power density(dBm/20kHz) - 10*log(20/3).

2. The Total PSD= $10*log \{10^{(Ant 1 PSD/10)} + 10^{(Ant 2 PSD/10)}\}$






Test Graphs of Conducted Output Power Spectral Density

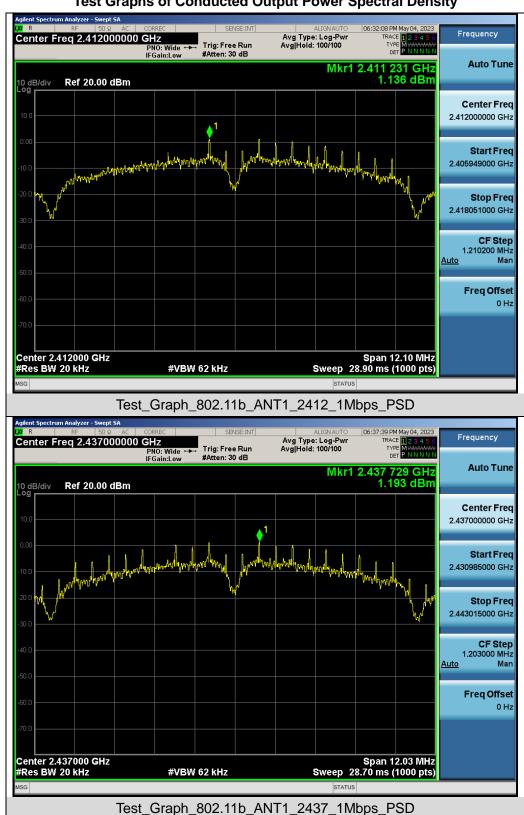



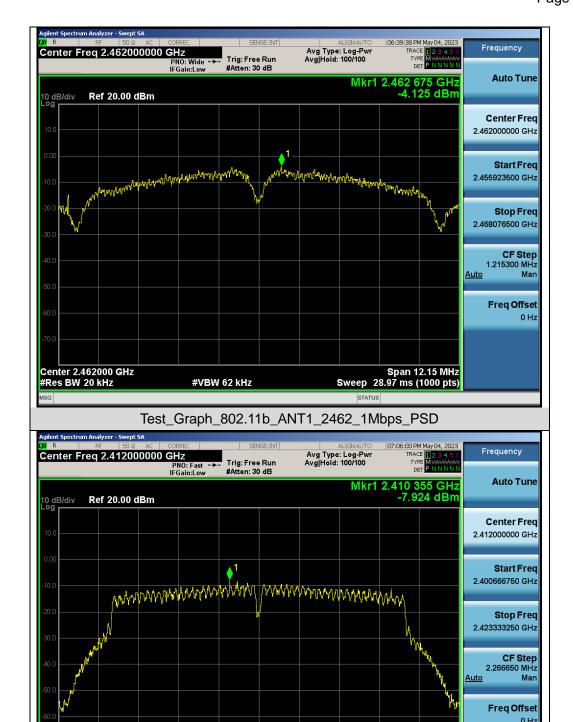


Test_Graph_802.11g_ANT1_2412_6Mbps_PSD

#VBW 62 kHz

Span 22.67 MHz Sweep 54.08 ms (1000 pts)

Center 2.41200 GHz #Res BW 20 kHz



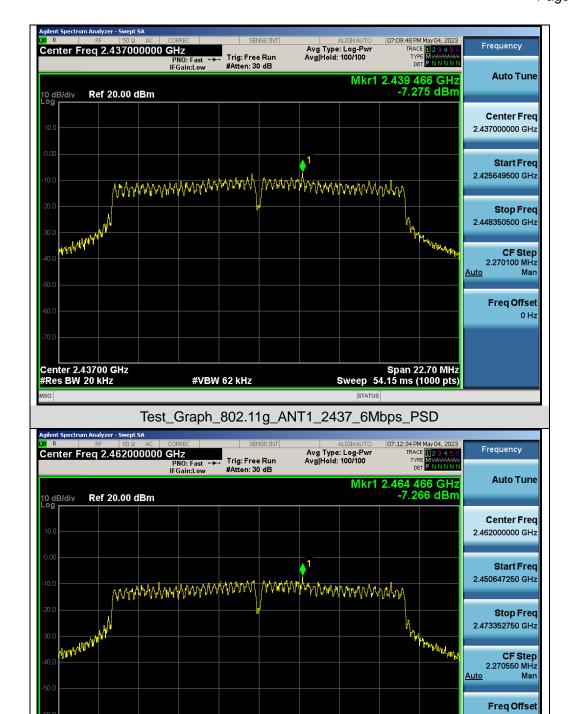

Test_Graph_802.11g_ANT1_2462_6Mbps_PSD


#VBW 62 kHz

Span 22.71 MHz Sweep 54.15 ms (1000 pts)


Center 2.46200 GHz #Res BW 20 kHz





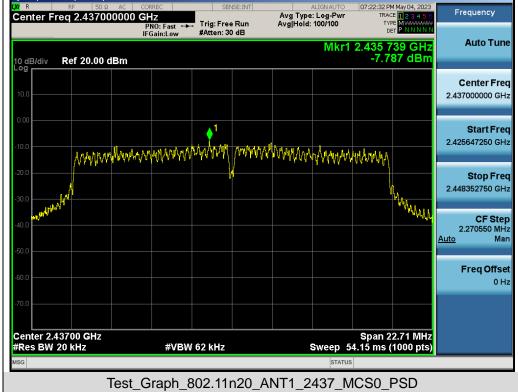



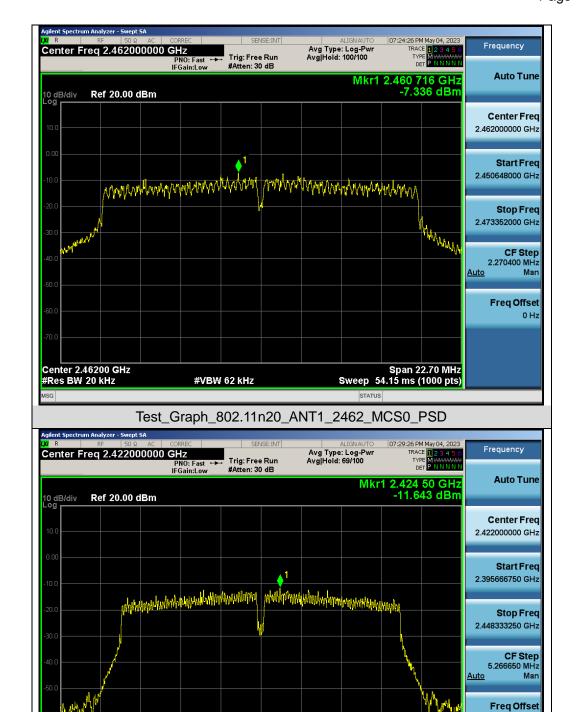


Test_Graph_802.11n40_ANT1_2422_MCS0_PSD

#VBW 62 kHz


Span 52.67 MHz Sweep 125.5 ms (1000 pts)

Center 2.42200 GHz #Res BW 20 kHz



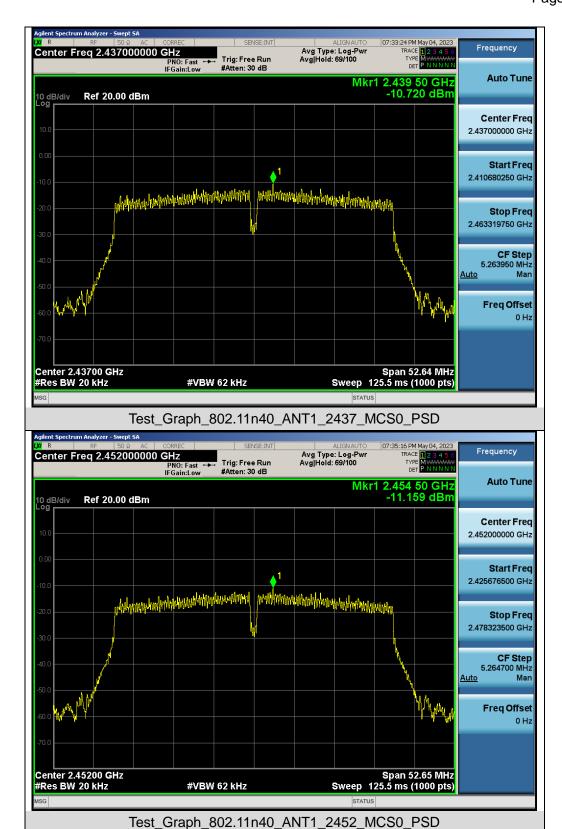



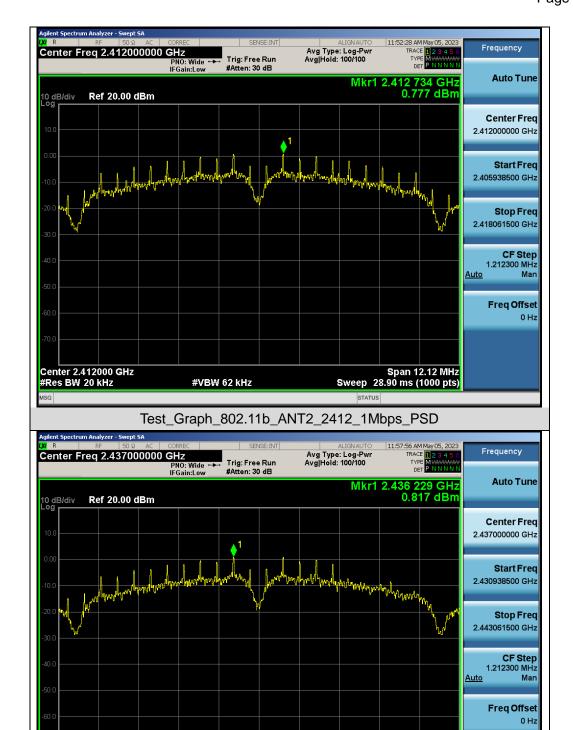

Test_Graph_802.11b_ANT2_2437_1Mbps_PSD

#VBW 62 kHz

Span 12.12 MHz Sweep 28.90 ms (1000 pts)

Center 2.437000 GHz #Res BW 20 kHz





Test_Graph_802.11g_ANT2_2412_6Mbps_PSD

#VBW 62 kHz


Span 22.67 MHz Sweep 54.08 ms (1000 pts)

Center 2.41200 GHz #Res BW 20 kHz

Freq Offset

Span 22.70 MHz Sweep 54.15 ms (1000 pts)



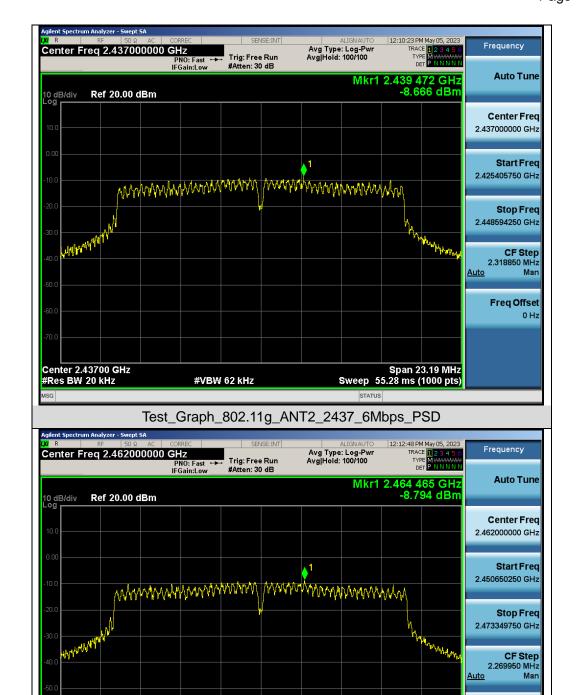

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Test_Graph_802.11g_ANT2_2462_6Mbps_PSD

#VBW 62 kHz


Center 2.46200 GHz #Res BW 20 kHz





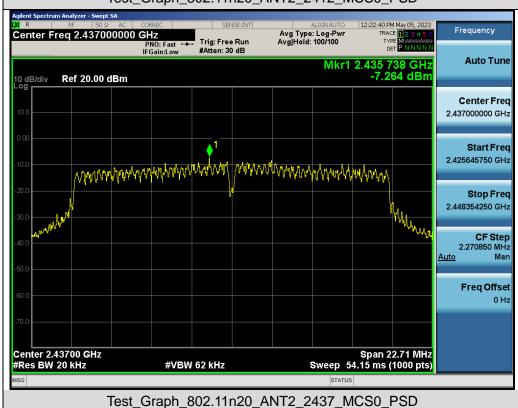



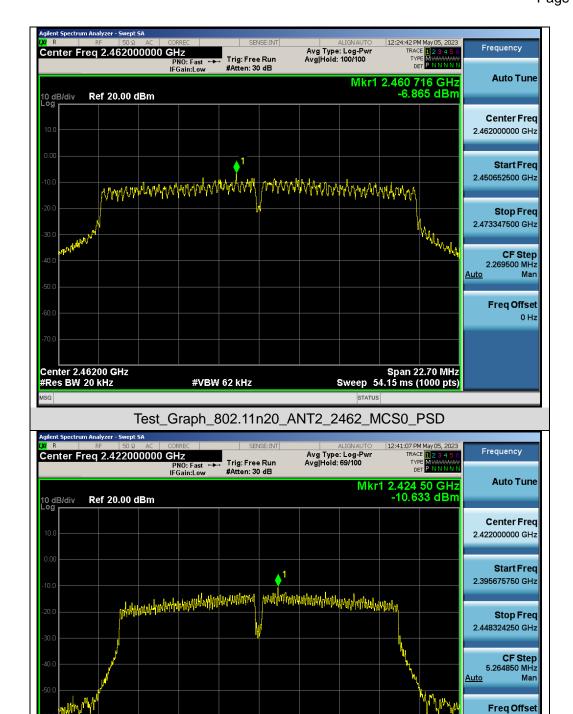


Test_Graph_802.11n40_ANT2_2422_MCS0_PSD


#VBW 62 kHz

Span 52.65 MHz Sweep 125.5 ms (1000 pts)

Center 2.42200 GHz #Res BW 20 kHz



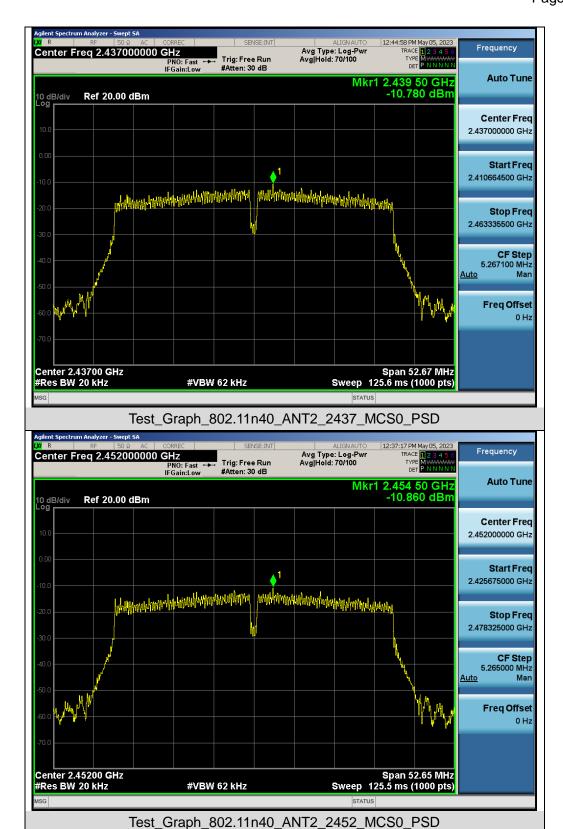







10.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)


RADIATED EMISSION TEST SETUP 9KHz-30MHz

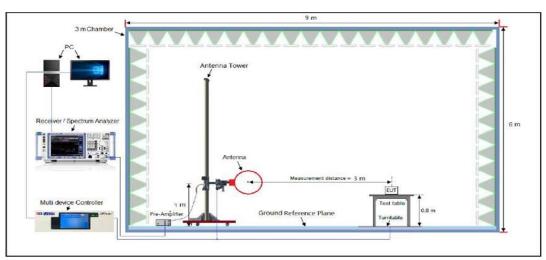

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

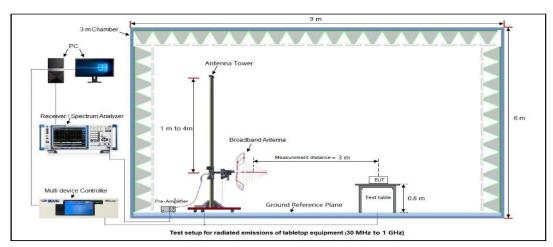

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

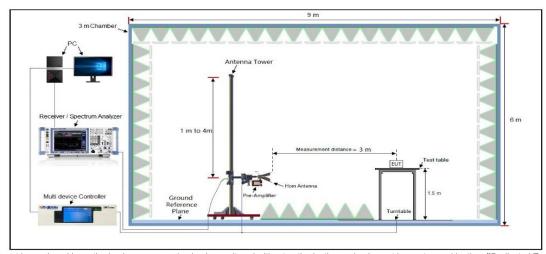




10.4 MEASUREMENT RESULT

Radiated emission below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

Radiated emission from 30MHz to 1000MHz

EUT	WiFi IP Camera	Model Name	E1 Outdoor Pro
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with 2412MHz	Antenna	Horizontal

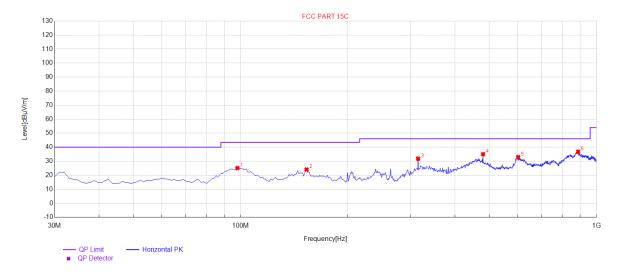


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	97.9	25.11	20.24	43.50	18.39	100	162	Horizontal
2	153.19	24.11	14.25	43.50	19.39	100	289	Horizontal
3	315.18	31.84	20.20	46.00	14.16	100	273	Horizontal
4	480.08	35.05	25.79	46.00	10.95	100	312	Horizontal
5	602.3	32.93	28.64	46.00	13.07	100	332	Horizontal
6	887.48	36.80	32.71	46.00	9.20	100	13	Horizontal

RESULT: PASS



EUT	WiFi IP Camera	Model Name	E1 Outdoor Pro
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with 2412MHz	Antenna	Vertical

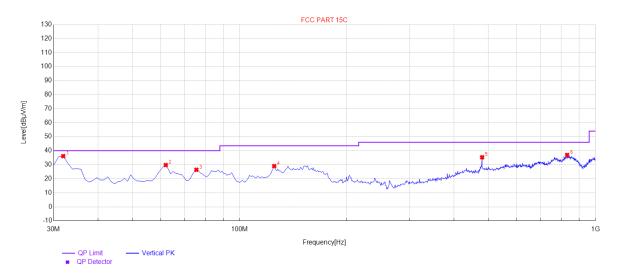

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	31.94	36.14	10.21	40.00	3.86	100	47	Vertical
2	62.01	29.76	14.64	40.00	10.24	100	354	Vertical
3	75.59	26.41	12.76	40.00	13.59	100	357	Vertical
4	125.06	29.03	18.07	43.50	14.47	100	110	Vertical
5	480.08	35.33	22.61	46.00	10.67	100	176	Vertical
6	832.19	36.97	32.15	46.00	9.03	100	294	Vertical

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

- 2. The "Factor" value can be calculated automatically by software of measurement system.
- 3. All test modes had been pre-tested. All the antennas have been tested. The 802.11b mode of antenna 1 is the worst case and recorded in the report.



Report No.: AGC11034230404FE04

Page 91 of 130

Radiated emission above 1GHz


EUT	WiFi IP Camera	Model Name	E1 Outdoor Pro	
Temperature	25°C	Relative Humidity	58%	
Pressure	960hPa	Test Voltage	Normal Voltage	
Test Mode	802.11b with date rate 1_2412MHz	Antenna	Horizontal	

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type		
4824.000	52.16	0.08	52.24	74.00	-21.76	peak		
4824.000	43.51	0.08	43.59	54.00	-10.41	AVG		
7236.000	50.13	2.21	52.34	74.00	-21.66	peak		
7236.000	41.22	2.21	43.43	54.00	-10.57	AVG		
Remark:								
actor = Anter	na Factor + Cabl	e Loss – Pre-a	amplifier.					

EUT	WiFi IP Camera	Model Name	E1 Outdoor Pro
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1_2412MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type			
4824.000	50.69	0.08	50.77	74.00	-23.23	peak			
4824.000	42.84	0.08	42.92	54.00	-11.08	AVG			
7236.000	49.36	2.21	51.57	74.00	-22.43	peak			
7236.000	40.85	2.21	43.06	54.00	-10.94	AVG			
Remark:	1		•		L	1			
Factor = Anter	nna Factor + Cabl	e Loss – Pre-	amplifier.		•	•			

RESULT: PASS






EUT	WiFi IP Camera	Model Name	E1 Outdoor Pro
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1_2437MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type			
4874.000	52.85	0.14	52.99	74.00	-21.01	peak			
4874.000	37.94	0.14	38.08	54.00	-15.92	AVG			
7311.000	51.22	2.36	53.58	74.00	-20.42	peak			
7311.000	35.74	2.36	38.10	54.00	-15.90	AVG			
Remark:									
Factor = Anter	Factor = Antenna Factor + Cable Loss – Pre-amplifier.								

EUT	WiFi IP Camera	Model Name	E1 Outdoor Pro
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1_2437MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4874.000	50.44	0.14	50.58	74.00	-23.42	peak
4874.000	38.12	0.14	38.26	54.00	-15.74	AVG
7311.000	50.54	2.36	52.90	74.00	-21.10	peak
7311.000	36.56	2.36	38.92	54.00	-15.08	AVG
Remark:						
Factor = Anten	na Factor + Cabl	e Loss – Pre-a	mplifier.			





EUT	WiFi IP Camera	Model Name	E1 Outdoor Pro
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1_2462MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Tune
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4924.000	51.25	0.22	51.47	74.00	-22.53	peak
4924.000	42.02	0.22	42.24	54.00	-11.76	AVG
7386.000	48.13	2.64	50.77	74.00	-23.23	peak
7386.000	39.52	2.64	42.16	54.00	-11.84	AVG
Remark:						
Factor = Anter	na Factor + Cabl	e Loss – Pre-a	amplifier.			

EUT	WiFi IP Camera	Model Name	E1 Outdoor Pro
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1_2462MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4924.000	49.88	0.22	50.10	74.00	-23.90	peak
4924.000	41.15	0.22	41.37	54.00	-12.63	AVG
7386.000	47.36	2.64	50.00	74.00	-24.00	peak
7386.000	38.74	2.64	41.38	54.00	-12.62	AVG
Remark:						
Factor = Anter	Factor = Antenna Factor + Cable Loss – Pre-amplifier.					


Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Over= Limit-Measure.

The "Factor" value can be calculated automatically by software of measurement system.

All test modes had been pre-tested. All the antennas have been tested. The 802.11b mode of antenna 1 is the worst case and recorded in the report.







Test result for band edge emission at restricted bands Ant 1

EUT	WiFi IP Camera	Model Name	E1 Outdoor Pro
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHz	Antenna	Horizontal


Test Graph for Peak Measurement

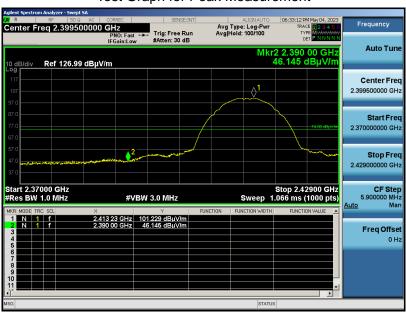

Test Graph for Average Measurement

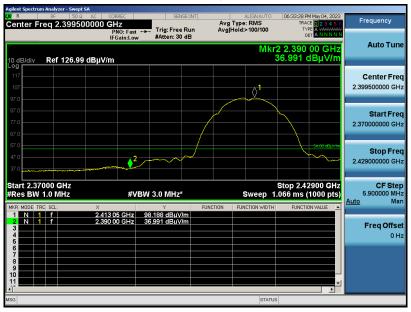

RESULT: PASS







EUT	WiFi IP Camera	Model Name	E1 Outdoor Pro
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

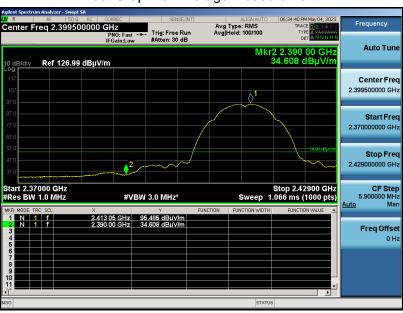







EUT	WiFi IP Camera	Model Name	E1 Outdoor Pro
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

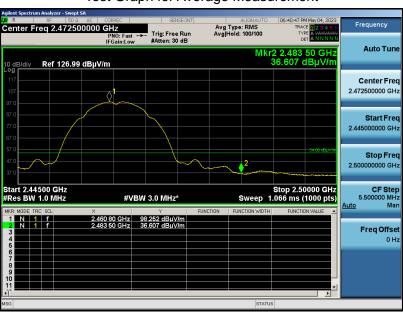







EUT	WiFi IP Camera	Model Name	E1 Outdoor Pro
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

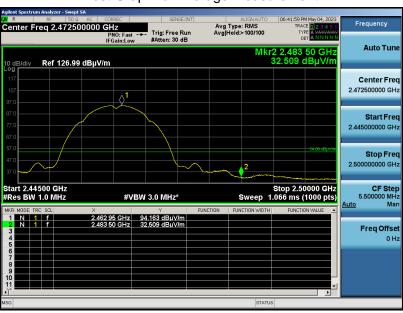







EUT	WiFi IP Camera	Model Name	E1 Outdoor Pro
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2412MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

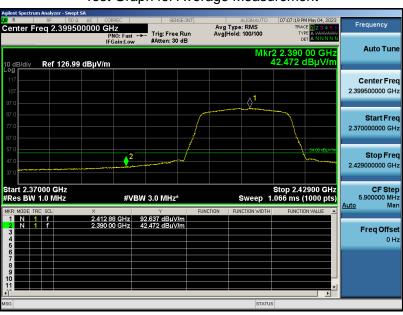








EUT	WiFi IP Camera	Model Name	E1 Outdoor Pro
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2412MHz	Antenna	Vertical

Test Graph for Peak Measurement

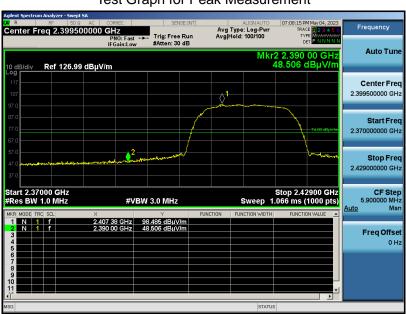

Test Graph for Average Measurement

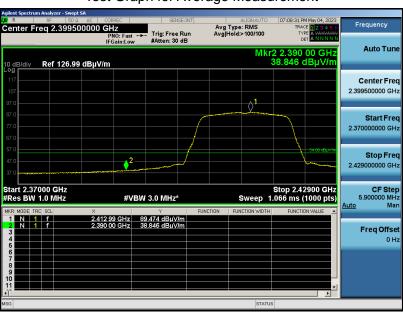







EUT	WiFi IP Camera	Model Name	E1 Outdoor Pro
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2462MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

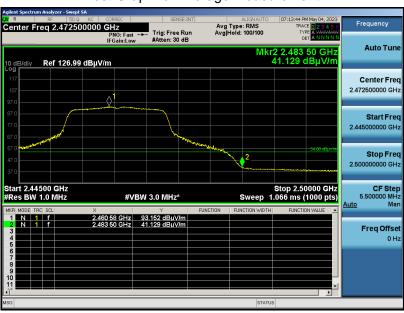






EUT	WiFi IP Camera	Model Name	E1 Outdoor Pro
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2462MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement









EUT	WiFi IP Camera	Model Name	E1 Outdoor Pro
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2412MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

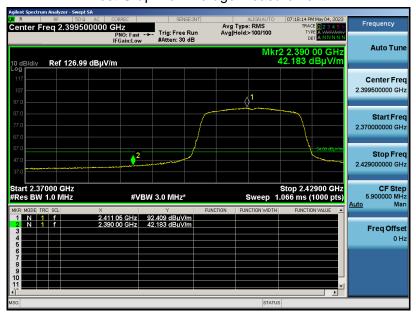







EUT	WiFi IP Camera	Model Name	E1 Outdoor Pro
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2412MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

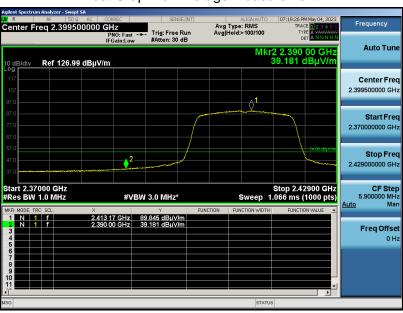







EUT	WiFi IP Camera	Model Name	E1 Outdoor Pro
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2462MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

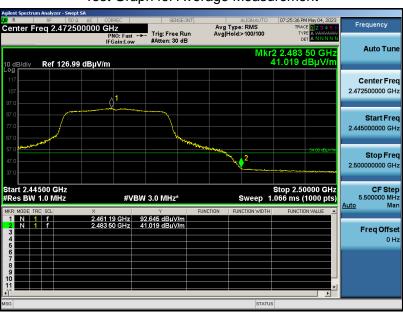






EUT	WiFi IP Camera	Model Name	E1 Outdoor Pro
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2462MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement










EUT	WiFi IP Camera	Model Name	E1 Outdoor Pro
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with data rate 13.5 2422MHz	Antenna	Horizontal

Test Graph for Peak Measurement

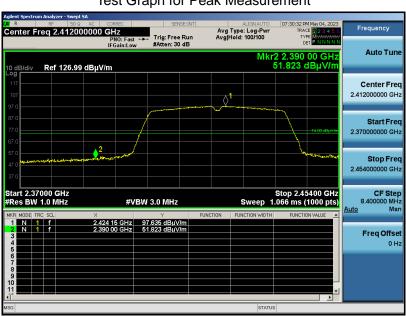

Test Graph for Average Measurement

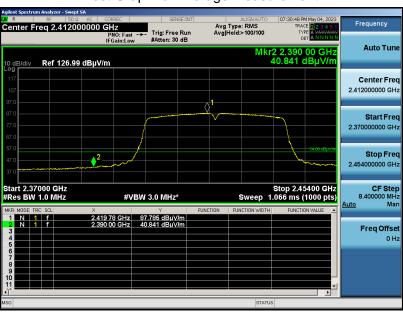








EUT	WiFi IP Camera	Model Name	E1 Outdoor Pro
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with data rate 13.5 2422MHz	Antenna	Vertical

Test Graph for Peak Measurement

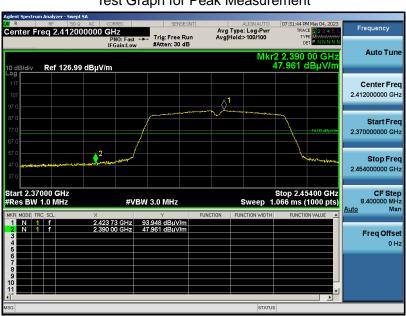

Test Graph for Average Measurement

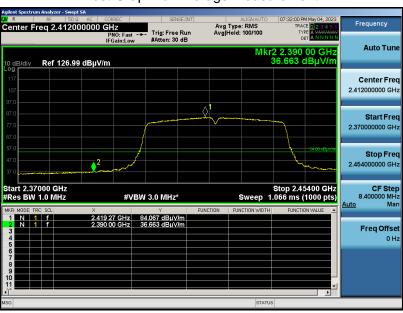







EUT	WiFi IP Camera	Model Name	E1 Outdoor Pro
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with data rate 13.5 2452MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

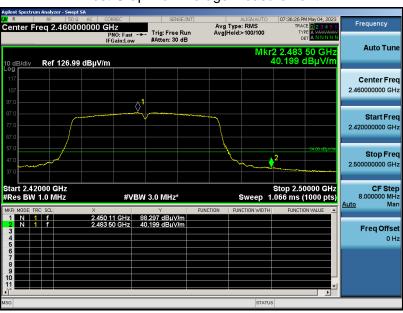







EUT	WiFi IP Camera	Model Name	E1 Outdoor Pro
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with data rate 13.5 2452MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

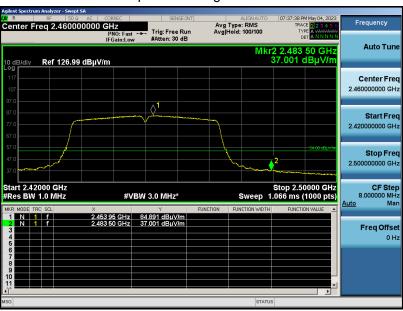







Test result for band edge emission at restricted bands Ant 2

EUT	WiFi IP Camera	Model Name	E1 Outdoor Pro
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHz	Antenna	Horizontal


Test Graph for Peak Measurement

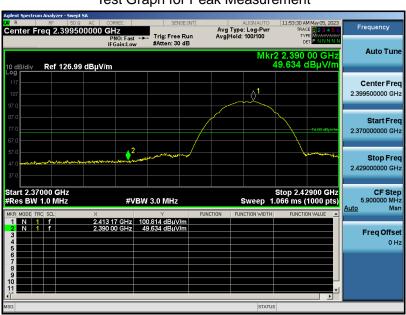

Test Graph for Average Measurement

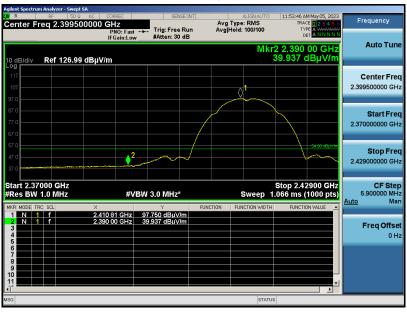

RESULT: PASS







EUT	WiFi IP Camera	Model Name	E1 Outdoor Pro
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

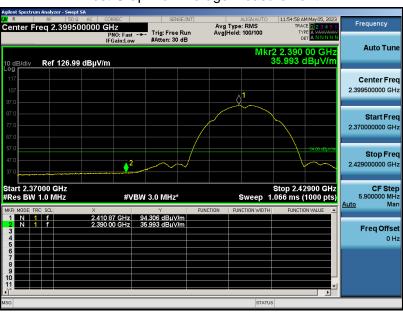








EUT	WiFi IP Camera	Model Name	E1 Outdoor Pro
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHz	Antenna	Horizontal

Test Graph for Peak Measurement

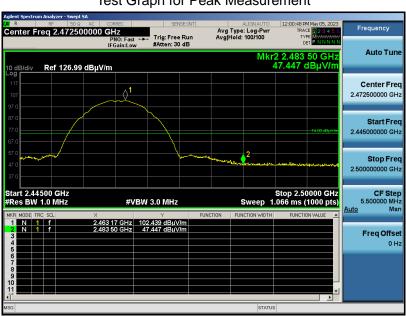

Test Graph for Average Measurement

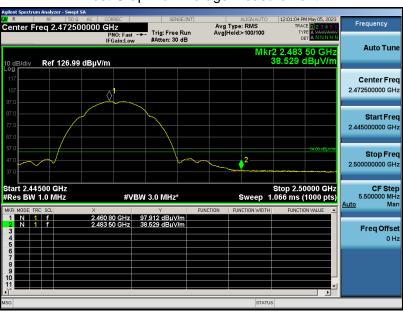







EUT	WiFi IP Camera	Model Name	E1 Outdoor Pro
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHz	Antenna	Vertical

Test Graph for Peak Measurement

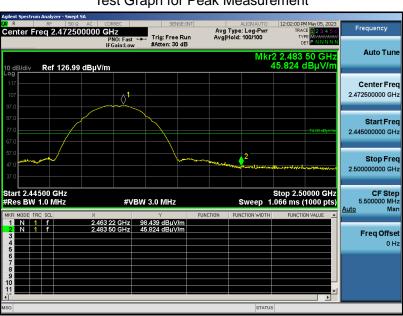

Test Graph for Average Measurement










EUT	WiFi IP Camera	Model Name	E1 Outdoor Pro
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2412MHz	Antenna	Horizontal

Test Graph for Peak Measurement

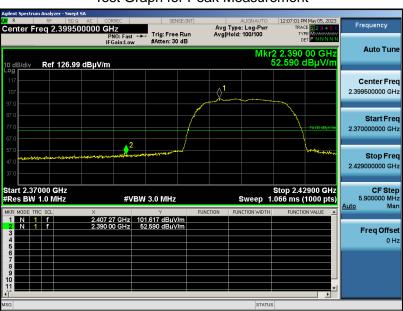

Test Graph for Average Measurement

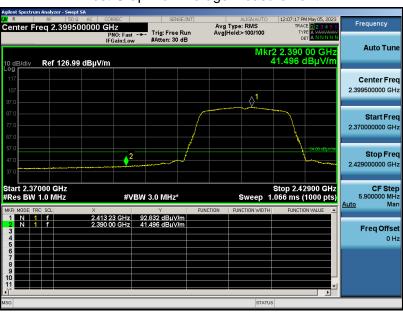








EUT	WiFi IP Camera	Model Name	E1 Outdoor Pro
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2412MHz	Antenna	Vertical

Test Graph for Peak Measurement

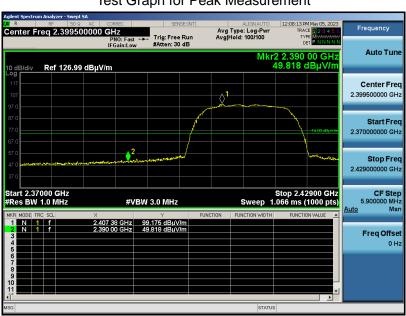

Test Graph for Average Measurement

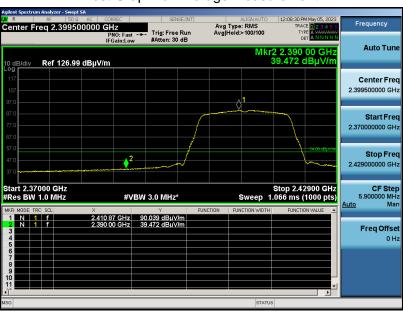






EUT	WiFi IP Camera	Model Name	E1 Outdoor Pro
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2462MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement








EUT	WiFi IP Camera	Model Name	E1 Outdoor Pro
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2462MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement










EUT	WiFi IP Camera	Model Name	E1 Outdoor Pro
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2412MHz	Antenna	Horizontal

Test Graph for Peak Measurement

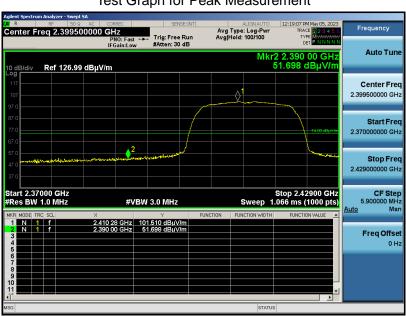

Test Graph for Average Measurement

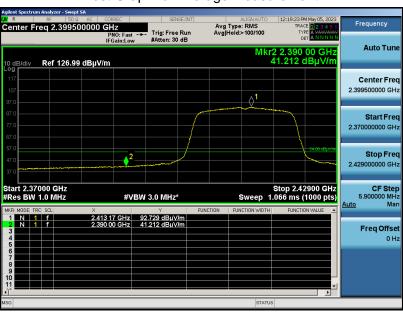








EUT	WiFi IP Camera	Model Name	E1 Outdoor Pro
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2412MHz	Antenna	Vertical

Test Graph for Peak Measurement

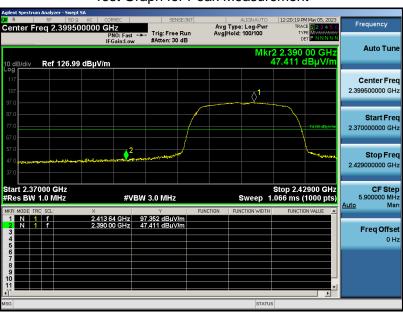

Test Graph for Average Measurement

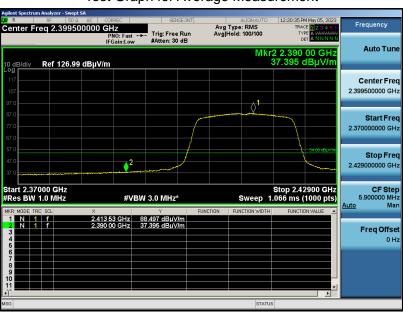







EUT	WiFi IP Camera	Model Name	E1 Outdoor Pro
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2462MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

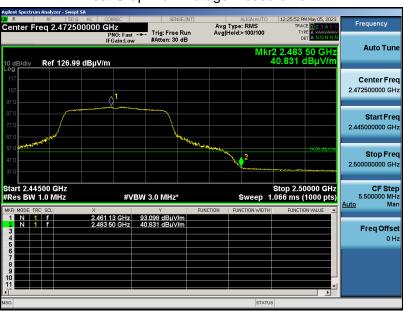






EUT	WiFi IP Camera	Model Name	E1 Outdoor Pro
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2462MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement










EUT	WiFi IP Camera	Model Name	E1 Outdoor Pro
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with data rate 13.5 2422MHz	Antenna	Horizontal

Test Graph for Peak Measurement

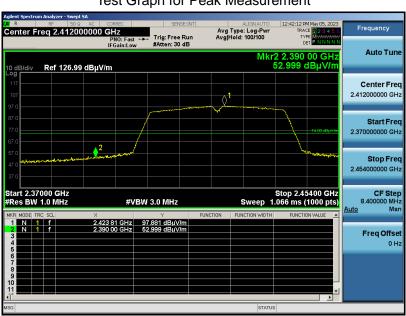

Test Graph for Average Measurement

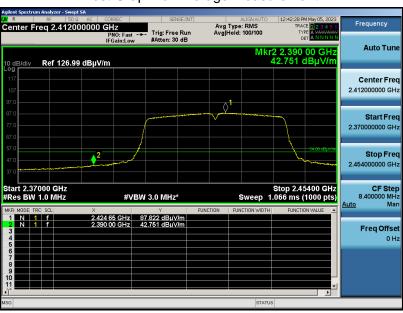







EUT	WiFi IP Camera	Model Name	E1 Outdoor Pro
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with data rate 13.5 2422MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

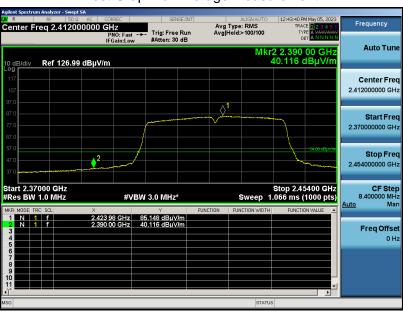








EUT	WiFi IP Camera	Model Name	E1 Outdoor Pro
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with data rate 13.5 2452MHz	Antenna	Horizontal

Test Graph for Peak Measurement

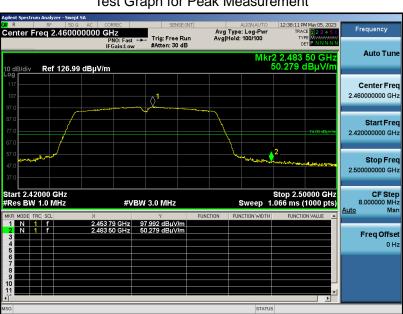

Test Graph for Average Measurement

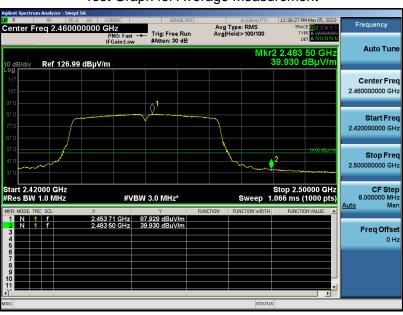





EUT	WiFi IP Camera	Model Name	E1 Outdoor Pro
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with data rate 13.5 2452MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement





11. LINE CONDUCTED EMISSION TEST


11.1. LIMITS OF LINE CONDUCTED EMISSION TEST

F	Maximum RF Line Voltage			
Frequency	Q.P (dBμV)	Average (dBμV)		
150kHz~500kHz	66-56	56-46		
500kHz~5MHz	56	46		
5MHz~30MHz	60	50		

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

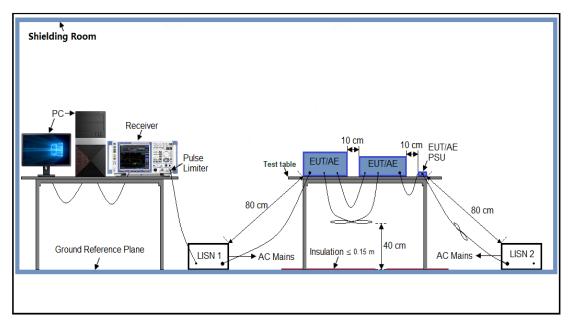



Report No.: AGC11034230404FE04 Page 127 of 130

11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 Ohm load; the second scan had Line 1 connected to a 50 Ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of mode 1 is the worst case was reported on the Summary Data page.

11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST



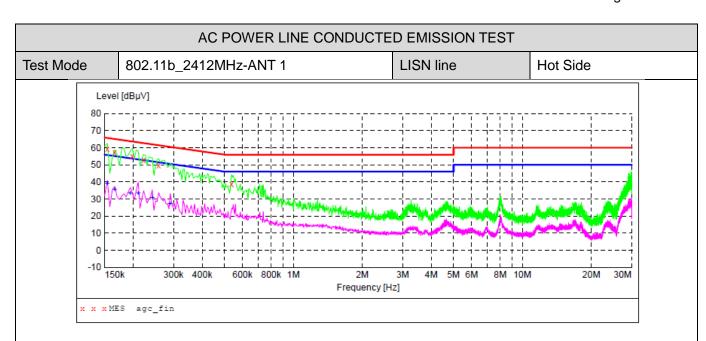

MEASUREMENT RESULT: "agc_fin"

2023	11/26	22:	20
2023	/4/20	~~:	30

2023/4/20 22:	30					
Frequency MHz	Level dBµV		Limit dBµV	Margin dB	Detector	Line
0.154000	59.60	6.2	66	6.2	QP	L1
0.166000	57.10	6.2	65	8.1	QP	L1
0.198000	54.80	6.2	64	8.9	QP	L1
0.222000	52.80	6.2	63	9.9	QP	L1
0.258000	49.80	6.2	62	11.7	QP	L1
0.538000	38.70	6.2	56	17.3	OP	T-1

MEASUREMENT RESULT: "agc_fin2"

2023/4/26 22:30


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.154000	39.10	6.2	56	16.7	AV	L1
0.166000	35.60	6.2	55	19.6	AV	L1
0.194000	33.40	6.2	54	20.5	AV	L1
0.210000	33.50	6.2	53	19.7	AV	L1
0.242000	30.60	6.2	52	21.4	AV	L1
0.290000	27.20	6.2	51	23.3	AV	L1

RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



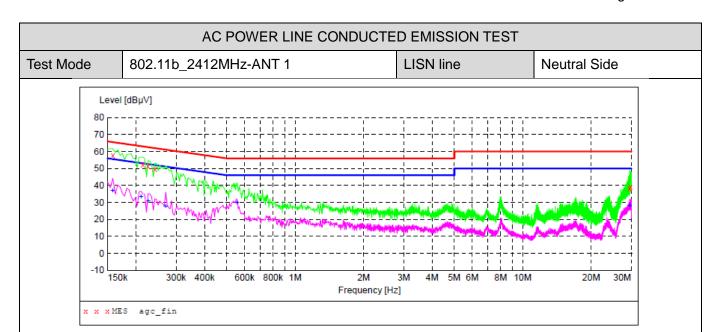

MEASUREMENT RESULT: "agc fin"

2023/4/26 22:33

Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line
0.158000	57.80	6.2	66	7.8	QP	N
0.214000	52.50	6.2	63	10.5	QP	N
0.226000	51.30	6.2	63	11.3	QP	N
0.242000	49.60	6.2	62	12.4	QP	N
29.506000	38.20	9.2	60	21.8	QP	N
29.766000	39.30	9.2	60	20.7	QP	N

MEASUREMENT RESULT: "agc fin2"

2023/4/26 22:33

I
I
I
I
ī
I

RESULT: PASS



Report No.: AGC11034230404FE04

Page 130 of 130

APPENDIX I: PHOTOGRAPHS OF TEST SETUP

Refer to the Report No.: AGC11034230404AP01

APPENDIX II: PHOTOGRAPHS OF EUT

Refer to the Report No.: AGC11034230404AP02

----END OF REPORT----



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.