



Web: http://www.agccert.com/
















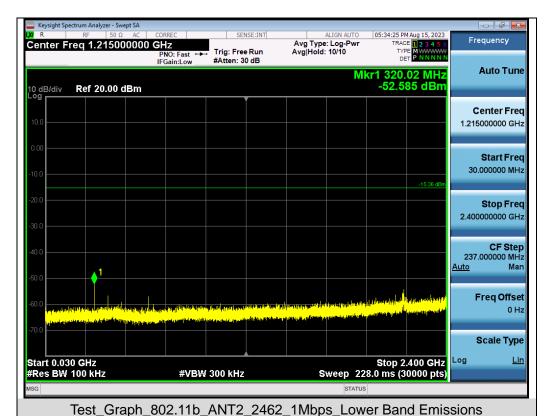









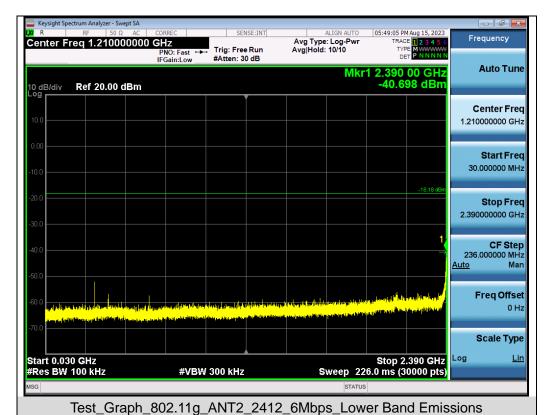









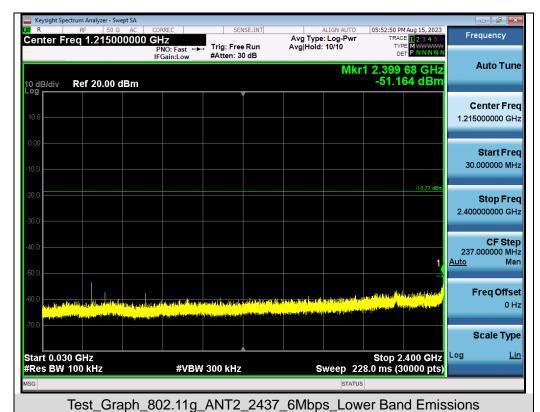









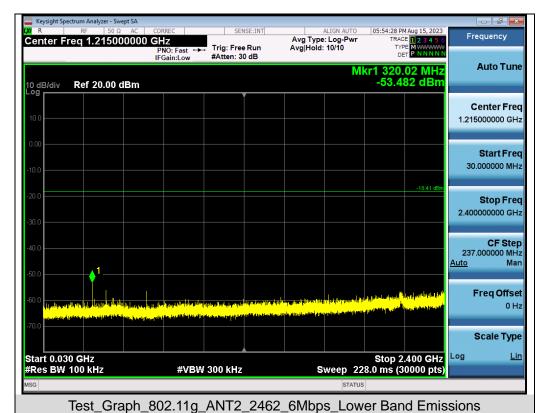










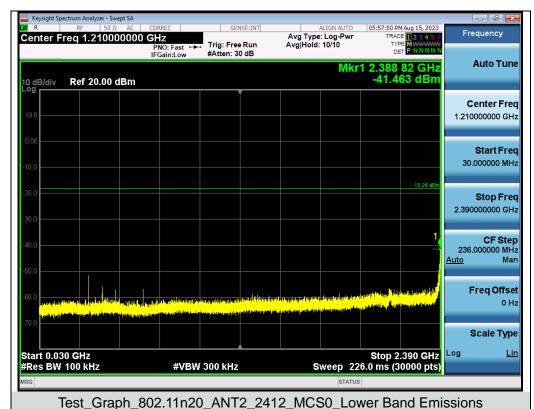


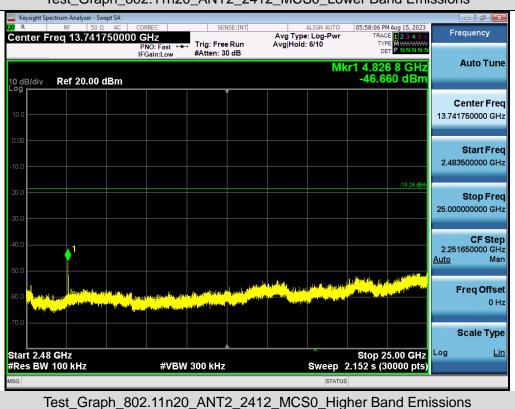






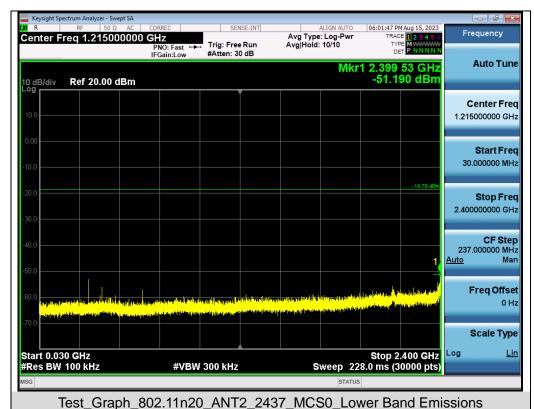


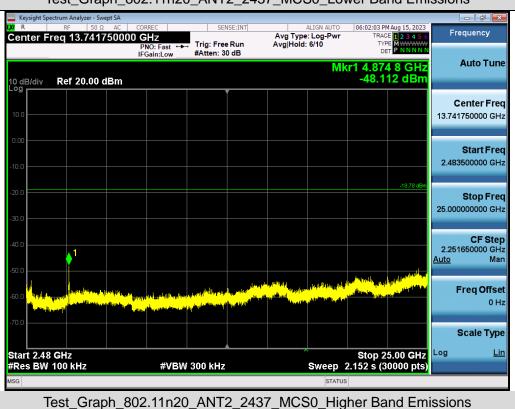









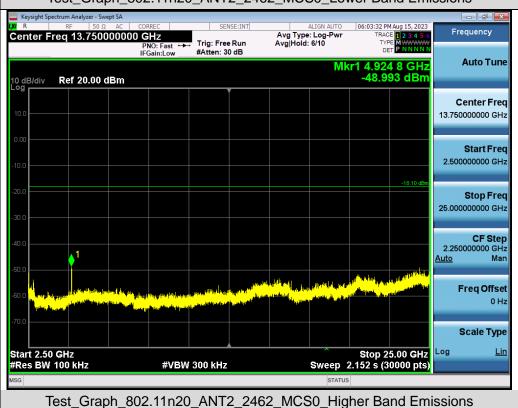








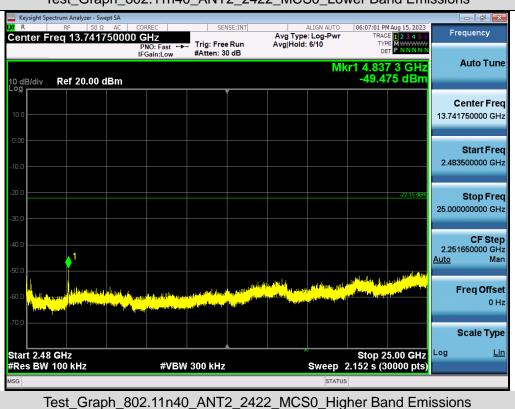
















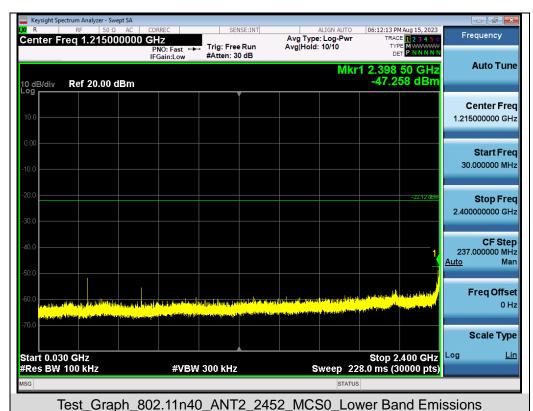










Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands

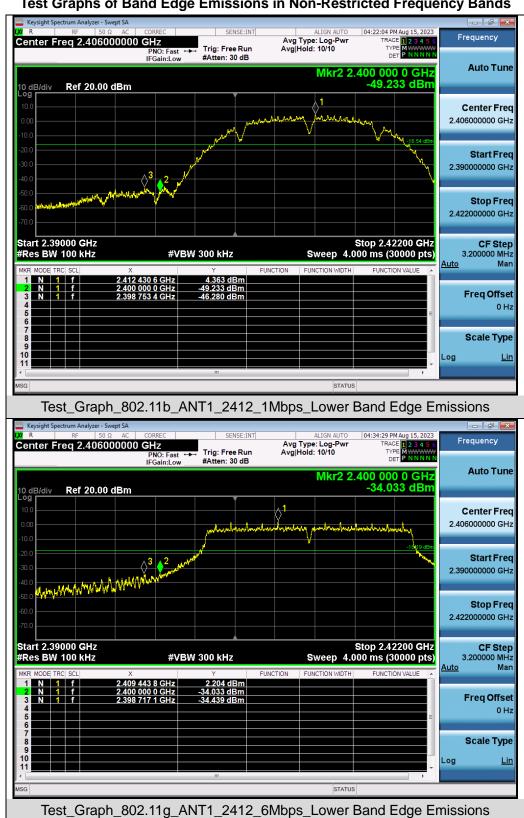






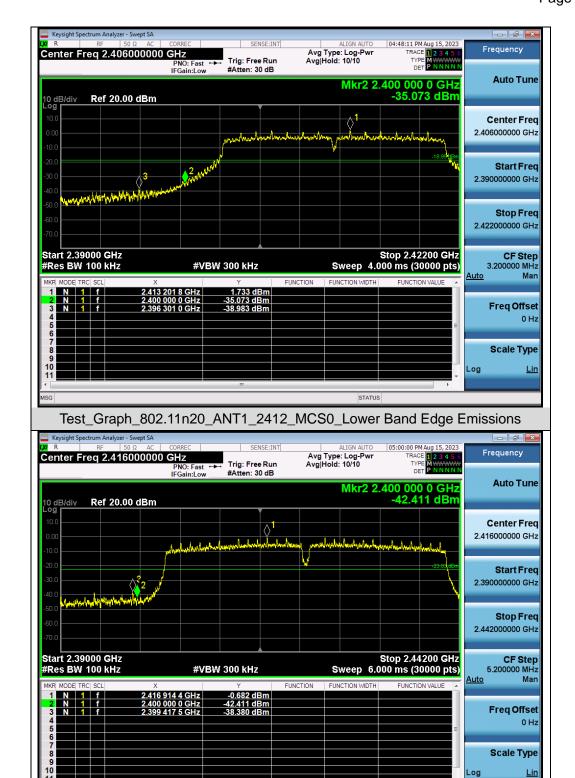


Test_Graph_802.11n40_ANT1_2422_MCS0_Lower Band Edge Emissions








Test_Graph_802.11g_ANT2_2412_6Mbps_Lower Band Edge Emissions





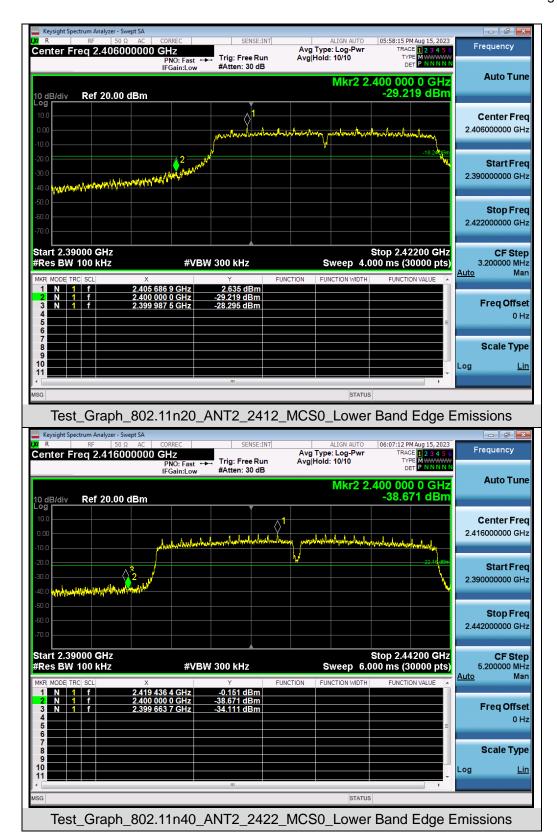

Note: Emissions from 2483.5-2500MHz which fall in the restricted bands had been considered with the radiated emission limits specified.



Page 75 of 118

10. POWER SPECTRAL DENSITY MEASUREMENT

10.1 MEASUREMENT LIMITS

According to Section 5.2(b) of the RSS-247 standard:

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

10.2 MEASUREMENT PROCEDURE


For Peak power spectral density test:

- The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
- 2. Connect EUT RF output port to the Spectrum Analyzer.
- 3. Set the RBW = 20 kHz.
- 4. Set the VBW \geq [3 × RBW].
- 5. Set the Span ≥ [1.5 × DTS bandwidth].
- Sweep time=Auto couple.
- 7. Detector function=Peak.
- 8. Trace Mode=Max hold.
- 9. When the measurement bandwidth of Maximum PSD is specified in 3 kHz, add a constant factor 10*log(3kHz/20kHz) = -8.23 dB to the measured result.
- 10. Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission.
- 11. The indicated level is the peak output power, after any corrections for cables.
- For Average power spectral density test:
- 1. The testing follows the ANSI C63.10 Section 11.10.5 Method AVPSD.
- 2. Connect EUT RF output port to the Spectrum Analyzer.
- 3. Set Span to at least 1.5 times the OBW.
- 4. Set RBW to:3 kHz ≤ RBW ≤ 100 kHz.
- 5. Set VBW≥[3×RBW].
- 6. Sweep Time=Auto couple.
- 7. Detector function=RMS (i.e., power averaging).
- 8. Trace average at least 100 traces in power averaging (rms) mode.
- 9. When the measurement bandwidth of Maximum PSD is specified in 3 kHz, add a constant factor 10*log(3kHz/20kHz) = -8.23 dB to the measured result.
- 10. Determine according to the duty cycle of the equipment: when it is less than 98%, follow the steps below.
- 11. Add [10 log (1 / D)], where D is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the ON and OFF times of the transmission). For example, add [10 log (1/0.25)] = 6 dB if the duty cycle is 25%.
- 12. Record the test results in the report.



Page 76 of 118

10.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

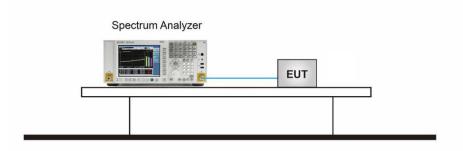

10.4 MEASUREMENT RESULT

TOTAL MEDICAL PROPERTY.	10.4 MEASUREMENT RESULT					
	Test Data of Conducted Output Power Spectral Density-ANT 1					
Test Mode	Test Channel (MHz)	Power density (dBm/20kHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail	
802.11b	2412	-1.555	-9.794	≪8	Pass	
	2437	-1.447	-9.686	≤8	Pass	
	2462	-0.569	-8.808	≪8	Pass	
802.11g	2412	-5.059	-13.298	≪8	Pass	
	2437	-4.932	-13.171	≤8	Pass	
	2462	-4.400	-12.639	≪8	Pass	
802.11n20	2412	-4.768	-13.007	≪8	Pass	
	2437	-4.606	-12.845	≤8	Pass	
	2462	-3.684	-11.923	≪8	Pass	
802.11n40	2422	-8.106	-16.345	≪8	Pass	
	2437	-7.429	-15.668	≪8	Pass	
	2452	-7.635	-15.874	≪8	Pass	




Page 77 of 118

Test Data of Conducted Output Power Spectral Density-ANT 2					
Test Mode	Test Channel (MHz)	Power density (dBm/20kHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail
802.11b	2412	-1.095	-9.334	≪8	Pass
	2437	-1.873	-10.112	≪8	Pass
	2462	-1.464	-9.703	≪8	Pass
802.11g	2412	-4.802	-13.041	≪8	Pass
	2437	-4.705	-12.944	≤8	Pass
	2462	-4.229	-12.468	≪8	Pass
802.11n20	2412	-4.056	-12.295	≪8	Pass
	2437	-3.937	-12.176	≪8	Pass
	2462	-3.835	-12.074	≪8	Pass
802.11n40	2422	-7.248	-15.487	≪8	Pass
	2437	-6.621	-14.860	≤8	Pass
	2452	-7.548	-15.787	≪8	Pass


Test Data of Conducted Output Power Spectral Density-MIMO					
Test Mode	Test Channel (MHz)	Power density (dBm/20kHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail
	2412	-1.387	-9.626	≤7.04	Pass
802.11n20	2437	-1.248	-9.487	≤7.04	Pass
	2462	-0.749	-8.988	€7.04	Pass
	2422	-4.646	-12.885	€7.04	Pass
802.11n40	2437	-3.996	-12.235	€7.04	Pass
	2452	-4.581	-12.820	€7.04	Pass


Note: Power density(dBm/3kHz) = Power density(dBm/20kHz) - 10*log(20/3).





Test Graphs of Conducted Output Power Spectral Density

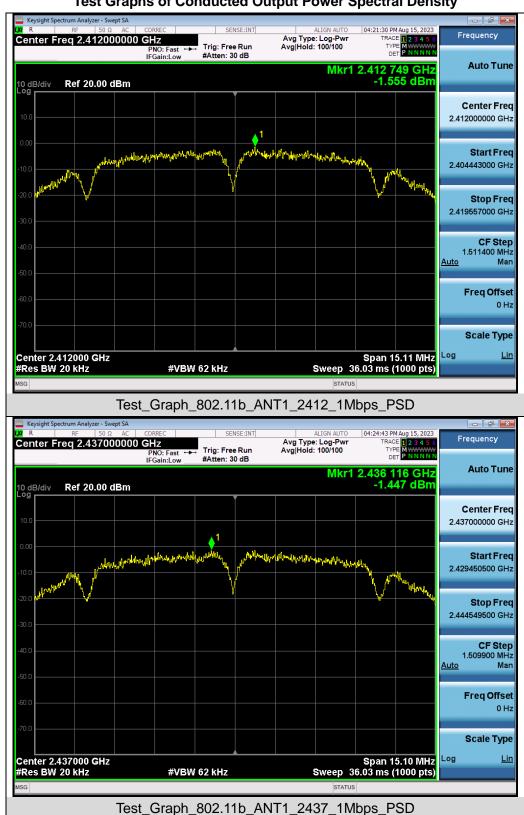




Freq Offset 0 Hz

Scale Type

Log

Span 24.05 MHz Sweep 57.34 ms (1000 pts)



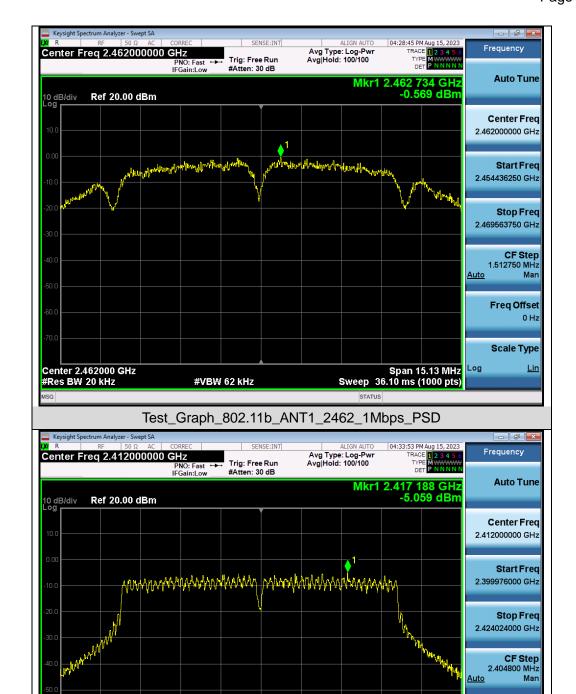


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Test_Graph_802.11g_ANT1_2412_6Mbps_PSD

#VBW 62 kHz

Center 2.41200 GHz #Res BW 20 kHz





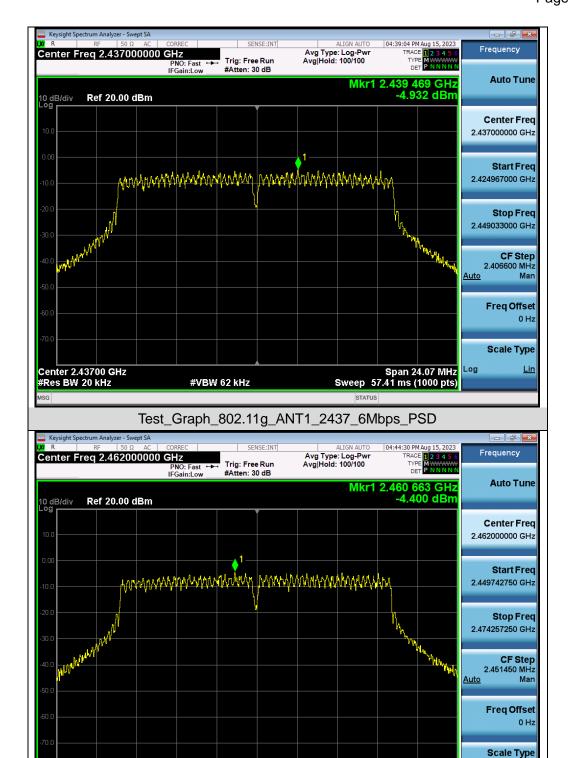


Test_Graph_802.11g_ANT1_2462_6Mbps_PSD

#VBW 62 kHz

Span 24.51 MHz Sweep 58.47 ms (1000 pts)

Log

Center 2.46200 GHz #Res BW 20 kHz




Freq Offset 0 Hz

Scale Type

Log

Span 26.34 MHz Sweep 62.80 ms (1000 pts)



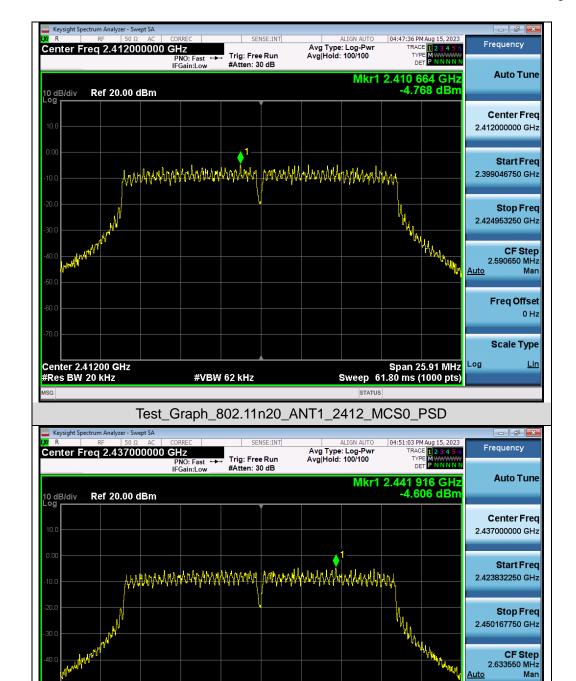


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11n20_ANT1_2437_MCS0_PSD

#VBW 62 kHz

Center 2.43700 GHz #Res BW 20 kHz




Freq Offset 0 Hz

Scale Type

Log

Span 52.67 MHz Sweep 125.5 ms (1000 pts)



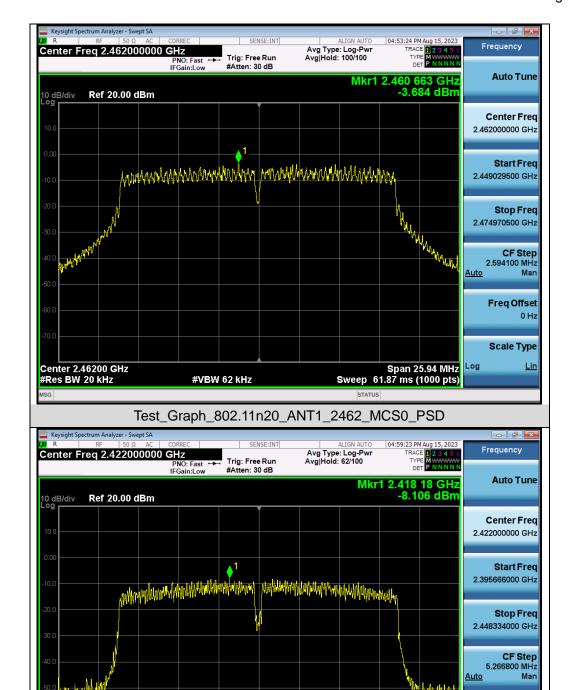


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11n40_ANT1_2422_MCS0_PSD

#VBW 62 kHz

Center 2.42200 GHz #Res BW 20 kHz




0 Hz

Scale Type

Log

Span 52.65 MHz Sweep 125.5 ms (1000 pts)



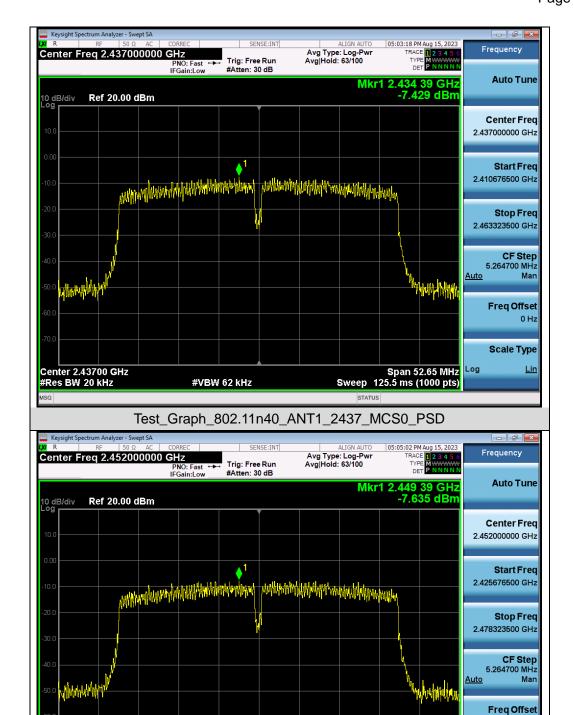


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11n40_ANT1_2452_MCS0_PSD

#VBW 62 kHz

Center 2.45200 GHz #Res BW 20 kHz




Freq Offset

Scale Type

Log

Span 15.10 MHz Sweep 36.03 ms (1000 pts)



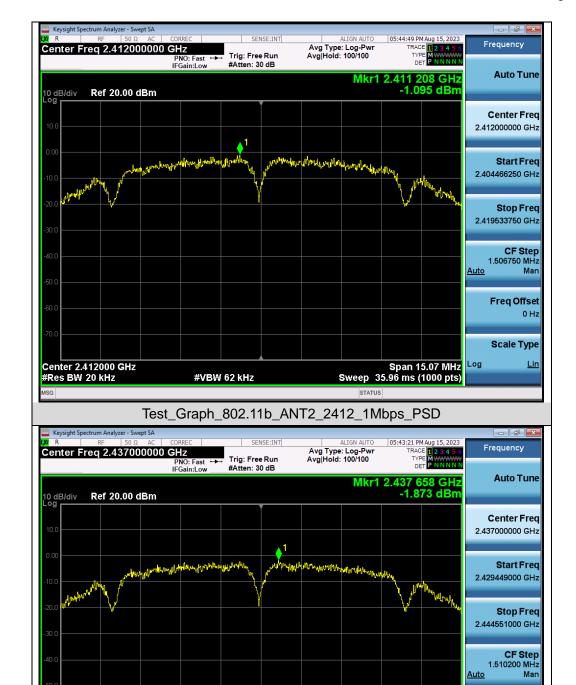


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11b_ANT2_2437_1Mbps_PSD

#VBW 62 kHz

Center 2.437000 GHz #Res BW 20 kHz




Scale Type

Log

Span 24.44 MHz Sweep 58.28 ms (1000 pts)



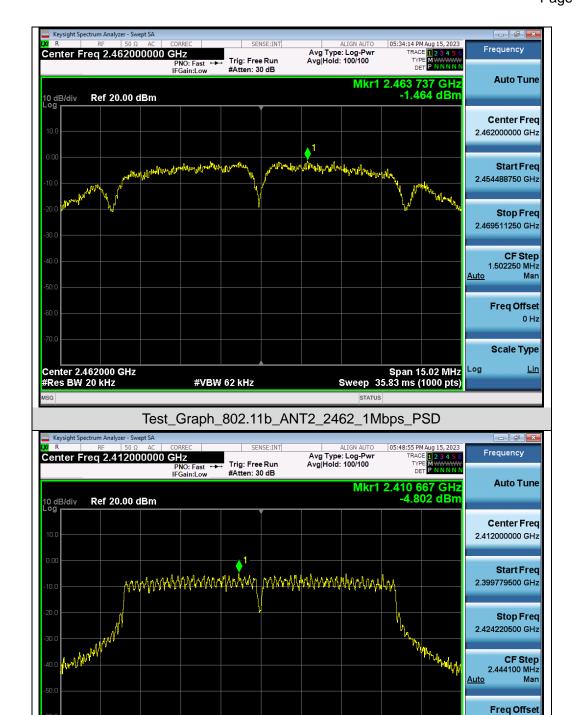


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11g_ANT2_2412_6Mbps_PSD

#VBW 62 kHz

Center 2.41200 GHz #Res BW 20 kHz



CF Step 2.426400 MHz

Freq Offset

Scale Type


Mar

<u>Auto</u>

Log

Span 24.26 MHz Sweep 57.88 ms (1000 pts)



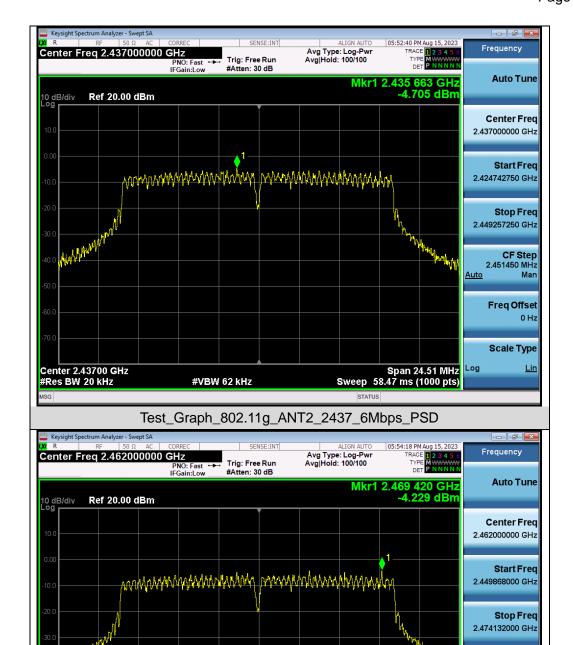


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Test_Graph_802.11g_ANT2_2462_6Mbps_PSD


#VBW 62 kHz


Center 2.46200 GHz #Res BW 20 kHz





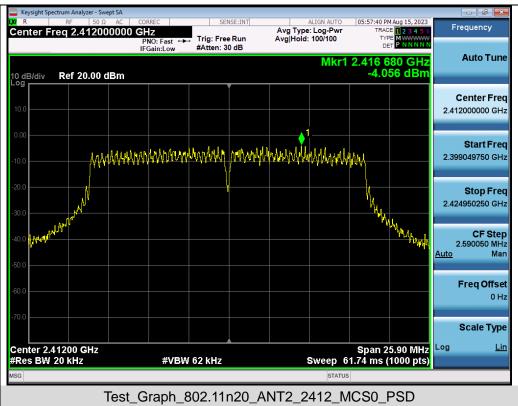

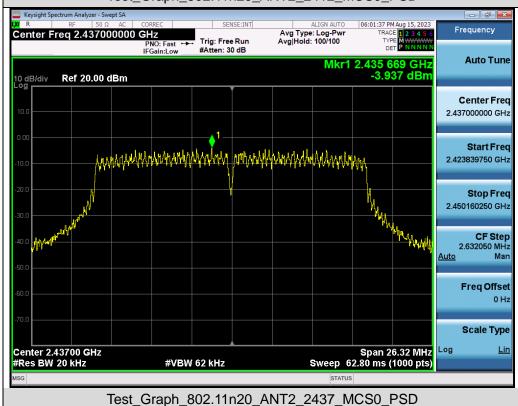




Freq Offset 0 Hz

Scale Type

Log

Span 52.63 MHz Sweep 125.5 ms (1000 pts)



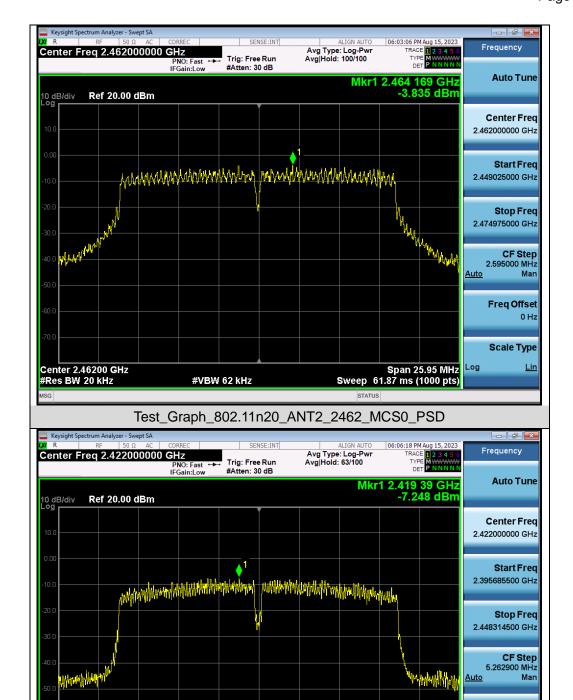


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11n40_ANT2_2422_MCS0_PSD

#VBW 62 kHz

Center 2.42200 GHz #Res BW 20 kHz



CF Step 5.264850 MHz

Freq Offset 0 Hz

Scale Type


Mar

<u>Auto</u>

Log

Span 52.65 MHz Sweep 125.5 ms (1000 pts)



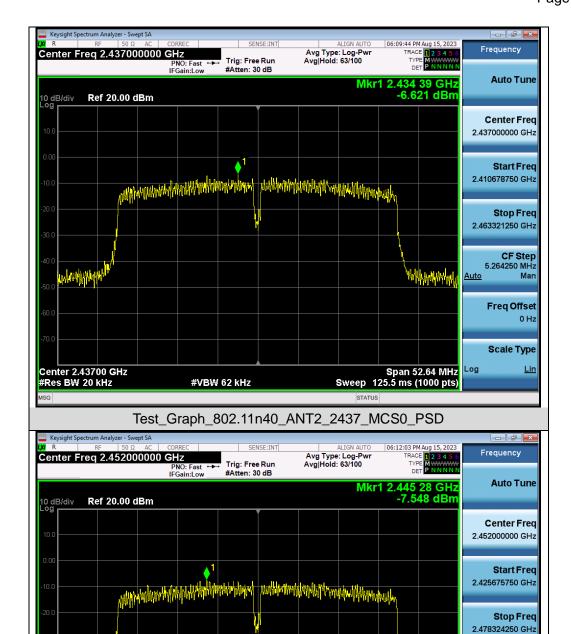

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11n40_ANT2_2452_MCS0_PSD

#VBW 62 kHz

Center 2.45200 GHz #Res BW 20 kHz



Page 90 of 118

11. RADIATED EMISSION


11.1. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.




11.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

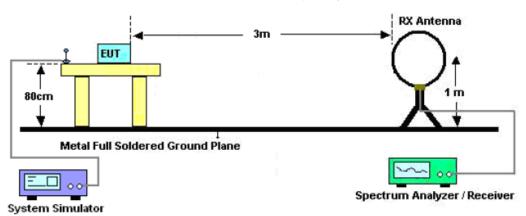

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

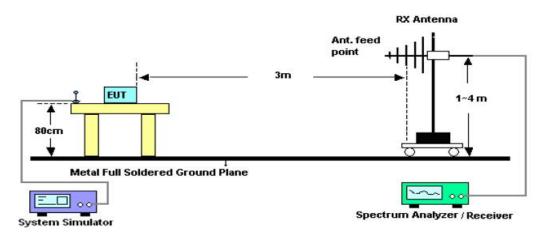

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

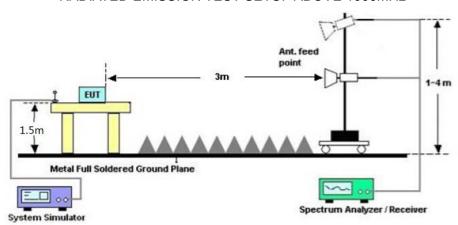

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Page 92 of 118

11.3. LIMITS AND MEASUREMENT RESULT

15.209(a) Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3


Note: All modes were tested for restricted band radiated emission.

the test records reported below are the worst result compared to other modes.

11.4. TEST RESULT

Radiated emission below 30MHz


The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.






Radiated emission from 30MHz to 1000MHz

EUT	Network Video Recorder	Model Name	RLN12W
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with date rate 1 2452MHz	Antenna	Horizontal

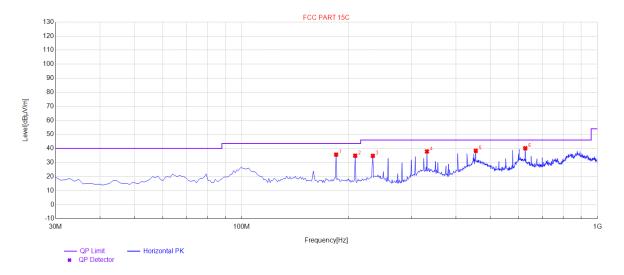


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	184.23	35.65	13.00	43.50	7.85	100	360	Horizontal
2	208.48	34.87	13.53	43.50	8.63	100	350	Horizontal
3	233.7	34.78	16.46	46.00	11.22	100	300	Horizontal
4	331.67	37.92	21.05	46.00	8.08	100	230	Horizontal
5	454.86	38.35	26.84	46.00	7.65	100	150	Horizontal
6	626.55	40.16	27.16	46.00	5.84	100	340	Horizontal

RESULT: PASS





EUT	Network Video Recorder	Model Name	RLN12W
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with date rate 1 2452MHz	Antenna	Vertical

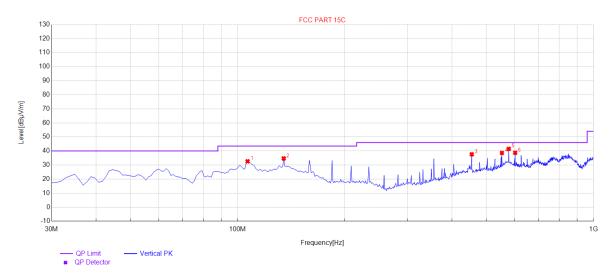

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	106.63	32.64	14.39	43.50	10.86	100	120	Vertical
2	134.76	34.69	19.23	43.50	8.81	100	140	Vertical
3	454.86	37.64	21.45	46.00	8.36	100	250	Vertical
4	552.83	38.62	25.02	46.00	7.38	100	250	Vertical
5	578.05	41.54	25.62	46.00	4.46	100	10	Vertical
6	602.3	38.74	25.81	46.00	7.26	100	80	Vertical

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

- 2. The "Factor" value can be calculated automatically by software of measurement system.
- 3. All test modes had been pre-tested. The antenna 1+antenna 2 of 802.11n40 at high channel is the worst case and recorded in the report.



Report No.: AGC11034230801FR01

Page 95 of 118


Radiated emission above 1GHz

EUT	Network Video Recorder	Model Name	RLN12W
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with date rate 1 2422MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.000	52.36	0.08	52.44	74.00	-21.56	peak
4824.000	43.59	0.08	43.67	54.00	-10.33	AVG
7236.000	48.64	2.21	50.85	74.00	-23.15	peak
7236.000	40.25	2.21	42.46	54.00	-11.54	AVG
temark:						
actor = Anter	nna Factor + Cable	<u> Loss – Pre-</u>	amplifier.			

EUT	Network Video Recorder	Model Name	RLN12W
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with date rate 1 2422MHz	Antenna	Vertical

		Emission Level	Limits	Margin	Value Type
(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
53.26	0.08	53.34	74.00	-20.66	peak
42.15	0.08	42.23	54.00	-11.77	AVG
49.67	2.21	51.88	74.00	-22.12	peak
40.35	2.21	42.56	54.00	-11.44	AVG
	53.26 42.15 49.67	53.26 0.08 42.15 0.08 49.67 2.21	53.26 0.08 53.34 42.15 0.08 42.23 49.67 2.21 51.88	53.26 0.08 53.34 74.00 42.15 0.08 42.23 54.00 49.67 2.21 51.88 74.00	53.26 0.08 53.34 74.00 -20.66 42.15 0.08 42.23 54.00 -11.77 49.67 2.21 51.88 74.00 -22.12





EUT	Network Video Recorder	Model Name	RLN12W
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with date rate 1 2437MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type				
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type				
4874.000	51.28	0.14	51.42	74.00	-22.58	peak				
4874.000	42.46	0.14	42.60	54.00	-11.40	AVG				
7311.000	47.52	2.36	49.88	74.00	-24.12	peak				
7311.000	39.64	2.36	42.00	54.00	-12.00	AVG				
Remark:										
Factor = Anter	na Factor + Cabl	e Loss – Pre-a	amplifier.							

EUT	Network Video Recorder	Model Name	RLN12W
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with date rate 1 2437MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4874.000	53.16	0.14	53.30	74.00	-20.70	peak
4874.000	42.51	0.14	42.65	54.00	-11.35	AVG
7311.000	48.61	2.36	50.97	74.00	-23.03	peak
7311.000	38.75	2.36	41.11	54.00	-12.89	AVG
Remark:						
actor = Anter	na Factor + Cabl	e Loss – Pre-	amplifier.			



Report No.: AGC11034230801FR01

Page 97 of 118

EUT	Network Video Recorder	Model Name	RLN12W
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with date rate 1 2452MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type	
4924.000	53.24	0.22	53.46	74.00	-20.54	peak	
4924.000	44.26	0.22	44.48	54.00	-9.52	AVG	
7386.000	49.61	2.64	52.25	74.00	-21.75	peak	
7386.000	38.51	2.64	41.15	54.00	-12.85	AVG	
Remark:							
Factor = Anter	Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

EUT	Network Video Recorder	Model Name	RLN12W
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n with date rate 1 2452MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Time
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4924.000	53.14	0.22	53.36	74.00	-20.64	peak
4924.000	42.64	0.22	42.86	54.00	-11.14	AVG
7386.000	45.31	2.64	47.95	74.00	-26.05	peak
7386.000	36.24	2.64	38.88	54.00	-15.12	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

RESULT: PASS

Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

All test modes had been pre-tested. The antenna 1+antenna 2 of 802.11n40 mode is the worst case and recorded in the report.




Test result for band edge emission at restricted bands

EUT	Network Video Recorder	Model Name	RLN12W
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHz	Antenna	Horizontal


Test Graph for Peak Measurement



Test Graph for Average Measurement

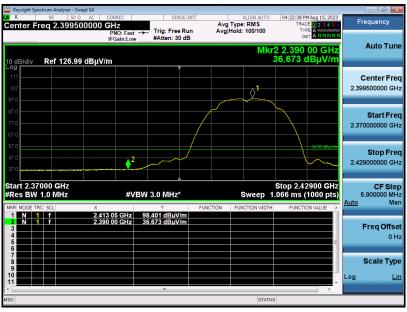

RESULT: PASS







EUT	Network Video Recorder	Model Name	RLN12W
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

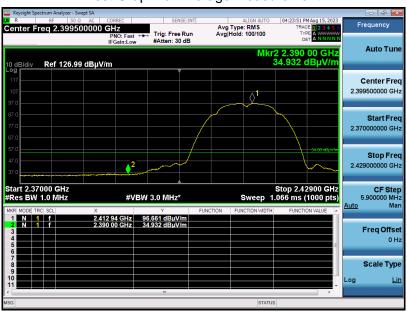






EUT	Network Video Recorder	Model Name	RLN12W
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement








EUT	Network Video Recorder	Model Name	RLN12W
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement









EUT	Network Video Recorder	Model Name	RLN12W
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2412MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

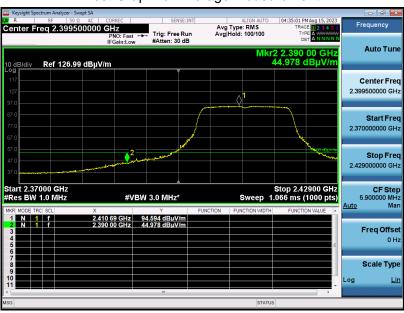







EUT	Network Video Recorder	Model Name	RLN12W
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2412MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

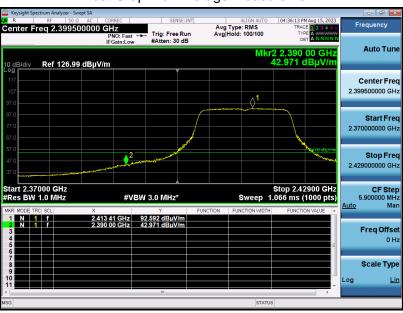






EUT	Network Video Recorder	Model Name	RLN12W
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2462MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement








EUT	Network Video Recorder	Model Name	RLN12W
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2462MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement









EUT	Network Video Recorder	Model Name	RLN12W
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2412MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

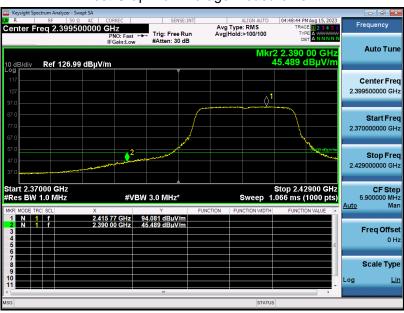







EUT	Network Video Recorder	Model Name	RLN12W
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2412MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

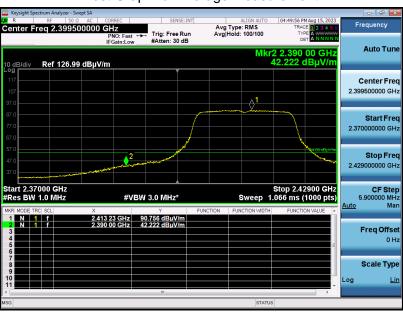






EUT	Network Video Recorder	Model Name	RLN12W
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2462MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement








EUT	Network Video Recorder	Model Name	RLN12W
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2462MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement










EUT	Network Video Recorder	Model Name	RLN12W
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with data rate 13.5 2422MHz	Antenna	Horizontal

Test Graph for Peak Measurement

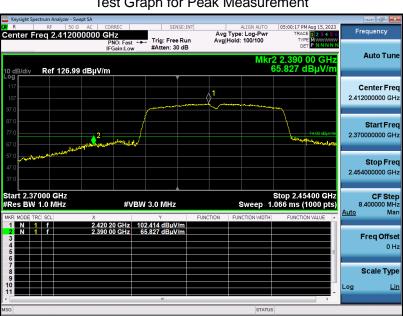

Test Graph for Average Measurement

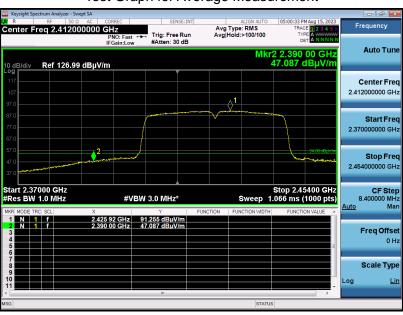






EUT	Network Video Recorder	Model Name	RLN12W
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with data rate 13.5 2422MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement








EUT	Network Video Recorder	Model Name	RLN12W
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with data rate 13.5 2452MHz	Antenna	Horizontal

Test Graph for Peak Measurement

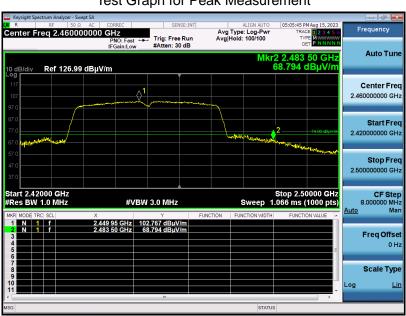

Test Graph for Average Measurement

