



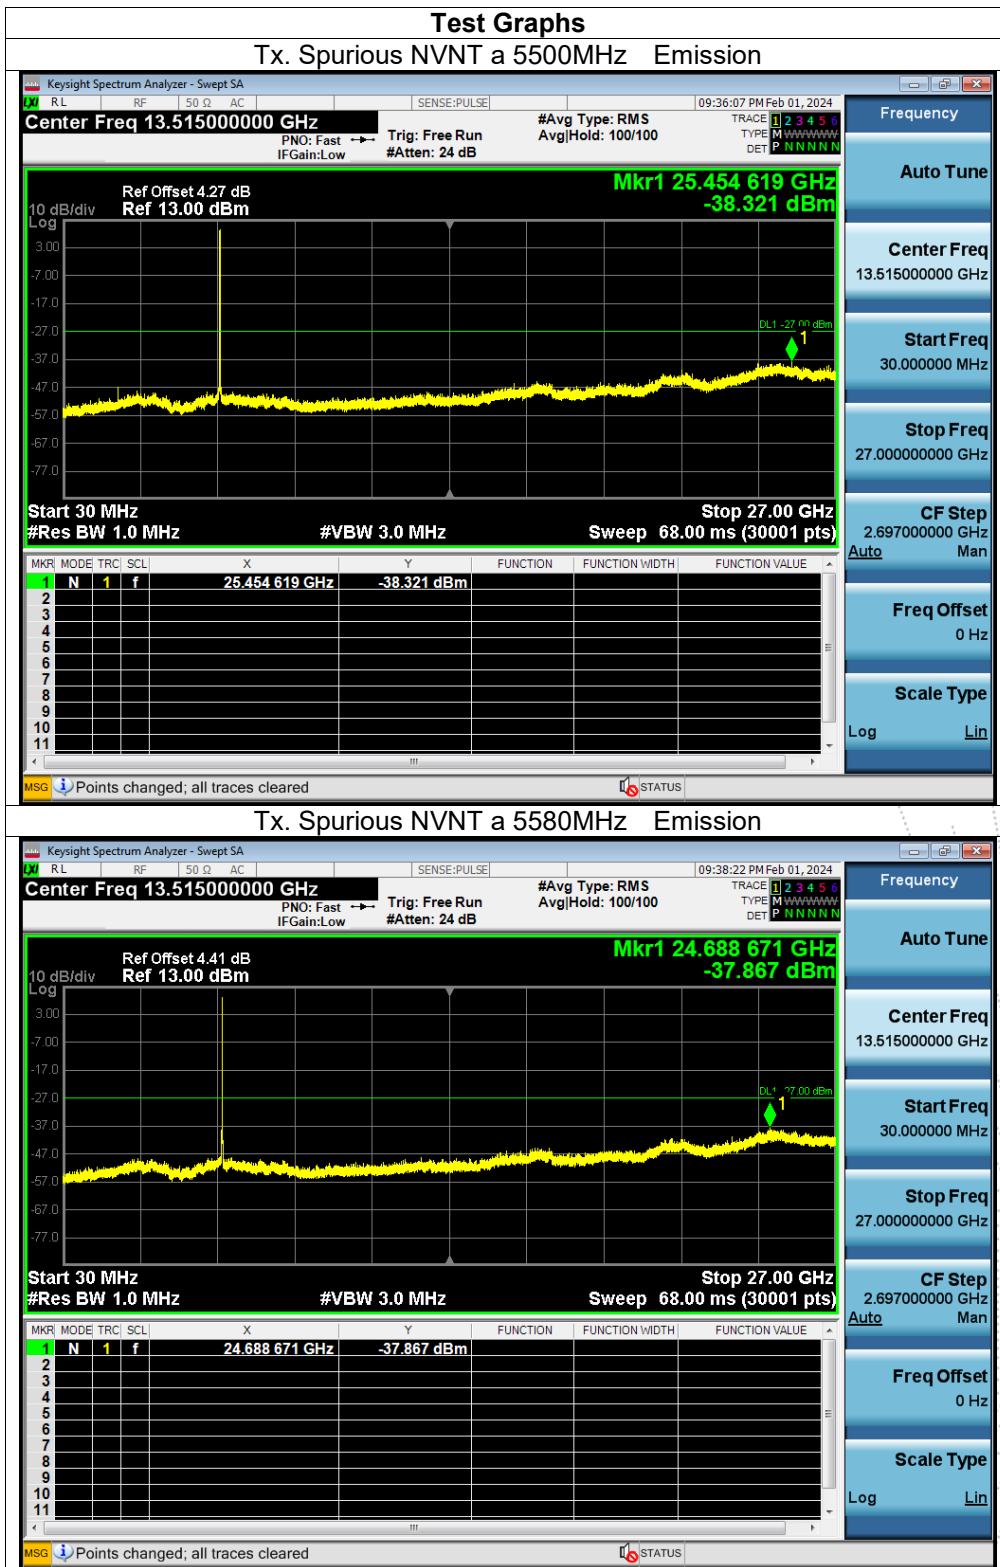
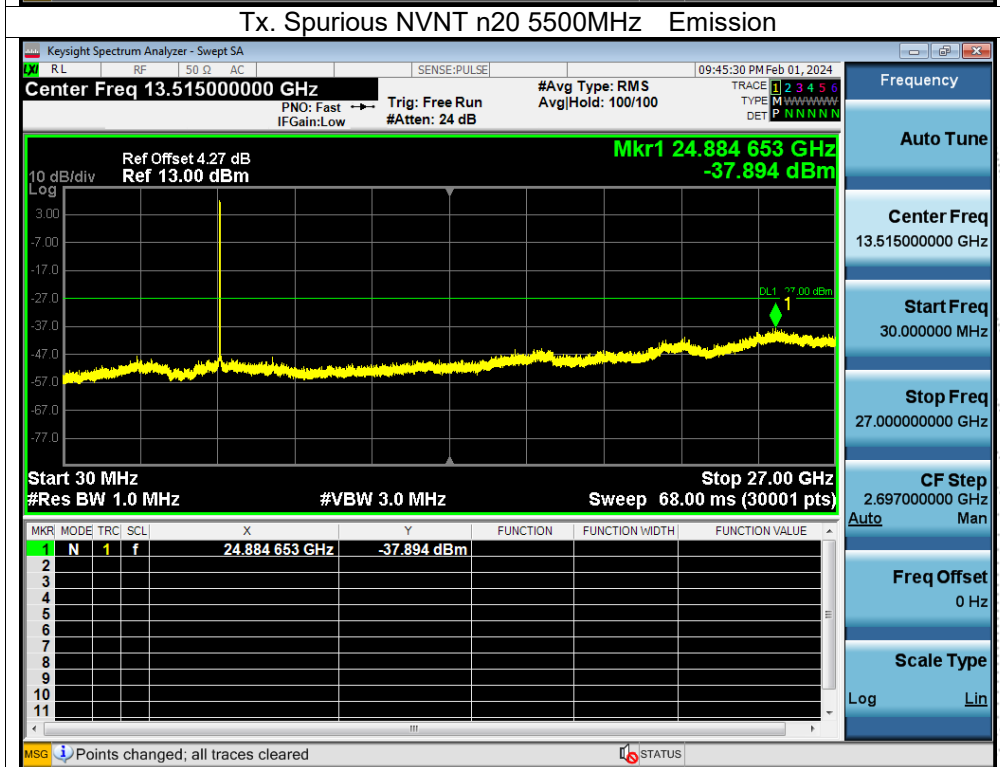
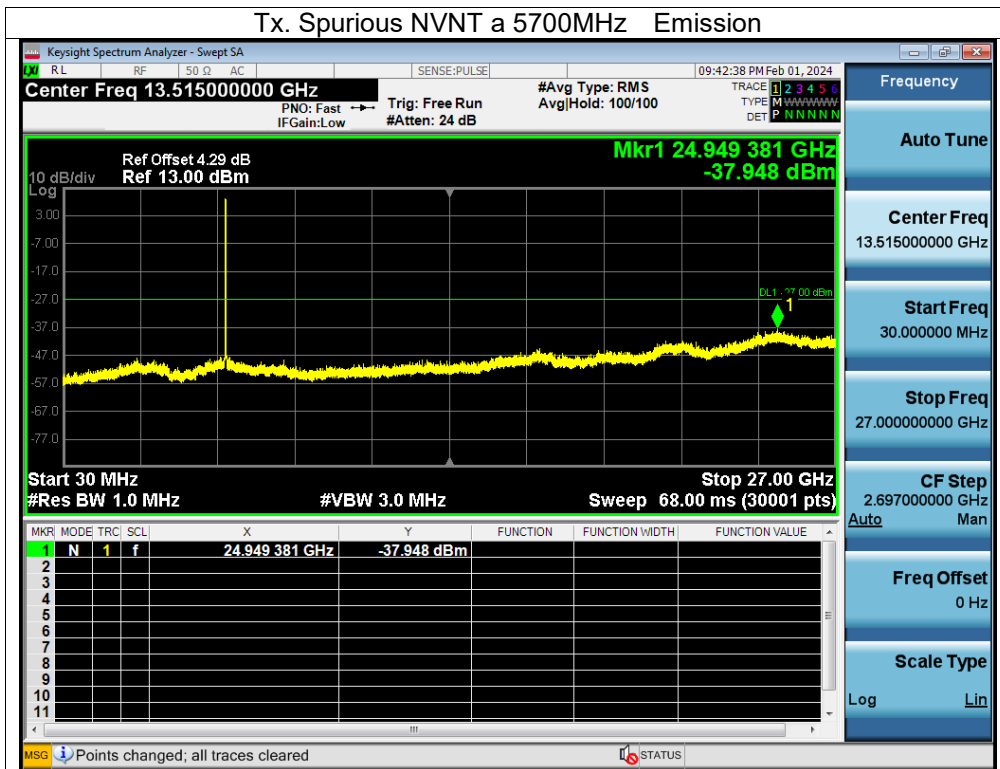




Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A.
 Antenna A: 5500-5700MHz


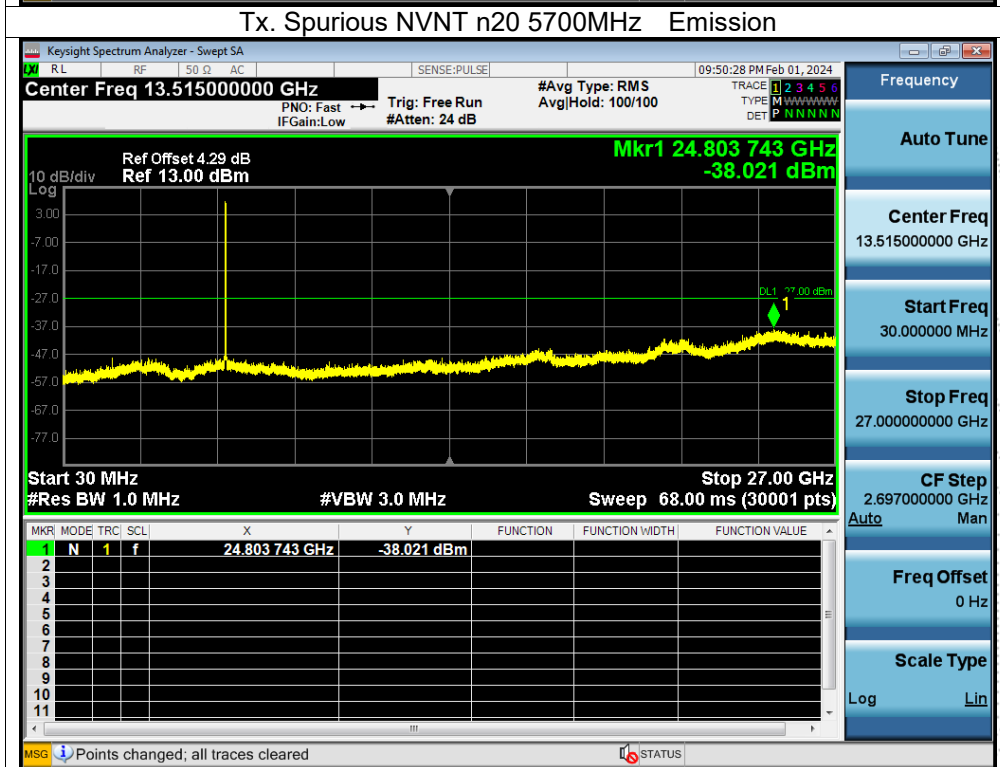



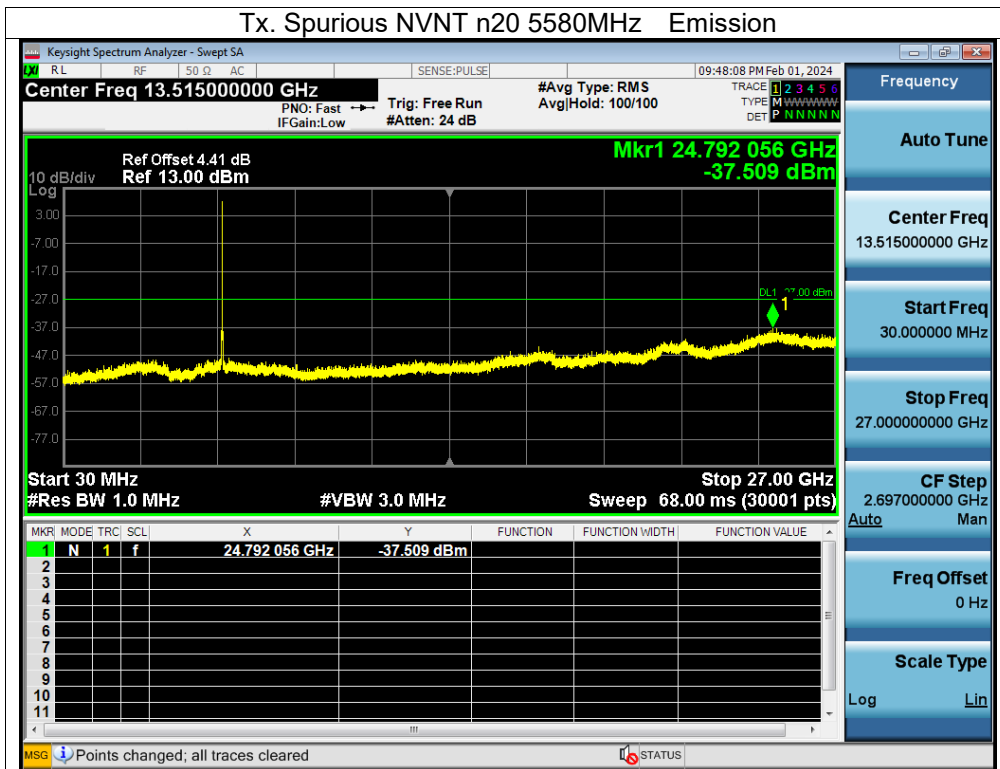



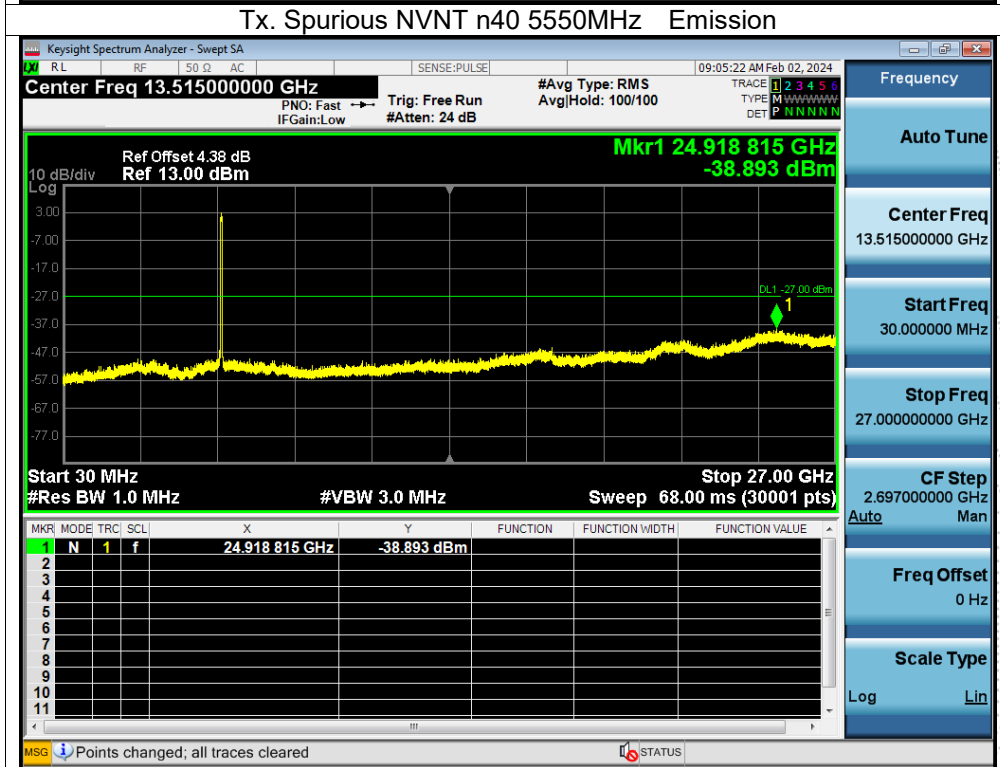



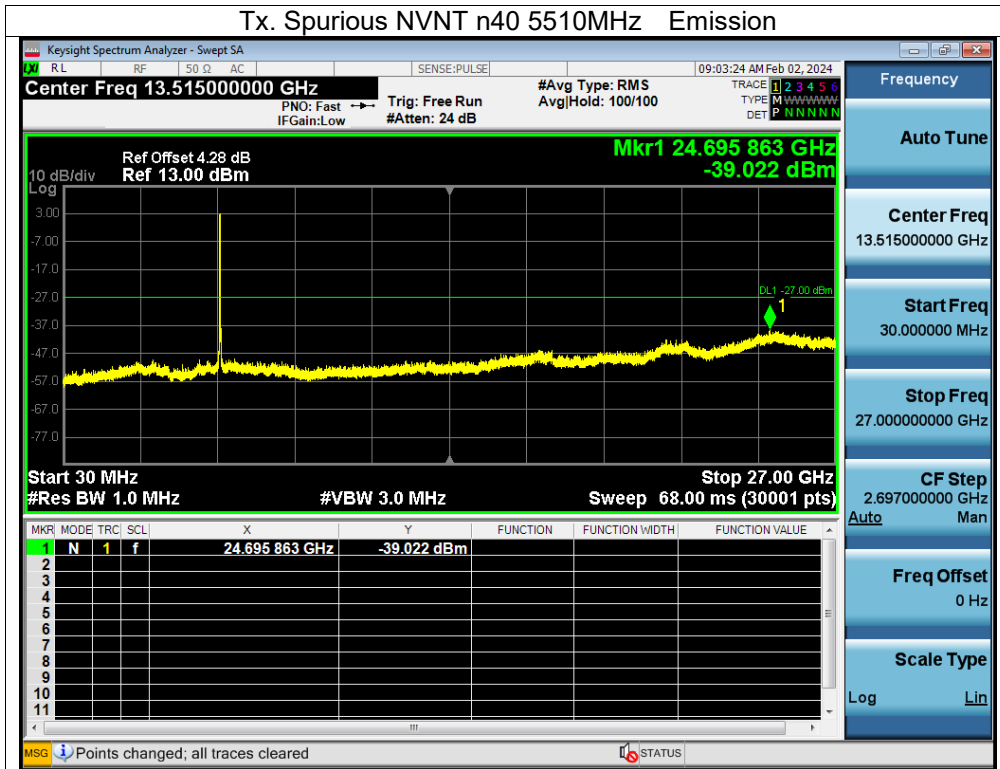


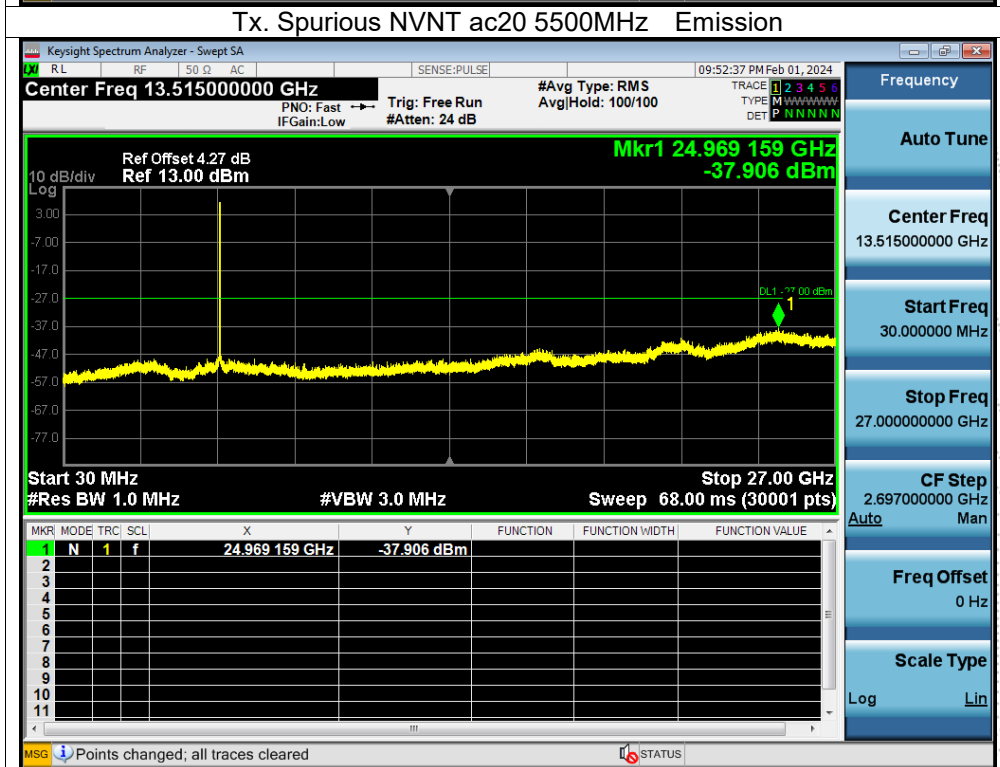
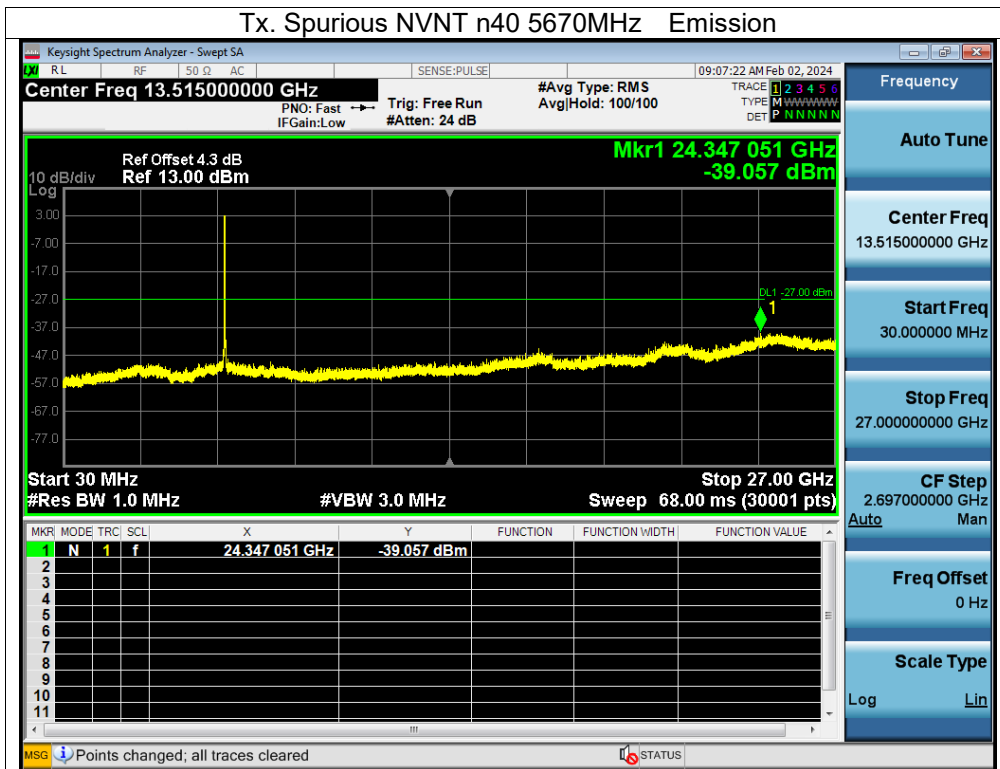


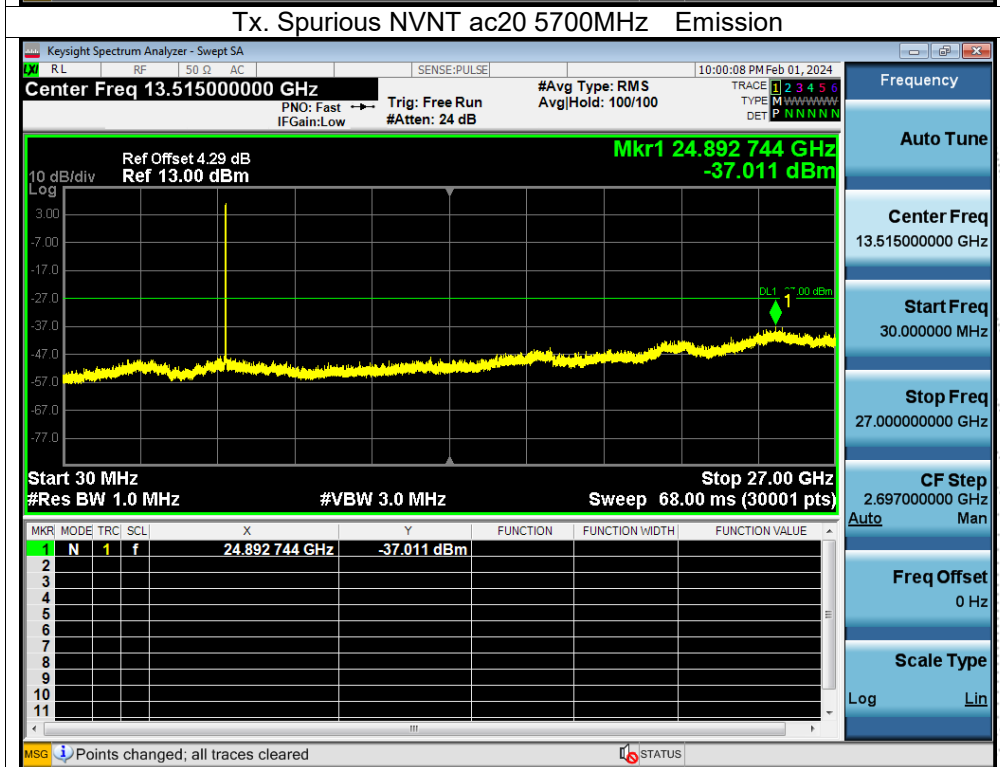
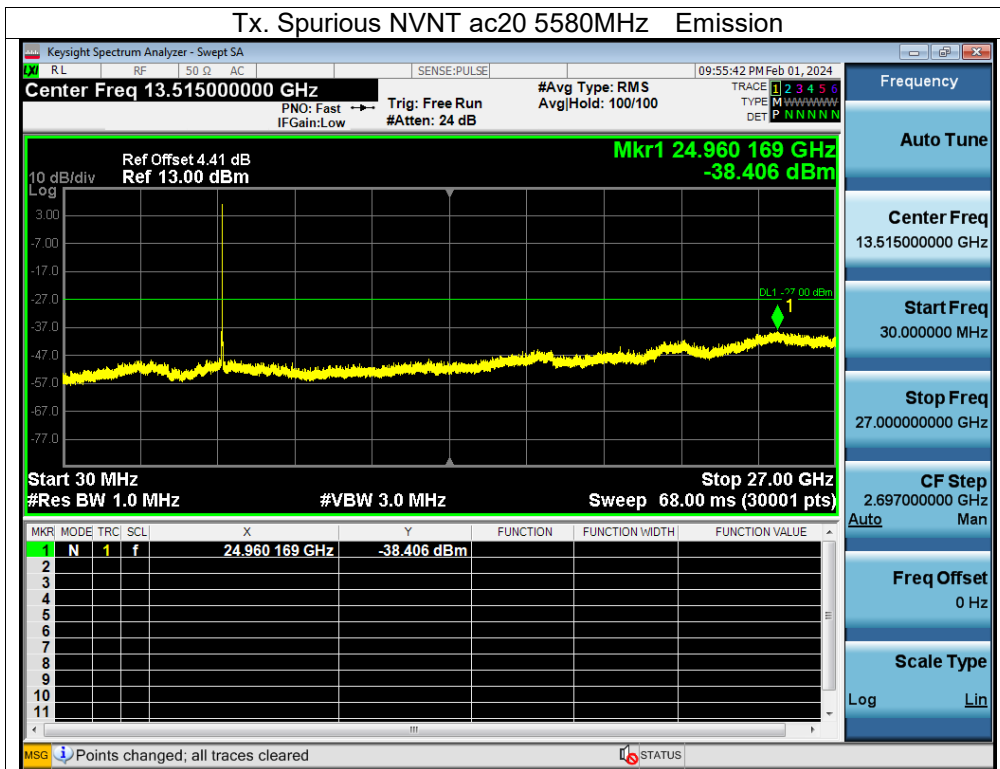


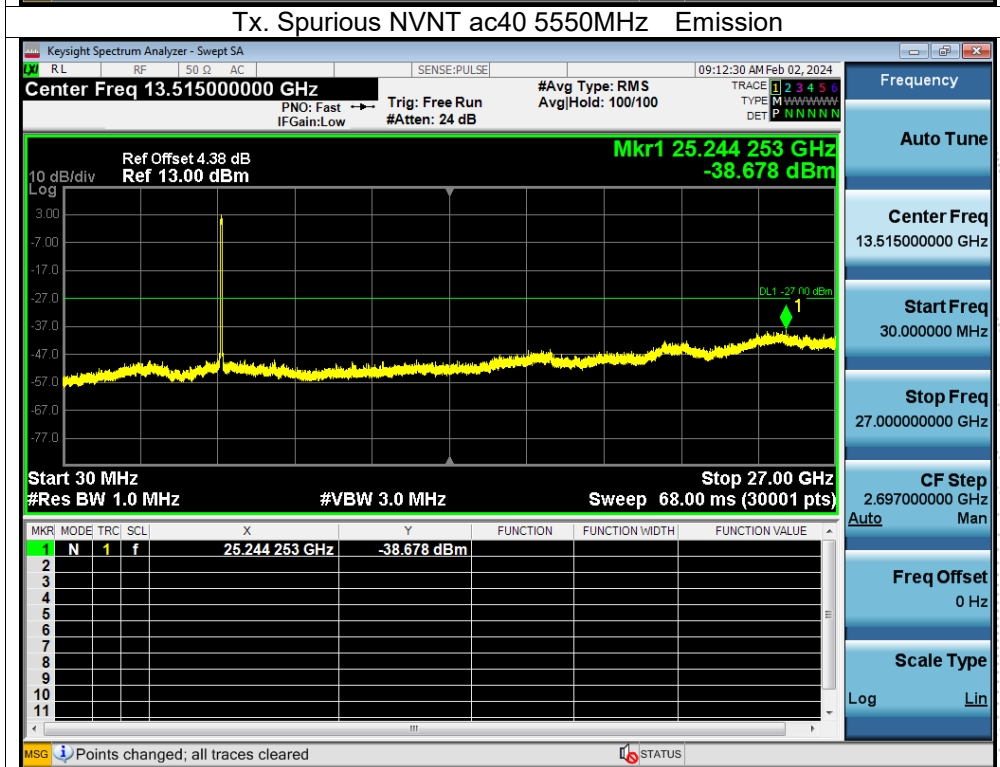
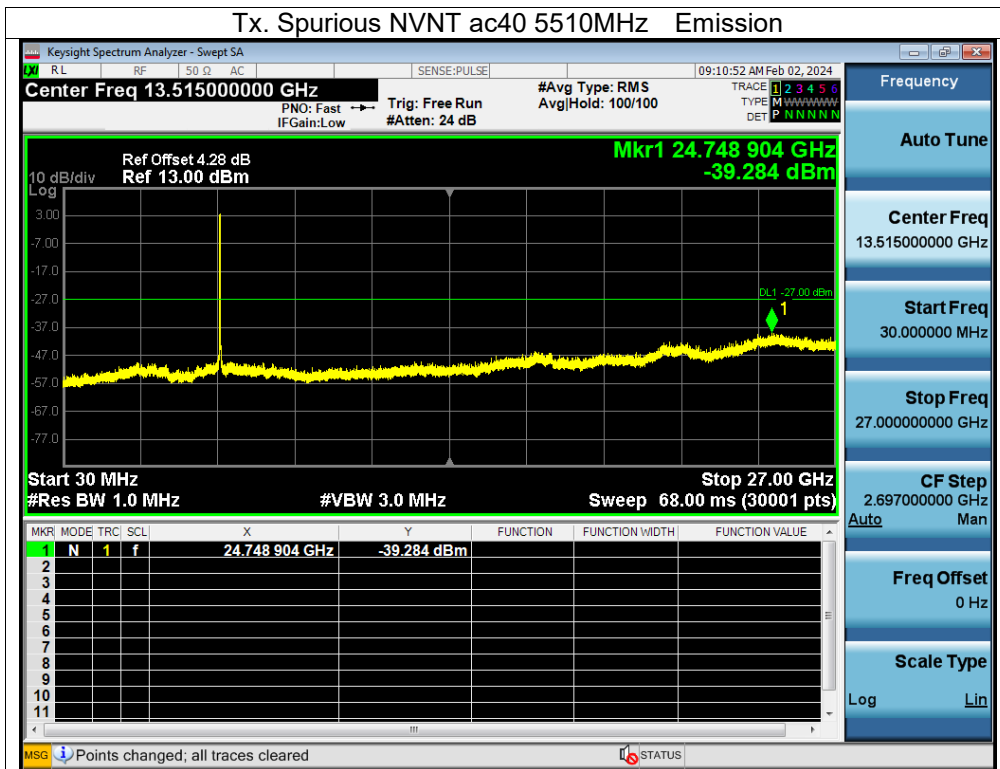


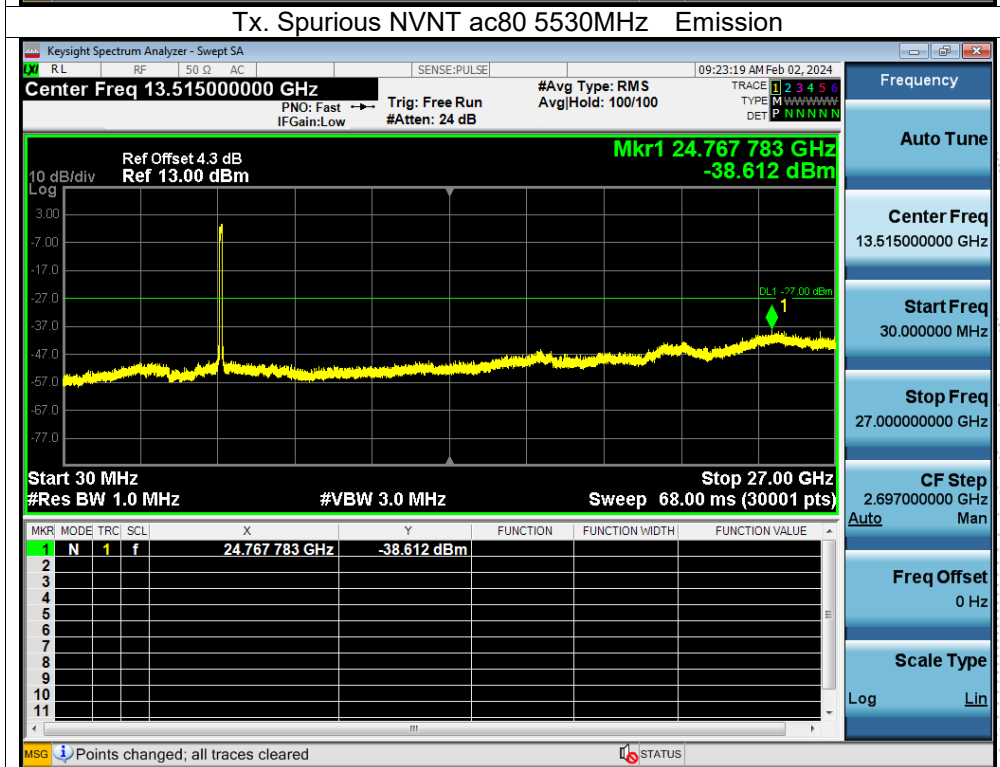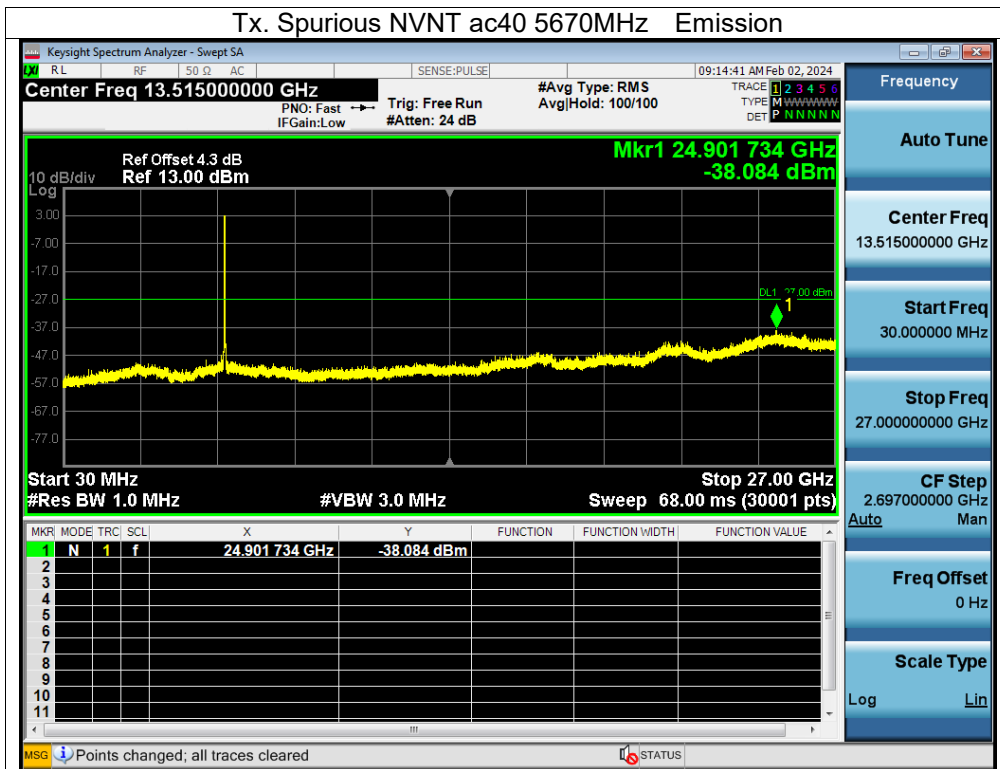

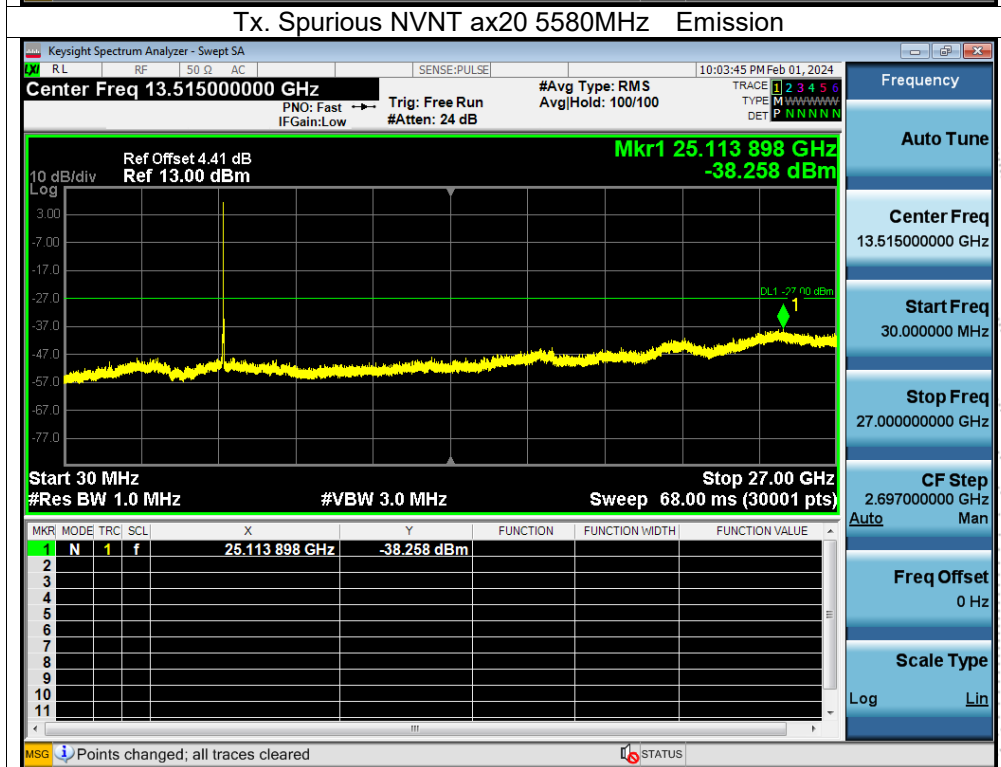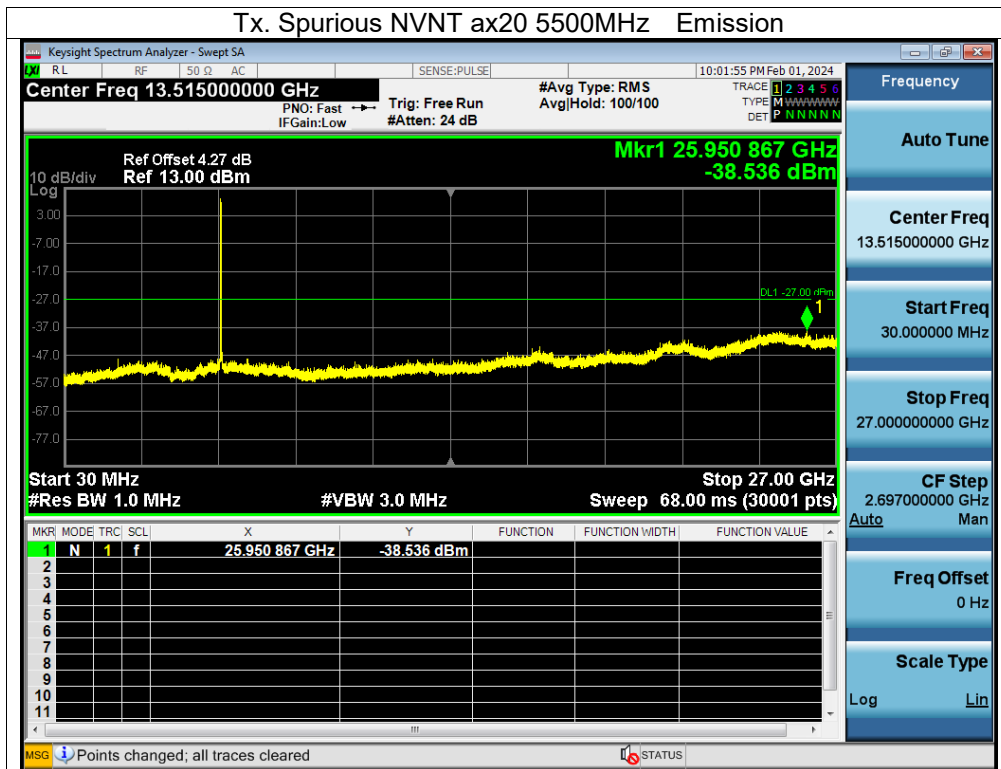

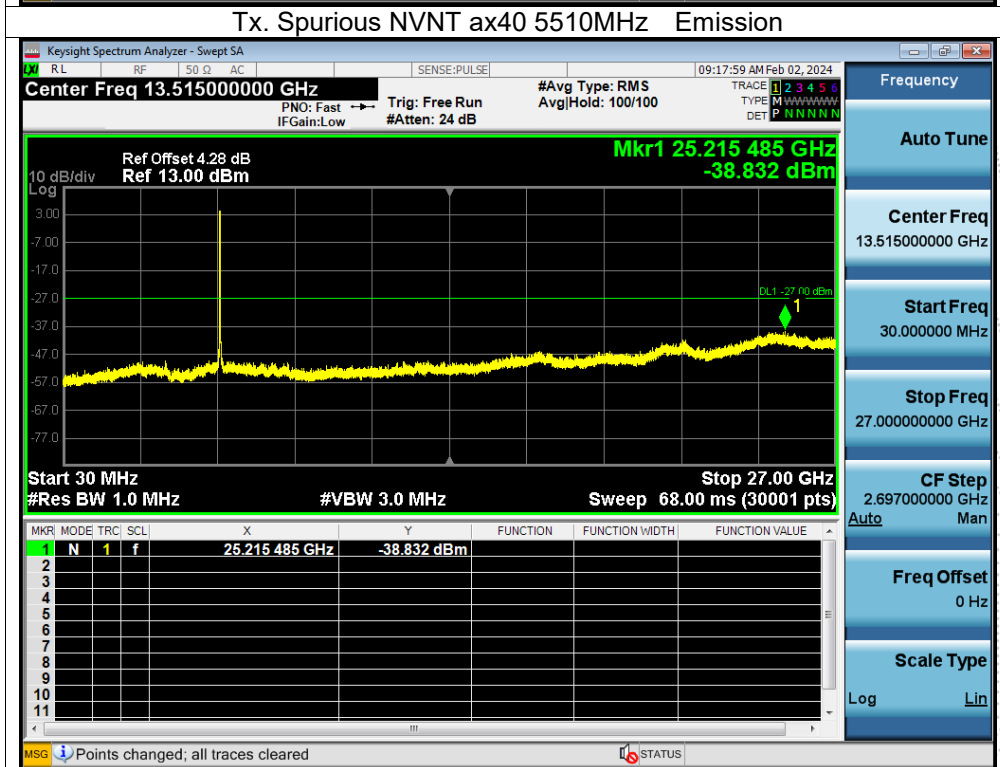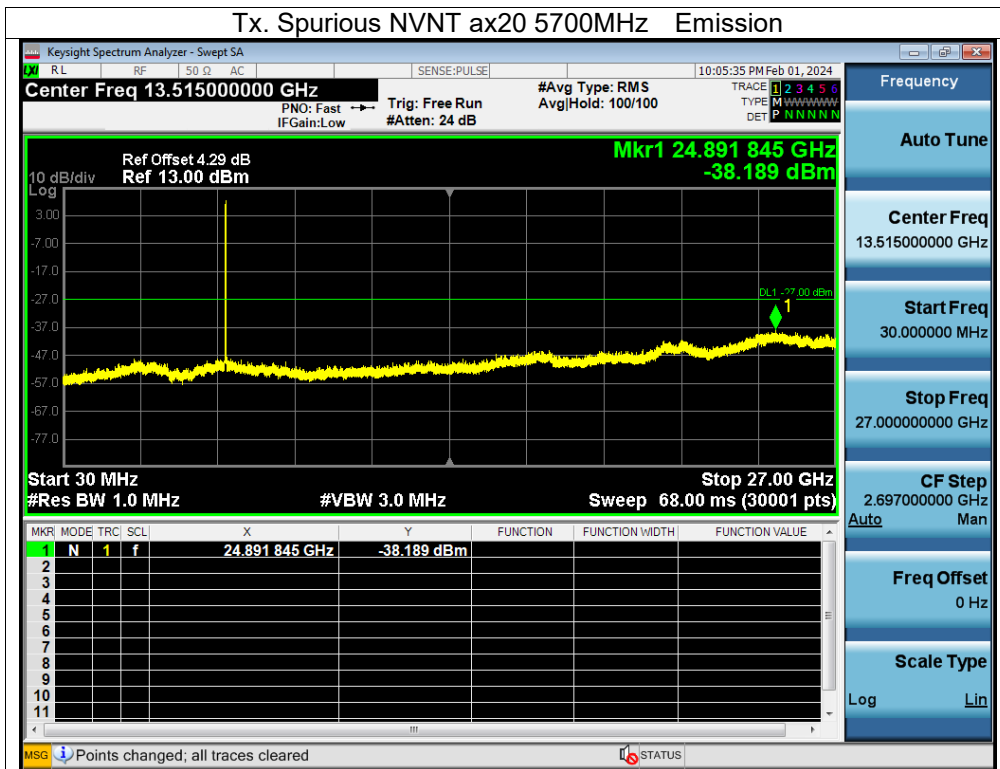

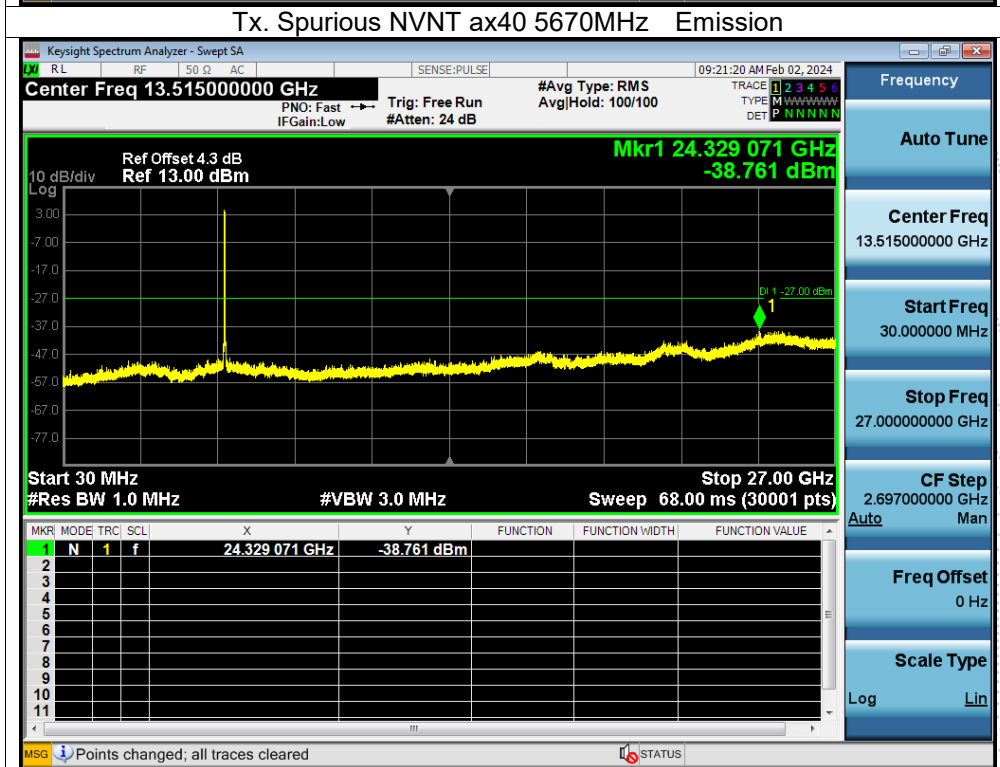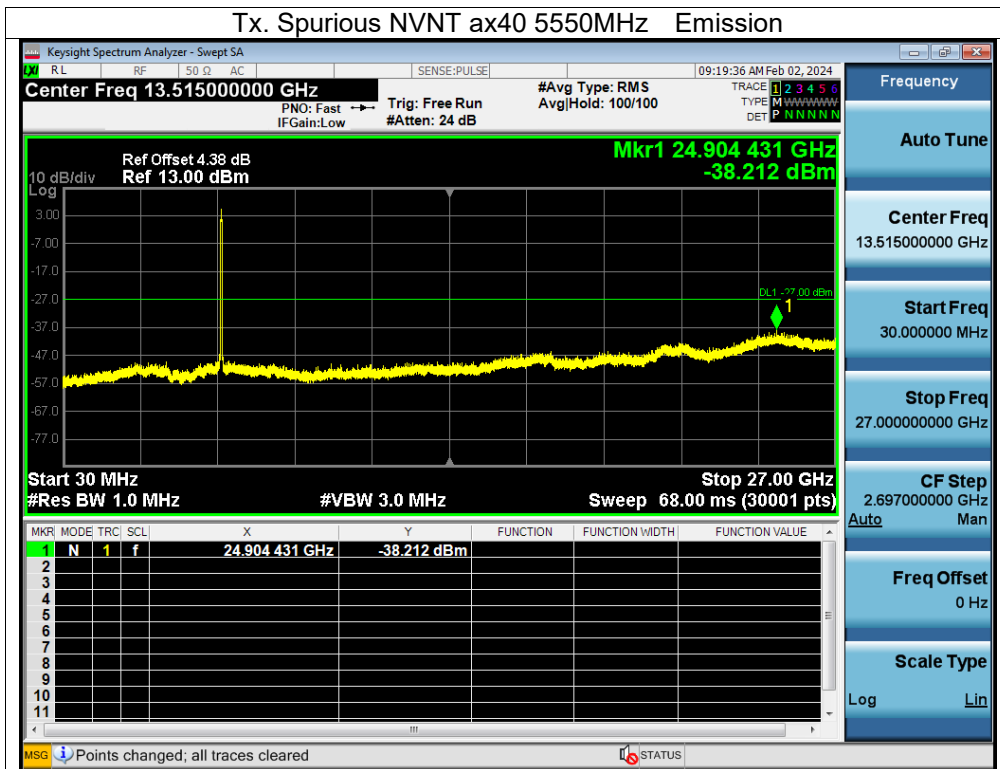

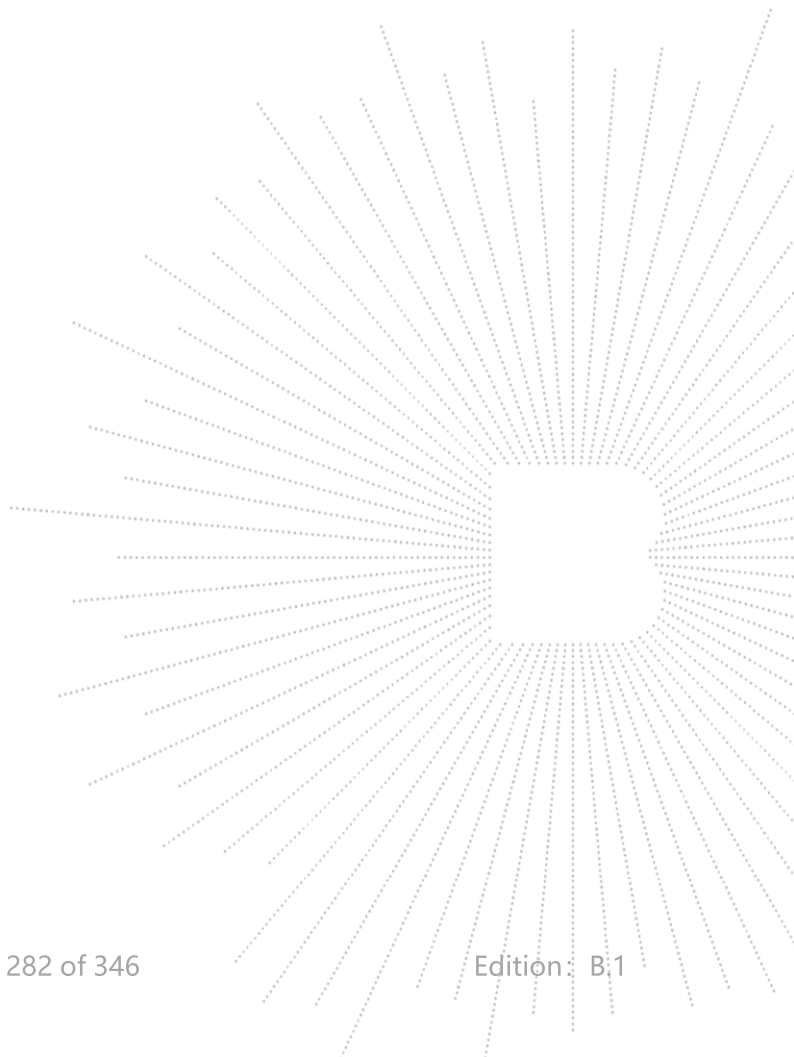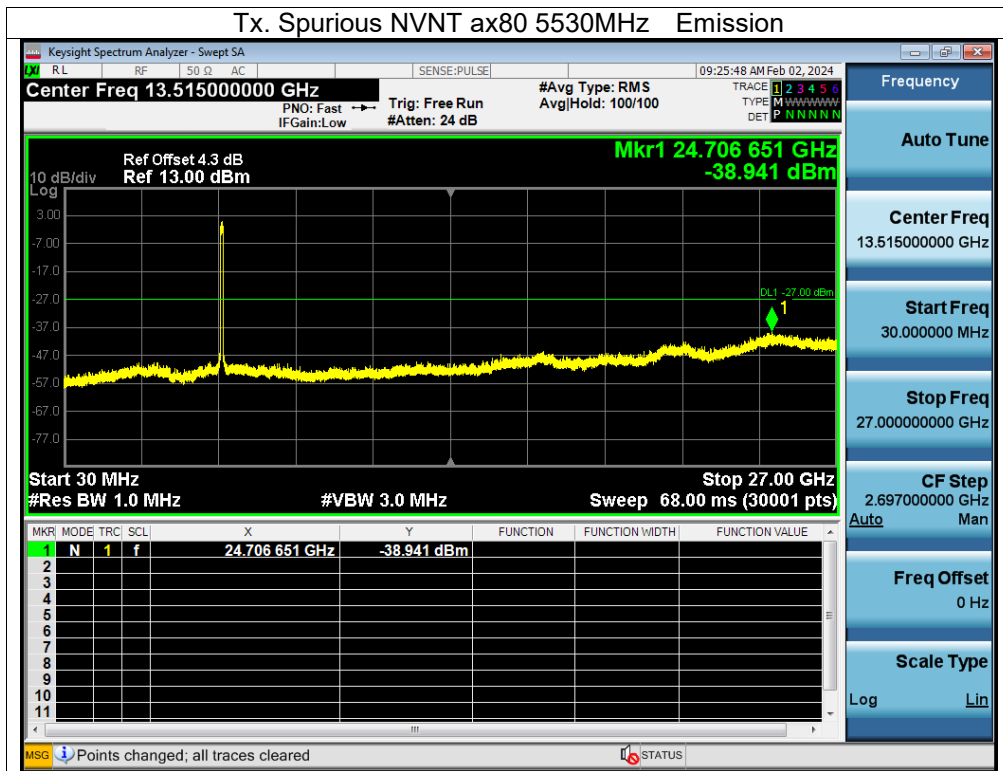

13. Frequency Stability Measurement

13.1 Block Diagram Of Test Setup



13.2 Limit

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification)..

13.3 Test Procedure

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f) / f_c \times 10^6$ ppm and he limit is less than ± 20 ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is $-20^\circ\text{C} \sim 70^\circ\text{C}$.

13.4 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	TX (5.1G) Mode Frequency U-NII-1 (5180-5240MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5180.0104	5180	0.0104	2.0077
		V max (V)	138.00	5180.0044	5180	0.0044	0.8494
		V min (V)	102.00	5180.0130	5180	0.0130	2.5097
Limits				5150-5250 MHz			
Result				Complies			

Temperature vs. Frequency Stability


TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5180.0135	5180	0.0135	2.6062
		T (°C)	-10	5180.0080	5180	0.0080	1.5444
		T (°C)	0	5180.0112	5180	0.0112	2.1622
		T (°C)	10	5180.0082	5180	0.0082	1.5830
		T (°C)	20	5180.0005	5180	0.0005	0.0965
		T (°C)	30	5180.0018	5180	0.0018	0.3475
		T (°C)	40	5180.0020	5180	0.0020	0.3861
		T (°C)	50	5180.0080	5180	0.0080	1.5444
		T (°C)	60	5180.0037	5180	0.0037	0.7143
		T (°C)	70	5180.0017	5180	0.0017	0.3282
Limits				5150-5250 MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5200.0122	5200	0.0122	2.3462
		V max (V)	138.00	5200.0031	5200	0.0031	0.5962
		V min (V)	102.00	5200.0071	5200	0.0071	1.3654
Limits				5725-5850 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5200.00350	5200	0.00350	0.6731
		T (°C)	-10	5200.00060	5200	0.00060	0.1154
		T (°C)	0	5200.01110	5200	0.01110	2.1346
		T (°C)	10	5200.01340	5200	0.01340	2.5769
		T (°C)	20	5200.00710	5200	0.00710	1.3654
		T (°C)	30	5200.00790	5200	0.00790	1.5192
		T (°C)	40	5200.00020	5200	0.00020	0.0385
		T (°C)	50	5200.00150	5200	0.00150	0.2885
		T (°C)	60	5200.00120	5200	0.00120	0.2308
		T (°C)	70	5200.00010	5200	0.00010	0.0192
Limits				5150-5250 MHz			
Result				Complies			

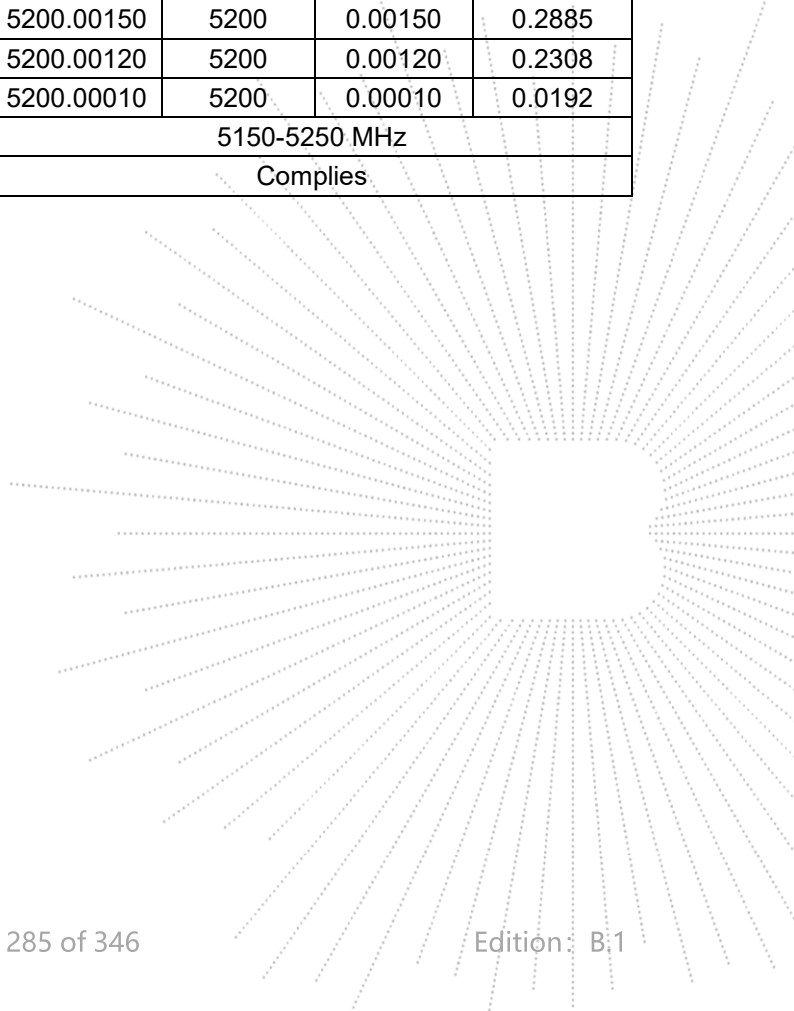


Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5240.0069	5240	0.0069	1.3168
		V max (V)	138.00	5240.0033	5240	0.0033	0.6298
		V min (V)	102.00	5240.0066	5240	0.0066	1.2595
Limits				5150-5250 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5240.0032	5240	0.0032	0.6107
		T (°C)	-10	5240.0023	5240	0.0023	0.4389
		T (°C)	0	5240.0057	5240	0.0057	1.0878
		T (°C)	10	5240.0111	5240	0.0111	2.1183
		T (°C)	20	5240.0015	5240	0.0015	0.2863
		T (°C)	30	5240.0043	5240	0.0043	0.8206
		T (°C)	40	5240.0026	5240	0.0026	0.4962
		T (°C)	50	5240.0060	5240	0.0060	1.1450
		T (°C)	60	5240.0063	5240	0.0063	1.2023
		T (°C)	70	5240.0102	5240	0.0102	1.9466
Limits				5150-5250 MHz			
Result				Complies			

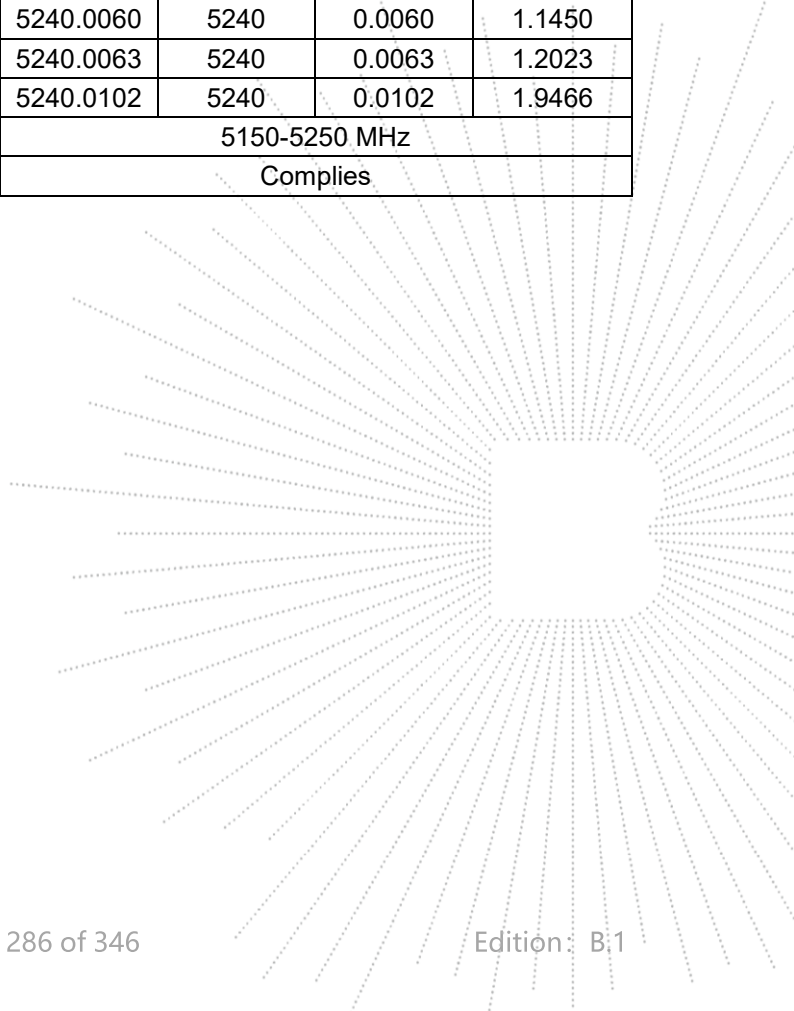

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	TX (5.3G) Mode Frequency U-NII-2A (5260-5320MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5260MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5260.0132	5260	0.0132	2.5095
		V max (V)	138.00	5260.0100	5260	0.0100	1.9011
		V min (V)	102.00	5260.0115	5260	0.0115	2.1863
Limits				5260-5320 MHz			
Result				Complies			

Temperature vs. Frequency Stability


TEST CONDITIONS				Reference Frequency: 5260MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5260.0021	5260	0.0021	0.3992
		T (°C)	-10	5260.0018	5260	0.0018	0.3422
		T (°C)	0	5260.0011	5260	0.0011	0.2091
		T (°C)	10	5260.0110	5260	0.0110	2.0913
		T (°C)	20	5260.0069	5260	0.0069	1.3118
		T (°C)	30	5260.0003	5260	0.0003	0.0570
		T (°C)	40	5260.0096	5260	0.0096	1.8251
		T (°C)	50	5260.0088	5260	0.0088	1.6730
		T (°C)	60	5260.0076	5260	0.0076	1.4449
		T (°C)	70	5260.0028	5260	0.0028	0.5323
Limits				5260-5320 MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5280MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5280.0117	5280	0.0117	2.2159
		V max (V)	138.00	5280.0126	5280	0.0126	2.3864
		V min (V)	102.00	5280.0029	5280	0.0029	0.5492
Limits				5260-5320 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5280MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5280.00840	5280	0.00840	1.5909
		T (°C)	-10	5280.01220	5280	0.01220	2.3106
		T (°C)	0	5280.00520	5280	0.00520	0.9848
		T (°C)	10	5280.00860	5280	0.00860	1.6288
		T (°C)	20	5280.00010	5280	0.00010	0.0189
		T (°C)	30	5280.00500	5280	0.00500	0.9470
		T (°C)	40	5280.01170	5280	0.01170	2.2159
		T (°C)	50	5280.00130	5280	0.00130	0.2462
		T (°C)	60	5280.00970	5280	0.00970	1.8371
		T (°C)	70	5280.00560	5280	0.00560	1.0606
Limits				5260-5320 MHz			
Result				Complies			

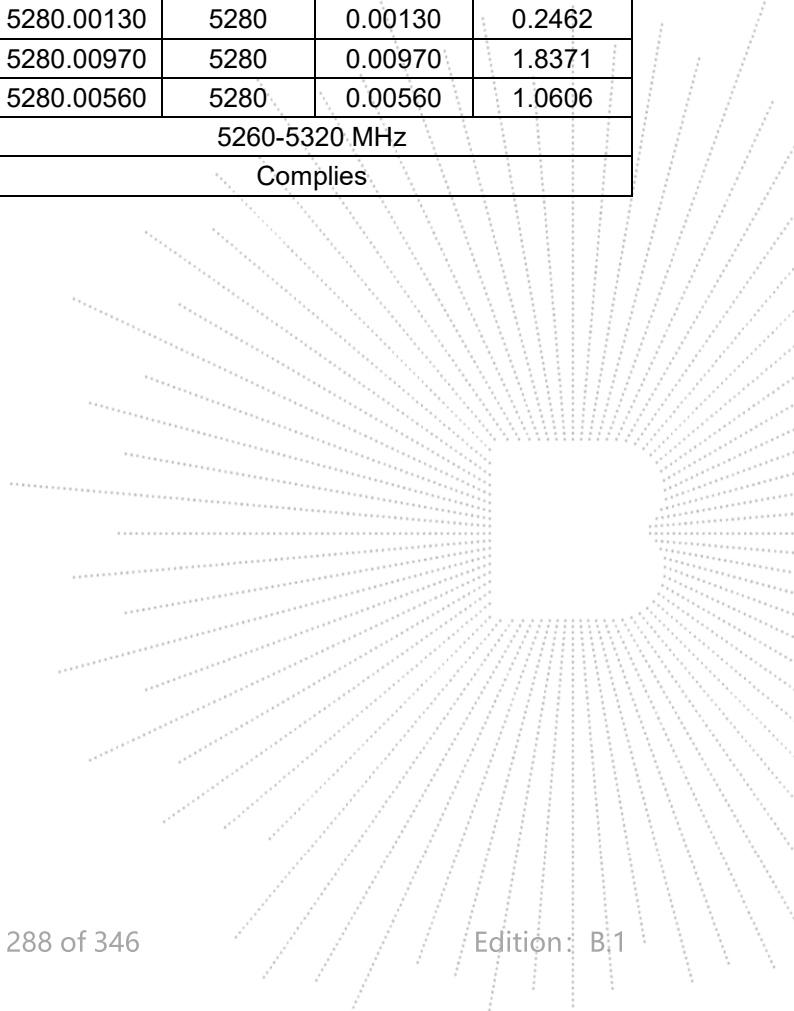


Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5320MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5320.0036	5320	0.0036	0.6767
		V max (V)	138.00	5320.0072	5320	0.0072	1.3534
		V min (V)	102.00	5320.0021	5320	0.0021	0.3947
Limits				5260-5320 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5320MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5320.0104	5320	0.0104	1.9549
		T (°C)	-10	5320.0018	5320	0.0018	0.3383
		T (°C)	0	5320.0098	5320	0.0098	1.8421
		T (°C)	10	5320.0133	5320	0.0133	2.5000
		T (°C)	20	5320.0009	5320	0.0009	0.1692
		T (°C)	30	5320.0050	5320	0.0050	0.9398
		T (°C)	40	5320.0000	5320	0.0000	0.0000
		T (°C)	50	5320.0077	5320	0.0077	1.4474
		T (°C)	60	5320.0116	5320	0.0116	2.1805
		T (°C)	70	5320.0075	5320	0.0075	1.4098
Limits				5260-5320 MHz			
Result				Complies			

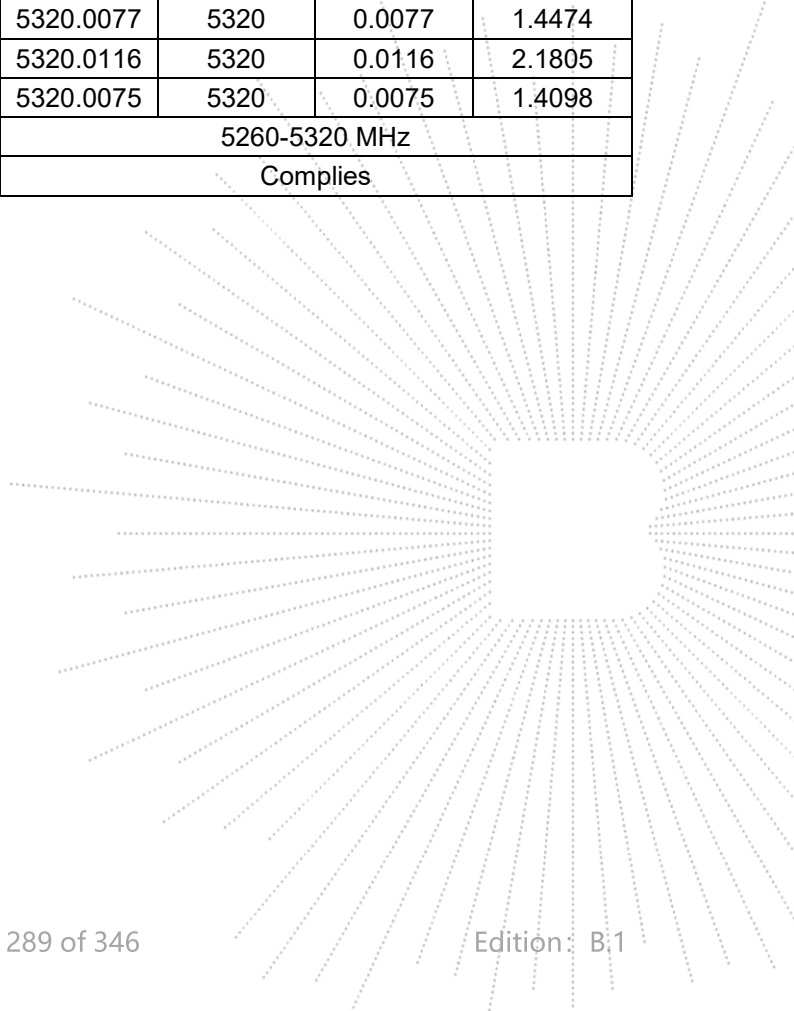

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	TX (5.6G) Mode Frequency U-NII-2C (5500-5700MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5500MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5500.0082	5500	0.0082	1.4909
		V max (V)	138.00	5500.0117	5500	0.0117	2.1273
		V min (V)	102.00	5500.0013	5500	0.0013	0.2364
Limits				5500-5700 MHz			
Result				Complies			

Temperature vs. Frequency Stability


TEST CONDITIONS				Reference Frequency: 5500MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5500.0117	5500	0.0117	2.1273
		T (°C)	-10	5500.0093	5500	0.0093	1.6909
		T (°C)	0	5500.0052	5500	0.0052	0.9455
		T (°C)	10	5500.0116	5500	0.0116	2.1091
		T (°C)	20	5500.0094	5500	0.0094	1.7091
		T (°C)	30	5500.0061	5500	0.0061	1.1091
		T (°C)	40	5500.0096	5500	0.0096	1.7455
		T (°C)	50	5500.0045	5500	0.0045	0.8182
		T (°C)	60	5500.0062	5500	0.0062	1.1273
		T (°C)	70	5500.0061	5500	0.0061	1.1091
Limits				5500-5700 MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5580MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5580.0030	5580	0.0030	0.5376
		V max (V)	138.00	5580.0042	5580	0.0042	0.7527
		V min (V)	102.00	5580.0115	5580	0.0115	2.0609
Limits				5500-5700 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5580MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5580.00210	5580	0.00210	0.3763
		T (°C)	-10	5580.00700	5580	0.00700	1.2545
		T (°C)	0	5580.00940	5580	0.00940	1.6846
		T (°C)	10	5580.00910	5580	0.00910	1.6308
		T (°C)	20	5580.01190	5580	0.01190	2.1326
		T (°C)	30	5580.01010	5580	0.01010	1.8100
		T (°C)	40	5580.00750	5580	0.00750	1.3441
		T (°C)	50	5580.00270	5580	0.00270	0.4839
		T (°C)	60	5580.01200	5580	0.01200	2.1505
		T (°C)	70	5580.00990	5580	0.00990	1.7742
Limits				5500-5700 MHz			
Result				Complies			

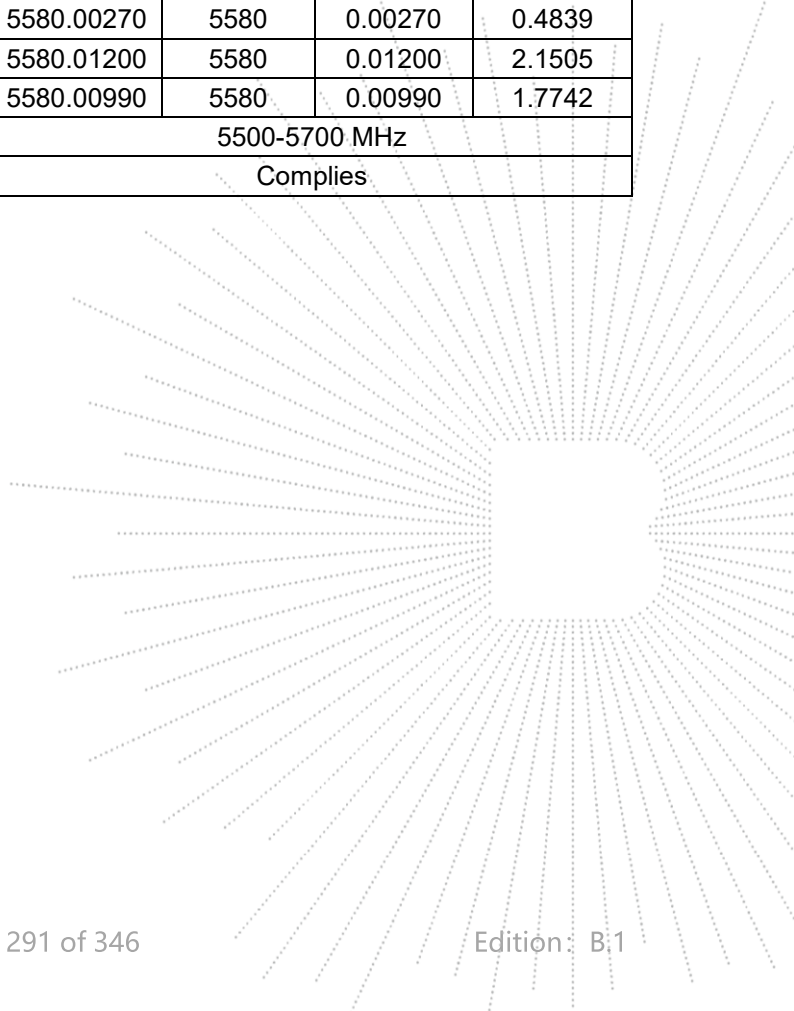


Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5700MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5700.0055	5700	0.0055	0.9649
		V max (V)	138.00	5700.0110	5700	0.0110	1.9298
		V min (V)	102.00	5700.0033	5700	0.0033	0.5789
Limits				5725-5850 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5700MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5700.0104	5700	0.0104	1.8246
		T (°C)	-10	5700.0014	5700	0.0014	0.2456
		T (°C)	0	5700.0076	5700	0.0076	1.3333
		T (°C)	10	5700.0087	5700	0.0087	1.5263
		T (°C)	20	5700.0080	5700	0.0080	1.4035
		T (°C)	30	5700.0000	5700	0.0000	0.0000
		T (°C)	40	5700.0030	5700	0.0030	0.5263
		T (°C)	50	5700.0113	5700	0.0113	1.9825
		T (°C)	60	5700.0056	5700	0.0056	0.9825
		T (°C)	70	5700.0031	5700	0.0031	0.5439
Limits				5725-5850 MHz			
Result				Complies			

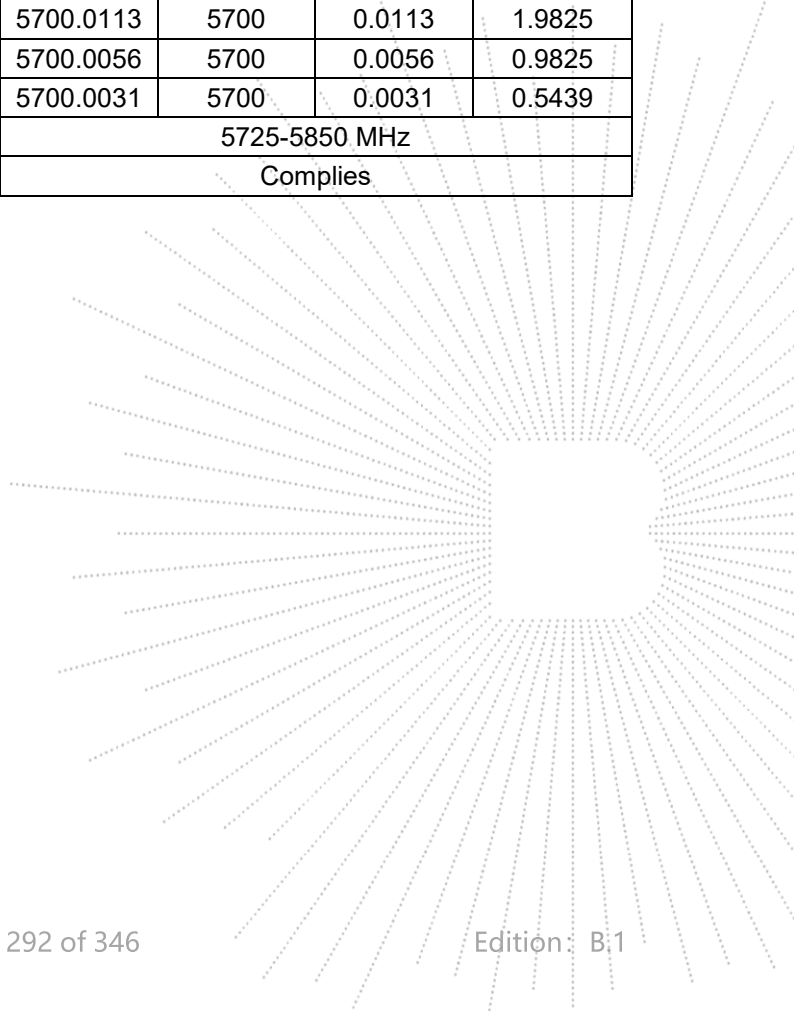

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	TX (5.8G) Mode Frequency U-NII-3 (5745-5825MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5745.00500	5745	0.00500	0.8703
		V max (V)	138.00	5745.00890	5745	0.00890	1.5492
		V min (V)	102.00	5745.00980	5745	0.00980	1.7058
Limits				5725-5850 MHz			
Result				Complies			

Temperature vs. Frequency Stability


TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5745.01070	5745	0.01070	1.8625
		T (°C)	-10	5745.01240	5745	0.01240	2.1584
		T (°C)	0	5745.01200	5745	0.01200	2.0888
		T (°C)	10	5745.00890	5745	0.00890	1.5492
		T (°C)	20	5745.01110	5745	0.01110	1.9321
		T (°C)	30	5745.01320	5745	0.01320	2.2977
		T (°C)	40	5745.01140	5745	0.01140	1.9843
		T (°C)	50	5745.01310	5745	0.01310	2.2802
		T (°C)	60	5745.01130	5745	0.01130	1.9669
		T (°C)	70	5745.00020	5745	0.00020	0.0348
Limits				5725-5850 MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5785.01280	5785	0.01280	2.2126
		V max (V)	138.00	5785.00420	5785	0.00420	0.7260
		V min (V)	102.00	5785.00280	5785	0.00280	0.4840
Limits				5725-5850 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5785.00840	5785	0.00840	1.4520
		T (°C)	-10	5785.01110	5785	0.01110	1.9188
		T (°C)	0	5785.01170	5785	0.01170	2.0225
		T (°C)	10	5785.01010	5785	0.01010	1.7459
		T (°C)	20	5785.00770	5785	0.00770	1.3310
		T (°C)	30	5785.00810	5785	0.00810	1.4002
		T (°C)	40	5785.00950	5785	0.00950	1.6422
		T (°C)	50	5785.00750	5785	0.00750	1.2965
		T (°C)	60	5785.00760	5785	0.00760	1.3137
		T (°C)	70	5785.01020	5785	0.01020	1.7632
Limits				5725-5850 MHz			
Result				Complies			

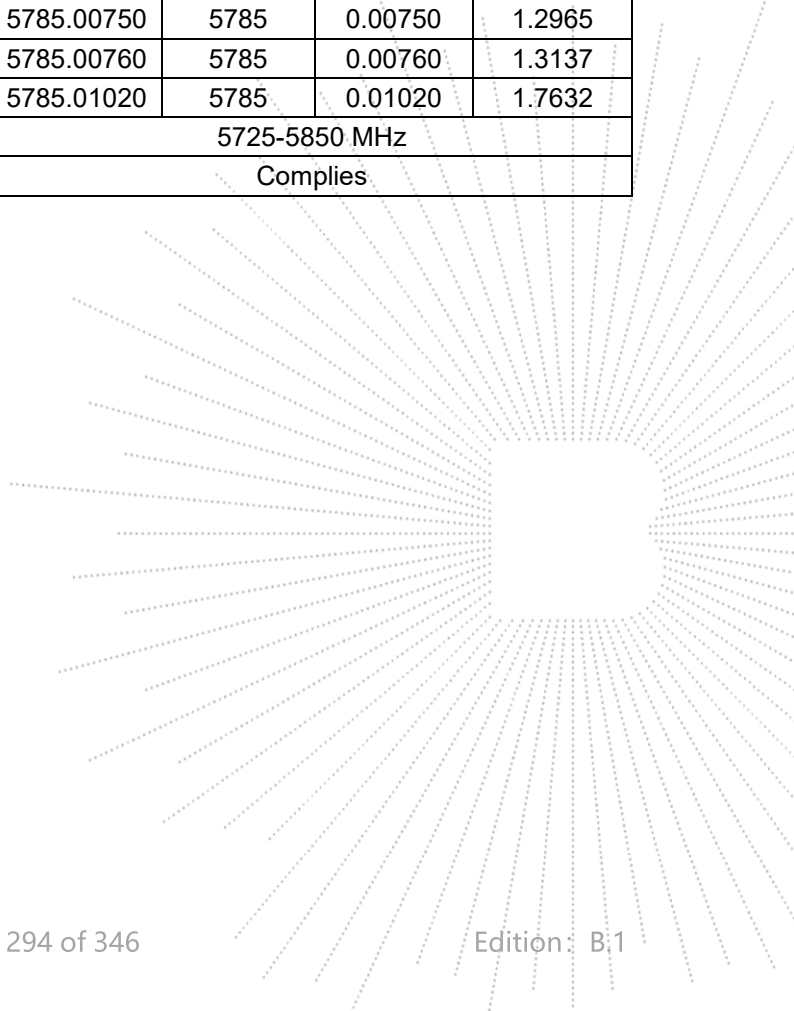


Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5825.00300	5825	0.00300	0.5150
		V max (V)	138.00	5825.00900	5825	0.00900	1.5451
		V min (V)	102.00	5825.01040	5825	0.01040	1.7854
Limits				5725-5850 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5825.00750	5825	0.00750	1.2876
		T (°C)	-10	5825.00520	5825	0.00520	0.8927
		T (°C)	0	5825.01330	5825	0.01330	2.2833
		T (°C)	10	5825.01250	5825	0.01250	2.1459
		T (°C)	20	5825.00340	5825	0.00340	0.5837
		T (°C)	30	5825.00110	5825	0.00110	0.1888
		T (°C)	40	5825.00140	5825	0.00140	0.2403
		T (°C)	50	5825.00450	5825	0.00450	0.7725
		T (°C)	60	5825.00550	5825	0.00550	0.9442
		T (°C)	70	5825.01010	5825	0.01010	1.7339
Limits				5725-5850 MHz			
Result				Complies			

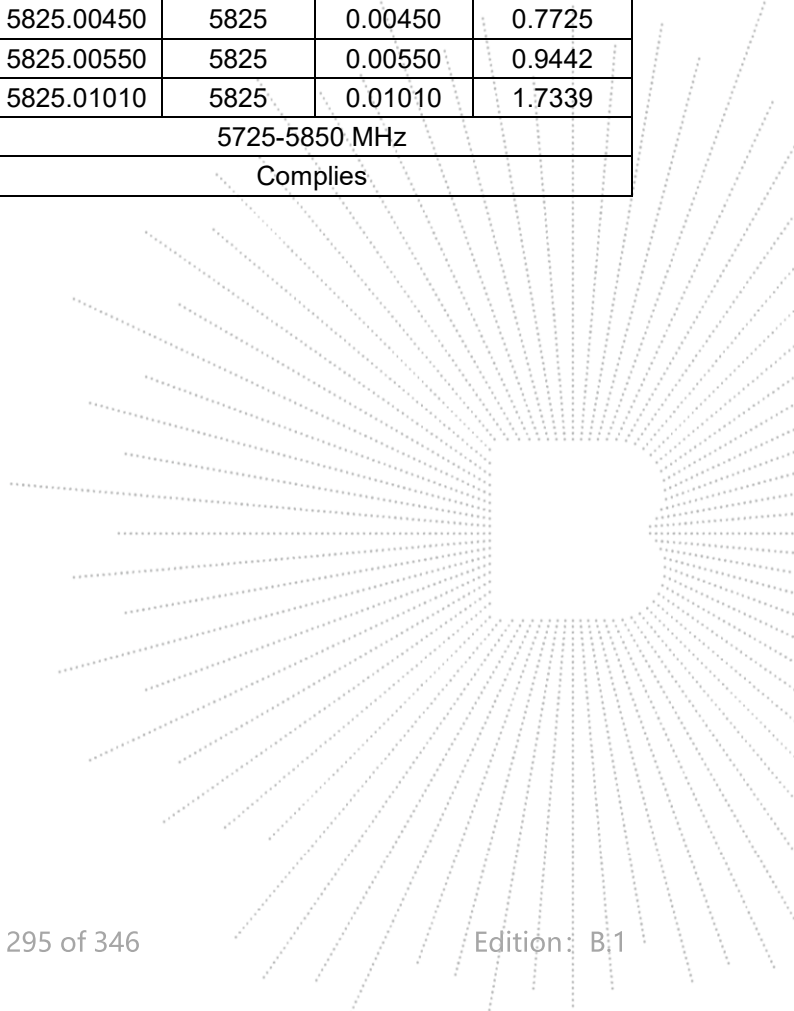

14. Duty Cycle Of Test Signal

14.1 Standard Requirement

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle. All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

14.2 Formula

Duty Cycle = $T_{on} / (T_{on} + T_{off})$


14.3 Test Procedure



1. Set span = Zero
2. RBW = 8MHz
3. VBW = 8MHz,
4. Detector = Peak



14.4 Test Result



Condition	Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5180	100	0	0
NVNT	a	5200	100	0	0
NVNT	a	5240	100	0	0
NVNT	n20	5180	100	0	0
NVNT	n20	5200	100	0	0
NVNT	n20	5240	100	0	0
NVNT	n40	5190	100	0	0
NVNT	n40	5230	100	0	0
NVNT	ac20	5180	100	0	0
NVNT	ac20	5200	100	0	0
NVNT	ac20	5240	100	0	0
NVNT	ac40	5190	100	0	0
NVNT	ac40	5230	100	0	0
NVNT	ac80	5210	100	0	0
NVNT	ax20	5180	100	0	0
NVNT	ax20	5200	100	0	0
NVNT	ax20	5240	100	0	0
NVNT	ax40	5190	100	0	0
NVNT	ax40	5230	100	0	0
NVNT	ax80	5210	100	0	0



Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A . Plot.


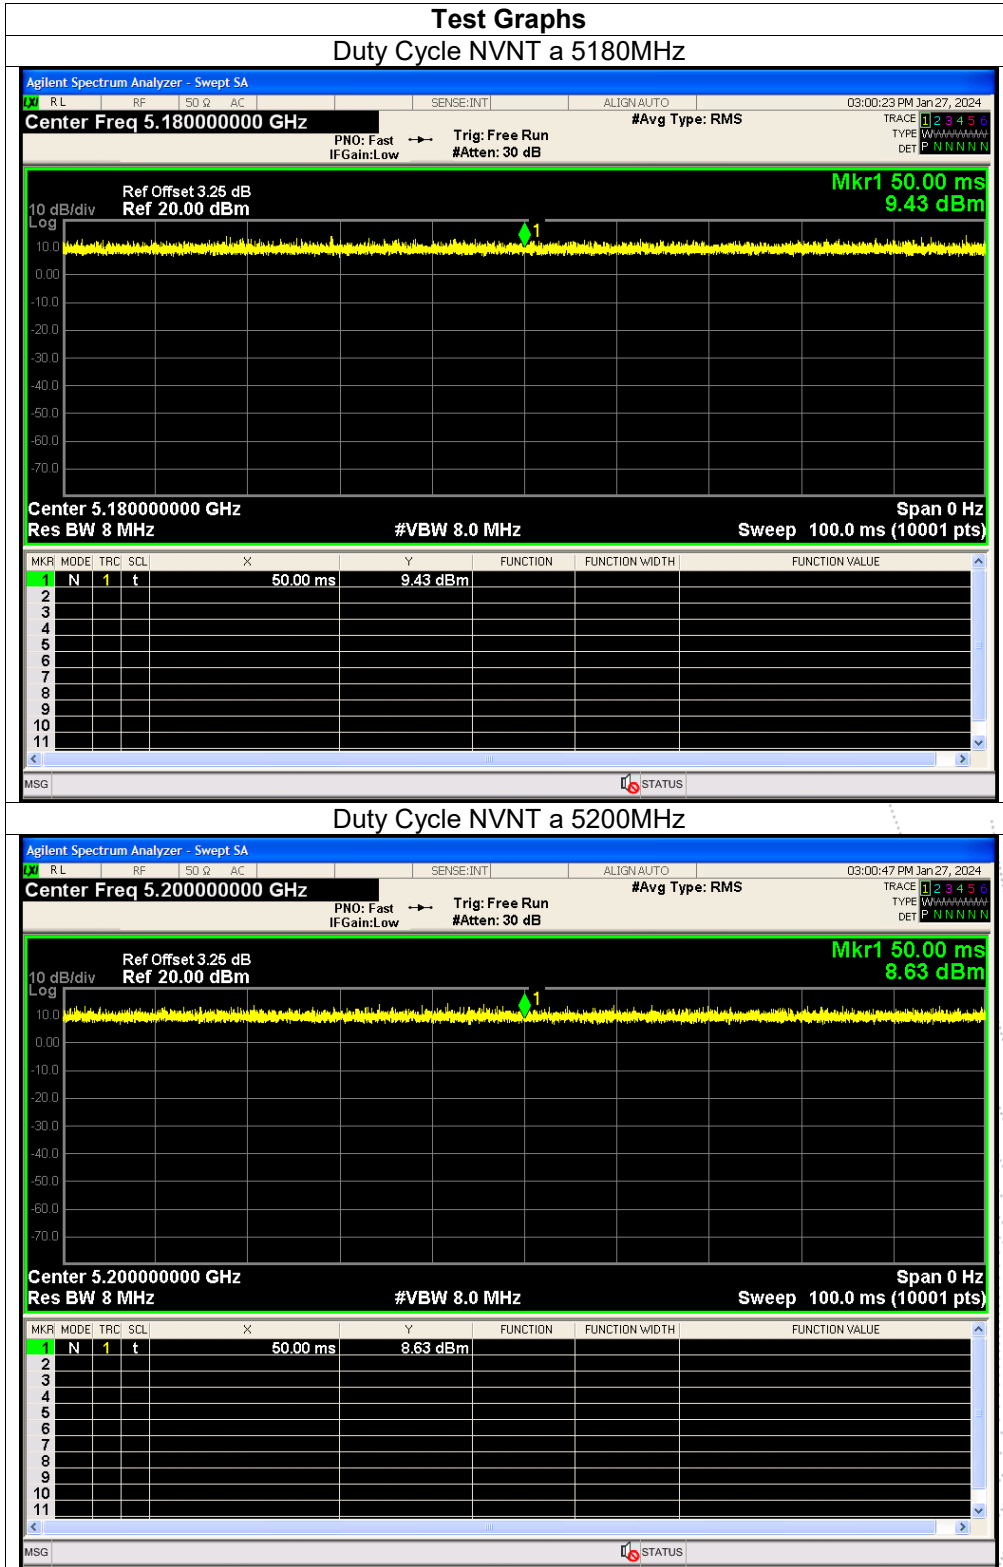


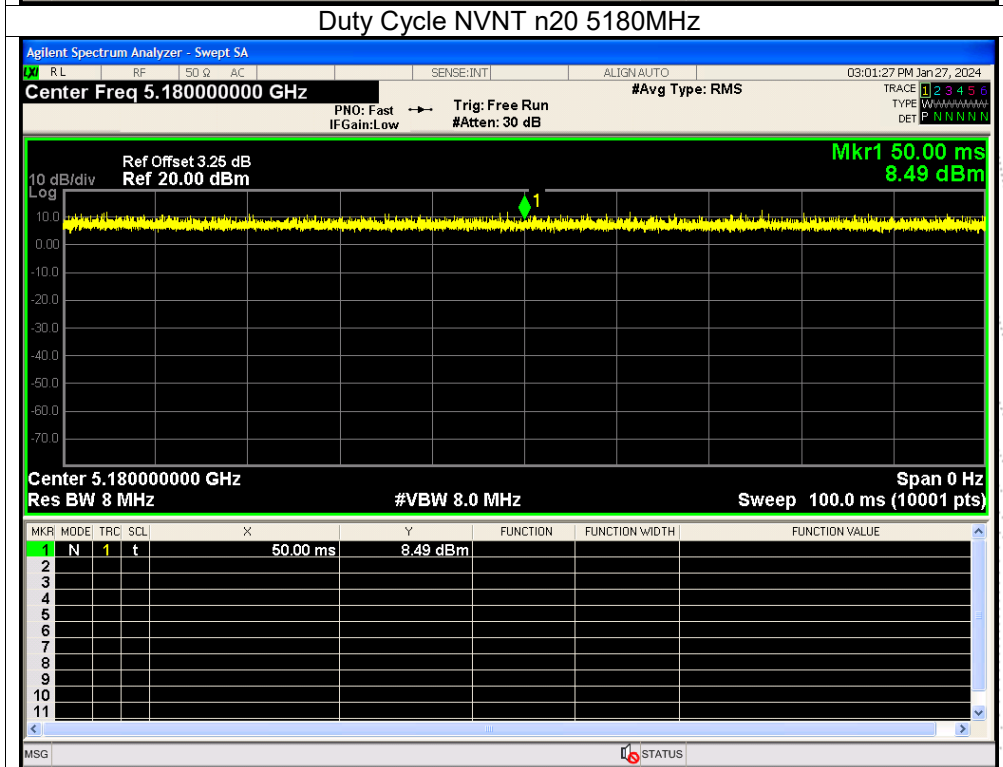
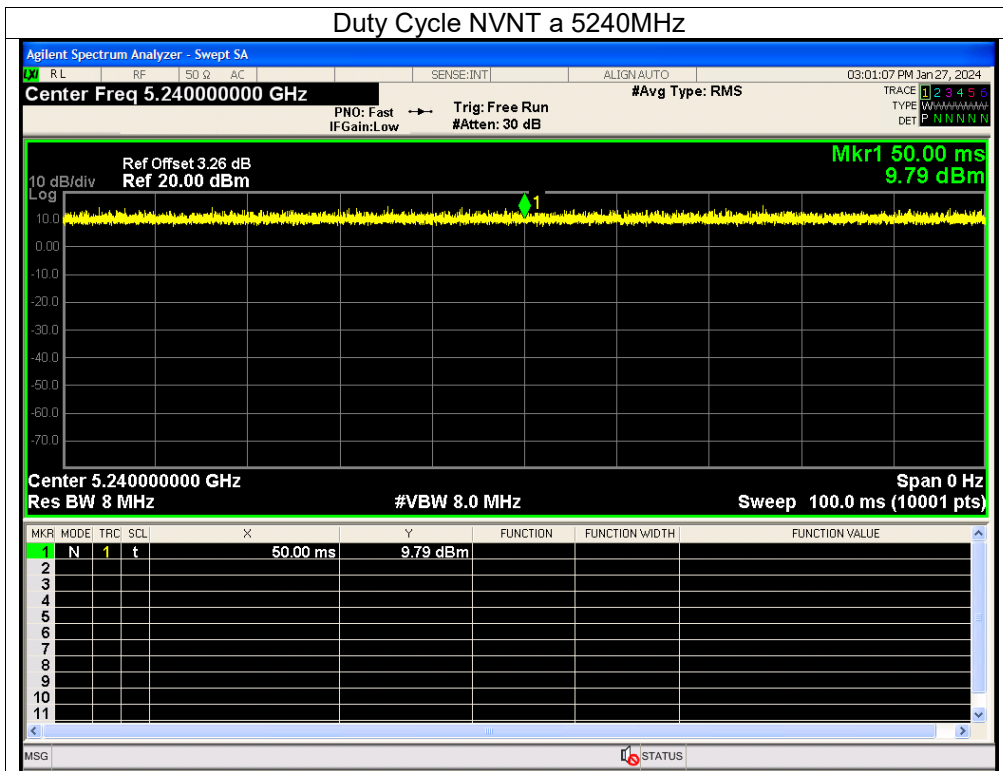


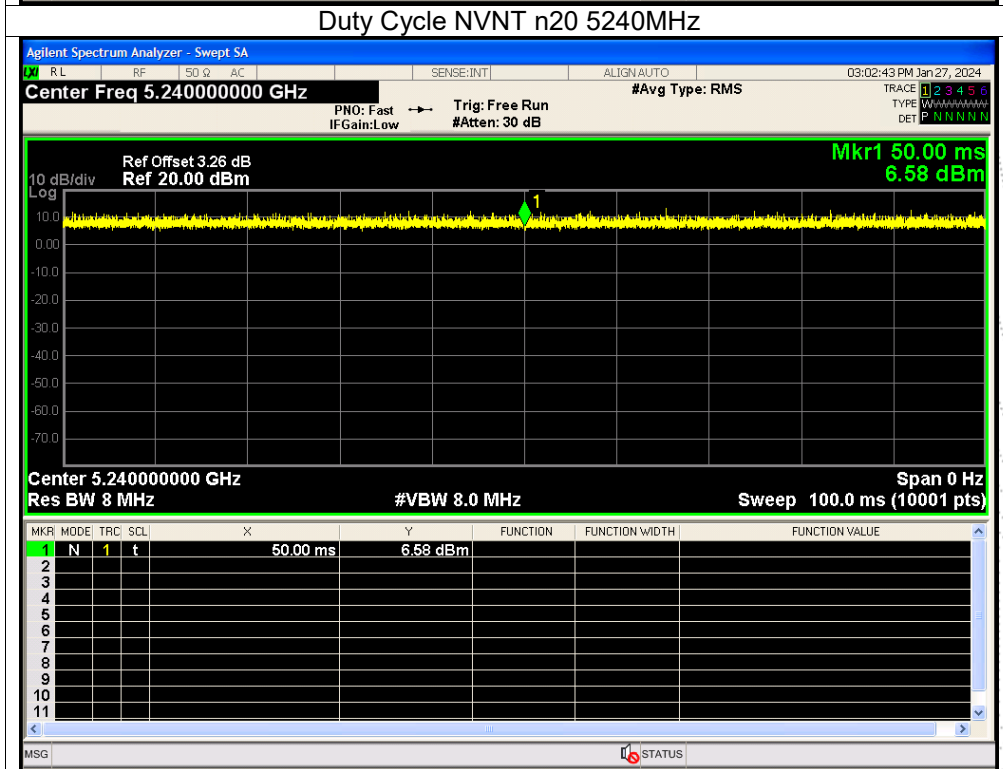
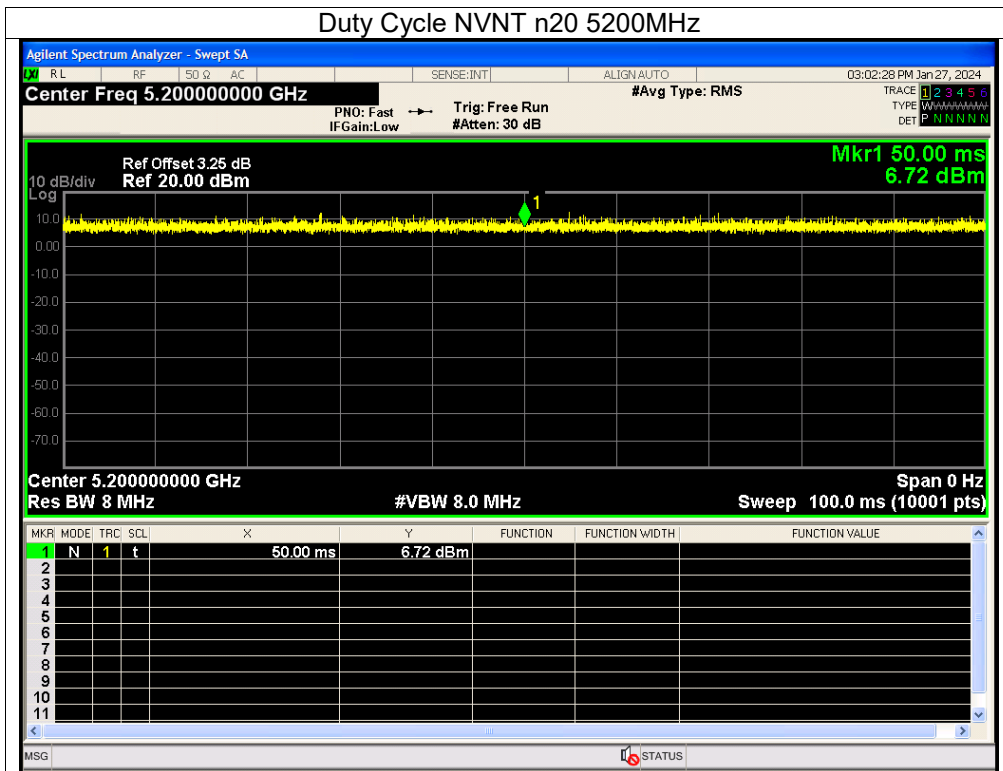


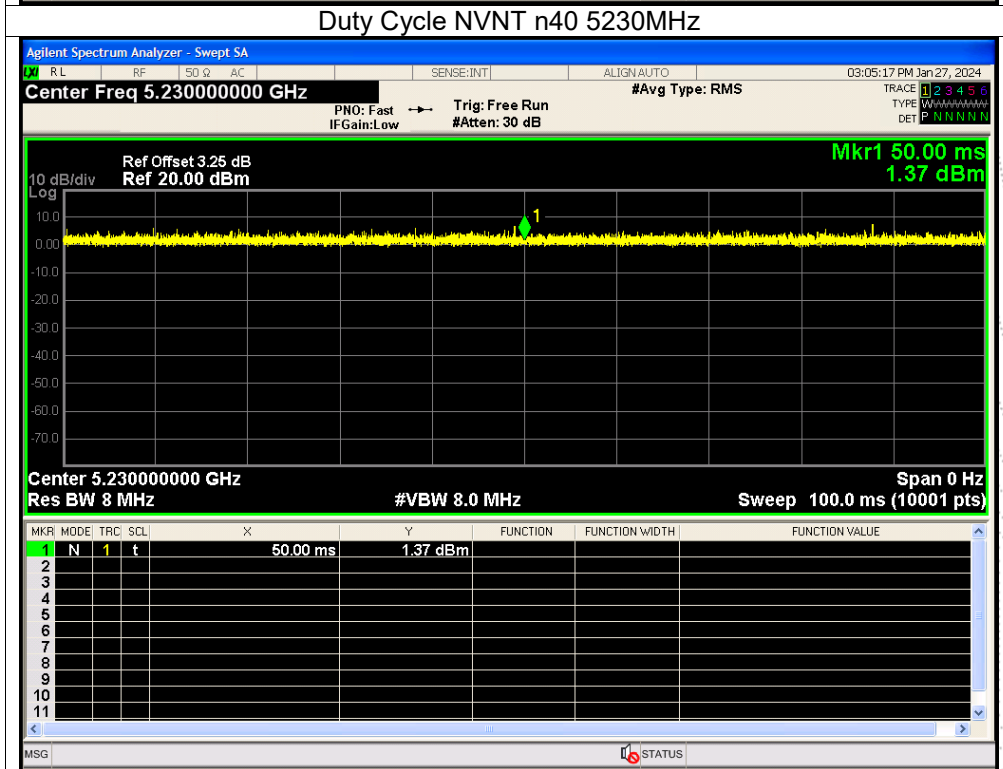
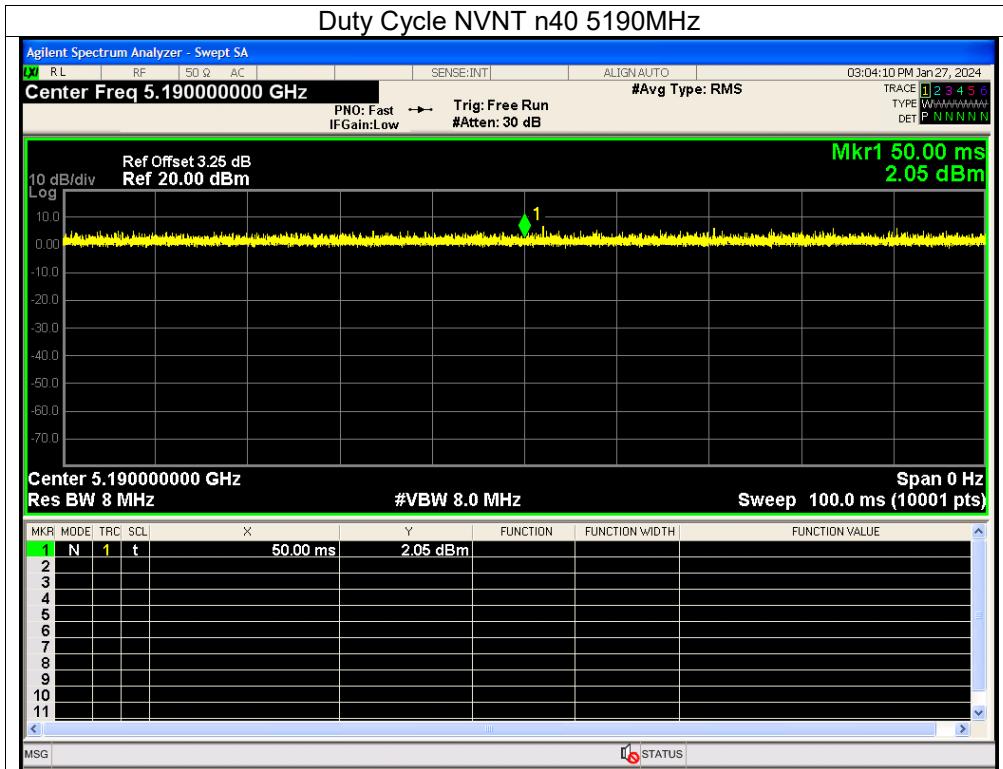


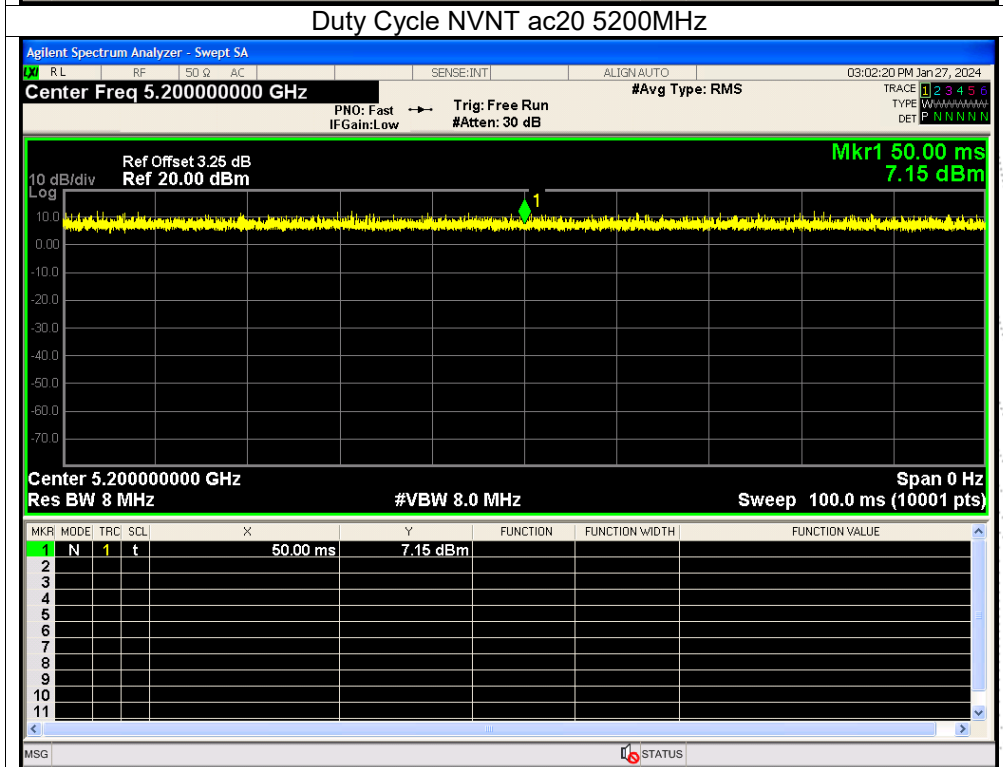
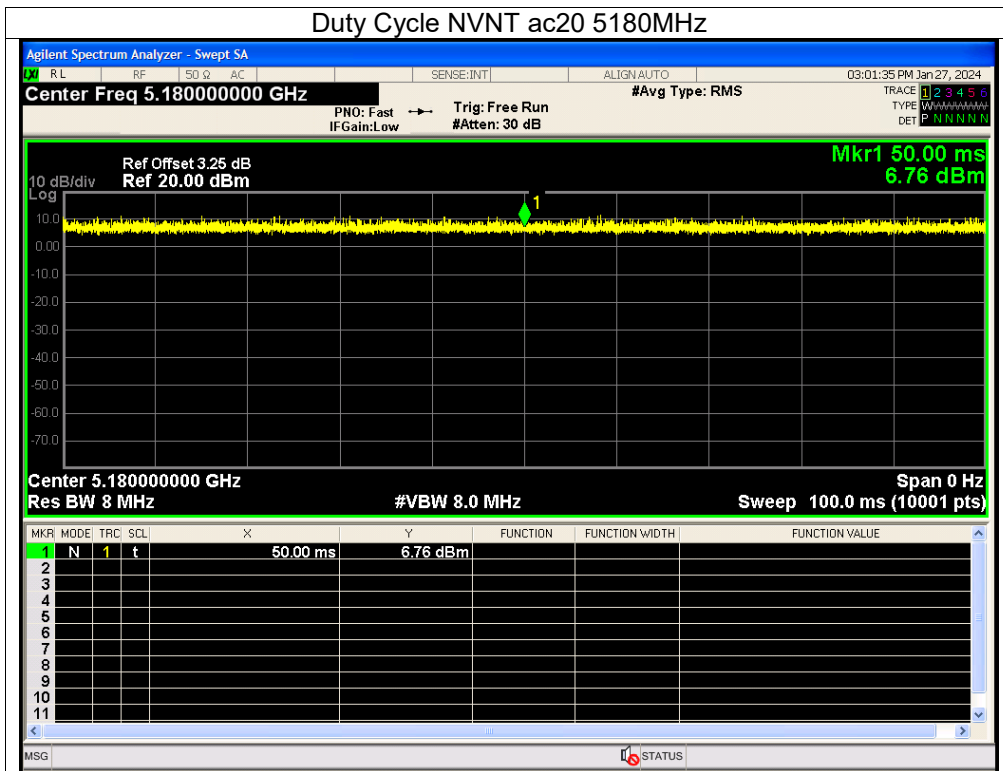


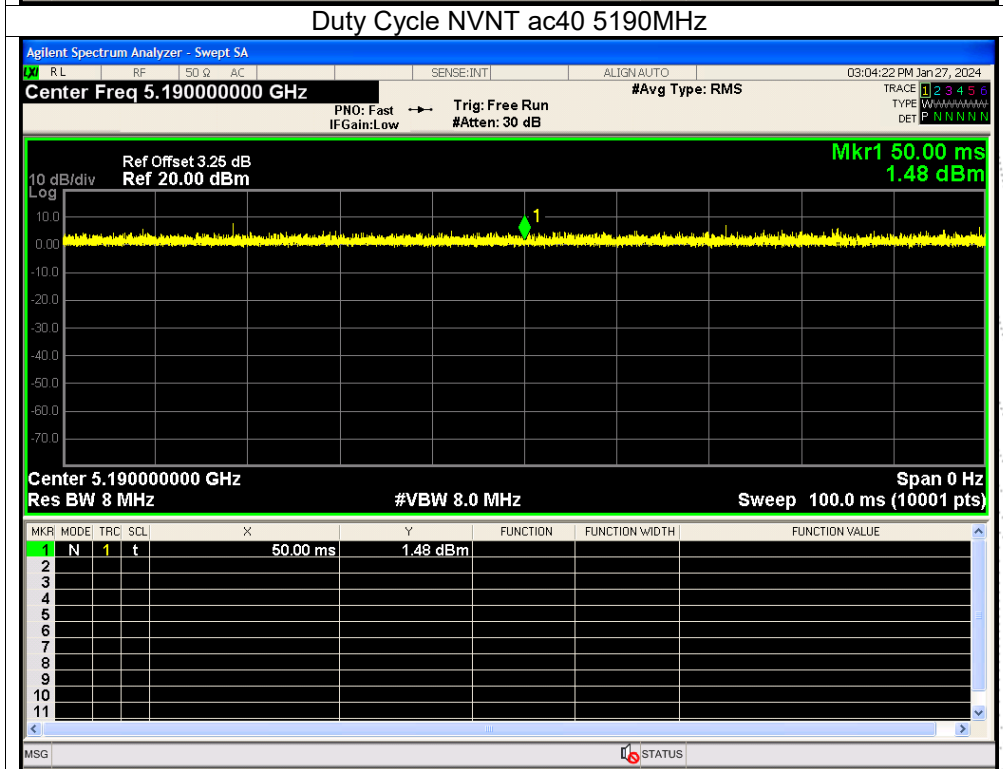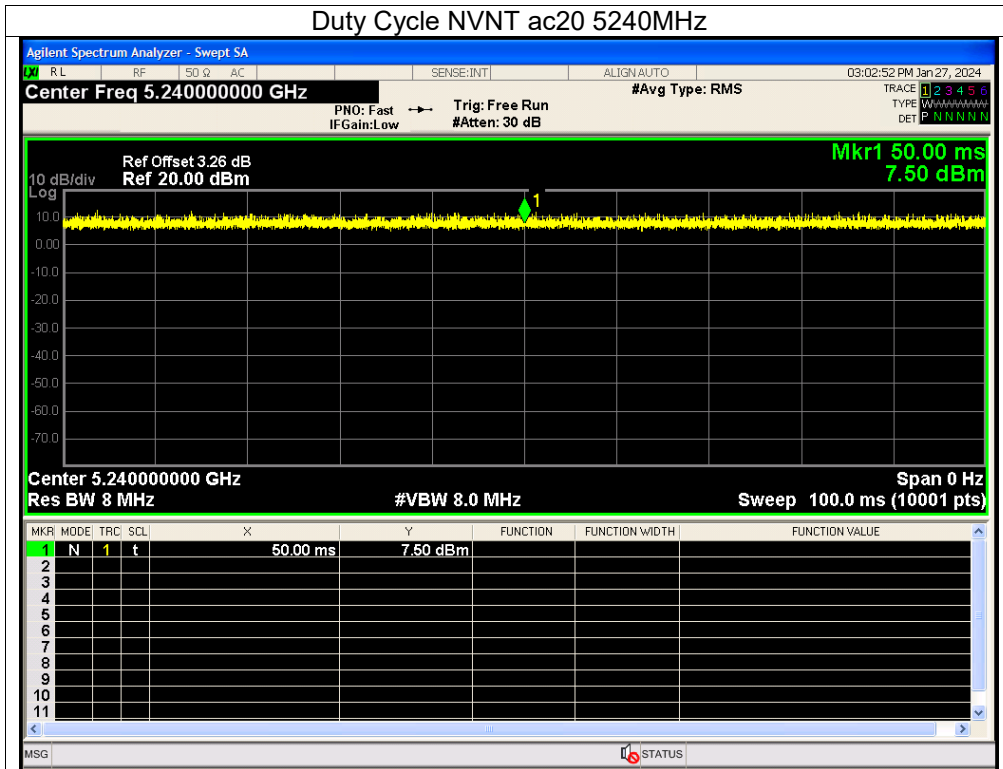

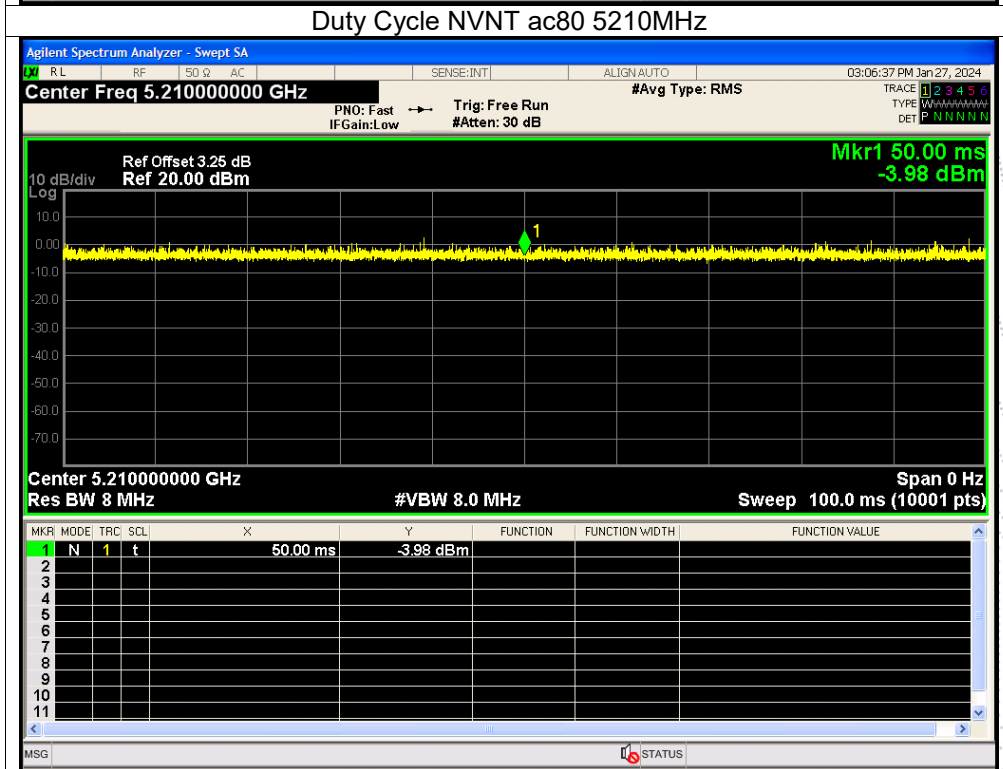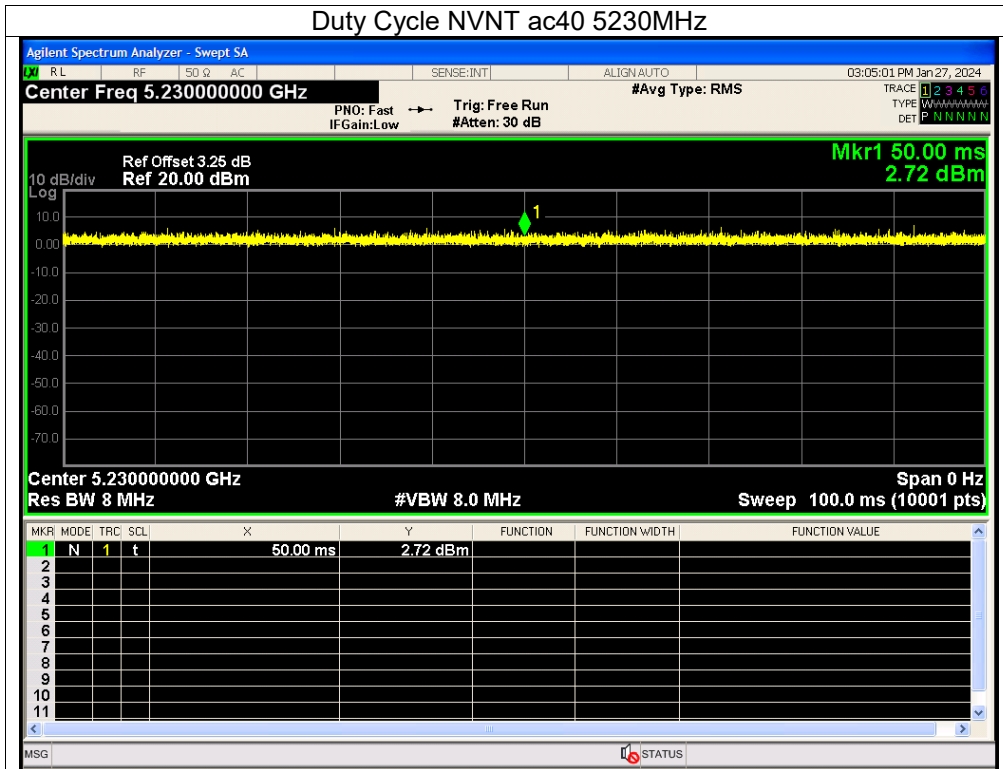


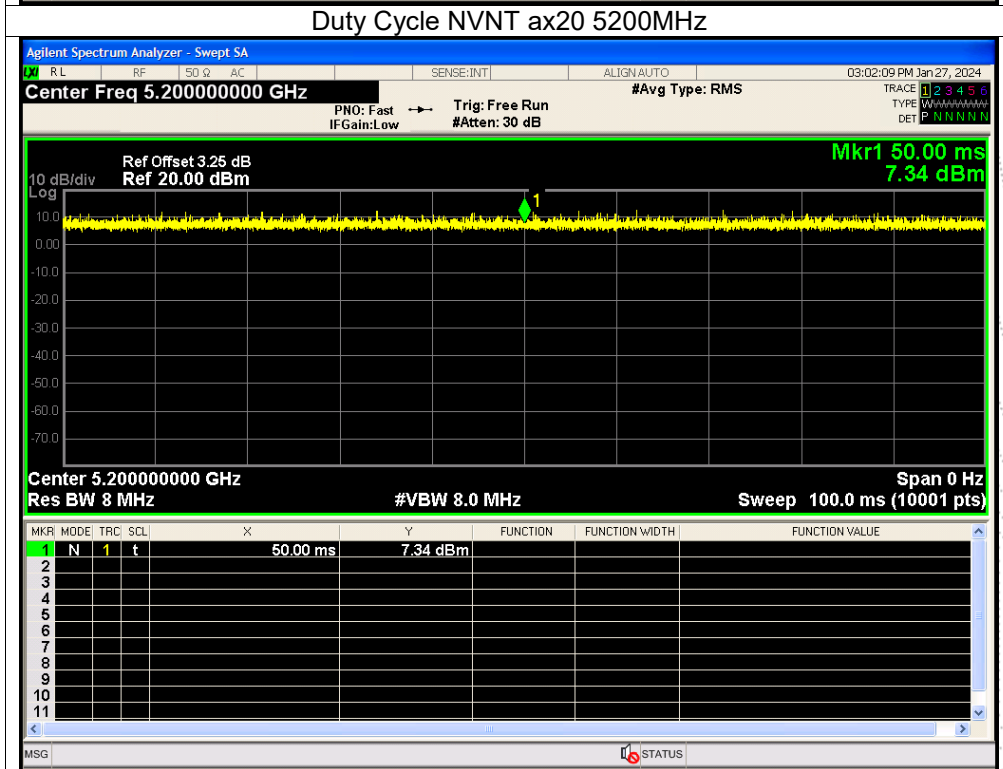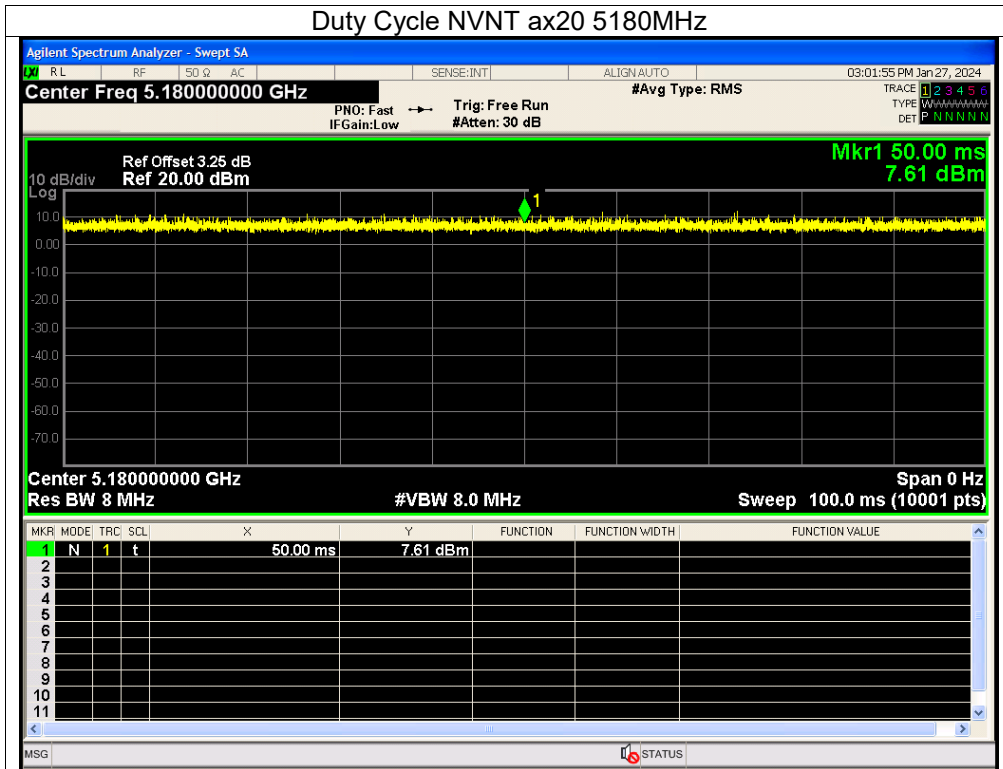

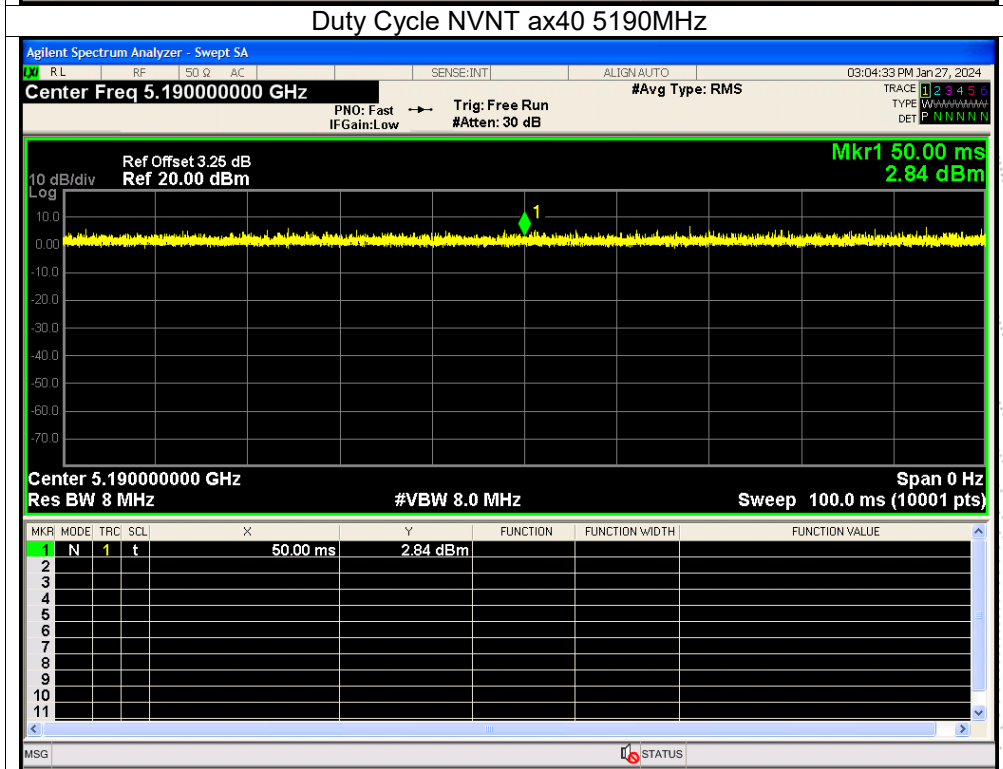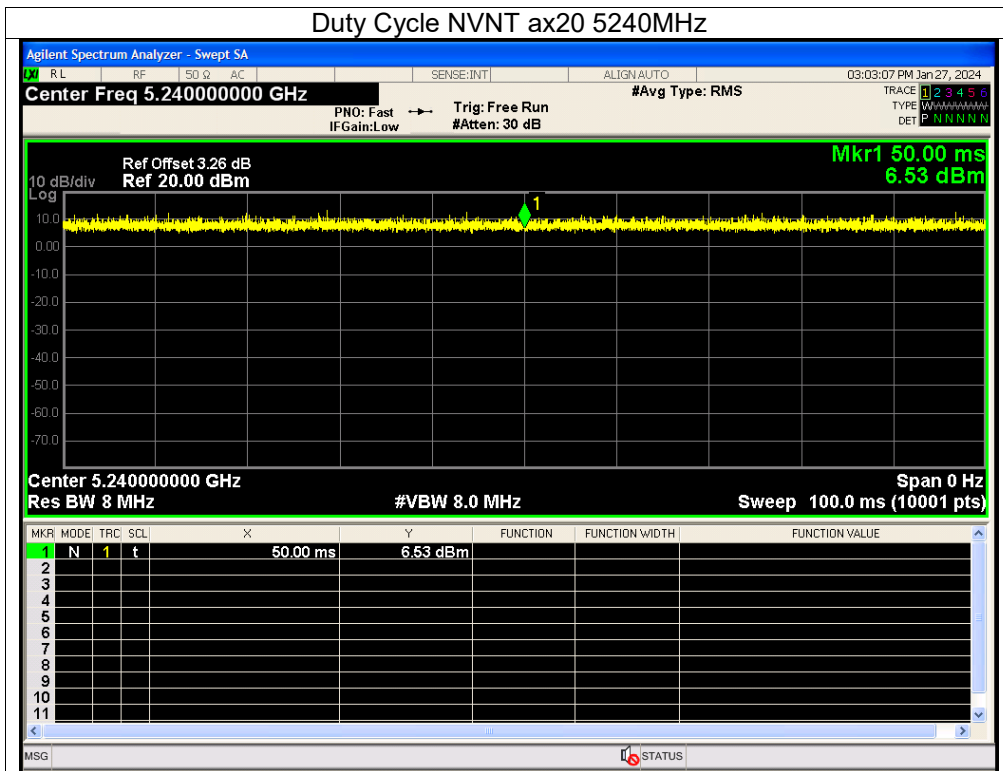


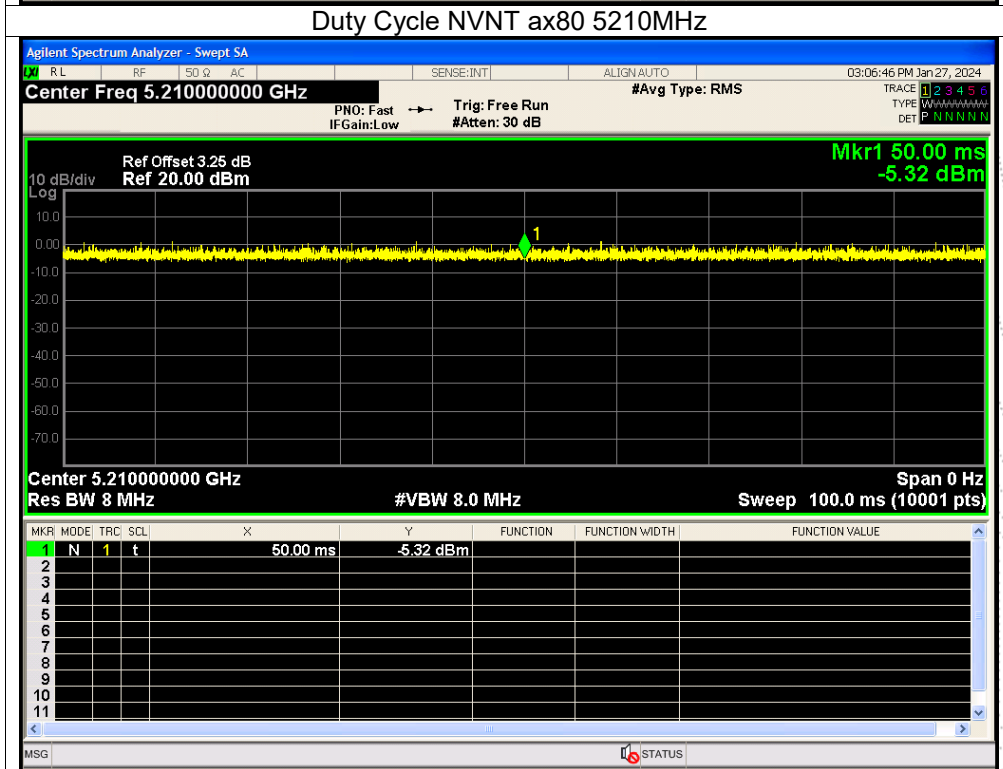
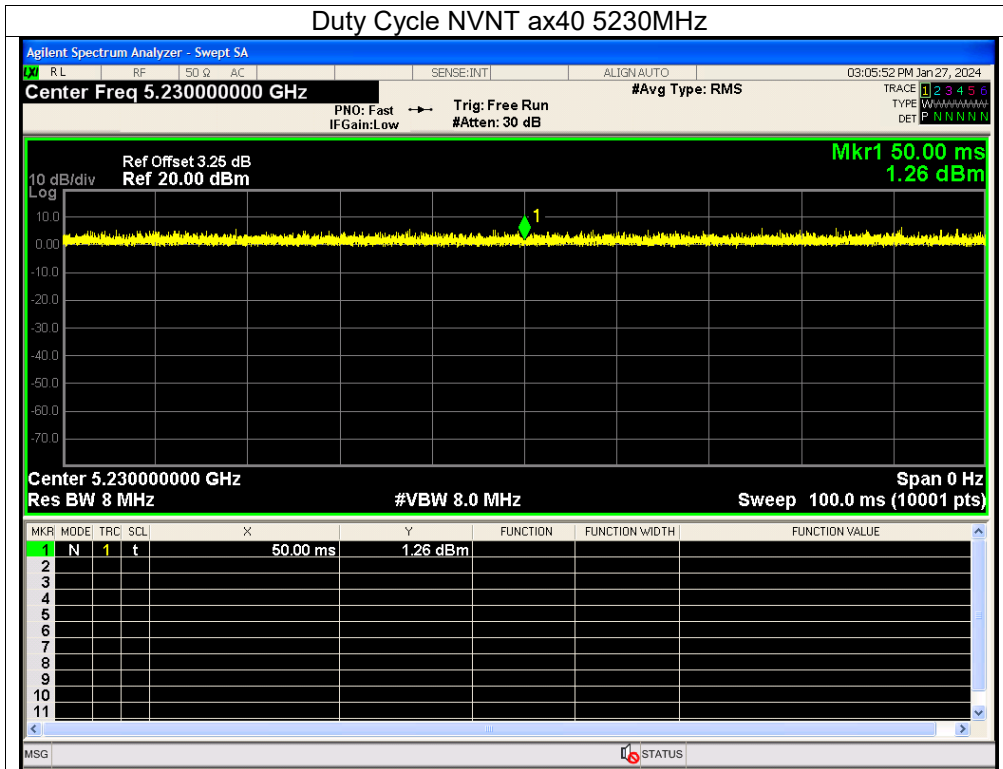




Condition	Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5260	100	0	0
NVNT	a	5280	100	0	0
NVNT	a	5320	100	0	0
NVNT	n20	5260	100	0	0
NVNT	n20	5280	100	0	0
NVNT	n20	5320	100	0	0
NVNT	n40	5270	100	0	0
NVNT	n40	5310	100	0	0
NVNT	ac20	5260	100	0	0
NVNT	ac20	5280	100	0	0
NVNT	ac20	5320	100	0	0
NVNT	ac40	5270	100	0	0
NVNT	ac40	5310	100	0	0
NVNT	ac80	5290	100	0	0
NVNT	ax20	5260	100	0	0
NVNT	ax20	5280	100	0	0
NVNT	ax20	5320	100	0	0
NVNT	ax40	5270	100	0	0
NVNT	ax40	5310	100	0	0
NVNT	ax80	5290	100	0	0


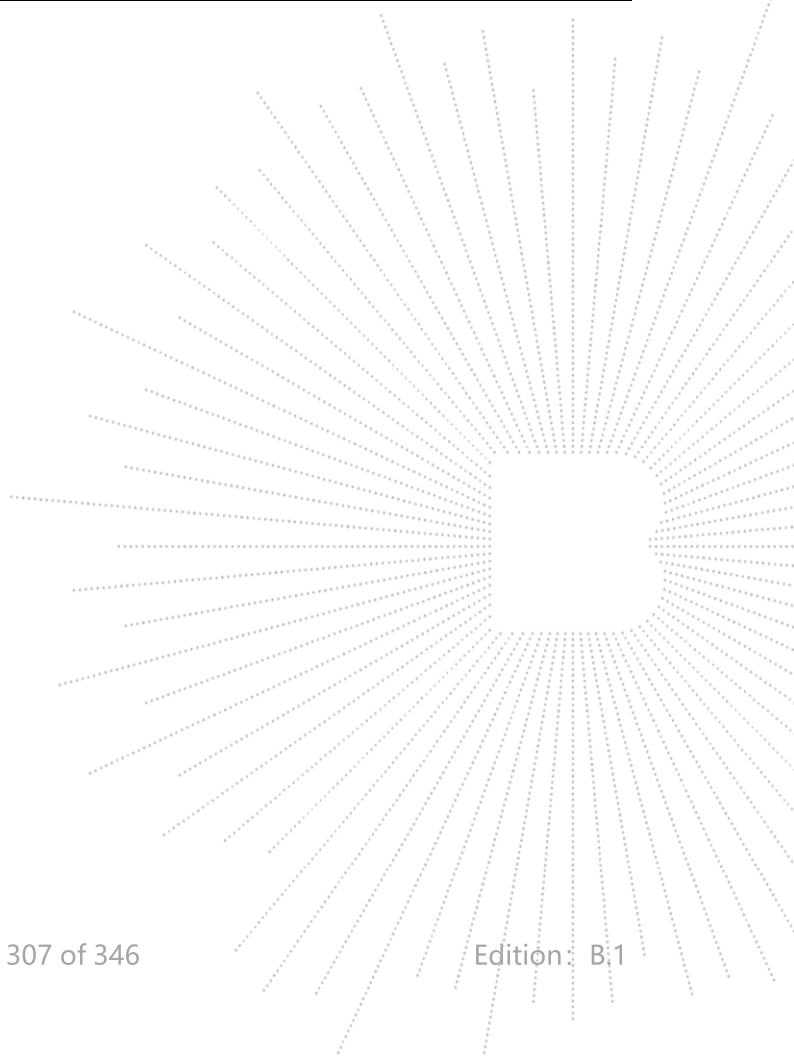




Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A. Plot.


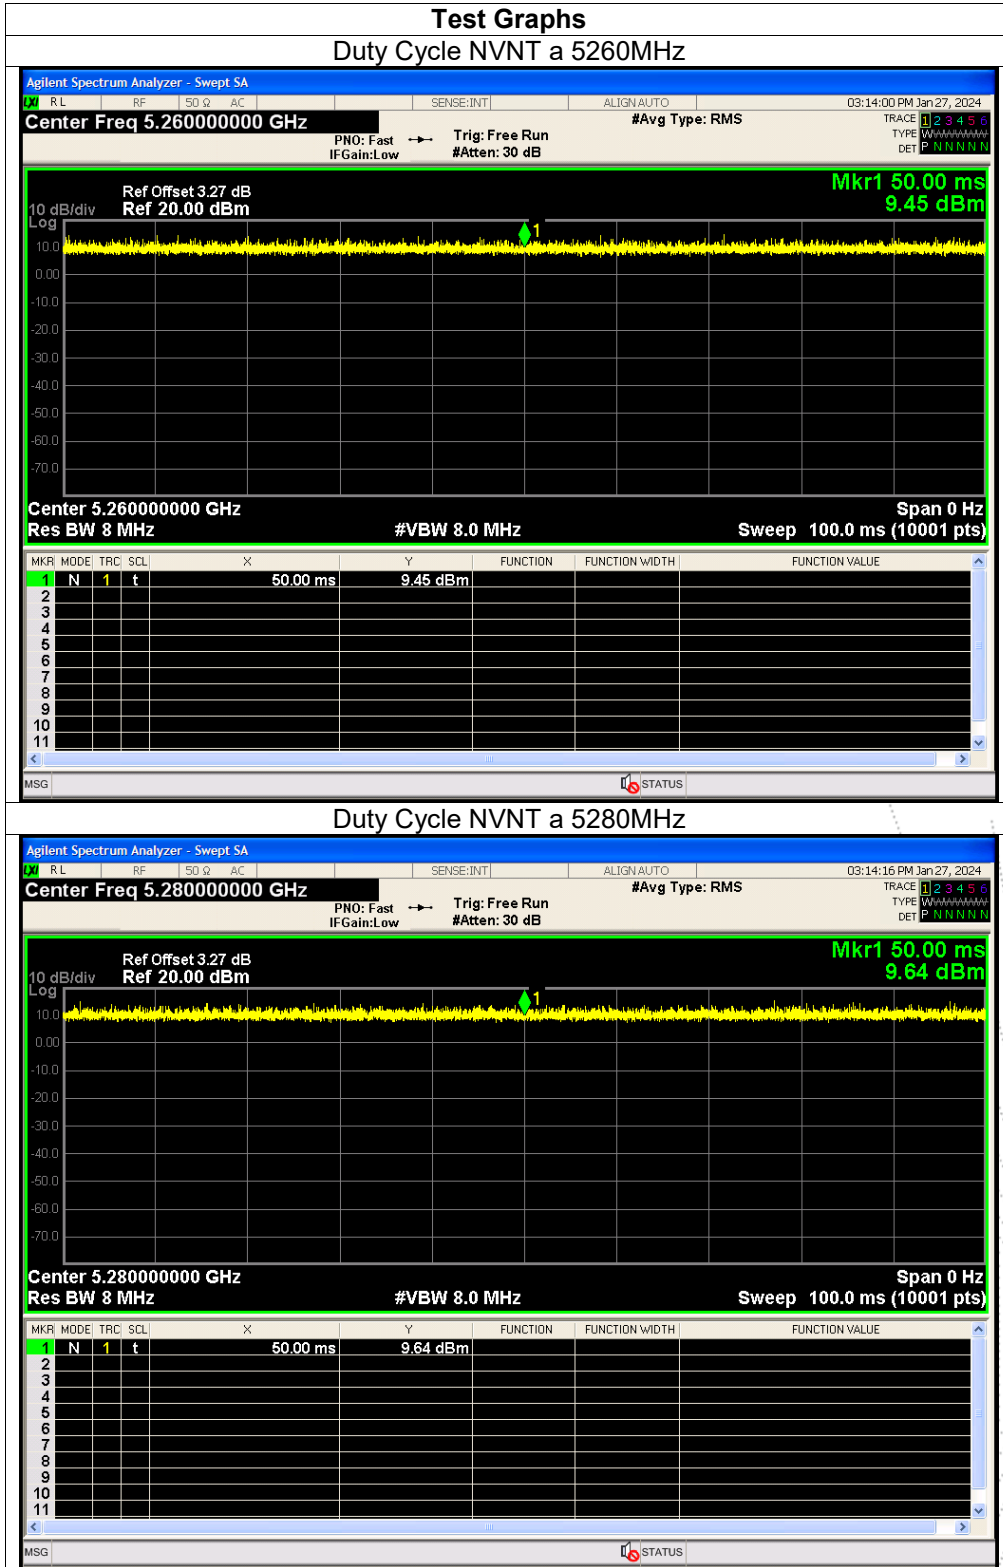


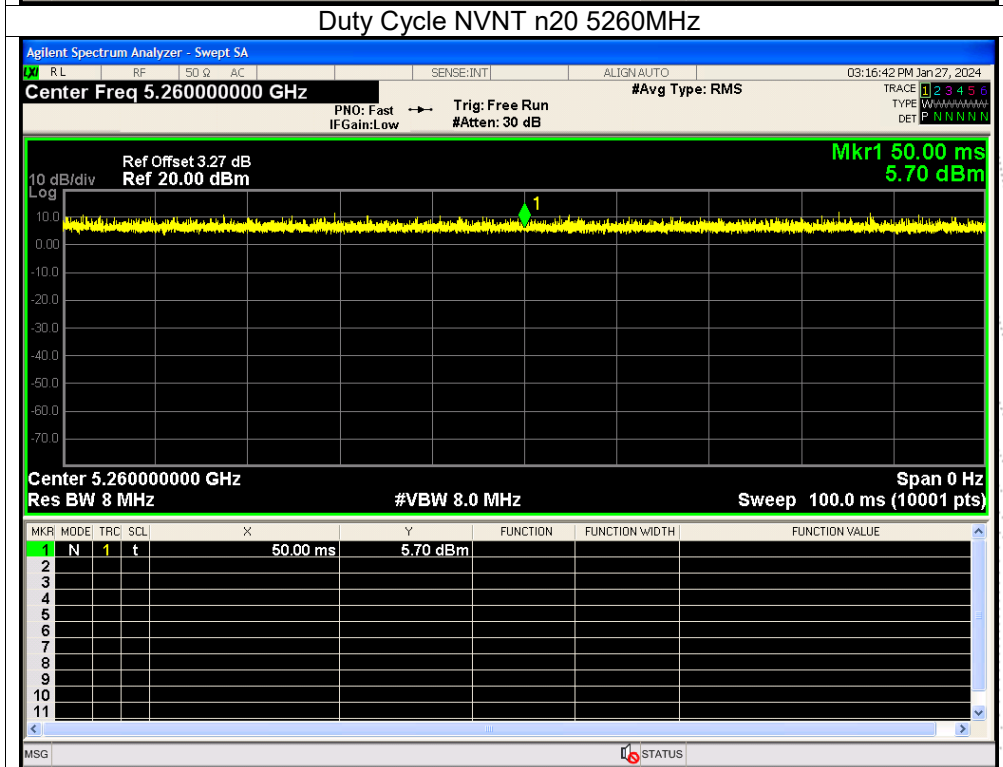
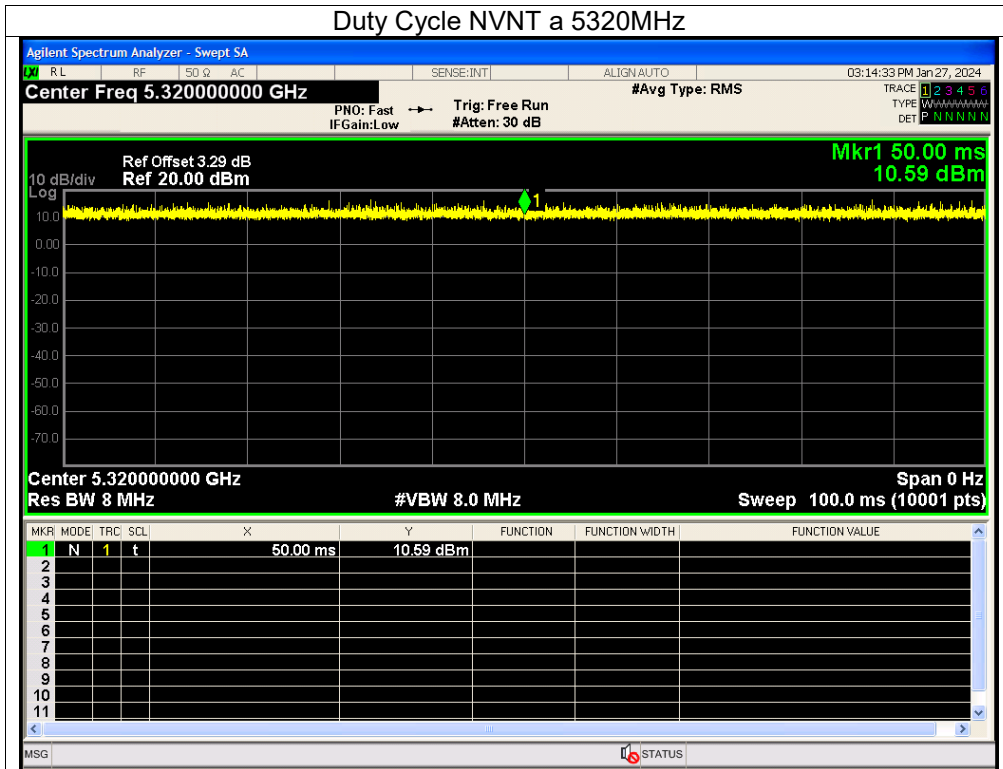


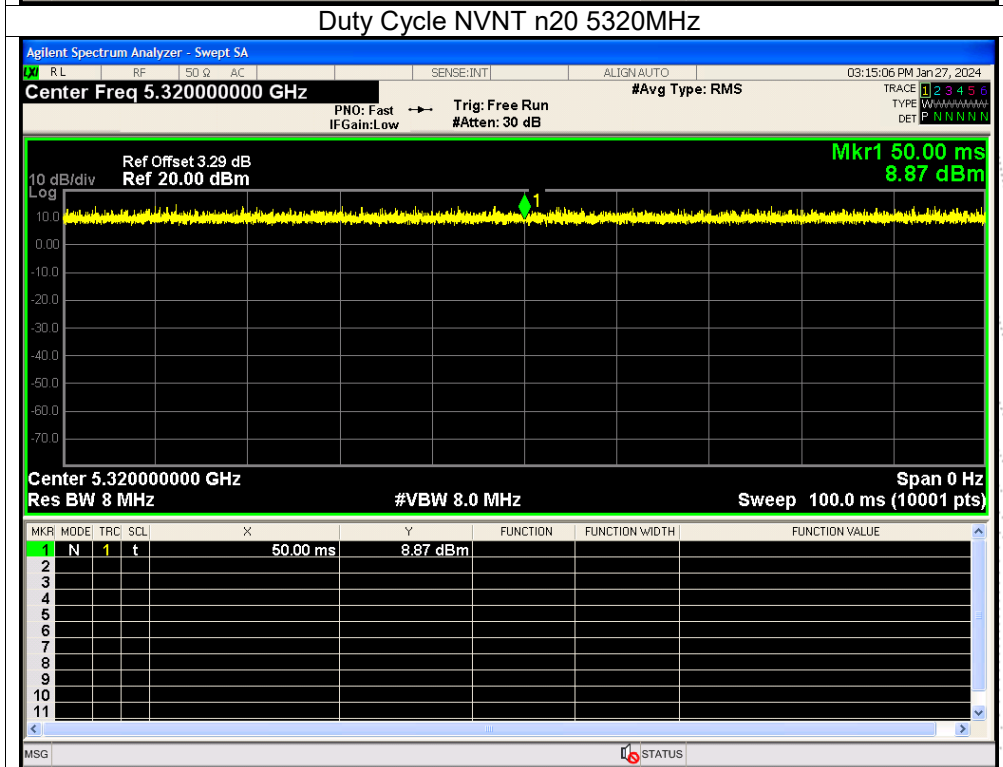
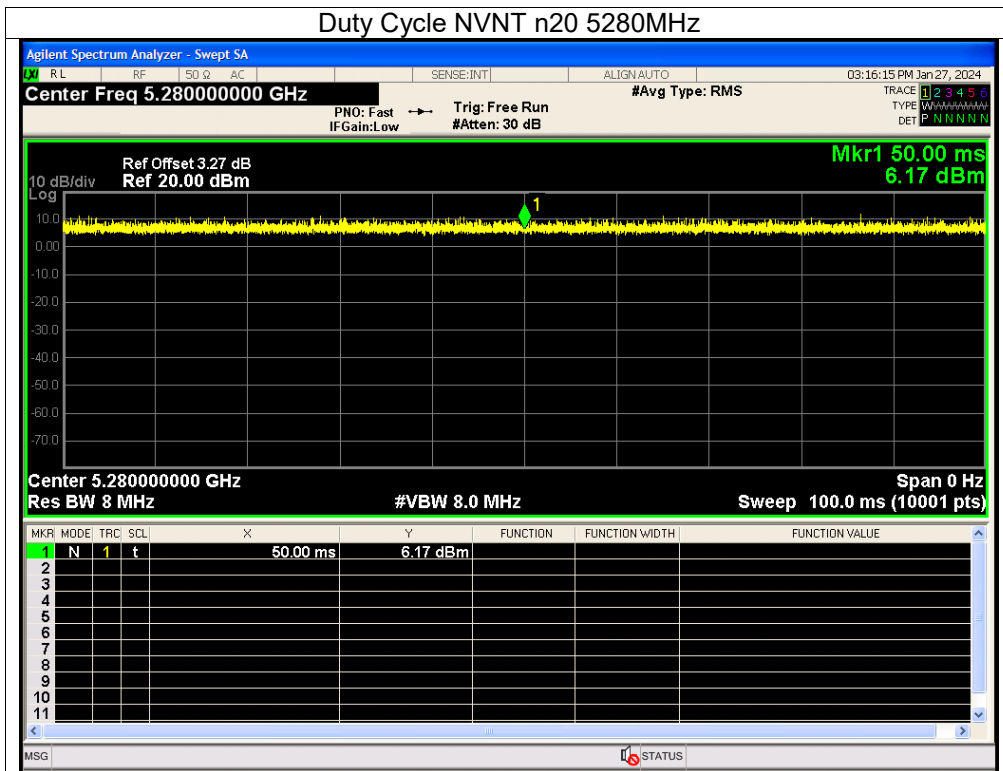


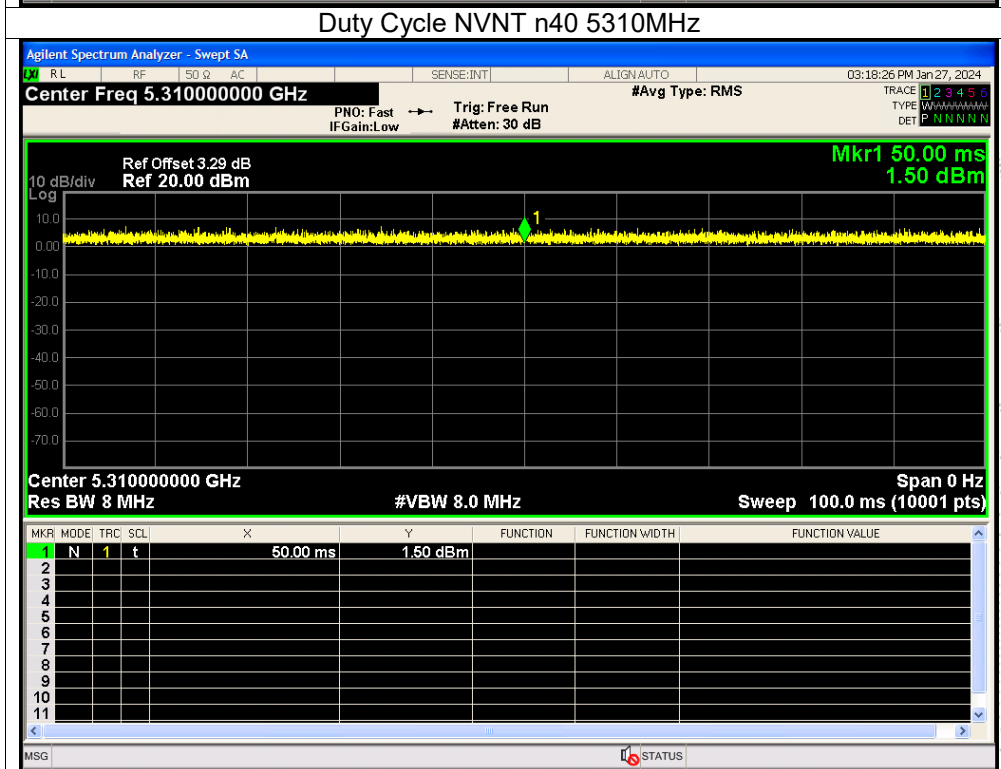
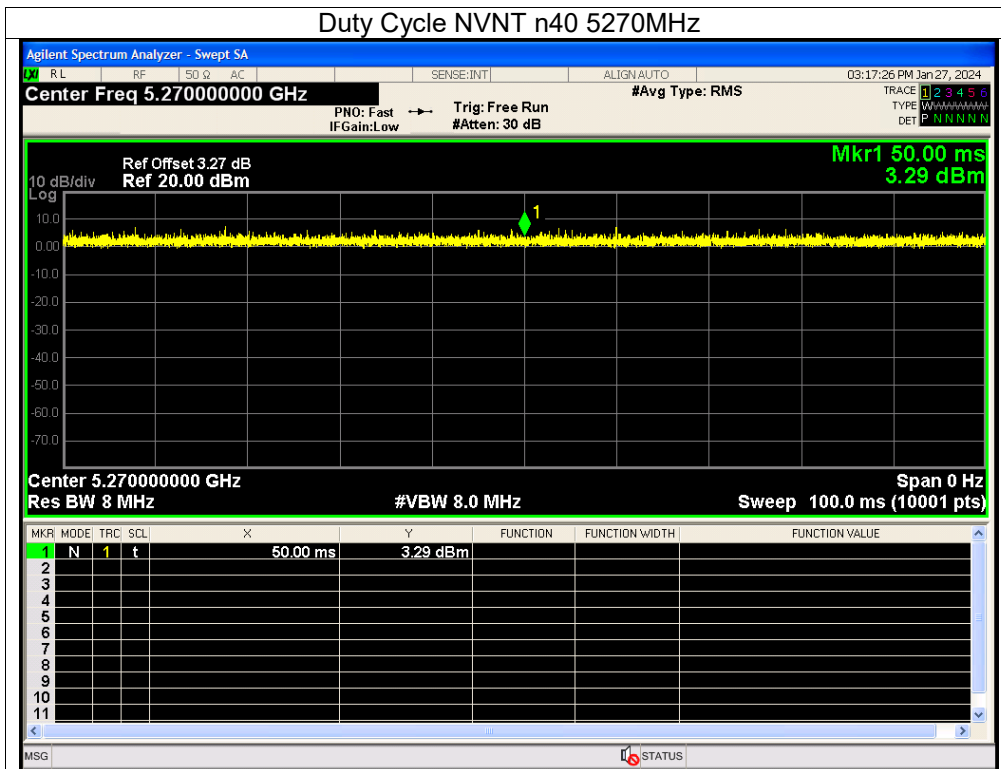


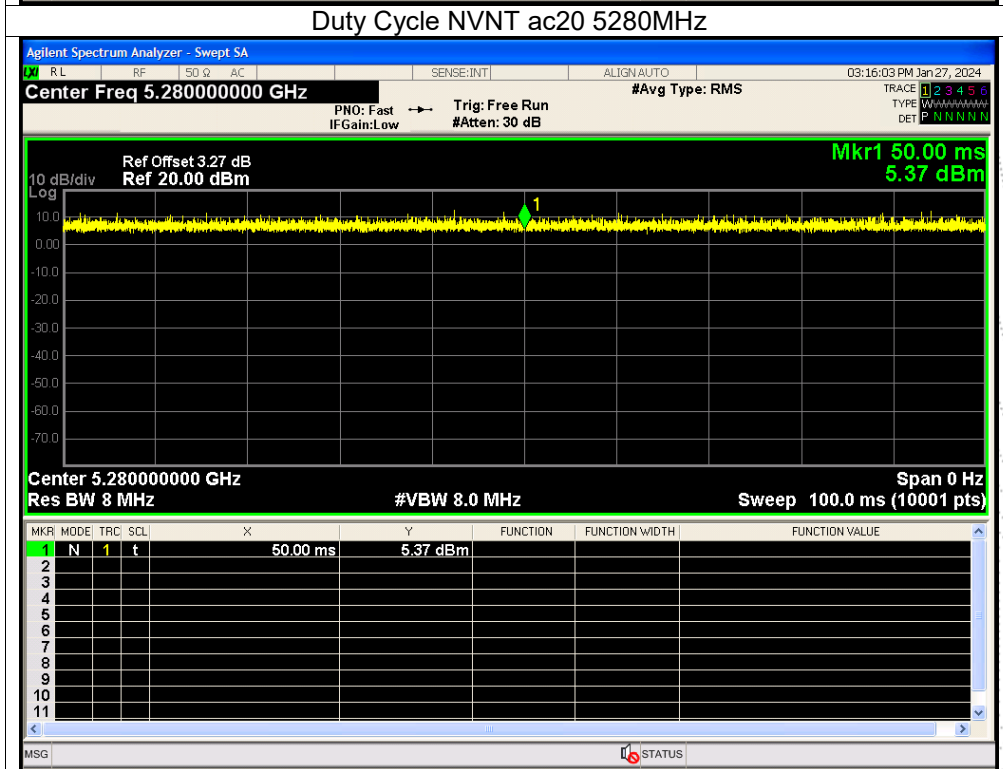
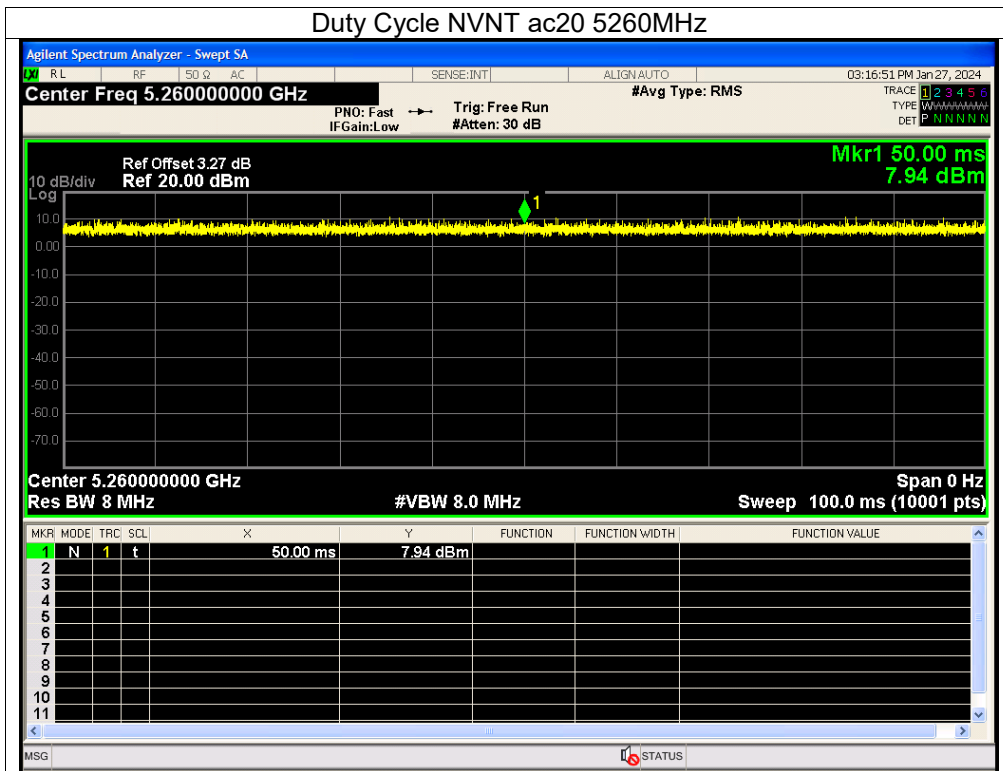


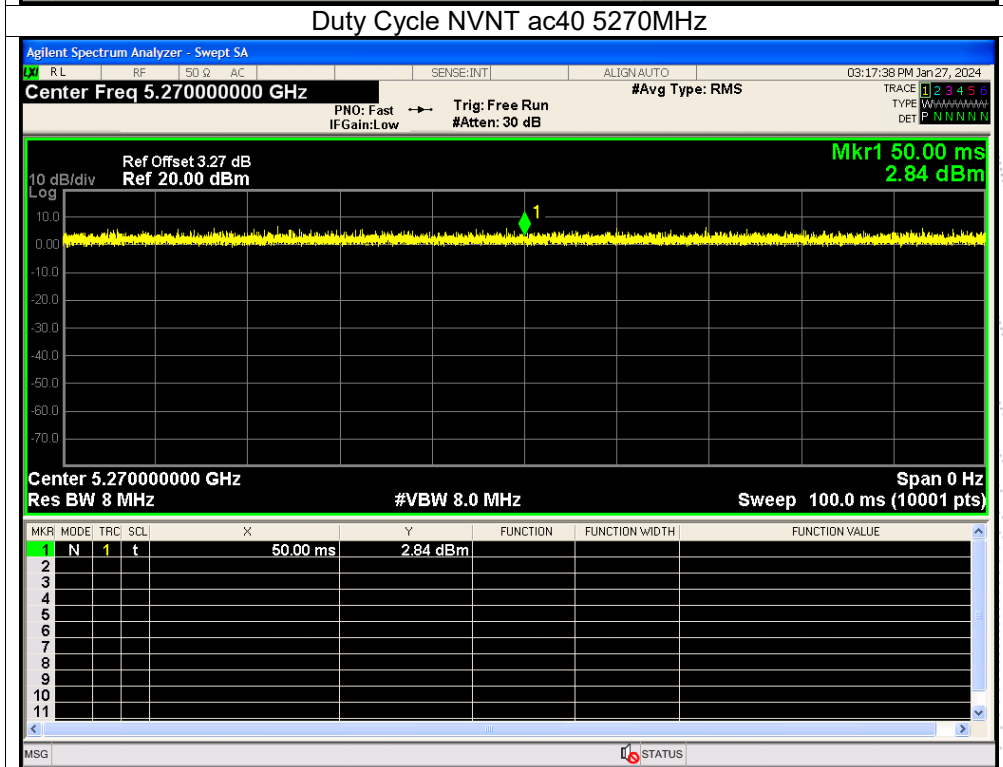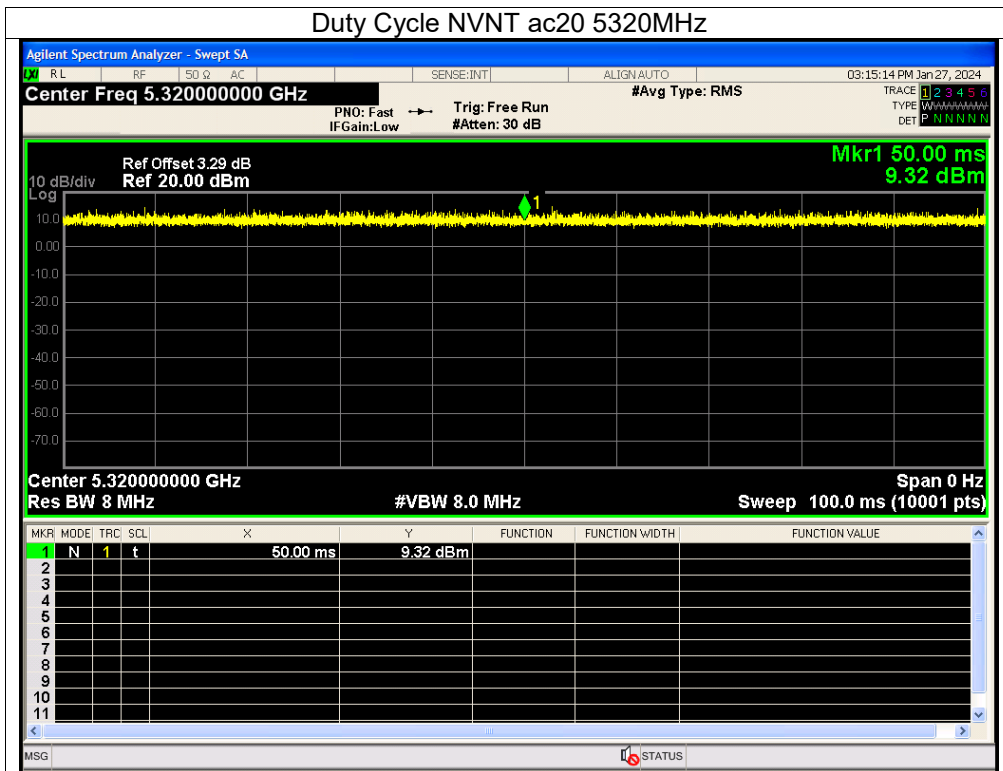

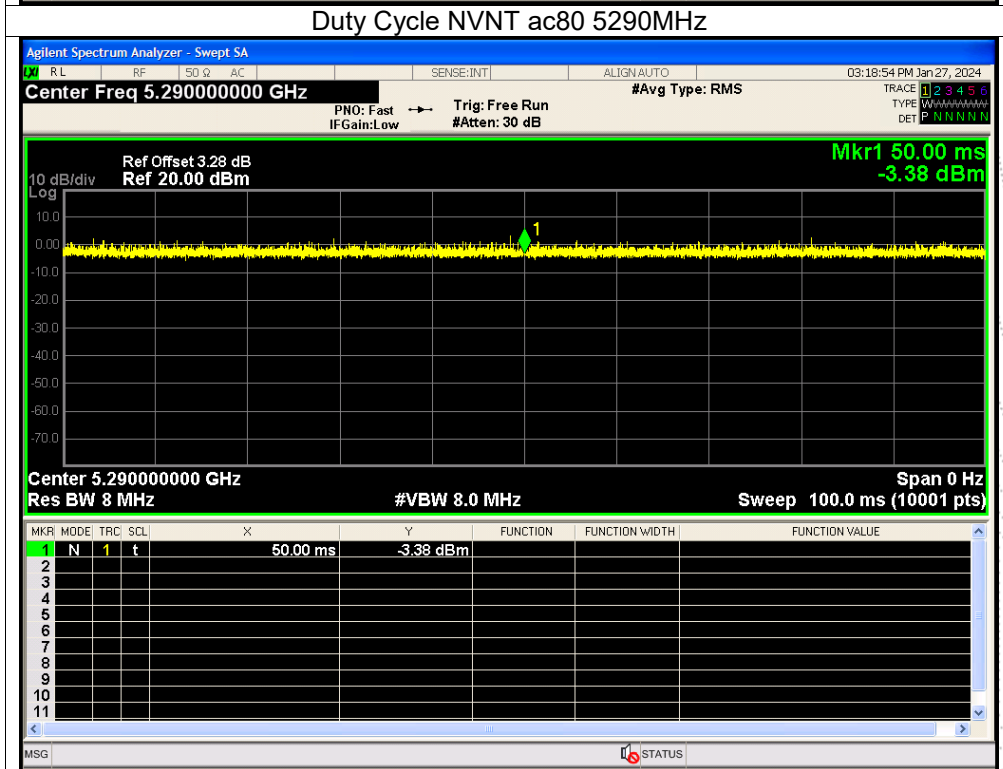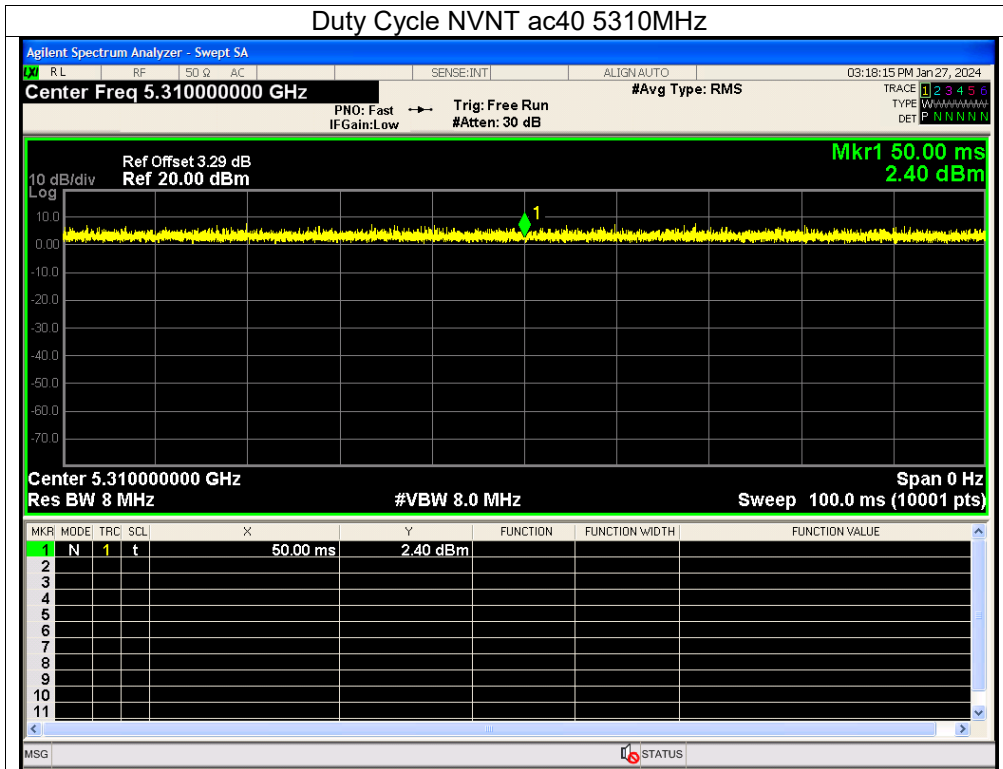


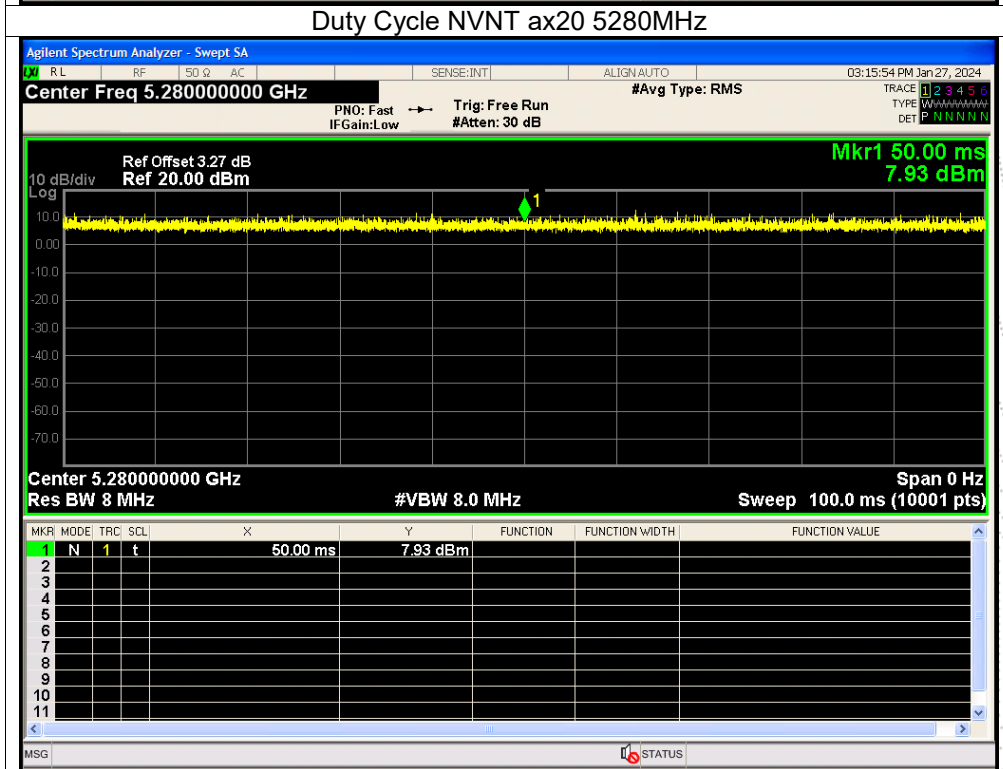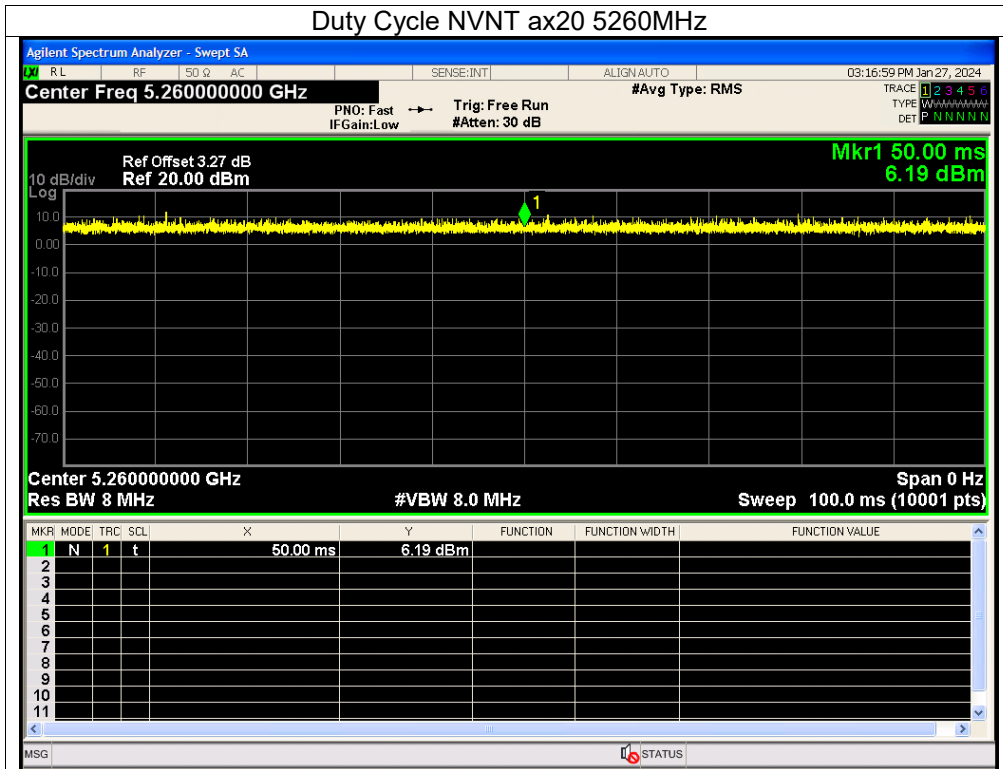

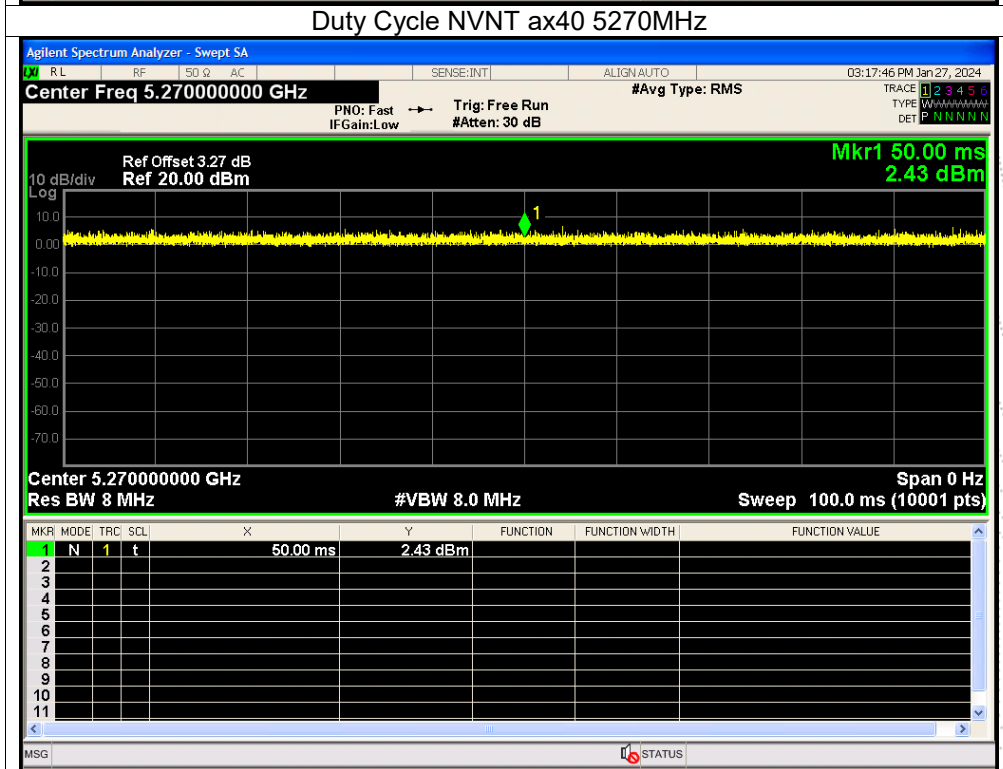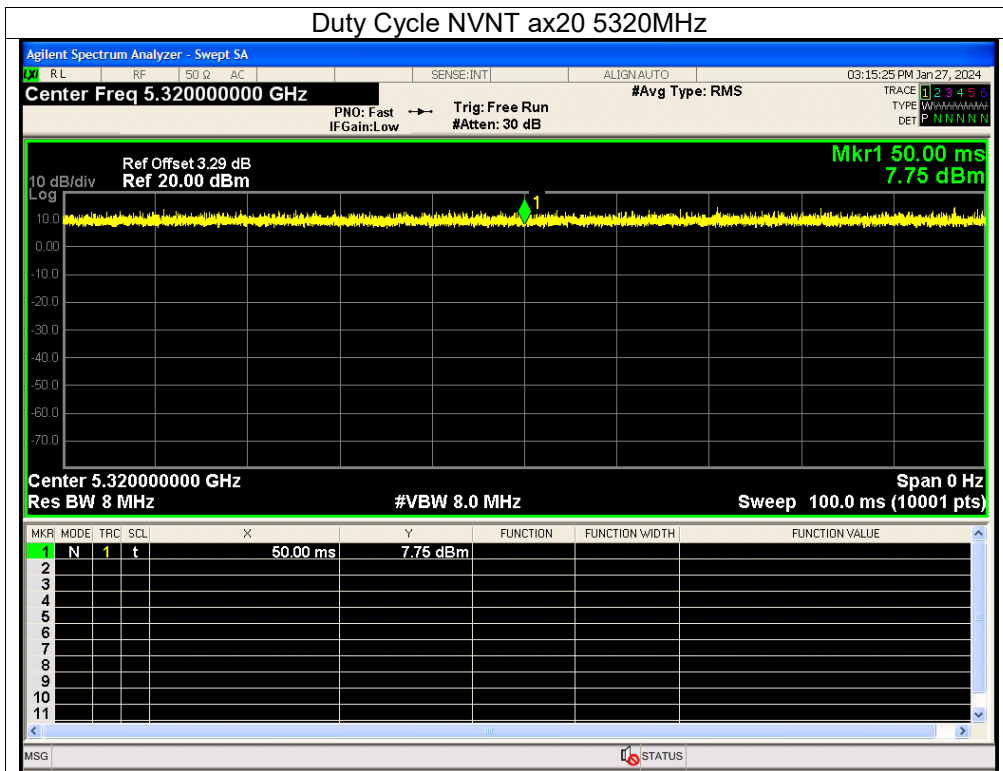


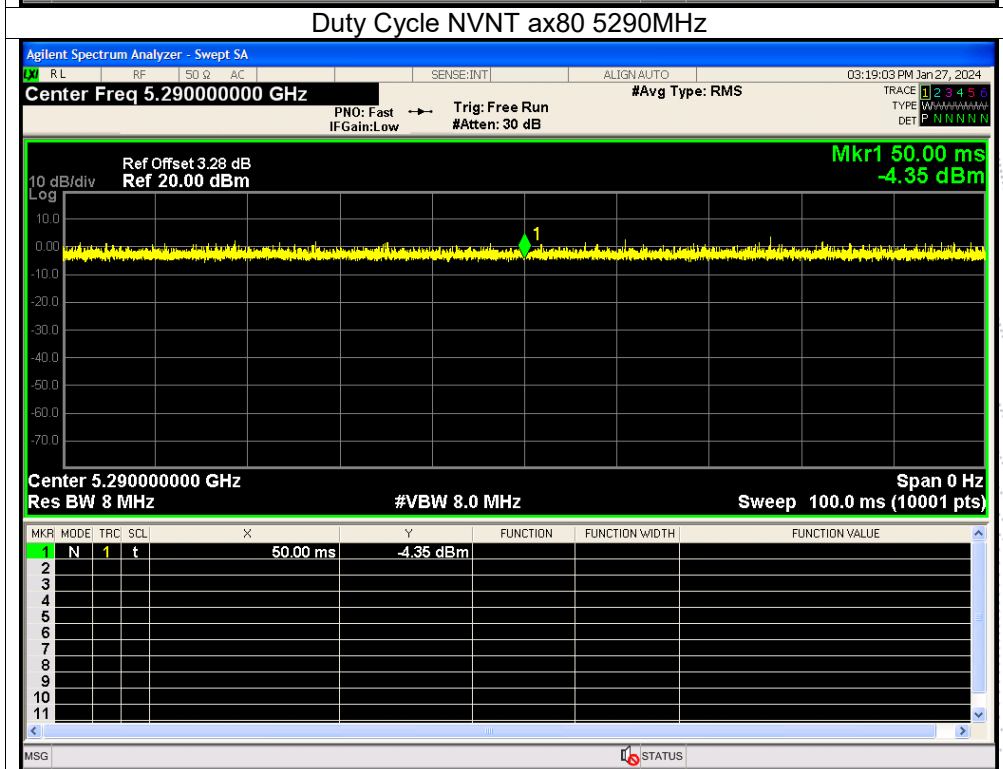
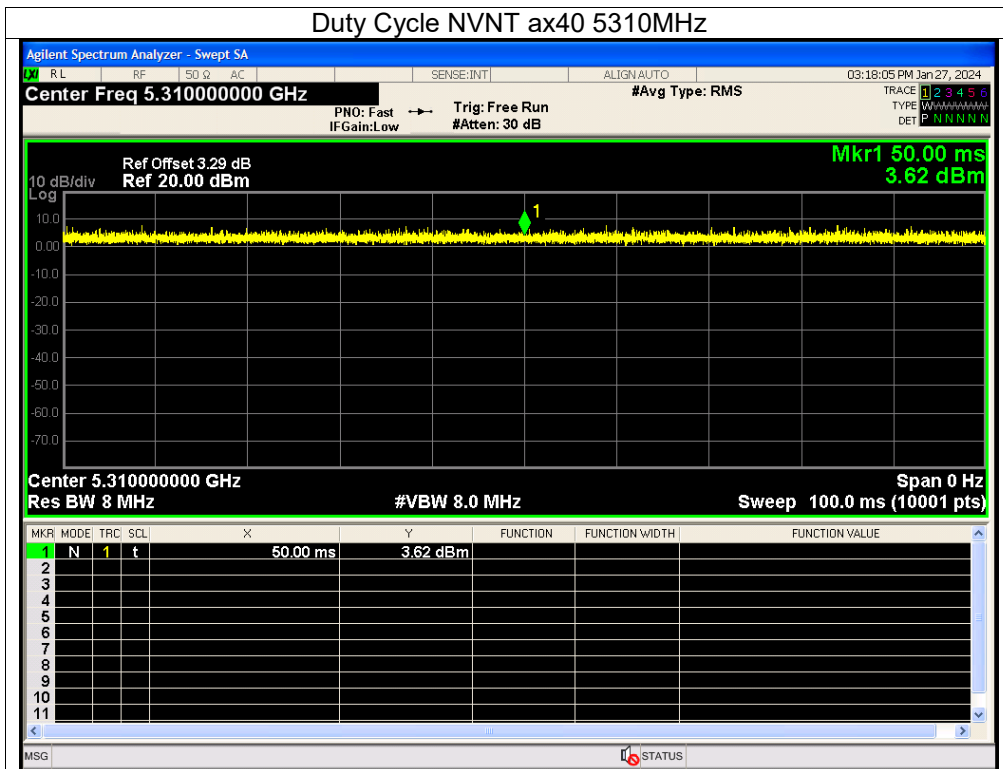




Condition	Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5500	100	0	0
NVNT	a	5580	100	0	0
NVNT	a	5700	100	0	0
NVNT	n20	5500	100	0	0
NVNT	n20	5580	100	0	0
NVNT	n20	5700	100	0	0
NVNT	n40	5510	100	0	0
NVNT	n40	5550	100	0	0
NVNT	n40	5670	100	0	0
NVNT	ac20	5500	100	0	0
NVNT	ac20	5580	100	0	0
NVNT	ac20	5700	100	0	0
NVNT	ac40	5510	100	0	0
NVNT	ac40	5550	100	0	0
NVNT	ac40	5670	100	0	0
NVNT	ac80	5530	100	0	0
NVNT	ax20	5500	100	0	0
NVNT	ax20	5580	100	0	0
NVNT	ax20	5700	100	0	0
NVNT	ax40	5510	100	0	0
NVNT	ax40	5550	100	0	0
NVNT	ax40	5670	100	0	0
NVNT	ax80	5530	100	0	0


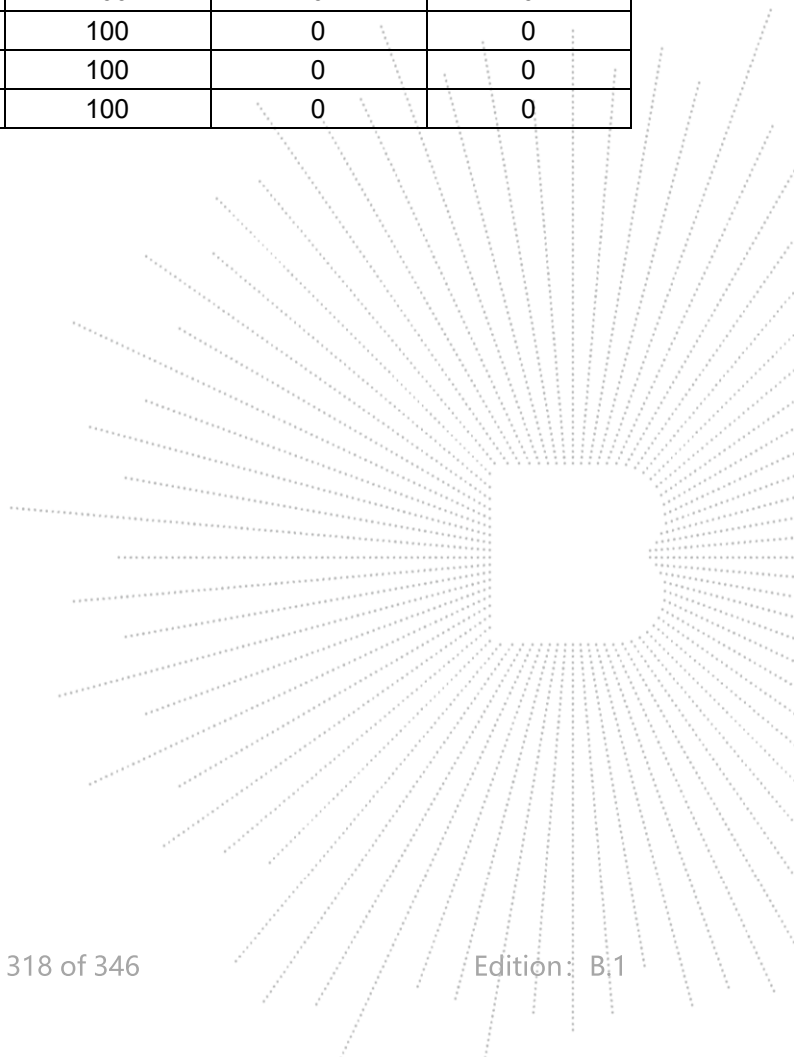




Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A. Plot.


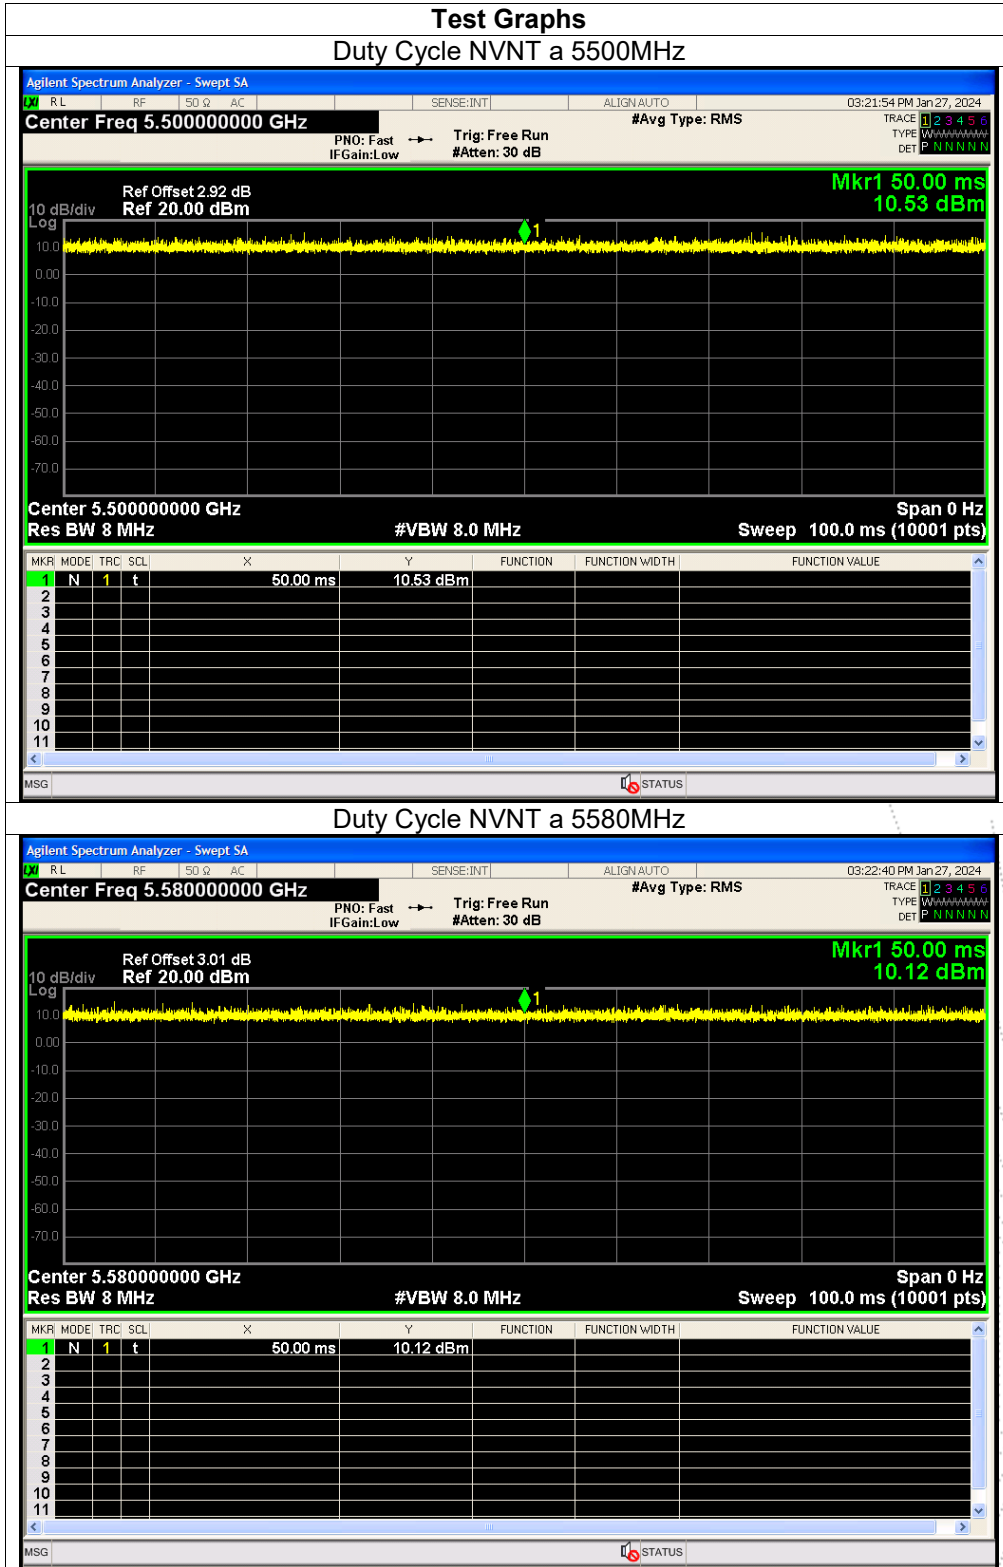


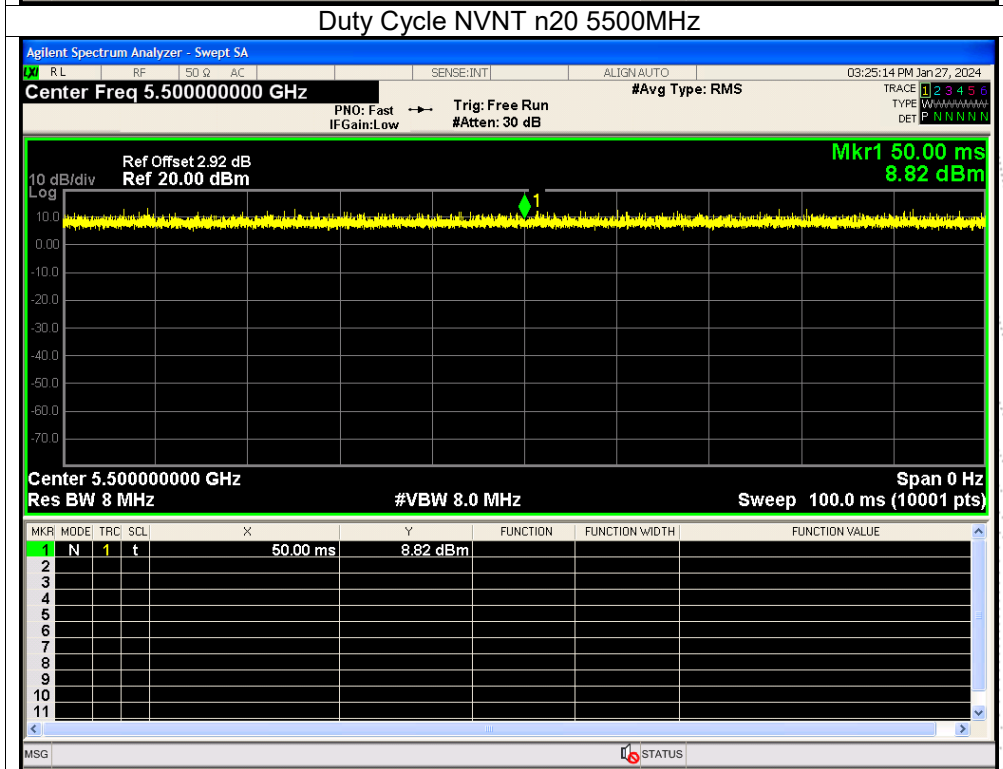
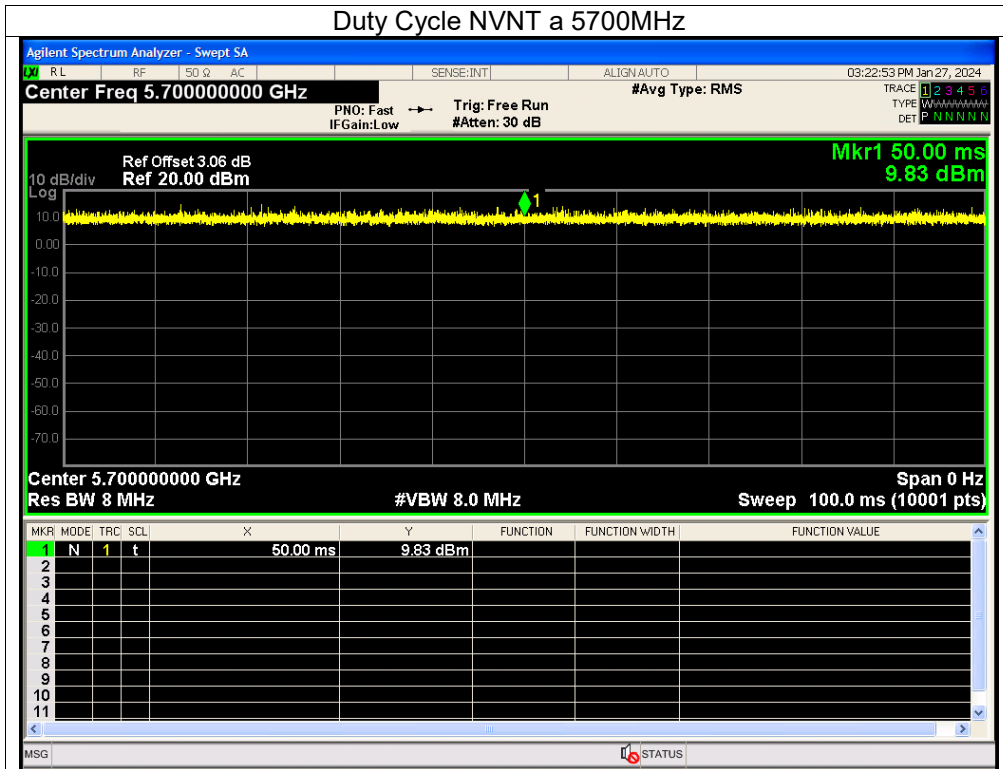


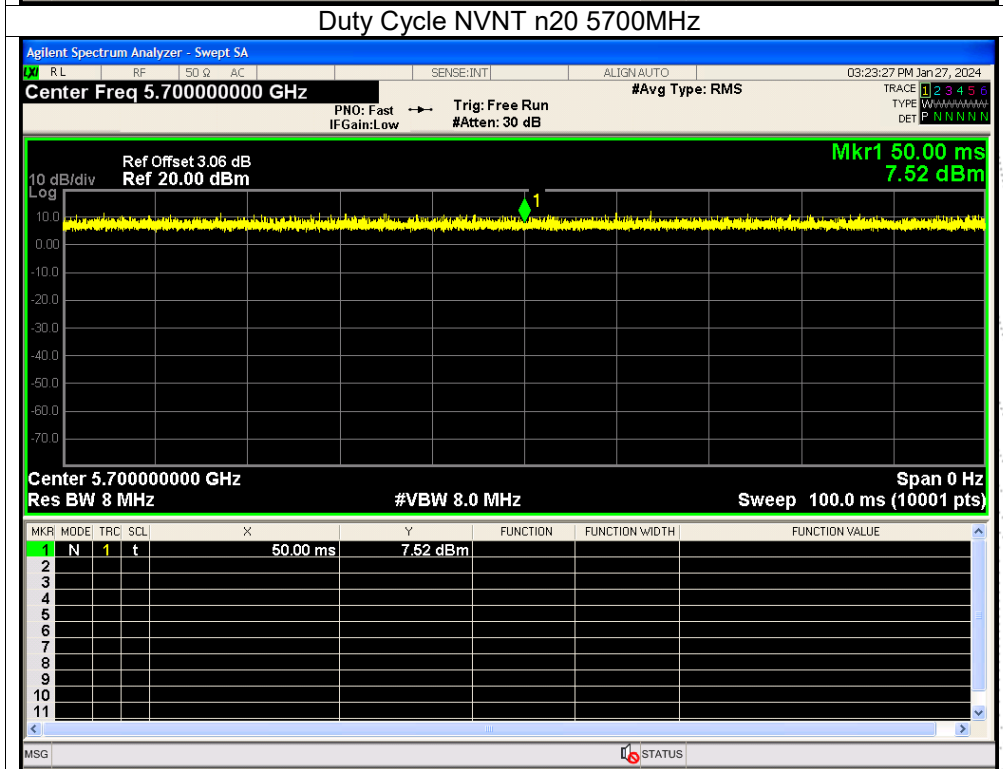
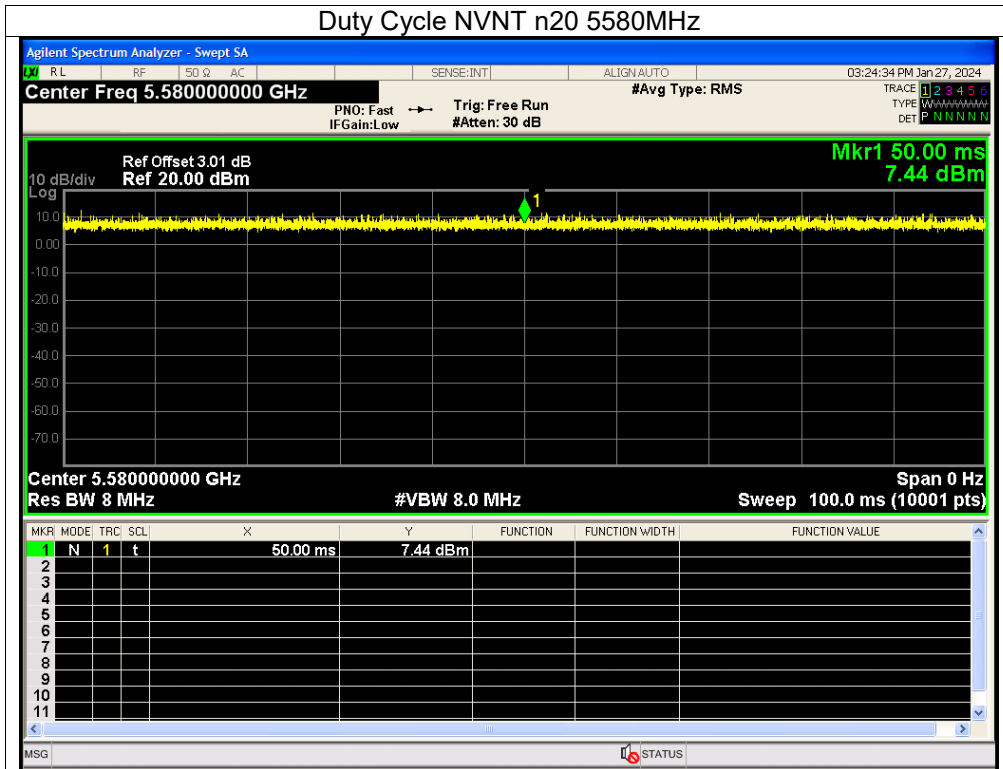


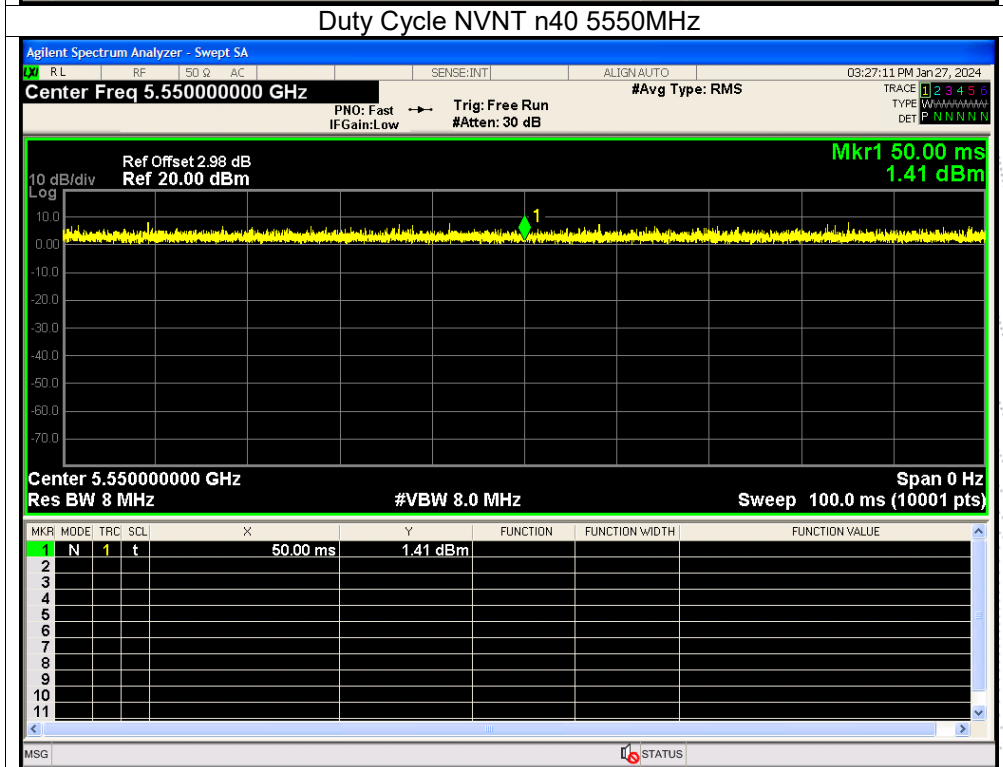
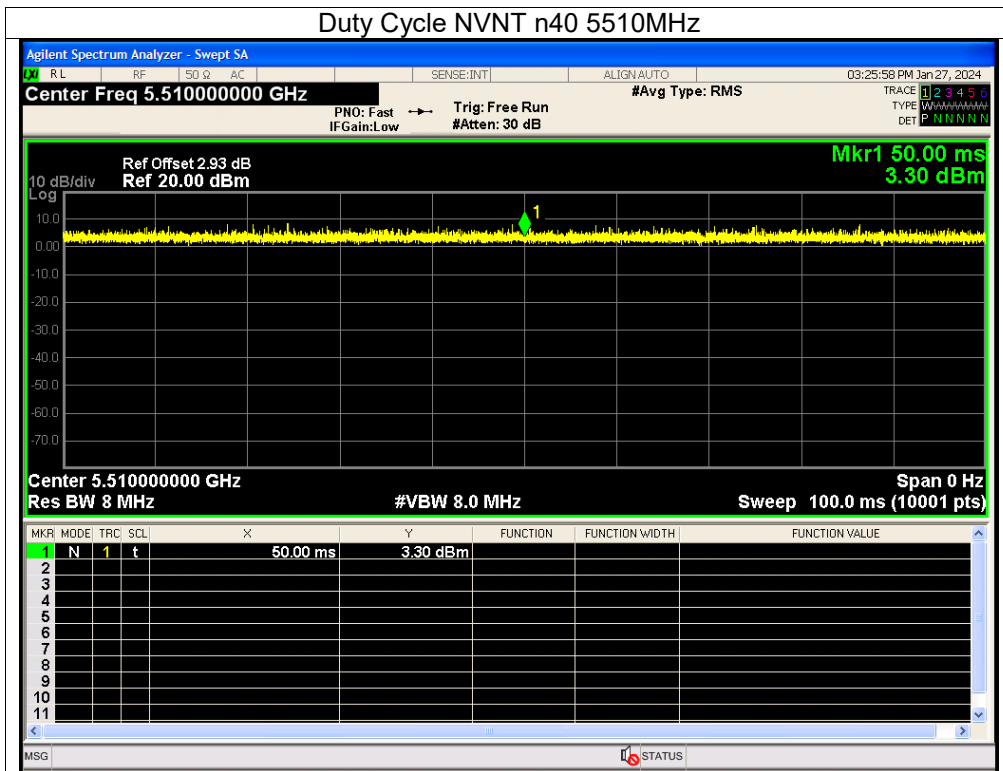


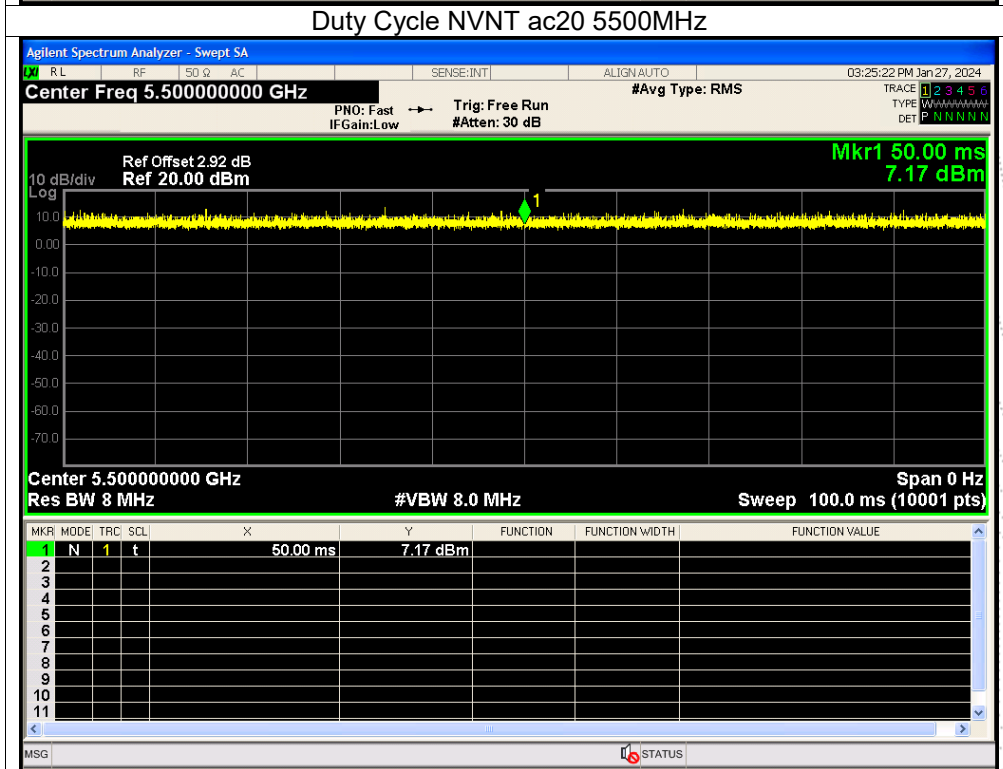
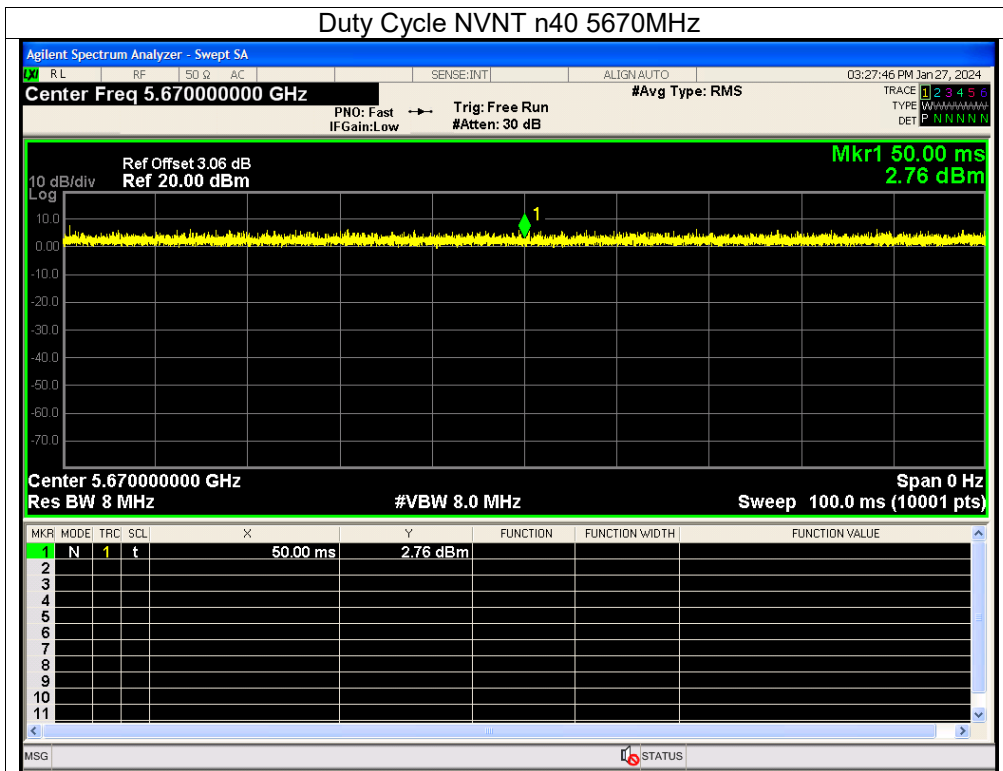


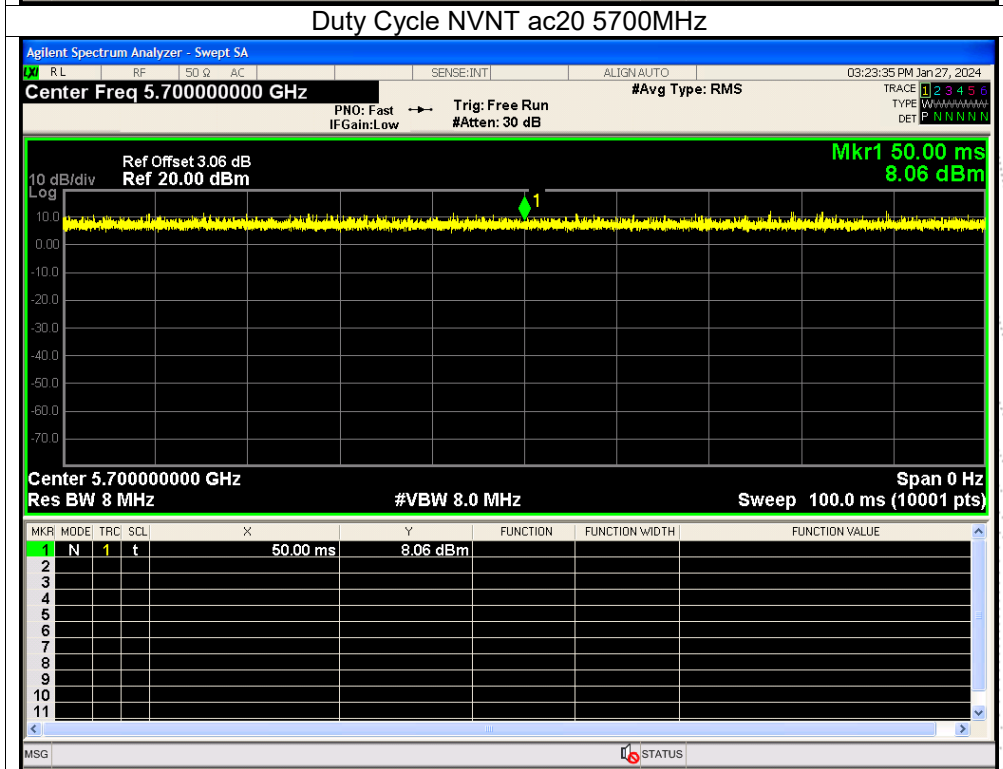
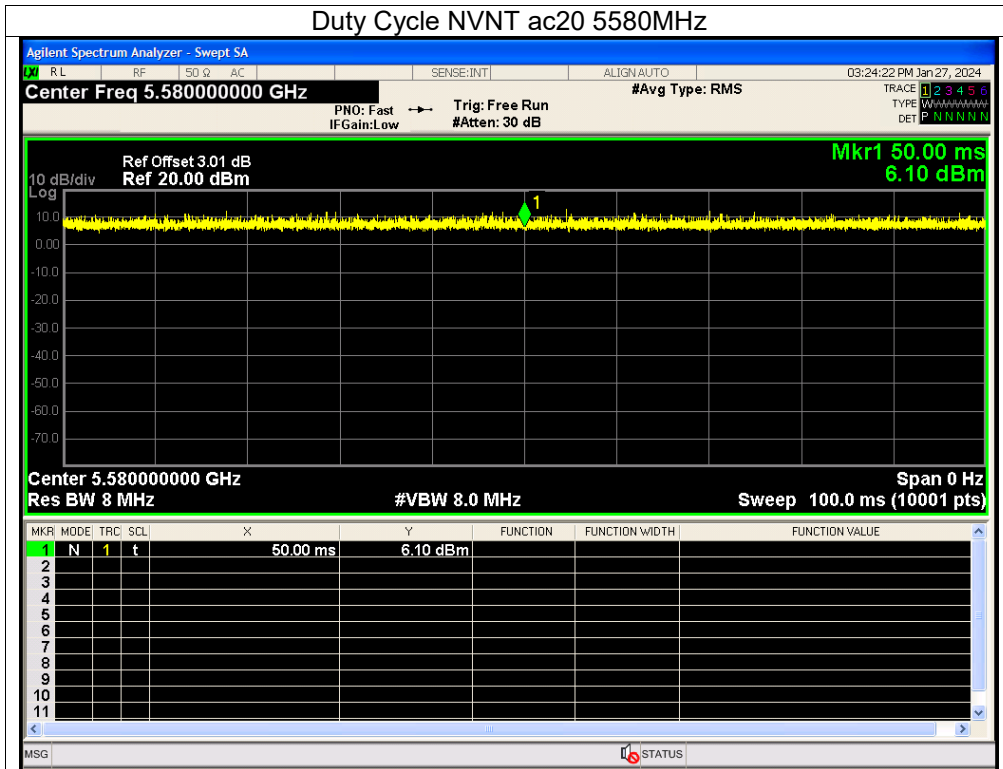


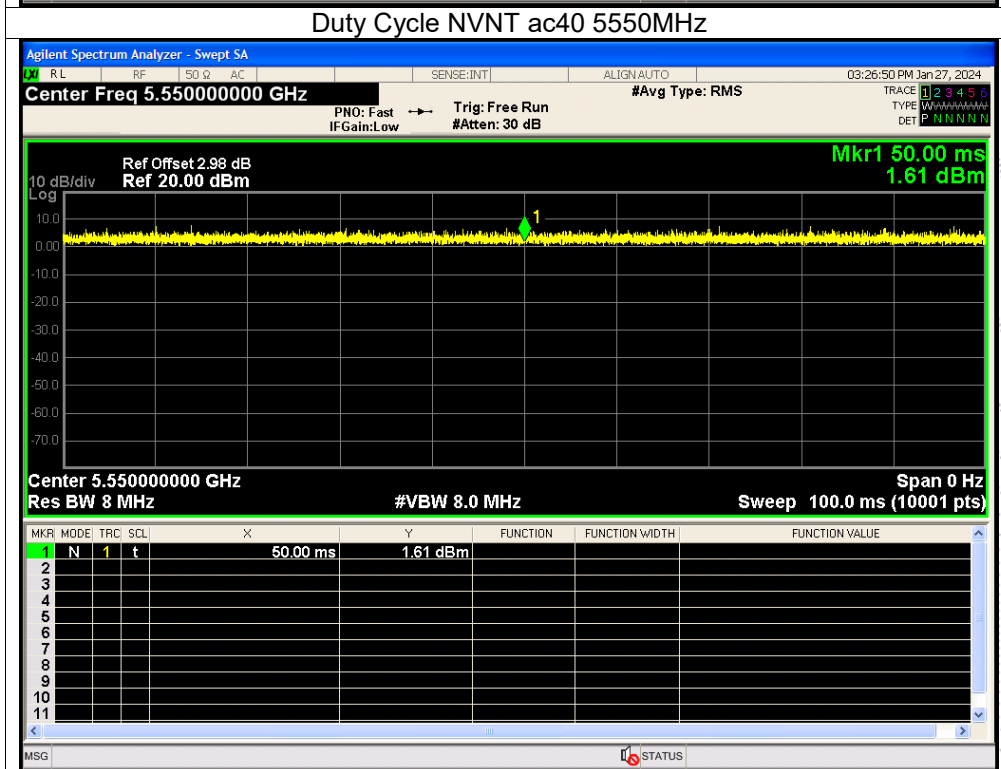
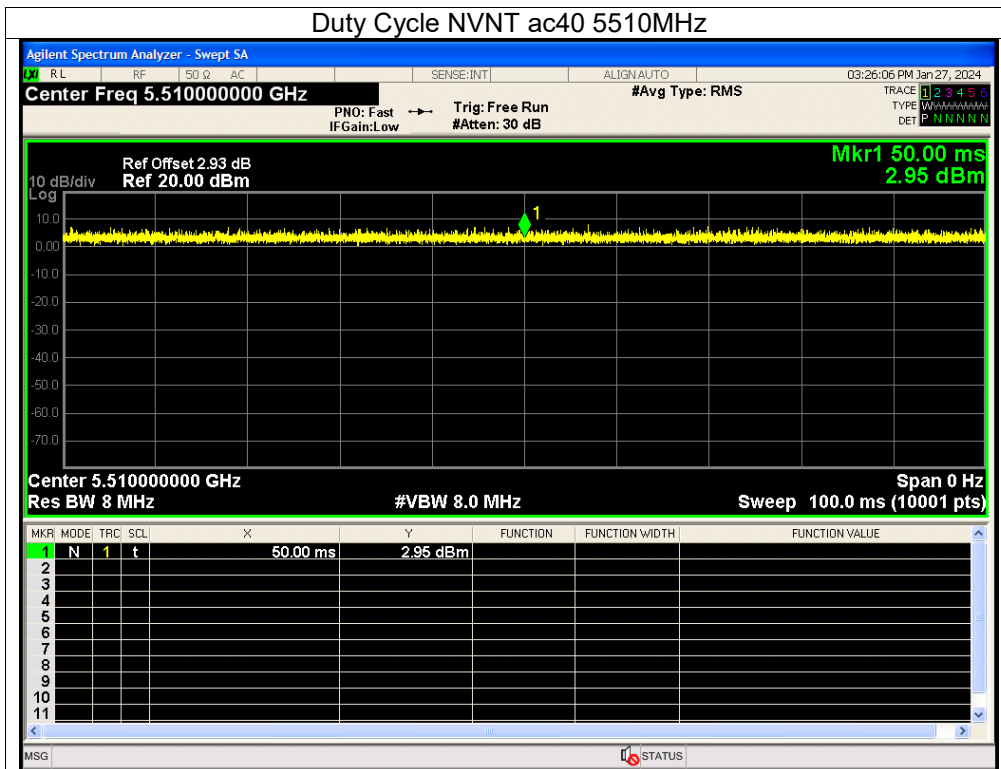


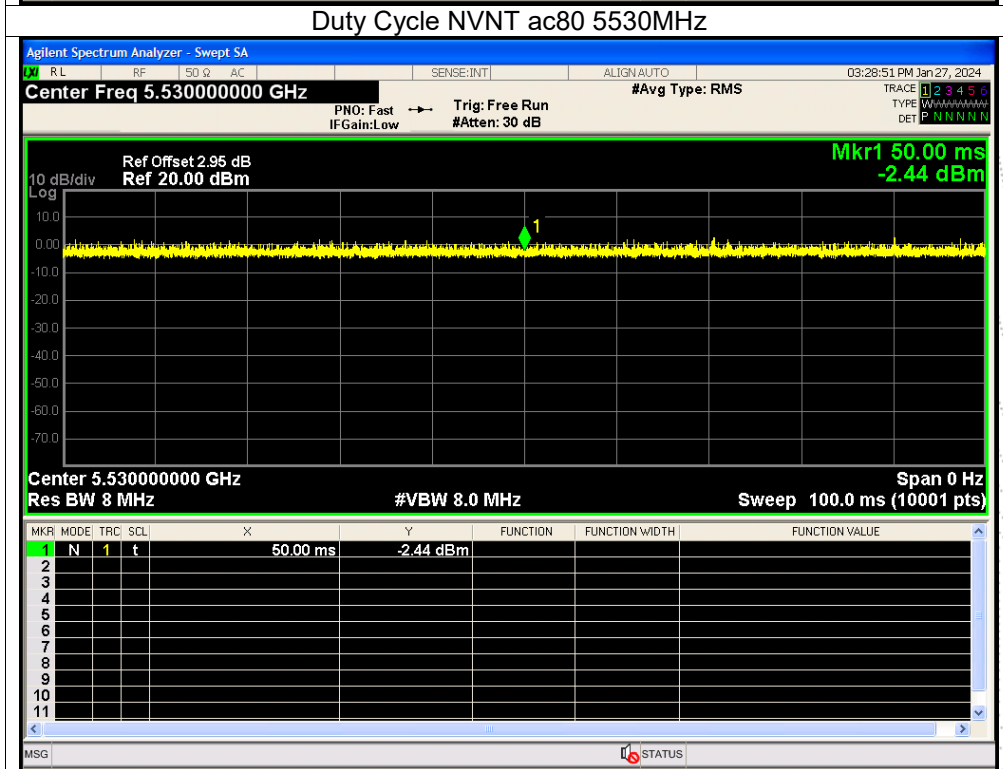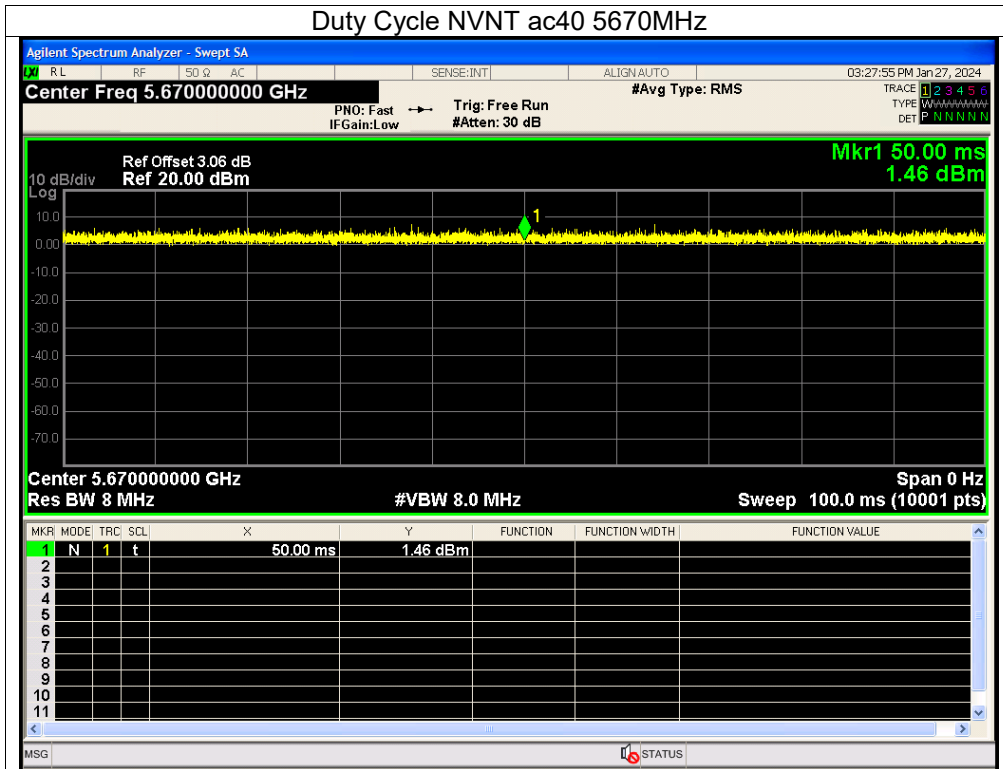

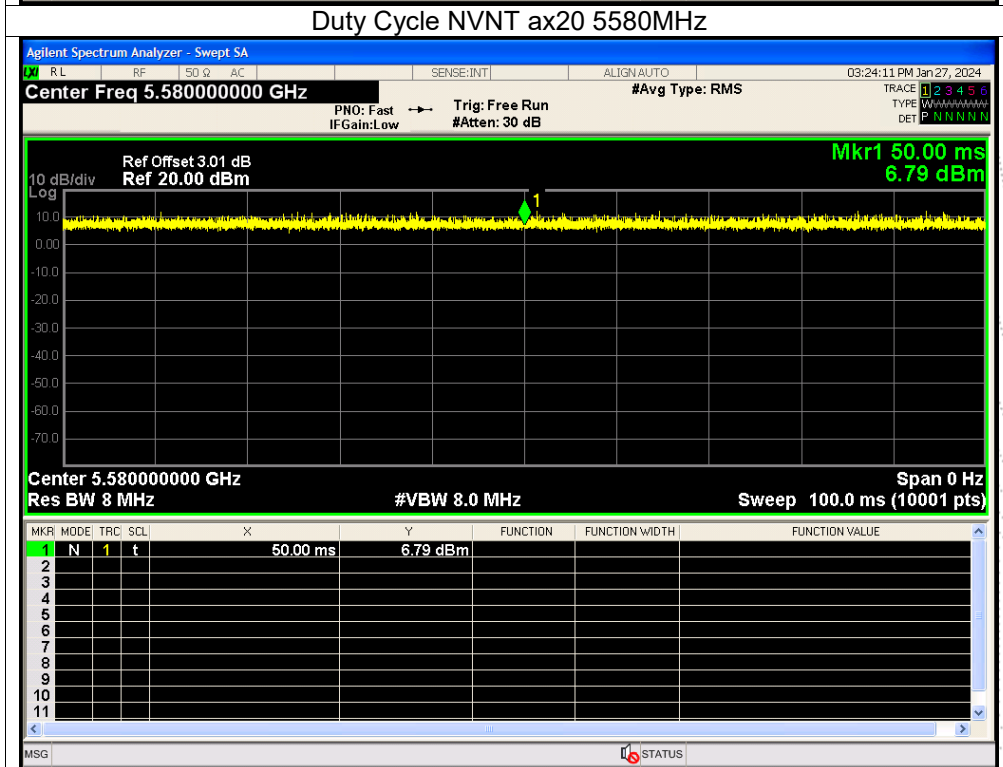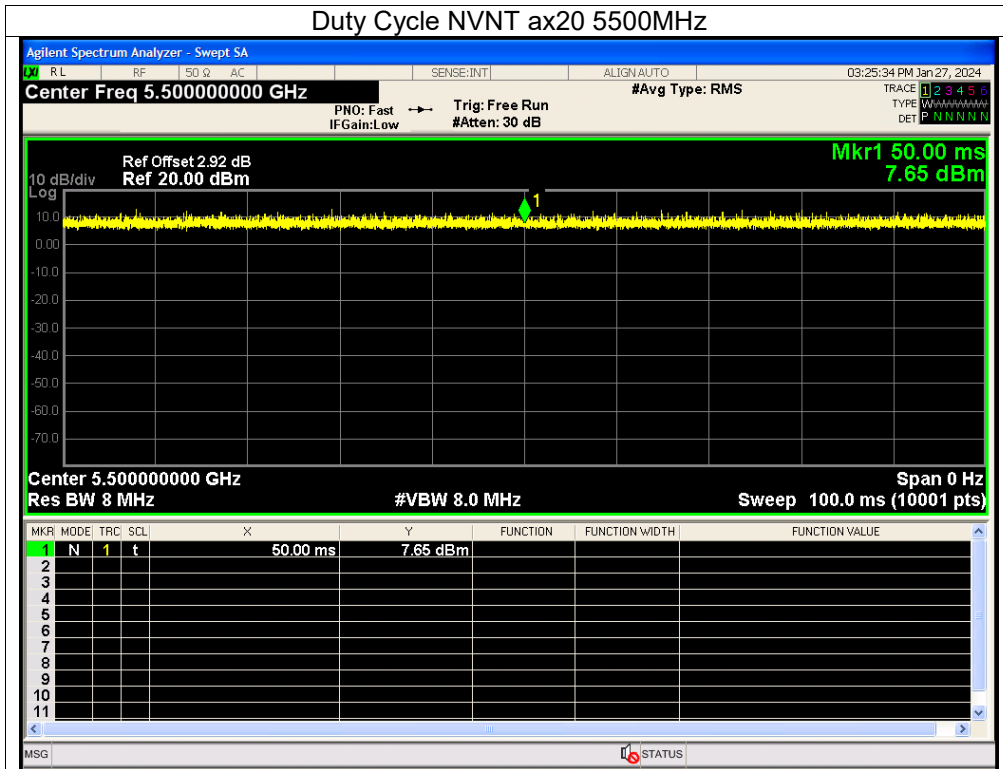


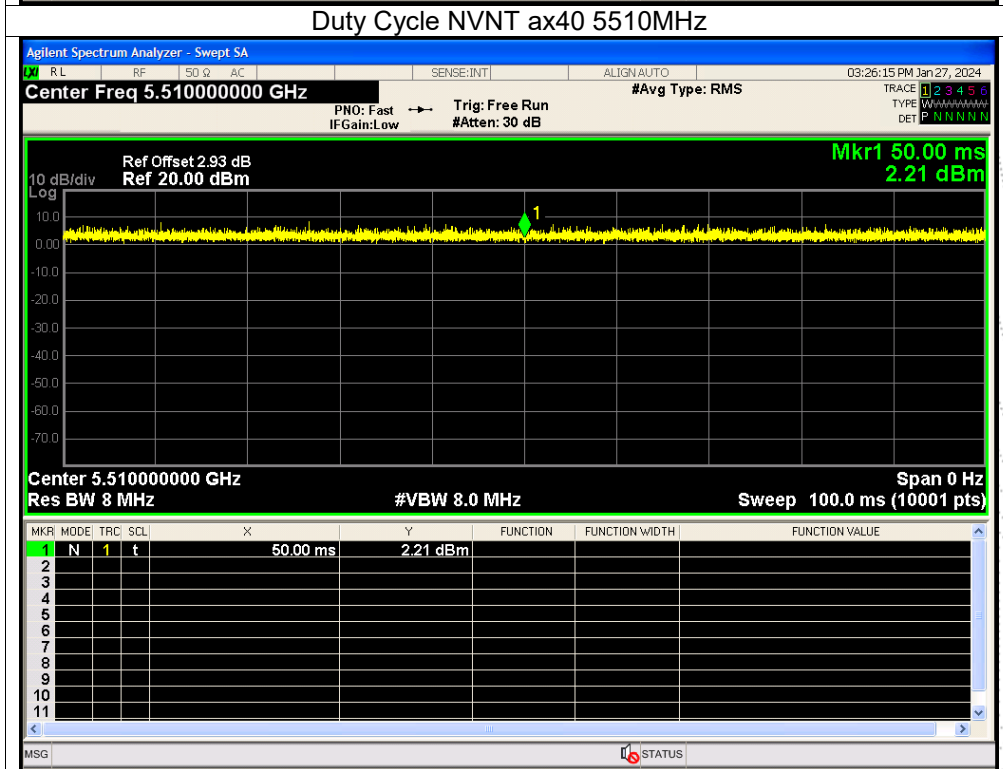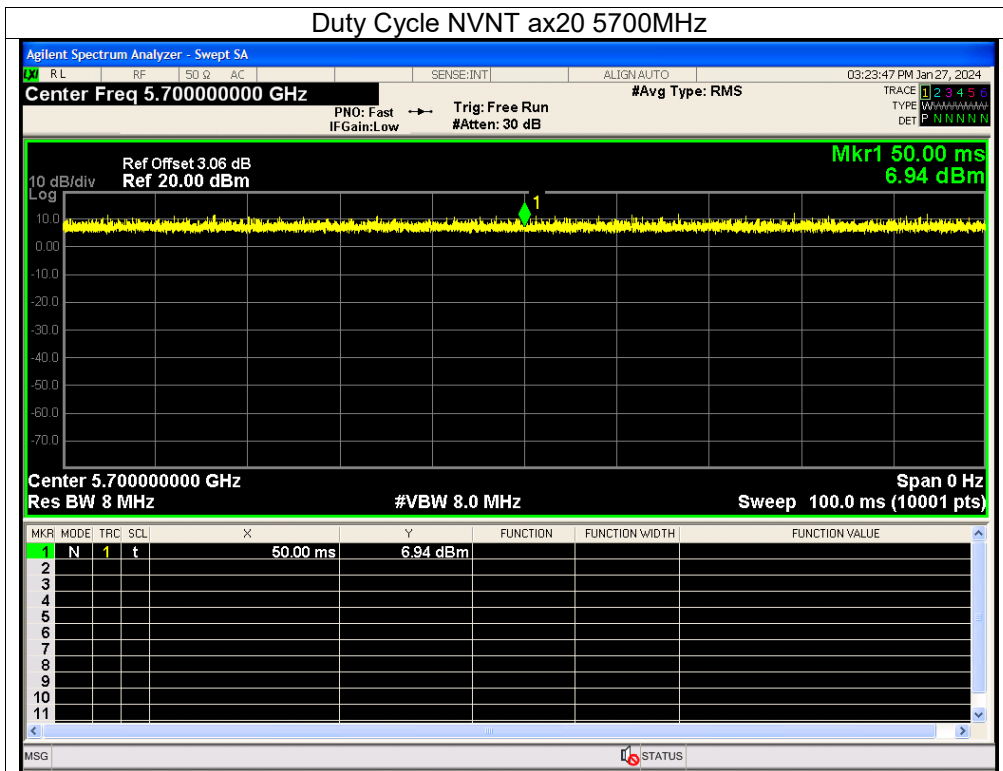

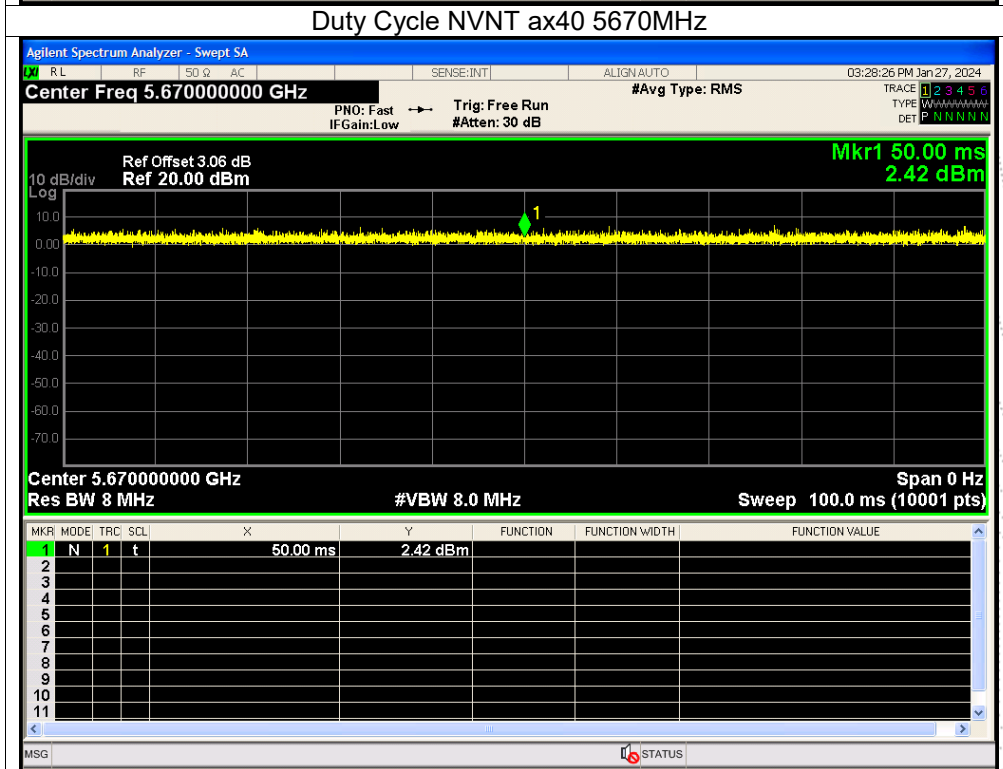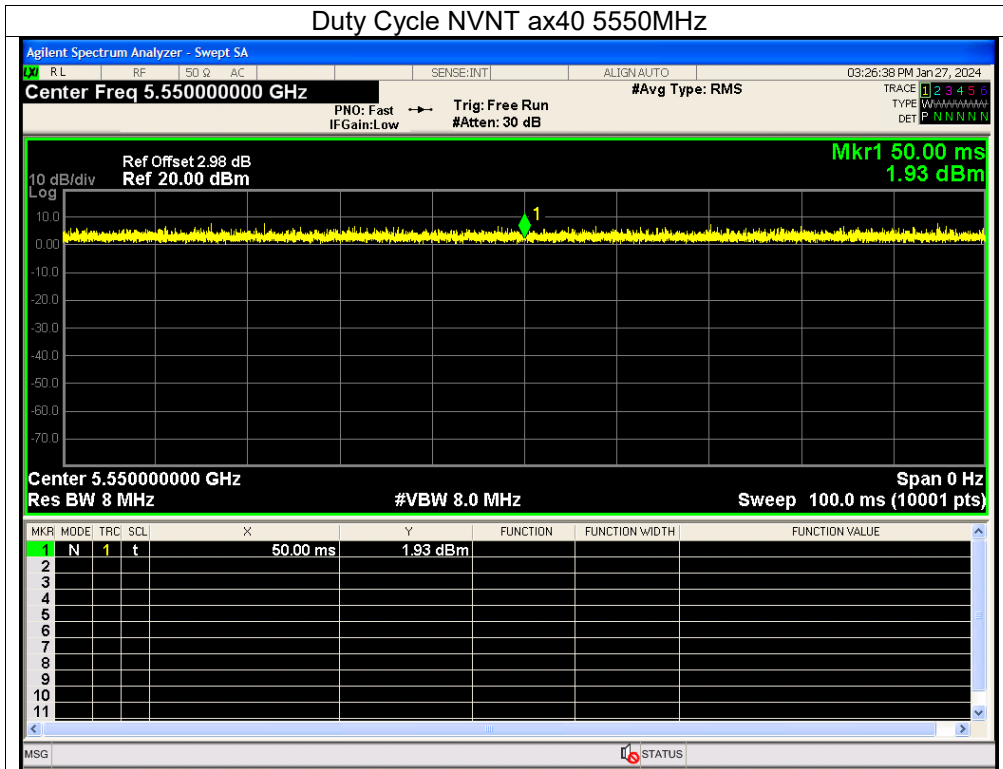

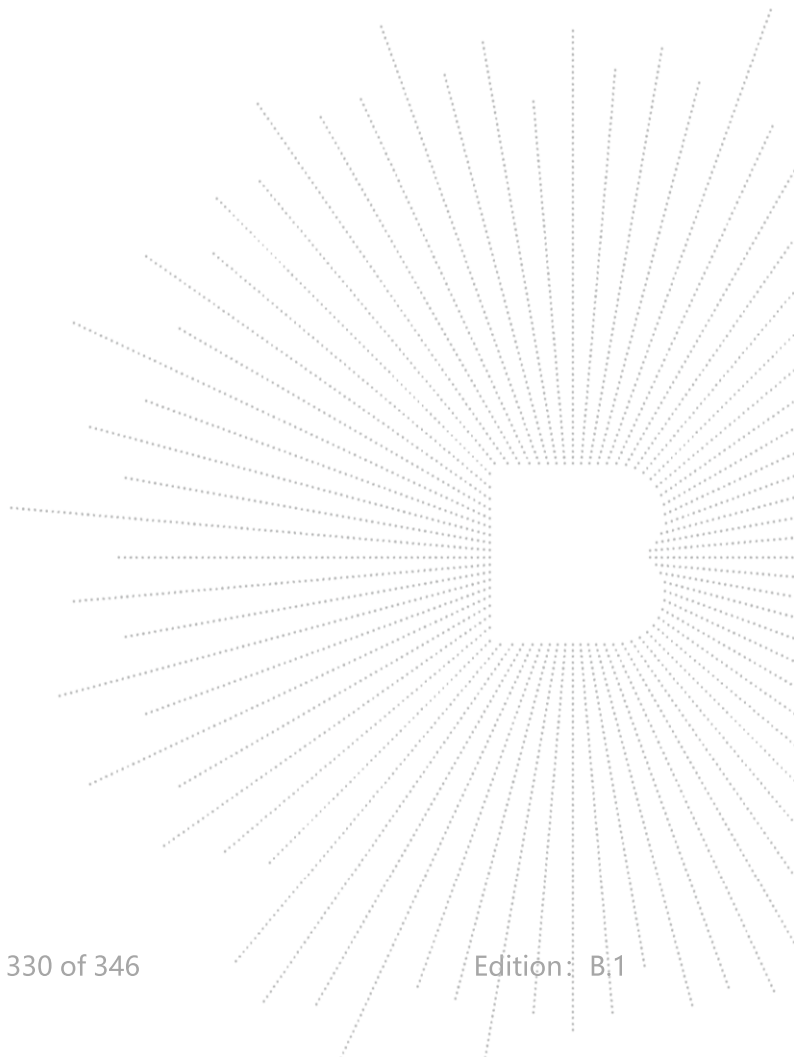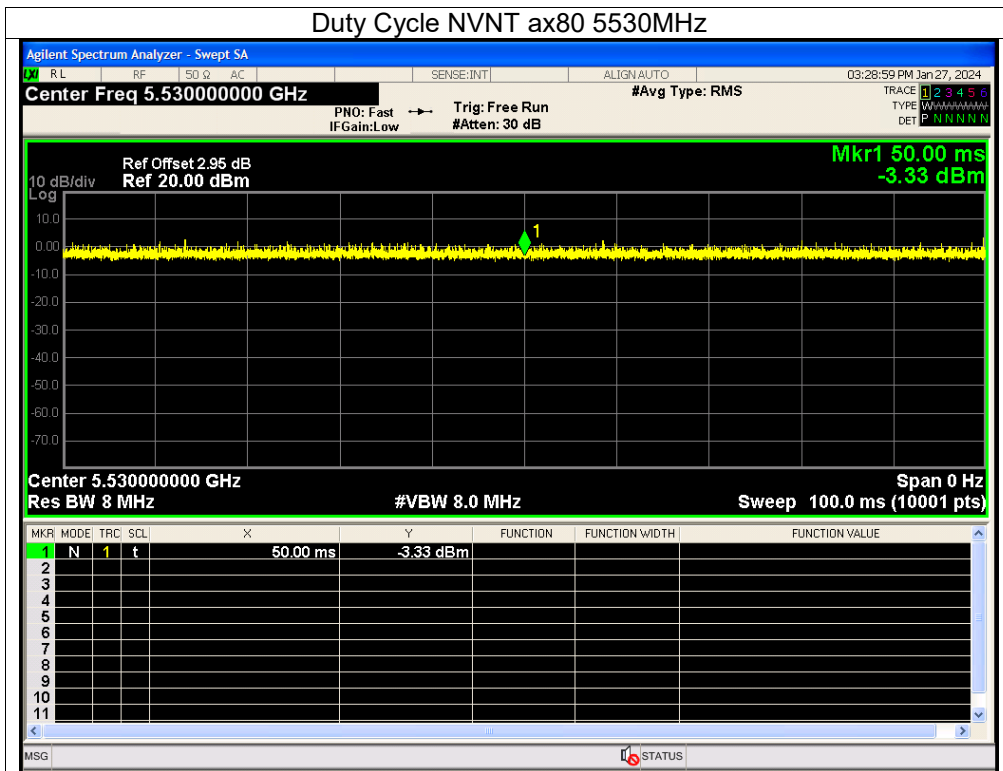

Condition	Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5745	100	0	0
NVNT	a	5785	100	0	0
NVNT	a	5825	100	0	0
NVNT	n20	5745	100	0	0
NVNT	n20	5785	100	0	0
NVNT	n20	5825	100	0	0
NVNT	n40	5755	100	0	0
NVNT	n40	5795	100	0	0
NVNT	ac20	5745	100	0	0
NVNT	ac20	5785	100	0	0
NVNT	ac20	5825	100	0	0
NVNT	ac40	5755	100	0	0
NVNT	ac40	5795	100	0	0
NVNT	ac80	5775	100	0	0
NVNT	ax20	5745	100	0	0
NVNT	ax20	5785	100	0	0
NVNT	ax20	5825	100	0	0
NVNT	ax40	5755	100	0	0
NVNT	ax40	5795	100	0	0
NVNT	ax80	5775	100	0	0

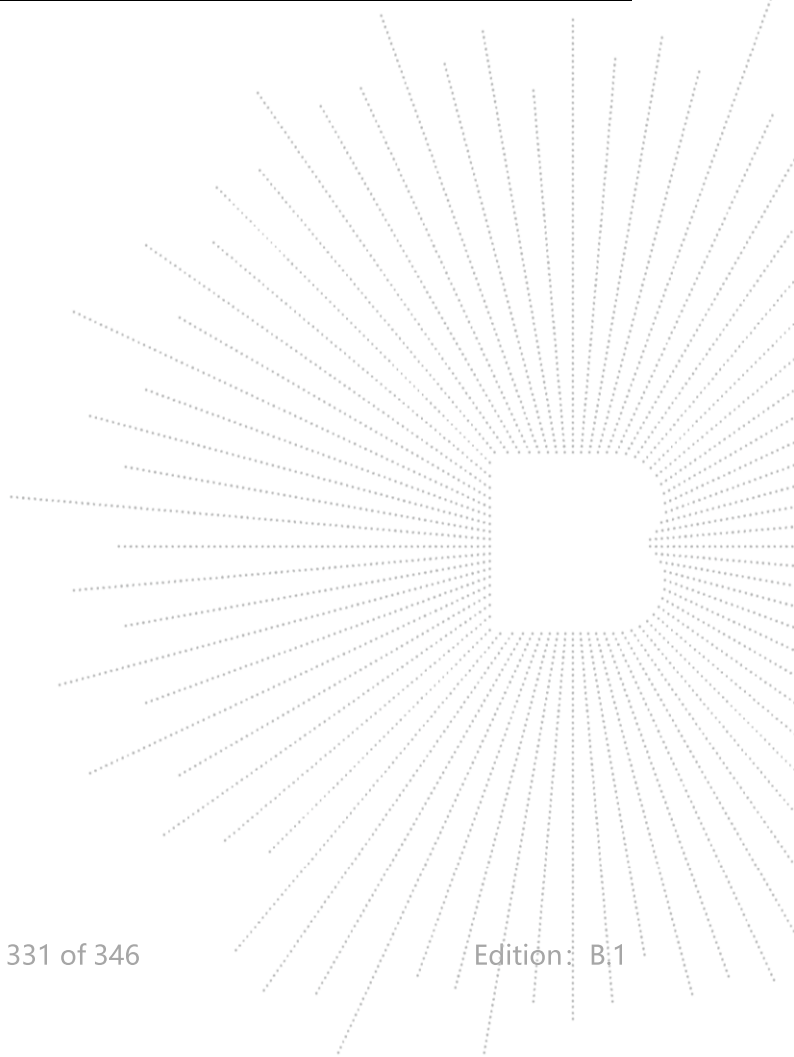

Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A. Plot.

