



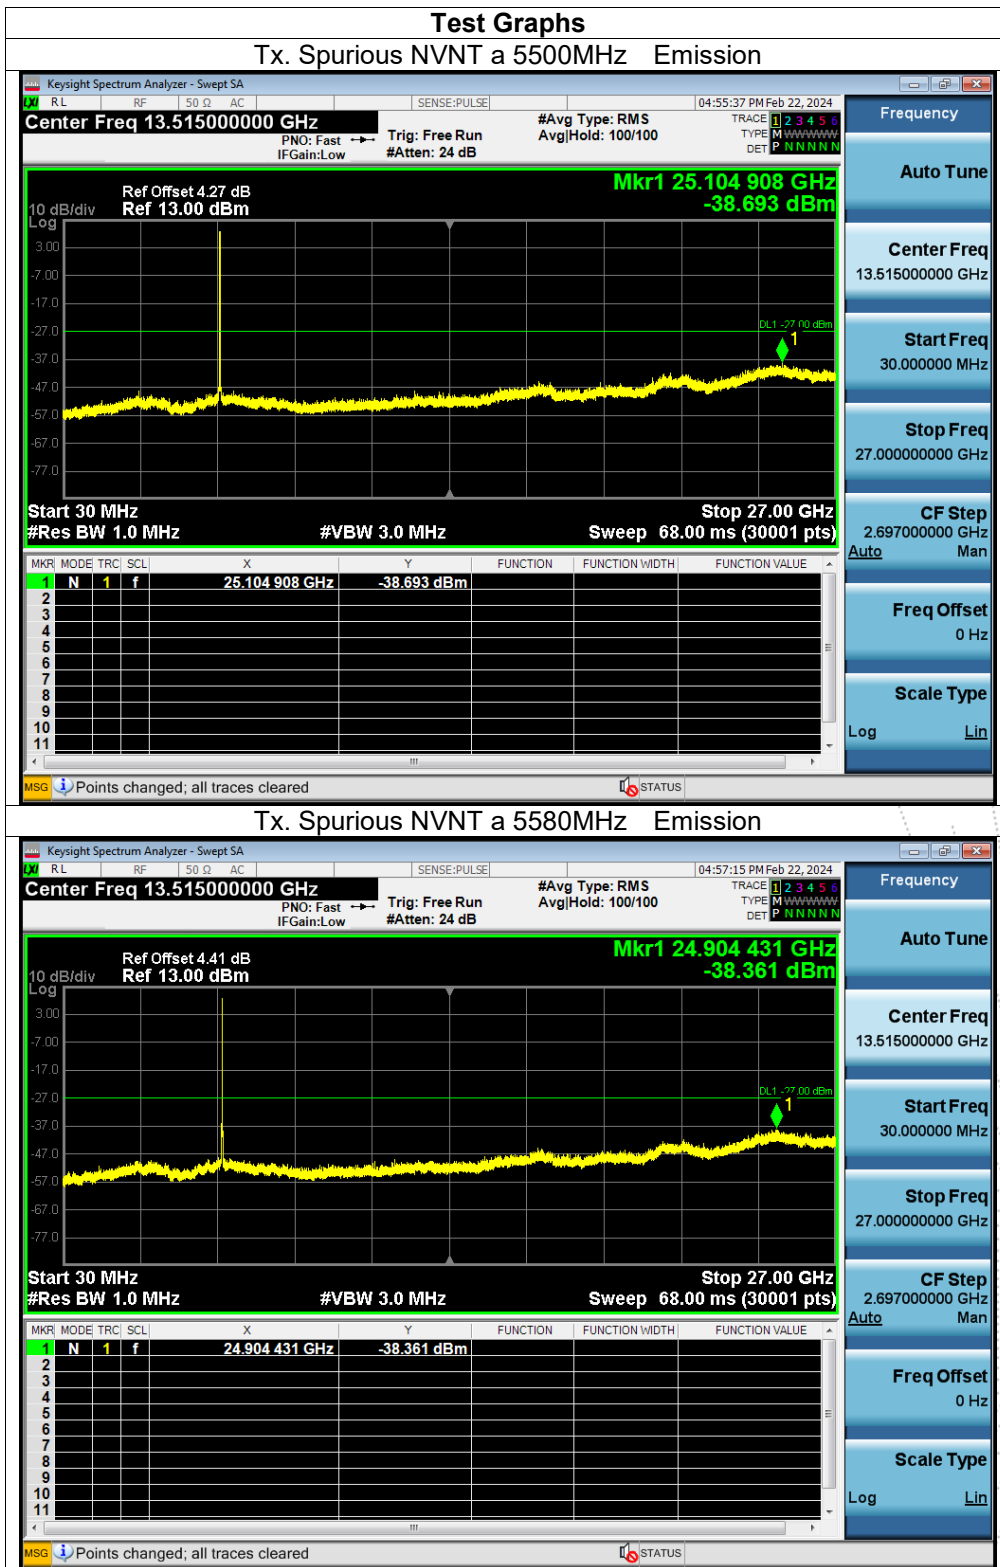
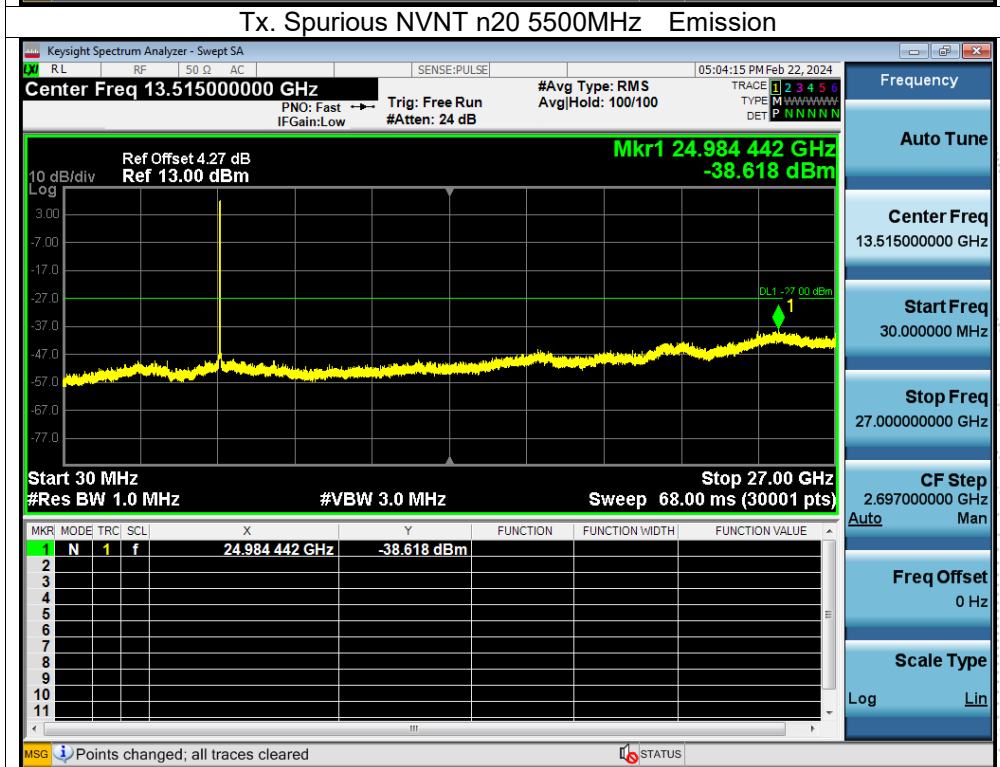
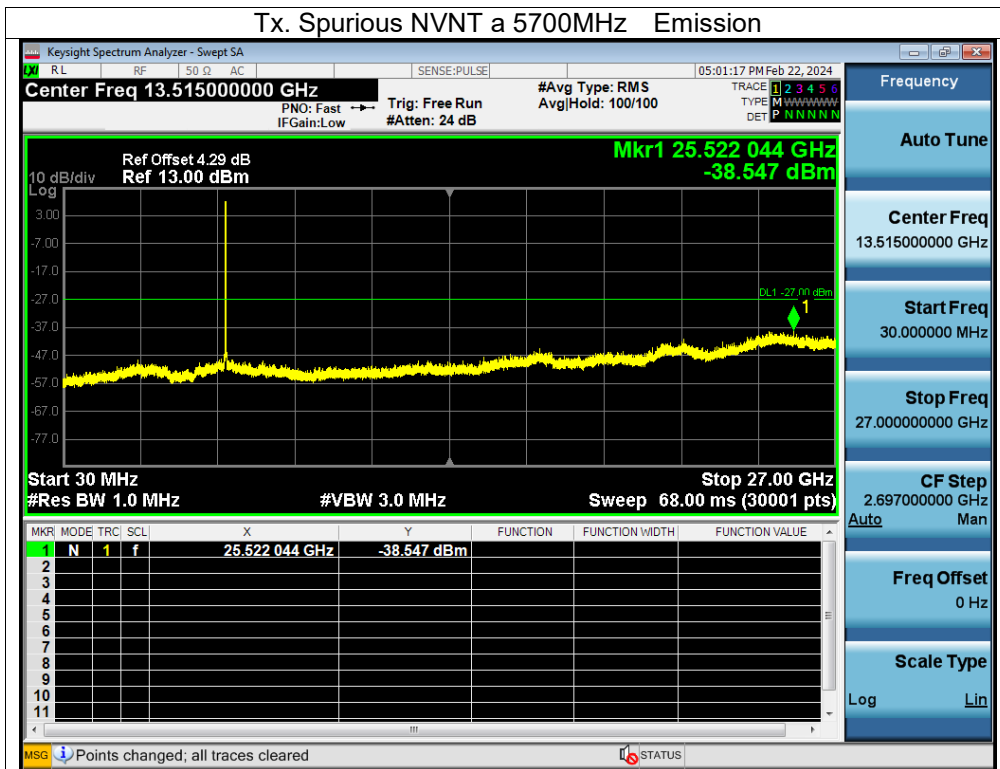




Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A.
 Antenna A: 5500-5700MHz


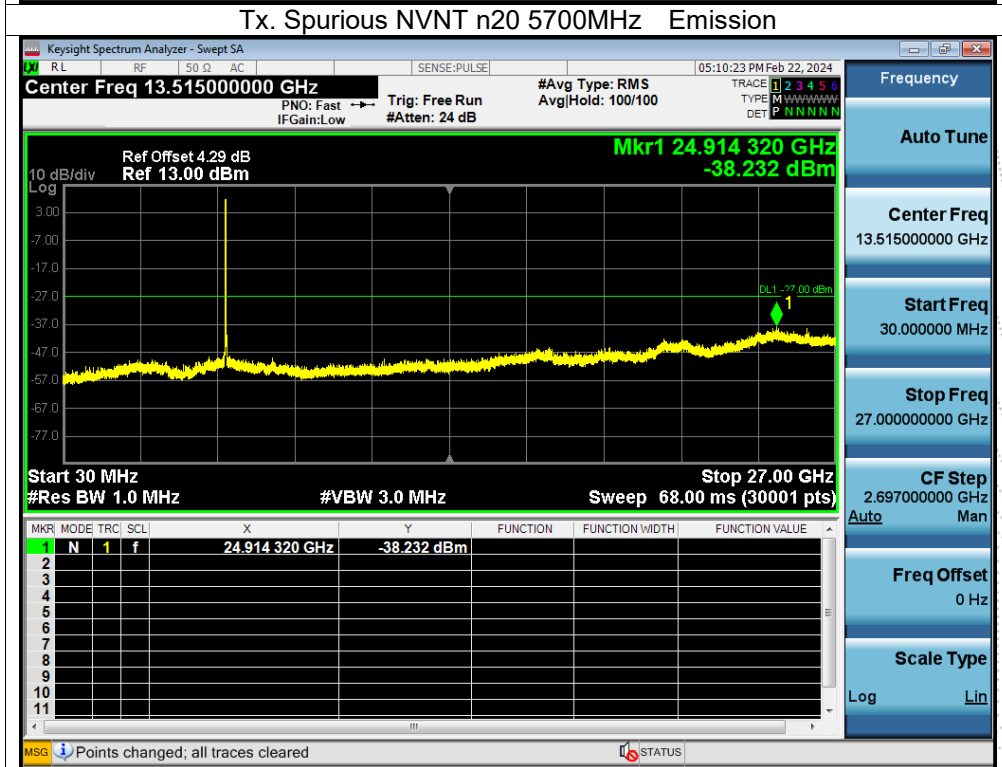



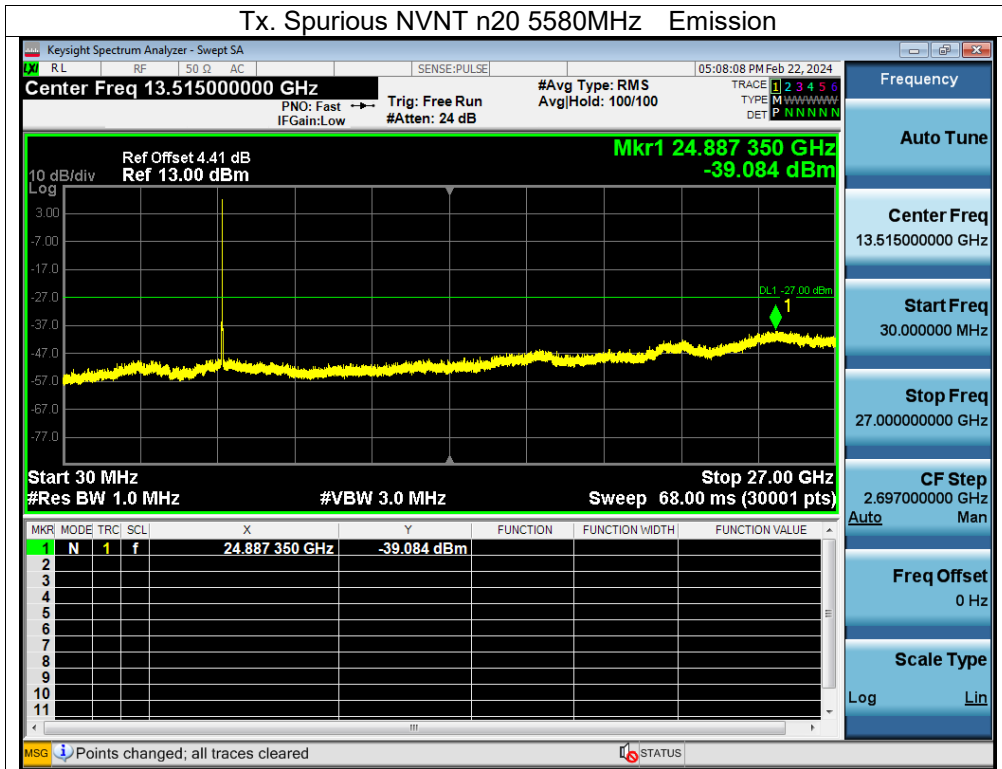



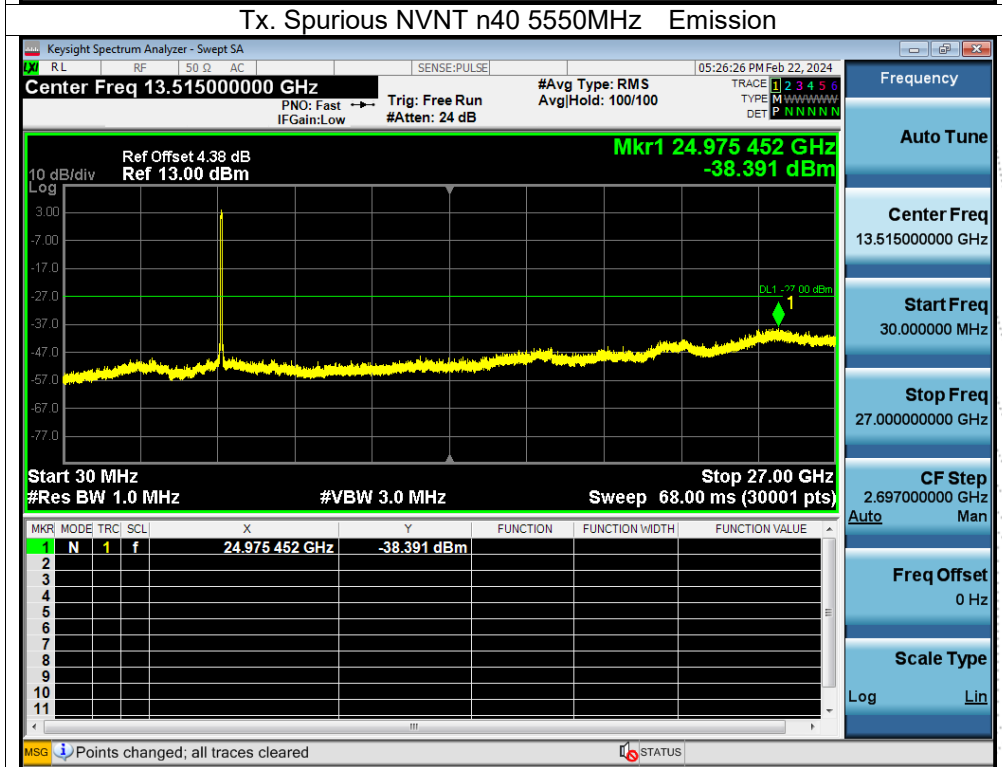



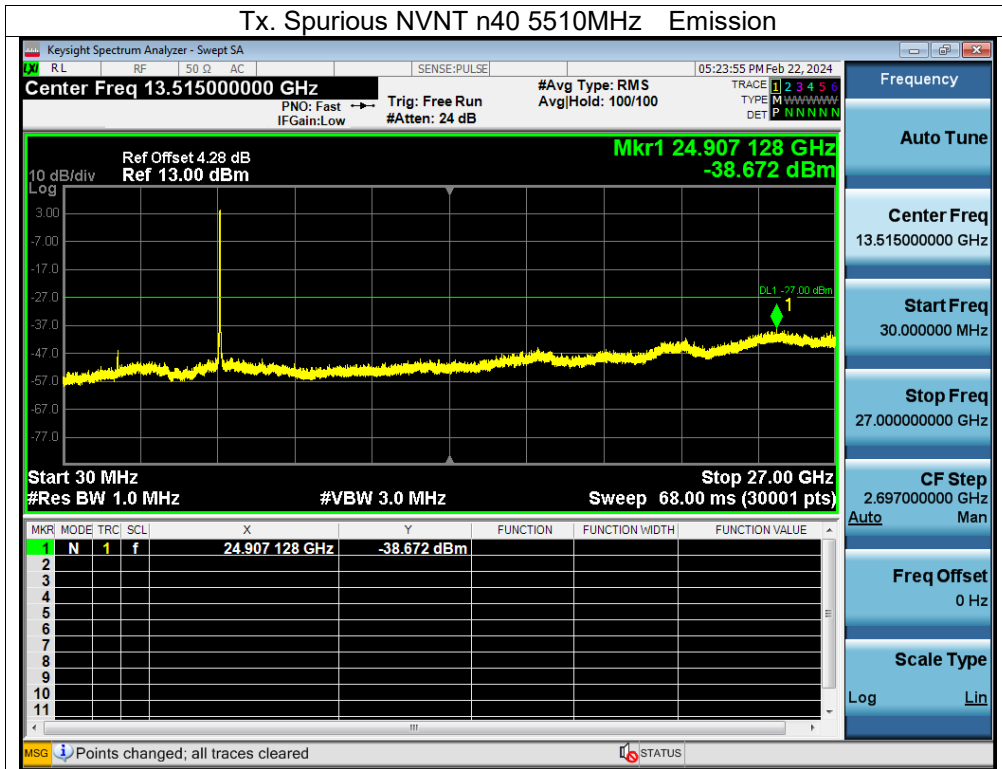


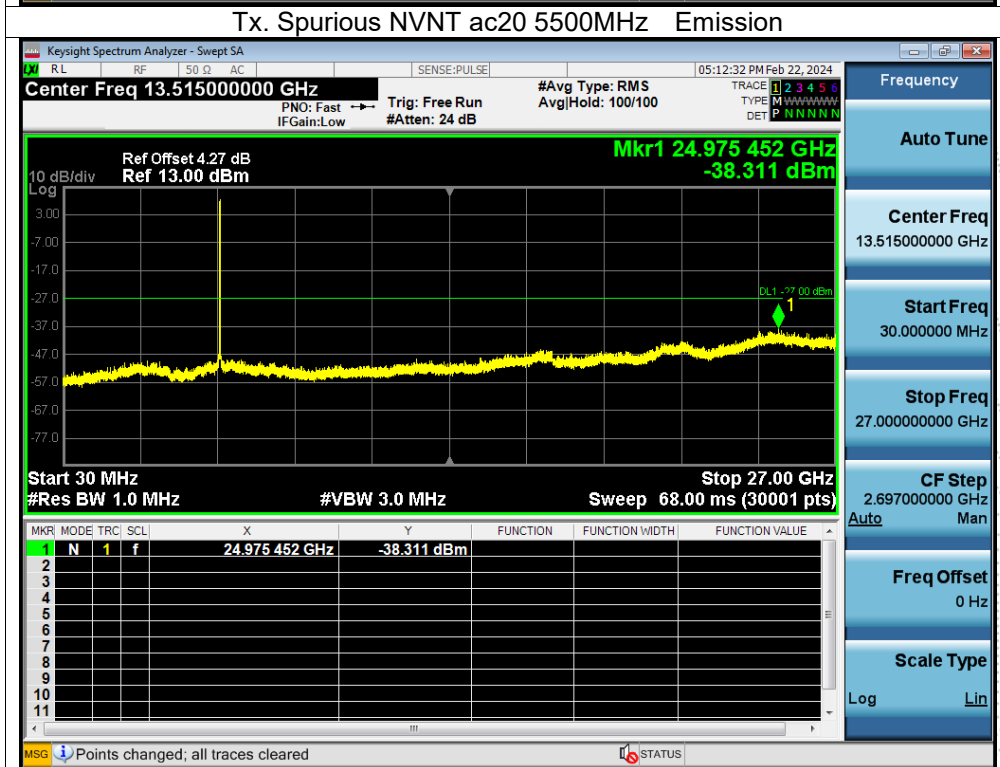
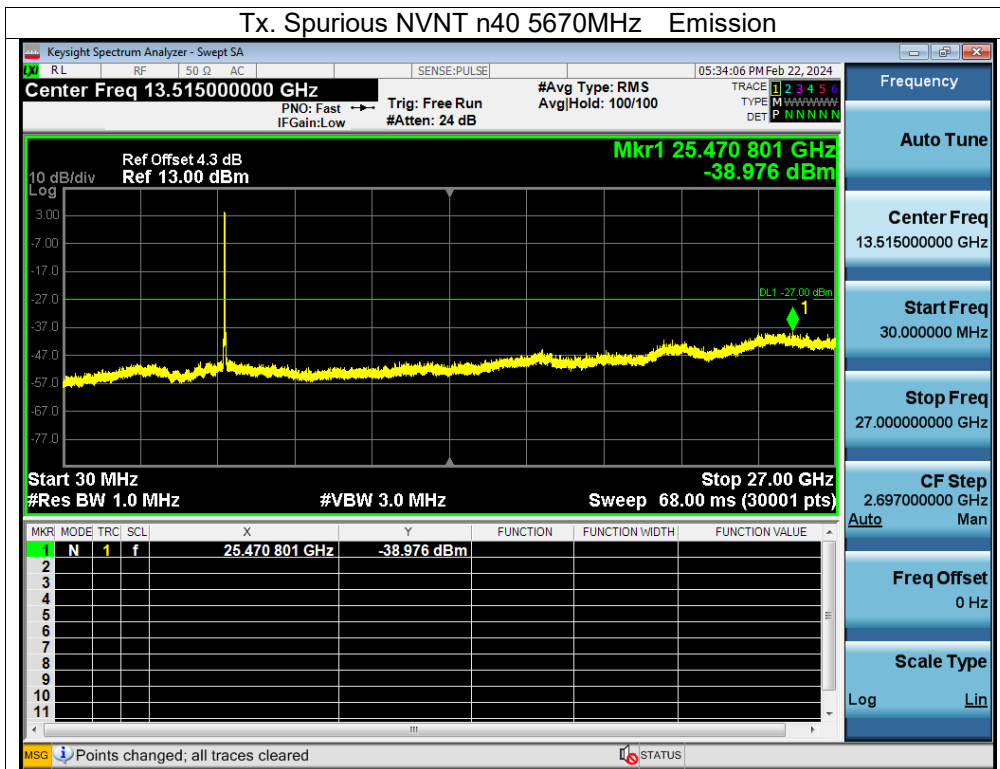


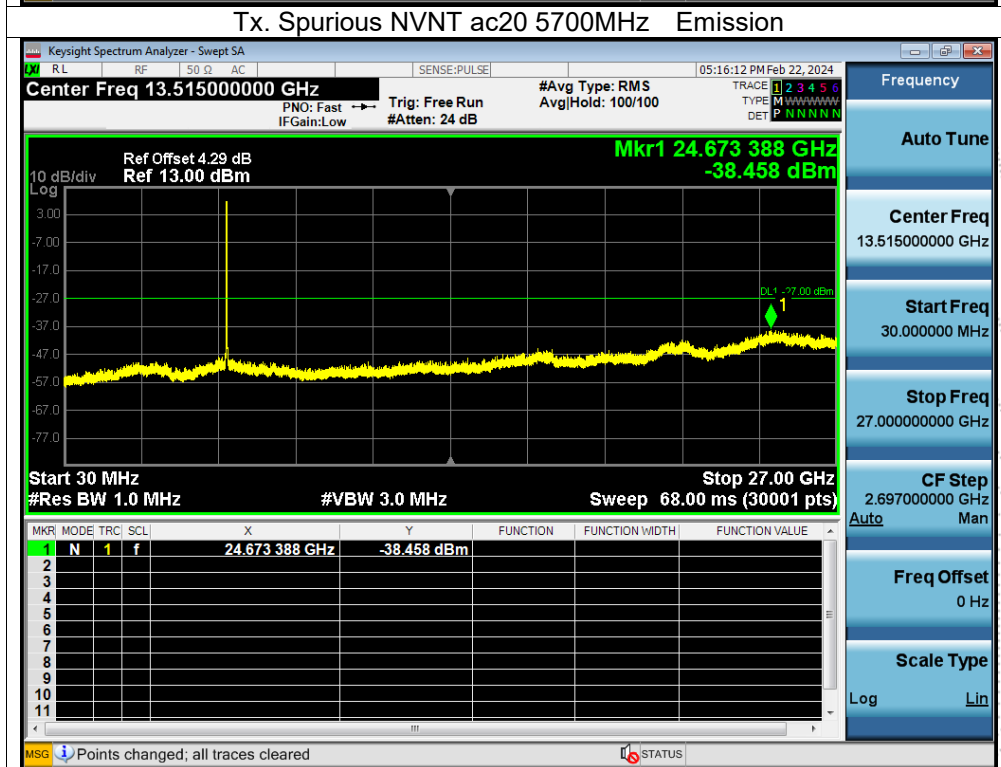
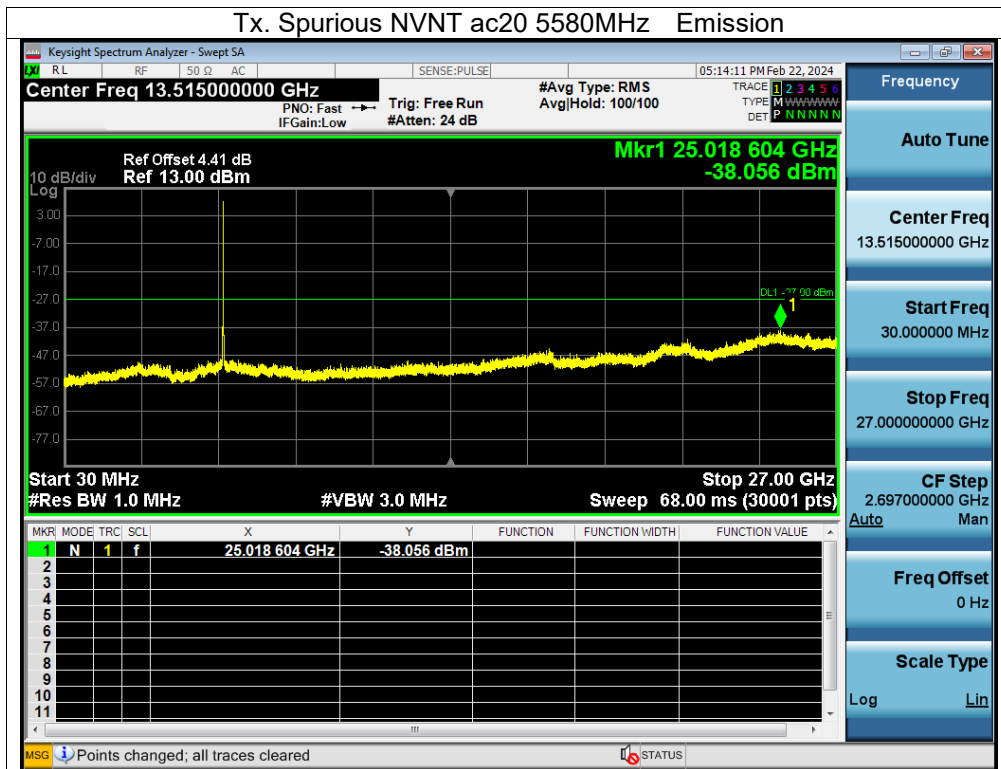


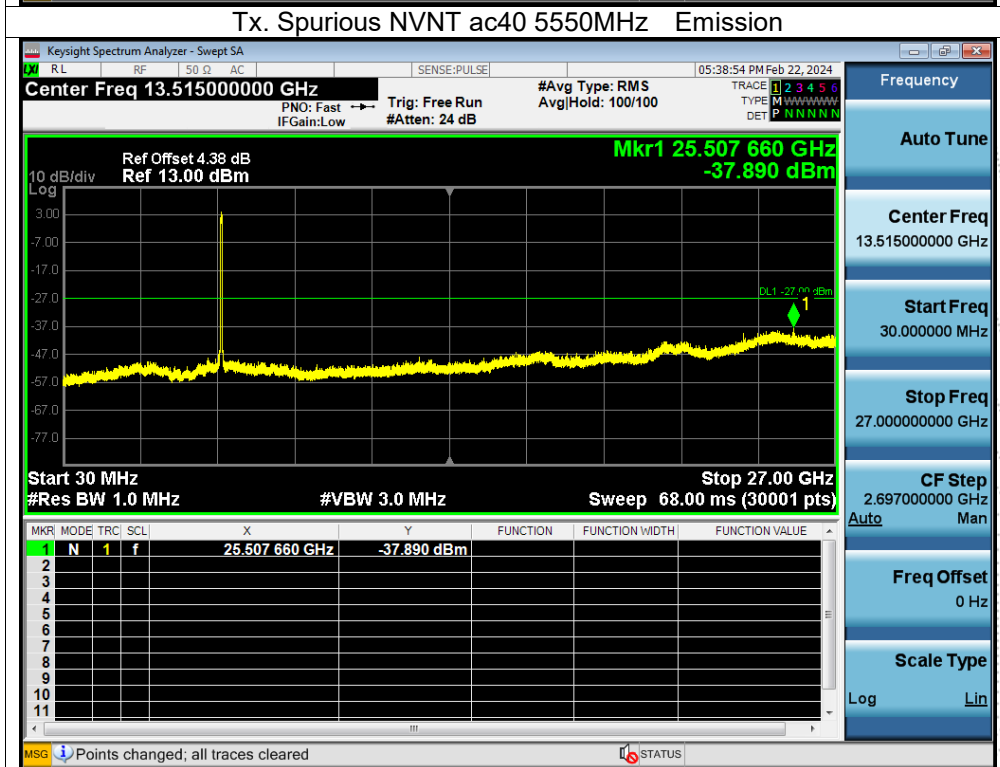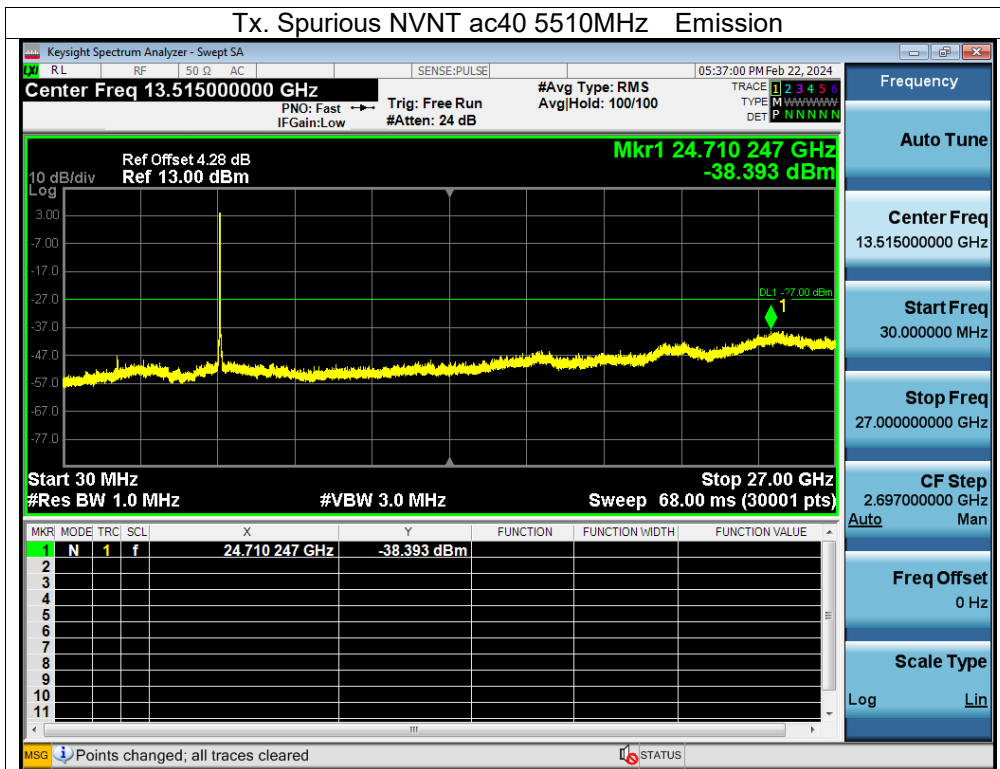


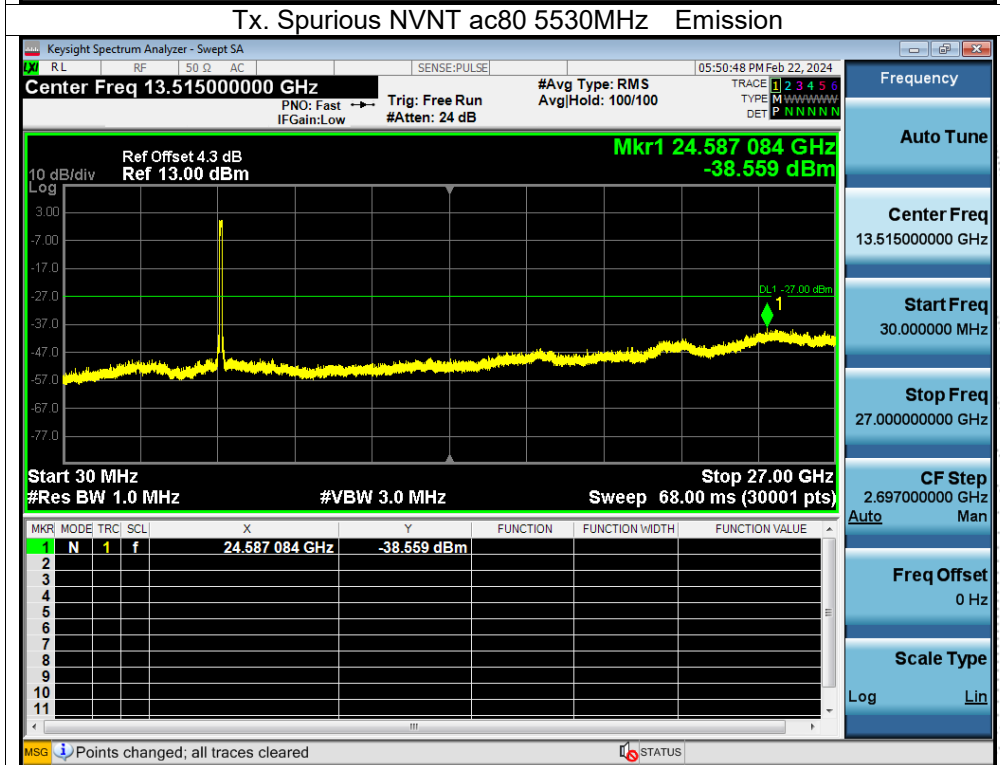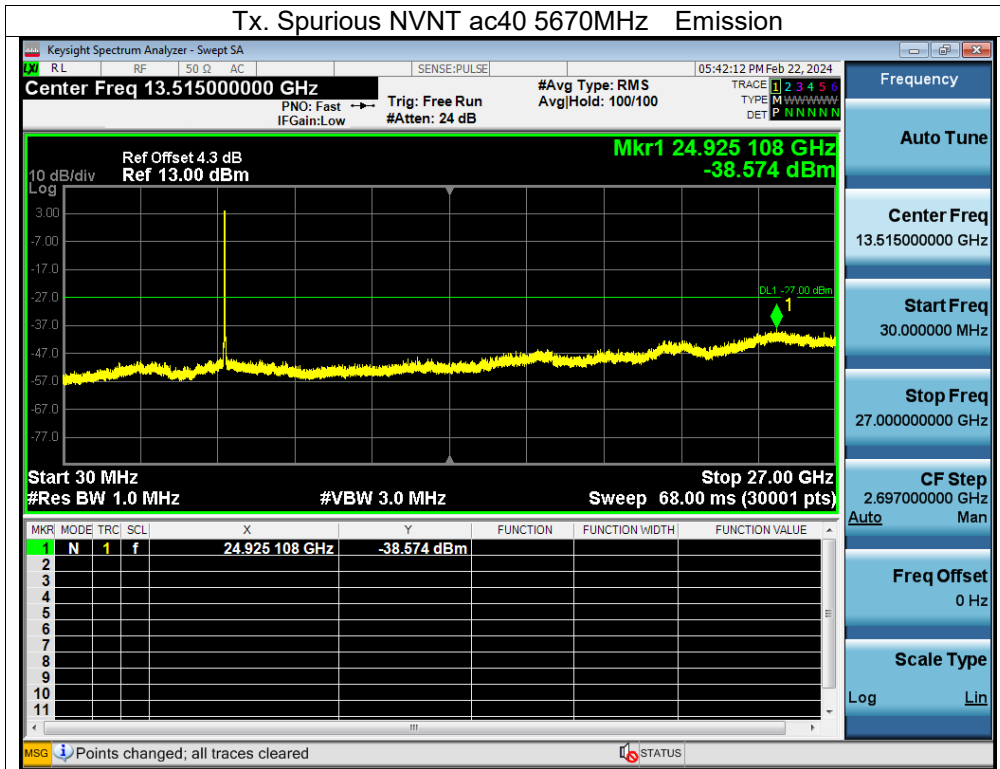

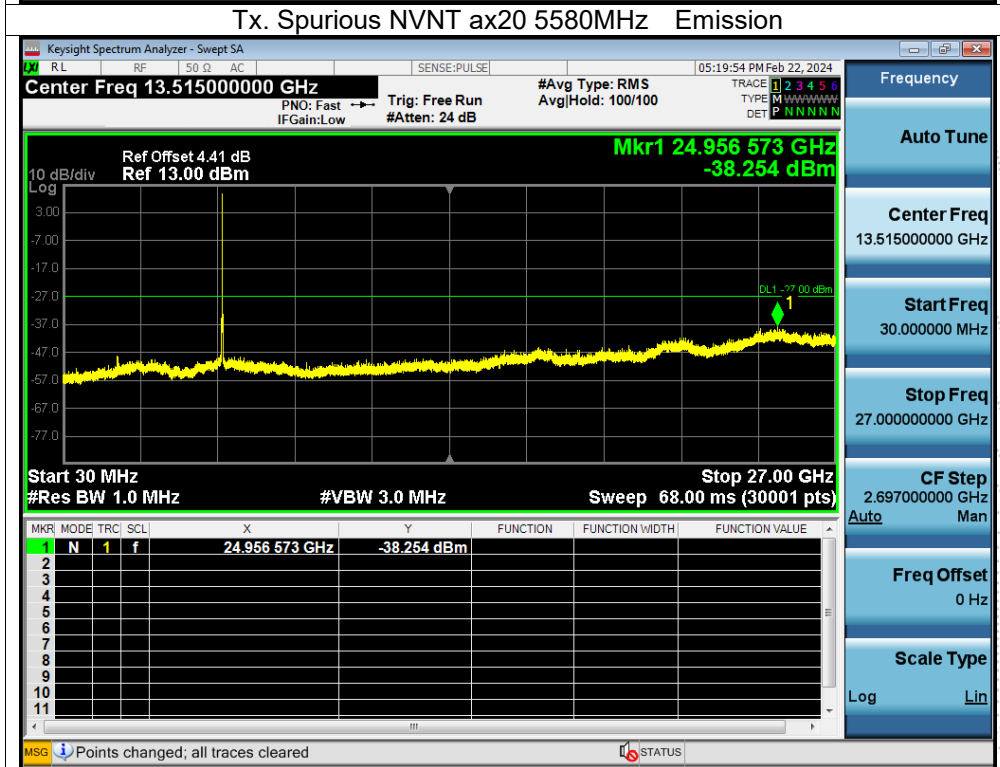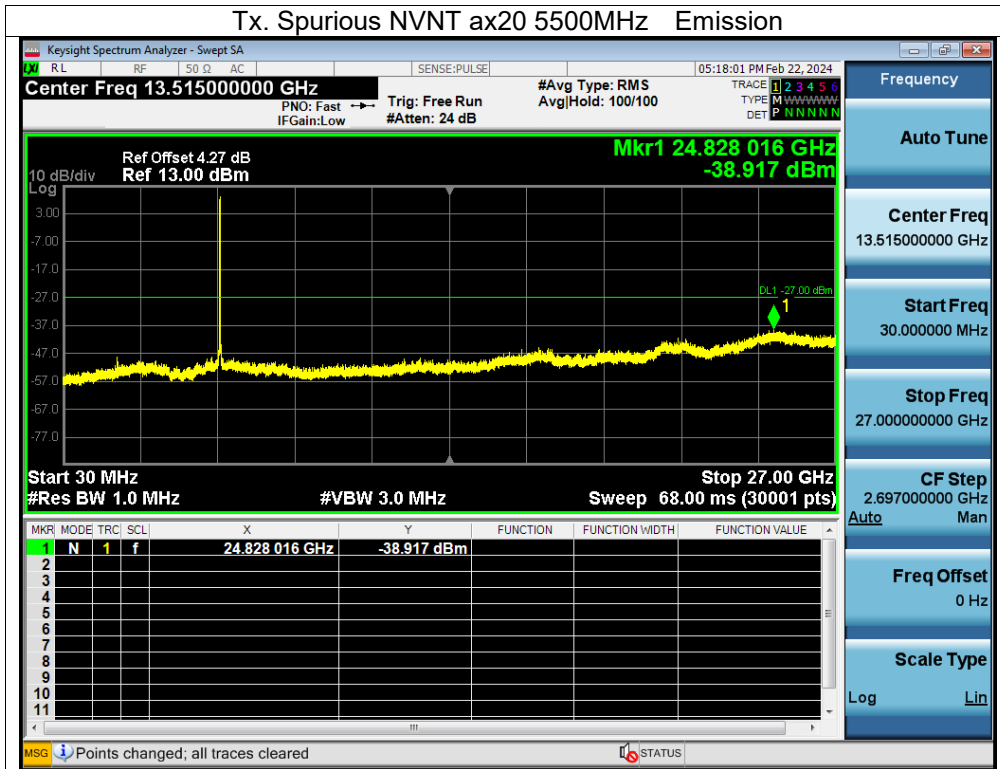

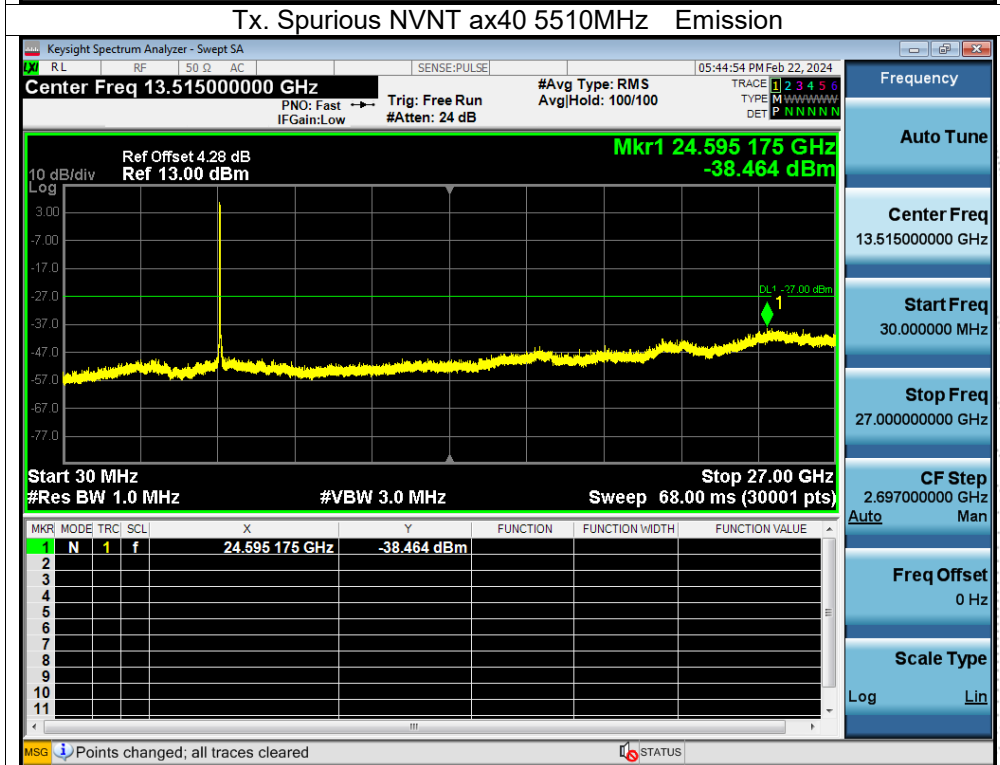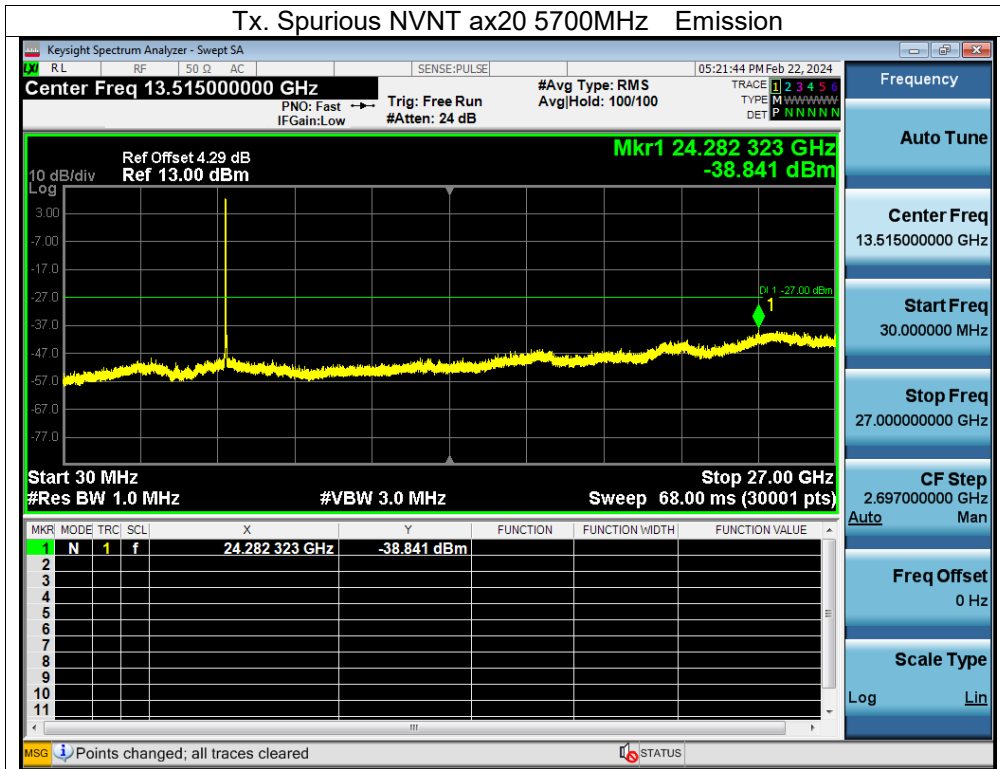


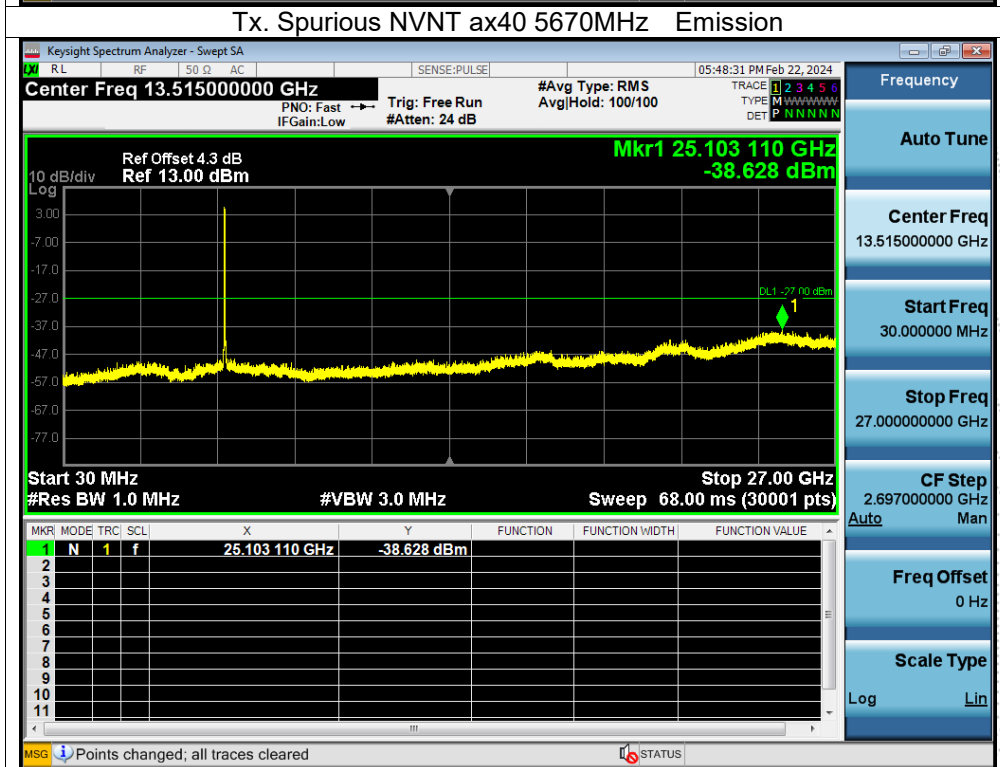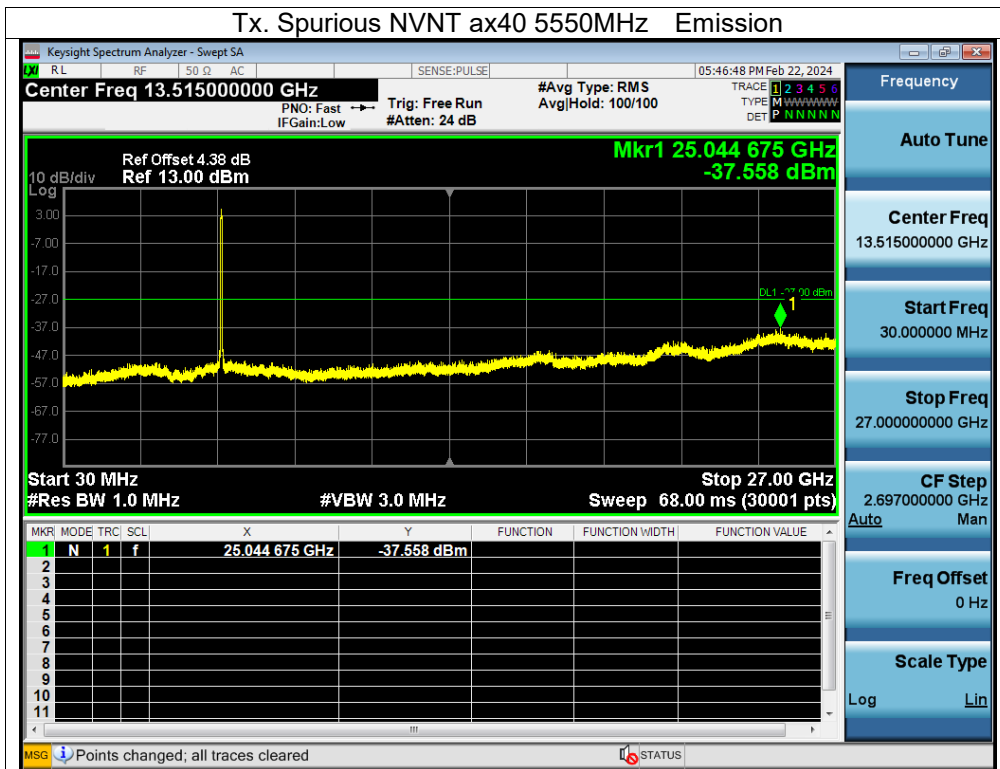

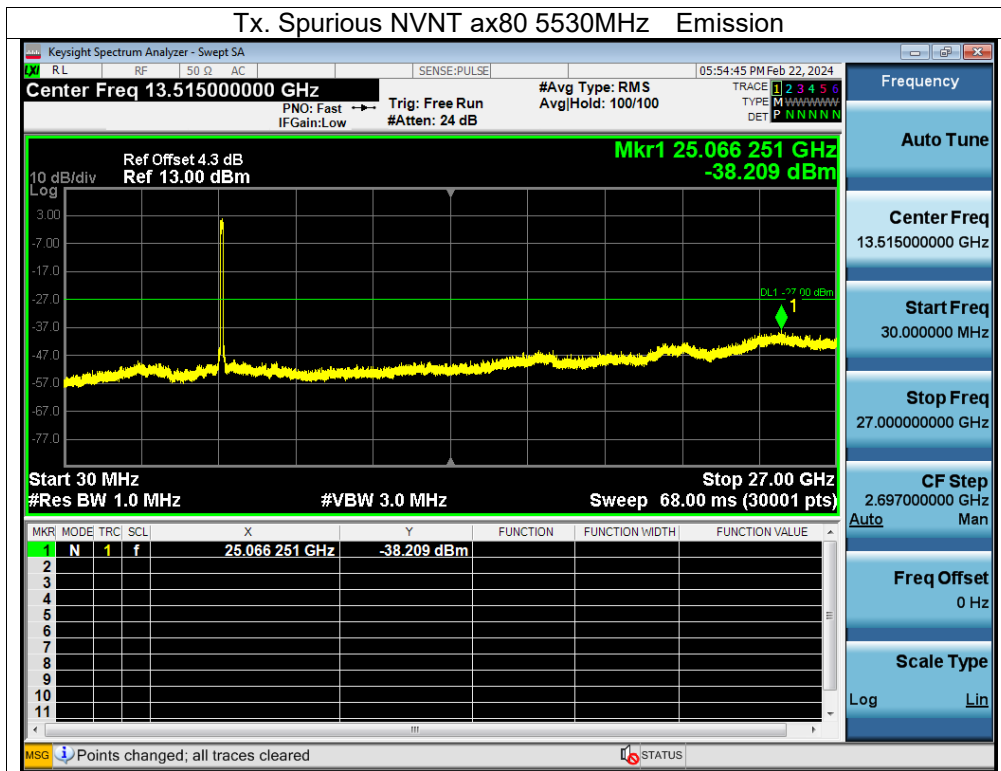

13. Frequency Stability Measurement

13.1 Block Diagram Of Test Setup

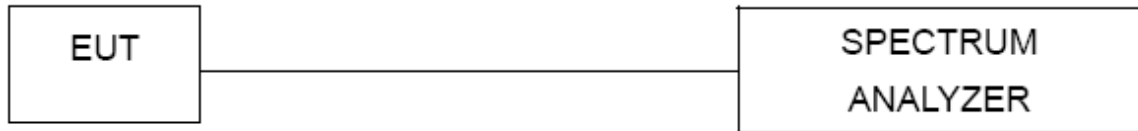

13.2 Limit

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification)..

13.3 Test Procedure

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f) / f_c \times 10^6$ ppm and he limit is less than ± 20 ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is $-20^\circ\text{C} \sim 70^\circ\text{C}$.

13.4 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	TX (5.1G) Mode Frequency U-NII-1 (5180-5240MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5180.0113	5180	0.0113	2.1815
		V max (V)	138.00	5180.0003	5180	0.0003	0.0579
		V min (V)	102.00	5180.0107	5180	0.0107	2.0656
Limits				5150-5250 MHz			
Result				Complies			

Temperature vs. Frequency Stability


TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5180.0105	5180	0.0105	2.0270
		T (°C)	-10	5180.0065	5180	0.0065	1.2548
		T (°C)	0	5180.0095	5180	0.0095	1.8340
		T (°C)	10	5180.0056	5180	0.0056	1.0811
		T (°C)	20	5180.0094	5180	0.0094	1.8147
		T (°C)	30	5180.0065	5180	0.0065	1.2548
		T (°C)	40	5180.0059	5180	0.0059	1.1390
		T (°C)	50	5180.0130	5180	0.0130	2.5097
		T (°C)	60	5180.0025	5180	0.0025	0.4826
		T (°C)	70	5180.0024	5180	0.0024	0.4633
Limits				5150-5250 MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5200.0101	5200	0.0101	1.9423
		V max (V)	138.00	5200.0069	5200	0.0069	1.3269
		V min (V)	102.00	5200.0069	5200	0.0069	1.3269
Limits				5725-5850 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5200.01170	5200	0.01170	2.2500
		T (°C)	-10	5200.00570	5200	0.00570	1.0962
		T (°C)	0	5200.01330	5200	0.01330	2.5577
		T (°C)	10	5200.00020	5200	0.00020	0.0385
		T (°C)	20	5200.00670	5200	0.00670	1.2885
		T (°C)	30	5200.01190	5200	0.01190	2.2885
		T (°C)	40	5200.00640	5200	0.00640	1.2308
		T (°C)	50	5200.00270	5200	0.00270	0.5192
		T (°C)	60	5200.00730	5200	0.00730	1.4038
		T (°C)	70	5200.00150	5200	0.00150	0.2885
Limits				5150-5250 MHz			
Result				Complies			

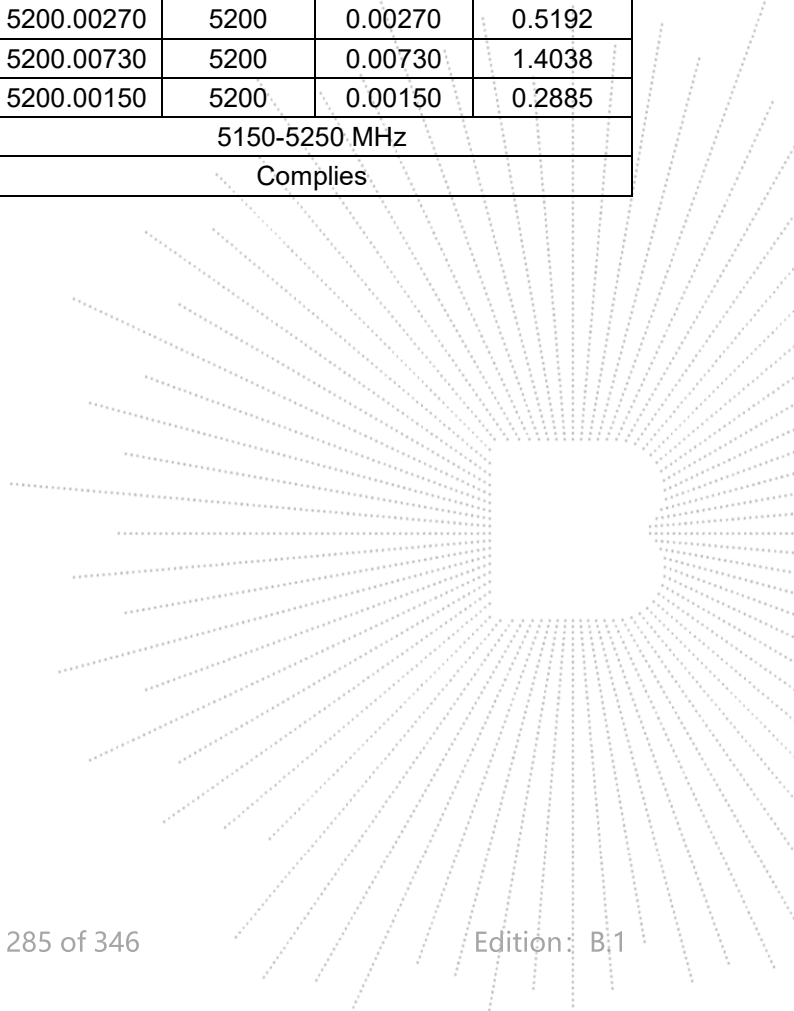


Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5240.0018	5240	0.0018	0.3435
		V max (V)	138.00	5240.0060	5240	0.0060	1.1450
		V min (V)	102.00	5240.0048	5240	0.0048	0.9160
Limits				5150-5250 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5240.0052	5240	0.0052	0.9924
		T (°C)	-10	5240.0067	5240	0.0067	1.2786
		T (°C)	0	5240.0004	5240	0.0004	0.0763
		T (°C)	10	5240.0038	5240	0.0038	0.7252
		T (°C)	20	5240.0013	5240	0.0013	0.2481
		T (°C)	30	5240.0112	5240	0.0112	2.1374
		T (°C)	40	5240.0078	5240	0.0078	1.4885
		T (°C)	50	5240.0101	5240	0.0101	1.9275
		T (°C)	60	5240.0126	5240	0.0126	2.4046
		T (°C)	70	5240.0037	5240	0.0037	0.7061
Limits				5150-5250 MHz			
Result				Complies			

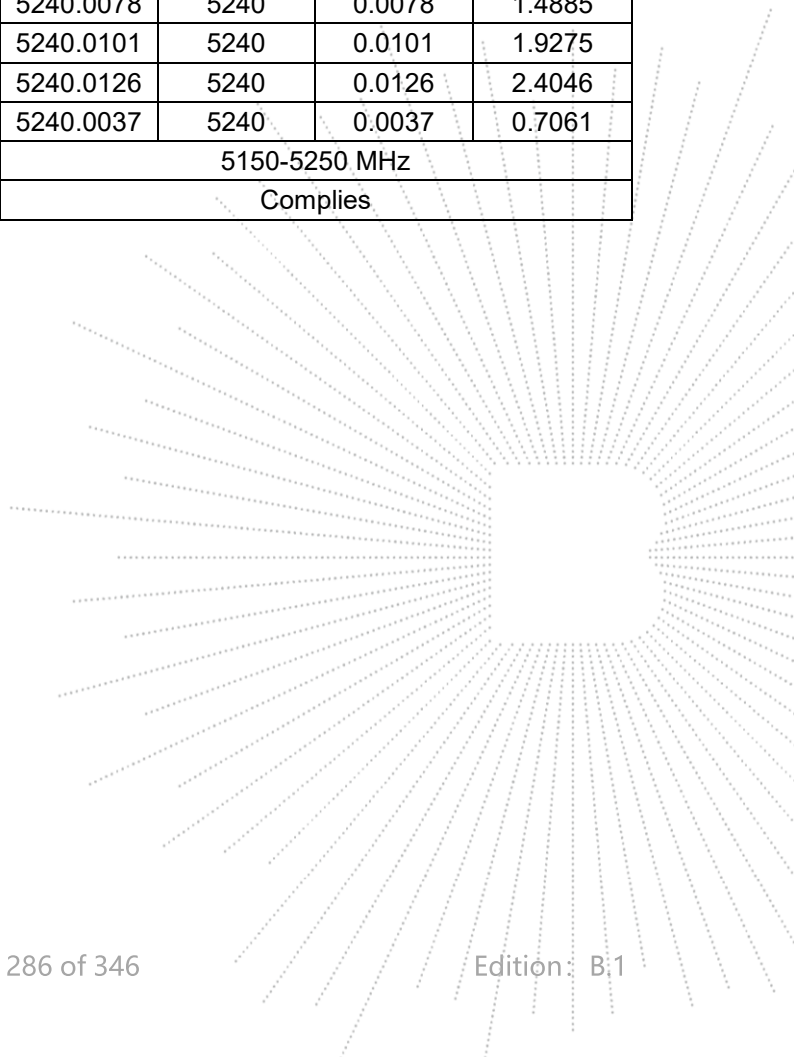

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	TX (5.3G) Mode Frequency U-NII-2A (5260-5320MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5260MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5260.0017	5260	0.0017	0.3232
		V max (V)	138.00	5260.0078	5260	0.0078	1.4829
		V min (V)	102.00	5260.0007	5260	0.0007	0.1331
Limits				5260-5320 MHz			
Result				Complies			

Temperature vs. Frequency Stability


TEST CONDITIONS				Reference Frequency: 5260MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5260.0129	5260	0.0129	2.4525
		T (°C)	-10	5260.0027	5260	0.0027	0.5133
		T (°C)	0	5260.0021	5260	0.0021	0.3992
		T (°C)	10	5260.0051	5260	0.0051	0.9696
		T (°C)	20	5260.0056	5260	0.0056	1.0646
		T (°C)	30	5260.0052	5260	0.0052	0.9886
		T (°C)	40	5260.0105	5260	0.0105	1.9962
		T (°C)	50	5260.0113	5260	0.0113	2.1483
		T (°C)	60	5260.0121	5260	0.0121	2.3004
		T (°C)	70	5260.0029	5260	0.0029	0.5513
Limits				5260-5320 MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5280MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5280.0034	5280	0.0034	0.6439
		V max (V)	138.00	5280.0094	5280	0.0094	1.7803
		V min (V)	102.00	5280.0100	5280	0.0100	1.8939
Limits				5260-5320 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5280MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5280.00530	5280	0.00530	1.0038
		T (°C)	-10	5280.01020	5280	0.01020	1.9318
		T (°C)	0	5280.00320	5280	0.00320	0.6061
		T (°C)	10	5280.01290	5280	0.01290	2.4432
		T (°C)	20	5280.00650	5280	0.00650	1.2311
		T (°C)	30	5280.00320	5280	0.00320	0.6061
		T (°C)	40	5280.00280	5280	0.00280	0.5303
		T (°C)	50	5280.01090	5280	0.01090	2.0644
		T (°C)	60	5280.00420	5280	0.00420	0.7955
		T (°C)	70	5280.00690	5280	0.00690	1.3068
Limits				5260-5320 MHz			
Result				Complies			

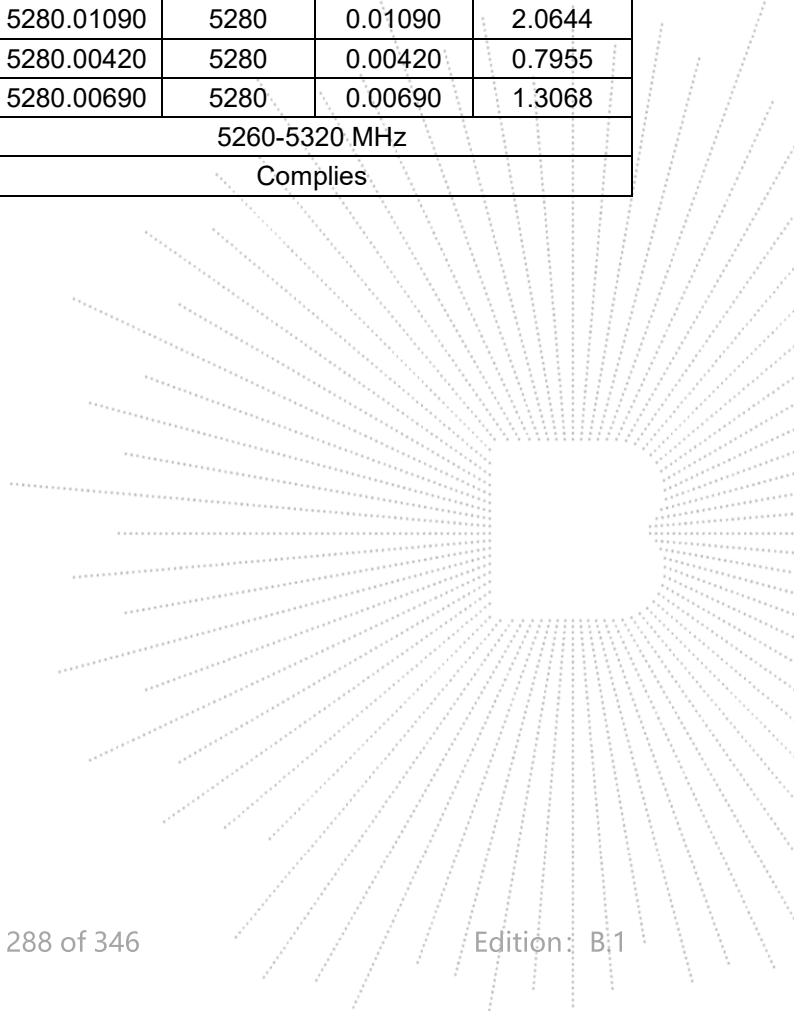


Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5320MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5320.0047	5320	0.0047	0.8835
		V max (V)	138.00	5320.0010	5320	0.0010	0.1880
		V min (V)	102.00	5320.0093	5320	0.0093	1.7481
Limits				5260-5320 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5320MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5320.0014	5320	0.0014	0.2632
		T (°C)	-10	5320.0099	5320	0.0099	1.8609
		T (°C)	0	5320.0081	5320	0.0081	1.5226
		T (°C)	10	5320.0110	5320	0.0110	2.0677
		T (°C)	20	5320.0093	5320	0.0093	1.7481
		T (°C)	30	5320.0107	5320	0.0107	2.0113
		T (°C)	40	5320.0086	5320	0.0086	1.6165
		T (°C)	50	5320.0090	5320	0.0090	1.6917
		T (°C)	60	5320.0024	5320	0.0024	0.4511
		T (°C)	70	5320.0122	5320	0.0122	2.2932
Limits				5260-5320 MHz			
Result				Complies			

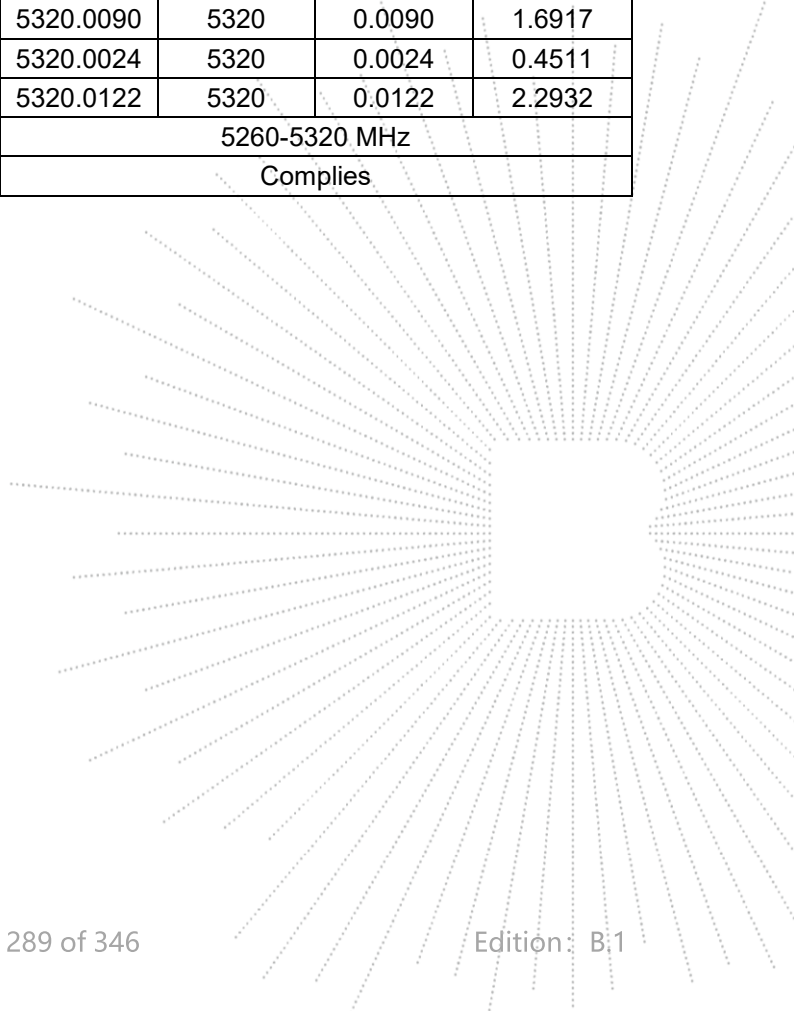

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	TX (5.6G) Mode Frequency U-NII-2C (5500-5700MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5500MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5500.0082	5500	0.0082	1.4909
		V max (V)	138.00	5500.0074	5500	0.0074	1.3455
		V min (V)	102.00	5500.0018	5500	0.0018	0.3273
Limits				5500-5700 MHz			
Result				Complies			

Temperature vs. Frequency Stability


TEST CONDITIONS				Reference Frequency: 5500MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5500.0016	5500	0.0016	0.2909
		T (°C)	-10	5500.0105	5500	0.0105	1.9091
		T (°C)	0	5500.0129	5500	0.0129	2.3455
		T (°C)	10	5500.0033	5500	0.0033	0.6000
		T (°C)	20	5500.0016	5500	0.0016	0.2909
		T (°C)	30	5500.0052	5500	0.0052	0.9455
		T (°C)	40	5500.0056	5500	0.0056	1.0182
		T (°C)	50	5500.0068	5500	0.0068	1.2364
		T (°C)	60	5500.0113	5500	0.0113	2.0545
		T (°C)	70	5500.0018	5500	0.0018	0.3273
Limits				5500-5700 MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5580MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5580.0131	5580	0.0131	2.3477
		V max (V)	138.00	5580.0007	5580	0.0007	0.1254
		V min (V)	102.00	5580.0097	5580	0.0097	1.7384
Limits				5500-5700 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5580MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5580.00980	5580	0.00980	1.7563
		T (°C)	-10	5580.00400	5580	0.00400	0.7168
		T (°C)	0	5580.00320	5580	0.00320	0.5735
		T (°C)	10	5580.01300	5580	0.01300	2.3297
		T (°C)	20	5580.00600	5580	0.00600	1.0753
		T (°C)	30	5580.01270	5580	0.01270	2.2760
		T (°C)	40	5580.00670	5580	0.00670	1.2007
		T (°C)	50	5580.01270	5580	0.01270	2.2760
		T (°C)	60	5580.00500	5580	0.00500	0.8961
		T (°C)	70	5580.00580	5580	0.00580	1.0394
Limits				5500-5700 MHz			
Result				Complies			

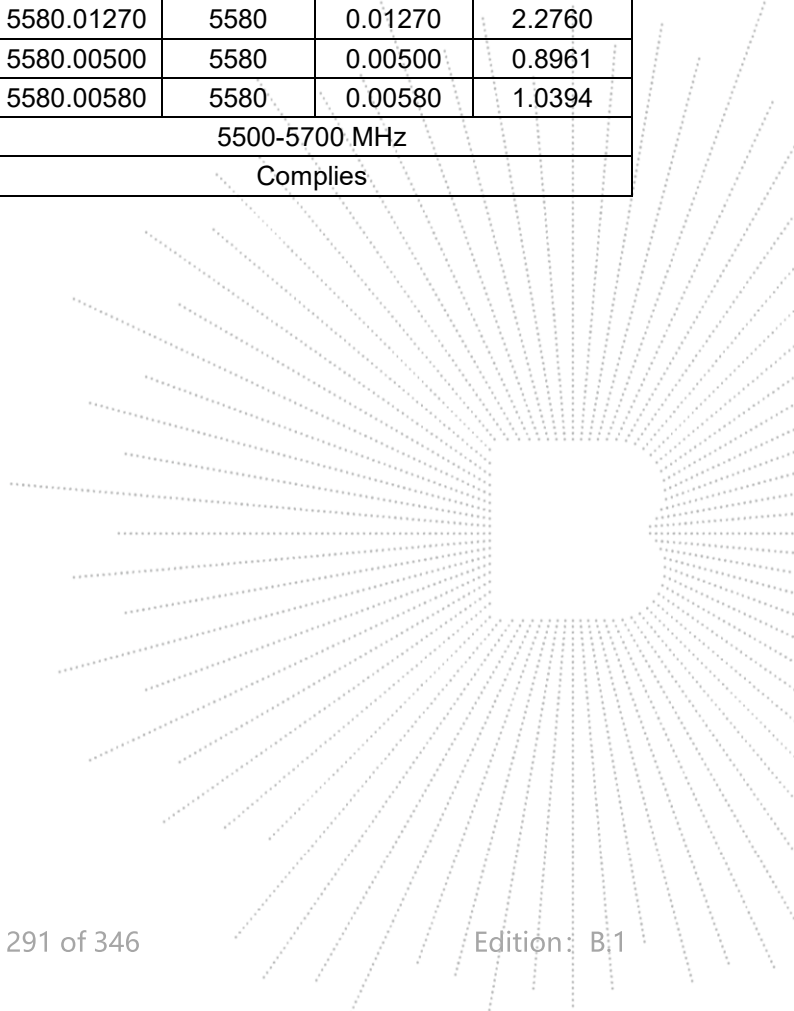


Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5700MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5700.0012	5700	0.0012	0.2105
		V max (V)	138.00	5700.0027	5700	0.0027	0.4737
		V min (V)	102.00	5700.0135	5700	0.0135	2.3684
Limits				5725-5850 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5700MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5700.0002	5700	0.0002	0.0351
		T (°C)	-10	5700.0016	5700	0.0016	0.2807
		T (°C)	0	5700.0010	5700	0.0010	0.1754
		T (°C)	10	5700.0000	5700	0.0000	0.0000
		T (°C)	20	5700.0055	5700	0.0055	0.9649
		T (°C)	30	5700.0055	5700	0.0055	0.9649
		T (°C)	40	5700.0063	5700	0.0063	1.1053
		T (°C)	50	5700.0099	5700	0.0099	1.7368
		T (°C)	60	5700.0009	5700	0.0009	0.1579
		T (°C)	70	5700.0082	5700	0.0082	1.4386
Limits				5725-5850 MHz			
Result				Complies			

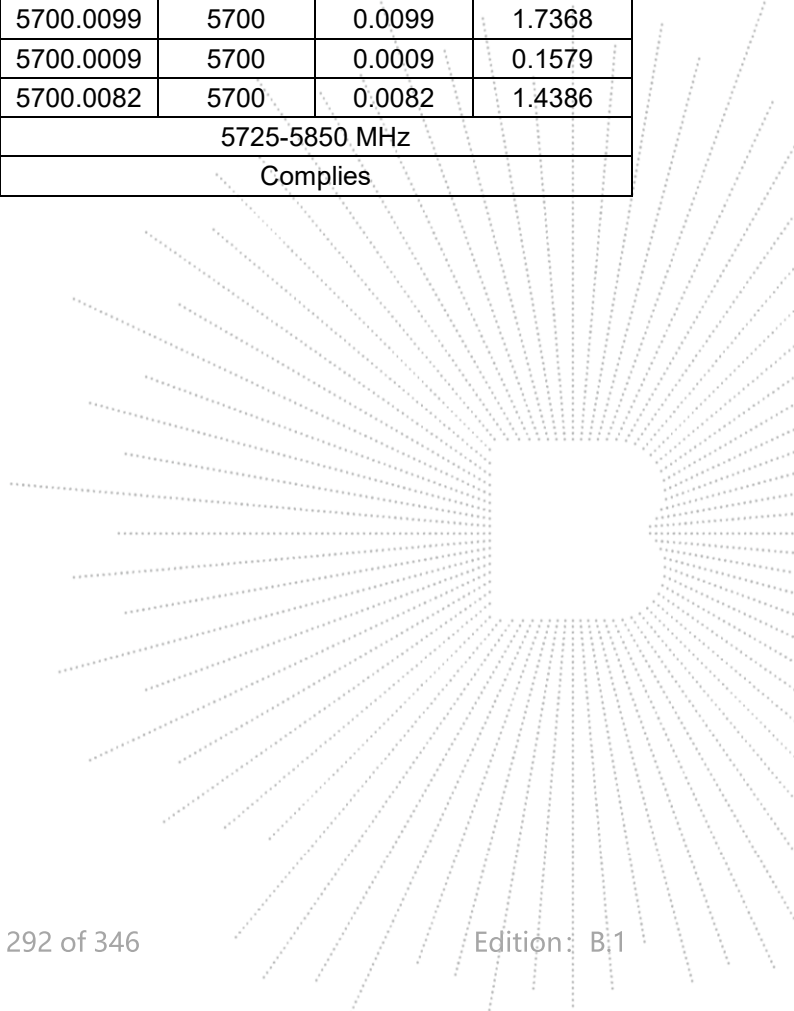

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	TX (5.8G) Mode Frequency U-NII-3 (5745-5825MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5745.00410	5745	0.00410	0.7137
		V max (V)	138.00	5745.00280	5745	0.00280	0.4874
		V min (V)	102.00	5745.00450	5745	0.00450	0.7833
Limits				5725-5850 MHz			
Result				Complies			

Temperature vs. Frequency Stability


TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5745.00120	5745	0.00120	0.2089
		T (°C)	-10	5745.00780	5745	0.00780	1.3577
		T (°C)	0	5745.01190	5745	0.01190	2.0714
		T (°C)	10	5745.00750	5745	0.00750	1.3055
		T (°C)	20	5745.00010	5745	0.00010	0.0174
		T (°C)	30	5745.01150	5745	0.01150	2.0017
		T (°C)	40	5745.00760	5745	0.00760	1.3229
		T (°C)	50	5745.01220	5745	0.01220	2.1236
		T (°C)	60	5745.00210	5745	0.00210	0.3655
T (°C)	70	5745.01340	5745	0.01340	2.3325		
Limits				5725-5850 MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5785.01030	5785	0.01030	1.7805
		V max (V)	138.00	5785.00240	5785	0.00240	0.4149
		V min (V)	102.00	5785.00400	5785	0.00400	0.6914
Limits				5725-5850 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5785.01020	5785	0.01020	1.7632
		T (°C)	-10	5785.01010	5785	0.01010	1.7459
		T (°C)	0	5785.00150	5785	0.00150	0.2593
		T (°C)	10	5785.01250	5785	0.01250	2.1608
		T (°C)	20	5785.00300	5785	0.00300	0.5186
		T (°C)	30	5785.00890	5785	0.00890	1.5385
		T (°C)	40	5785.00300	5785	0.00300	0.5186
		T (°C)	50	5785.00490	5785	0.00490	0.8470
		T (°C)	60	5785.00210	5785	0.00210	0.3630
		T (°C)	70	5785.00430	5785	0.00430	0.7433
Limits				5725-5850 MHz			
Result				Complies			

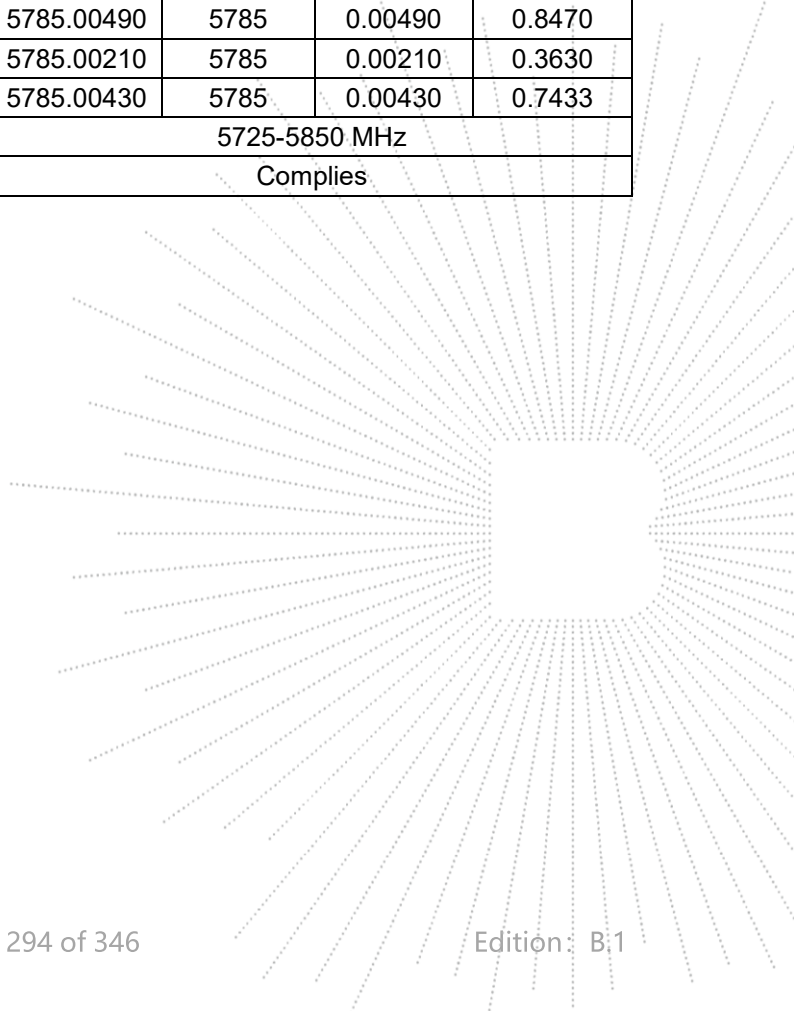


Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120.00	5825.00840	5825	0.00840	1.4421
		V max (V)	138.00	5825.01170	5825	0.01170	2.0086
		V min (V)	102.00	5825.01330	5825	0.01330	2.2833
Limits				5725-5850 MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	-20	5825.00310	5825	0.00310	0.5322
		T (°C)	-10	5825.00780	5825	0.00780	1.3391
		T (°C)	0	5825.00220	5825	0.00220	0.3777
		T (°C)	10	5825.00820	5825	0.00820	1.4077
		T (°C)	20	5825.00570	5825	0.00570	0.9785
		T (°C)	30	5825.00950	5825	0.00950	1.6309
		T (°C)	40	5825.00160	5825	0.00160	0.2747
		T (°C)	50	5825.00380	5825	0.00380	0.6524
		T (°C)	60	5825.00250	5825	0.00250	0.4292
		T (°C)	70	5825.00930	5825	0.00930	1.5966
Limits				5725-5850 MHz			
Result				Complies			

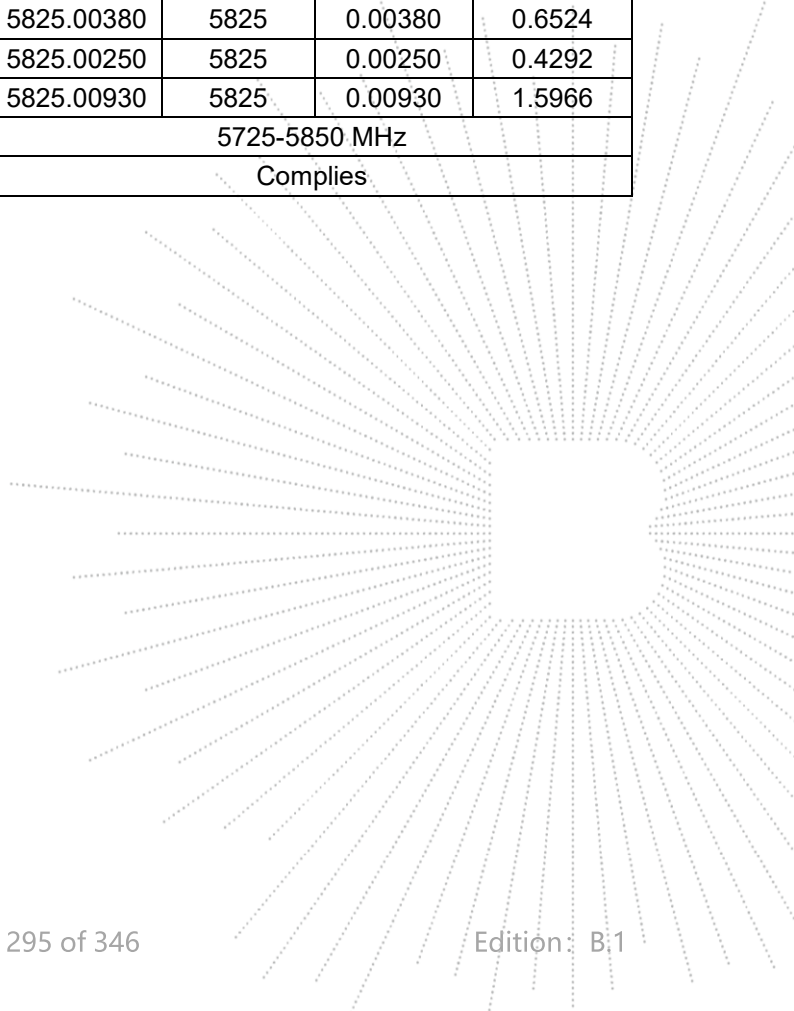

14. Duty Cycle Of Test Signal

14.1 Standard Requirement

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle. All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

14.2 Formula

Duty Cycle = $T_{on} / (T_{on} + T_{off})$


14.3 Test Procedure



1. Set span = Zero
2. RBW = 8MHz
3. VBW = 8MHz,
4. Detector = Peak



14.4 Test Result



Condition	Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5180	100	0	0
NVNT	a	5200	100	0	0
NVNT	a	5240	100	0	0
NVNT	n20	5180	100	0	0
NVNT	n20	5200	100	0	0
NVNT	n20	5240	100	0	0
NVNT	n40	5190	100	0	0
NVNT	n40	5230	100	0	0
NVNT	ac20	5180	100	0	0
NVNT	ac20	5200	100	0	0
NVNT	ac20	5240	100	0	0
NVNT	ac40	5190	100	0	0
NVNT	ac40	5230	100	0	0
NVNT	ac80	5210	100	0	0
NVNT	ax20	5180	100	0	0
NVNT	ax20	5200	100	0	0
NVNT	ax20	5240	100	0	0
NVNT	ax40	5190	100	0	0
NVNT	ax40	5230	100	0	0
NVNT	ax80	5210	100	0	0



Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A . Plot.


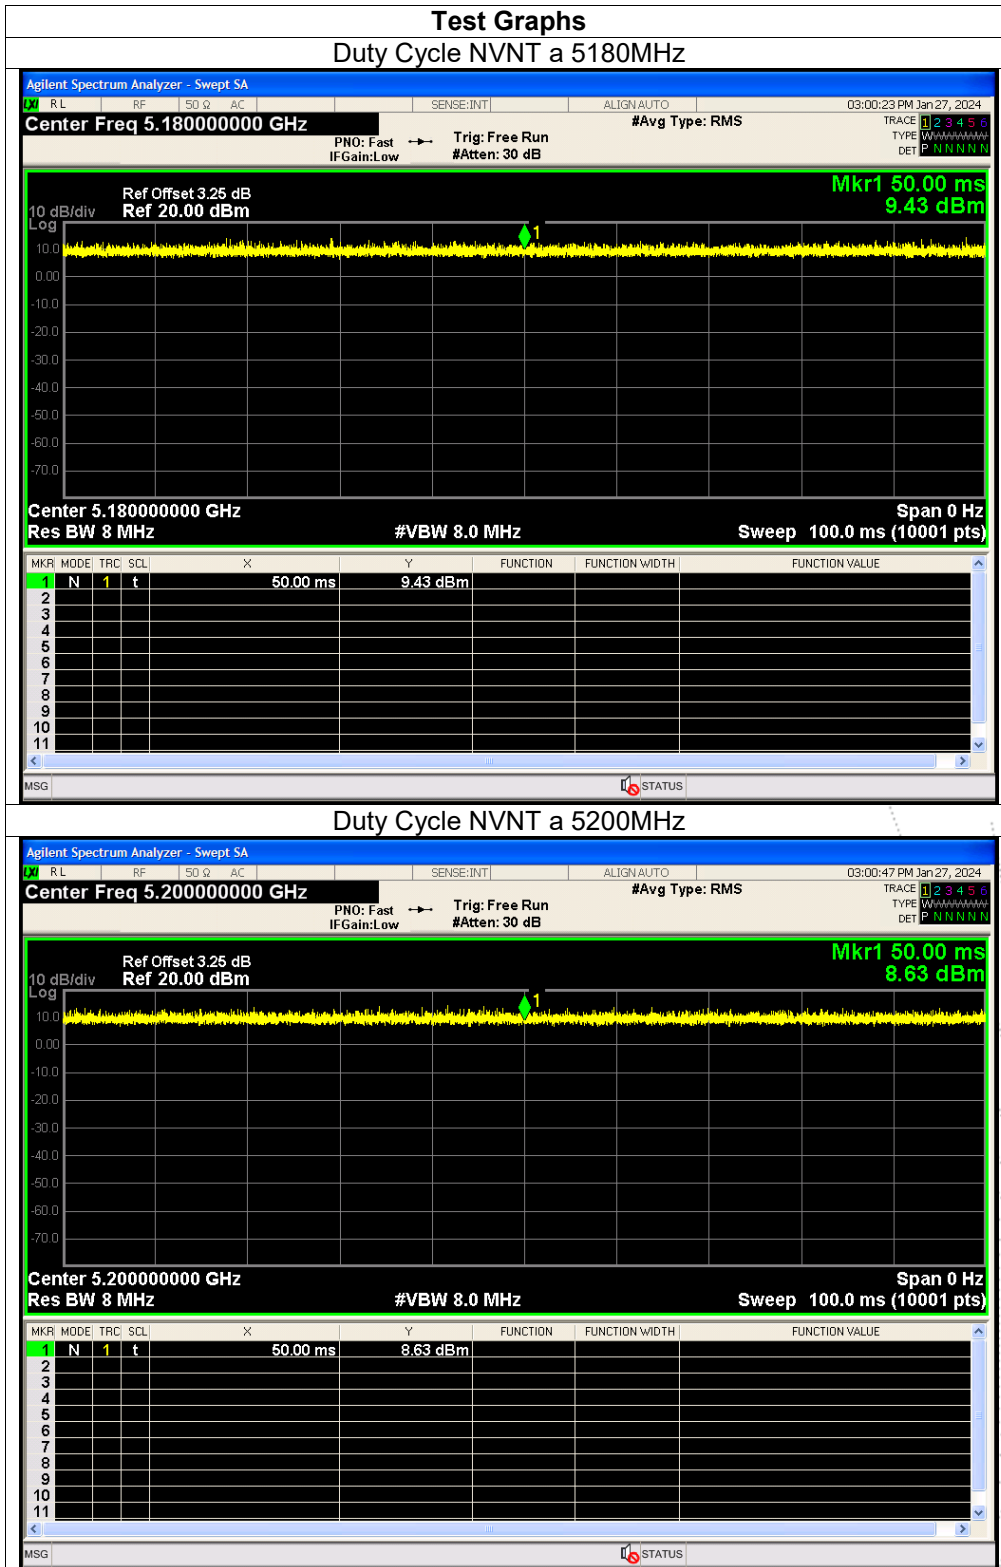


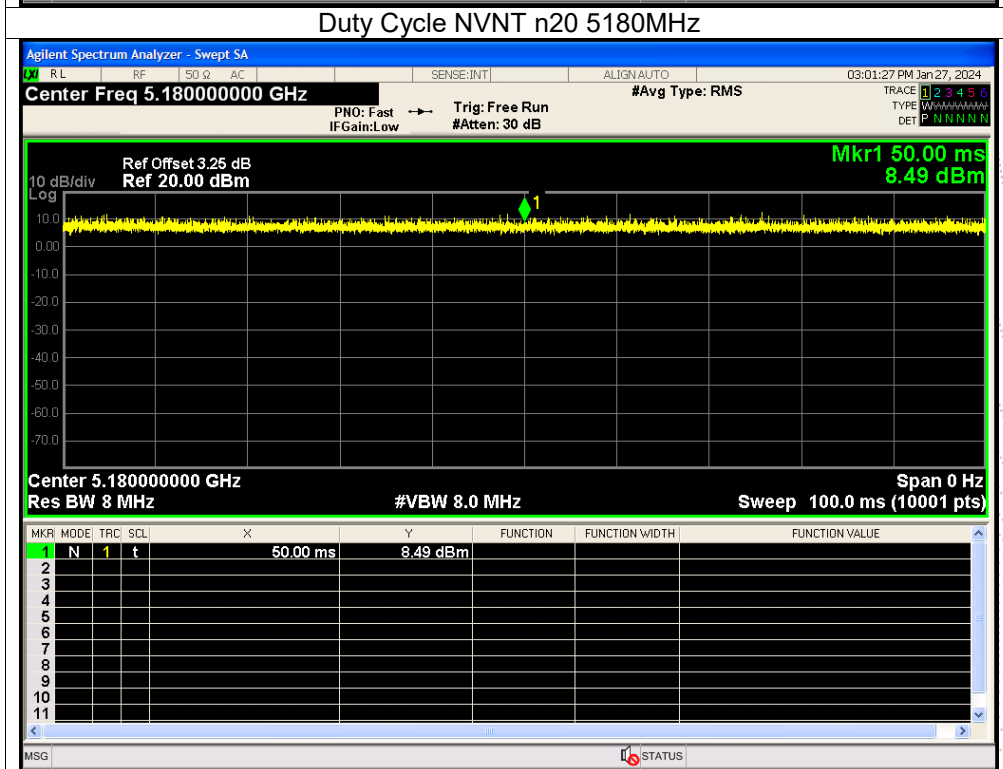
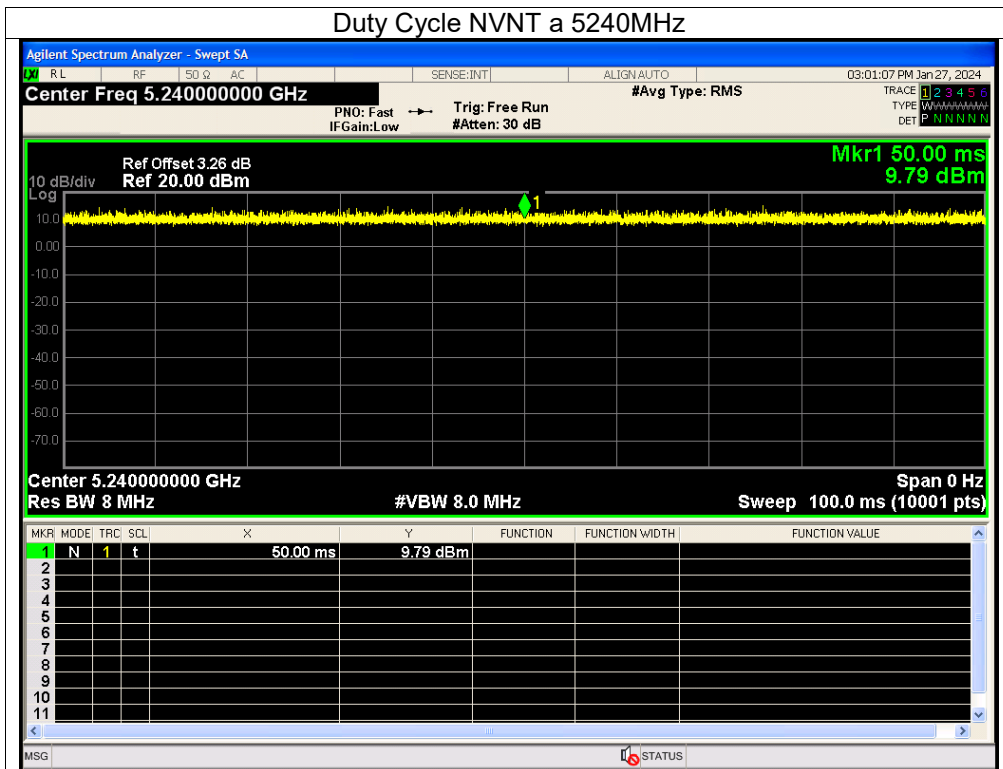


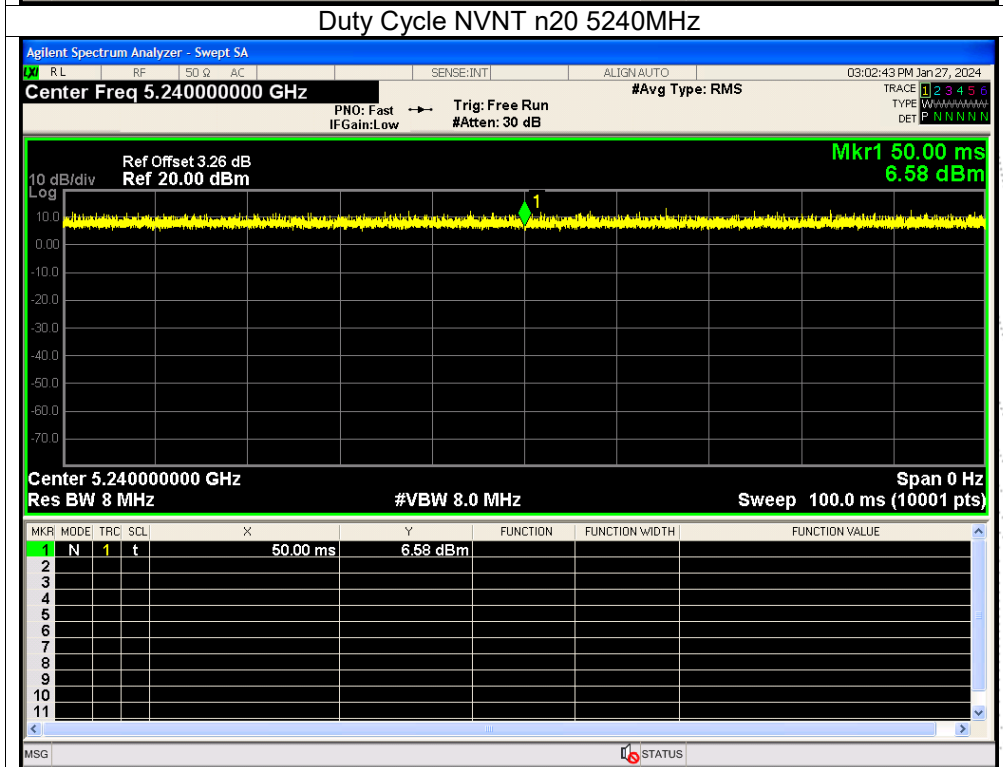
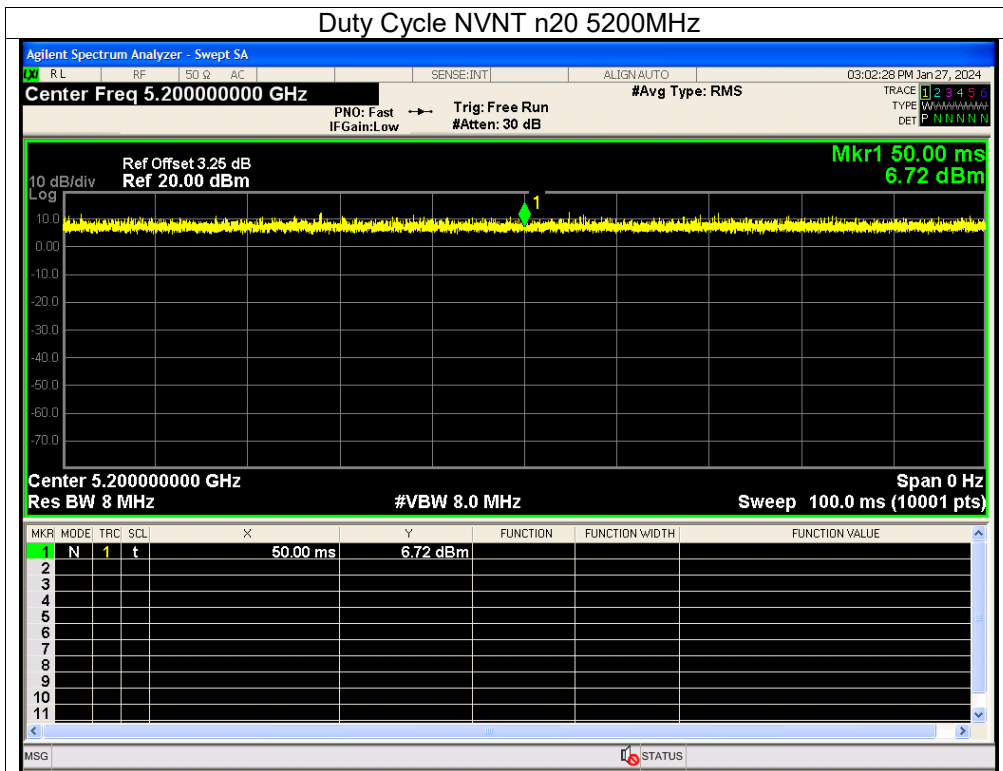


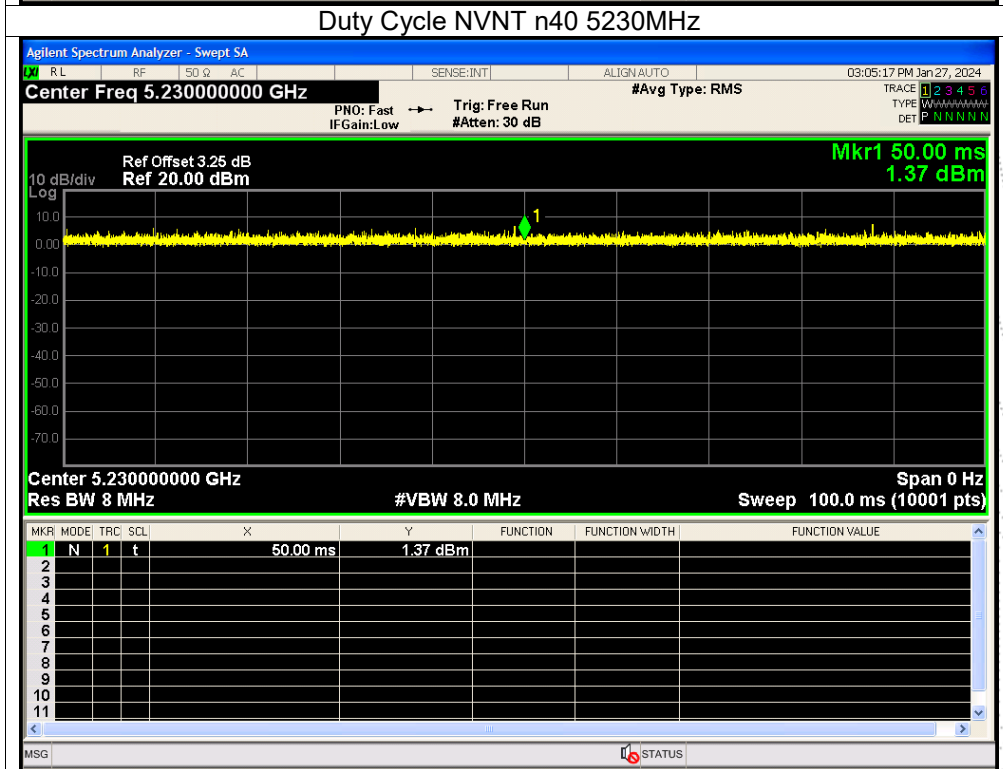
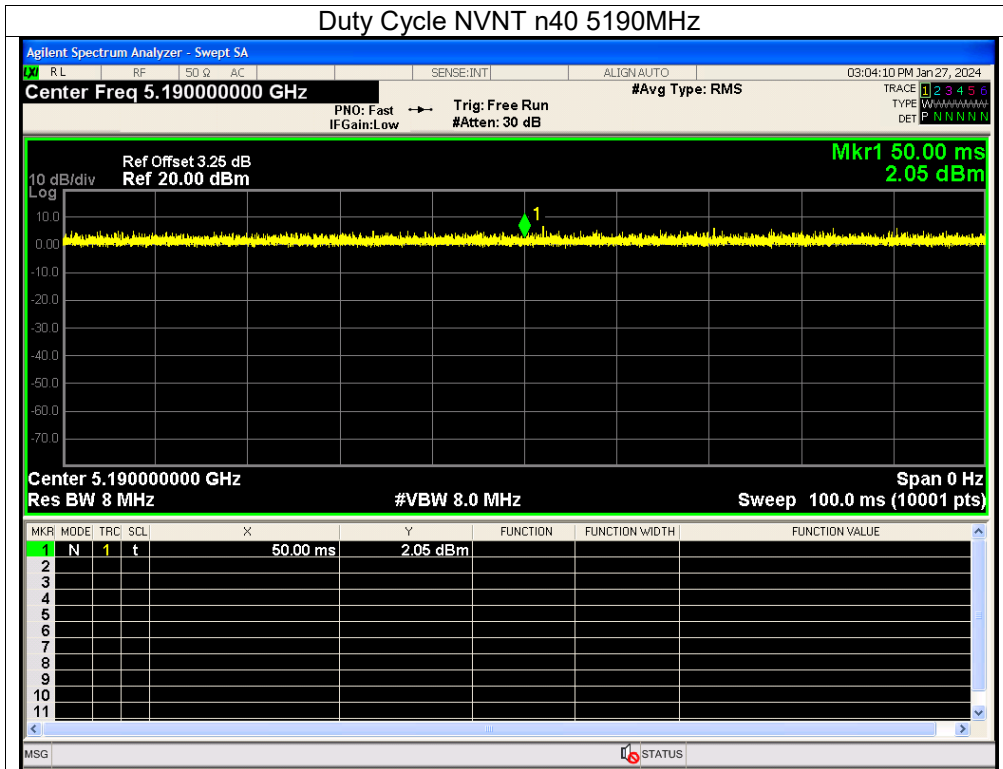


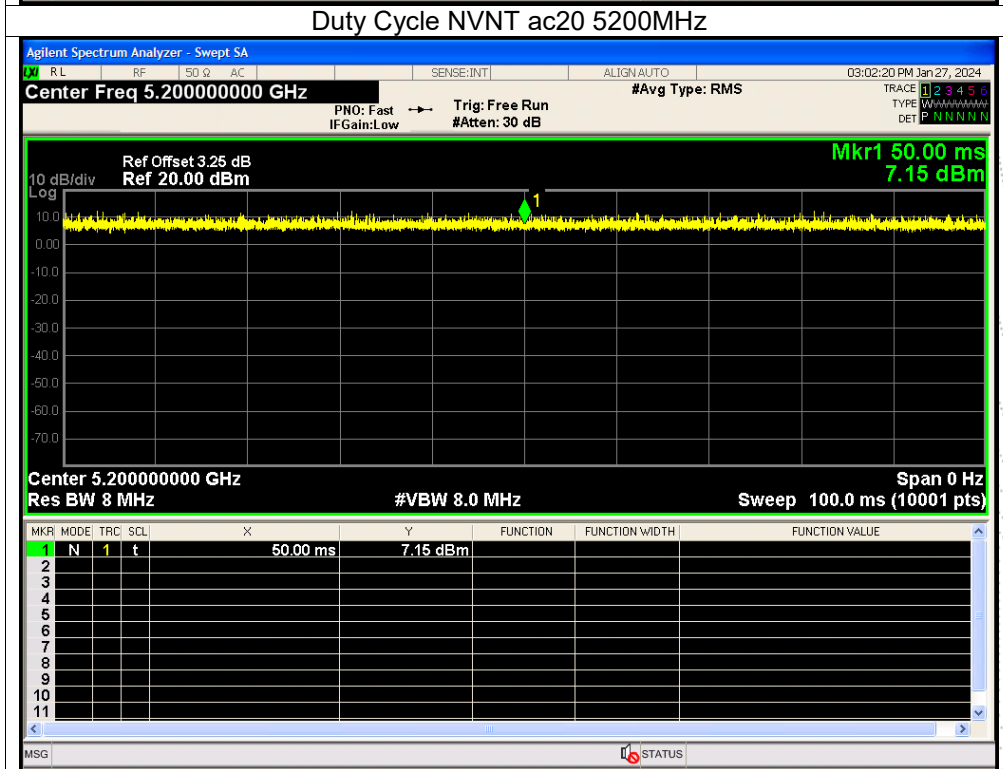
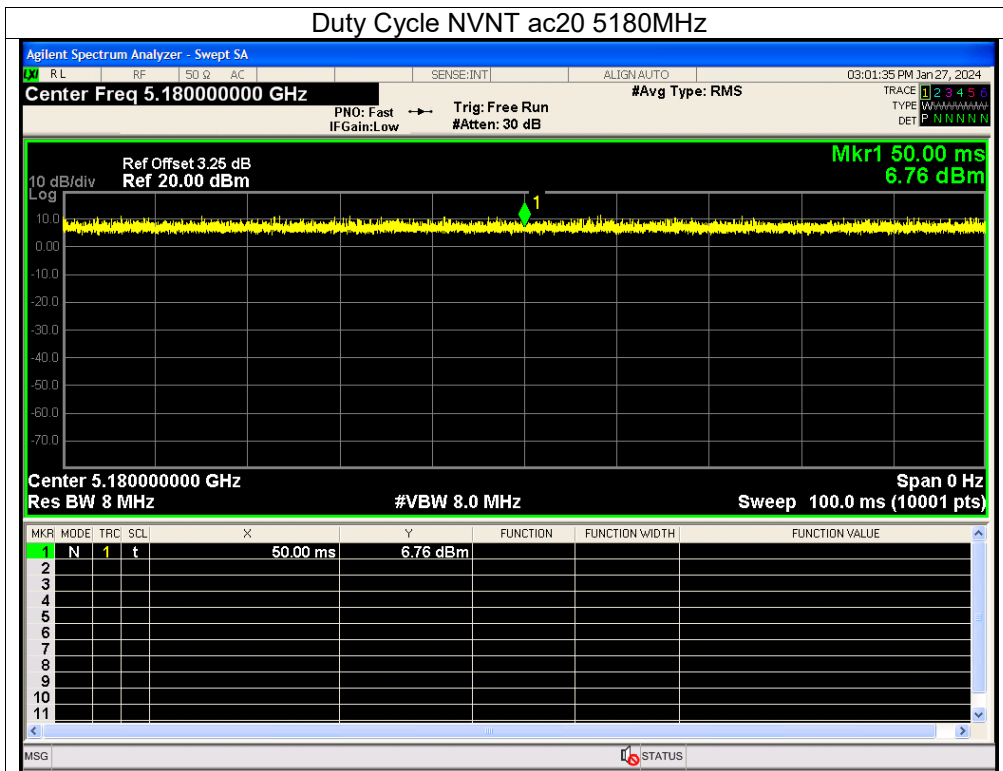


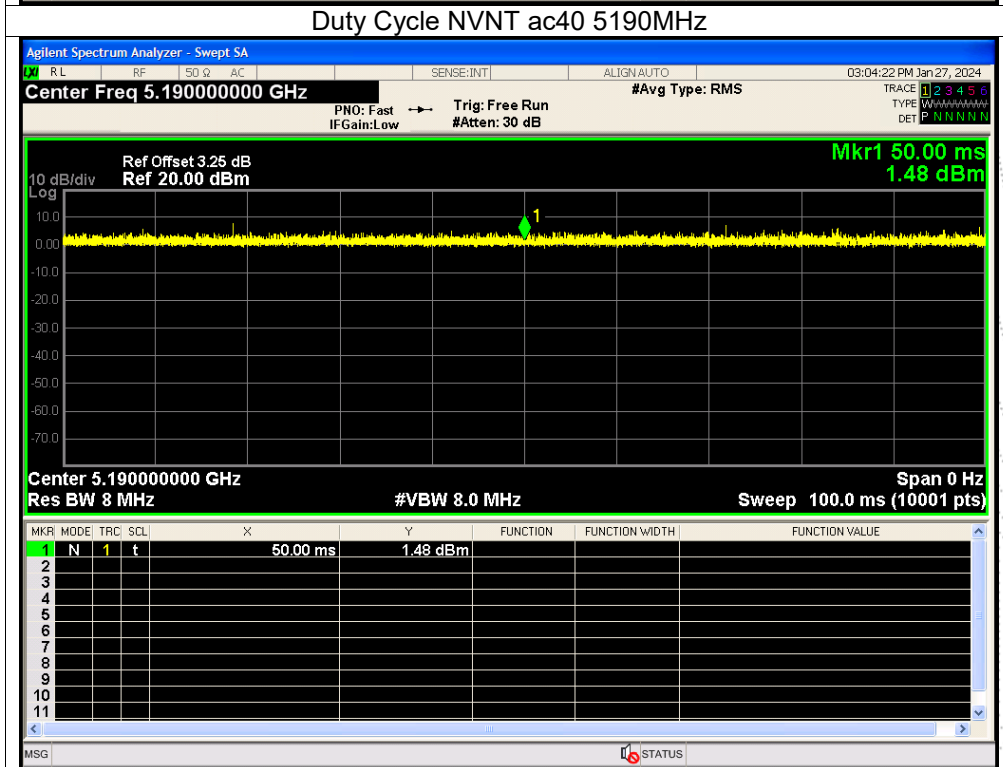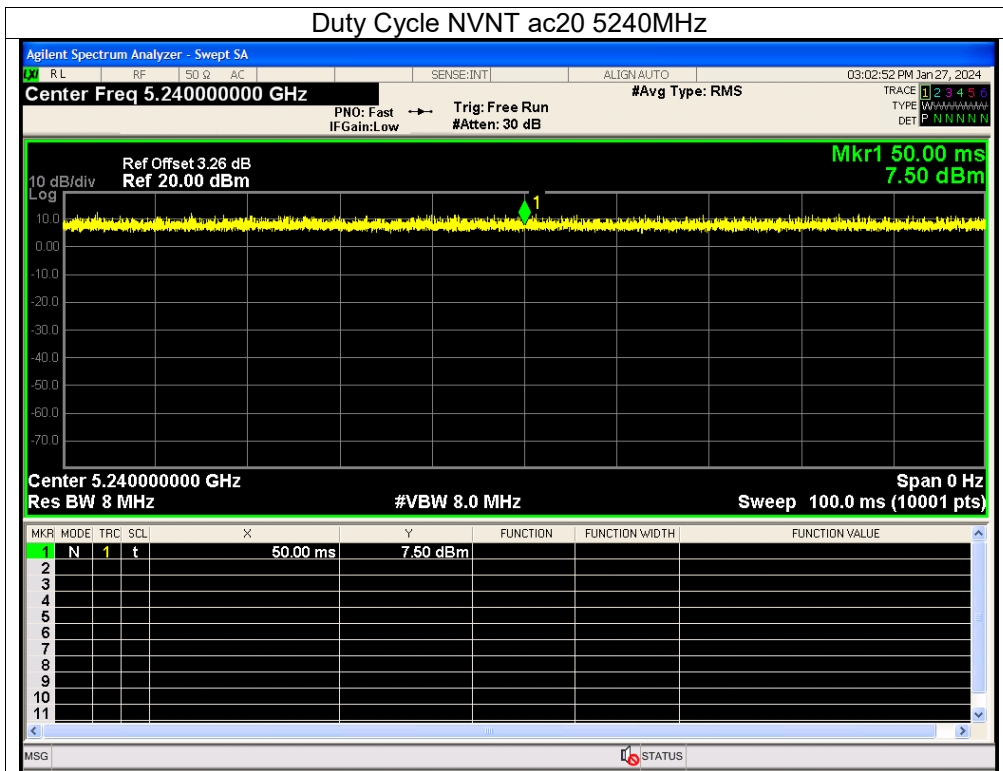

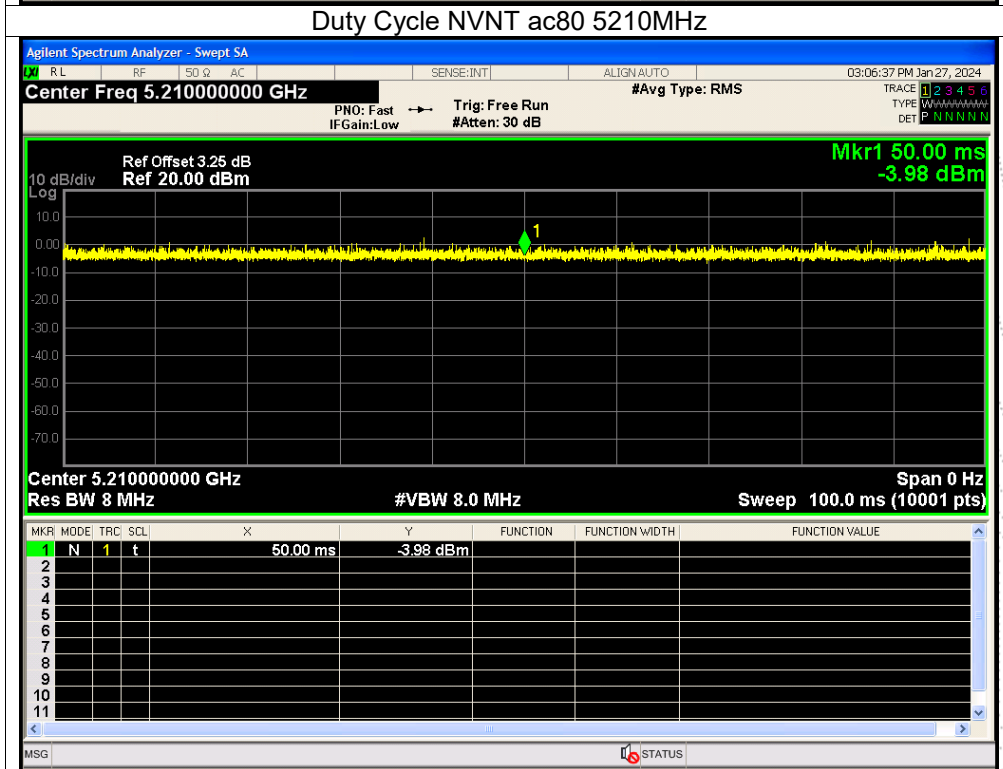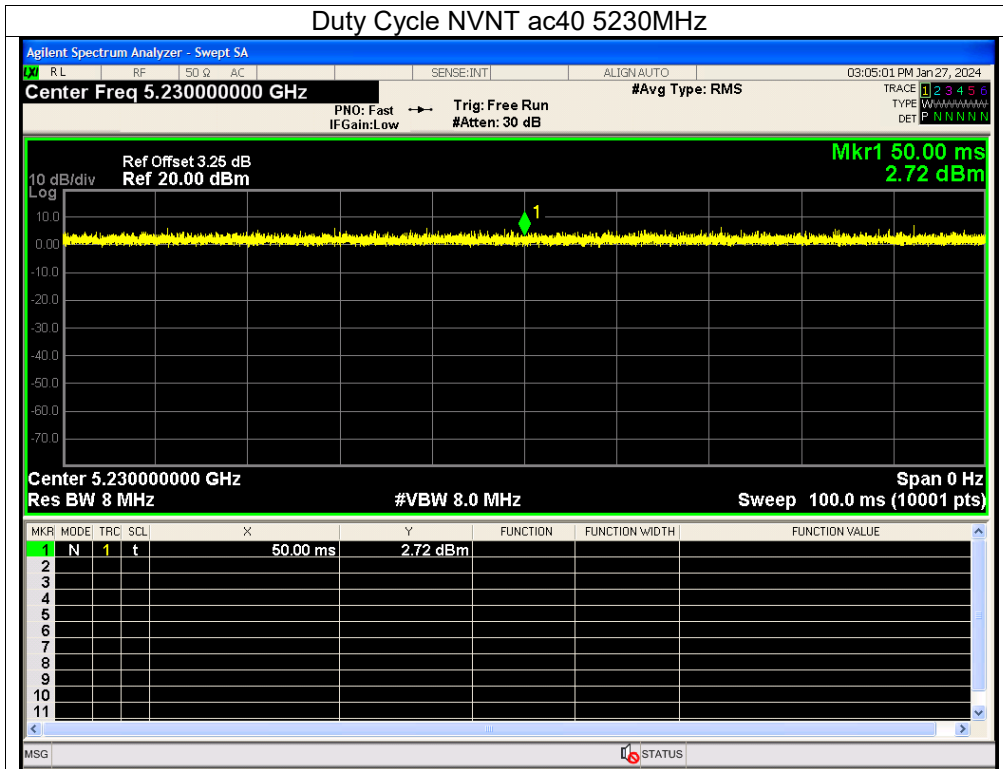


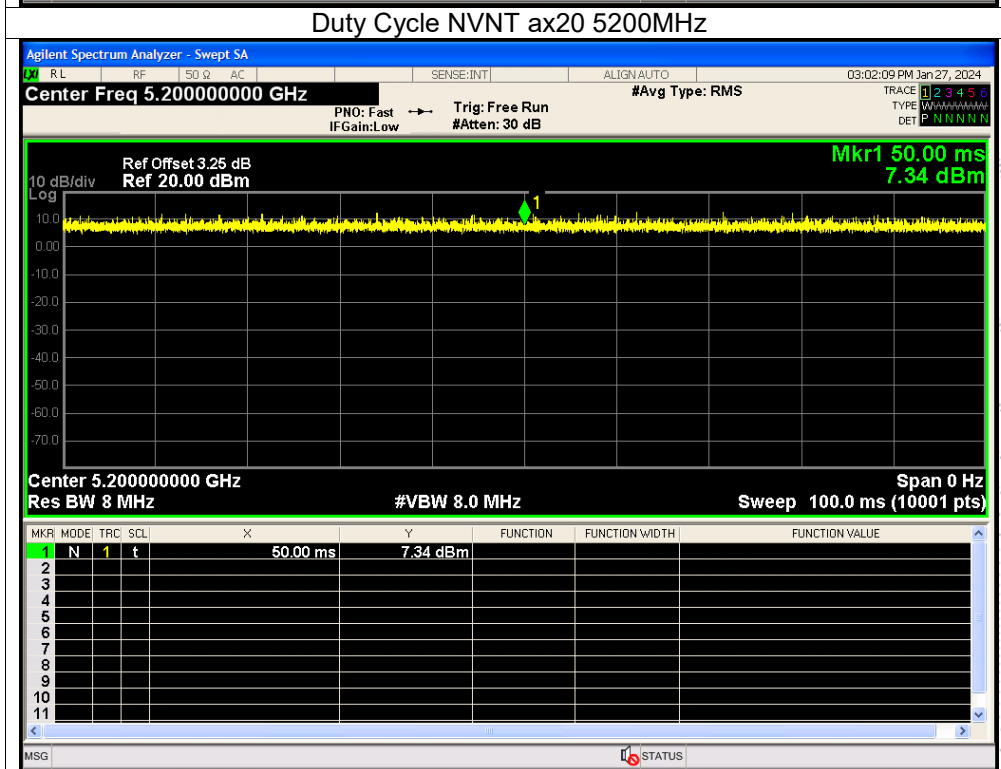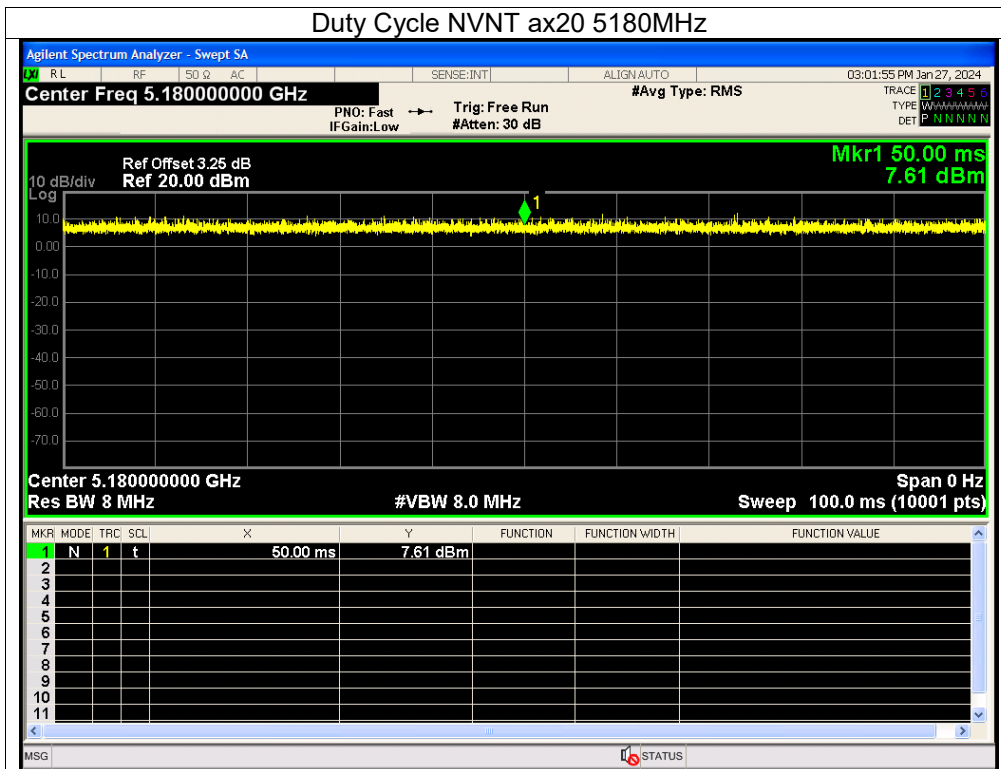

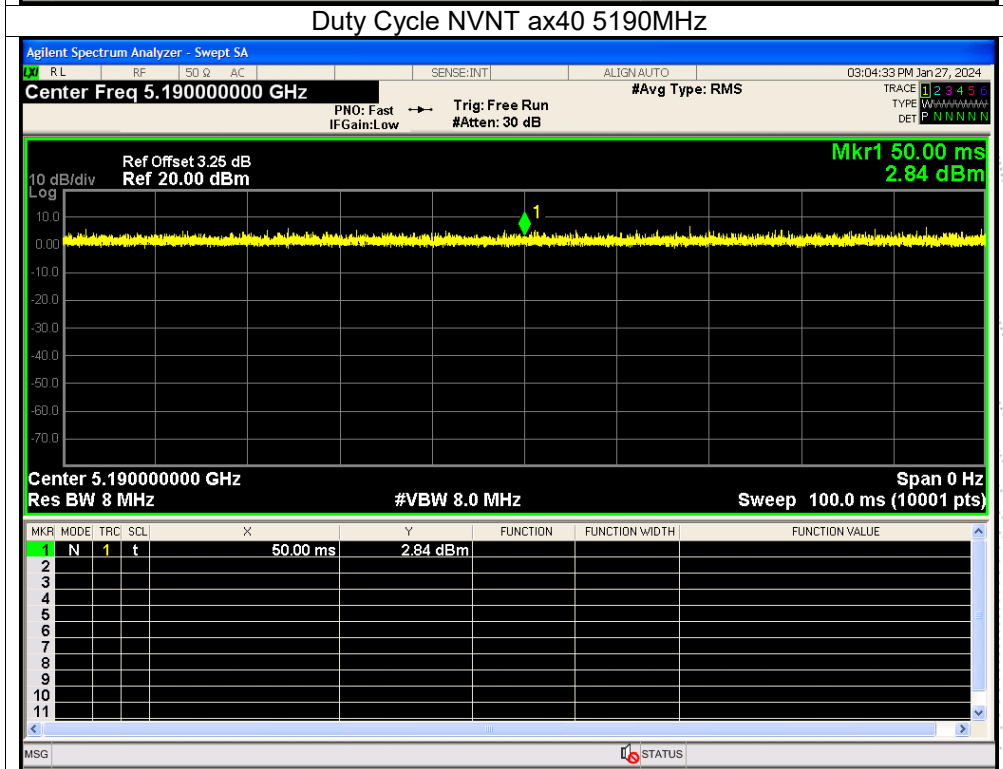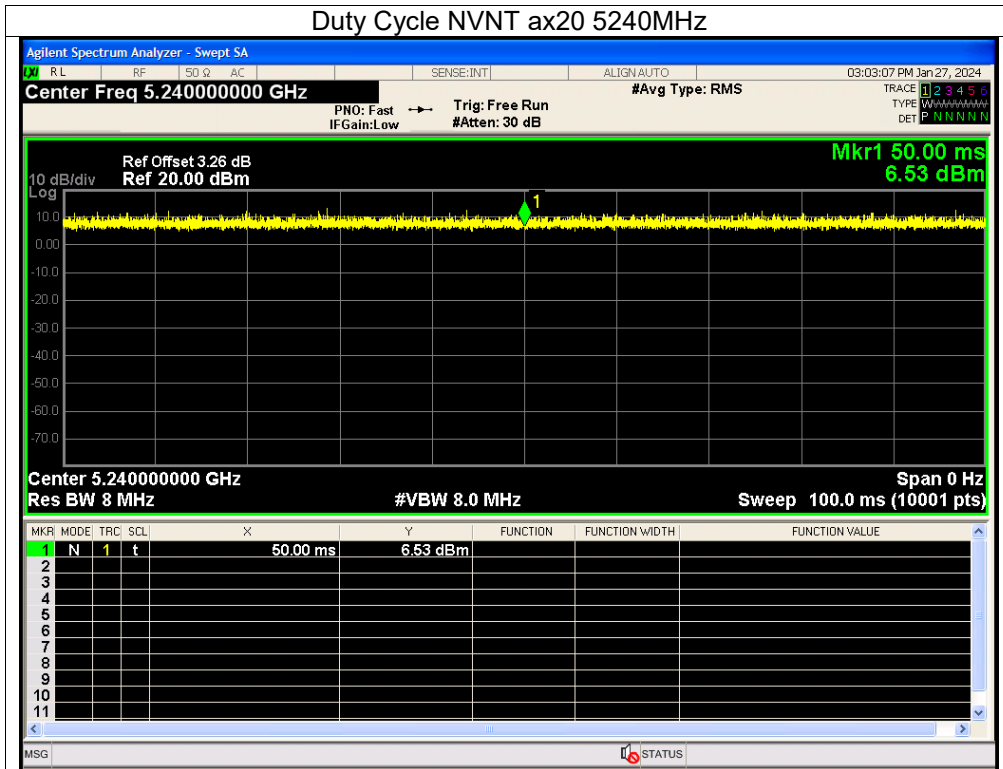


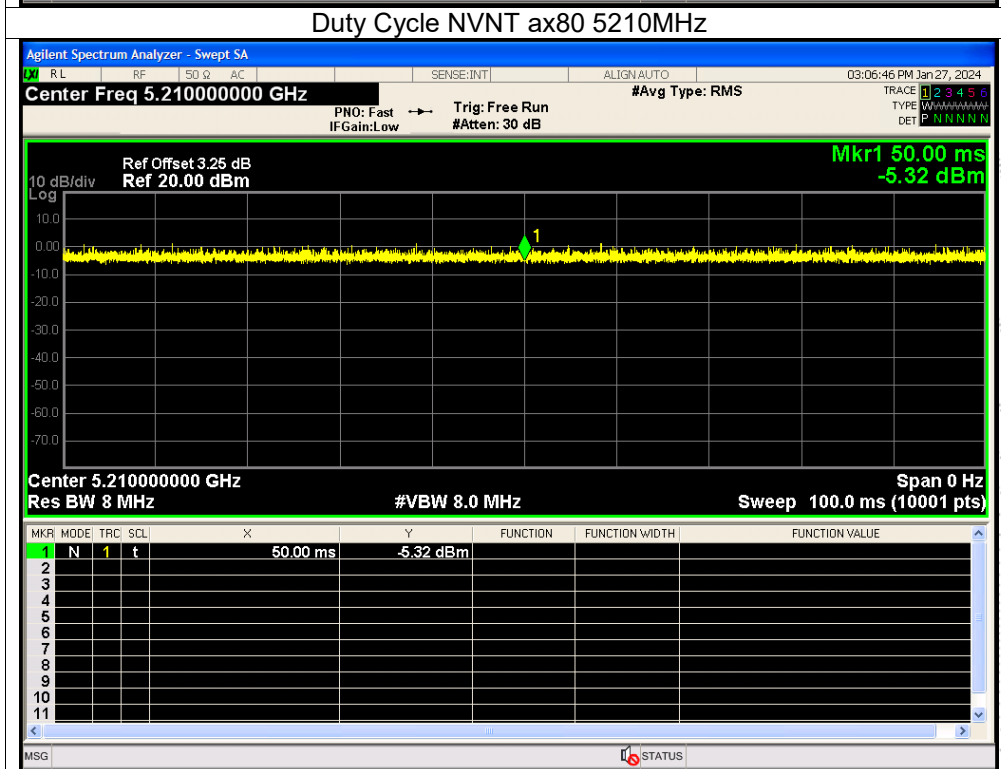
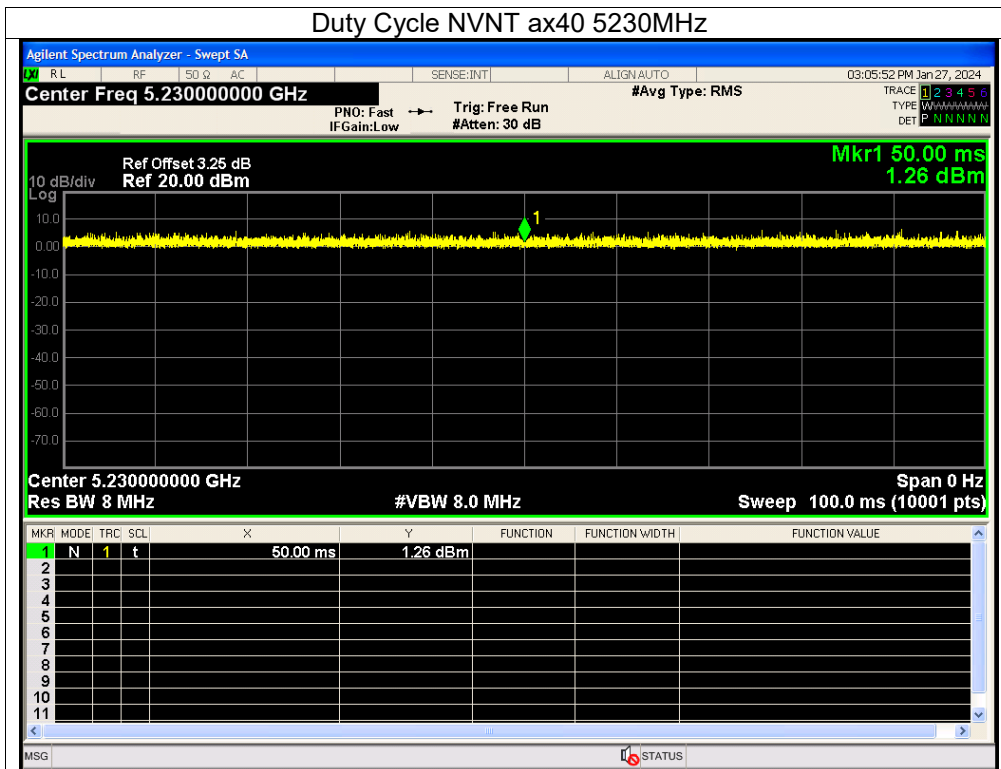




Condition	Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5260	100	0	0
NVNT	a	5280	100	0	0
NVNT	a	5320	100	0	0
NVNT	n20	5260	100	0	0
NVNT	n20	5280	100	0	0
NVNT	n20	5320	100	0	0
NVNT	n40	5270	100	0	0
NVNT	n40	5310	100	0	0
NVNT	ac20	5260	100	0	0
NVNT	ac20	5280	100	0	0
NVNT	ac20	5320	100	0	0
NVNT	ac40	5270	100	0	0
NVNT	ac40	5310	100	0	0
NVNT	ac80	5290	100	0	0
NVNT	ax20	5260	100	0	0
NVNT	ax20	5280	100	0	0
NVNT	ax20	5320	100	0	0
NVNT	ax40	5270	100	0	0
NVNT	ax40	5310	100	0	0
NVNT	ax80	5290	100	0	0


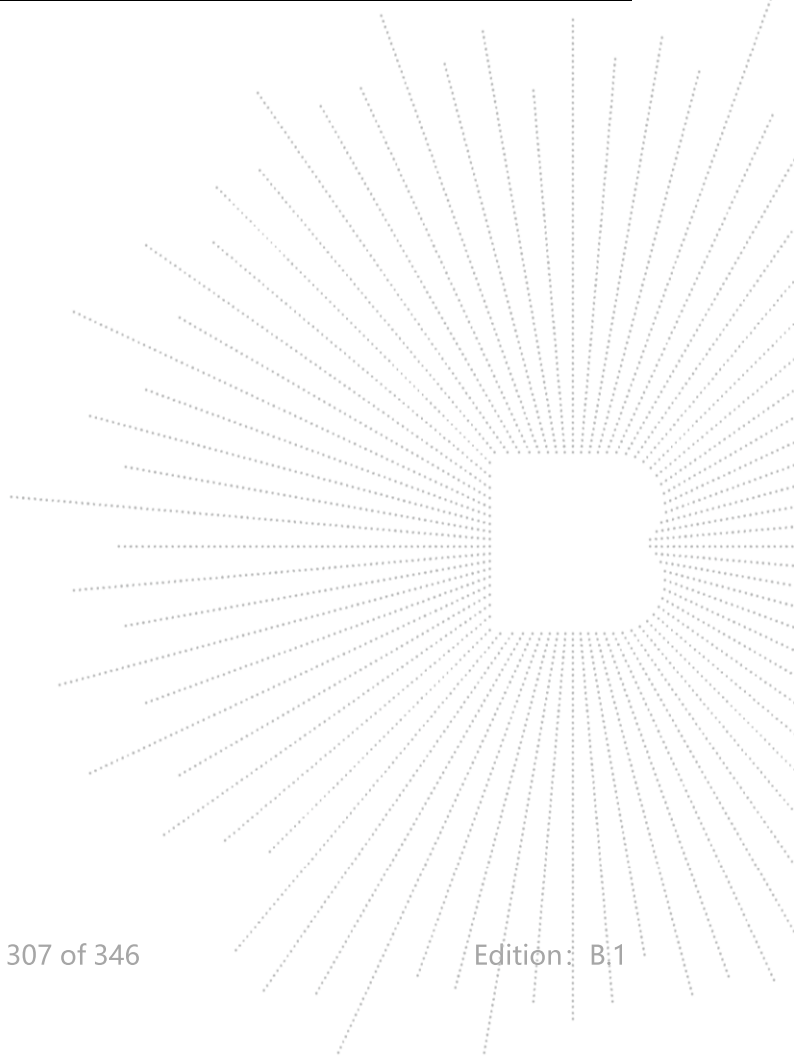




Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A . Plot.


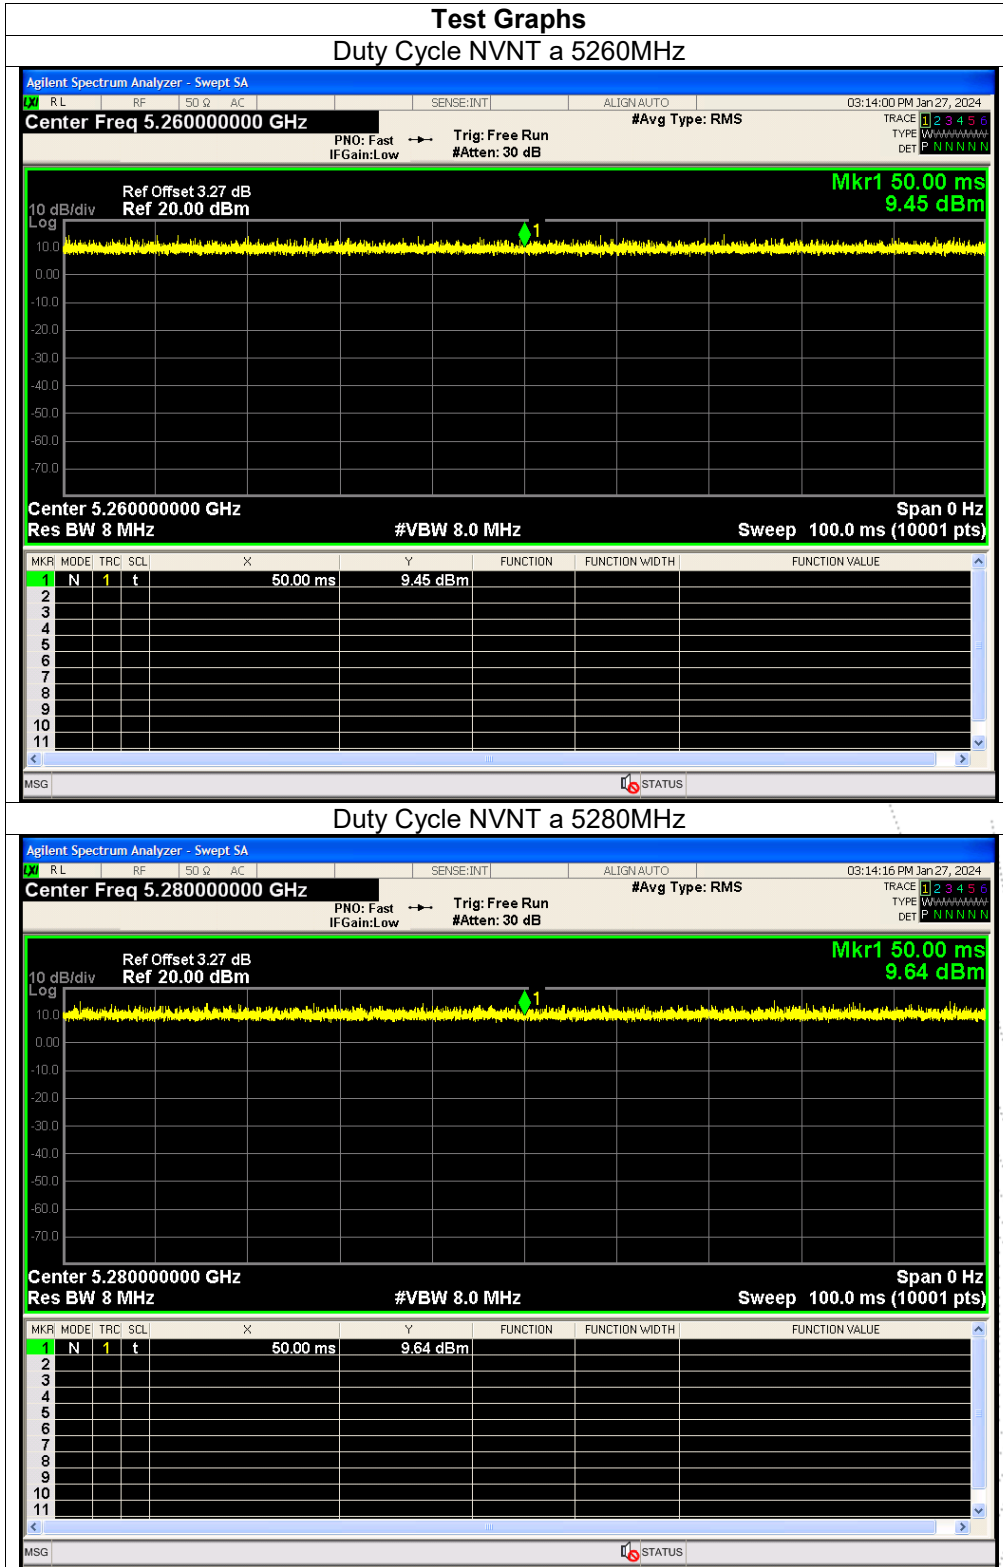


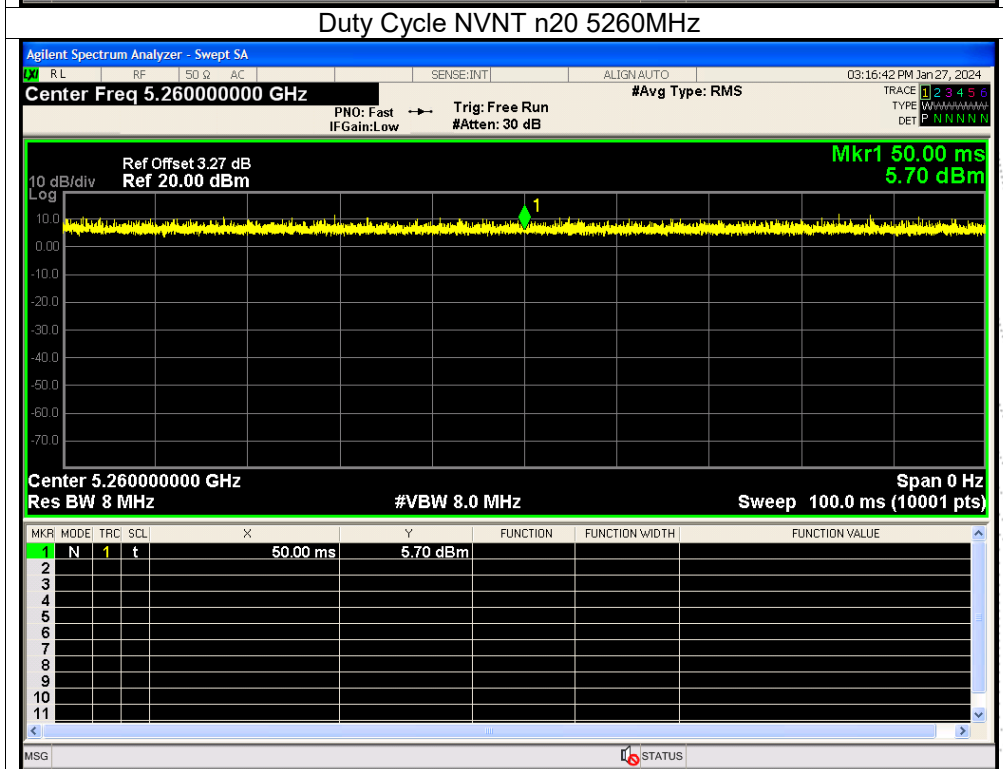
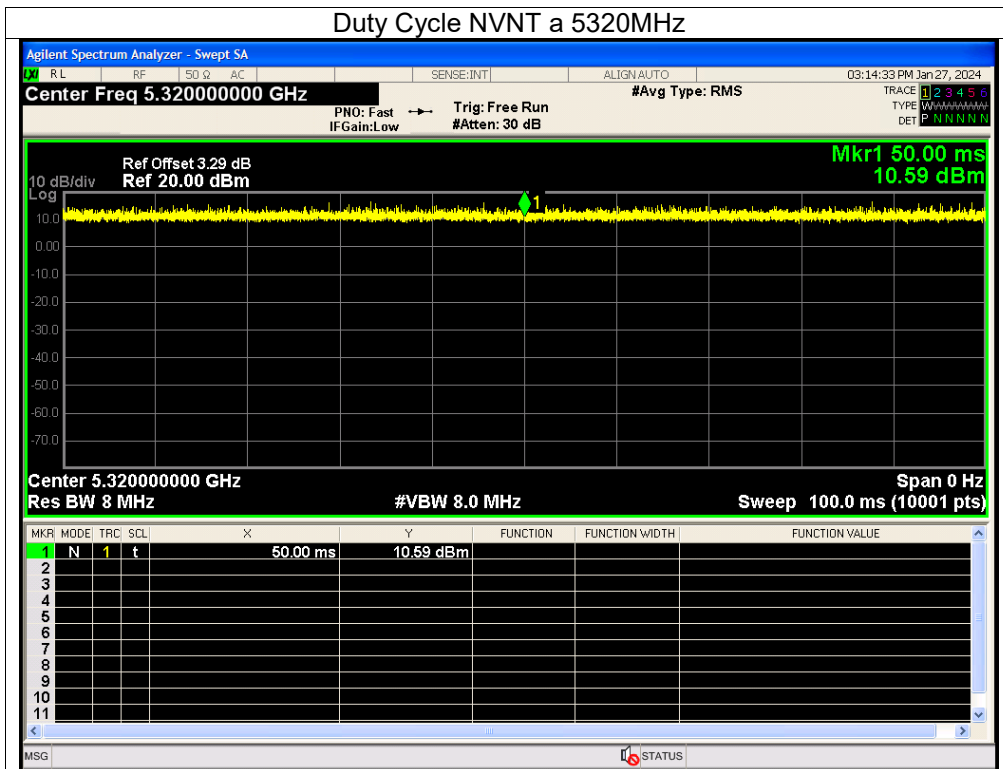


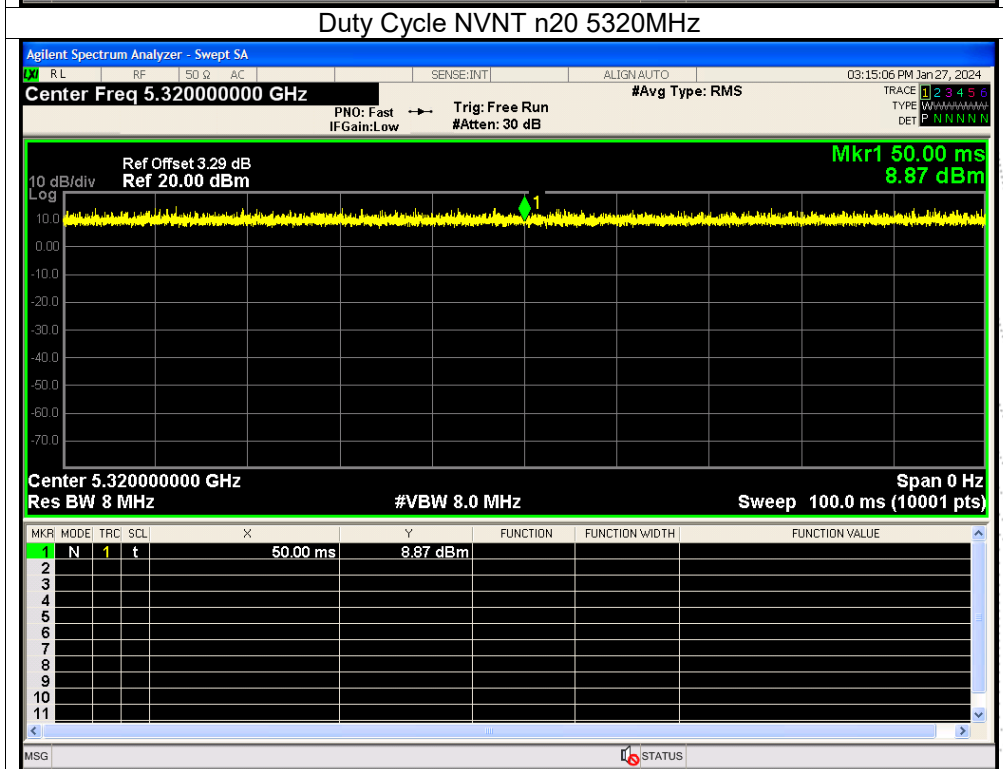
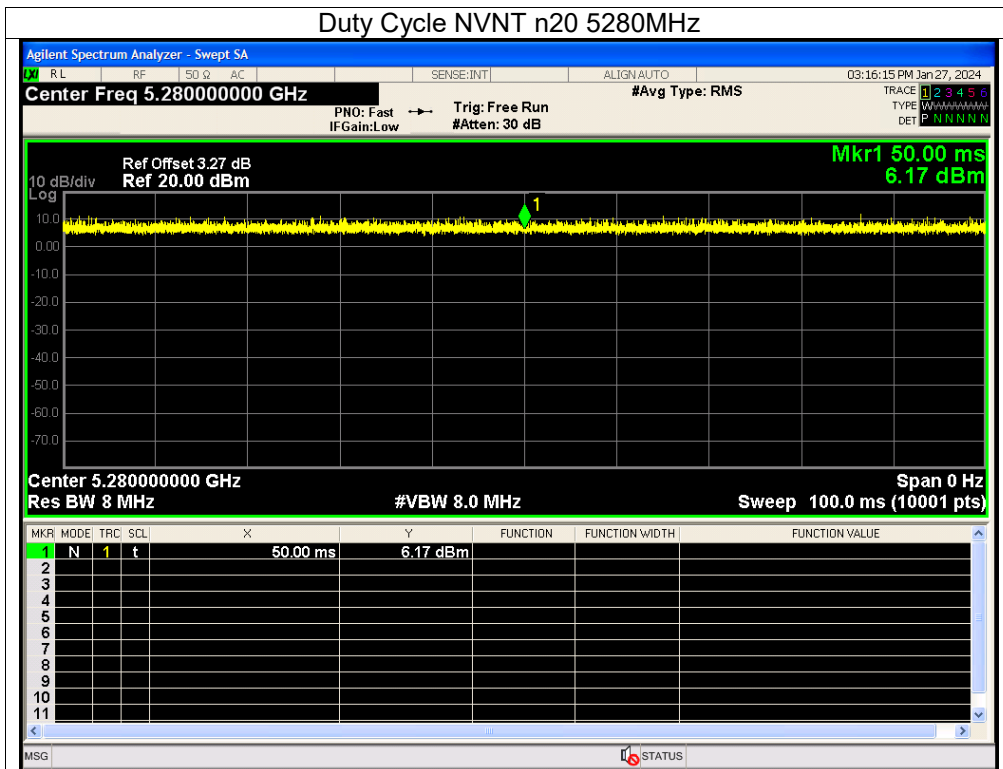


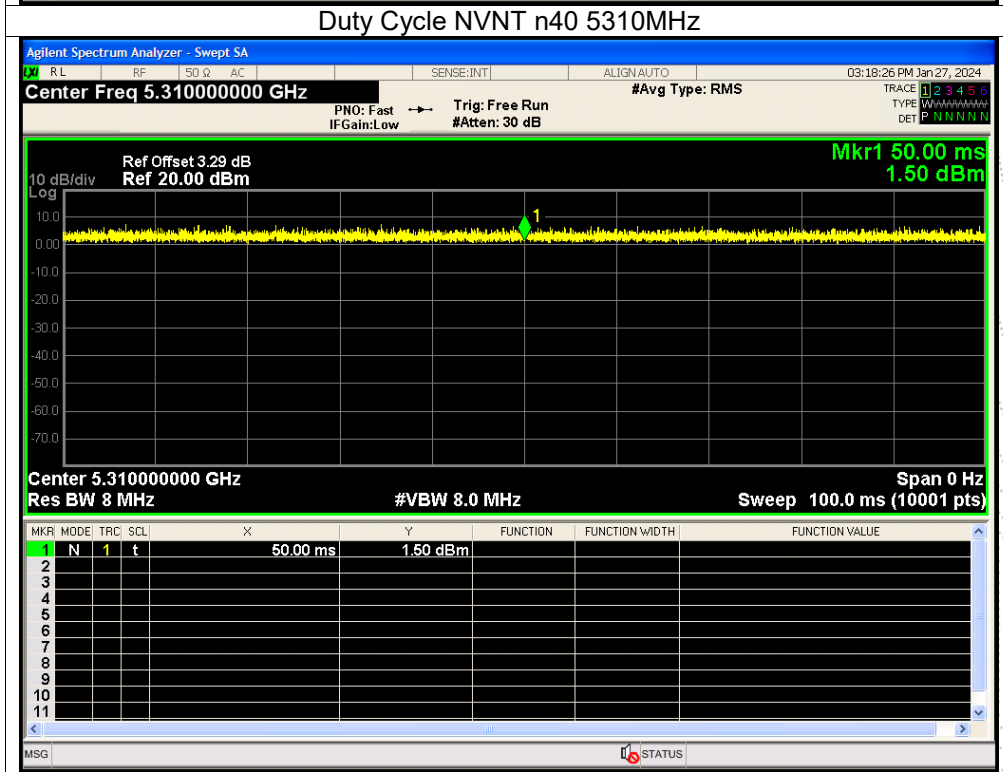
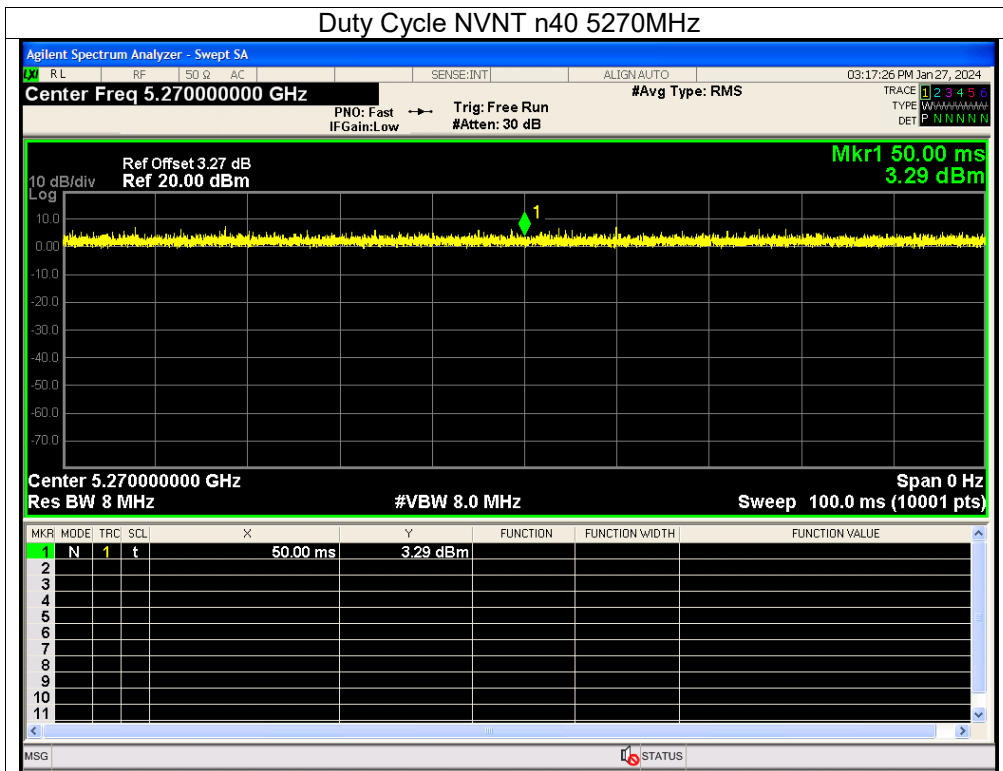


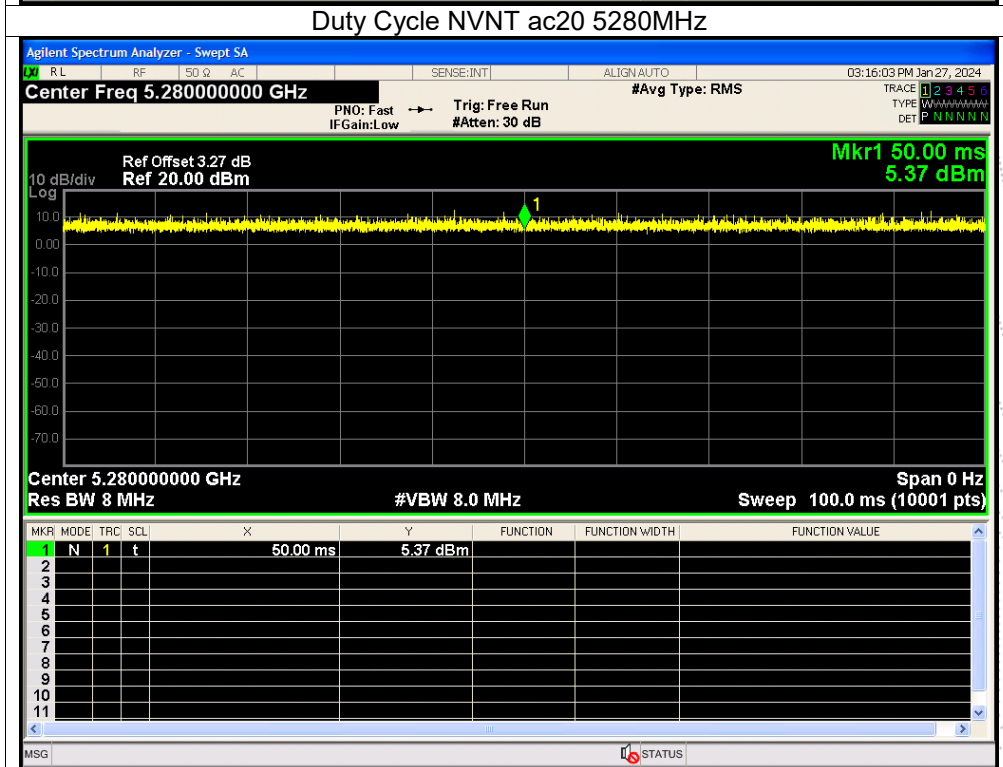
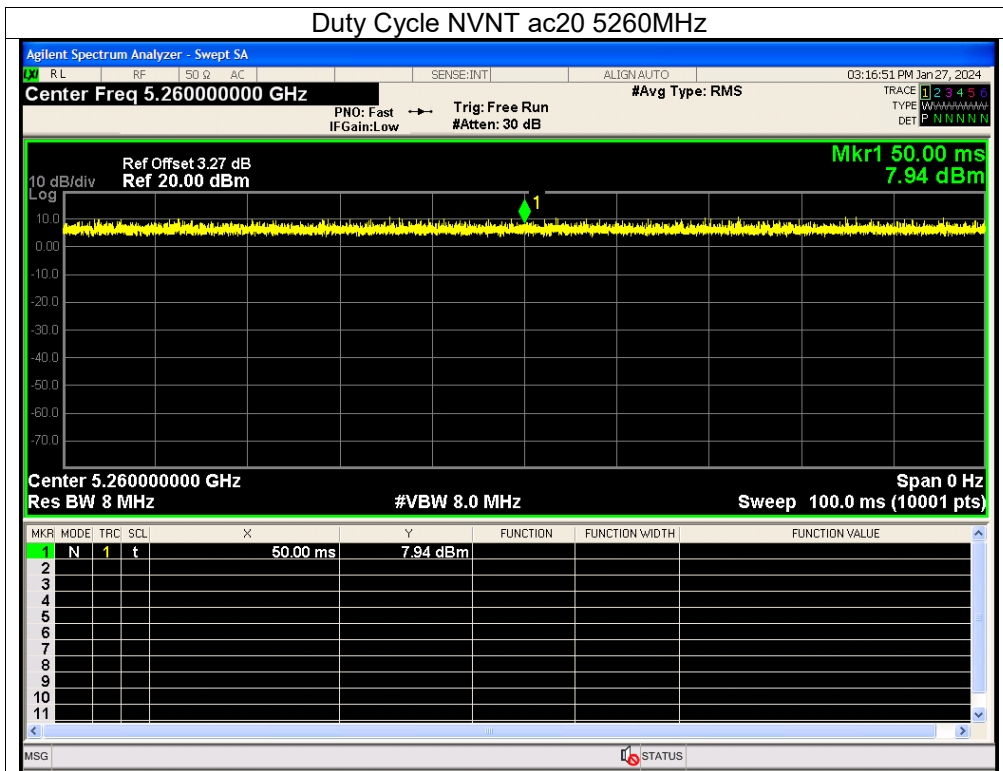


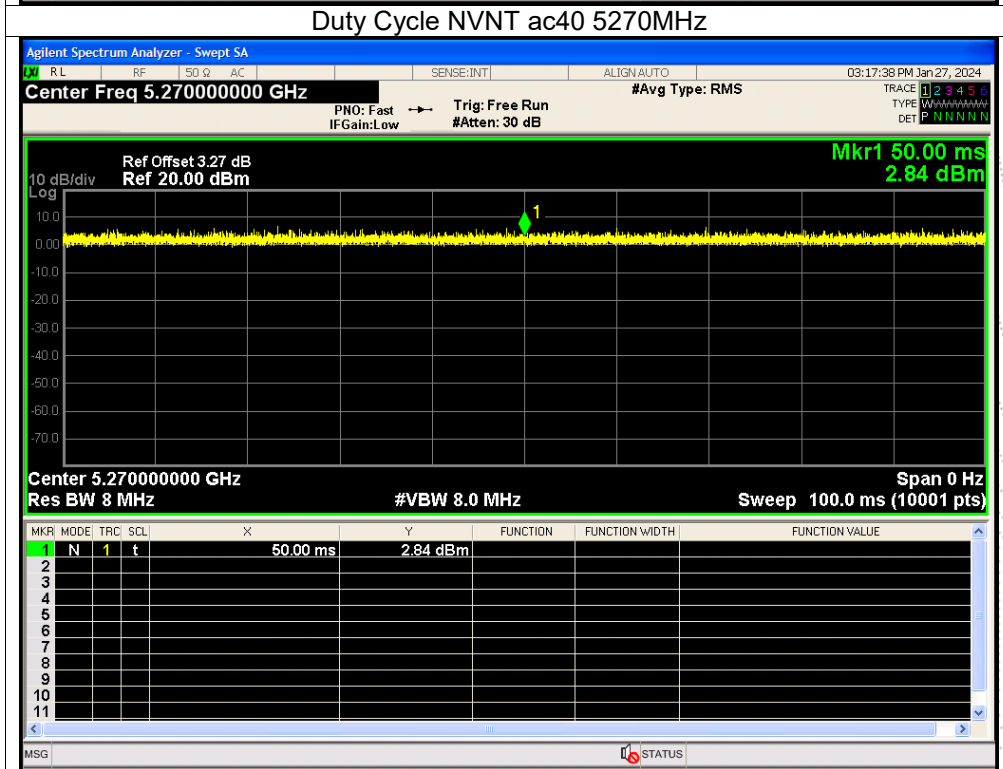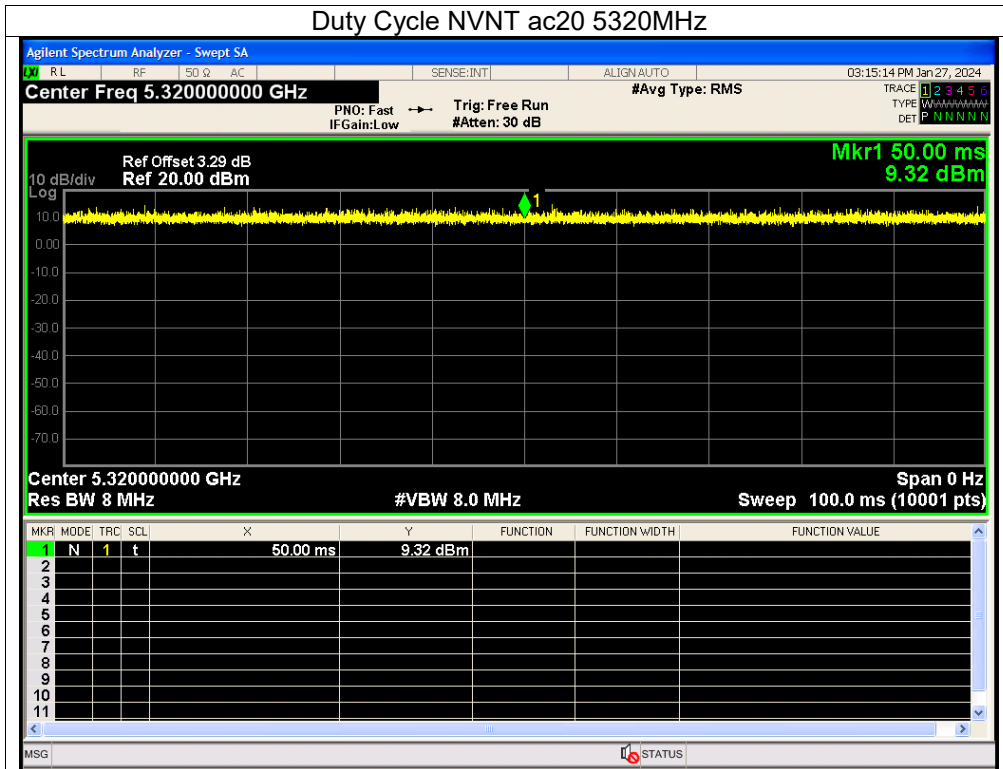

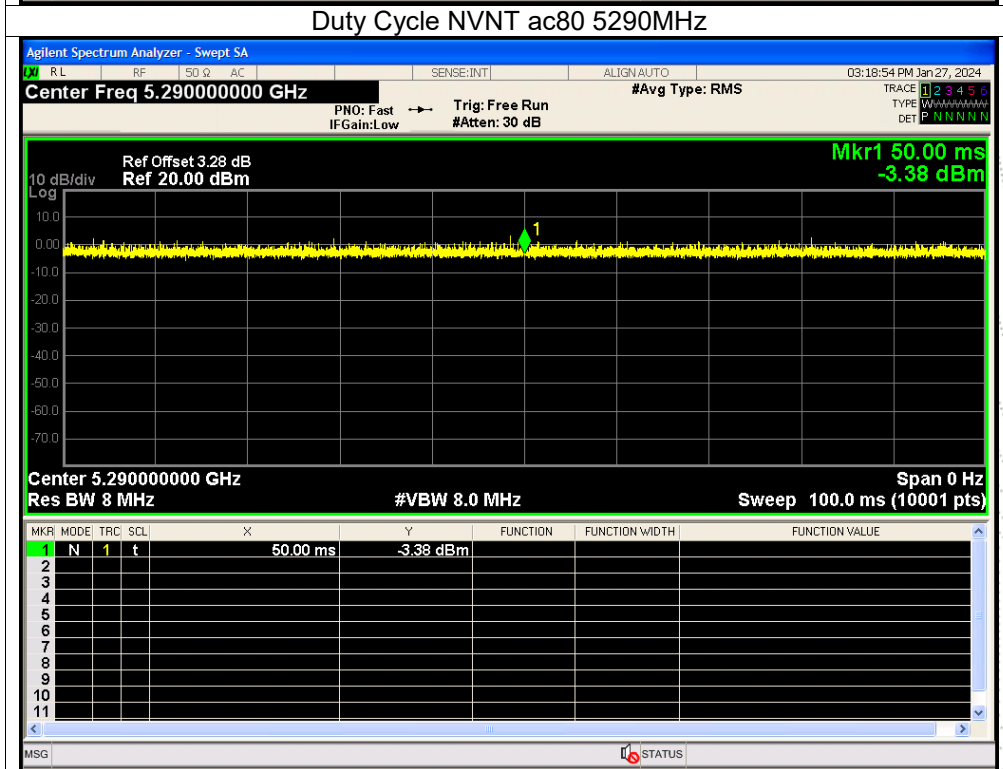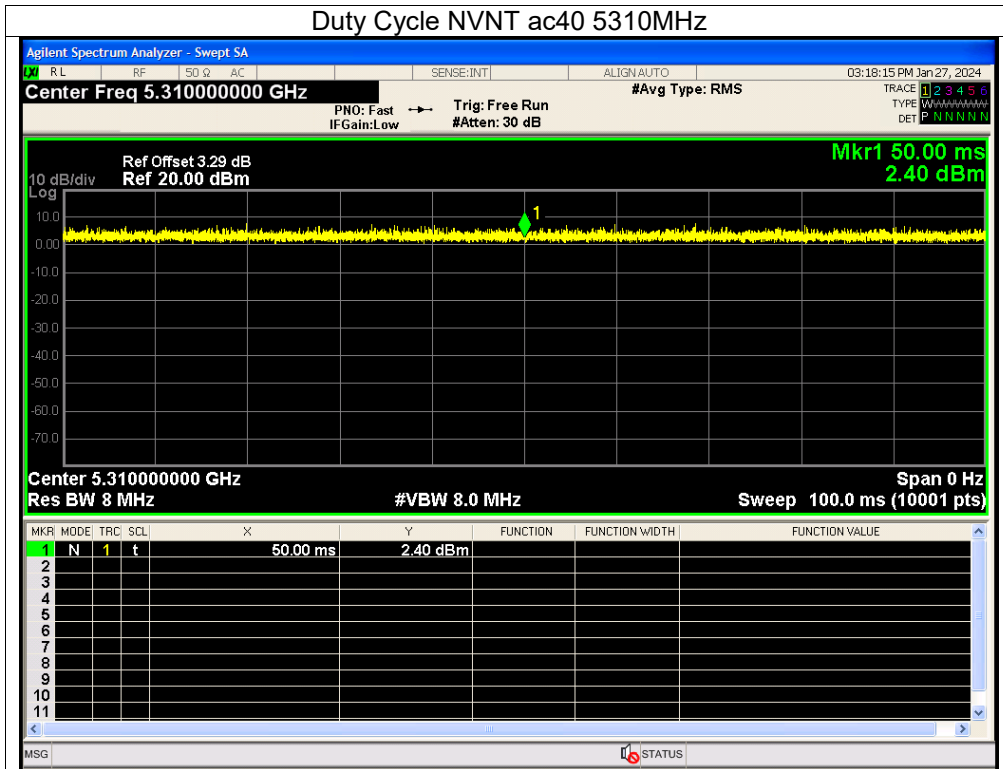


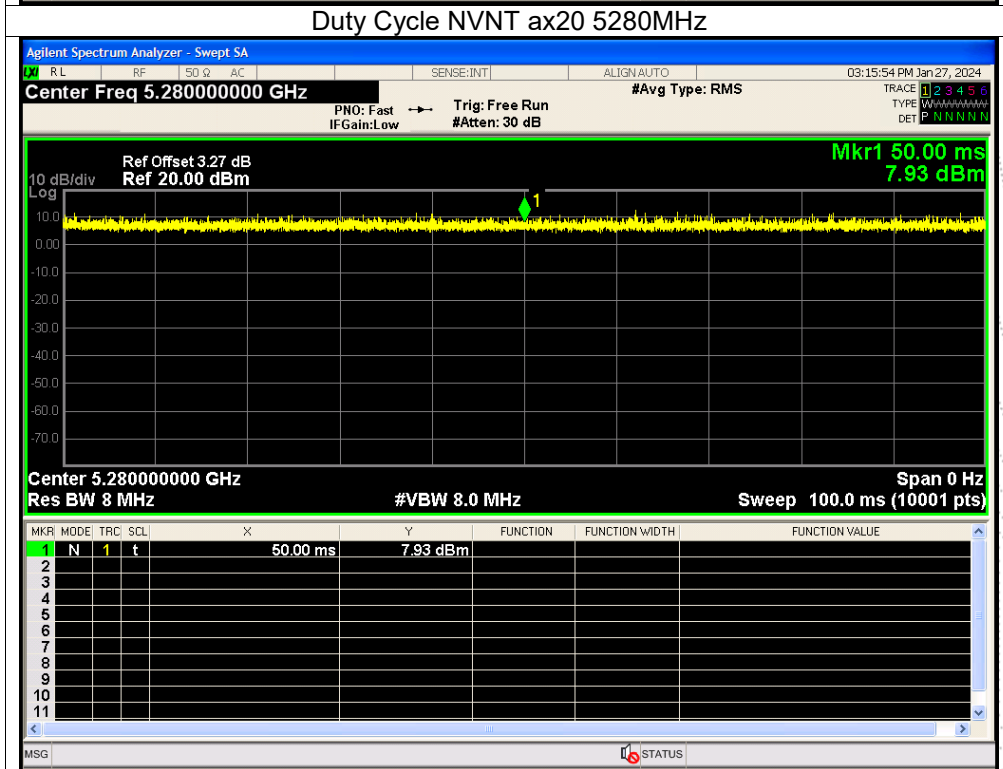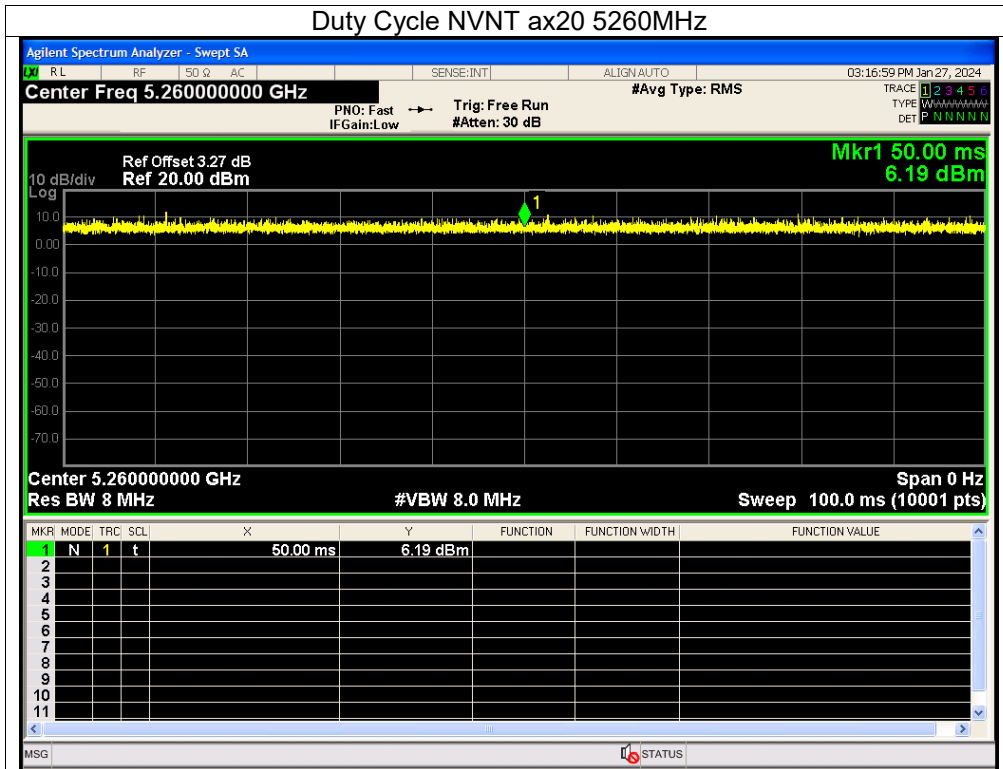

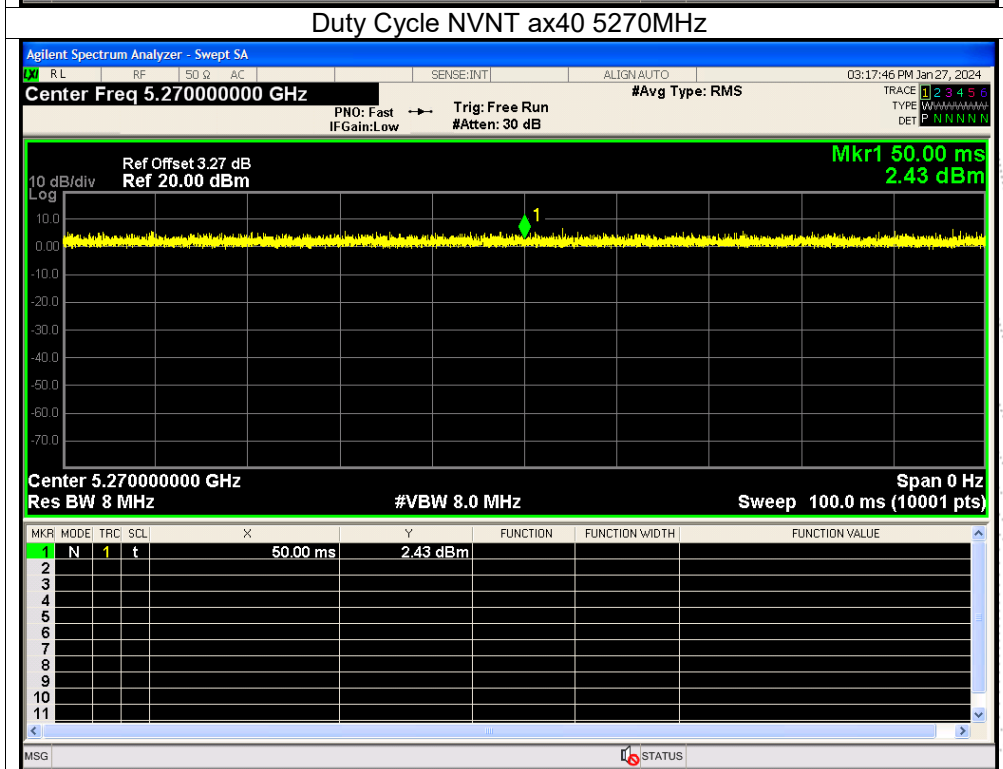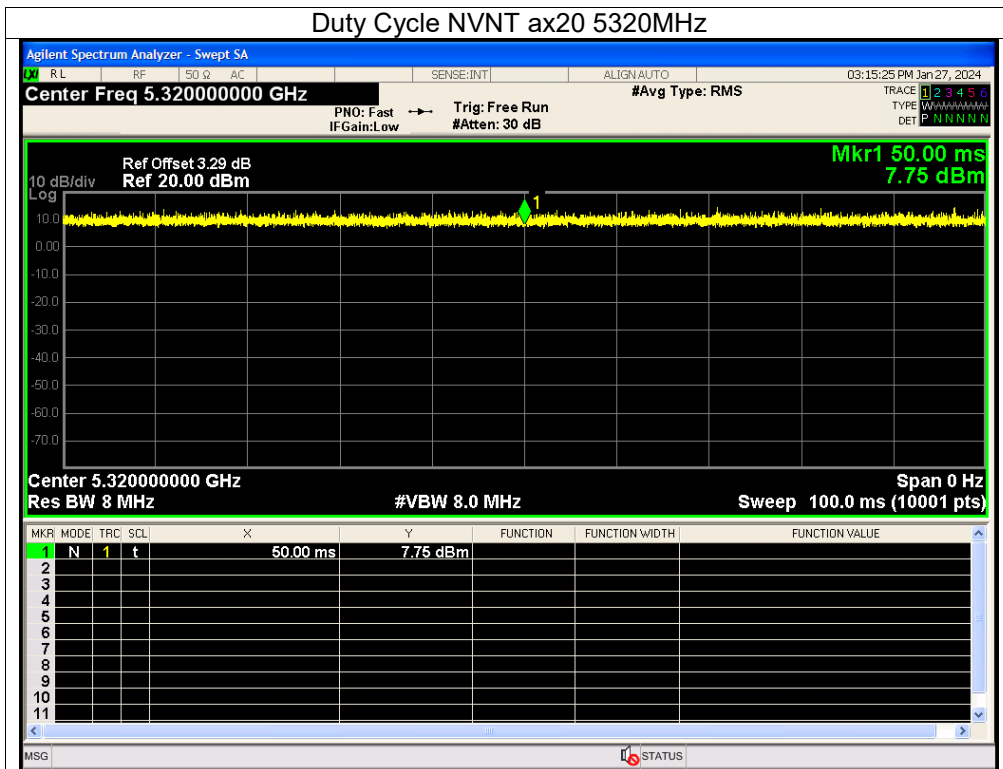


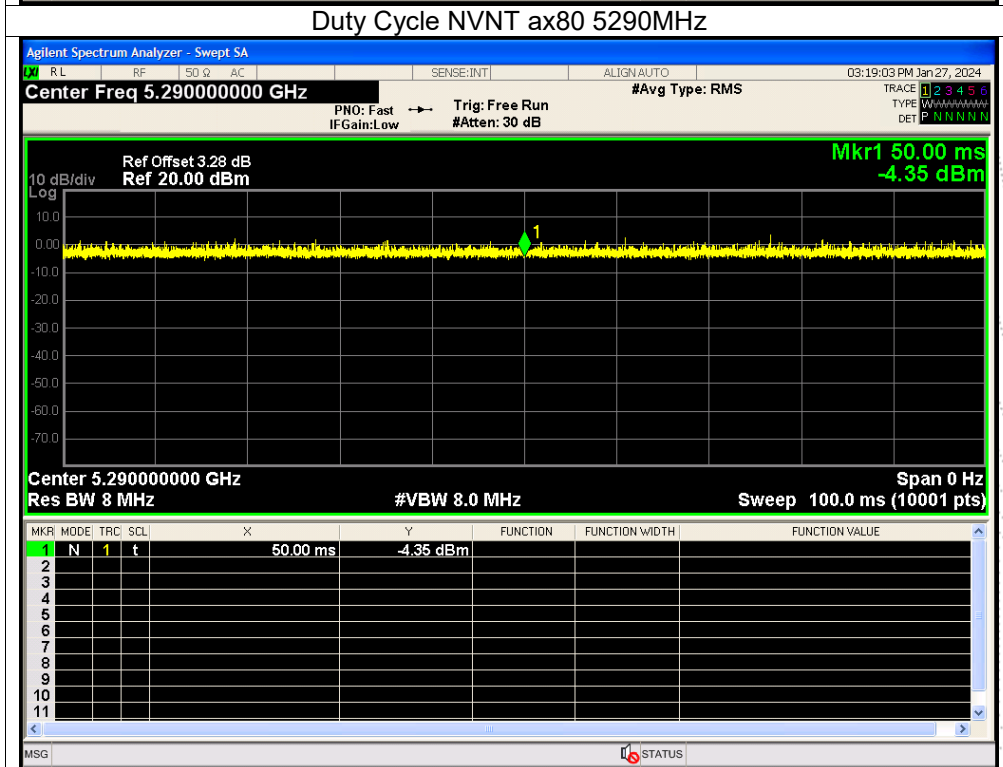
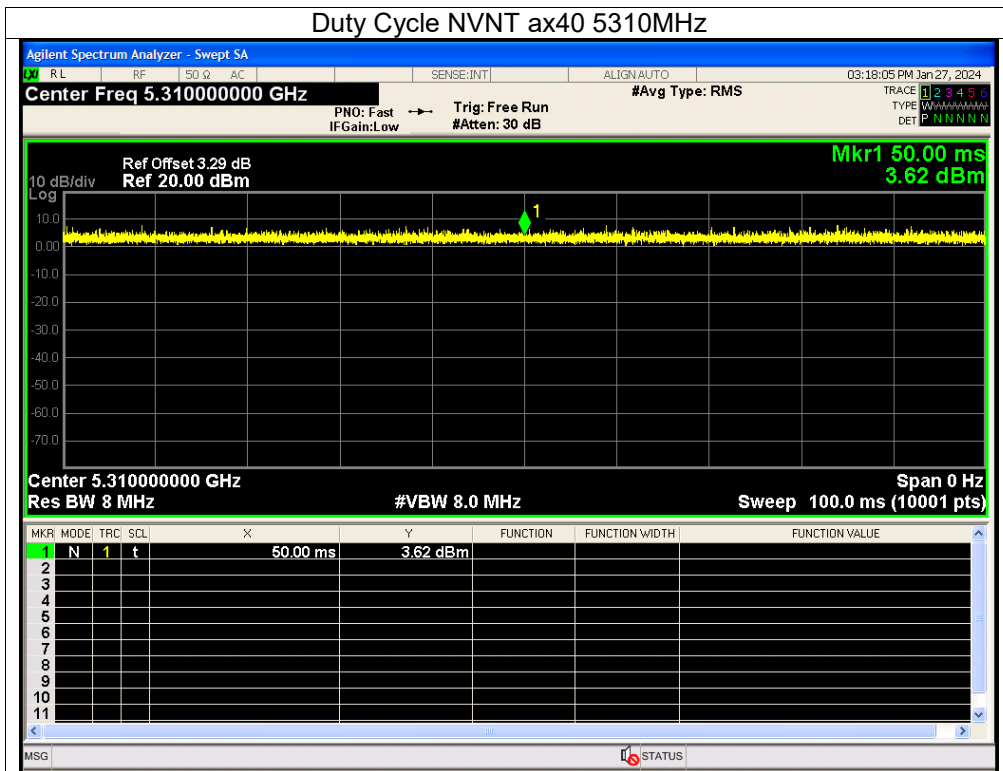




Condition	Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5500	100	0	0
NVNT	a	5580	100	0	0
NVNT	a	5700	100	0	0
NVNT	n20	5500	100	0	0
NVNT	n20	5580	100	0	0
NVNT	n20	5700	100	0	0
NVNT	n40	5510	100	0	0
NVNT	n40	5550	100	0	0
NVNT	n40	5670	100	0	0
NVNT	ac20	5500	100	0	0
NVNT	ac20	5580	100	0	0
NVNT	ac20	5700	100	0	0
NVNT	ac40	5510	100	0	0
NVNT	ac40	5550	100	0	0
NVNT	ac40	5670	100	0	0
NVNT	ac80	5530	100	0	0
NVNT	ax20	5500	100	0	0
NVNT	ax20	5580	100	0	0
NVNT	ax20	5700	100	0	0
NVNT	ax40	5510	100	0	0
NVNT	ax40	5550	100	0	0
NVNT	ax40	5670	100	0	0
NVNT	ax80	5530	100	0	0


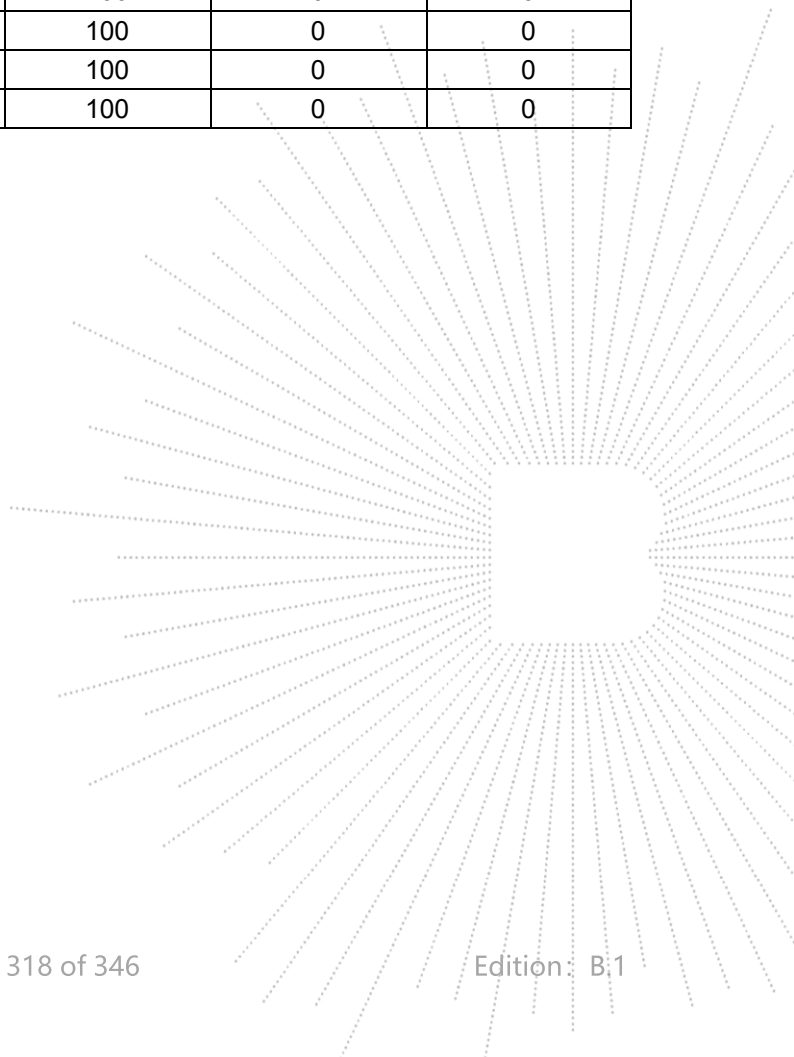




Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A. Plot.


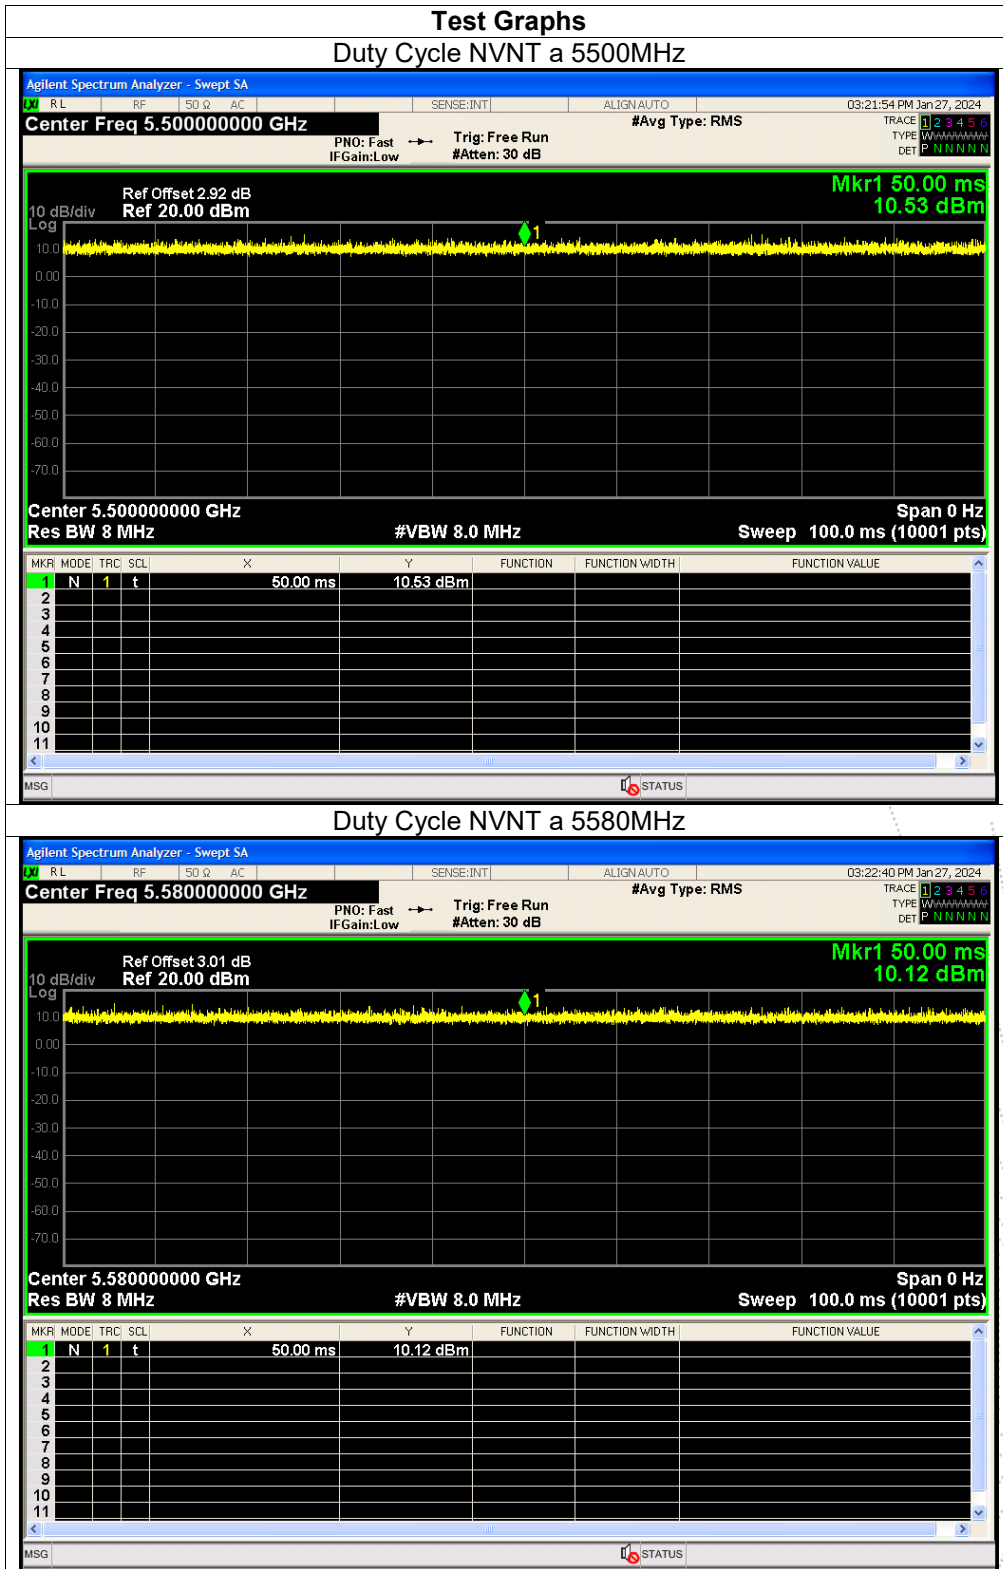


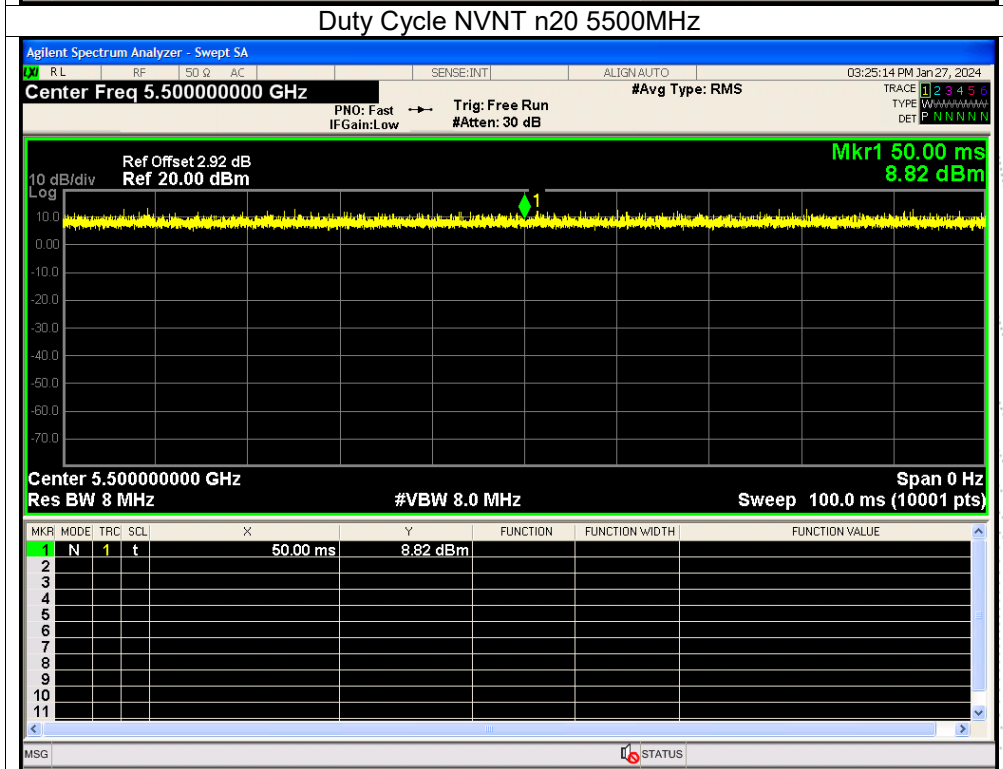
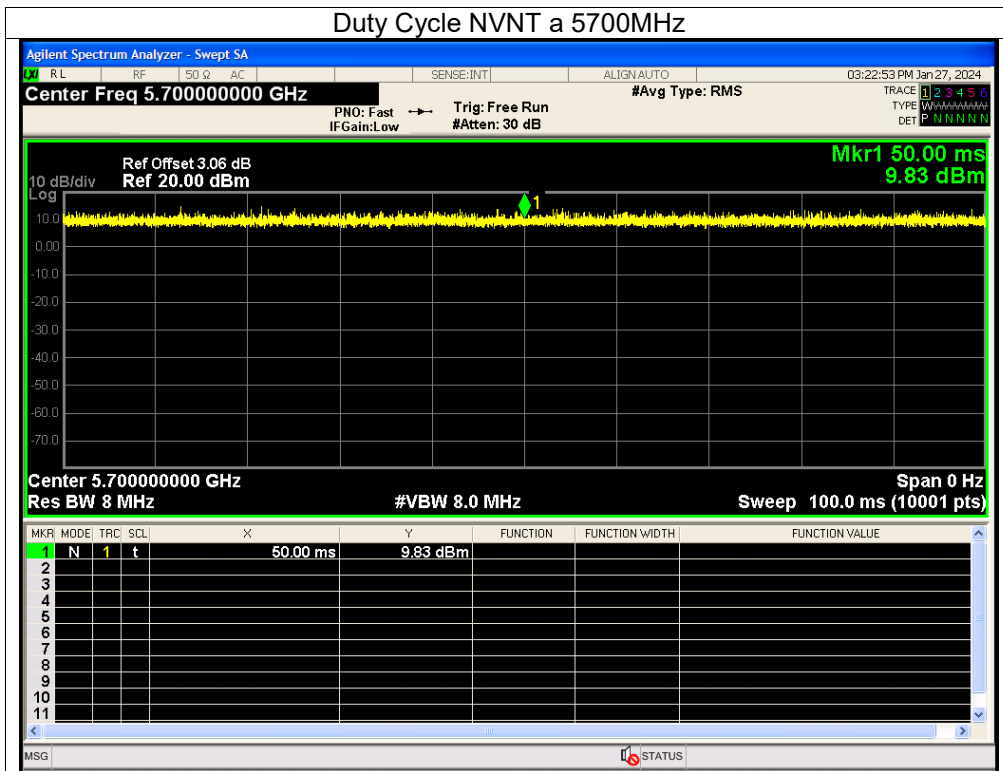


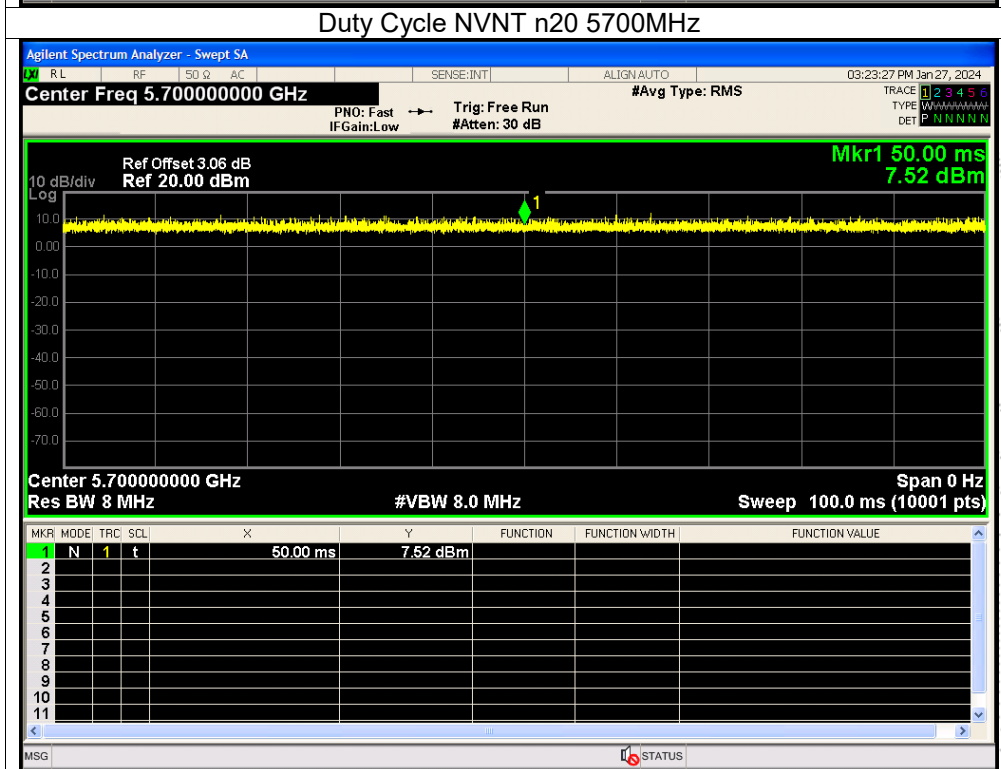
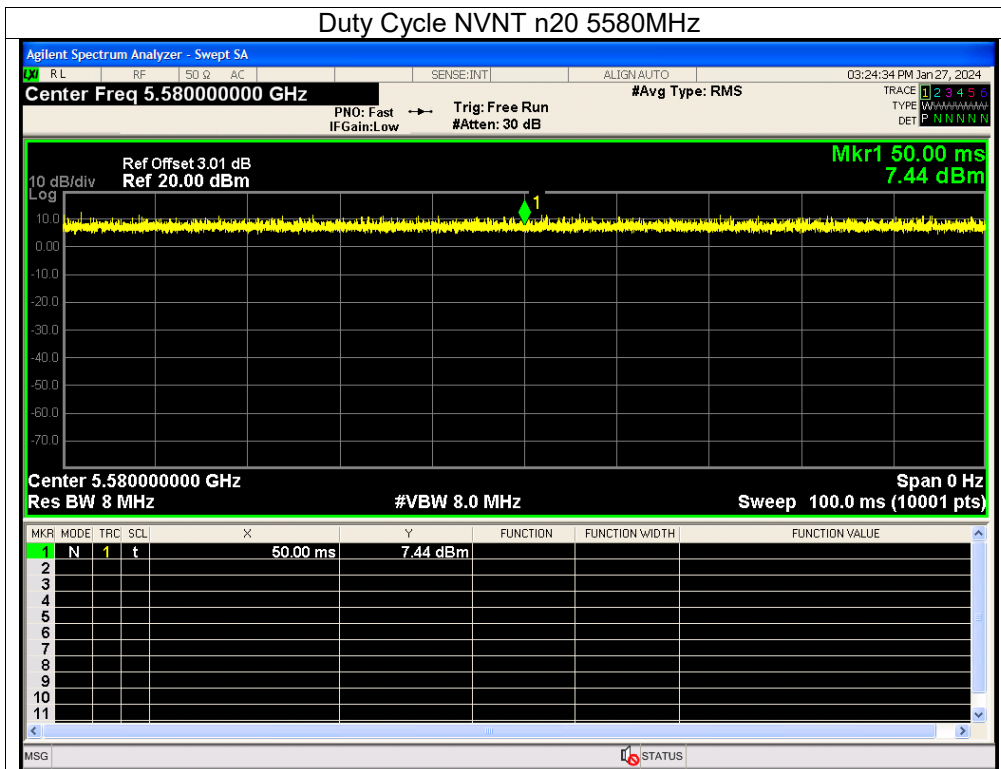


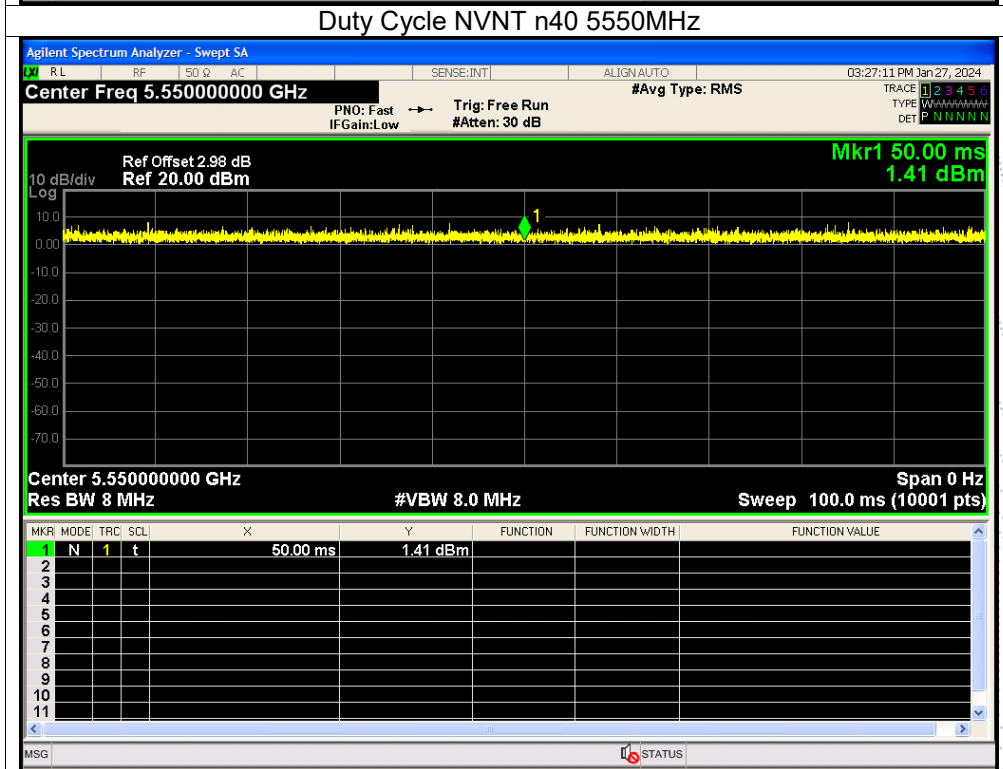
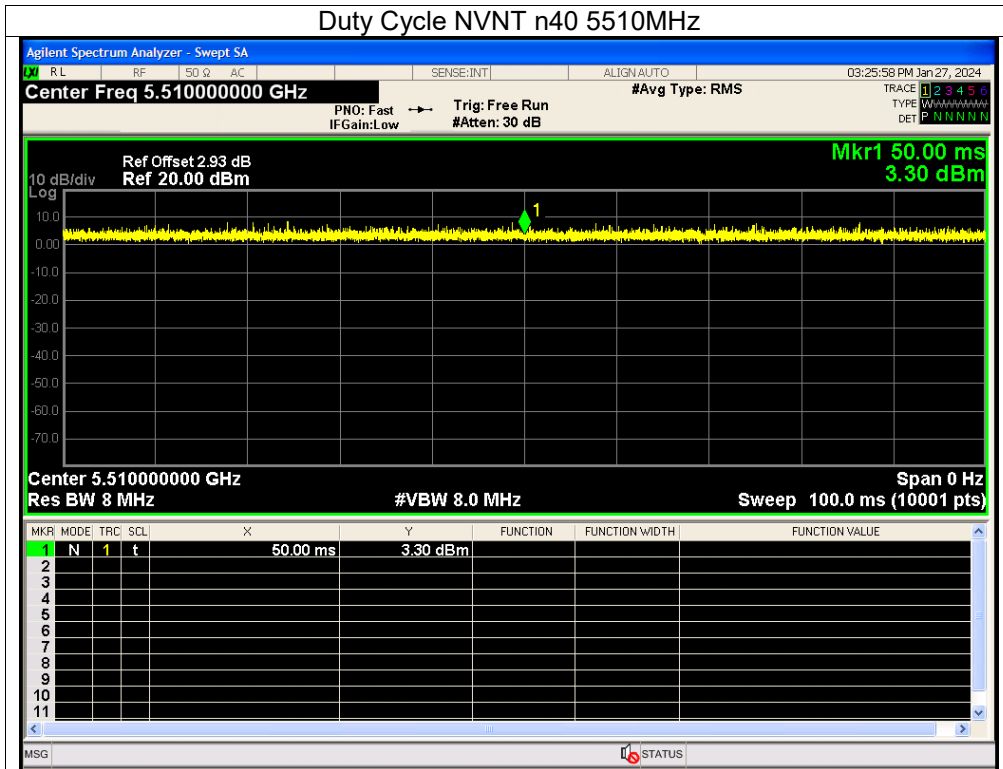


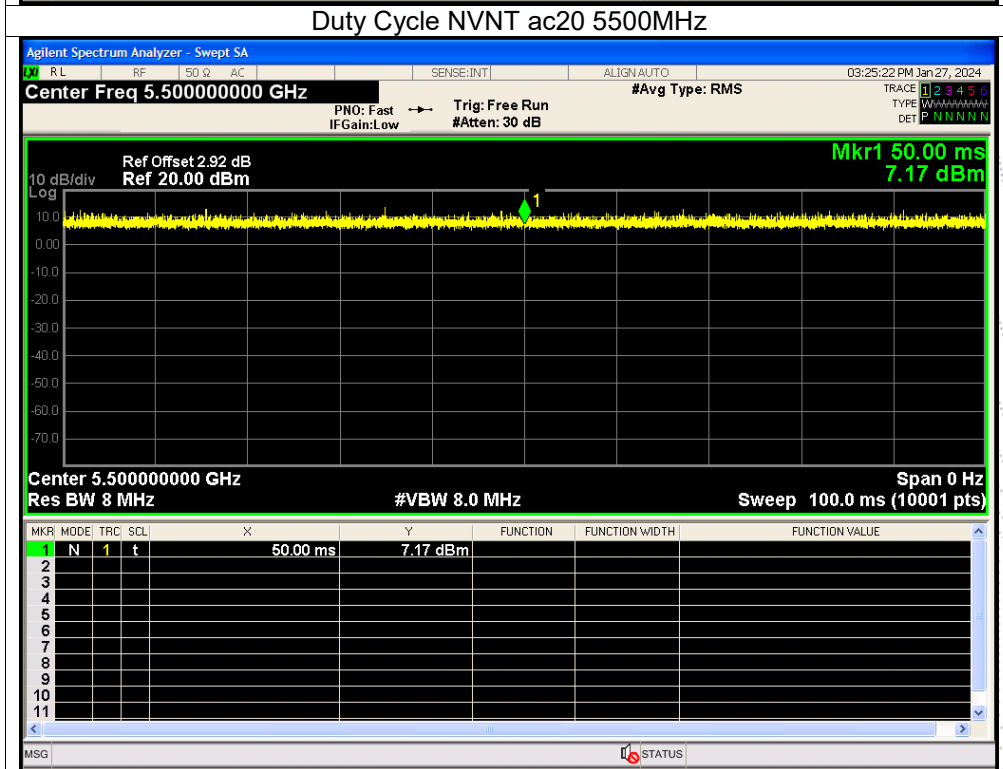
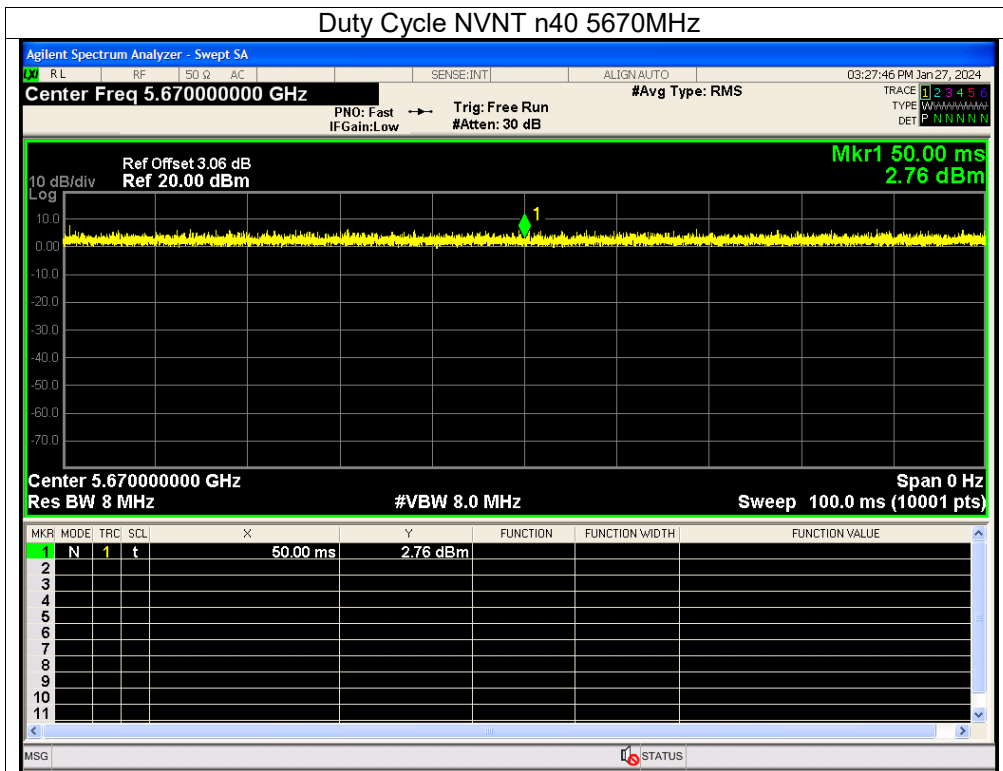


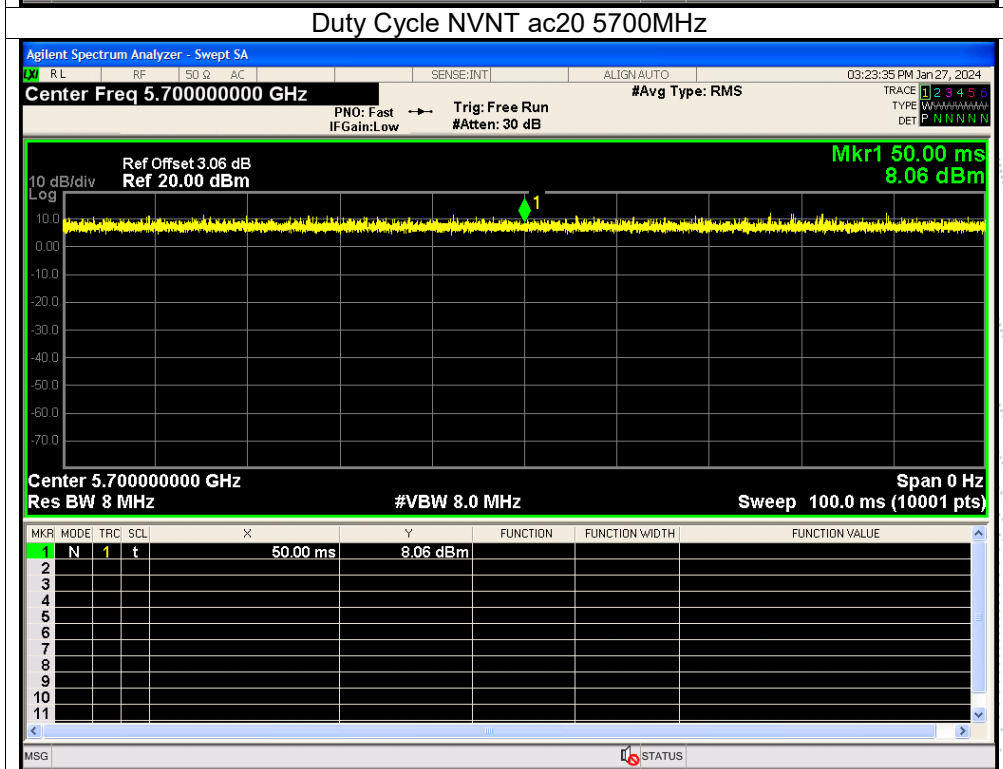
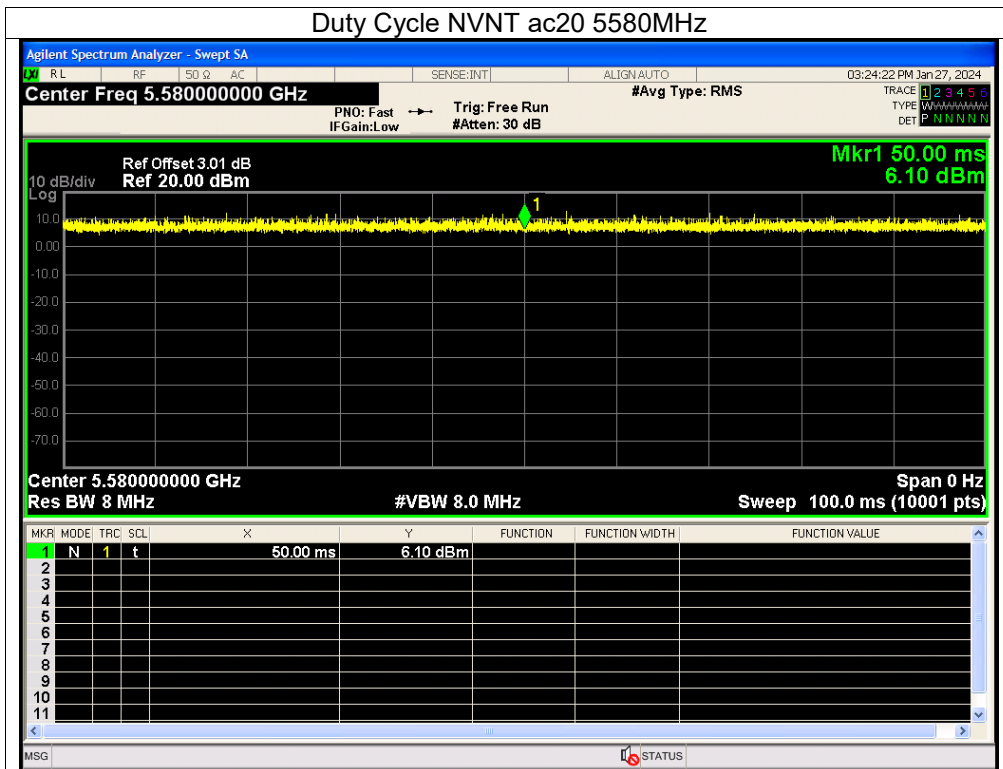


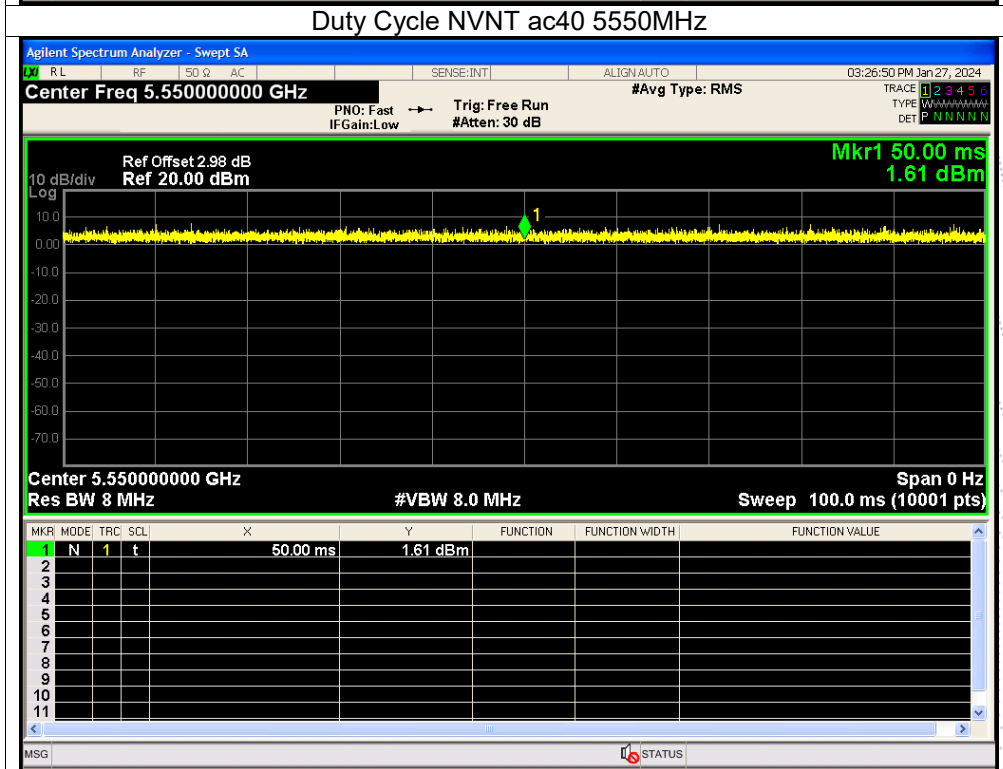
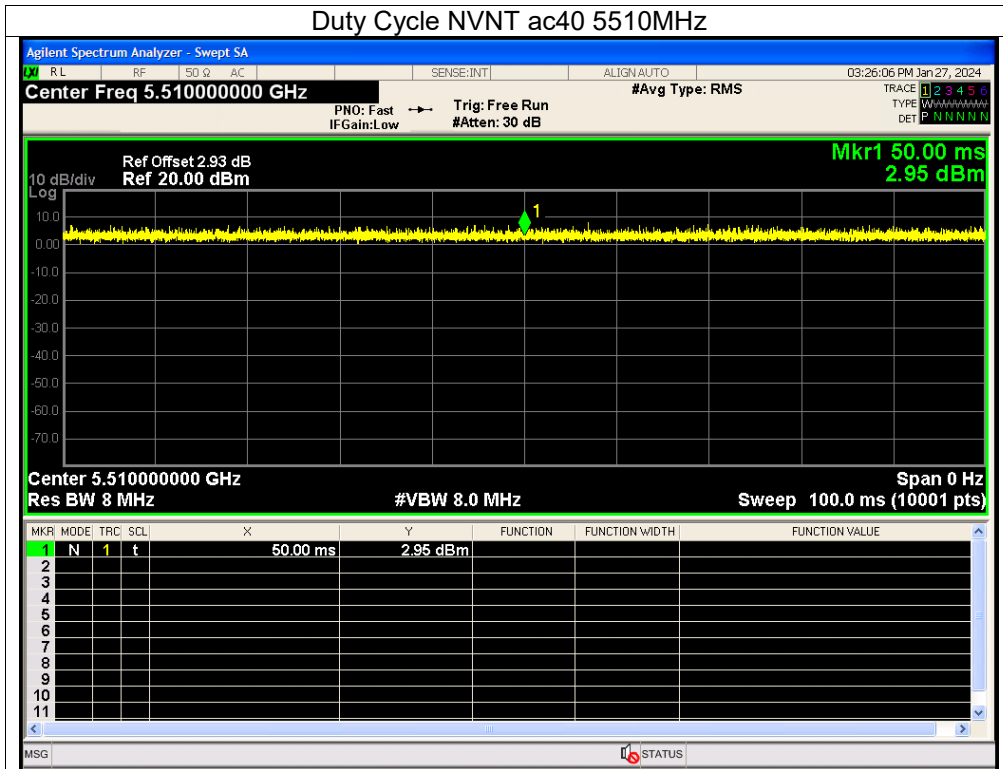


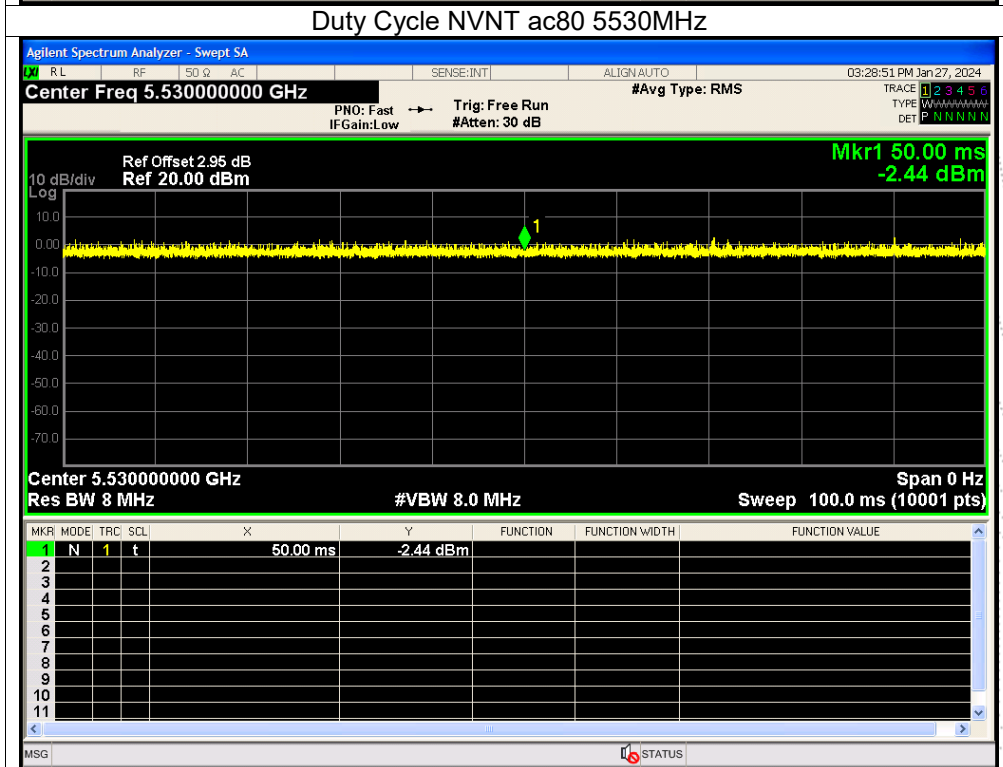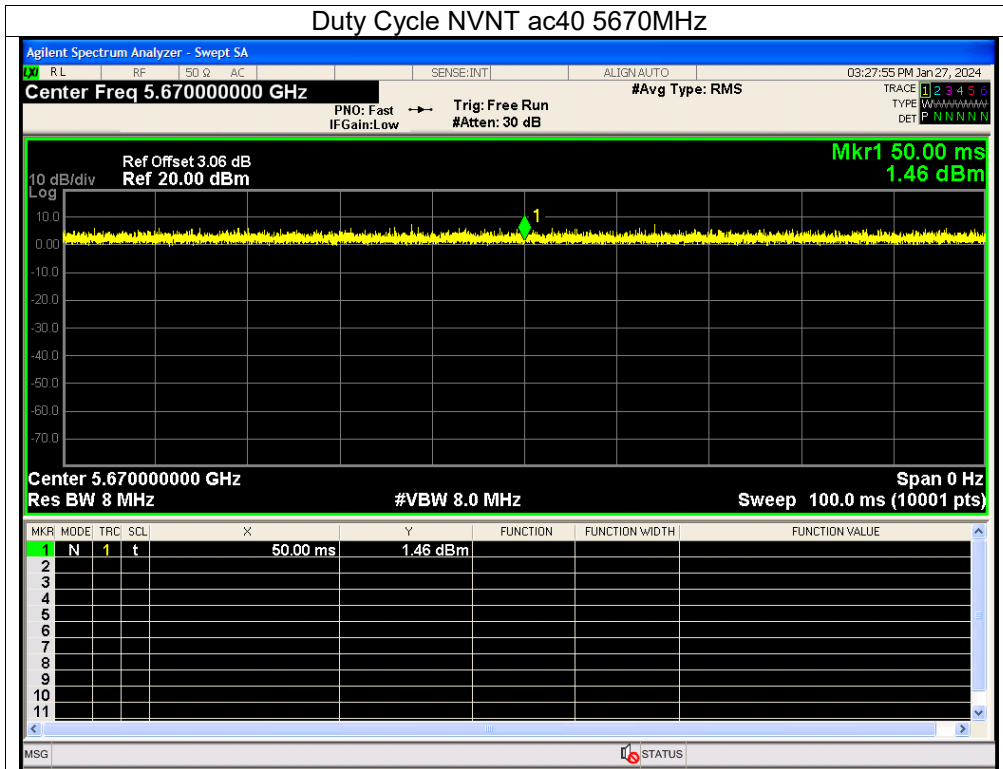

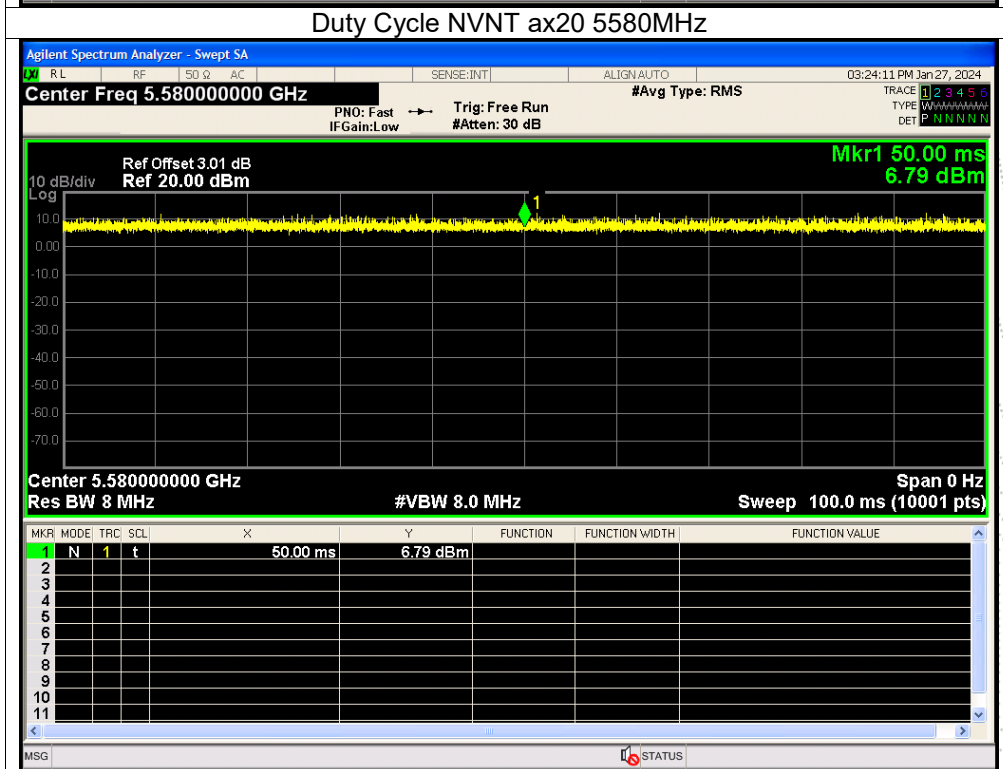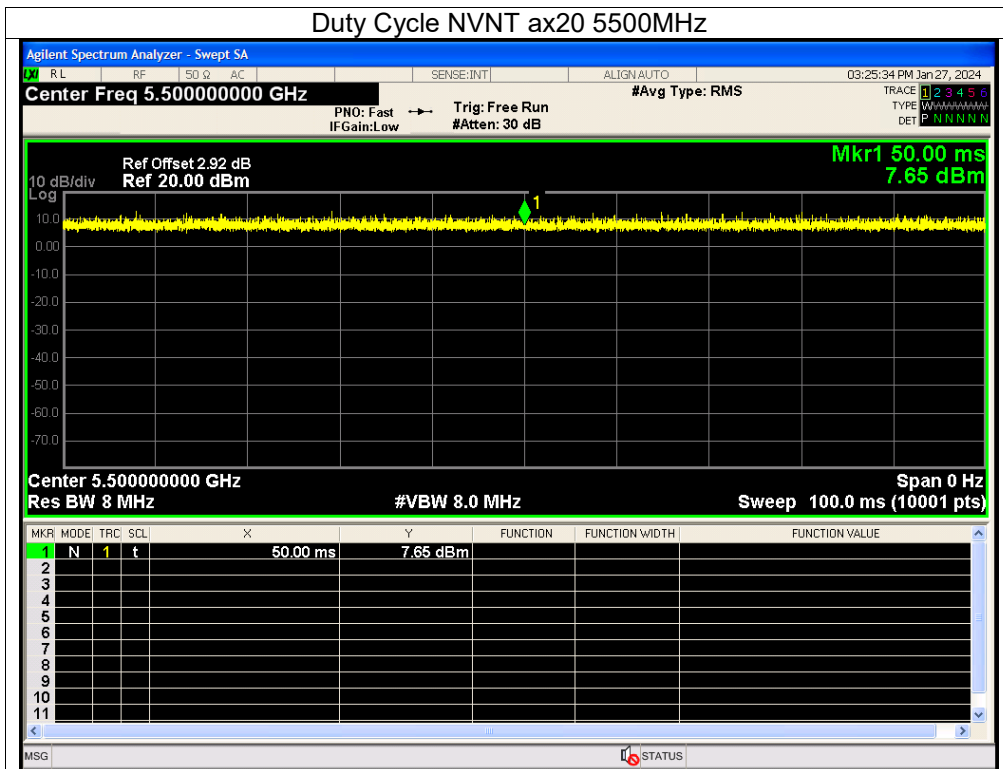


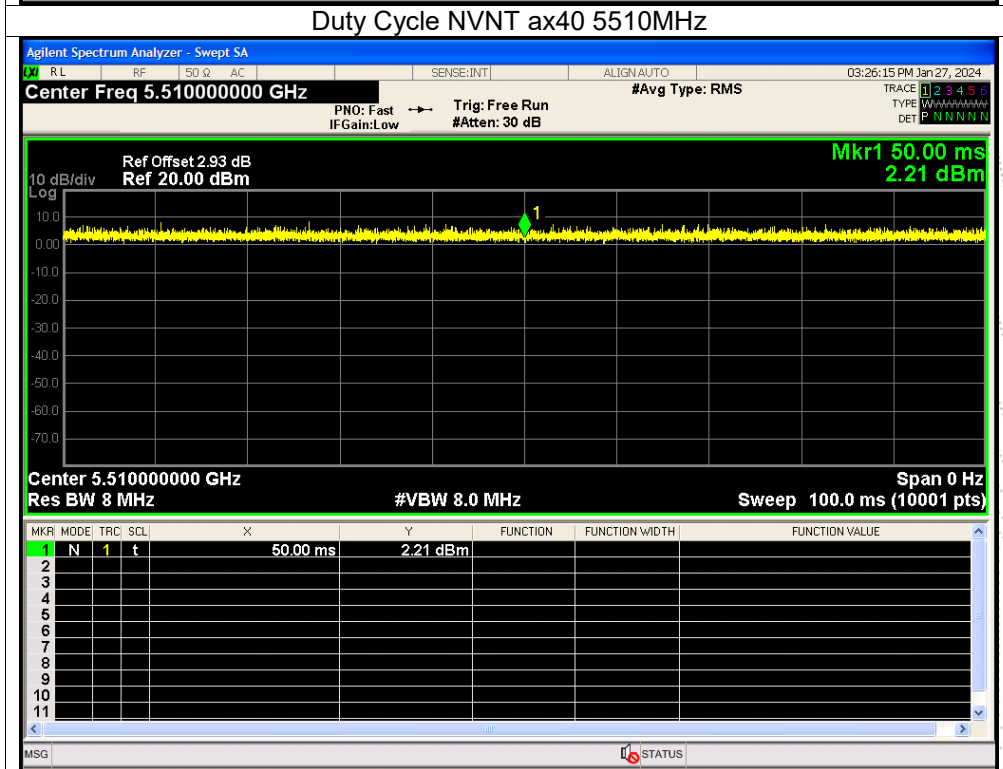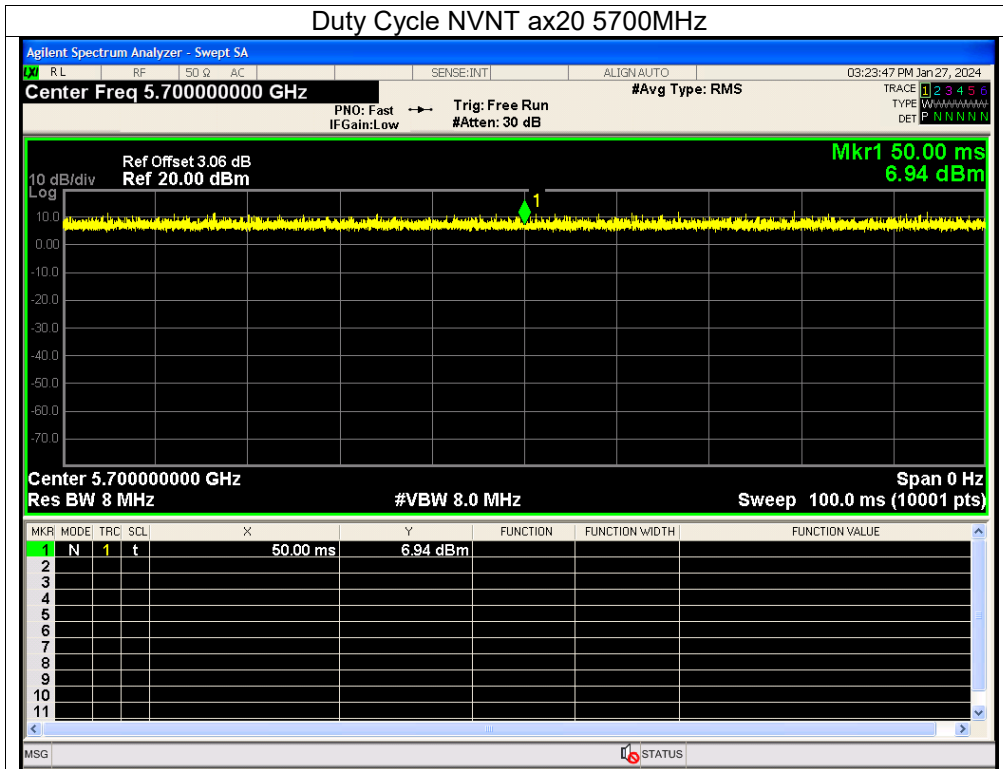

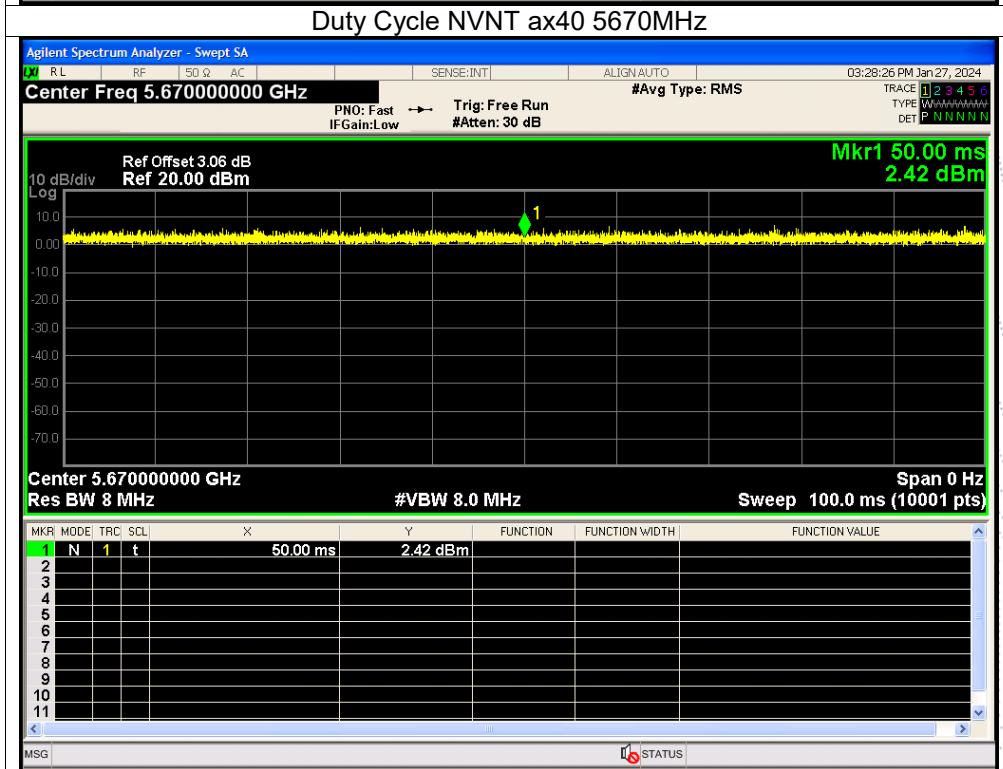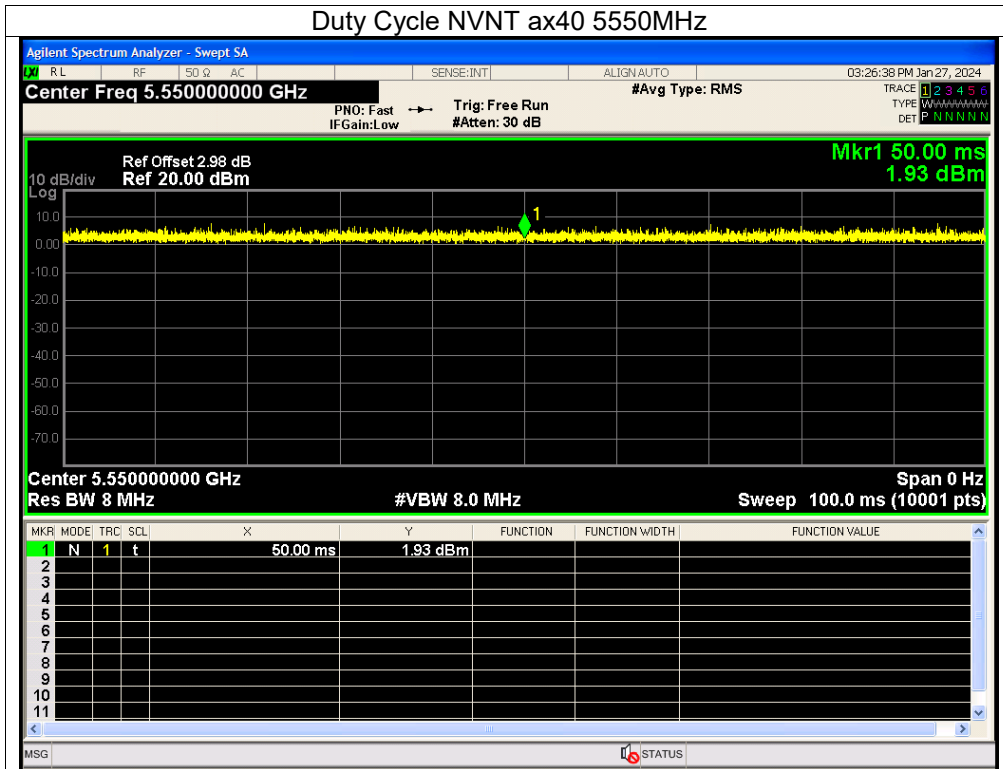

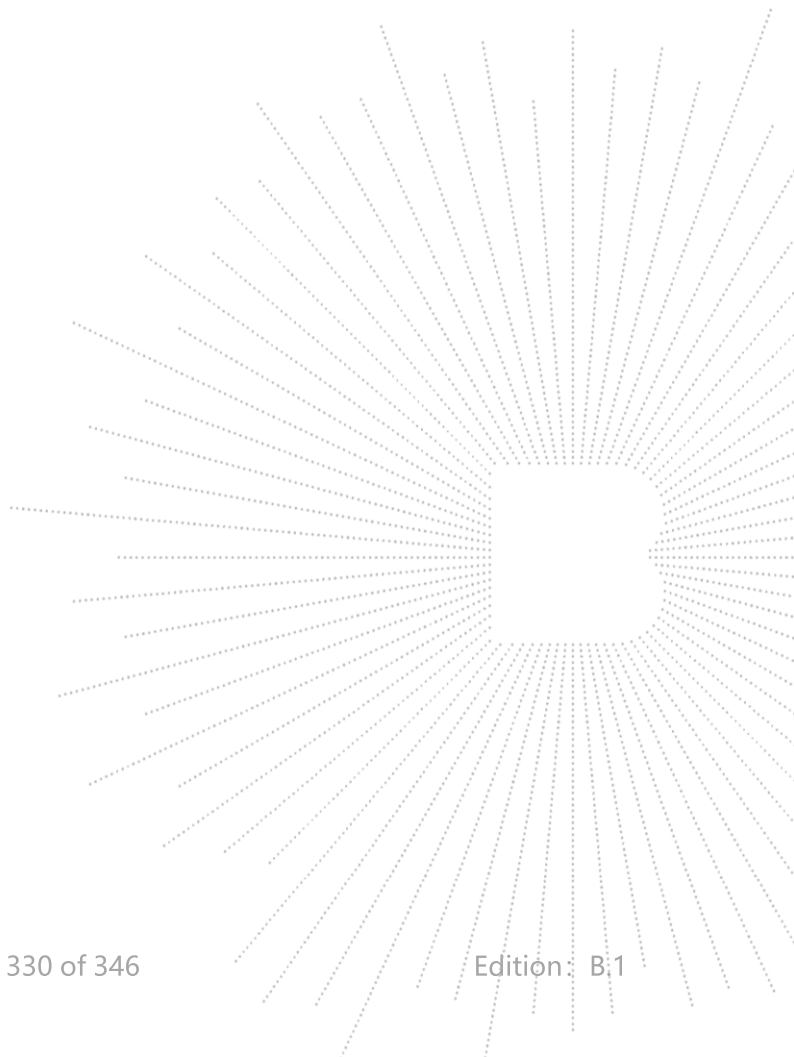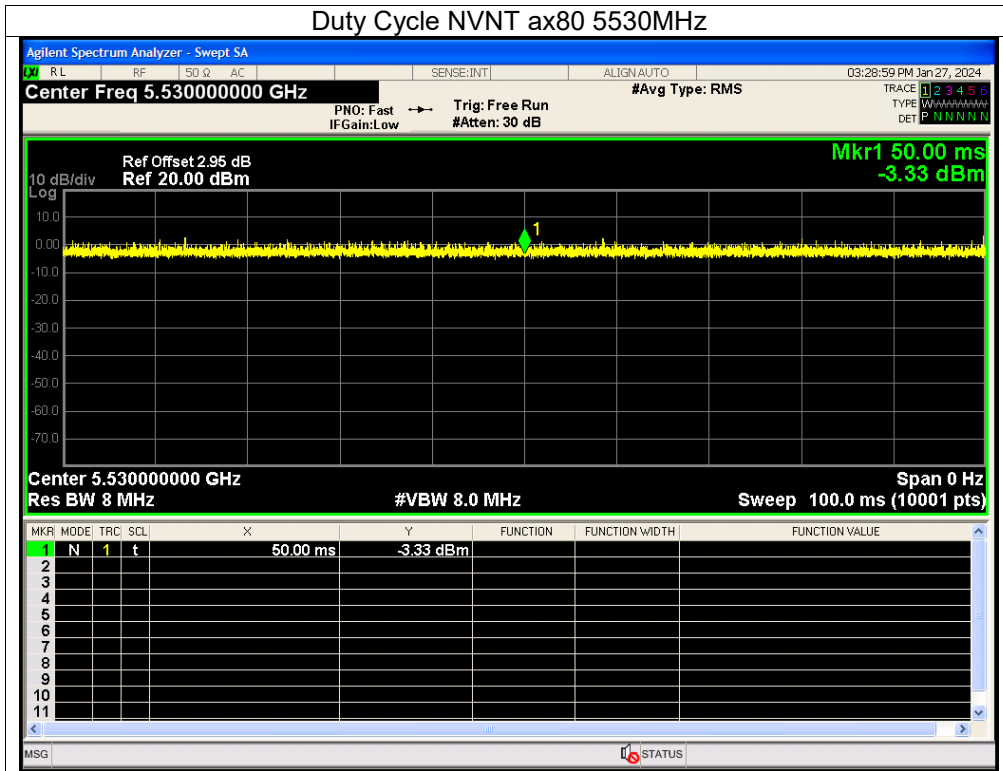

Condition	Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5745	100	0	0
NVNT	a	5785	100	0	0
NVNT	a	5825	100	0	0
NVNT	n20	5745	100	0	0
NVNT	n20	5785	100	0	0
NVNT	n20	5825	100	0	0
NVNT	n40	5755	100	0	0
NVNT	n40	5795	100	0	0
NVNT	ac20	5745	100	0	0
NVNT	ac20	5785	100	0	0
NVNT	ac20	5825	100	0	0
NVNT	ac40	5755	100	0	0
NVNT	ac40	5795	100	0	0
NVNT	ac80	5775	100	0	0
NVNT	ax20	5745	100	0	0
NVNT	ax20	5785	100	0	0
NVNT	ax20	5825	100	0	0
NVNT	ax40	5755	100	0	0
NVNT	ax40	5795	100	0	0
NVNT	ax80	5775	100	0	0

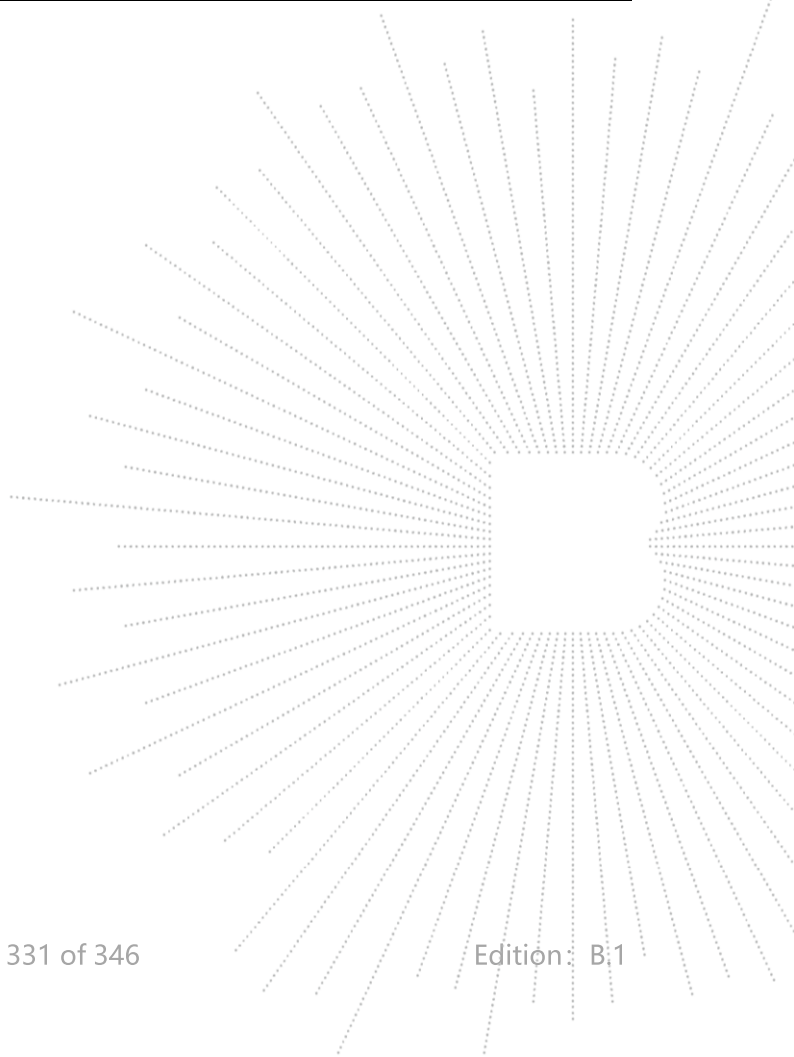

Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A. Plot.

