

### A.5 Conducted Band Edge and Out-of-Band Emissions Test Result


|           |            |               |             |
|-----------|------------|---------------|-------------|
| Test Site | SIP-TR1    | Test Engineer | Nandy Zhang |
| Test Date | 2022/02/24 |               |             |

| Test Mode | Data Rate<br>/ MCS | Channel No. | Frequency<br>(MHz) | Limit |
|-----------|--------------------|-------------|--------------------|-------|
| 11b       | 1Mbps              | 01          | 2412               | 20dBc |
| 11b       | 1Mbps              | 06          | 2437               | 20dBc |
| 11b       | 1Mbps              | 11          | 2462               | 20dBc |
| 11g       | 6Mbps              | 01          | 2412               | 20dBc |
| 11g       | 6Mbps              | 06          | 2437               | 20dBc |
| 11g       | 6Mbps              | 11          | 2462               | 20dBc |
| 11n-HT20  | MCS0               | 01          | 2412               | 20dBc |
| 11n-HT20  | MCS0               | 06          | 2437               | 20dBc |
| 11n-HT20  | MCS0               | 11          | 2462               | 20dBc |


## 802.11b Out-of-Band Emissions

## Channel 01 (2412MHz)


## Reference Level

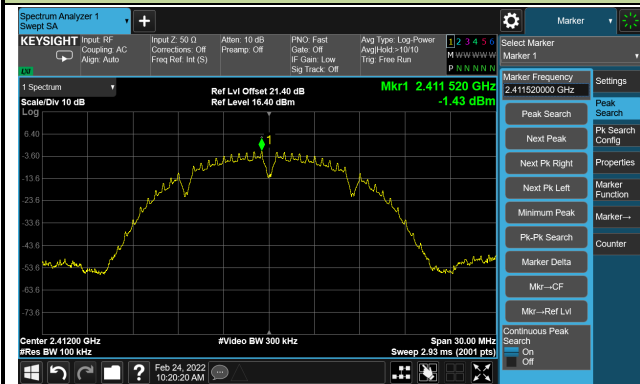

## Low Band Edge

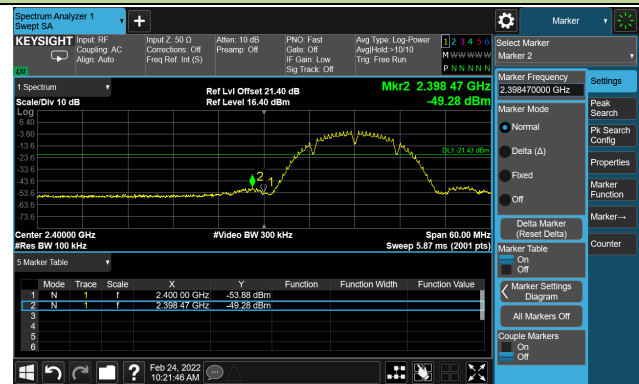


## Spurious Emission

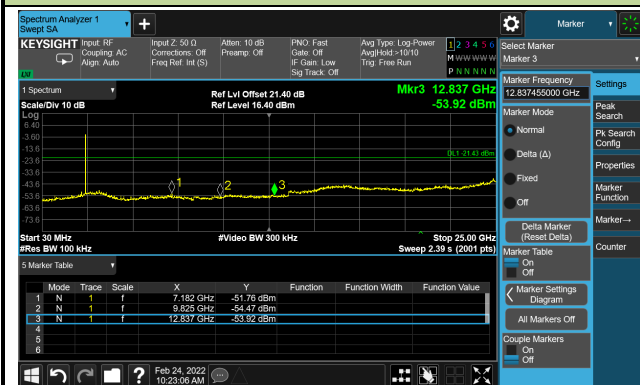


## Channel 06 (2437MHz)

## Reference Level

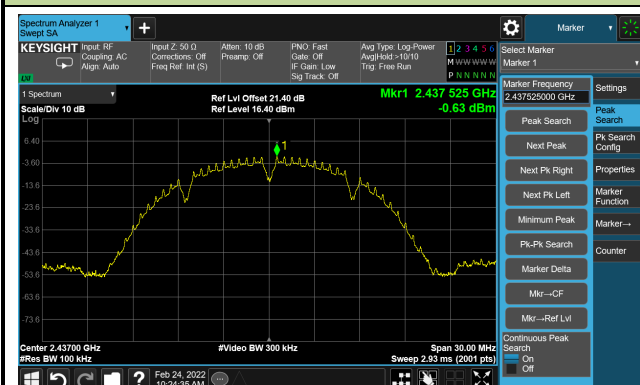


## Spurious Emission

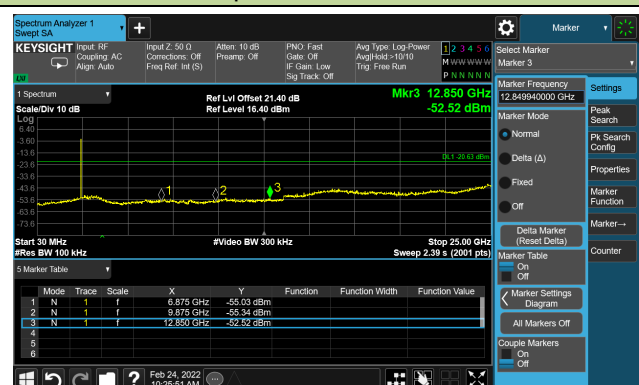

## Channel 11 (2462MHz)


### Reference Level

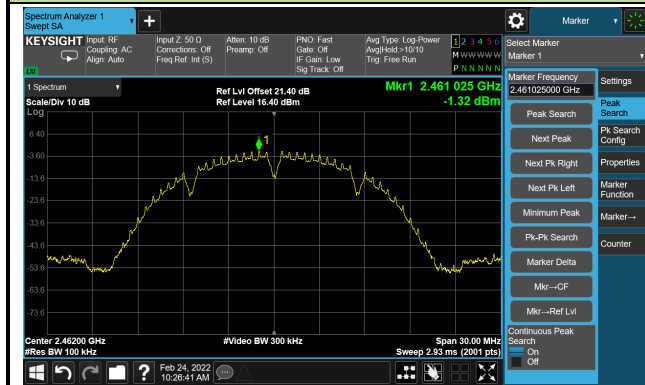

### High Band Edge




### Spurious Emission

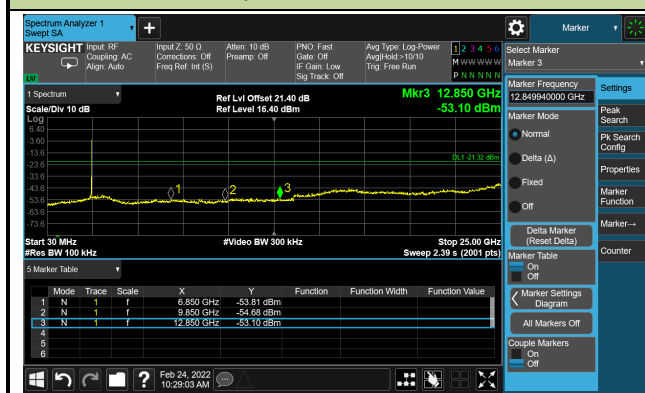


## 802.11g Out-of-Band Emissions

## Channel 01 (2412MHz)

## Reference Level

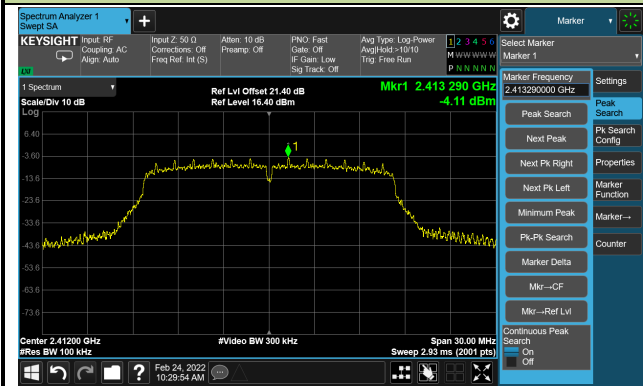

## Low Band Edge

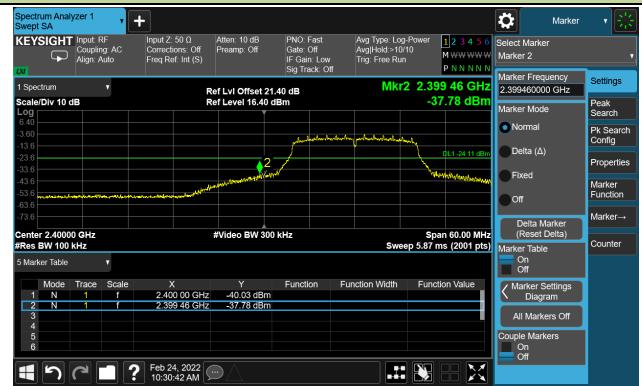

## Spurious Emission



## Channel 06 (2437MHz)

## Reference Level




## Spurious Emission




## Channel 11 (2462MHz)


## Reference Level

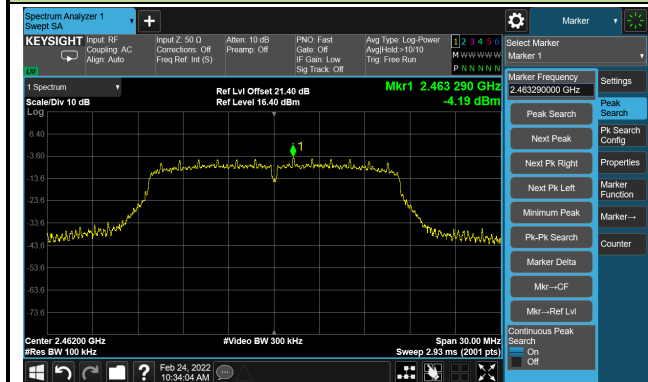

## High Band Edge

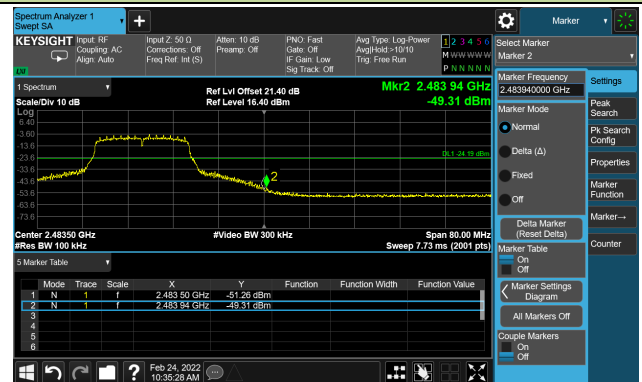


## Spurious Emission

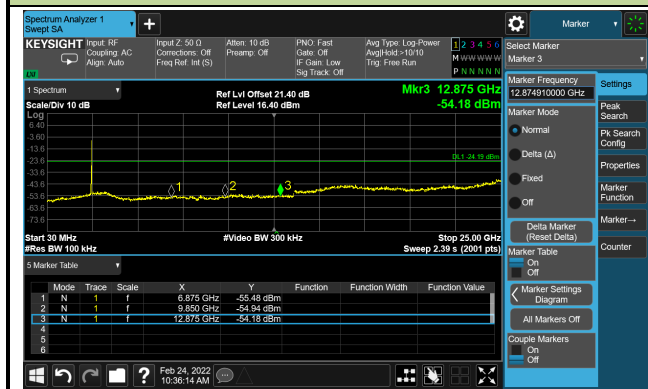


## 802.11n-HT20 Out-of-Band Emissions

## Channel 01 (2412MHz)


## Reference Level

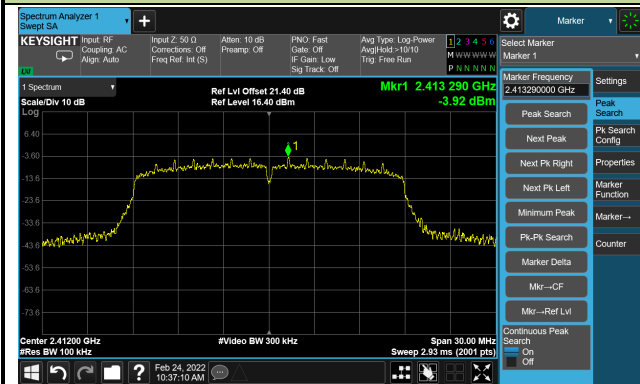

## Low Band Edge

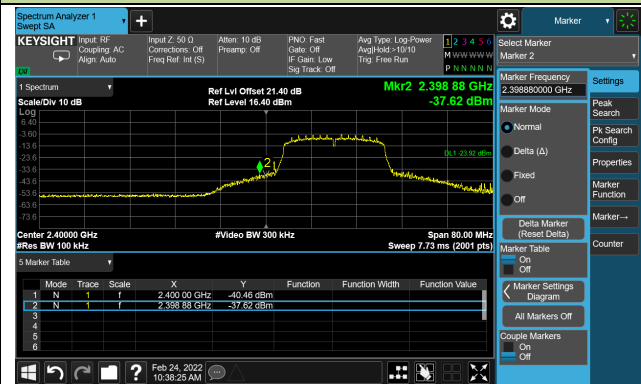


## Spurious Emission

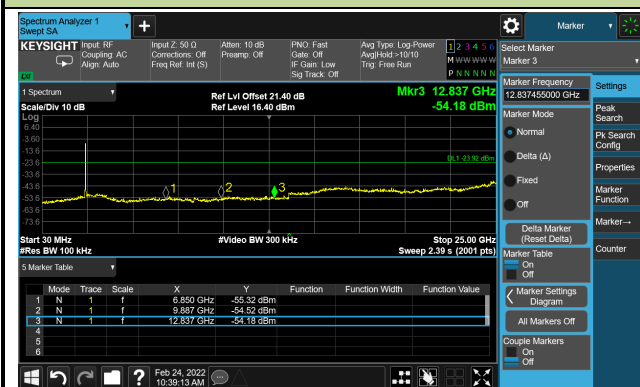


## Channel 06 (2437MHz)

## Reference Level

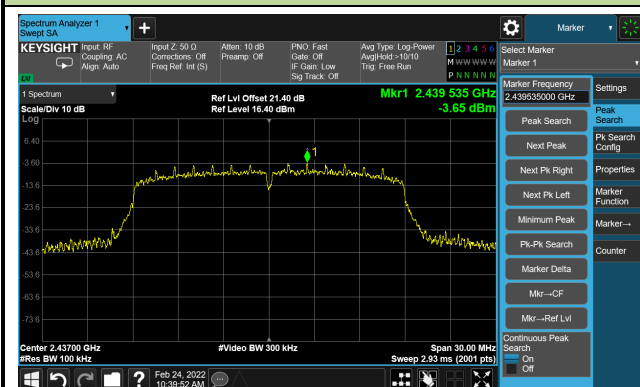


## Spurious Emission

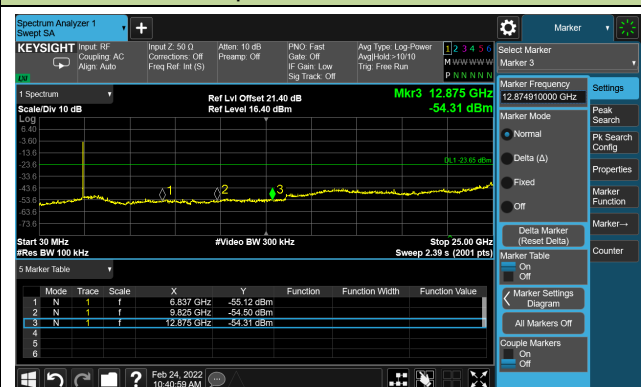


## Channel 11 (2462MHz)


## Reference Level

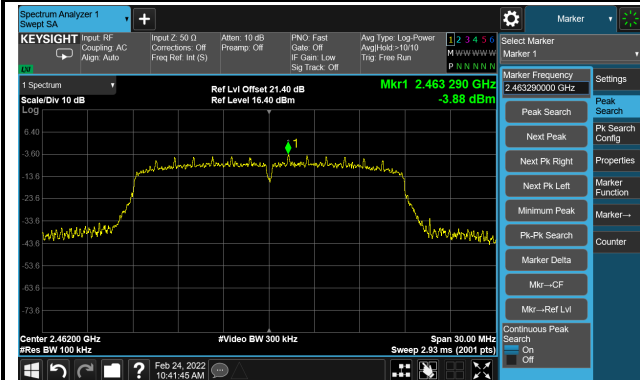

## High Band Edge

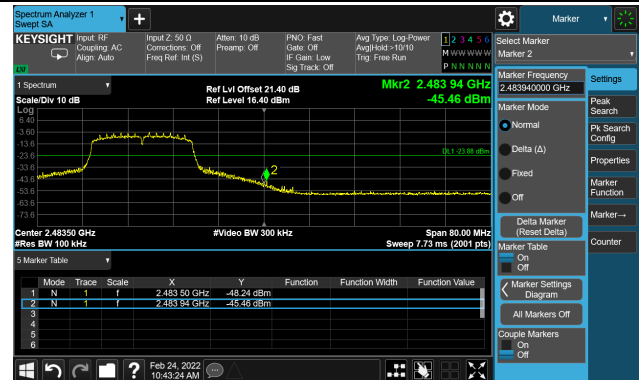

## Spurious Emission

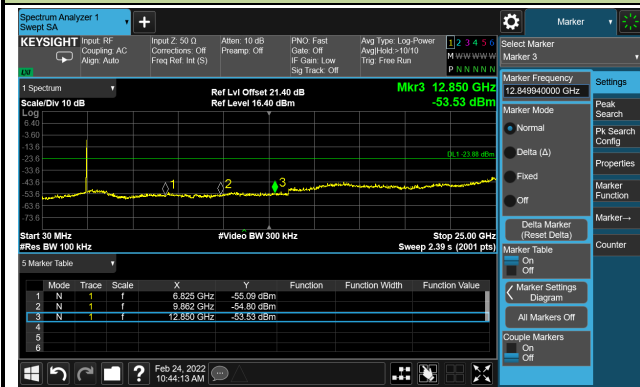

### A.6 Radiated Spurious Emission Test Result

|           |                                                                                                                                                                                   |               |                          |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|--------------------------|
| Test Site | SIP-AC1 & SIP-AC2                                                                                                                                                                 | Test Engineer | Stephen Dong & Mero Zhou |
| Test Date | 2022/02/18 ~ 2022/02/22                                                                                                                                                           | Test Mode:    | 802.11b                  |
| Remark:   | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |                          |

| Test Channel | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|--------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| 01           | 4825.0          | 62.2                 | -9.9          | 52.3                   | 74.0           | -21.7       | Peak     | Horizontal   |
|              | 4825.0          | 61.0                 | -9.9          | 51.1                   | 54.0           | -2.9        | Average  | Horizontal   |
|              | 8284.5          | 47.2                 | -5.0          | 42.2                   | 74.0           | -31.8       | Peak     | Horizontal   |
|              | 15577.5         | 43.8                 | 4.3           | 48.1                   | 74.0           | -25.9       | Peak     | Horizontal   |
|              | 4825.0          | 60.7                 | -9.9          | 50.8                   | 74.0           | -23.2       | Peak     | Vertical     |
|              | 4825.0          | 60.5                 | -9.9          | 50.6                   | 54.0           | -3.4        | Average  | Vertical     |
|              | 7579.0          | 47.5                 | -5.4          | 42.1                   | 74.0           | -31.9       | Peak     | Vertical     |
|              | 15807.0         | 43.1                 | 4.8           | 47.9                   | 74.0           | -26.1       | Peak     | Vertical     |
| 06           | 4876.0          | 61.8                 | -9.6          | 52.2                   | 74.0           | -21.8       | Peak     | Horizontal   |
|              | 4876.0          | 61.0                 | -9.6          | 51.4                   | 54.0           | -2.6        | Average  | Horizontal   |
|              | 7570.5          | 47.2                 | -5.7          | 41.5                   | 74.0           | -32.5       | Peak     | Horizontal   |
|              | 15926.0         | 42.7                 | 5.4           | 48.1                   | 74.0           | -25.9       | Peak     | Horizontal   |
|              | 4876.0          | 58.8                 | -9.6          | 49.2                   | 74.0           | -24.8       | Peak     | Vertical     |
|              | 7553.5          | 48.5                 | -6.4          | 42.1                   | 74.0           | -31.9       | Peak     | Vertical     |
|              | 11829.0         | 47.6                 | -2.7          | 44.9                   | 74.0           | -29.1       | Peak     | Vertical     |
| 11           | 4927.0          | 57.5                 | -5.5          | 52.0                   | 74.0           | -22.0       | Peak     | Horizontal   |
|              | 4927.0          | 56.2                 | -5.5          | 50.7                   | 54.0           | -3.3        | Average  | Horizontal   |
|              | 8148.5          | 41.2                 | 3.2           | 44.4                   | 74.0           | -29.6       | Peak     | Horizontal   |
|              | 11514.5         | 40.8                 | 8.7           | 49.5                   | 74.0           | -24.5       | Peak     | Horizontal   |
|              | 4927.0          | 56.3                 | -5.5          | 50.8                   | 74.0           | -23.2       | Peak     | Vertical     |
|              | 4927.0          | 54.7                 | -5.5          | 49.2                   | 54.0           | -4.8        | Average  | Vertical     |
|              | 8199.5          | 42.7                 | 2.7           | 45.4                   | 74.0           | -28.6       | Peak     | Vertical     |
|              | 11497.5         | 39.8                 | 8.8           | 48.6                   | 74.0           | -25.4       | Peak     | Vertical     |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |              |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|--------------|
| Test Site | SIP-AC2                                                                                                                                                                           | Test Engineer | Stephen Dong |
| Test Date | 2022/02/21                                                                                                                                                                        | Test Mode:    | 802.11g      |
| Remark:   | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |              |

| Test Channel | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|--------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| 01           | 4825.0          | 60.9                 | -5.9          | 55.0                   | 74.0           | -19.0       | Peak     | Horizontal   |
|              | 4825.0          | 49.3                 | -5.9          | 43.4                   | 54.0           | -10.6       | Average  | Horizontal   |
|              | 7426.0          | 43.3                 | 2.2           | 45.5                   | 74.0           | -28.5       | Peak     | Horizontal   |
|              | 11472.0         | 40.7                 | 8.6           | 49.3                   | 74.0           | -24.7       | Peak     | Horizontal   |
|              | 4825.0          | 54.4                 | -5.9          | 48.5                   | 74.0           | -25.5       | Peak     | Vertical     |
|              | 10843.0         | 41.6                 | 7.5           | 49.1                   | 74.0           | -24.9       | Peak     | Vertical     |
|              | 12092.5         | 40.6                 | 8.2           | 48.8                   | 74.0           | -25.2       | Peak     | Vertical     |
| 06           | 4867.5          | 59.8                 | -5.5          | 54.3                   | 74.0           | -19.7       | Peak     | Horizontal   |
|              | 4867.5          | 50.2                 | -5.5          | 44.7                   | 54.0           | -9.3        | Average  | Horizontal   |
|              | 8174.0          | 42.3                 | 3.0           | 45.3                   | 74.0           | -28.7       | Peak     | Horizontal   |
|              | 11497.5         | 40.7                 | 8.8           | 49.5                   | 74.0           | -24.5       | Peak     | Horizontal   |
|              | 4876.0          | 54.3                 | -5.6          | 48.7                   | 74.0           | -25.3       | Peak     | Vertical     |
|              | 10877.0         | 41.7                 | 7.6           | 49.3                   | 74.0           | -24.7       | Peak     | Vertical     |
|              | 12211.5         | 41.9                 | 7.5           | 49.4                   | 74.0           | -24.6       | Peak     | Vertical     |
| 11           | 4918.5          | 60.1                 | -5.5          | 54.6                   | 74.0           | -19.4       | Peak     | Horizontal   |
|              | 4918.5          | 51.0                 | -5.5          | 45.5                   | 54.0           | -8.5        | Average  | Horizontal   |
|              | 7332.5          | 43.2                 | 1.7           | 44.9                   | 74.0           | -29.1       | Peak     | Horizontal   |
|              | 10996.0         | 41.4                 | 7.5           | 48.9                   | 74.0           | -25.1       | Peak     | Horizontal   |
|              | 4927.0          | 55.6                 | -5.5          | 50.1                   | 74.0           | -23.9       | Peak     | Vertical     |
|              | 7477.0          | 42.3                 | 2.4           | 44.7                   | 74.0           | -29.3       | Peak     | Vertical     |
|              | 10885.5         | 42.2                 | 7.4           | 49.6                   | 74.0           | -24.4       | Peak     | Vertical     |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |              |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|--------------|
| Test Site | SIP-AC2                                                                                                                                                                           | Test Engineer | Stephen Dong |
| Test Date | 2022/02/21                                                                                                                                                                        | Test Mode:    | 802.11n-HT20 |
| Remark:   | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |              |


| Test Channel | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|--------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| 01           | 4816.5          | 57.9                 | -5.7          | 52.2                   | 74.0           | -21.8       | Peak     | Horizontal   |
|              | 4816.5          | 48.5                 | -5.7          | 42.8                   | 54.0           | -11.2       | Average  | Horizontal   |
|              | 8378.0          | 42.9                 | 2.5           | 45.4                   | 74.0           | -28.6       | Peak     | Horizontal   |
|              | 10885.5         | 42.3                 | 7.4           | 49.7                   | 74.0           | -24.3       | Peak     | Horizontal   |
|              | 4825.0          | 53.5                 | -5.9          | 47.6                   | 74.0           | -26.4       | Peak     | Vertical     |
|              | 7349.5          | 43.0                 | 1.7           | 44.7                   | 74.0           | -29.3       | Peak     | Vertical     |
|              | 11599.5         | 40.8                 | 8.2           | 49.0                   | 74.0           | -25.0       | Peak     | Vertical     |
| 06           | 4876.0          | 58.6                 | -5.6          | 53.0                   | 74.0           | -21.0       | Peak     | Horizontal   |
|              | 4876.0          | 49.8                 | -5.6          | 44.2                   | 54.0           | -9.8        | Average  | Horizontal   |
|              | 7417.5          | 42.6                 | 2.2           | 44.8                   | 74.0           | -29.2       | Peak     | Horizontal   |
|              | 10894.0         | 42.8                 | 7.2           | 50.0                   | 74.0           | -24.0       | Peak     | Horizontal   |
|              | 4867.5          | 53.0                 | -5.5          | 47.5                   | 74.0           | -26.5       | Peak     | Vertical     |
|              | 7477.0          | 42.8                 | 2.4           | 45.2                   | 74.0           | -28.8       | Peak     | Vertical     |
|              | 11480.5         | 41.0                 | 8.7           | 49.7                   | 74.0           | -24.3       | Peak     | Vertical     |
| 11           | 4927.0          | 59.1                 | -5.5          | 53.6                   | 74.0           | -20.4       | Peak     | Horizontal   |
|              | 4927.0          | 50.2                 | -5.5          | 44.7                   | 54.0           | -9.3        | Average  | Horizontal   |
|              | 7562.0          | 43.2                 | 1.6           | 44.8                   | 74.0           | -29.2       | Peak     | Horizontal   |
|              | 11506.0         | 40.0                 | 8.9           | 48.9                   | 74.0           | -25.1       | Peak     | Horizontal   |
|              | 4927.0          | 56.0                 | -5.5          | 50.5                   | 74.0           | -23.5       | Peak     | Vertical     |
|              | 7443.0          | 42.0                 | 2.4           | 44.4                   | 74.0           | -29.6       | Peak     | Vertical     |
|              | 11472.0         | 39.9                 | 8.6           | 48.5                   | 74.0           | -25.5       | Peak     | Vertical     |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

### The Result of Radiated Emission below 1GHz:

|                                           |                        |
|-------------------------------------------|------------------------|
| Site: SIP-AC2                             | Time: 2022/01/07       |
| Limit: FCC_Part15.209_RSE(3m)             | Engineer: Stephen Dong |
| Probe: SIP-AC2_VULB 9168_30-1000MHz       | Polarity: Horizontal   |
| EUT: Pet activity monitor                 | Power: By Notebook     |
| Test Mode: Transmit at 2437MHz by 802.11b |                        |

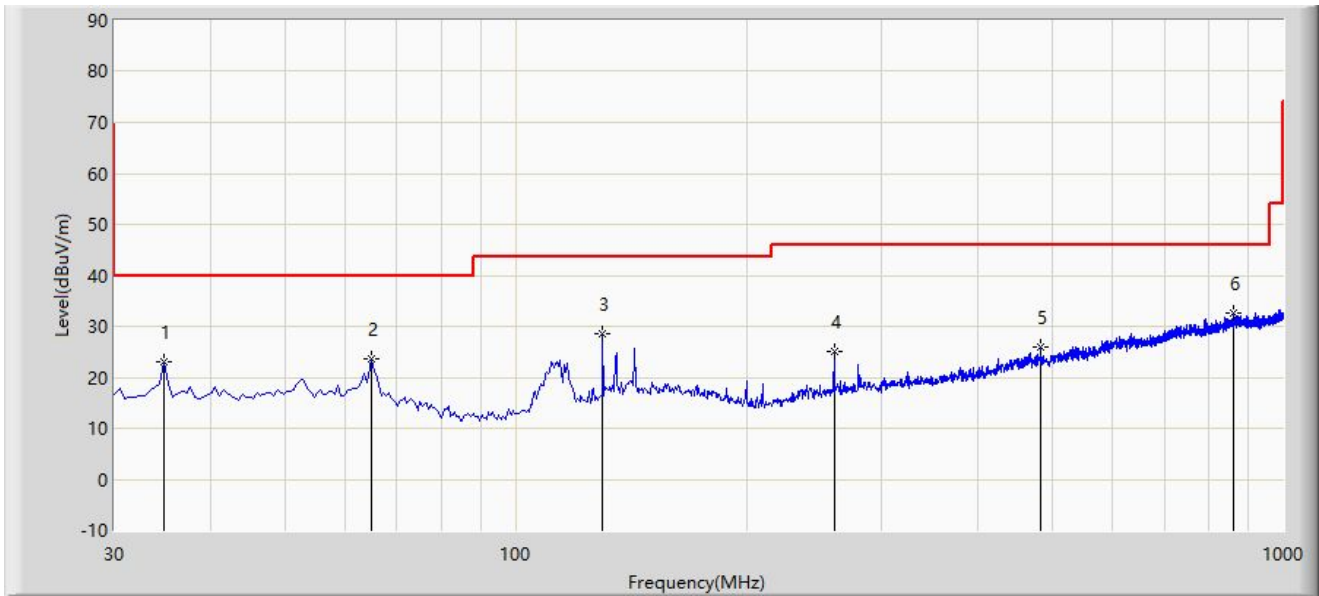

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 34.850          | 23.039                 | 5.495                | -16.961     | 40.000         | 17.544        | PK   |
| 2  |      |      | 64.920          | 23.671                 | 6.335                | -16.329     | 40.000         | 17.336        | PK   |
| 3  |      |      | 129.910         | 28.478                 | 11.094               | -15.022     | 43.500         | 17.384        | PK   |
| 4  |      |      | 259.890         | 25.005                 | 7.341                | -20.995     | 46.000         | 17.664        | PK   |
| 5  |      |      | 482.990         | 25.800                 | 2.306                | -20.200     | 46.000         | 23.494        | PK   |
| 6  |      | *    | 860.320         | 32.485                 | 2.597                | -13.515     | 46.000         | 29.888        | PK   |

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)


Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: QP measurement was not performed when peak measure level was lower than the QP limit.

Note 3: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

|                                           |                        |
|-------------------------------------------|------------------------|
| Site: SIP-AC2                             | Time: 2022/01/07       |
| Limit: FCC_Part15.209_RSE(3m)             | Engineer: Stephen Dong |
| Probe: SIP-AC2_VULB 9168_30-1000MHz       | Polarity: Vertical     |
| EUT: Pet activity monitor                 | Power: By Notebook     |
| Test Mode: Transmit at 2437MHz by 802.11b |                        |

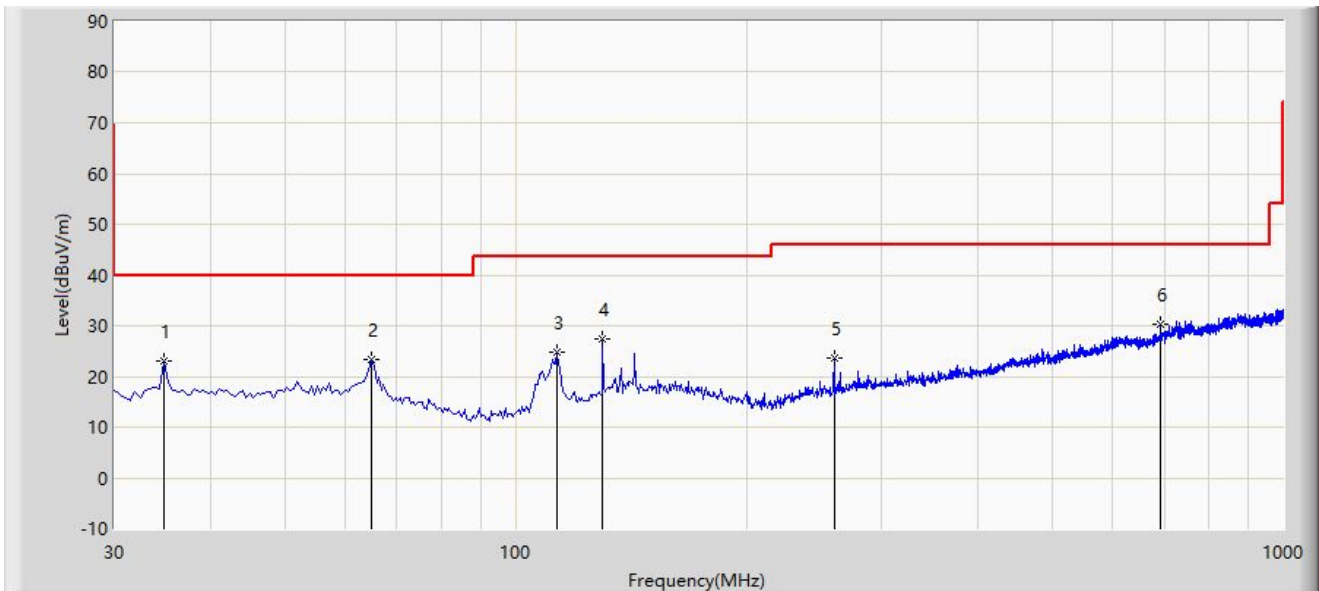

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 34.850          | 22.964                 | 5.420                | -17.036     | 40.000         | 17.544        | PK   |
| 2  |      |      | 64.920          | 23.288                 | 5.952                | -16.712     | 40.000         | 17.336        | PK   |
| 3  |      |      | 113.420         | 24.702                 | 8.639                | -18.798     | 43.500         | 16.063        | PK   |
| 4  |      |      | 129.910         | 27.385                 | 10.001               | -16.115     | 43.500         | 17.384        | PK   |
| 5  |      |      | 259.890         | 23.707                 | 6.043                | -22.293     | 46.000         | 17.664        | PK   |
| 6  |      | *    | 692.510         | 30.289                 | 3.095                | -15.711     | 46.000         | 27.194        | PK   |

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)


Note 2: QP measurement was not performed when peak measure level was lower than the QP limit.

Note 3: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

### A.7 Radiated Restricted Band Edge Test Result

|                                           |                      |
|-------------------------------------------|----------------------|
| Site: SIP-AC1                             | Time: 2022/02/18     |
| Limit: FCC_Part15.209_RE(3m)              | Engineer: Kyrie Xie  |
| Probe: SIP-AC1_HF907_102862_1-18GHz       | Polarity: Horizontal |
| EUT: Pet activity monitor                 | Power: By Notebook   |
| Test Mode: Transmit at 2412MHz by 802.11b |                      |

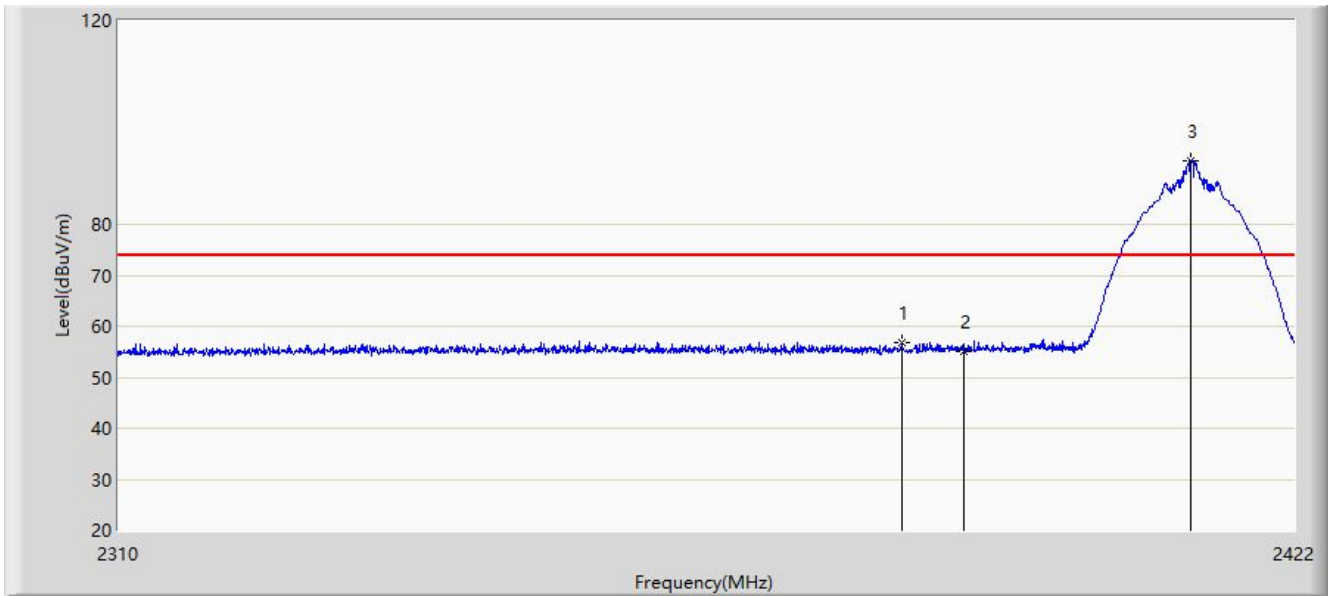


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 2384.032        | 56.842                 | 25.364               | -17.158     | 74.000         | 31.479        | PK   |
| 2  |      |      | 2390.000        | 55.095                 | 23.506               | -18.905     | 74.000         | 31.588        | PK   |
| 3  |      | *    | 2411.976        | 92.524                 | 60.839               | N/A         | N/A            | 31.684        | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                           |                      |
|-------------------------------------------|----------------------|
| Site: SIP-AC1                             | Time: 2022/02/18     |
| Limit: FCC_Part15.209_RE(3m)              | Engineer: Kyrie Xie  |
| Probe: SIP-AC1_HF907_102862_1-18GHz       | Polarity: Horizontal |
| EUT: Pet activity monitor                 | Power: By Notebook   |
| Test Mode: Transmit at 2412MHz by 802.11b |                      |

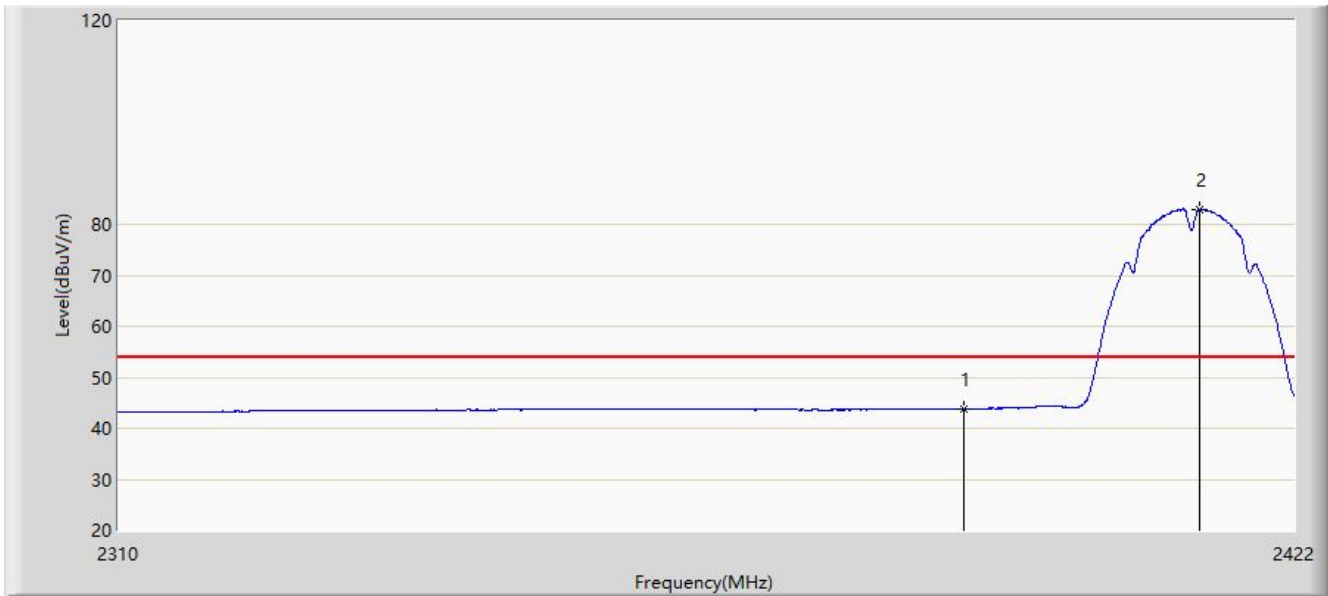


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 2390.000        | 43.842                 | 12.253               | -10.158     | 54.000         | 31.588        | AV   |
| 2  |      | *    | 2412.872        | 82.971                 | 51.285               | N/A         | N/A            | 31.686        | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                           |                     |
|-------------------------------------------|---------------------|
| Site: SIP-AC1                             | Time: 2022/02/18    |
| Limit: FCC_Part15.209_RE(3m)              | Engineer: Kyrie Xie |
| Probe: SIP-AC1_HF907_102862_1-18GHz       | Polarity: Vertical  |
| EUT: Pet activity monitor                 | Power: By Notebook  |
| Test Mode: Transmit at 2412MHz by 802.11b |                     |

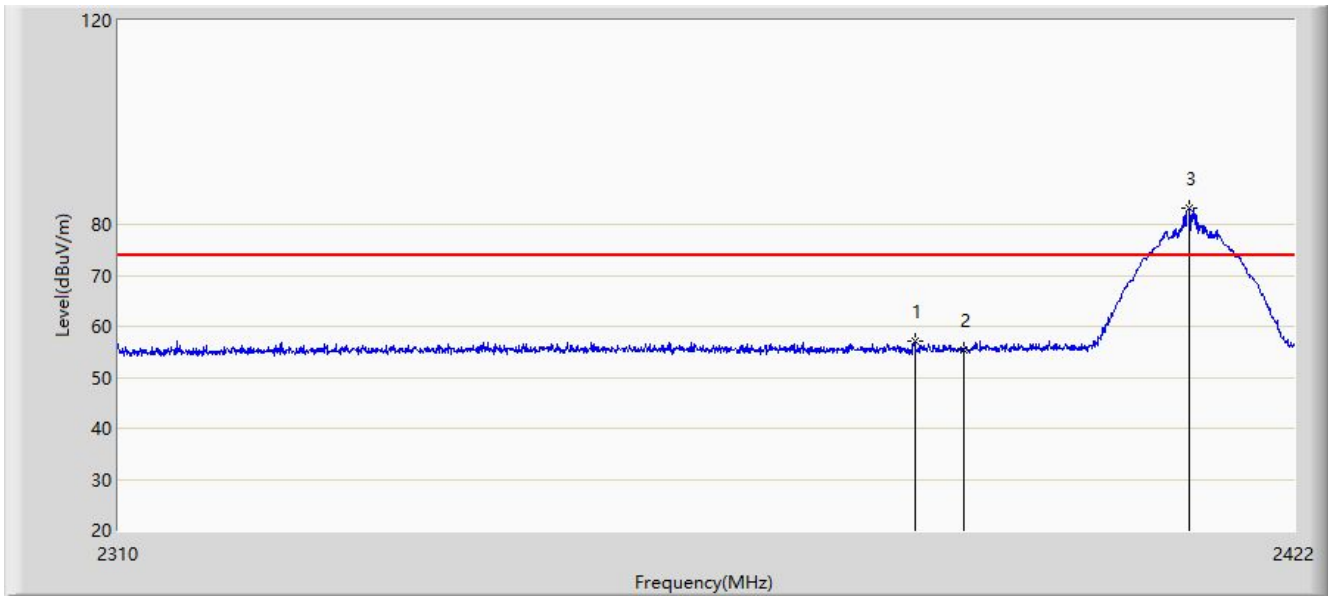


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 2385.320        | 57.070                 | 25.568               | -16.930     | 74.000         | 31.502        | PK   |
| 2  |      |      | 2390.000        | 55.305                 | 23.716               | -18.695     | 74.000         | 31.588        | PK   |
| 3  |      | *    | 2411.864        | 83.234                 | 51.549               | N/A         | N/A            | 31.684        | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                           |                     |
|-------------------------------------------|---------------------|
| Site: SIP-AC1                             | Time: 2022/02/18    |
| Limit: FCC_Part15.209_RE(3m)              | Engineer: Kyrie Xie |
| Probe: SIP-AC1_HF907_102862_1-18GHz       | Polarity: Vertical  |
| EUT: Pet activity monitor                 | Power: By Notebook  |
| Test Mode: Transmit at 2412MHz by 802.11b |                     |

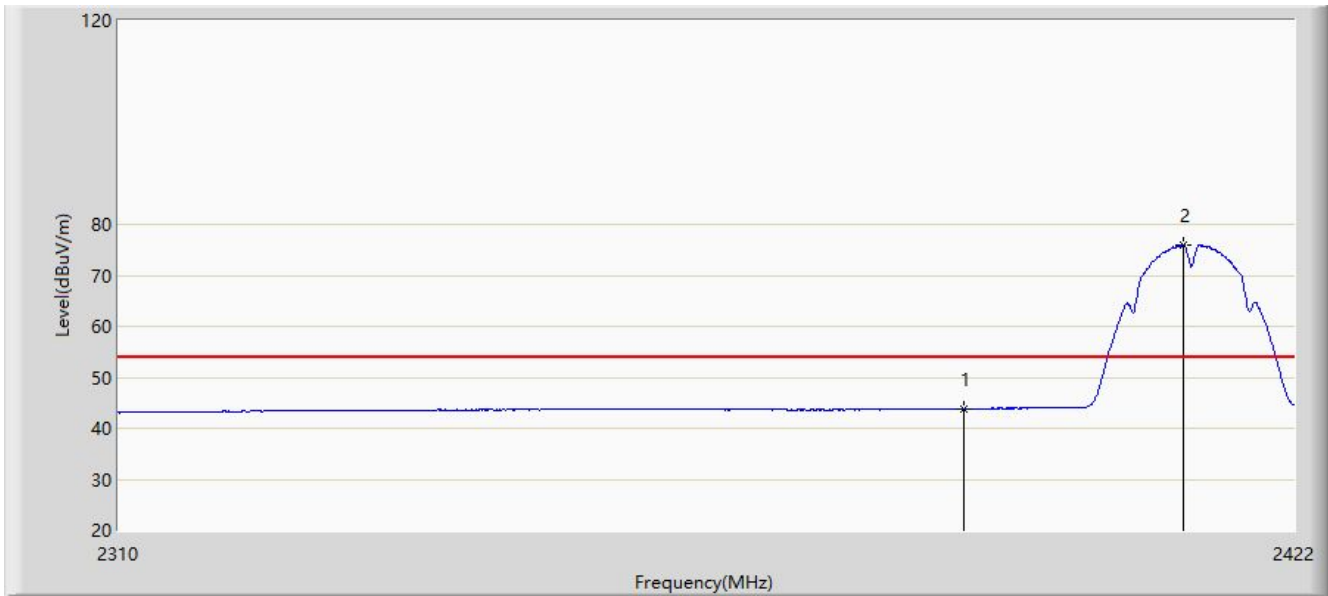


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 2390.000        | 43.827                 | 12.238               | -10.173     | 54.000         | 31.588        | AV   |
| 2  |      | *    | 2411.192        | 76.063                 | 44.379               | N/A         | N/A            | 31.683        | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                           |                        |
|-------------------------------------------|------------------------|
| Site: SIP-AC3                             | Time: 2022/01/07       |
| Limit: FCC_Part15.209_RE(3m)              | Engineer: Stephen Dong |
| Probe: SIP-AC3_HF907_102861_1-18GHz       | Polarity: Horizontal   |
| EUT: Pet activity monitor                 | Power: By Notebook     |
| Test Mode: Transmit at 2462MHz by 802.11b |                        |

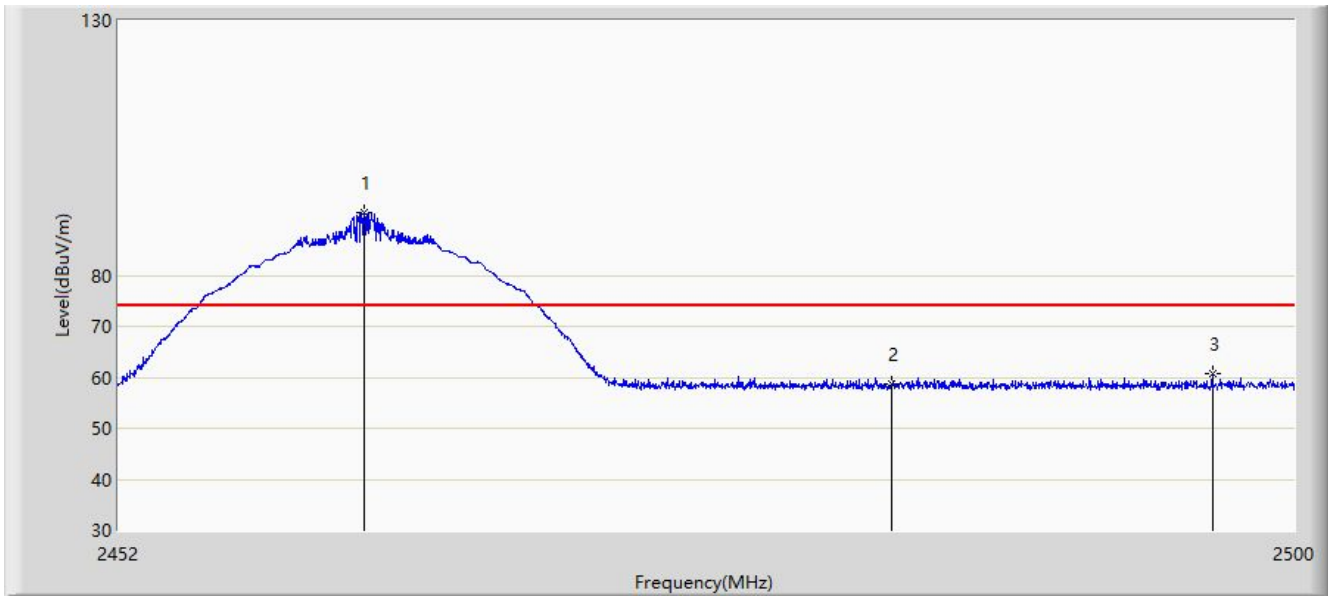


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 2461.984        | 92.284                 | 60.059               | N/A         | N/A            | 32.225        | PK   |
| 2  |      |      | 2483.500        | 58.828                 | 26.513               | -15.172     | 74.000         | 32.315        | PK   |
| 3  |      |      | 2496.640        | 60.668                 | 28.289               | -13.332     | 74.000         | 32.379        | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                           |                        |
|-------------------------------------------|------------------------|
| Site: SIP-AC3                             | Time: 2022/01/07       |
| Limit: FCC_Part15.209_RE(3m)              | Engineer: Stephen Dong |
| Probe: SIP-AC3_HF907_102861_1-18GHz       | Polarity: Horizontal   |
| EUT: Pet activity monitor                 | Power: By Notebook     |
| Test Mode: Transmit at 2462MHz by 802.11b |                        |

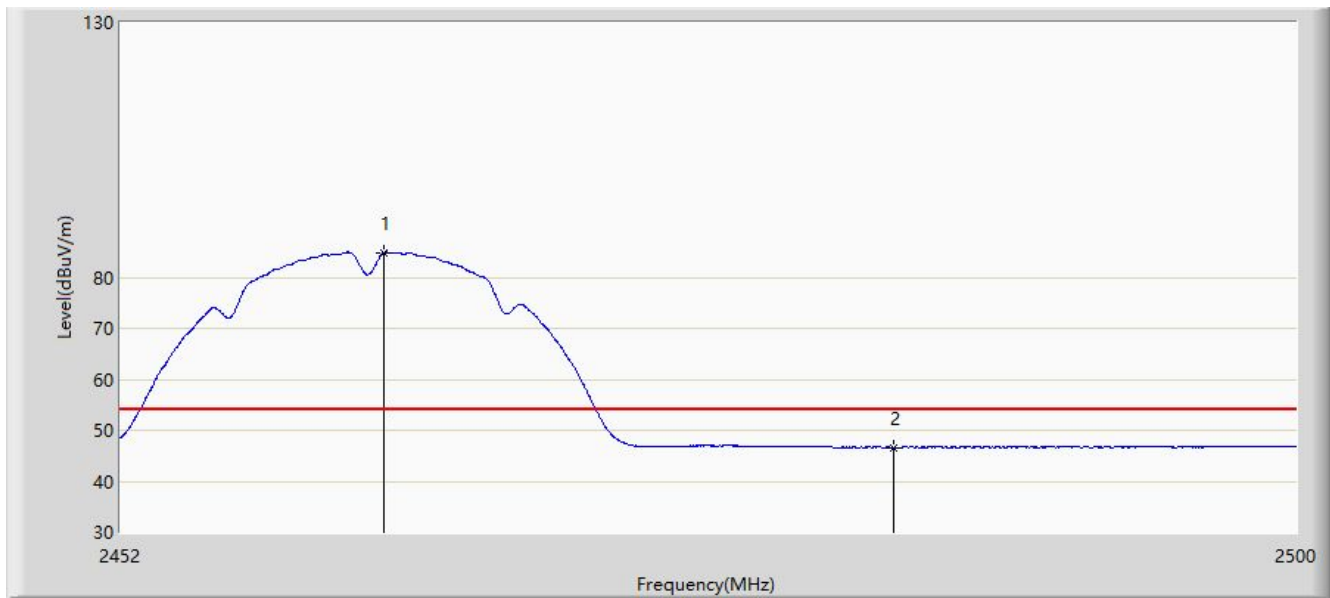


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 2462.704        | 84.814                 | 52.586               | N/A         | N/A            | 32.227        | AV   |
| 2  |      |      | 2483.500        | 46.646                 | 14.331               | -7.354      | 54.000         | 32.315        | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                           |                        |
|-------------------------------------------|------------------------|
| Site: SIP-AC3                             | Time: 2022/01/07       |
| Limit: FCC_Part15.209_RE(3m)              | Engineer: Stephen Dong |
| Probe: SIP-AC3_HF907_102861_1-18GHz       | Polarity: Vertical     |
| EUT: Pet activity monitor                 | Power: By Notebook     |
| Test Mode: Transmit at 2462MHz by 802.11b |                        |

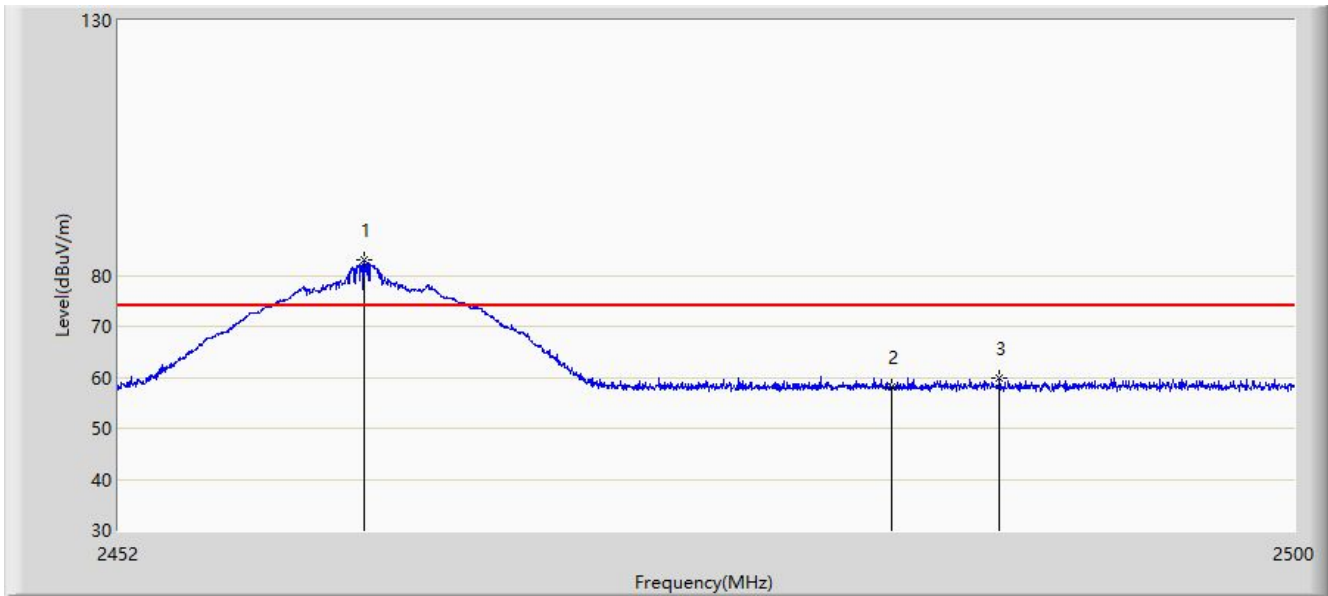


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 2461.984        | 82.951                 | 50.726               | N/A         | N/A            | 32.225        | PK   |
| 2  |      |      | 2483.500        | 58.199                 | 25.884               | -15.801     | 74.000         | 32.315        | PK   |
| 3  |      |      | 2487.904        | 59.869                 | 27.532               | -14.131     | 74.000         | 32.337        | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                           |                        |
|-------------------------------------------|------------------------|
| Site: SIP-AC3                             | Time: 2022/01/07       |
| Limit: FCC_Part15.209_RE(3m)              | Engineer: Stephen Dong |
| Probe: SIP-AC3_HF907_102861_1-18GHz       | Polarity: Vertical     |
| EUT: Pet activity monitor                 | Power: By Notebook     |
| Test Mode: Transmit at 2462MHz by 802.11b |                        |

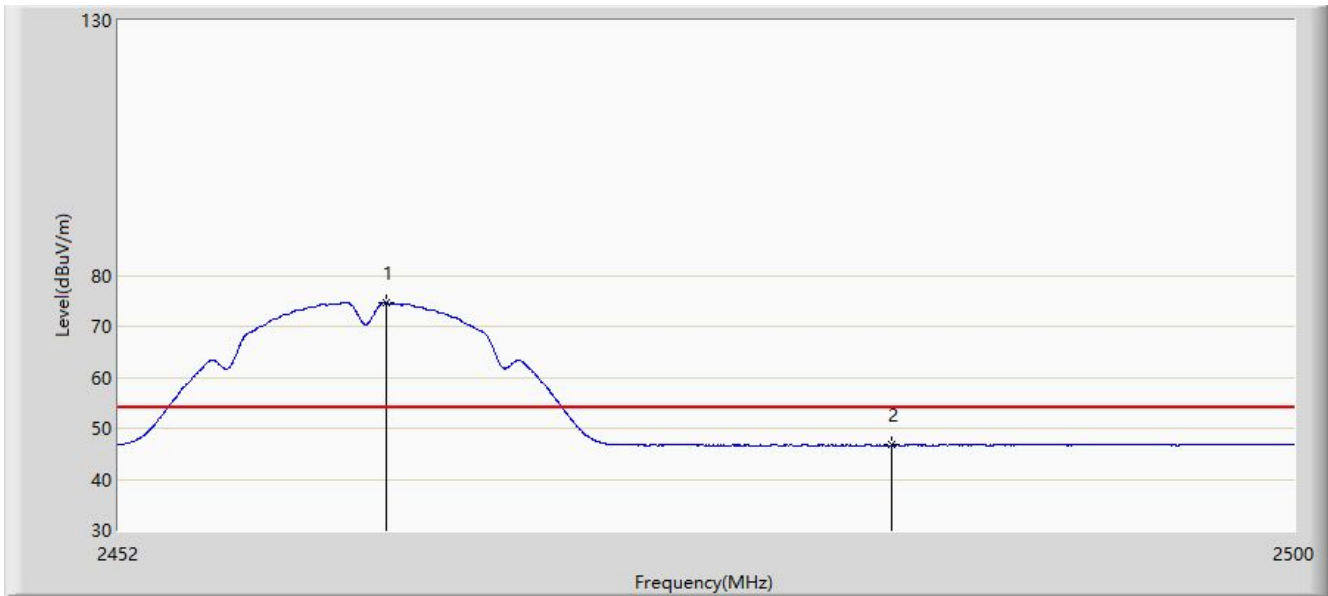


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 2462.872        | 74.579                 | 42.350               | N/A         | N/A            | 32.229        | AV   |
| 2  |      |      | 2483.500        | 46.670                 | 14.355               | -7.330      | 54.000         | 32.315        | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                           |                      |
|-------------------------------------------|----------------------|
| Site: SIP-AC1                             | Time: 2022/02/18     |
| Limit: FCC_Part15.209_RE(3m)              | Engineer: Kyrie Xie  |
| Probe: SIP-AC1_HF907_102862_1-18GHz       | Polarity: Horizontal |
| EUT: Pet activity monitor                 | Power: By Notebook   |
| Test Mode: Transmit at 2412MHz by 802.11g |                      |

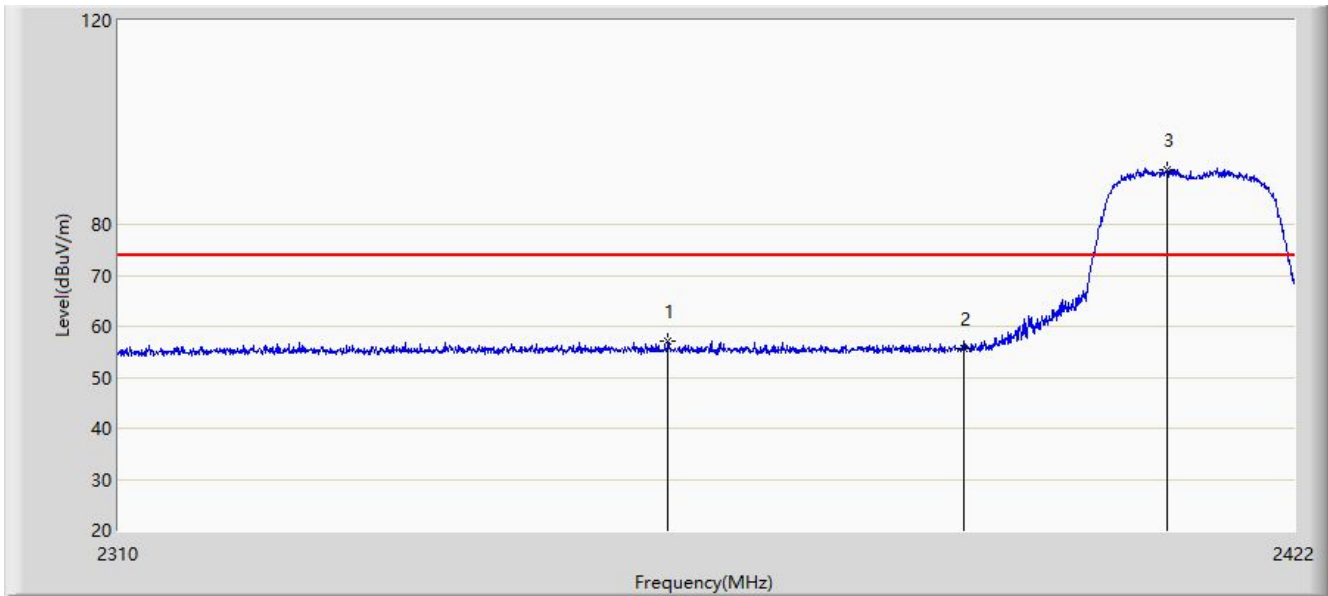


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 2361.688        | 57.222                 | 25.779               | -16.778     | 74.000         | 31.443        | PK   |
| 2  |      |      | 2390.000        | 55.516                 | 23.927               | -18.484     | 74.000         | 31.588        | PK   |
| 3  |      | *    | 2409.680        | 90.831                 | 59.149               | N/A         | N/A            | 31.682        | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                           |                      |
|-------------------------------------------|----------------------|
| Site: SIP-AC1                             | Time: 2022/02/18     |
| Limit: FCC_Part15.209_RE(3m)              | Engineer: Kyrie Xie  |
| Probe: SIP-AC1_HF907_102862_1-18GHz       | Polarity: Horizontal |
| EUT: Pet activity monitor                 | Power: By Notebook   |
| Test Mode: Transmit at 2412MHz by 802.11g |                      |

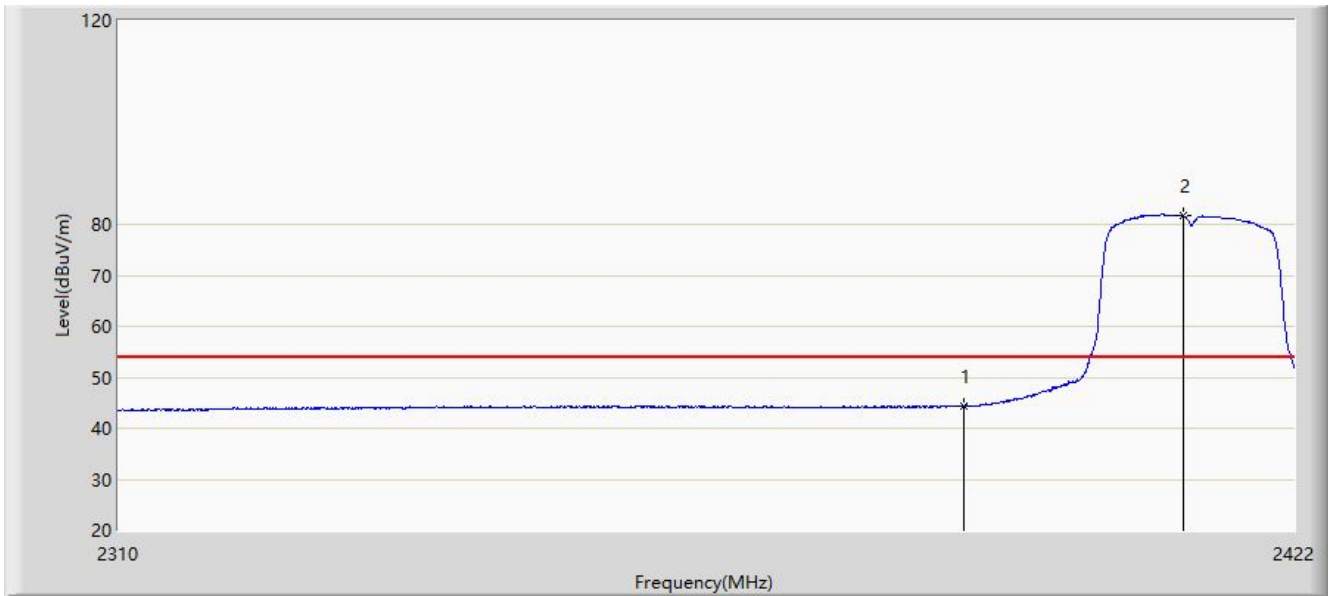


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 2390.000        | 44.363                 | 12.774               | -9.637      | 54.000         | 31.588        | AV   |
| 2  |      | *    | 2411.248        | 81.688                 | 50.004               | N/A         | N/A            | 31.684        | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                           |                     |
|-------------------------------------------|---------------------|
| Site: SIP-AC1                             | Time: 2022/02/18    |
| Limit: FCC_Part15.209_RE(3m)              | Engineer: Kyrie Xie |
| Probe: SIP-AC1_HF907_102862_1-18GHz       | Polarity: Vertical  |
| EUT: Pet activity monitor                 | Power: By Notebook  |
| Test Mode: Transmit at 2412MHz by 802.11g |                     |

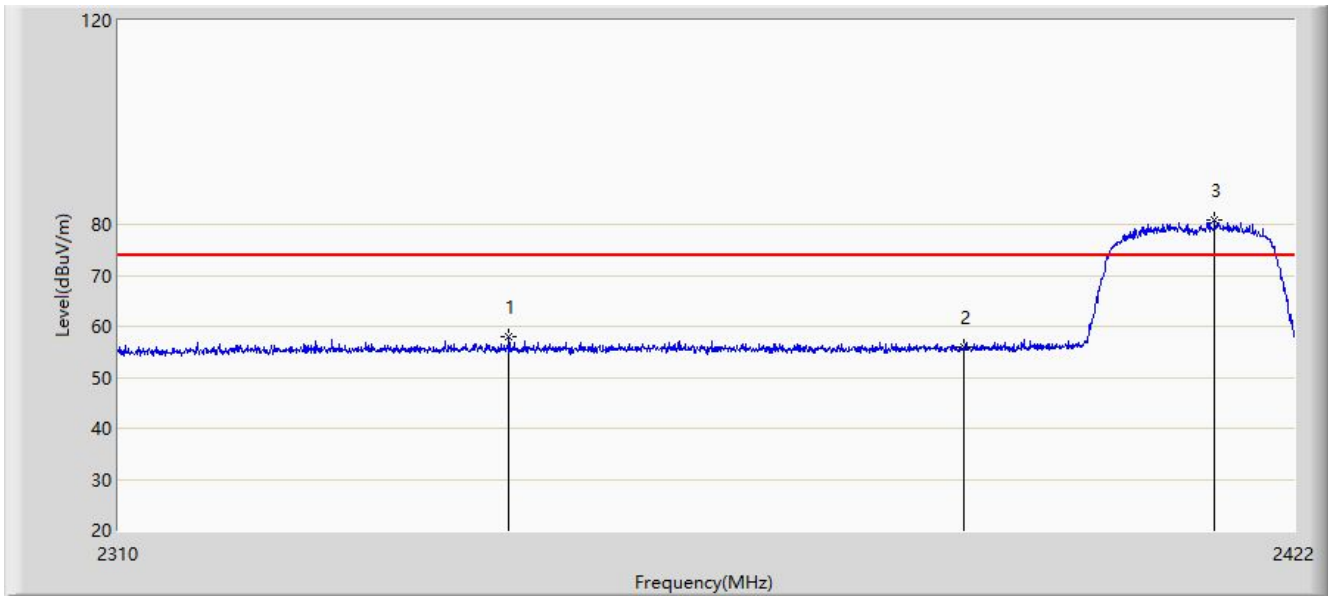


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 2346.624        | 57.990                 | 26.526               | -16.010     | 74.000         | 31.463        | PK   |
| 2  |      |      | 2390.000        | 55.827                 | 24.238               | -18.173     | 74.000         | 31.588        | PK   |
| 3  |      | *    | 2414.272        | 80.734                 | 49.046               | N/A         | N/A            | 31.688        | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                           |                     |
|-------------------------------------------|---------------------|
| Site: SIP-AC1                             | Time: 2022/02/18    |
| Limit: FCC_Part15.209_RE(3m)              | Engineer: Kyrie Xie |
| Probe: SIP-AC1_HF907_102862_1-18GHz       | Polarity: Vertical  |
| EUT: Pet activity monitor                 | Power: By Notebook  |
| Test Mode: Transmit at 2412MHz by 802.11g |                     |

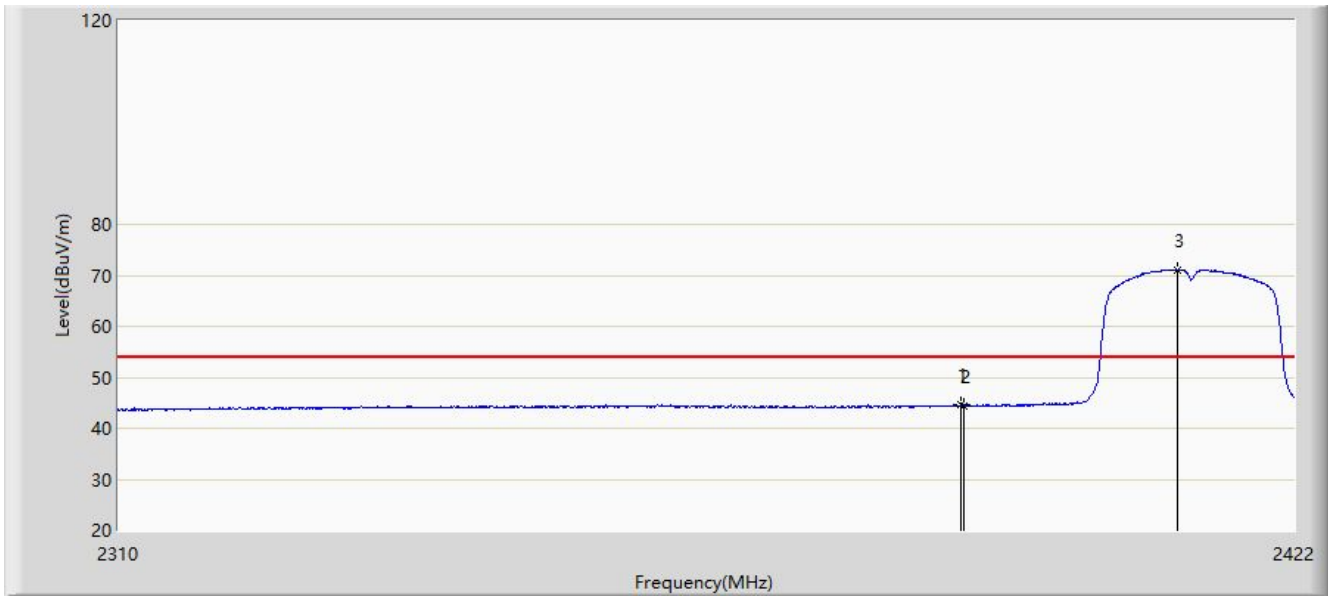


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 2389.800        | 44.546                 | 12.961               | -9.454      | 54.000         | 31.584        | AV   |
| 2  |      |      | 2390.000        | 44.272                 | 12.683               | -9.728      | 54.000         | 31.588        | AV   |
| 3  |      | *    | 2410.744        | 71.111                 | 39.428               | N/A         | N/A            | 31.683        | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                           |                      |
|-------------------------------------------|----------------------|
| Site: SIP-AC1                             | Time: 2022/02/18     |
| Limit: FCC_Part15.209_RE(3m)              | Engineer: Kyrie Xie  |
| Probe: SIP-AC1_HF907_102862_1-18GHz       | Polarity: Horizontal |
| EUT: Pet activity monitor                 | Power: By Notebook   |
| Test Mode: Transmit at 2462MHz by 802.11g |                      |

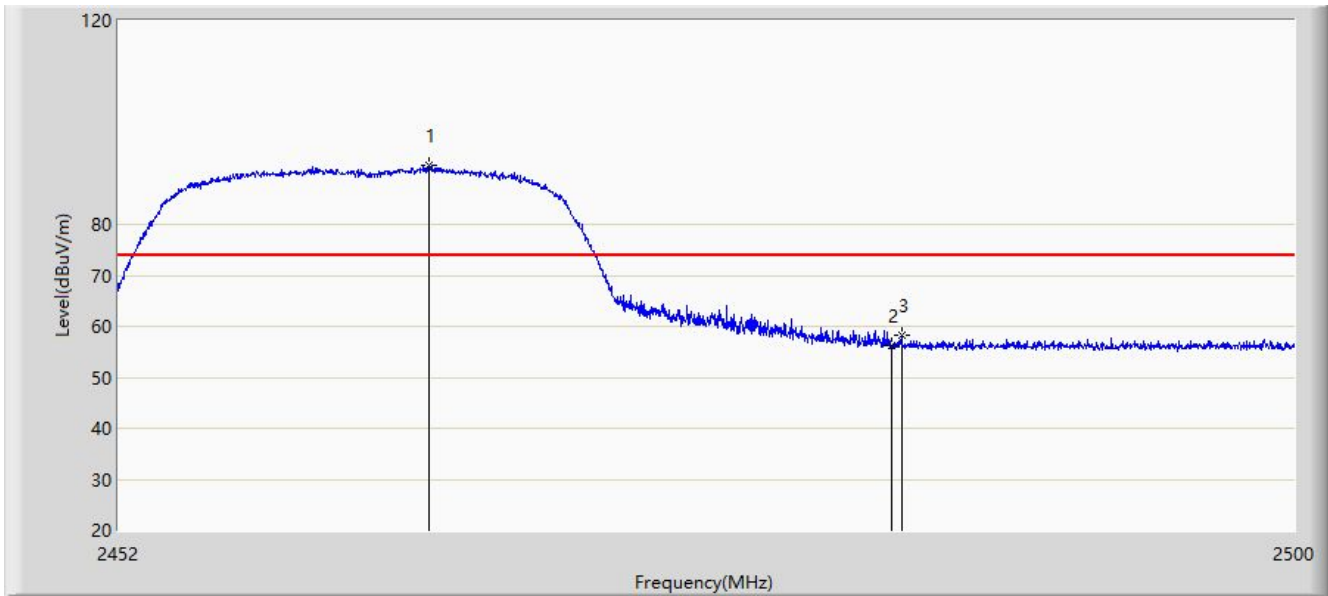


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 2464.576        | 91.728                 | 59.884               | N/A         | N/A            | 31.844        | PK   |
| 2  |      |      | 2483.500        | 56.156                 | 24.284               | -17.844     | 74.000         | 31.872        | PK   |
| 3  |      |      | 2483.872        | 58.371                 | 26.499               | -15.629     | 74.000         | 31.872        | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                           |                      |
|-------------------------------------------|----------------------|
| Site: SIP-AC1                             | Time: 2022/02/18     |
| Limit: FCC_Part15.209_RE(3m)              | Engineer: Kyrie Xie  |
| Probe: SIP-AC1_HF907_102862_1-18GHz       | Polarity: Horizontal |
| EUT: Pet activity monitor                 | Power: By Notebook   |
| Test Mode: Transmit at 2462MHz by 802.11g |                      |

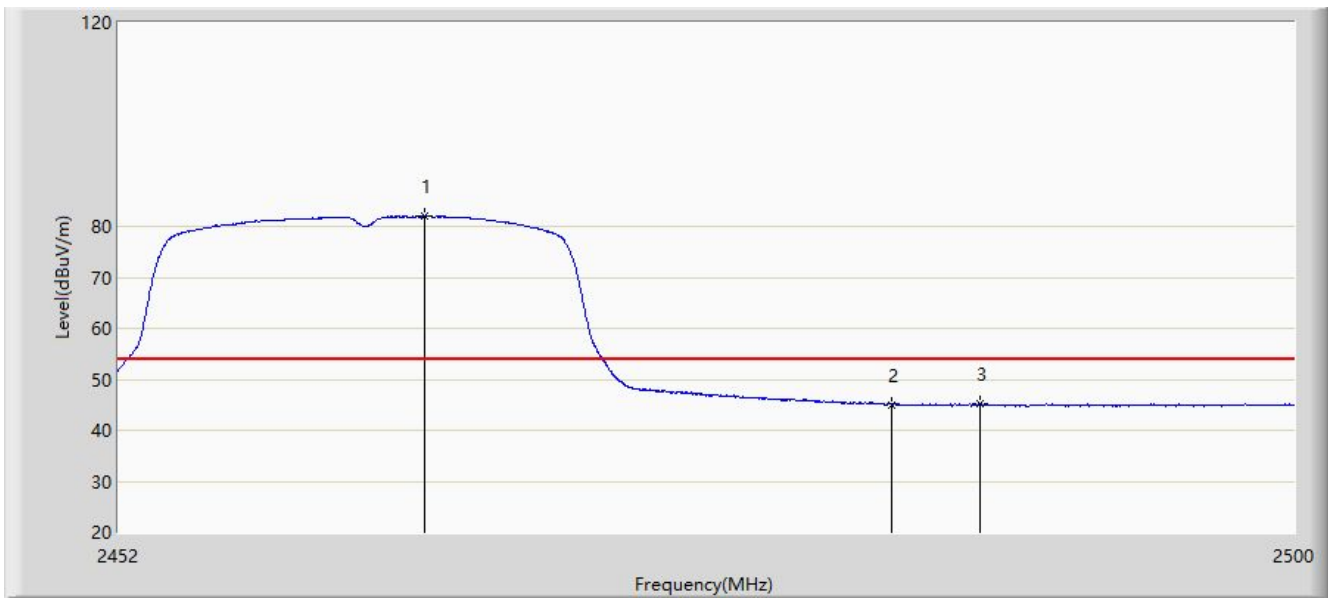


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 2464.408        | 81.977                 | 50.133               | N/A         | N/A            | 31.844        | AV   |
| 2  |      |      | 2483.500        | 45.026                 | 13.154               | -8.974      | 54.000         | 31.872        | AV   |
| 3  |      |      | 2487.088        | 45.206                 | 13.335               | -8.794      | 54.000         | 31.871        | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                           |                     |
|-------------------------------------------|---------------------|
| Site: SIP-AC1                             | Time: 2022/02/18    |
| Limit: FCC_Part15.209_RE(3m)              | Engineer: Kyrie Xie |
| Probe: SIP-AC1_HF907_102862_1-18GHz       | Polarity: Vertical  |
| EUT: Pet activity monitor                 | Power: By Notebook  |
| Test Mode: Transmit at 2462MHz by 802.11g |                     |

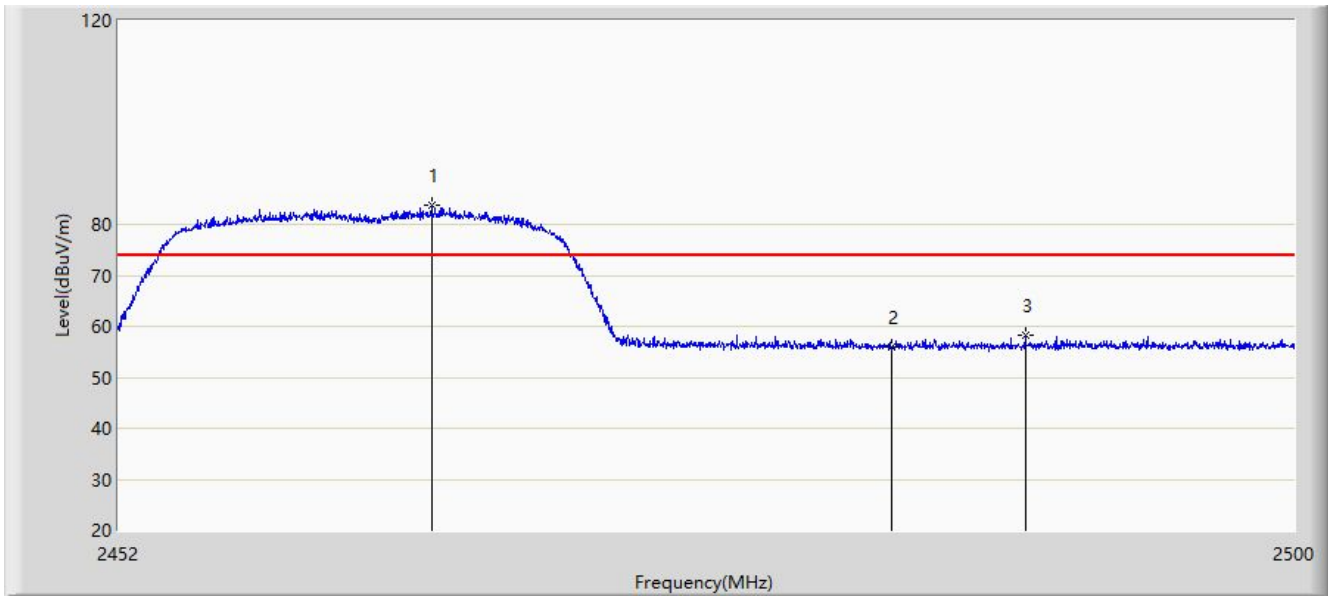


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 2464.720        | 83.684                 | 51.839               | N/A         | N/A            | 31.845        | PK   |
| 2  |      |      | 2483.500        | 55.997                 | 24.125               | -18.003     | 74.000         | 31.872        | PK   |
| 3  |      |      | 2488.960        | 58.391                 | 26.520               | -15.609     | 74.000         | 31.871        | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                           |                     |
|-------------------------------------------|---------------------|
| Site: SIP-AC1                             | Time: 2022/02/18    |
| Limit: FCC_Part15.209_RE(3m)              | Engineer: Kyrie Xie |
| Probe: SIP-AC1_HF907_102862_1-18GHz       | Polarity: Vertical  |
| EUT: Pet activity monitor                 | Power: By Notebook  |
| Test Mode: Transmit at 2462MHz by 802.11g |                     |

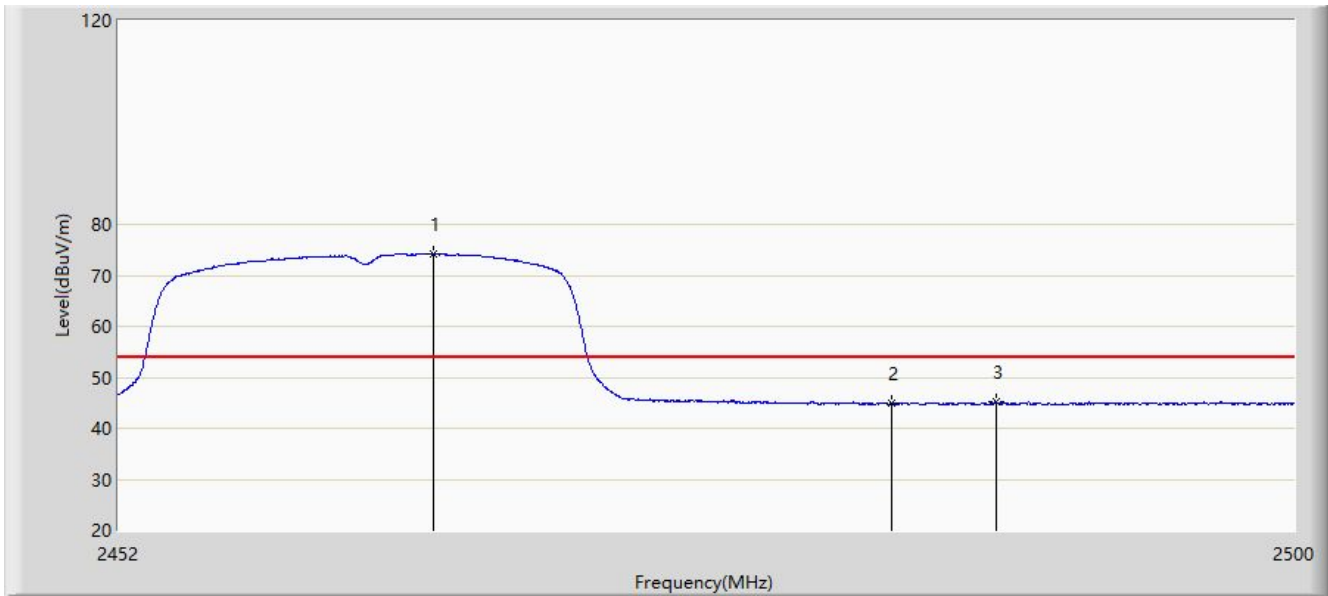


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 2464.792        | 74.229                 | 42.384               | N/A         | N/A            | 31.845        | AV   |
| 2  |      |      | 2483.500        | 44.901                 | 13.029               | -9.099      | 54.000         | 31.872        | AV   |
| 3  |      |      | 2487.736        | 45.134                 | 13.263               | -8.866      | 54.000         | 31.871        | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                      |
|------------------------------------------------|----------------------|
| Site: SIP-AC1                                  | Time: 2022/02/18     |
| Limit: FCC_Part15.209_RE(3m)                   | Engineer: Kyrie Xie  |
| Probe: SIP-AC1_HF907_102862_1-18GHz            | Polarity: Horizontal |
| EUT: Pet activity monitor                      | Power: By Notebook   |
| Test Mode: Transmit at 2412MHz by 802.11n-HT20 |                      |

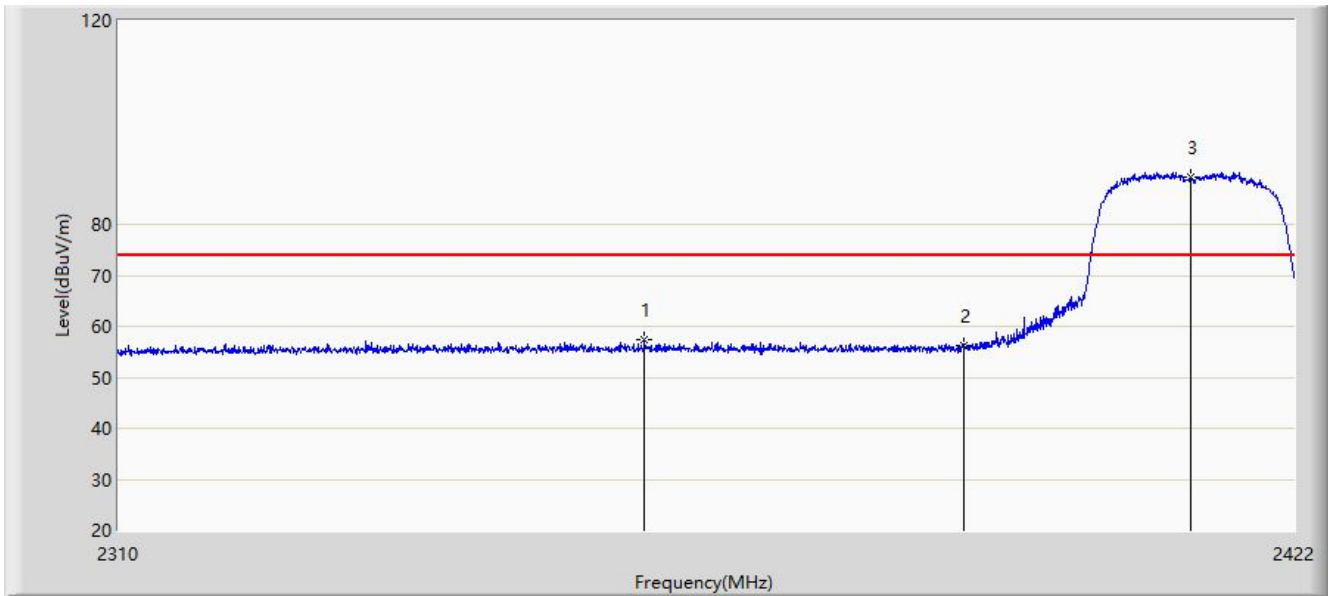


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 2359.504        | 57.453                 | 25.999               | -16.547     | 74.000         | 31.454        | PK   |
| 2  |      |      | 2390.000        | 56.089                 | 24.500               | -17.911     | 74.000         | 31.588        | PK   |
| 3  |      | *    | 2412.000        | 89.177                 | 57.492               | N/A         | N/A            | 31.685        | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                      |
|------------------------------------------------|----------------------|
| Site: SIP-AC1                                  | Time: 2022/02/18     |
| Limit: FCC_Part15.209_RE(3m)                   | Engineer: Kyrie Xie  |
| Probe: SIP-AC1_HF907_102862_1-18GHz            | Polarity: Horizontal |
| EUT: Pet activity monitor                      | Power: By Notebook   |
| Test Mode: Transmit at 2412MHz by 802.11n-HT20 |                      |

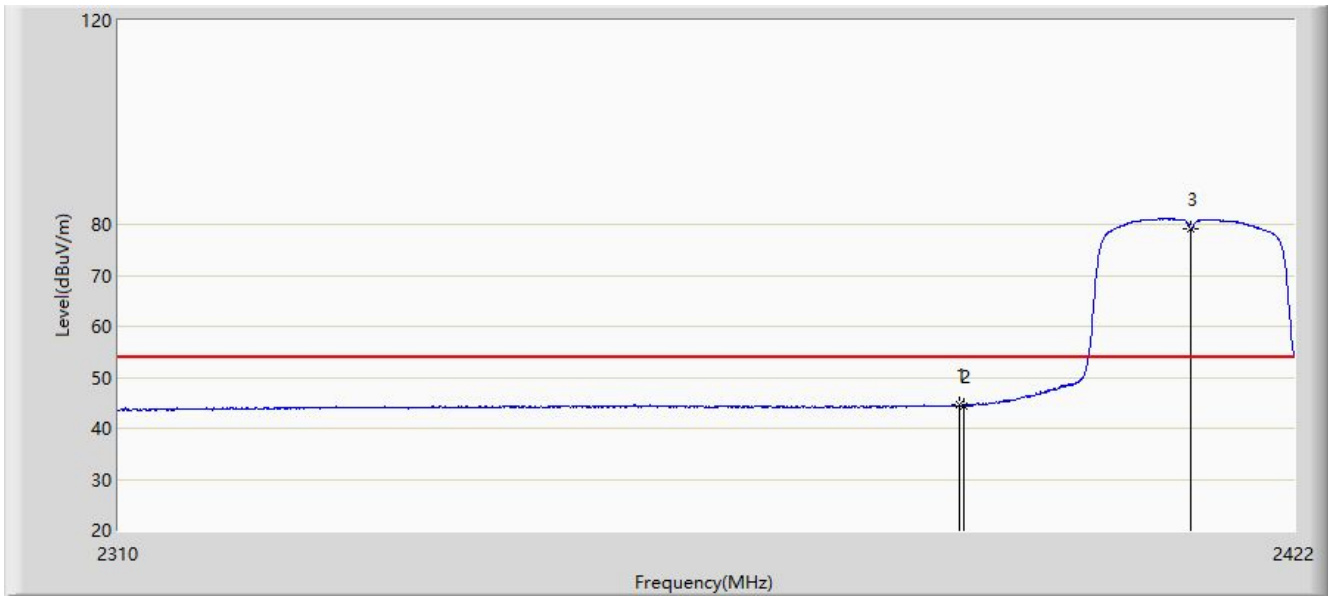


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 2389.576        | 44.503                 | 12.922               | -9.497      | 54.000         | 31.581        | AV   |
| 2  |      |      | 2390.000        | 44.471                 | 12.882               | -9.529      | 54.000         | 31.588        | AV   |
| 3  |      | *    | 2412.000        | 79.110                 | 47.425               | N/A         | N/A            | 31.685        | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                     |
|------------------------------------------------|---------------------|
| Site: SIP-AC1                                  | Time: 2022/02/18    |
| Limit: FCC_Part15.209_RE(3m)                   | Engineer: Kyrie Xie |
| Probe: SIP-AC1_HF907_102862_1-18GHz            | Polarity: Vertical  |
| EUT: Pet activity monitor                      | Power: By Notebook  |
| Test Mode: Transmit at 2412MHz by 802.11n-HT20 |                     |

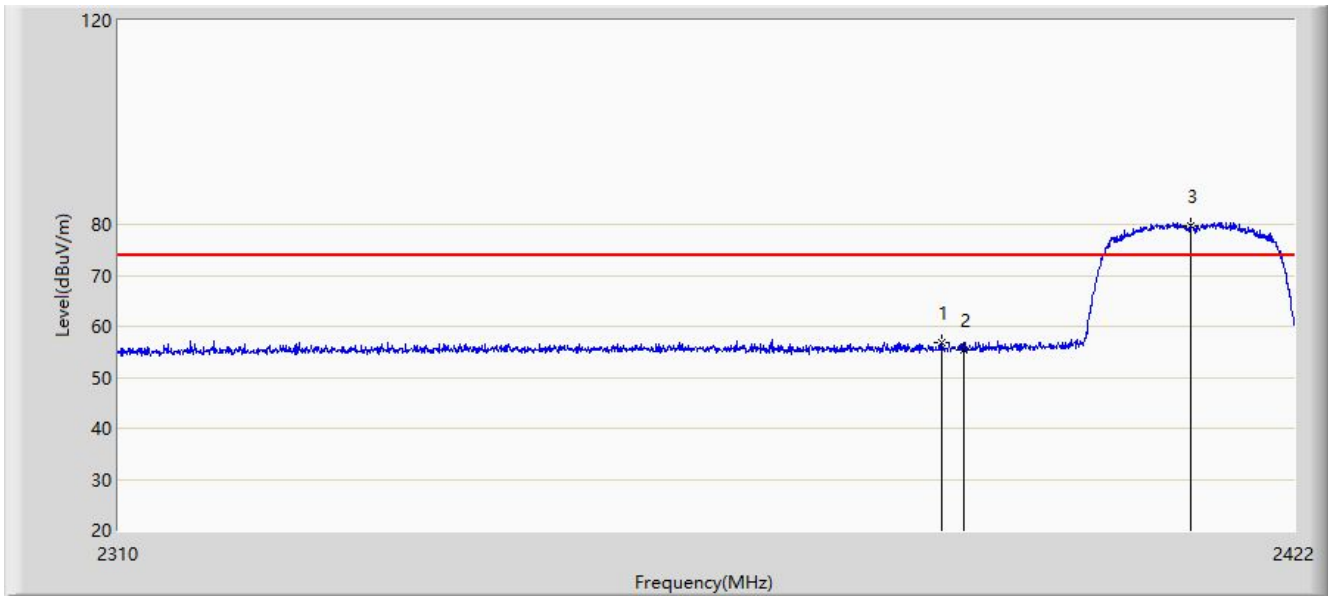


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 2387.896        | 56.755                 | 25.205               | -17.245     | 74.000         | 31.549        | PK   |
| 2  |      |      | 2390.000        | 55.426                 | 23.837               | -18.574     | 74.000         | 31.588        | PK   |
| 3  |      | *    | 2412.000        | 79.762                 | 48.077               | N/A         | N/A            | 31.685        | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                     |
|------------------------------------------------|---------------------|
| Site: SIP-AC1                                  | Time: 2022/02/18    |
| Limit: FCC_Part15.209_RE(3m)                   | Engineer: Kyrie Xie |
| Probe: SIP-AC1_HF907_102862_1-18GHz            | Polarity: Vertical  |
| EUT: Pet activity monitor                      | Power: By Notebook  |
| Test Mode: Transmit at 2412MHz by 802.11n-HT20 |                     |

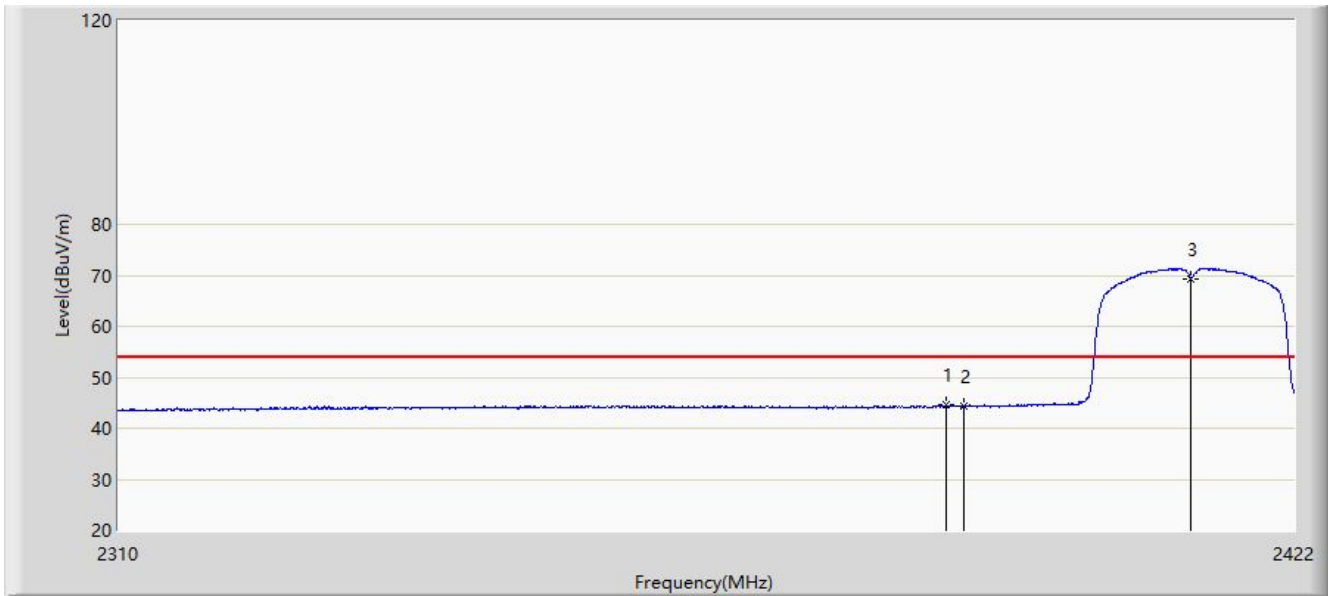


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 2388.288        | 44.502                 | 12.945               | -9.498      | 54.000         | 31.557        | AV   |
| 2  |      |      | 2390.000        | 44.283                 | 12.694               | -9.717      | 54.000         | 31.588        | AV   |
| 3  |      | *    | 2412.000        | 69.386                 | 37.701               | N/A         | N/A            | 31.685        | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                      |
|------------------------------------------------|----------------------|
| Site: SIP-AC1                                  | Time: 2022/02/18     |
| Limit: FCC_Part15.209_RE(3m)                   | Engineer: Kyrie Xie  |
| Probe: SIP-AC1_HF907_102862_1-18GHz            | Polarity: Horizontal |
| EUT: Pet activity monitor                      | Power: By Notebook   |
| Test Mode: Transmit at 2462MHz by 802.11n-HT20 |                      |

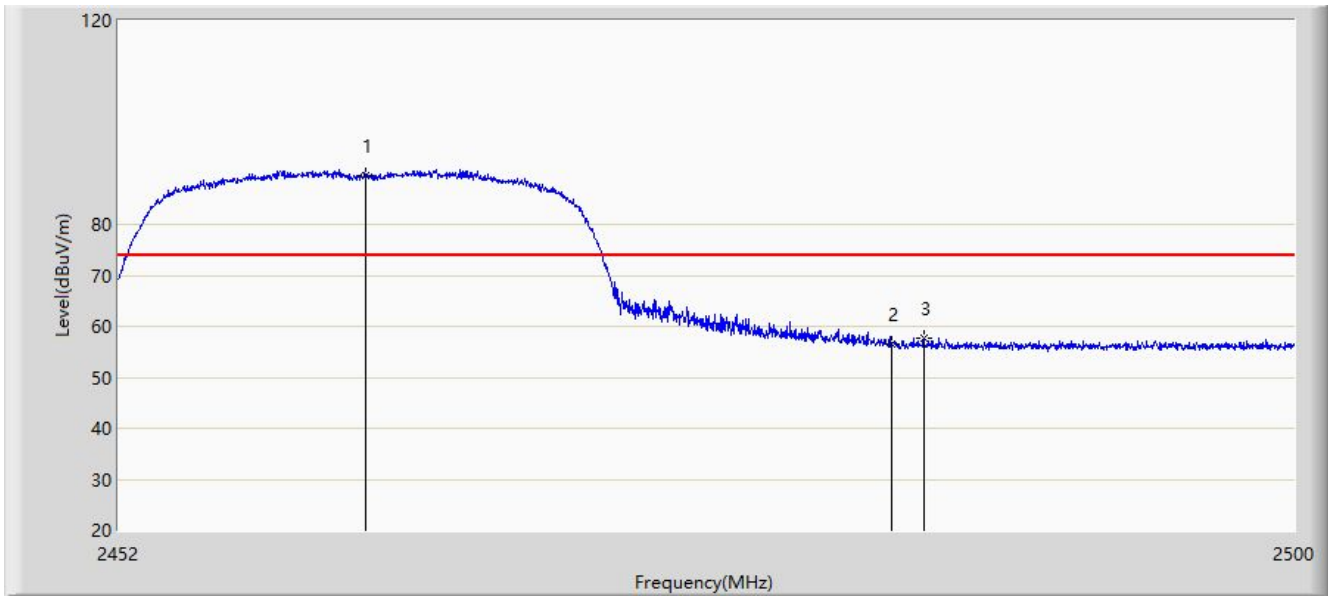


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 2462.000        | 89.427                 | 57.588               | N/A         | N/A            | 31.839        | PK   |
| 2  |      |      | 2483.500        | 56.485                 | 24.613               | -17.515     | 74.000         | 31.872        | PK   |
| 3  |      |      | 2484.784        | 57.791                 | 25.919               | -16.209     | 74.000         | 31.872        | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                      |
|------------------------------------------------|----------------------|
| Site: SIP-AC1                                  | Time: 2022/02/18     |
| Limit: FCC_Part15.209_RE(3m)                   | Engineer: Kyrie Xie  |
| Probe: SIP-AC1_HF907_102862_1-18GHz            | Polarity: Horizontal |
| EUT: Pet activity monitor                      | Power: By Notebook   |
| Test Mode: Transmit at 2462MHz by 802.11n-HT20 |                      |

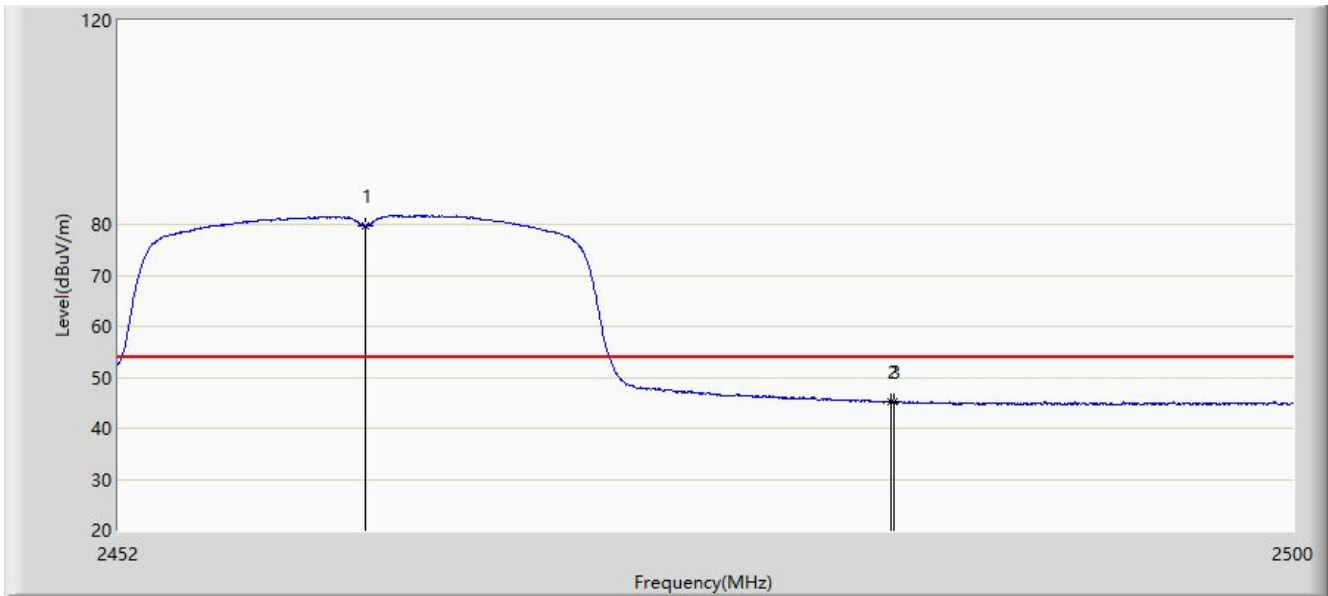


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 2462.000        | 79.687                 | 47.848               | N/A         | N/A            | 31.839        | AV   |
| 2  |      |      | 2483.500        | 45.233                 | 13.361               | -8.767      | 54.000         | 31.872        | AV   |
| 3  |      |      | 2483.584        | 45.266                 | 13.394               | -8.734      | 54.000         | 31.872        | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                     |
|------------------------------------------------|---------------------|
| Site: SIP-AC1                                  | Time: 2022/02/18    |
| Limit: FCC_Part15.209_RE(3m)                   | Engineer: Kyrie Xie |
| Probe: SIP-AC1_HF907_102862_1-18GHz            | Polarity: Vertical  |
| EUT: Pet activity monitor                      | Power: By Notebook  |
| Test Mode: Transmit at 2462MHz by 802.11n-HT20 |                     |

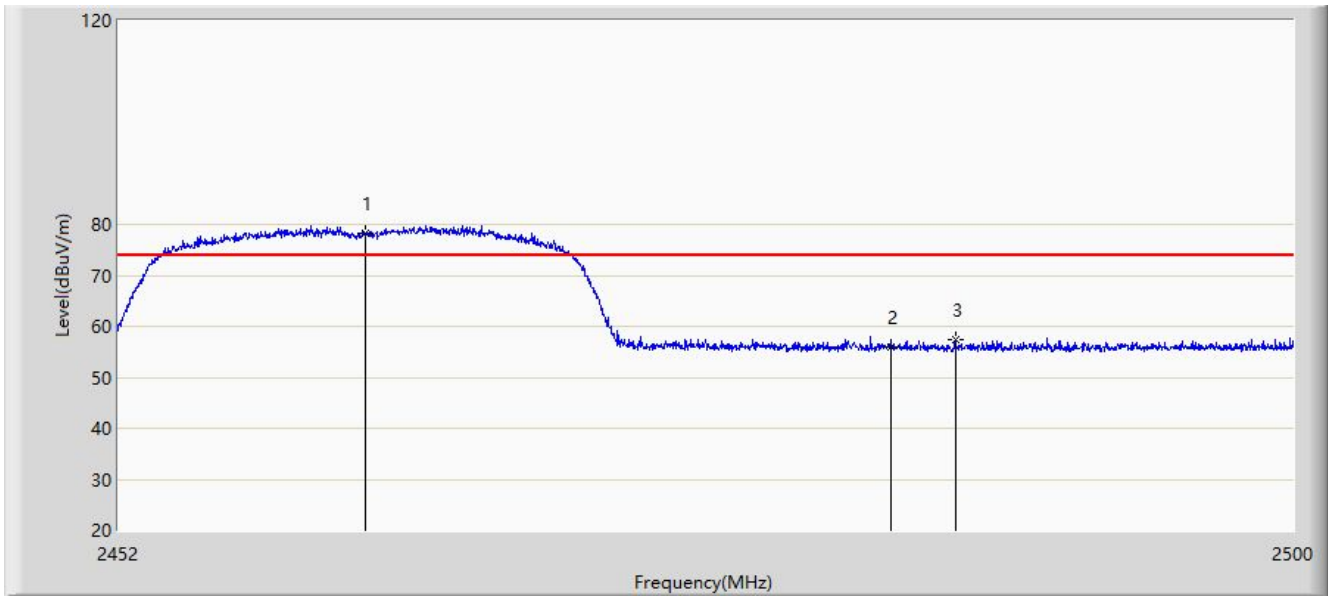


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 2462.000        | 78.130                 | 46.291               | N/A         | N/A            | 31.839        | PK   |
| 2  |      |      | 2483.500        | 55.926                 | 24.054               | -18.074     | 74.000         | 31.872        | PK   |
| 3  |      |      | 2486.104        | 57.324                 | 25.453               | -16.676     | 74.000         | 31.871        | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                     |
|------------------------------------------------|---------------------|
| Site: SIP-AC1                                  | Time: 2022/02/18    |
| Limit: FCC_Part15.209_RE(3m)                   | Engineer: Kyrie Xie |
| Probe: SIP-AC1_HF907_102862_1-18GHz            | Polarity: Vertical  |
| EUT: Pet activity monitor                      | Power: By Notebook  |
| Test Mode: Transmit at 2462MHz by 802.11n-HT20 |                     |

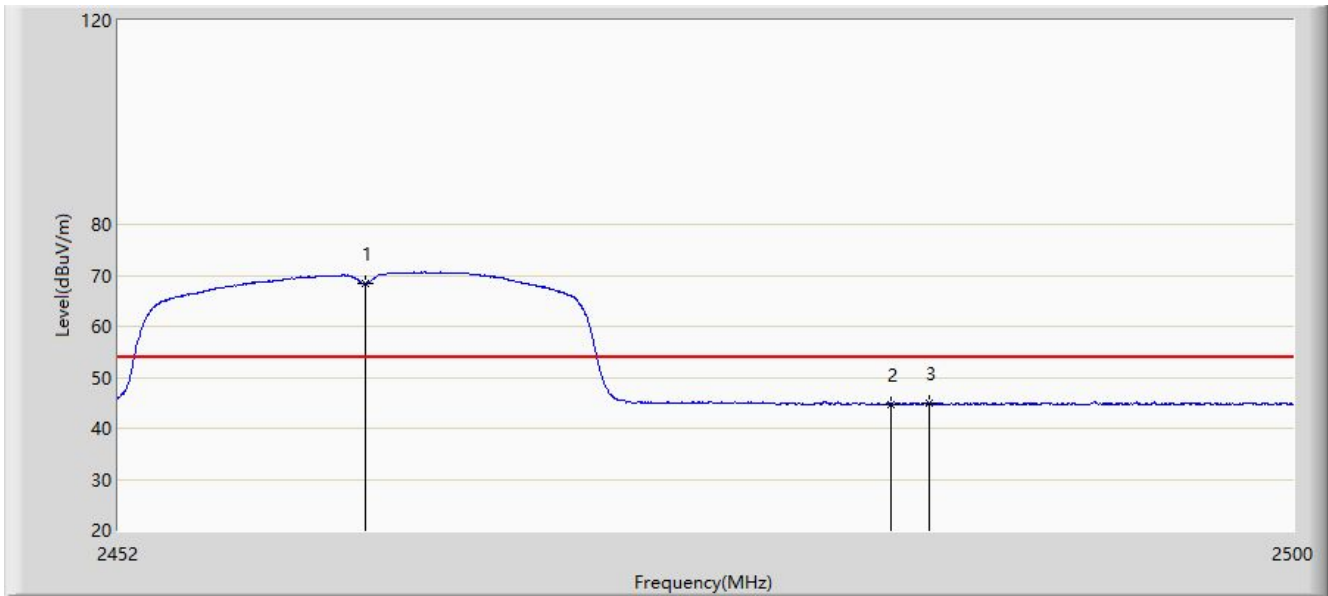


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 2462.000        | 68.356                 | 36.517               | N/A         | N/A            | 31.839        | AV   |
| 2  |      |      | 2483.500        | 44.748                 | 12.876               | -9.252      | 54.000         | 31.872        | AV   |
| 3  |      |      | 2485.048        | 45.046                 | 13.174               | -8.954      | 54.000         | 31.871        | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

### A.8 AC Conducted Emissions Test Result

|                                           |                     |
|-------------------------------------------|---------------------|
| Site: SIP-SR2                             | Time: 2022/01/18    |
| Limit: FCC_Part15.207_CE_AC Power         | Engineer: Barry Wu  |
| Probe: SIP-SR2-ENV216_101684_E            | Polarity: Line      |
| EUT: Pet activity monitor                 | Power: AC 120V/60Hz |
| Test Mode: Transmit at 2437MHz by 802.11b |                     |

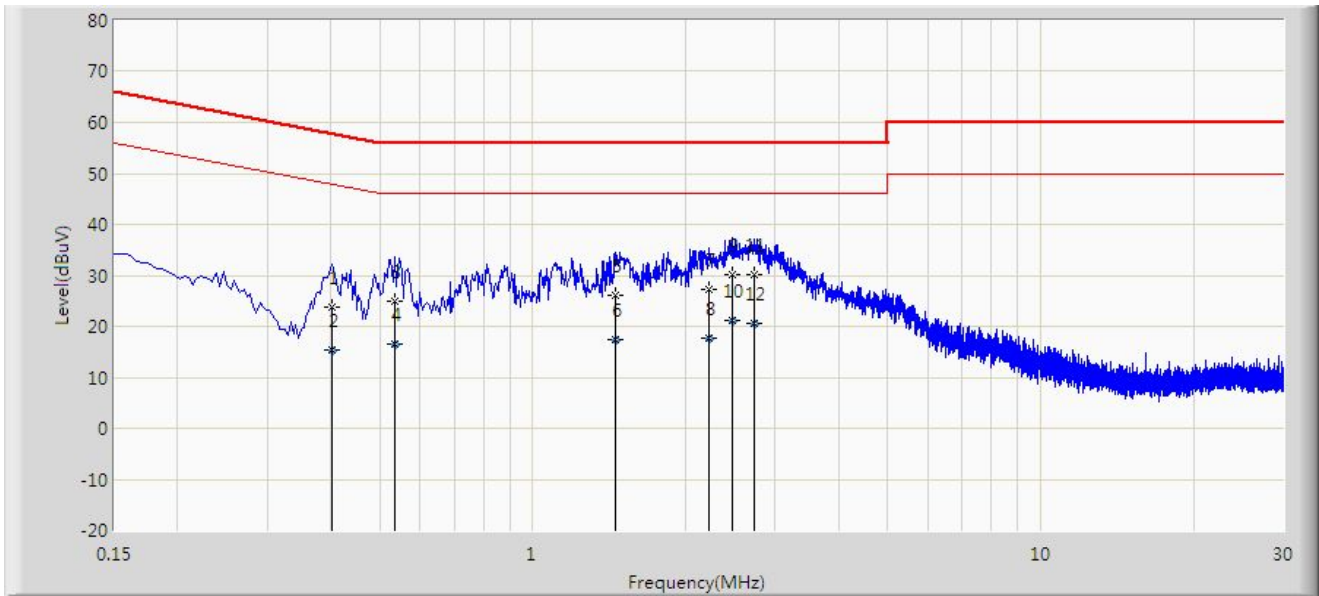


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV) | Factor (dB) | Type |
|----|------|------|-----------------|----------------------|----------------------|-------------|--------------|-------------|------|
| 1  |      |      | 0.402           | 23.666               | 13.843               | -34.146     | 57.812       | 9.822       | QP   |
| 2  |      |      | 0.402           | 15.345               | 5.523                | -32.467     | 47.812       | 9.822       | AV   |
| 3  |      |      | 0.534           | 24.858               | 15.030               | -31.142     | 56.000       | 9.828       | QP   |
| 4  |      |      | 0.534           | 16.511               | 6.683                | -29.489     | 46.000       | 9.828       | AV   |
| 5  |      |      | 1.458           | 26.035               | 16.133               | -29.965     | 56.000       | 9.902       | QP   |
| 6  |      |      | 1.458           | 17.486               | 7.584                | -28.514     | 46.000       | 9.902       | AV   |
| 7  |      |      | 2.222           | 27.179               | 17.216               | -28.821     | 56.000       | 9.964       | QP   |
| 8  |      |      | 2.222           | 17.607               | 7.644                | -28.393     | 46.000       | 9.964       | AV   |
| 9  |      |      | 2.466           | 30.177               | 20.205               | -25.823     | 56.000       | 9.972       | QP   |
| 10 |      | *    | 2.466           | 21.037               | 11.065               | -24.963     | 46.000       | 9.972       | AV   |
| 11 |      |      | 2.726           | 30.262               | 20.278               | -25.738     | 56.000       | 9.983       | QP   |
| 12 |      |      | 2.726           | 20.591               | 10.608               | -25.409     | 46.000       | 9.983       | AV   |

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

|                                           |                     |
|-------------------------------------------|---------------------|
| Site: SIP-SR2                             | Time: 2022/01/18    |
| Limit: FCC_Part15.207_CE_AC Power         | Engineer: Barry Wu  |
| Probe: SIP-SR2-ENV216_101684_E            | Polarity: Neutral   |
| EUT: Pet activity monitor                 | Power: AC 120V/60Hz |
| Test Mode: Transmit at 2437MHz by 802.11b |                     |

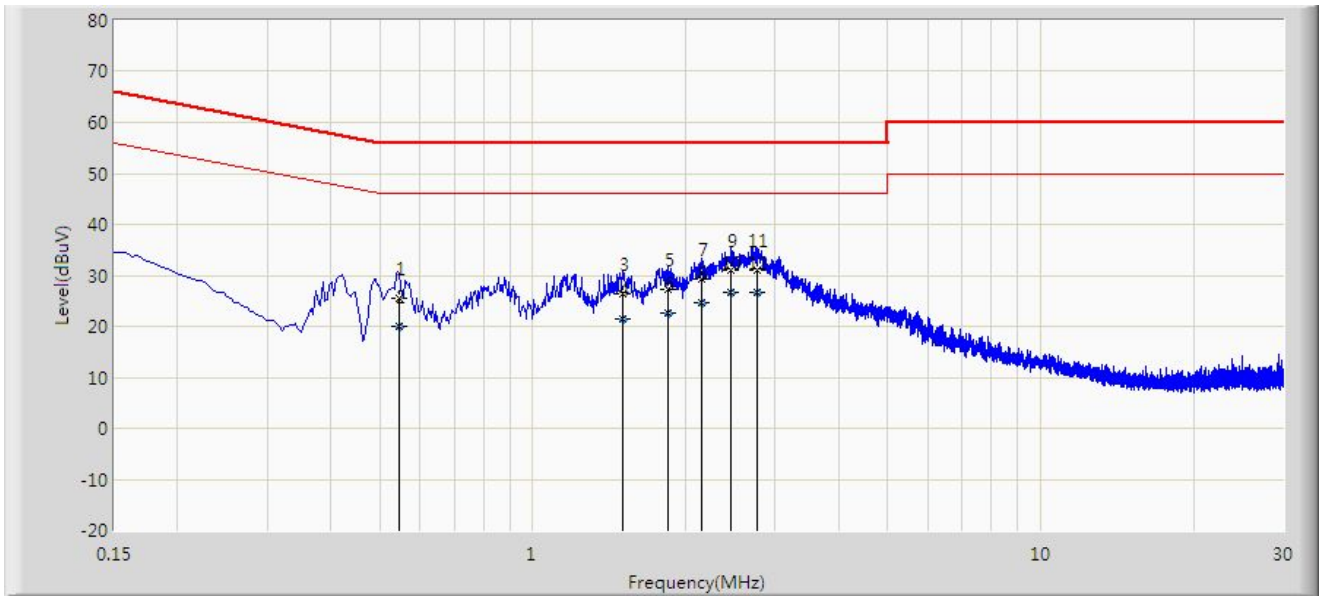

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV) | Factor (dB) | Type |
|----|------|------|-----------------|----------------------|----------------------|-------------|--------------|-------------|------|
| 1  |      |      | 0.546           | 25.449               | 15.628               | -30.551     | 56.000       | 9.822       | QP   |
| 2  |      |      | 0.546           | 20.142               | 10.320               | -25.858     | 46.000       | 9.822       | AV   |
| 3  |      |      | 1.502           | 26.491               | 16.590               | -29.509     | 56.000       | 9.901       | QP   |
| 4  |      |      | 1.502           | 21.339               | 11.439               | -24.661     | 46.000       | 9.901       | AV   |
| 5  |      |      | 1.842           | 27.263               | 17.343               | -28.737     | 56.000       | 9.920       | QP   |
| 6  |      |      | 1.842           | 22.538               | 12.618               | -23.462     | 46.000       | 9.920       | AV   |
| 7  |      |      | 2.146           | 29.395               | 19.457               | -26.605     | 56.000       | 9.939       | QP   |
| 8  |      |      | 2.146           | 24.502               | 14.563               | -21.498     | 46.000       | 9.939       | AV   |
| 9  |      |      | 2.454           | 31.108               | 21.144               | -24.892     | 56.000       | 9.965       | QP   |
| 10 |      | *    | 2.454           | 26.708               | 16.743               | -19.292     | 46.000       | 9.965       | AV   |
| 11 |      |      | 2.762           | 30.973               | 20.998               | -25.027     | 56.000       | 9.975       | QP   |
| 12 |      |      | 2.762           | 26.622               | 16.648               | -19.378     | 46.000       | 9.975       | AV   |

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

## **Appendix B – Test Setup Photograph**

Refer to “2112RSU060-UT” file.

## **Appendix C – EUT Photograph**

Refer to “2112RSU060-UE” file.

————— The End —————