



FCC Part 15C Test Report

FCC ID: 2AYIT-RING

Applicant: Topvision(Shenzhen)Technology Co., LTD

Address: Room 601.No.213.Niucheng Road.Niucheng Village. Xili Street.Nanshan district
Shenzhen City

Manufacturer: Topvision(Shenzhen)Technology Co., LTD

Address: Room 601.No.213.Niucheng Road.Niucheng Village. Xili Street.Nanshan district
Shenzhen City

EUT: RING-01 Doorbell

Trade Mark: N/A

Model Number: T32
T31, T33, T34, T35, T10, T20, T30

Date of Receipt: Mar. 28, 2022

Test Date: Mar. 28, 2022 – Apr. 01, 2022

Date of Report: Apr. 01, 2022

Prepared By: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Building C, Shuanghuan, No.8, Baoqing Road, Baolong Industrial Zone, Baolong
Street, Longgang District, Shenzhen, Guangdong, China

Applicable Standards: FCC PART 15 C 15.407
ANSI C63.10:2013

Test Result: Pass

Report Number: DL-20220401017E

Prepared (Test Engineer): Pxing Huang

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.



Table of Contents	Page
1 . SUMMARY OF TEST RESULTS	5
1.1 MEASUREMENT UNCERTAINTY	5
2 . GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST MODES	7
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	8
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	8
2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING	8
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	9
3 . EMC EMISSION TEST	10
3.1 CONDUCTED EMISSION MEASUREMENT	10
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	10
3.1.2 TEST PROCEDURE	10
3.1.3 DEVIATION FROM TEST STANDARD	10
3.1.4 TEST SETUP	11
3.1.5 EUT OPERATING CONDITIONS	11
3.1.6 TEST RESULTS	11
3.2 RADIATED EMISSION MEASUREMENT	14
3.2.1 RADIATED EMISSION LIMITS	14
3.2.2 TEST PROCEDURE	15
3.2.3 DEVIATION FROM TEST STANDARD	15
3.2.4 TEST SETUP	15
3.2.5 EUT OPERATING CONDITIONS	16
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	17
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	18
3.2.8 TEST RESULTS (1GHZ~40GHZ)	20
3.3 RADIATED BAND EMISSION MEASUREMENT	26
3.3.1 TEST REQUIREMENT:	26
3.3.2 TEST PROCEDURE	26
3.3.3 DEVIATION FROM TEST STANDARD	26
3.3.4 TEST SETUP	26
3.3.5 EUT OPERATING CONDITIONS	26
4 . AVERAGE OUTPUT POWER	30
4.1 APPLIED PROCEDURES / LIMIT	30
4.1.1 TEST PROCEDURE	30
4.1.2 DEVIATION FROM STANDARD	30
4.1.3 TEST SETUP	30



Table of Contents	Page
4.1.4 EUT OPERATION CONDITIONS	30
4.1.5 TEST RESULTS	31
5 . POWER SPECTRAL DENSITY TEST	35
5.1 APPLIED PROCEDURES / LIMIT	35
5.1.1 TEST PROCEDURE	35
5.1.2 DEVIATION FROM STANDARD	35
5.1.3 TEST SETUP	35
5.1.4 EUT OPERATION CONDITIONS	35
5.1.5 TEST RESULTS	36
6 . 6DB&26DB&99% BANDWIDTH TEST	40
6.1 APPLIED PROCEDURES / LIMIT	40
6.1.1 TEST PROCEDURE	40
6.1.2 DEVIATION FROM STANDARD	40
6.1.3 TEST SETUP	40
6.1.4 EUT OPERATION CONDITIONS	40
6.1.5 TEST RESULTS	40
7 . DUTY CYCLE TEST SIGNAL	48
7.1 APPLIED PROCEDURES / LIMIT	48
7.1.1 TEST PROCEDURE	48
7.1.2 DEVIATION FROM STANDARD	48
7.1.3 TEST SETUP	48
7.1.4 EUT OPERATION CONDITIONS	48
7.1.5 TEST RESULTS	49
8 . FREQUENCY STABILITY	51
8.1 APPLIED PROCEDURES / LIMIT	51
8.1.1 TEST PROCEDURE	51
8.1.2 DEVIATION FROM STANDARD	51
8.1.3 TEST SETUP	51
8.1.4 EUT OPERATION CONDITIONS	51
8.1.5 TEST RESULTS	52
9 . TRANSMISSION IN THE ABSENCE OF DATA	54
9.1 STANDARD REQUIREMENT	54
9.2 TEST RESULT	54
10 . ANTENNA REQUIREMENT	54
10.1 STANDARD REQUIREMENT	54
10.2 EUT ANTENNA	54
11 . TEST SEUUP PHOTO	55



Table of Contents

Page

12 . EUT PHOTO

57



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.407) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.407(b), 15.209	Radiated Spurious Emission	PASS	
15.407 (b)	Band Edge Emission	PASS	
15.407 (a)	Average Output Power	PASS	
15.407 (a)	Power Spectral Density	PASS	
15.403(i) 15.407(e)	6dB bandwidth and 99%dB Bandwidth	PASS	
15.407(g)	Frequency Stability	PASS	
15.407(c)	Transmission in case of Absence of Information	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

1.1 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$ providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.56\text{dB}$
2	RF power,conducted	$\pm 0.42\text{dB}$
3	Spurious emissions,conducted	$\pm 2.76\text{dB}$
4	All emissions,radiated(<1G)	$\pm 3.65\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5\text{C}$
7	Humidity	$\pm 2\%$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product Name:	RING-01 Doorbell
Trademark	N/A
Model No.:	T32 T31, T33, T34, T35, T10, T20, T30
Model Difference	All samples are the same except the model name, so we prepare "T32" for test only.
Operation Frequency:	5745-5825MHz(802.11a/n/ac(HT20)) 5755-5795MHz(802.11n/ac(HT40)) 5775MHz (802.11ac(HT80))
Channel numbers:	See channel list
Channel separation:	20MHz/40MHz/80MHz
Modulation technology:	64QAM, 16QAM, QPSK, BPSK for OFDM
Rate of Transmitter	802.11a: 6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps,54Mbps 802.11n: Up to 500Mbps
Antenna Type:	Internal antenna
Antenna gain:	3dBi
Power supply:	DC 7.4V from battery DC 5V from charger

Note:

- 1.For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- 2.The EUT's all information provided by client.



2. Channel List

Channel List for 802.11a/n(HT20)/ac(HT20)			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	161	5805
153	5765	165	5825
157	5785		

Channel List for 802.11n(HT40)/ac(HT40)			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	159	5795

Channel List for 802.11ac(HT80)			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
155	5775	/	/

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Description		
Pretest Mode	Channel	Band 4
Mode 1	802.11a/n/acHT20	CH149, CH157, CH165
Mode 2	802.11n/acHT40	CH151, CH159
Mode 3	802.11acHT80	CH155
Mode 4	Other	Link Mode


For Radiated Emission		
Pretest Mode	Channel	Band 4
Mode 1	802.11a/n/acHT20	CH149, CH157, CH165
Mode 2	802.11n/acHT40	CH151, CH159
Mode 3	802.11acHT80	CH155
Mode 4	Other	Link Mode

Note: 1. The measurements are performed at the highest, middle, lowest available channels.
2. During the test, the duty cycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.




2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test



Conducted Spurious Emission Test

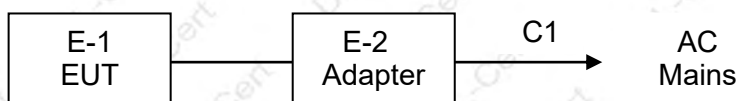

2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
E-1	RING-01 Doorbell	T30	N/A	EUT
E-2	Adapter	HW-0502000E	N/A	

Item	Shielded Type	Ferrite Core	Length	Note
C1	No	No	0.5m	Mini USB Line

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the end product.

Max output power Setting				
Test software Version	Test program: AXDN-0002.0			
Mode	802.11a	802.11n HT20	802.11n HT40	802.11ac HT20/HT40/HT80
Data Rate	6Mbps	MSC0	MSC0	MSC0
Power Setting of Software	60	60	66	66

**2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS**

Radiation test, Band-edge test and 6db bandwidth test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4408B	MY50140780	Nov. 06, 2021	Nov. 05, 2022
2	Test Receiver (9kHz-7GHz)	R&S	ESRP7	101393	Nov. 06, 2021	Nov. 05, 2022
3	Bilog Antenna (30MHz-1GHz)	R&S	VULB9162	00306	Nov. 06, 2021	Nov. 05, 2022
4	Horn Antenna (1GHz-18GHz)	Schwarzbeck	BBHA9120D	02139	Nov. 06, 2021	Nov. 05, 2022
5	Horn Antenna (18GHz-40GHz)	A.H. Systems	SAS-574	588	Nov. 06, 2021	Nov. 05, 2022
6	Amplifier (9KHz-6GHz)	Schwarzbeck	BBV9743B	00153	Nov. 06, 2021	Nov. 05, 2022
7	Amplifier (1GHz-18GHz)	EMEC	EM01G8GA	00270	Nov. 06, 2021	Nov. 05, 2022
8	Amplifier (18GHz-40GHz)	Quanjuda	DLE-161	97	Nov. 06, 2021	Nov. 05, 2022
9	Loop Antenna (9KHz-30MHz)	Schwarzbeck	FMZB1519B	00014	Nov. 06, 2021	Nov. 05, 2022
10	RF cables1 (9kHz-1GHz)	ChengYu	966	004	Nov. 06, 2021	Nov. 05, 2022
11	RF cables2 (1GHz-40GHz)	ChengYu	966	003	Nov. 06, 2021	Nov. 05, 2022
12	Antenna connector	Florida RF Labs	N/A	RF 01#	Nov. 06, 2021	Nov. 05, 2022
13	Power probe	KEYSIGHT	U2021XA	MY55210018	Nov. 06, 2021	Nov. 05, 2022
14	Signal Analyzer 9kHz-26.5GHz	Agilent	N9020A	MY55370280	Nov. 06, 2021	Nov. 05, 2022
15	Test Receiver 20kHz-40GHz	R&S	ESU 40	100376	Nov. 06, 2021	Nov. 05, 2022
16	D.C. Power Supply	LongWei	PS-305D	010964729	Nov. 06, 2021	Nov. 05, 2022

Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	843 Shielded Room	ChengYu	843 Room	843	Nov. 25, 2019	Nov. 24, 2022
2	EMI Receiver	R&S	ESR	101421	Nov. 06, 2021	Nov. 05, 2022
3	LISN	R&S	ENV216	102417	Nov. 06, 2021	Nov. 05, 2022
4	843 Cable 1#	ChengYu	CE Cable	001	Nov. 06, 2021	Nov. 05, 2022

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ_EMCC	EMC-CON 3A1.1
2	EMC radiation test system	FALA	EZ_EMCC	FA-03A2
3	RF test system	MAIWEI	MTS8310	2.0.0.0
4	RF communication test system	MAIWEI	MTS8200	2.0.0.0



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.5 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

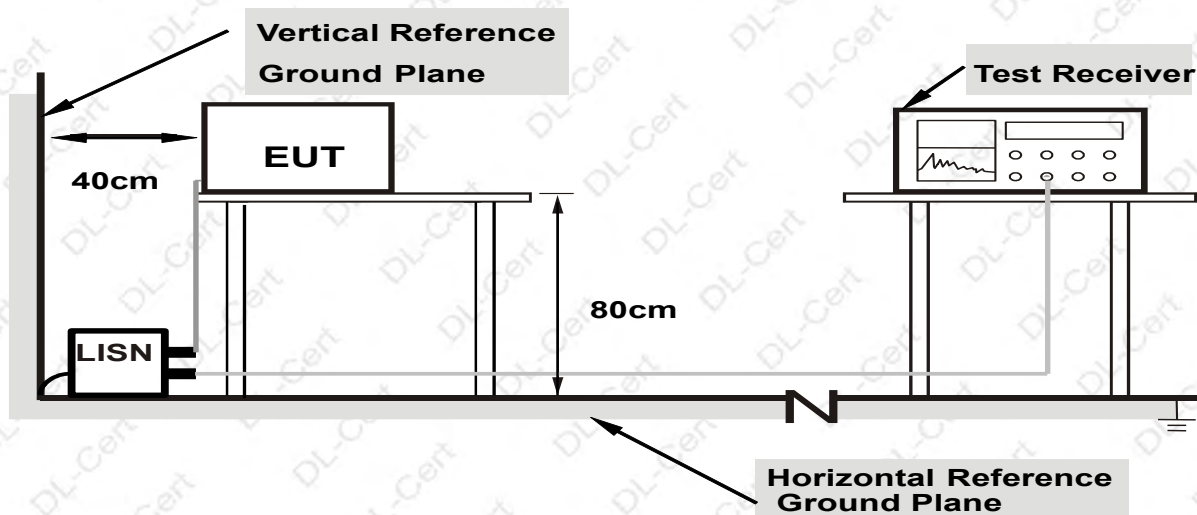

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 230V, the worst voltage was AC 120V and the data recording in the report.

3.1.6 TEST RESULTS



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 4

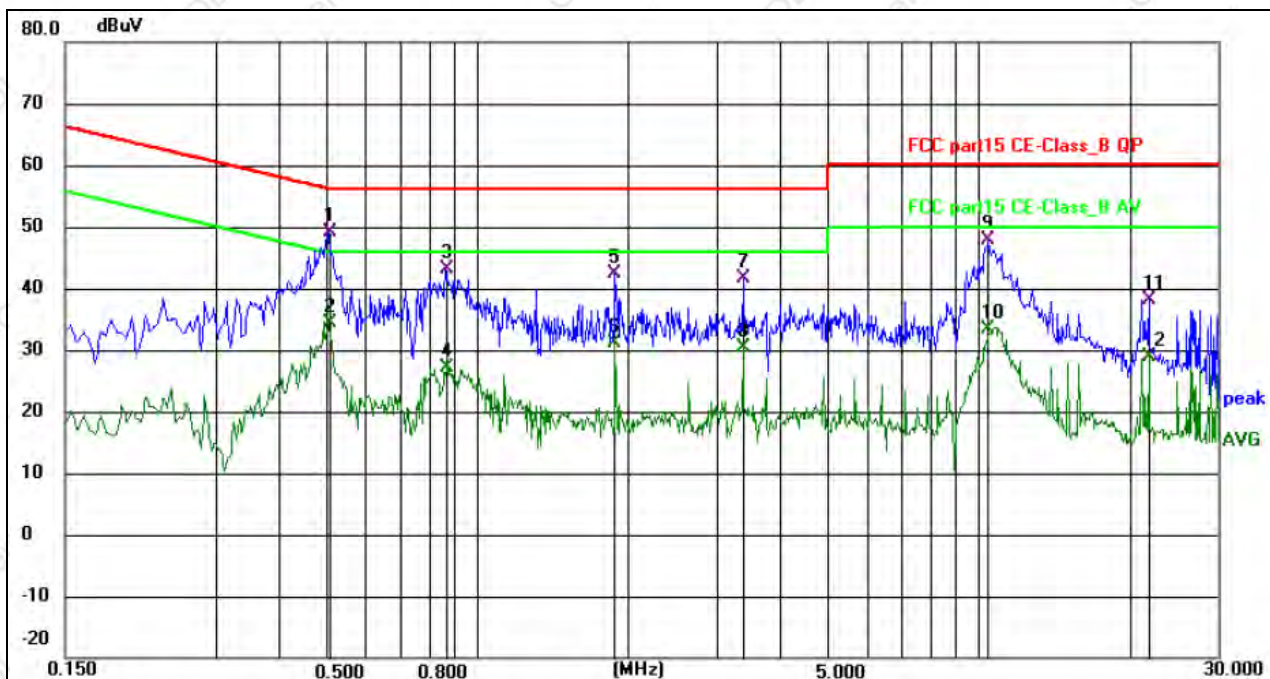


Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1 *	0.5053	39.87	9.19	49.06	56.00	6.94	QP	P	
2	0.5053	25.10	9.19	34.29	46.00	11.71	AVG	P	
3	0.8652	33.71	9.32	43.03	56.00	12.97	QP	P	
4	0.8652	17.79	9.32	27.11	46.00	18.89	AVG	P	
5	1.8869	32.67	9.80	42.47	56.00	13.53	QP	P	
6	1.8869	21.42	9.80	31.22	46.00	14.78	AVG	P	
7	3.3944	32.76	8.98	41.74	56.00	14.26	QP	P	
8	3.3944	21.32	8.98	30.30	46.00	15.70	AVG	P	
9	10.4954	38.06	9.90	47.96	60.00	12.04	QP	P	
10	10.4954	23.51	9.90	33.41	50.00	16.59	AVG	P	
11	21.9252	27.49	10.76	38.25	60.00	21.75	QP	P	
12	21.9252	18.04	10.76	28.80	50.00	21.20	AVG	P	



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 4

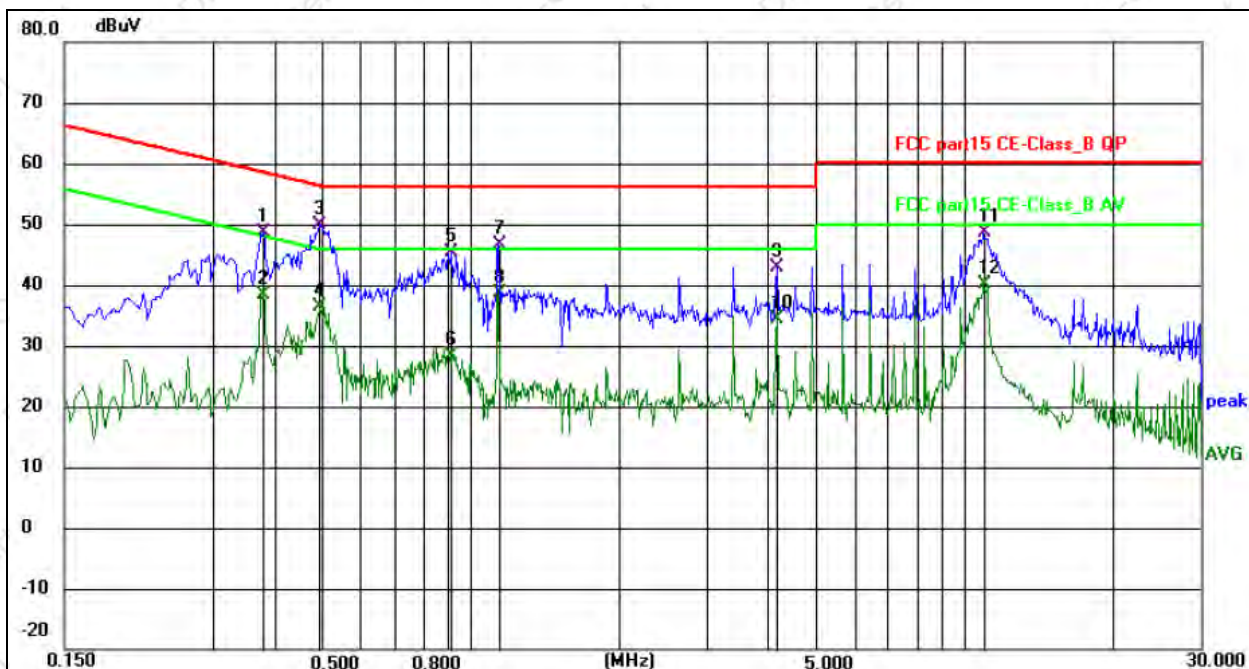

Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.3795	39.54	9.19	48.73	58.29	9.56	QP	P	
2	0.3795	29.19	9.19	38.38	48.29	9.91	AVG	P	
3 *	0.4919	40.45	9.37	49.82	56.14	6.32	QP	P	
4	0.4919	27.00	9.37	36.37	46.14	9.77	AVG	P	
5	0.9149	35.94	9.35	45.29	56.00	10.71	QP	P	
6	0.9149	19.07	9.35	28.42	46.00	17.58	AVG	P	
7	1.1352	37.24	9.47	46.71	56.00	9.29	QP	P	
8	1.1352	29.17	9.47	38.64	46.00	7.36	AVG	P	
9	4.1595	33.04	9.80	42.84	56.00	13.16	QP	P	
10	4.1595	24.47	9.80	34.27	46.00	11.73	AVG	P	
11	10.9452	38.47	10.11	48.58	60.00	11.42	QP	P	
12	10.9452	29.95	10.11	40.06	50.00	9.94	AVG	P	



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

For transmitters operating in the 5.725-5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	25GHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).
- Test the EUT in the lowest channel, the middle channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

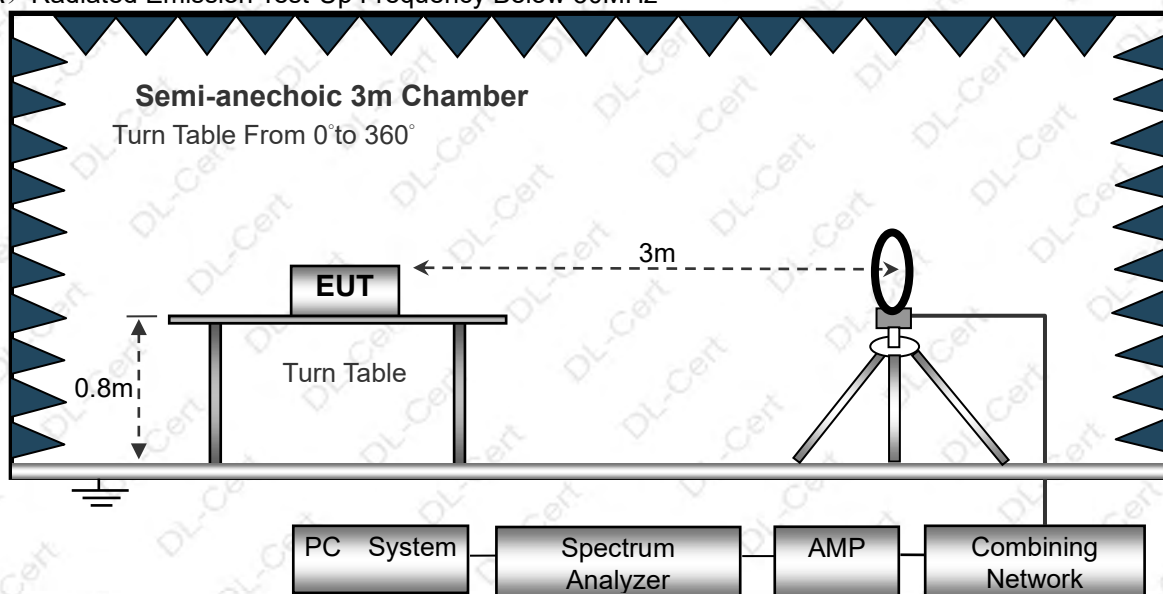

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

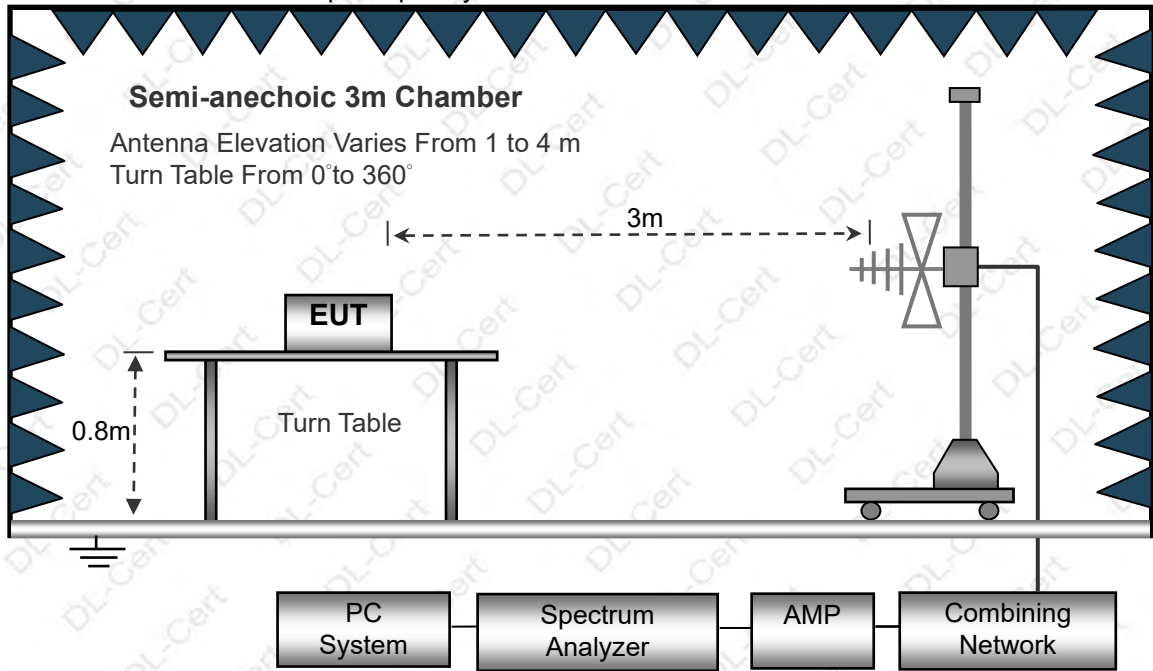

(C) Radiated Emission Test-Up Frequency Above 1GHz

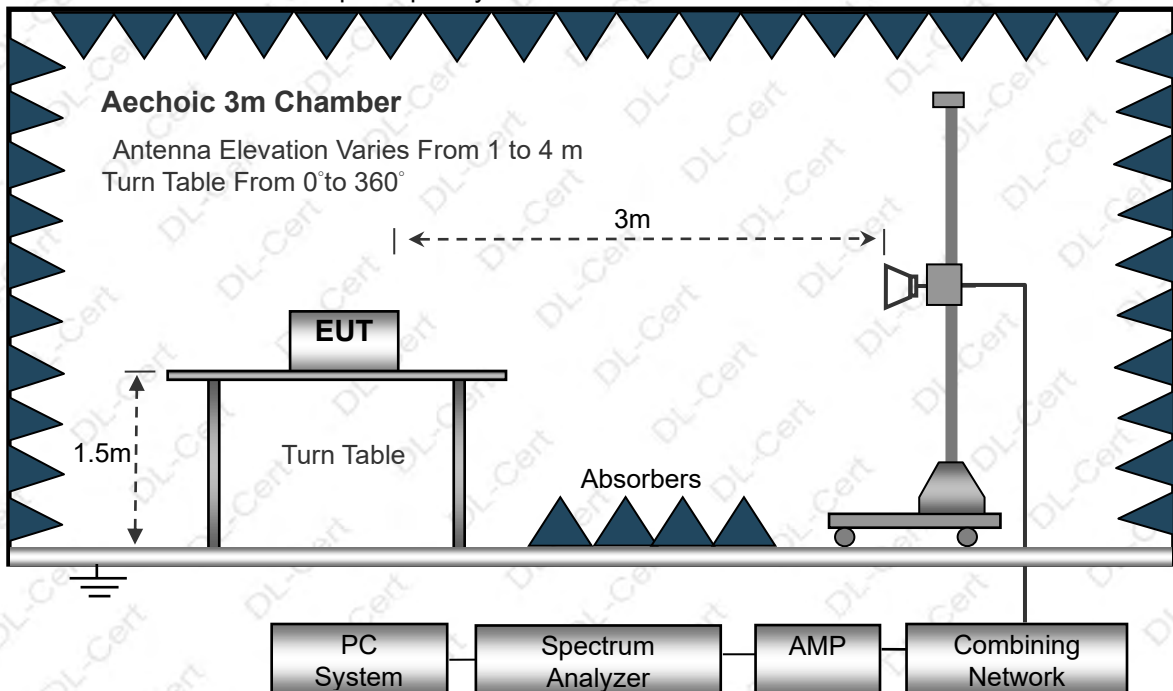

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.2.6 TEST RESULTS (Between 9KHz – 30 MHz)**

Temperature:	20°C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Mode 4	Polarization :	--

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log(\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.



3.2.7 TEST RESULTS (Between 30MHz – 1GHz)

Temperature:	26°C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	AC 120V/60Hz		
Test Mode :	Mode 4		



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Margin dB	Detector
1		48.5015	34.56	-11.59	22.97	40.00	-17.03	QP
2		86.5027	34.43	-15.89	18.54	40.00	-21.46	QP
3		141.8262	35.73	-16.14	19.59	43.50	-23.91	QP
4		266.6089	37.17	-11.40	25.77	46.00	-20.23	QP
5		336.0350	39.43	-10.20	29.23	46.00	-16.77	QP
6	*	627.2736	36.86	-5.19	31.67	46.00	-14.33	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;



Temperature:	26°C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
test voltage :	AC 120V/60Hz		
Test Mode :	Mode 4		

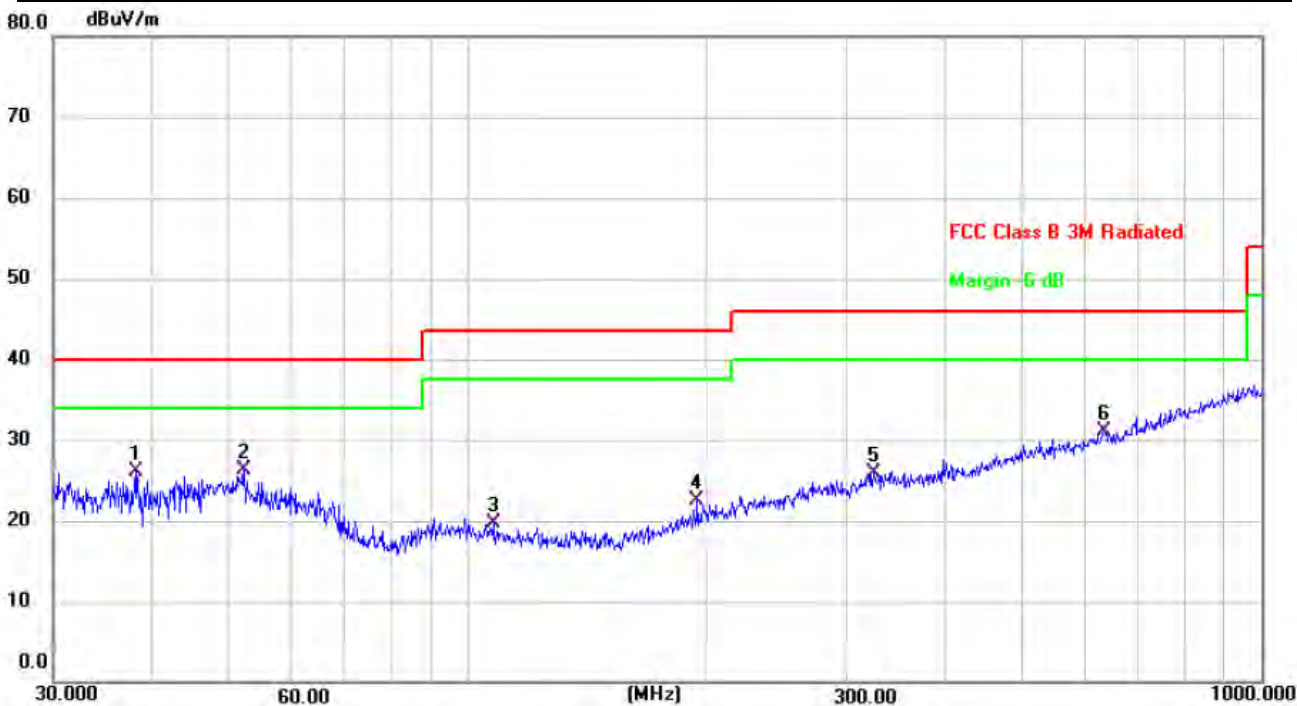

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Margin dB	Detector
1		38.0782	39.04	-13.03	26.01	40.00	-13.99	QP
2	*	52.2077	37.64	-11.29	26.35	40.00	-13.65	QP
3		107.5100	35.13	-15.39	19.74	43.50	-23.76	QP
4		194.4533	35.82	-13.41	22.41	43.50	-21.09	QP
5		324.4560	35.22	-9.28	25.94	46.00	-20.06	QP
6		633.9071	35.09	-3.99	31.10	46.00	-14.90	QP

Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;

**3.2.8 TEST RESULTS (1ghz~40ghZ)**

802.11a band 4

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5745									
V	11490	53.57	49.05	15.3	37.39	57.21	68.2	-10.99	PK
V	11490	41.33	49.05	15.3	37.39	44.97	68.2	-23.23	AV
V	17235	51.04	49.16	15.27	40.45	57.6	68.2	-10.60	PK
V	17235	43.66	49.16	15.27	40.45	50.22	68.2	-17.98	AV
H	11490	50.61	49.05	15.3	37.39	54.25	68.2	-13.95	PK
H	11490	45.28	49.05	15.3	37.39	48.92	68.2	-19.28	AV
H	17235	50.95	49.16	15.27	40.45	57.51	68.2	-10.69	PK
H	17235	43.53	49.16	15.27	40.45	50.09	68.2	-18.11	AV
operation frequency:5785									
V	11570	51.14	49.09	15.34	37.42	54.81	68.2	-13.39	PK
V	11570	45.23	49.09	15.34	37.42	48.9	68.2	-19.30	AV
V	17355	50.84	49.18	15.29	40.47	57.42	68.2	-10.78	PK
V	17355	43.32	49.18	15.29	40.47	49.9	68.2	-18.30	AV
H	11570	50.48	49.09	15.34	37.42	54.15	68.2	-14.05	PK
H	11570	45.54	49.09	15.34	37.42	49.21	68.2	-18.99	AV
H	17355	48.65	49.18	15.29	40.47	55.23	68.2	-12.97	PK
H	17355	43.26	49.18	15.29	40.47	49.84	68.2	-18.36	AV
operation frequency:5825									
V	11650	52.51	49.11	15.37	37.46	56.23	68.2	-11.97	PK
V	11650	45.17	49.11	15.37	37.46	48.89	68.2	-19.31	AV
V	17475	49.62	49.21	15.34	40.51	56.26	68.2	-11.94	PK
V	17475	43.53	49.21	15.34	40.51	50.17	68.2	-18.03	AV
H	11650	57.21	49.11	15.37	31.31	54.78	68.2	-13.42	PK
H	11650	51.48	49.11	15.37	31.31	49.05	68.2	-19.15	AV
H	17475	49.94	49.21	15.34	40.51	56.58	68.2	-11.62	PK
H	17475	42.56	49.21	15.34	40.51	49.2	68.2	-19.00	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n HT20

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBUV)	(dB)	(dB)	(dB/m)	(dBUV/m)	(dBUV/m)	(dB)	
operation frequency:5745									
V	11490	49.17	49.05	15.3	37.39	52.81	68.2	-15.39	PK
V	11490	45.33	49.05	15.3	37.39	48.97	68.2	-19.23	AV
V	17235	48.25	49.16	15.27	40.45	54.81	68.2	-13.39	PK
V	17235	43.54	49.16	15.27	40.45	50.1	68.2	-18.10	AV
H	11490	49.31	49.05	15.3	37.39	52.95	68.2	-15.25	PK
H	11490	45.43	49.05	15.3	37.39	49.07	68.2	-19.13	AV
H	17235	48.18	49.16	15.27	40.45	54.74	68.2	-13.46	PK
H	17235	44.56	49.16	15.27	40.45	51.12	68.2	-17.08	AV
operation frequency:5785									
V	11570	52.37	49.09	15.34	37.42	56.04	68.2	-12.16	PK
V	11570	44.46	49.09	15.34	37.42	48.13	68.2	-20.07	AV
V	17355	49.23	49.18	15.29	40.47	55.81	68.2	-12.39	PK
V	17355	43.65	49.18	15.29	40.47	50.23	68.2	-17.97	AV
H	11570	49.31	49.09	15.34	37.42	52.98	68.2	-15.22	PK
H	11570	43.52	49.09	15.34	37.42	47.19	68.2	-21.01	AV
H	17355	49.35	49.18	15.29	40.47	55.93	68.2	-12.27	PK
H	17355	43.17	49.18	15.29	40.47	49.75	68.2	-18.45	AV
operation frequency:5825									
V	11650	51.36	49.11	15.37	37.46	55.08	68.2	-13.12	PK
V	11650	44.72	49.11	15.37	37.46	48.44	68.2	-19.76	AV
V	17475	48.34	49.21	15.34	40.51	54.98	68.2	-13.22	PK
V	17475	43.58	49.21	15.34	40.51	50.22	68.2	-17.98	AV
H	11650	57.15	49.11	15.37	31.31	54.72	68.2	-13.48	PK
H	11650	44.33	49.11	15.37	31.31	41.9	68.2	-26.30	AV
H	17475	49.14	49.21	15.34	40.51	55.78	68.2	-12.42	PK
H	17475	44.55	49.21	15.34	40.51	51.19	68.2	-17.01	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n HT40

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5755									
V	11510	49.28	49.07	15.33	37.41	52.95	68.2	-15.25	PK
V	11510	45.16	49.07	15.33	37.41	48.83	68.2	-19.37	AV
V	17265	49.12	49.17	15.28	40.46	55.69	68.2	-12.51	PK
V	17265	43.57	49.17	15.28	40.46	50.14	68.2	-18.06	AV
H	11510	48.26	49.07	15.33	37.41	51.93	68.2	-16.27	PK
H	11510	45.45	49.07	15.33	37.41	49.12	68.2	-19.08	AV
H	17265	49.53	49.17	15.28	40.46	56.1	68.2	-12.10	PK
H	17265	44.54	49.17	15.28	40.46	51.11	68.2	-17.09	AV
operation frequency:5795									
V	11590	49.31	49.11	15.37	37.46	53.03	68.2	-15.17	PK
V	11590	44.55	49.11	15.37	37.46	48.27	68.2	-19.93	AV
V	17385	48.34	49.21	15.34	40.51	54.98	68.2	-13.22	PK
V	17385	43.51	49.21	15.34	40.51	50.15	68.2	-18.05	AV
H	11590	57.28	49.11	15.37	31.31	54.85	68.2	-13.35	PK
H	11590	44.48	49.11	15.37	31.31	42.05	68.2	-26.15	AV
H	17385	48.17	49.21	15.34	40.51	54.81	68.2	-13.39	PK
H	17385	44.66	49.21	15.34	40.51	51.3	68.2	-16.90	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11ac HT20

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBUV)	(dB)	(dB)	(dB/m)	(dBUV/m)	(dBUV/m)	(dB)	
operation frequency:5745									
V	11490	49.34	49.05	15.3	37.39	52.98	68.2	-15.22	PK
V	11490	45.52	49.05	15.3	37.39	49.16	68.2	-19.04	AV
V	17235	48.38	49.16	15.27	40.45	54.94	68.2	-13.26	PK
V	17235	43.42	49.16	15.27	40.45	49.98	68.2	-18.22	AV
H	11490	48.35	49.05	15.3	37.39	51.99	68.2	-16.21	PK
H	11490	45.46	49.05	15.3	37.39	49.1	68.2	-19.10	AV
H	17235	48.28	49.16	15.27	40.45	54.84	68.2	-13.36	PK
H	17235	44.23	49.16	15.27	40.45	50.79	68.2	-17.41	AV
operation frequency:5785									
V	11570	48.34	49.09	15.34	37.42	52.01	68.2	-16.19	PK
V	11570	44.85	49.09	15.34	37.42	48.52	68.2	-19.68	AV
V	17355	49.42	49.18	15.29	40.47	56	68.2	-12.20	PK
V	17355	43.18	49.18	15.29	40.47	49.76	68.2	-18.44	AV
H	11570	49.61	49.09	15.34	37.42	53.28	68.2	-14.92	PK
H	11570	43.46	49.09	15.34	37.42	47.13	68.2	-21.07	AV
H	17355	49.14	49.18	15.29	40.47	55.72	68.2	-12.48	PK
H	17355	43.53	49.18	15.29	40.47	50.11	68.2	-18.09	AV
operation frequency:5825									
V	11650	49.17	49.11	15.37	37.46	52.89	68.2	-15.31	PK
V	11650	44.63	49.11	15.37	37.46	48.35	68.2	-19.85	AV
V	17475	48.58	49.21	15.34	40.51	55.22	68.2	-12.98	PK
V	17475	43.54	49.21	15.34	40.51	50.18	68.2	-18.02	AV
H	11650	57.15	49.11	15.37	31.31	54.72	68.2	-13.48	PK
H	11650	44.58	49.11	15.37	31.31	42.15	68.2	-26.05	AV
H	17475	48.26	49.21	15.34	40.51	54.9	68.2	-13.30	PK
H	17475	44.31	49.21	15.34	40.51	50.95	68.2	-17.25	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11ac HT40

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5755									
V	11510	49.44	49.07	15.33	37.41	53.11	68.2	-15.09	PK
V	11510	45.23	49.07	15.33	37.41	48.9	68.2	-19.30	AV
V	17265	48.28	49.17	15.28	40.46	54.85	68.2	-13.35	PK
V	17265	43.64	49.17	15.28	40.46	50.21	68.2	-17.99	AV
H	11510	48.32	49.07	15.33	37.41	51.99	68.2	-16.21	PK
H	11510	45.16	49.07	15.33	37.41	48.83	68.2	-19.37	AV
H	17265	48.54	49.17	15.28	40.46	55.11	68.2	-13.09	PK
H	17265	44.27	49.17	15.28	40.46	50.84	68.2	-17.36	AV
operation frequency:5795									
V	11590	49.55	49.11	15.37	37.46	53.27	68.2	-14.93	PK
V	11590	44.37	49.11	15.37	37.46	48.09	68.2	-20.11	AV
V	17385	48.15	49.21	15.34	40.51	54.79	68.2	-13.41	PK
V	17385	43.66	49.21	15.34	40.51	50.3	68.2	-17.90	AV
H	11590	57.15	49.11	15.37	31.31	54.72	68.2	-13.48	PK
H	11590	44.87	49.11	15.37	31.31	42.44	68.2	-25.76	AV
H	17385	48.65	49.21	15.34	40.51	55.29	68.2	-12.91	PK
H	17385	44.53	49.21	15.34	40.51	51.17	68.2	-17.03	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11ac HT80

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5775									
V	11550	48.14	49.07	15.33	37.41	51.81	68.2	-16.39	PK
V	11550	45.35	49.07	15.33	37.41	49.02	68.2	-19.18	AV
V	17325	49.17	49.17	15.28	40.46	55.74	68.2	-12.46	PK
V	17325	43.23	49.17	15.28	40.46	49.8	68.2	-18.40	AV
H	11550	48.44	49.07	15.33	37.41	52.11	68.2	-16.09	PK
H	11550	45.53	49.07	15.33	37.41	49.2	68.2	-19.00	AV
H	17325	48.62	49.17	15.28	40.46	55.19	68.2	-13.01	PK
H	17325	44.58	49.17	15.28	40.46	51.15	68.2	-17.05	AV

Remark:


1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



For Conducted


During the test, pre-scan the all modulation, the modulation below were found(802.11a Lowest channel, 802.11n(HT40) Lowest channel, 802.11ac(HT80)) to have the worst test results, Only the worst test results are shown in the report.

Test channel: Band 4/802.11a Lowest channel

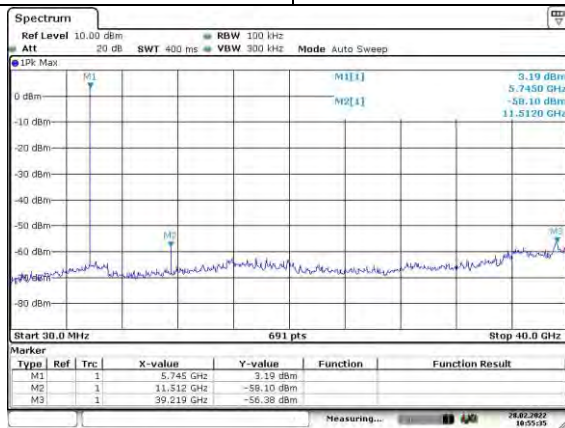


0.03Hz~40GHz

Test channel: Band 4/802.11n(HT40) Lowest channel

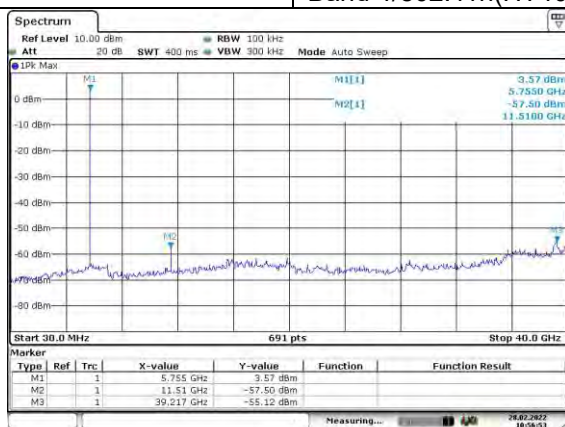

0.03GHz~40GHz

Test channel: Band 4/802.11ac(HT80)

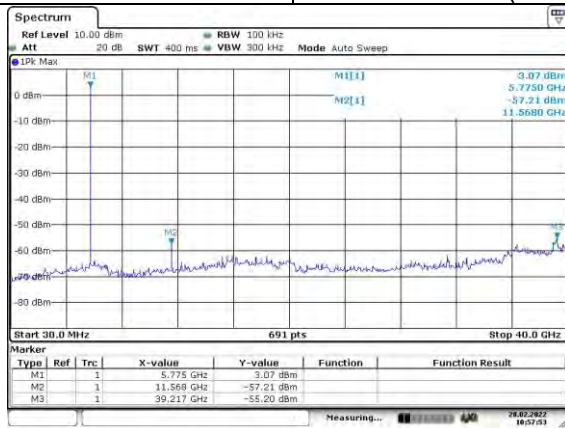

0.03GHz~40GHz

3.3 RADIATED BAND EMISSION MEASUREMENT

3.3.1 TEST REQUIREMENT:

FCC Part15 C Section 15.209 and 15.407

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	5725MHz
Stop Frequency	5850MHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

3.3.2 TEST PROCEDURE


Test method: FCC KDB 789033 G)& Parts 15.407(b)(4) & 15.209(a)

3.3.3 DEVIATION FROM TEST STANDARD

No deviation

3.3.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

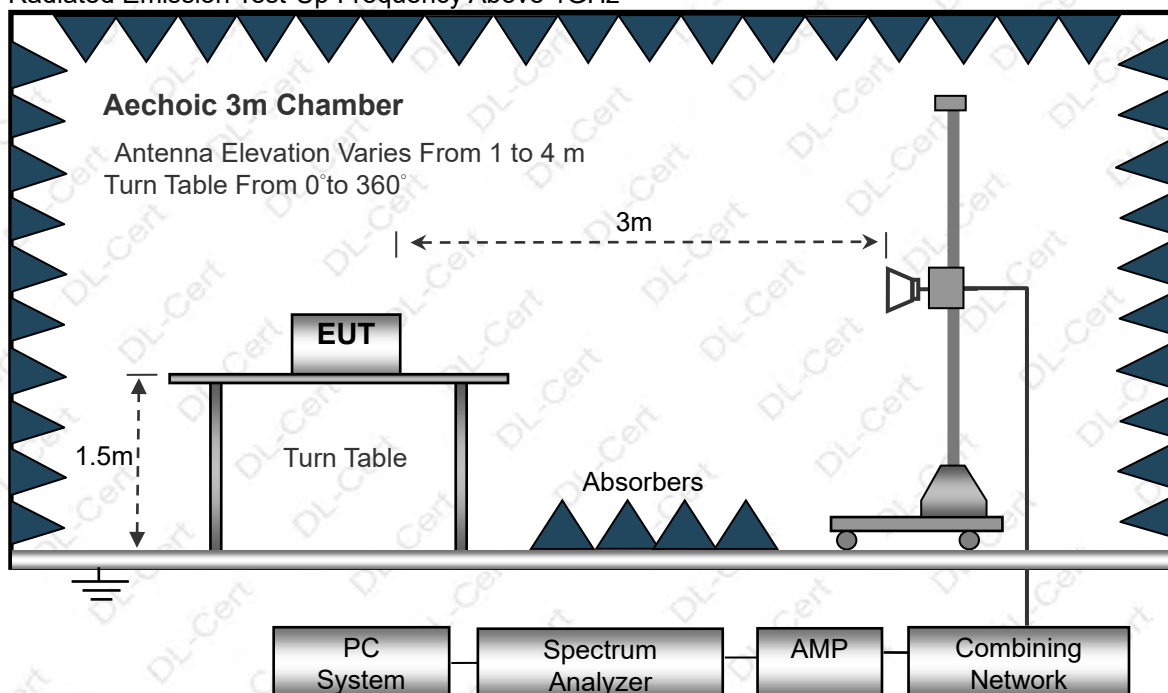

3.3.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.3.6 TEST RESULT**


Modulation	Test Frequency (MHz)	Max Level Frequency (MHz)	Max Level (dB μ V/m)	EIRP (dBm)	Limit (dBm)	Result
802.11a	5745	5639.95	56.33	-38.87	-27	Pass
	5825	5940.76	57.47	-37.73	-27	Pass
802.11n(HT20)	5745	5638.83	55.69	-39.51	-27	Pass
	5825	5941.64	56.85	-38.35	-27	Pass
802.11n(HT40)	5755	5631.89	56.39	-38.81	-27	Pass
	5795	5927.92	56.27	-38.93	-27	Pass
802.11ac(HT20)	5745	5637.92	56.56	-38.64	-27	Pass
	5825	5940.85	57.48	-37.72	-27	Pass
802.11ac(HT40)	5755	5633.49	55.96	-39.24	-27	Pass
	5795	5928.63	56.18	-39.02	-27	Pass
802.11ac(HT80)	5775	5657.92	55.57	-39.63	-27	Pass
		5854.86	54.69	-40.51	-27	Pass

Remark: 1. According to KDB 789033 D02 section H) d) (iii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows: $EIRP[dBm] = E[dB\mu V/m] - 95.2$



For Conducted

802.11a

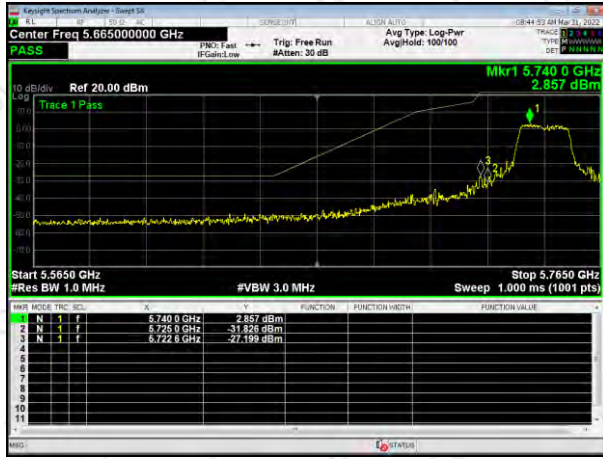


5745MHz



5825MHz

802.11n HT20

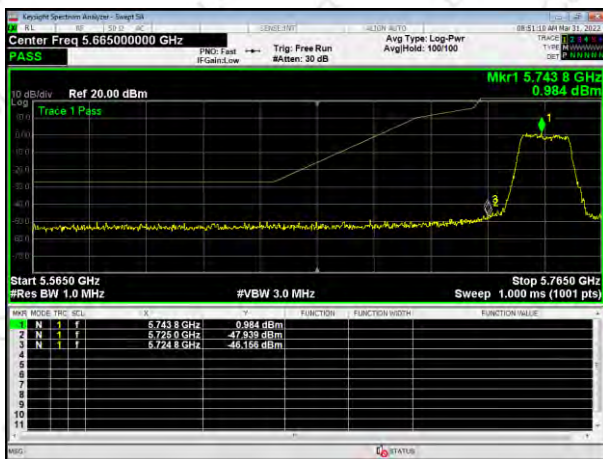

5745MHz



5825MHz

802.11n HT40




5755MHz



5795MHz



802.11ac HT20

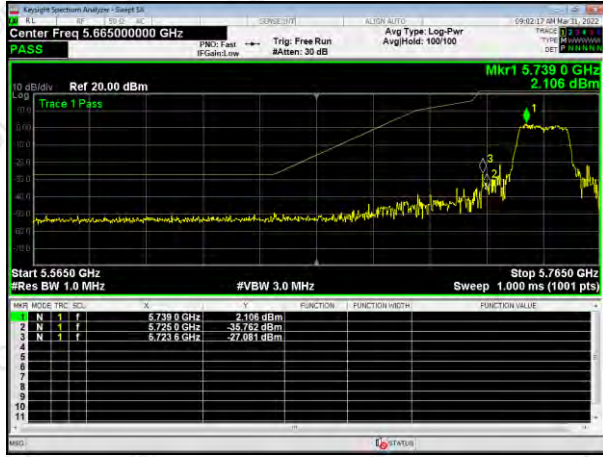

5745MHz



5825MHz

802.11ac HT40




5755MHz



5795MHz

802.11ac HT80

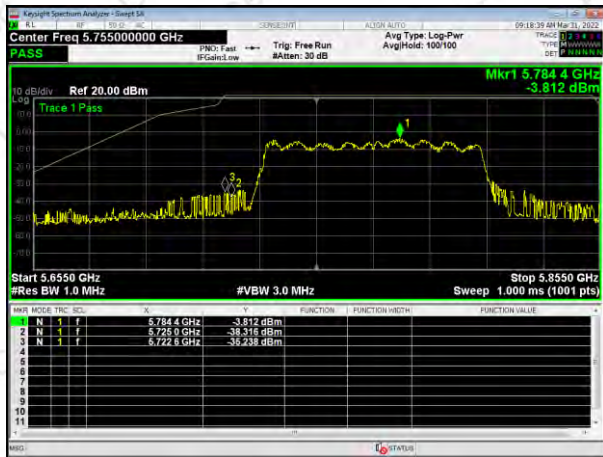

5775MHz



4. AVERAGE OUTPUT POWER

4.1 APPLIED PROCEDURES / LIMIT

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.


4.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
- b. Measure the duty cycle D of the transmitter output signal as described in 11.6.
 Set span to at least 1.5 times the OBW.
 Set RBW = 1% to 5% of the OBW, not to exceed 1 MHz.
 Set VBW ≥ [3 × RBW].
 Number of points in sweep ≥ [2 × span / RBW]. (This gives bin-to-bin spacing ≤ RBW / 2, so that narrowband signals are not lost between frequency bins.)
 Sweep time = auto.
 Detector = RMS (i.e., power averaging), if available. Otherwise, use the sample detector mode.
 Do not use sweep triggering. Allow the sweep to “free run.”
 Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the ON and OFF periods of the transmitter.
 Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
 Add [10 log (1 / D)], where D is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the ON and OFF times of the transmission). For example, add [10 log (1/0.25)] = 6 dB if the duty cycle is 25%.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP

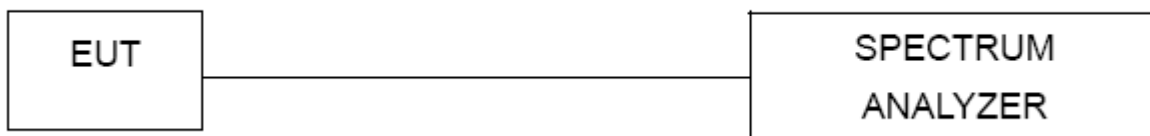

4.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


**4.1.5 TEST RESULTS**

Temperature:	25 °C	Relative Humidity:	60%
Pressure:	1012 hPa	Test Voltage :	AC 120V/60Hz

Band	Mode	Test Channel	Read Level (dBm)	Duty Fator (dB)	Total Output Power(dB)	LIMIT (dBm)
Band 4	802.11a	Low	16.608	0.13	16.738	30
		Moddle	17.12	0.13	17.25	30
		High	16.616	0.13	16.746	30
	802.11n HT20	Low	12.901	0.78	13.681	30
		Moddle	14.29	0.78	15.07	30
		High	14.366	0.78	15.146	30
	802.11n HT40	Low	14.209	0.28	14.489	30
		High	14.849	0.28	15.129	30
	802.11ac HT20	Low	15.056	0.13	15.186	30
		Moddle	16.245	0.13	16.375	30
		High	16.114	0.13	16.244	30
	802.11ac HT40	Low	14.081	0.27	14.351	30
		High	14.769	0.27	15.039	30
	802.11ac HT80	/	13.232	0.51	13.742	30



802.11a

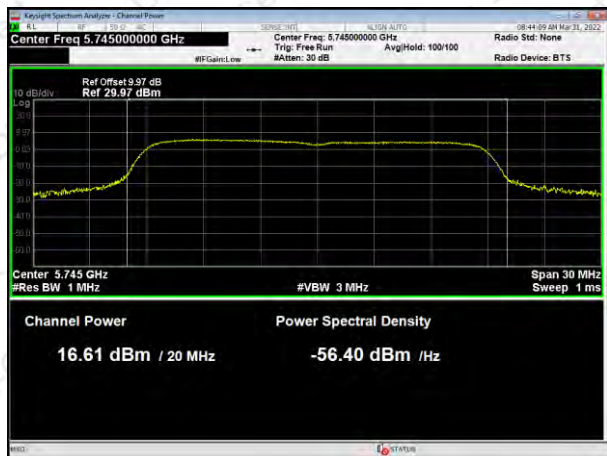

802.11n HT20



5745MHz



5745MHz



5785MHz



5785MHz




5825MHz


5825MHz




802.11n HT40

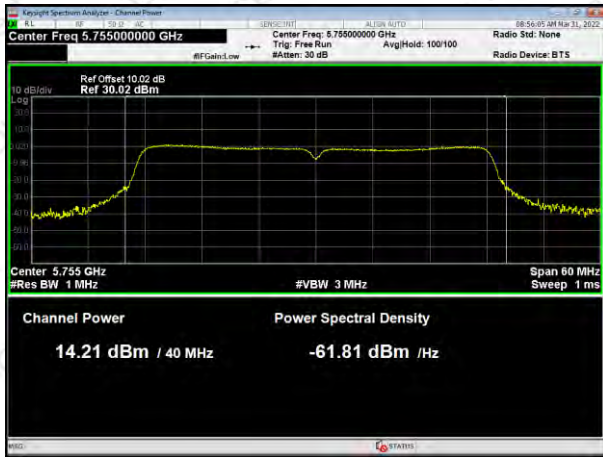

802.11ac HT20

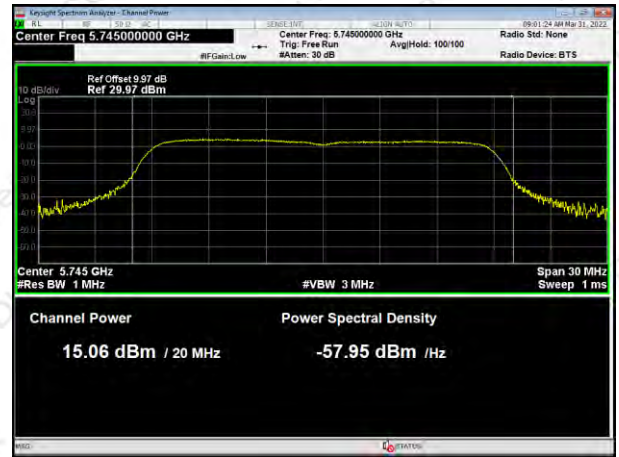

5755MHz

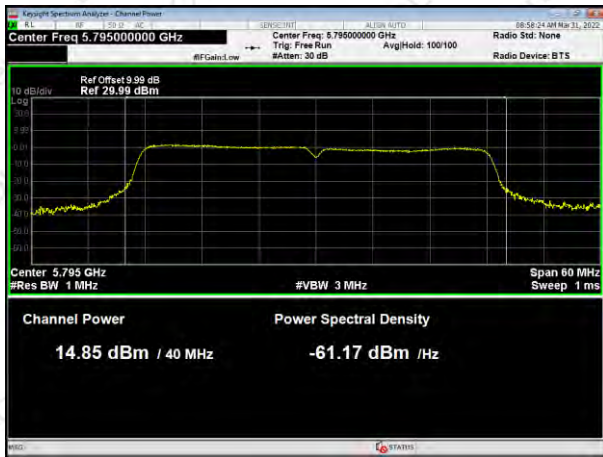

5745MHz



5795MHz




5785MHz




5825MHz



802.11ac HT40

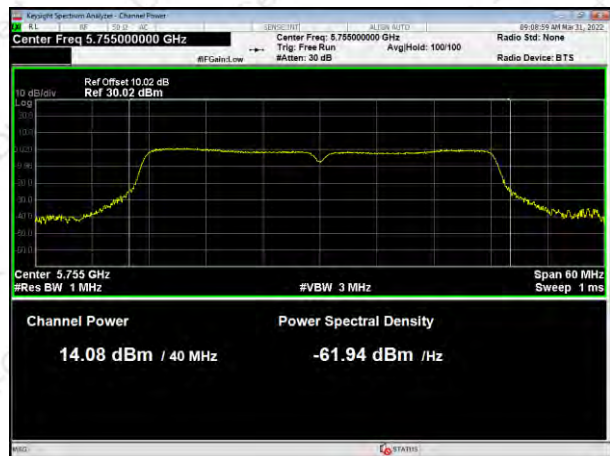

802.11ac HT80

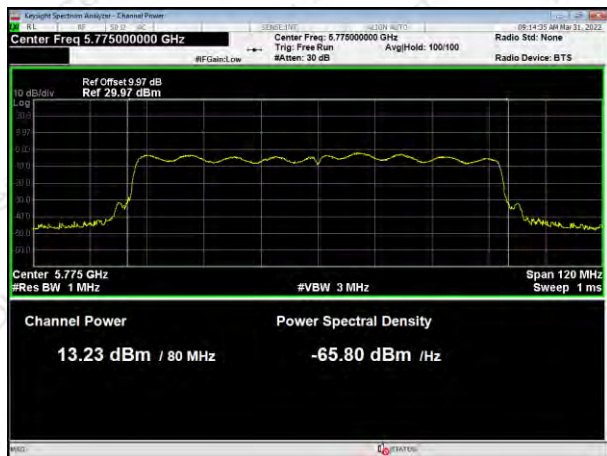

5755MHz



5775MHz



5795MHz





5. POWER SPECTRAL DENSITY TEST

5.1 APPLIED PROCEDURES / LIMIT

In addition, the maximum power spectral density shall not exceed 30 dBm in any 500 kHz band.
--

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	= the frequency band of operation
RB	RBW \geq 510KHz for band 4
VB	VBW \geq 3RBW
Detector	Average
Trace	Max Hold
Sweep Time	Auto

5.1.1 TEST PROCEDURE

- Place the EUT on the table and set it in transmitting mode.
- The testing follows FCC KDB 789033 D02.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to Spectrum.
- For U-NII1, U-NII-2A, U-NII-2C Band:
Set RBW=1MHz, VBW=3MHz, where span is enough to capture the entire bandwidth, Sweep time = Auto (601 pts), detector = sample, traces 100 sweeps of video averaging. (SA-2 with the omission of procedure x, the integration with 26dB EBW bandwidth)
For U-NII-3 Band:
Set RBW=510 kHz, VBW=3*RBW, where span is enough to capture the entire bandwidth, Sweep time = Auto (601 pts), detector = sample, traces 100 sweeps of video averaging. (SA-2 with the omission of procedure x, the integration with 26dB EBW bandwidth)
- Use the cursor on spectrum to peak search the highest level of trace
- Record the max. reading and add $10 \log(1/\text{duty cycle})$.
we test all antennas, the antenna 1 was worst mode and the data recording in the report.
- Duty factor Reference is made to the test results in Section 7.1.5.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



5.1.5 TEST RESULTS

	Mode	Test Channel	Reading Level (dBm)	Duty factor (dB)	PSD (dBm/500kHz)	Limit (dBm)	Result
Band4	802.11a	Low	2.726	0.13	2.856	30.00	PASS
		Moddle	3.269	0.13	3.399	30.00	PASS
		High	3.433	0.13	3.563	30.00	PASS
	802.11n20	Low	0.099	0.78	0.879	30.00	PASS
		Moddle	1.786	0.78	2.566	30.00	PASS
		High	1.379	0.78	2.159	30.00	PASS
	802.11n40	Low	-1.53	0.28	-1.25	30.00	PASS
		High	-0.46	0.28	-0.18	30.00	PASS
	802.11ac20	Low	1.48	0.13	1.61	30.00	PASS
		Moddle	2.762	0.13	2.892	30.00	PASS
		High	2.574	0.13	2.704	30.00	PASS
	802.11ac40	Low	-1.958	0.27	-1.688	30.00	PASS
		High	-0.804	0.27	-0.534	30.00	PASS
802.11ac80	/	-4.392	0.51	-3.882	30.00	PASS	



802.11a



802.11n HT20



5745MHz



5745MHz



5785MHz




5785MHz



5825MHz

5825MHz

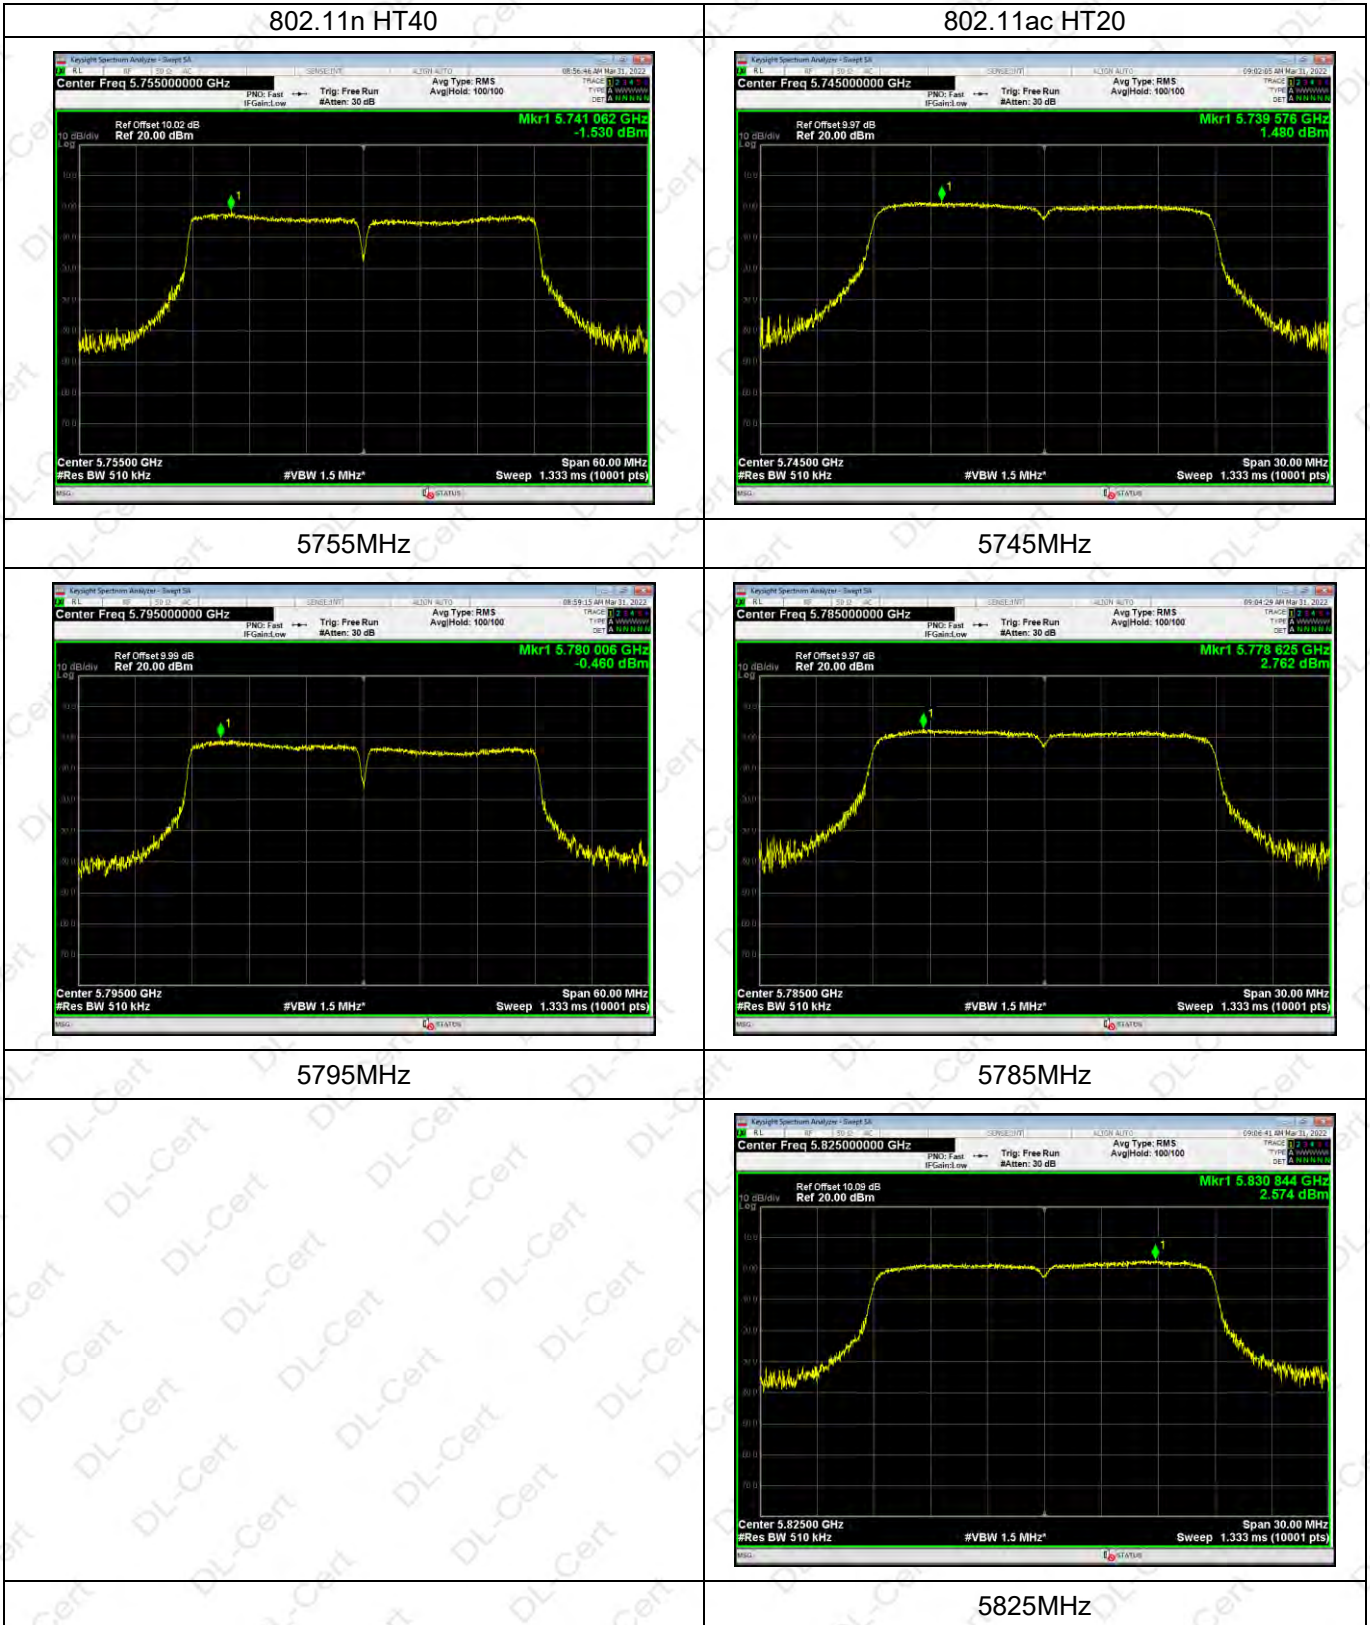



802.11ac HT40



802.11ac HT80



5755MHz



5775MHz



5795MHz



6. 6DB&99% BANDWIDTH TEST

6.1 APPLIED PROCEDURES / LIMIT

There is no limit bandwidth for U-NII-1, U-NII-2-A and U-NII-2-C.
The minimum of 6dB Bandwidth measurement is 0.5 MHz for U-NII-3

6.1.1 TEST PROCEDURE


Table with 2 columns: Spectrum Parameters, Setting. Rows include RBW (100KHz), VBW (300KHz), Span (30MHz, 60MHz, 120MHz), Sweep Time (Auto), Detector (Peak), Trace Mode (Max Hold).

Table with 2 columns: Spectrum Parameters, Setting. Rows include RBW (1% to 5% of the OBW), VBW (Approximately three times the RBW), Span (between 1.5 times and 5.0 times the OBW), Sweep Time (Auto), Detector (Peak), Trace Mode (Max Hold).

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP

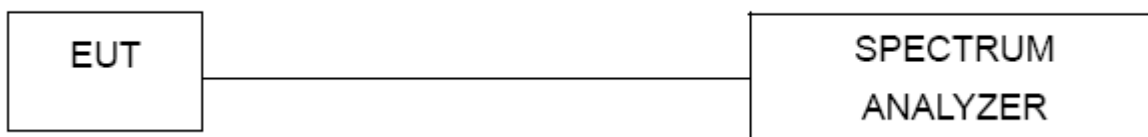

6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 TEST RESULTS



		Test Channel	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	6dB Bandwidth Limit (MHz)	Result
Band 4	802.11a	Low	16.936	17.664	>0.5	Pass
		Middle	16.692	17.634	>0.5	Pass
		High	16.115	17.667	>0.5	Pass
	802.11n HT20	Low	16.926	17.541	>0.5	Pass
		Middle	16.929	17.505	>0.5	Pass
		High	16.694	17.544	>0.5	Pass
	802.11n HT40	Low	36.078	36.571	>0.5	Pass
		High	35.473	36.448	>0.5	Pass
	802.11ac HT20	Low	17.178	17.609	>0.5	Pass
		Middle	17.27	17.594	>0.5	Pass
		High	16.648	17.622	>0.5	Pass
	802.11ac HT40	Low	36.283	36.543	>0.5	Pass
High		35.663	36.399	>0.5	Pass	
802.11ac HT80	/	75.145	75.569	>0.5	Pass	




6dB Bandwidth

802.11a




802.11n HT20

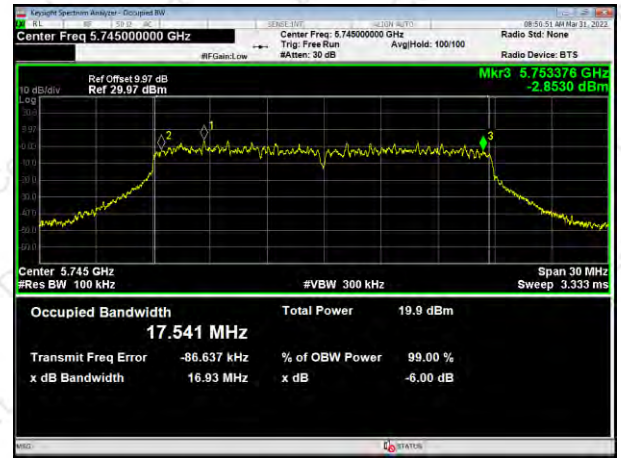

5745MHz



5745MHz

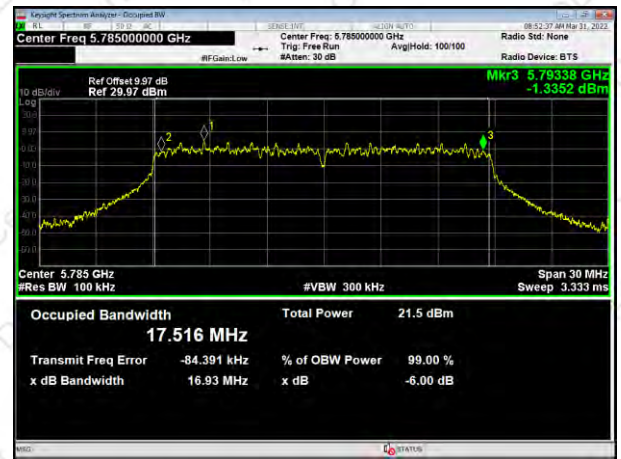

5785MHz



5785MHz



5825MHz

5825MHz



802.11n HT40



802.11ac HT20



5755MHz




5745MHz



5795MHz



5785MHz

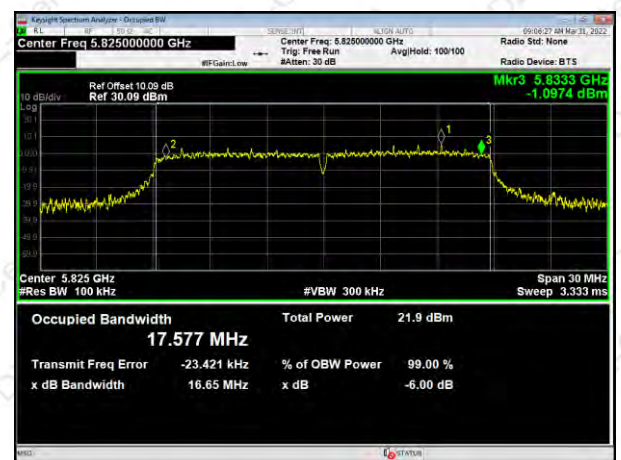

5825MHz



802.11ac HT40



802.11ac HT80



5755MHz



5775MHz

5795MHz



99% Bandwidth

802.11a



802.11n HT20



5745MHz



5745MHz



5785MHz



5785MHz



5825MHz

5825MHz



802.11n HT40



802.11ac HT20



5755MHz



5745MHz



5795MHz




5785MHz




5825MHz



802.11ac HT40

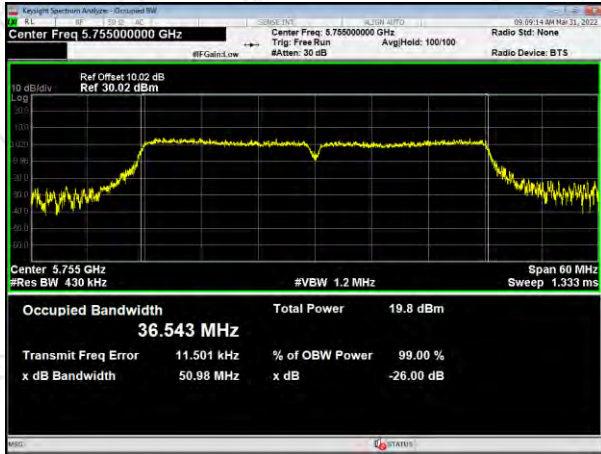

802.11ac HT80

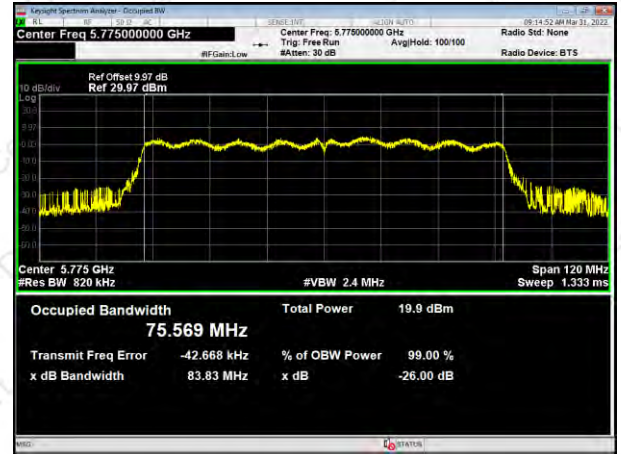

5755MHz



5775MHz



5795MHz



7. DUTY CYCLE TEST SIGNAL

7.1 APPLIED PROCEDURES / LIMIT

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle. All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.


7.1.1 TEST PROCEDURE

1. Set RBW = 1 MHz.
2. Set the video bandwidth (VBW) \geq RBW.
3. Detector = Peak.
4. Sweep = auto couple.
5. Allow the trace to stabilize.
6. Span=0

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP

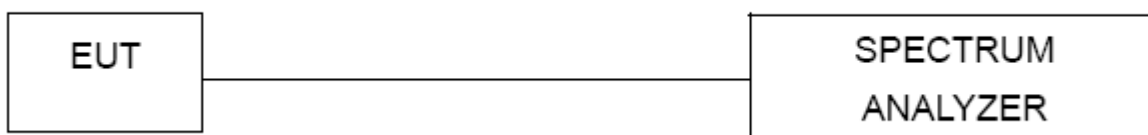


7.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

**7.1.5 TEST RESULTS**

Operation Mode		Duty Cycle(%)	Duty Fator (dB) 10 * log (1/ Duty cycle)
Band 4	802.11a	96.99	0.13
	802.11n(HT20)	83.64	0.78
	802.11n(HT40)	93.8	0.28
	802.11ac(HT20)	97	0.13
	802.11ac(HT40)	94.03	0.27
	802.11ac(HT80)	88.87	0.51

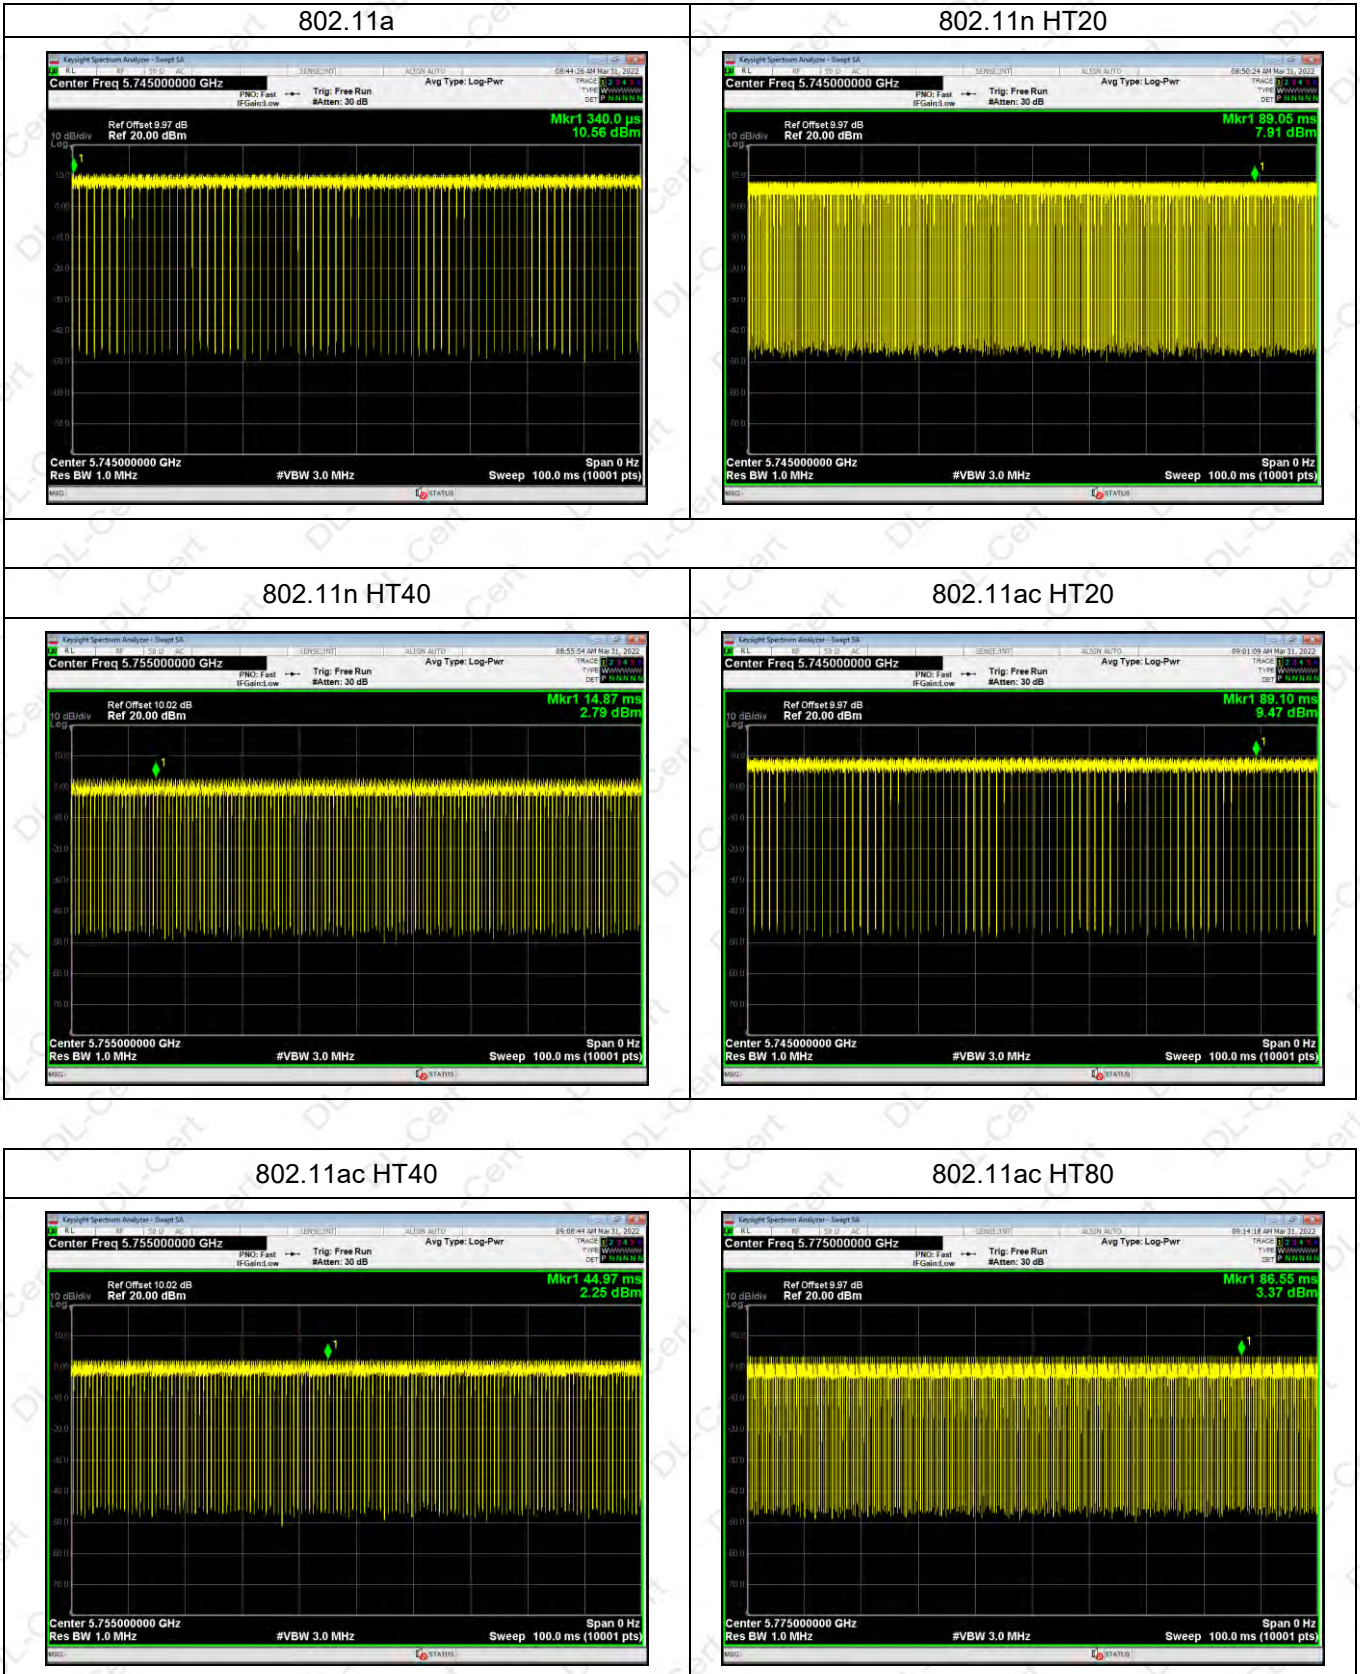



8. FREQUENCY STABILITY

8.1 APPLIED PROCEDURES / LIMIT

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.


8.1.1 TEST PROCEDURE

1. The EUT was placed inside temperature chamber and powered and powered by nominal DC voltage.
2. Set EUT as normal operation.
3. Turn the EUT on and couple its output to spectrum.
4. Turn the EUT off and set the chamber to the highest temperature specified.
5. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT and measure the operating frequency.
6. Repeat step with the temperature chamber set to the lowest temperature.

8.1.2 DEVIATION FROM STANDARD

No deviation.

8.1.3 TEST SETUP

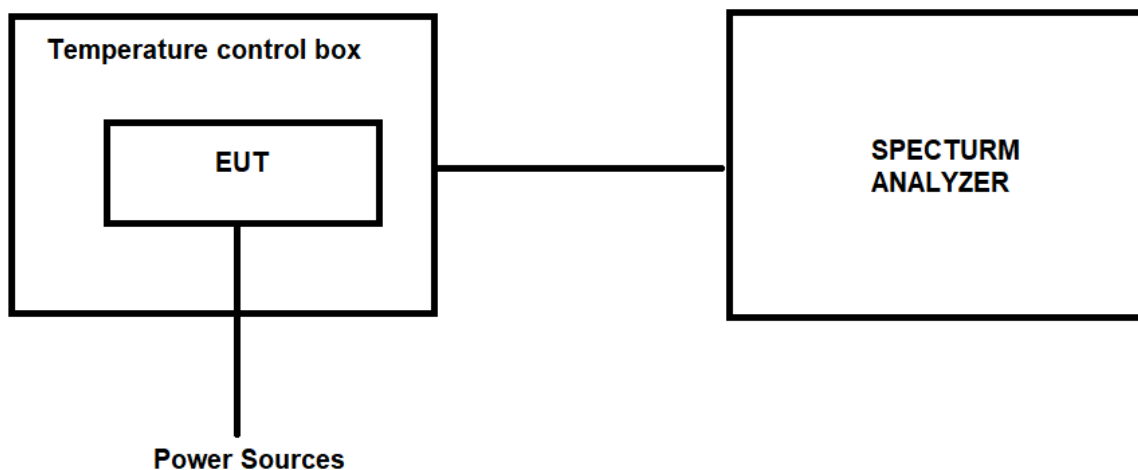

8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



8.1.5 TEST RESULTS

Test Voltage	Test Temp.	Measured Frequency (MHz)	Spectrum Frequency (MHz)			Δ Frequency (MHz)		
			802.11a	802.11n HT20	802.11ac HT20	802.11a	802.11n HT20	802.11ac HT20
132V	-20°C	5745	5745.0336	5745.0325	5745.0352	-0.0336	-0.0325	-0.0352
		5785	5785.0324	5785.0336	5785.0325	-0.0324	-0.0336	-0.0325
		5825	5825.0305	5825.0314	5825.0341	-0.0305	-0.0314	-0.0341
108V		5745	5745.0275	5745.0256	5745.0233	-0.0275	-0.0256	-0.0233
		5785	5785.0326	5785.0328	5785.0328	-0.0326	-0.0328	-0.0328
		5825	5825.0455	5825.0414	5825.0471	-0.0455	-0.0414	-0.0471
120V	25°C	5745	5745.0314	5745.0363	5745.0365	-0.0314	-0.0363	-0.0365
		5785	5785.0441	5785.0458	5785.0486	-0.0441	-0.0458	-0.0486
		5825	5825.0236	5825.0236	5825.0218	-0.0236	-0.0236	-0.0218
132V	50°C	5745	5745.0624	5745.0627	5745.0662	-0.0624	-0.0627	-0.0662
		5785	5785.0458	5785.0444	5785.0454	-0.0458	-0.0444	-0.0454
		5825	5825.0655	5825.0616	5825.0658	-0.0655	-0.0616	-0.0658
108V	50°C	5745	5745.0414	5745.0424	5745.0485	-0.0414	-0.0424	-0.0485
		5785	5785.0262	5785.0236	5785.0262	-0.0262	-0.0236	-0.0262
		5825	5825.0714	5825.0714	5825.0713	-0.0714	-0.0714	-0.0713

Test Voltage	Test Temp.	Measured Frequency (MHz)	Spectrum Frequency (MHz)		Δ Frequency (MHz)	
			802.11n HT40	802.11ac HT40	802.11n HT40	802.11ac HT40
132V	-20°C	5755	5755.0516	5755.0514	-0.0516	-0.0514
		5795	5795.0654	5795.0656	-0.0654	-0.0656
108V		5755	5755.0245	5755.0622	-0.0245	-0.0622
		5795	5795.0487	5795.0463	-0.0487	-0.0463
120V	25°C	5755	5755.0266	5755.0224	-0.0266	-0.0224
		5795	5795.0552	5795.0527	-0.0552	-0.0527
132V	50°C	5755	5755.0465	5755.0445	-0.0465	-0.0445
		5795	5795.0334	5795.0334	-0.0334	-0.0334
108V	50°C	5755	5755.0385	5755.0325	-0.0385	-0.0325
		5795	5795.0418	5795.0466	-0.0418	-0.0466



Test Voltage	Test Temp.	Measured Frequency (MHz)	Spectrum Frequency (MHz)	Δ Frequency (MHz)
			802.11ac HT80	802.11ac HT80
132V	-20°C	5775	5775.0145	-0.0145
108V		5775	5775.0356	-0.0356
120V	25°C	5775	5775.0422	-0.0422
132V	50°C	5775	5775.0263	-0.0263
108V	50°C	5775	5775.0541	-0.0541



9. TRANSMISSION IN THE ABSENCE OF DATA

9.1 STANDARD REQUIREMENT

According to §15.407(c)

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

9.2 TEST RESULT

No non-compliance noted:
Refer to the theory of operation.

10. ANTENNA REQUIREMENT

10.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.



10.2 EUT ANTENNA

The EUT antenna is internal antenna, It comply with the standard requirement.



11. TEST SEUUP PHOTO

Radiated Measurement Photos

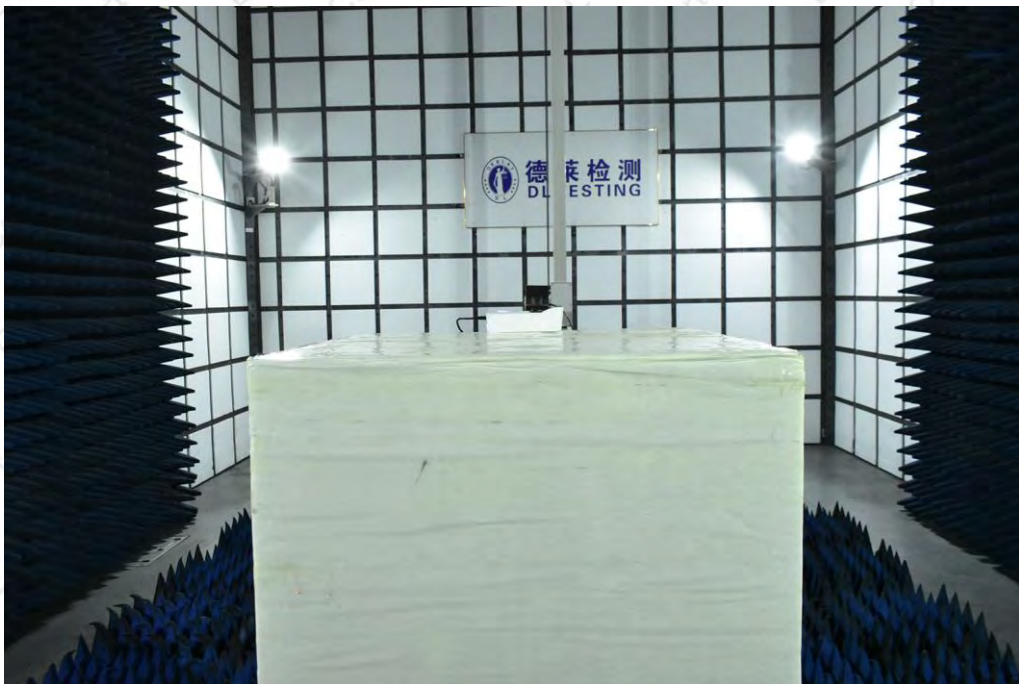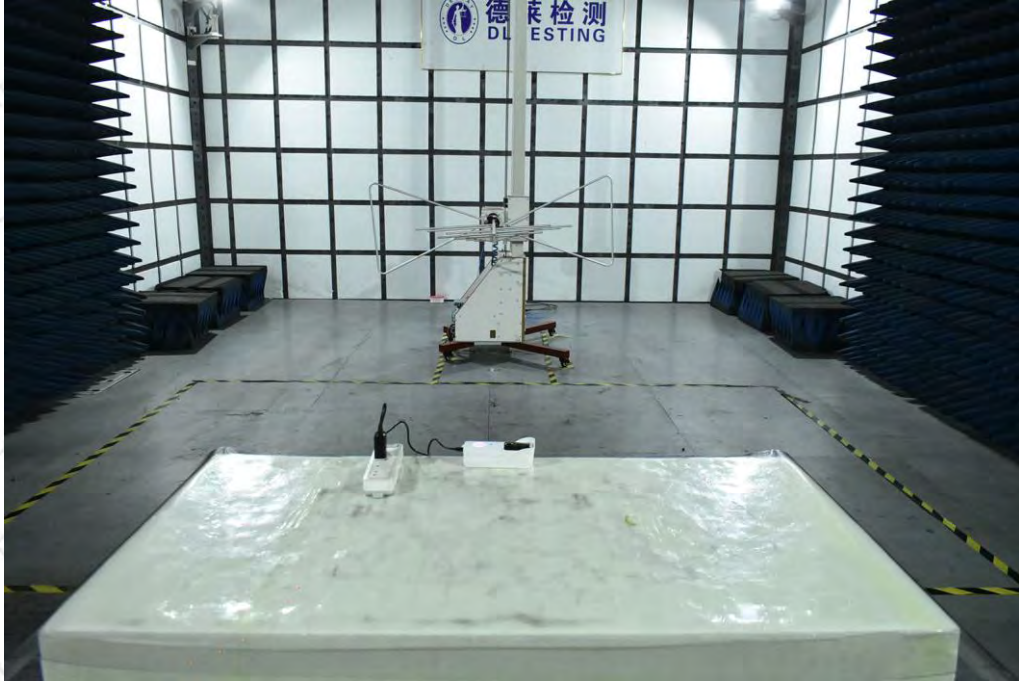



Conducted Measurement Photos








12. EUT PHOTO







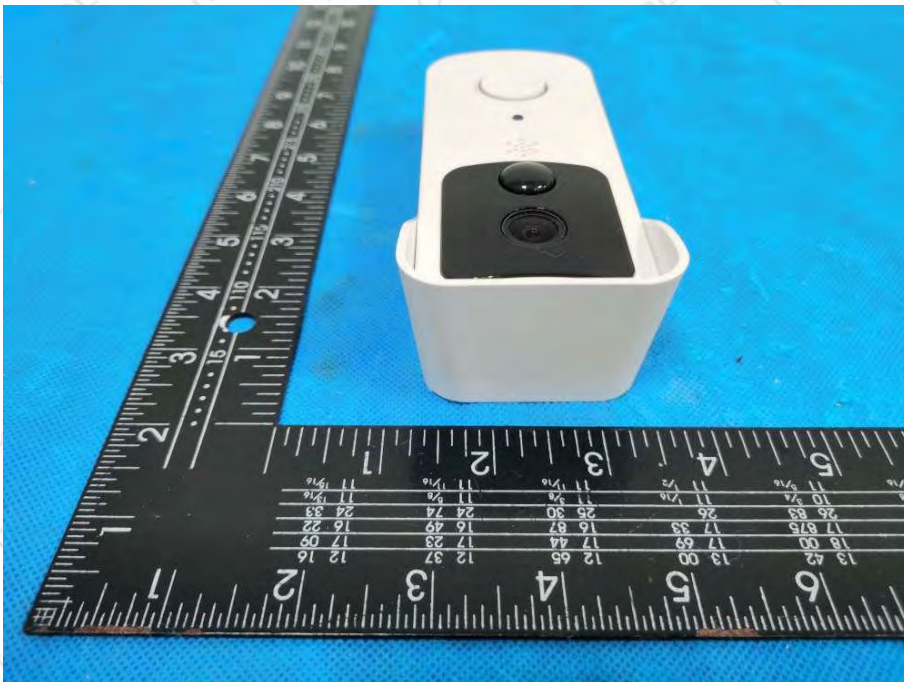



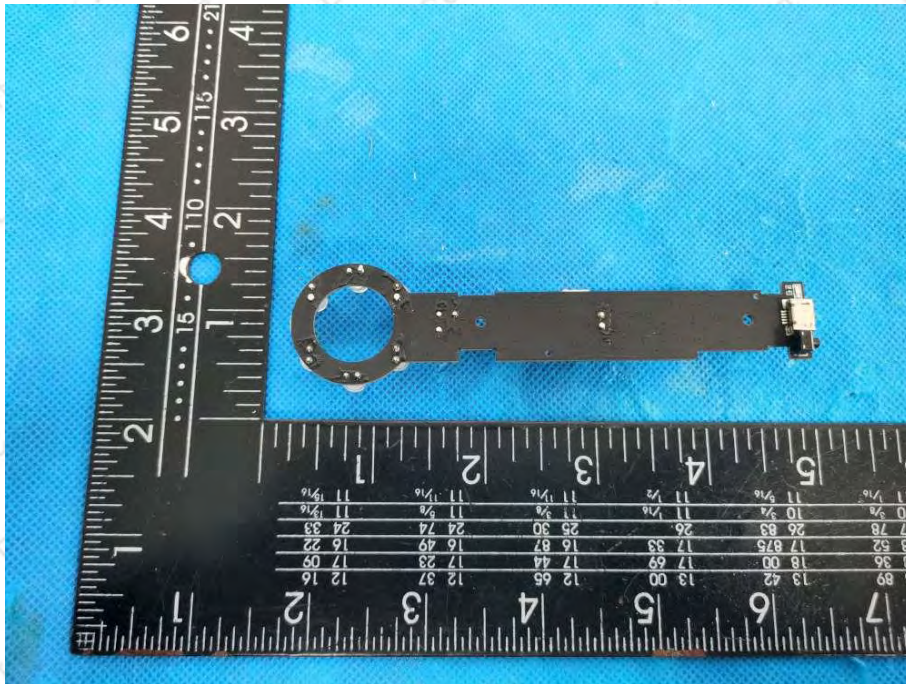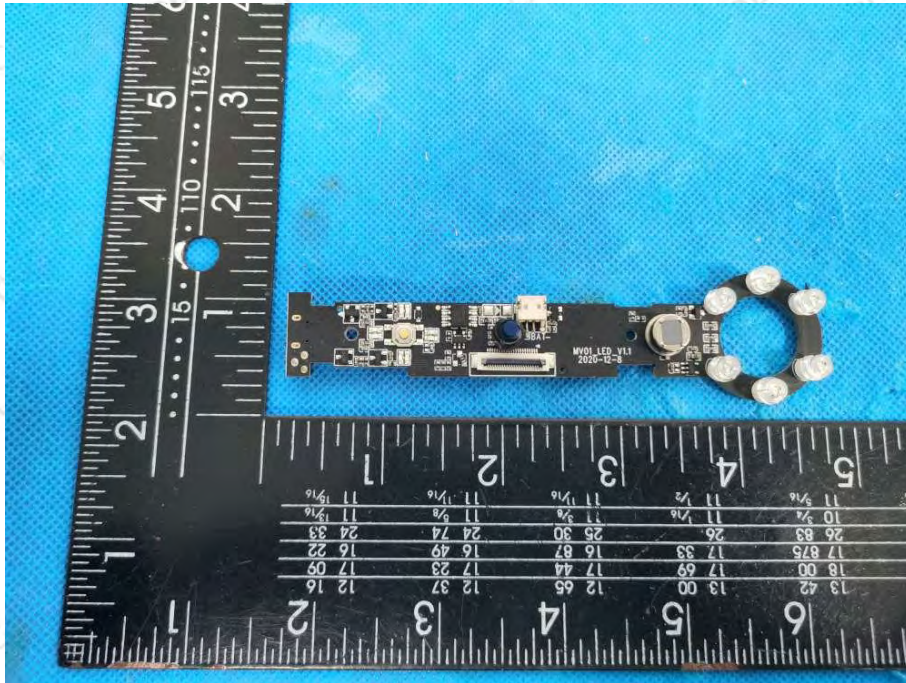

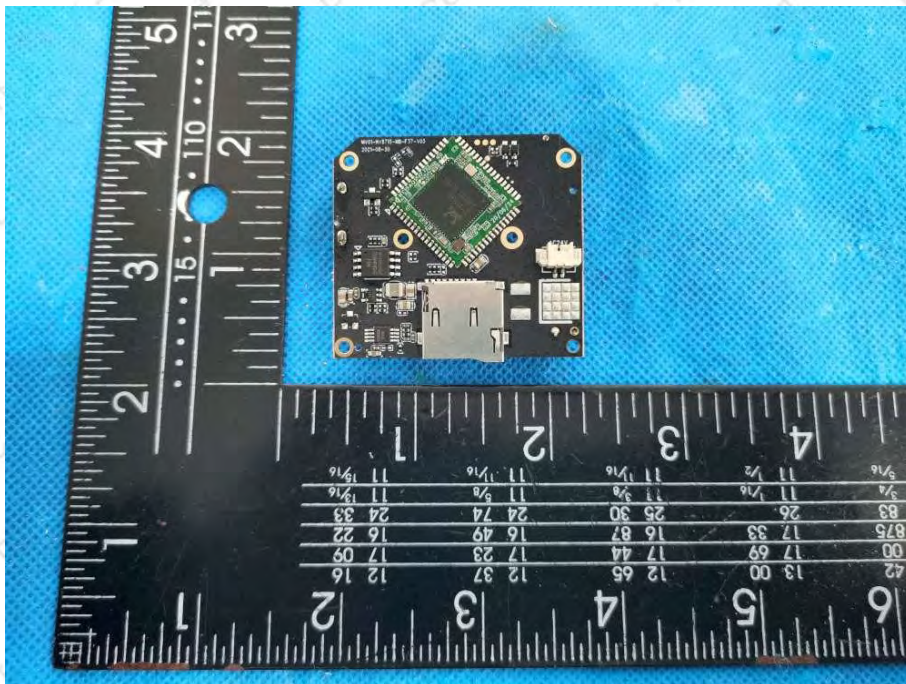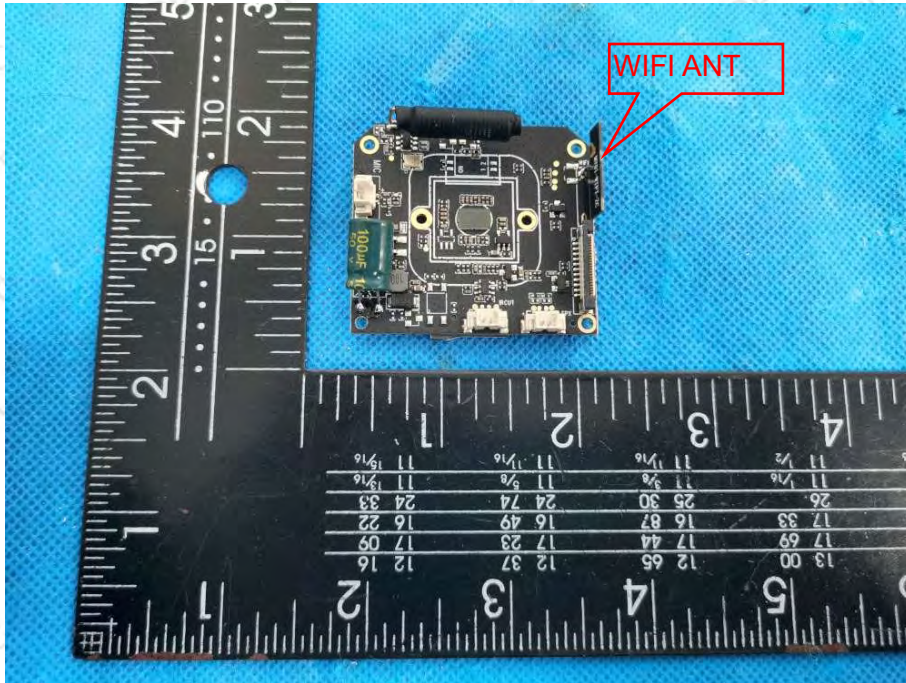



***** END OF REPORT *****